

CERTIFICATE OF COMPLIANCE **FCC PART 90 CERTIFICATION**

Test Lab:

CELLTECH RESEARCH INC.
Testing and Engineering Services
1955 Moss Court
Kelowna, B.C.
V1Y 9L3 Canada
Phone: 250 - 860-3130
Fax: 250 - 860-3110
Toll Free: 1-877-545-6287
e-mail: celltech@globuswireless.com
web site: www.globuswireless.com

Applicant Name:

ITRONIX CORPORATION
801 South Stevens Street
Spokane, WA 98024
Attn: Fred Phillips, Certification Engineer
Phone: 509-742-1506
Fax: 509-626-4204

FCC Classification:	Non-Broadcast Station Transmitter (TNB)
FCC Rule Part(s):	§90, §2
FCC ID:	KBCFEX21RIM802
Model(s):	FeX21
Equipment Type:	Rugged Handheld PC with RIM 802 DataTAC Radio Modem
Tx Frequency Range:	806 - 825 MHz
Rx Frequency Range:	851 - 870 MHz
Max. RF Output Power:	1.3 Watts
Frequency Tolerance:	2.5 PPM
Emission Designator:	20K0F1D

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in §2.947.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Celltech Research Inc. certifies that no party to this application has been denied FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).



Shawn McMillen
General Manager
Celltech Research Inc.



TABLE OF CONTENTS

1.1 GENERAL INFORMATION	1
2.1 MEASUREMENT PROCEDURES	2
Occupied Bandwidth (2.1049)	2
Spurious/Harmonic Emissions at Antenna Terminal (2.1051)	3
Radiated Spurious & Harmonic Emissions (2.1053)	3
Frequency Stability/Temperature Variation (2.1055)	3
3.1 TEST DATA	4
Effective Radiated Power Output	4
Field Strength of Spurious Radiation	5-7
Frequency Stability	8-9
4.1 LIST OF TEST EQUIPMENT	10
5.1 CONCLUSION	11

ATTACHMENT A:	COVER LETTER(S)
ATTACHMENT B:	ATTESTATION STATEMENT(S)
ATTACHMENT C:	TEST REPORT
ATTACHMENT D:	TEST PLOTS
ATTACHMENT E:	FCC ID LABEL & LOCATION
ATTACHMENT F:	TEST SETUP PHOTOGRAPHS
ATTACHMENT G:	EXTERNAL EUT PHOTOGRAPHS
ATTACHMENT H:	INTERNAL EUT PHOTOGRAPHS
ATTACHMENT I:	BLOCK DIAGRAM(S)
ATTACHMENT J:	CIRCUIT DIAGRAMS / DESCRIPTION
ATTACHMENT K:	PARTS LIST / TUNE UP PROCEDURE
ATTACHMENT L:	OPERATIONAL DESCRIPTION
ATTACHMENT M:	USER'S MANUAL / RF EXPOSURE WARNING
ATTACHMENT N:	SAR MEASUREMENT REPORT

MEASUREMENT REPORT - FCC PART 90

1.1 SCOPE

Measurement and determination of electromagnetic emissions (EME) from radio frequency devices for compliance with the technical rules and regulations of the Federal Communications Commission.

§2.1033(a) General Information

APPLICANT:

ITRONIX CORPORATION
801 South Stevens Street
Spokane, WA 98024
Attn: Fred Phillips, Certification Engineer
Phone: 509-742-1506
Fax: 509-626-4204

FCC ID	KBCFEX21RIM802
Model(s)	FeX21
EUT Type	Rugged Handheld PC with RIM 802 DataTAC Radio Modem
Classification	Licensed Non-Broadcast Station Transmitter (TNB)
Rule Part(s)	§90 , §2
Max. RF Output Power	1.3 Watts
Tx Freq. Range	806-825 MHz
Rx Freq. Range	851-870 MHz
Emission Designator	20K0F1D
Signal Modulation	FSK
Modes Tested	Unmodulated Carrier, RD-LAP, MDC

2.1 MEASUREMENT PROCEDURES

2.2 OCCUPIED BANDWIDTH - §2.1049(c)

The antenna output terminal of the EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator. The radio transmitter was operating at maximum output power with and without internal data modulation.

Test Results

A. UNMODULATED CARRIER – High power

30.0dBm conducted power with a 30dB matched attenuator and coaxial cable with a total loss of 1.0dB.

B. INTERNAL MODULATION

Please see attached test plots. 100% of the in-band modulation is below the specified mask per 90.210(g) for both RD-LAP and MDC protocols.

Emission Mask 806-821MHz (DataTAC)

FREQUENCY (MHz)	FORMULA	LIMIT (dBc)
-26500	$43+10 \log (P)$	- 46
-0.050	$43+10 \log (P)$	- 46
-0.050	$50+10 \log (P)$	- 53
-0.0175	$116 \log (f_d / 6.1)$	- 53
-0.010	$116 \log (f_d / 6.1)$ or $83 \log ((f_d / 5))$	- 25
-0.005	$83 \log ((f_d / 5))$	0.0
0.005	$83 \log ((f_d / 5))$	0.0
0.010	$116 \log (f_d / 6.1)$ or $83 \log ((f_d / 5))$	- 25
0.0175	$116 \log (f_d / 6.1)$	- 53
0.050	$50+10 \log (P)$	- 53
0.050	$43+10 \log (P)$	- 46
26500	$43+10 \log (P)$	- 46

2.3 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL - §2.1051

The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from 10MHz to 20GHz. The transmitter is modulated with a 2500Hz tone at a level of 16dB greater than that required to provide 50% modulation. The antenna output terminal of the EUT was connected to the input of a 50Ω spectrum analyzer through a matched 30dB attenuator and coaxial cable. The transmitter was operating at maximum power with and without internal data modulation.

2.4 RADIATED SPURIOUS AND HARMONIC EMISSIONS - §2.1053

Radiated and harmonic emissions above 1 GHz were measured at our 3-meter outdoor site. The EUT is placed on the turntable using the intended power source. A receiving antenna located 3 meters from the turntable receives any signal radiated from the transmitter and its operating accessories. The receiving antenna is varied from 1 to 4 meters and the polarization is varied (horizontal and vertical) to determine the worst-case emission level.

2.5 FREQUENCY STABILITY/TEMPERATURE VARIATION - §2.1055

The frequency stability of the transmitter is measured by:

- a) Temperature: The temperature is varied from -30°C to +60°C using an environmental chamber.
- b) Primary Supply Voltage: The primary supply voltage is varied from 85% to 115% of the voltage normally at the input to the device or at the power supply terminals if cables are not normally supplied. The EUT is tested down to the battery endpoint.

Specification – The minimum frequency stability shall be +/- 0.00025% at any time during normal operation.

Time Period and Procedure:

1. The carrier frequency of the transmitter and the individual oscillators is measured at room temperature (25°C to 27°C to provide a reference).
2. The equipment is subjected to an overnight “soak” at -30°C without any power applied.
3. After the overnight “soak” at -30°C (usually 14-16 hours), the equipment is turned on in a “standby” condition for one minute before applying power to the transmitter. Measurement of the carrier frequency of the transmitter and the individual oscillators is made within a three-minute interval after applying power to the transmitter.
4. Frequency measurements were made at 10°C intervals up to +60°C then back to room temperature. A minimum period of one and one half-hour is provided to allow stabilization of the equipment at each temperature level.

3.1 TEST DATA

3.2 EFFECTIVE RADIATED POWER OUTPUT - §2.1046

Freq. Tuned (MHz)	EUT Conducted Power (dBm)	Max. Field Strength of EUT (dBm)	Polarization (H/V)	Dipole Gain (dBd)	Dipole Forward Conducted Power (dBm)	ERP of EUT Dipole Gain + Dipole Forward Conducted Power	
						dBm	Watts
806	33.0	- 4.72	V	- 1.64	32.57	30.93	1.24
815	33.0	- 7.16	V	- 1.54	32.71	31.17	1.31
821	33.0	- 5.47	V	- 1.44	32.50	31.06	1.28

Notes:

ERP Measurements by Substitution Method:

The EUT was placed on a turntable 3-meters from the receive antenna. The field of maximum intensity was found by rotating the EUT approximately 360 degrees and changing the height of the receive antenna from 1 to 4 meters. The field strength was recorded from a calibrated spectrum analyzer for each channel being tested. A half-wave dipole was substituted in place of the EUT. The dipole was fed through a directional coupler and the power at the coupler port was monitored. A signal generator and power amplifier controlled the dipole, and the input level of the dipole was adjusted to the same field strength level as the EUT. The feed point for the dipole was then connected to a calibrated power meter and the power adjusted to read the same as the coupler port previously recorded, this is to account for any mismatch in impedance, which may occur at the dipole antenna. The conducted power at the antenna feed point was recorded. The forward power for the dipole was then determined and the ERP level was determined by adding the forward dipole power and the dipole gain in dB. For readings above 1GHz the above method is repeated using standard gain horn antennas.

3.3 FIELD STRENGTH OF SPURIOUS RADIATION – §2.1053

Operating Frequency: 806 MHz
Channel: Low
Measured Conducted Power: 33.00 dBm
Modulation: unmodulated carrier
Distance: 3 meters
Limit: $43 + 10 \log_{10} (W) = 39.47 \text{ dBc}$

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	ERP (dBm)	(dBc)
1612	≤ -76.96	30.66	H	-34.18	65.11
2418	≤ -75.89	34.33	H	-29.44	60.37
3224	≤ -78.56	37.28	H	-29.16	60.09
4030	≤ -79.53	40.44	H	-26.97	57.90
4836	< -100				

Notes:

1. The bandwidth is set per §90.210 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 10 MHz up to 20GHz.
3. $< -100\text{dBm}$ is below the floor of the spectrum analyzer.
4. The EUT is manipulated through 3 orthogonal axis and the worst-case emission are reported.
5. The EUT is placed 3.0 meters away from the receiving antenna and the ERP is calculated using the formula.

$$\text{ERP (dBm)} = 10 \log_{10} ((r(\text{mV/m})/1 \times 10^6)^2 / 49.2/1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 10 \log_{10} [(3 \times \text{FS}/1 \times 10^6)^2 / (49.2) \times 1000]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS})/1 \times 10^6\}^2 / 49.2$$

Note: The antenna factor and cable loss were determined prior to the test.

Operating Frequency: 815 MHz
Channel: Mid
Measured Conducted Power: 33.00dBm
Modulation: unmodulated carrier
Distance: 3 meters
Limit: $43 + 10 \log_{10} (W) = 39.47 \text{ dBc}$

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	ERP (dBm)	(dBc)
1630	≤ -77.22	30.58	H	-34.52	65.69
2445	≤ -76.10	34.25	H	-29.73	60.90
3260	≤ -78.08	37.22	H	-28.74	59.91
4075	≤ -76.83	40.33	H	-24.38	55.55
4890	< -100				

Notes:

1. The bandwidth is set per §90.210 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 10 MHz up to 20GHz.
3. < -100dBm is below the floor of the spectrum analyzer.
4. The EUT is manipulated through 3 orthogonal axis and the worst-case emission are reported.
5. The EUT is placed 3.0 meters away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} (((r(\text{mV/m})/1 \times 10^6)^2 / 49.2/1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 10 \log_{10} [(3 \times \text{FS}/1 \times 10^6)^2 / (49.2) \times 1000]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS})/1 \times 10^6\}^2 / 49.2$$

Note: The antenna factor and cable loss were determined prior to the test.

Operating Frequency: 821 MHz
Channel: High
Measured Conducted Power: 33.00 dBm
Modulation: unmodulated carrier
Distance: 3 meters
Limit: $43 + 10 \log_{10} (W) = 39.47 \text{ dBc}$

Frequency (MHz)	Level (dBm)	AFCL (dB)	POL (H/V)	ERP (dBm)	(dBc)
1642	≤ -77.57	30.55	H	-34.90	65.96
2463	≤ -77.21	34.22	H	-30.87	61.93
3284	≤ -78.80	37.15	H	-29.53	60.59
4105	≤ -78.56	40.22	H	-26.22	57.28
4926	< -100				

Notes:

1. The bandwidth is set per §90.210 (RBW = 1MHz, VBW = 1MHz).
2. The spectrum was checked from 10 MHz up to 20GHz.
3. < -100dBm is below the floor of the spectrum analyzer.
4. The EUT is manipulated through 3 orthogonal axis and the worst-case emission are reported.
5. The EUT is placed 3.0 meters away from the receiving antenna and the ERP is calculated using the formula:

$$\text{ERP (dBm)} = 10 \log_{10} (((r(\text{mV/m})/1 \times 10^6)^2 / 49.2) / 1 \times 10^{-3})$$

$$\text{ERP (dBm)} = 10 \log_{10} [(3 \times \text{FS} / 1 \times 10^6)^2 / (49.2) \times 1000]$$

$$\text{ERP (Watts)} = \{(3 \times \text{FS}) / 1 \times 10^6\}^2 / 49.2$$


Note: The antenna factor and cable loss were determined prior to the test.

3.4 FREQUENCY STABILITY - § 2.1055

Operating Frequency: 815,000,000 Hz
Channel: Mid
Reference Voltage: 4.75 VDC
Deviation Limit: ± 0.00025 % or 2.5 ppm

VOLTAGE (%)	POWER (VDC)	TEMP (°C)	FREQ. (Hz)	Deviation (%)
100 %	4.75	+ 20 (Ref)	815,000,000	0.000000
100 %		- 30	814,998,936	0.000131
100 %		- 20	814,999,691	0.000038
100 %		- 10	814,999,921	0.000010
100 %		0	814,999,336	0.000081
100 %		+ 10	815,000,082	-0.000010
100 %		+ 20	814,999,232	0.000094
100 %		+ 25	814,999,829	0.000021
100 %		+ 30	814,999,785	0.000026
100 %		+ 40	814,999,969	0.000004
100 %		+ 50	815,000,551	-0.000068
100 %		+ 60	814,998,989	0.000124
85 %	N/A	+ 20	815,000,000	0.000000
115 %	N/A	+ 20	815,000,000	0.000000
BATT. ENDPOINT	N/A	+ 20	815,000,000	0.000000

FREQUENCY STABILITY - § 2.1055

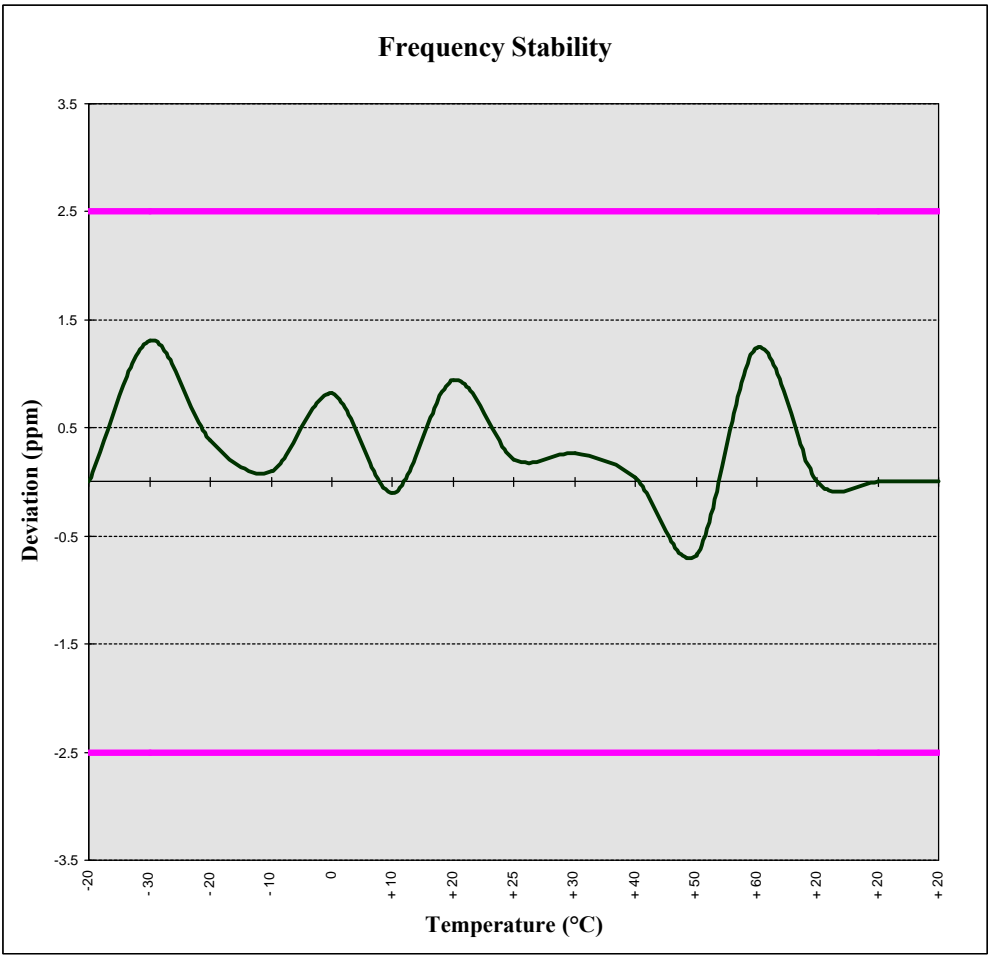

4.1 TEST EQUIPMENT


<u>Type</u>	<u>Model</u>	<u>Calib. Date</u>	<u>Serial No.</u>
Signal Generator	HP 8648D (9kHz-4.0GHz)	Nov 1999	3847A00611
Gigatronics Power Meter	8652A	Oct 1999	1835272
Gigatronics Power Sensor (2)	80701A (0.05-18GHz)	Oct 1999	1833535, 1833542
Amplifier Research Power Amp.	5S1G4 (5W, 800MHz-4.2GHz)	N/A	26235
Microwave System Amplifier	HP 83017A (0.5-26.5GHz)	N/A	3123A00587
Network Analyzer	HP 8753E (30kHz-3GHz)	Nov 1999	US38433013
Audio Analyzer	HP 8903B	March 1999	3729A18691
Modulation Analyzer	HP 8901A	March 1999	3749A07154
Frequency Counter	HP 53181A (3GHz)	May 1999	3736A05175
DC Power Supply	HP E3611A	N/A	KR83015294
Multi-Device Controller	EMCO 2090	N/A	9912-1484
Mini Mast	EMCO 2075	N/A	0001-2277
Turntable	EMCO 2080-1.2/1.5	N/A	0002-1002
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	Sept 1998	9120A-239
Horn Antenna	Chase BBHA 9120-A (0.7-4.8GHz)	Sept 1998	9120A-240
Roberts Dipoles	Compliance Design (2 sets) 3121C	June 2000	
Spectrum Analyzer	HP 8594E	March 2000	3543A02721
Spectrum Analyzer	HP E4408B	Nov 1999	US39240170
Shielded Screen Room	Lindgren R.F. 18W-2/2-0	N/A	16297
Environmental Chamber	ESPEC ECT-2 (Temperature/Humidity)	Feb 2000	0510154-B

5.1 CONCLUSION


The data collected shows that the Itronix FeX21 Rugged Handheld PC with RIM 802 DataTAC Radio Modem FCC ID: KBCFEX21RIM802 complies with all the requirements of Parts 2 and 90 of the FCC rules.

TEST PLOTS


CONDUCTED SPURIOUS – Channel 806

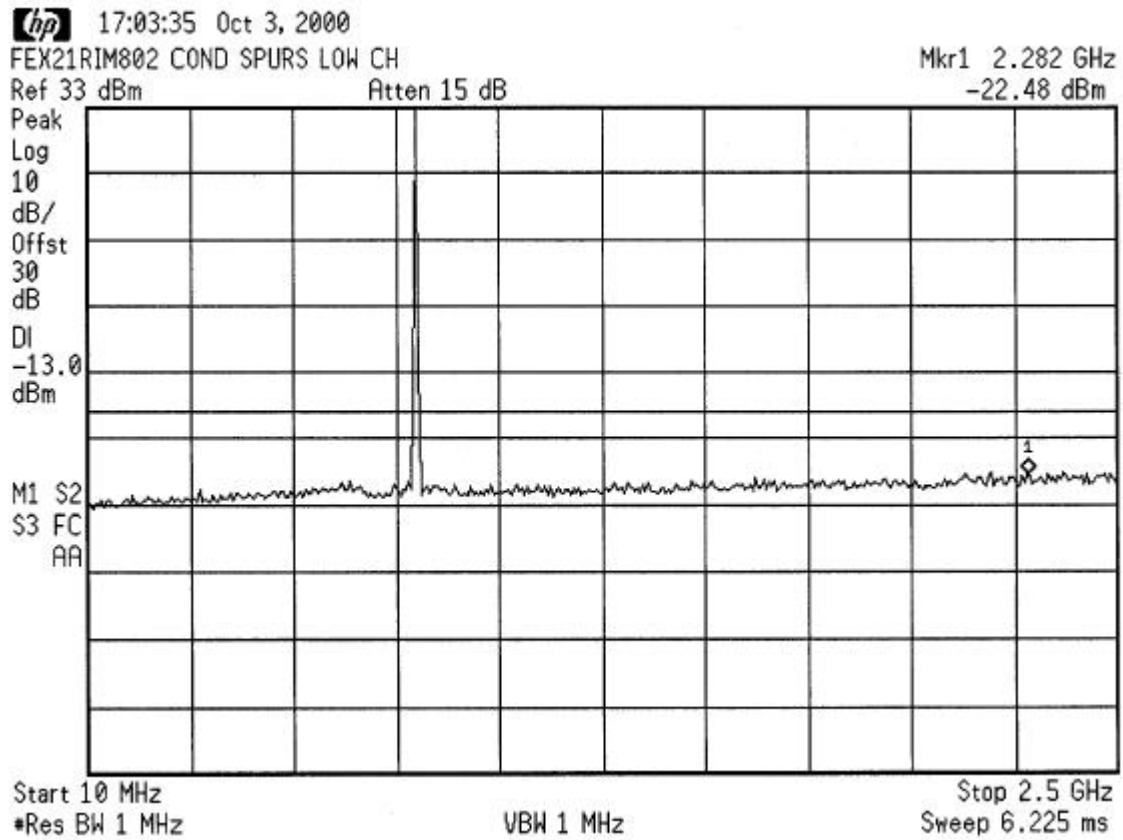


CONDUCTED SPURIOUS – Channel 806

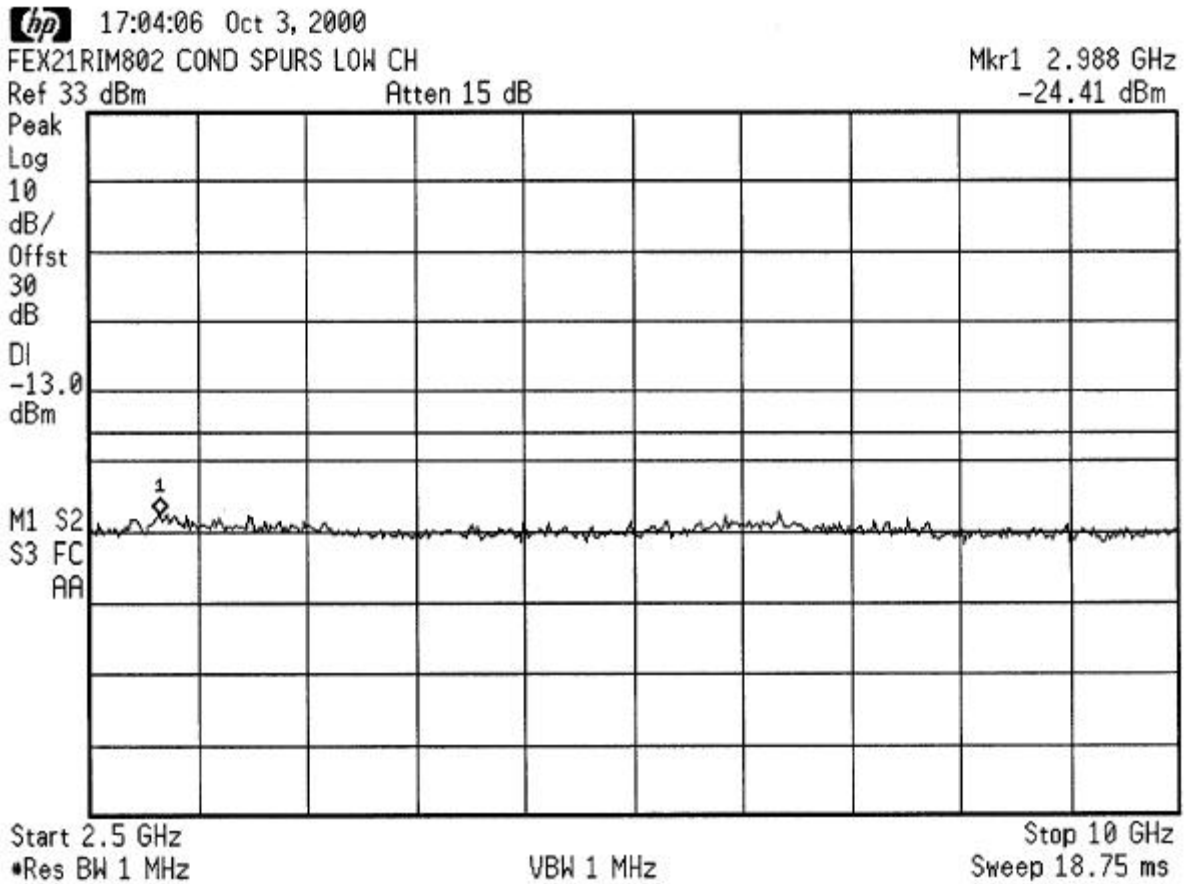


CONDUCTED SPURIOUS – Channel 806

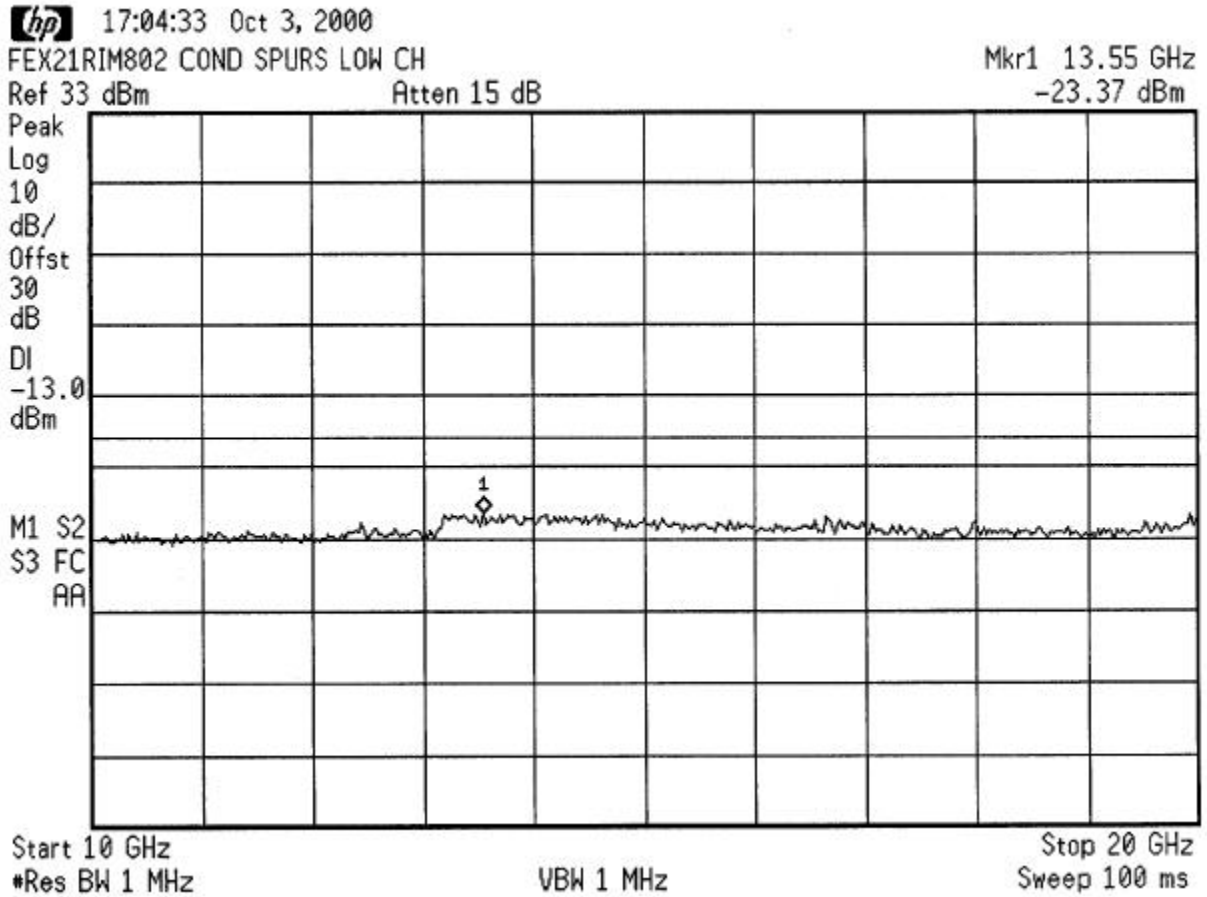

CONDUCTED SPURIOUS – Channel 815

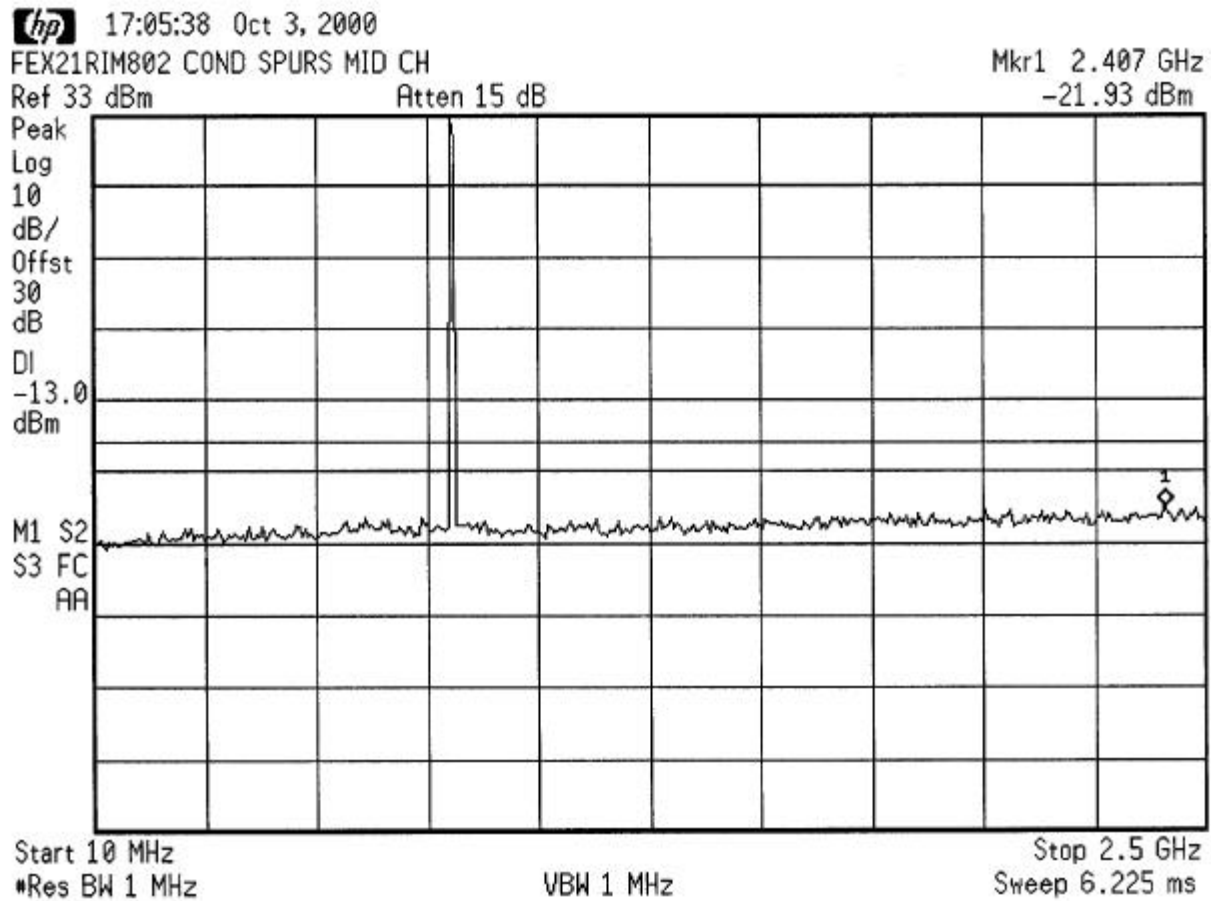

CONDUCTED SPURIOUS – Channel 815

 17:06:08 Oct 3, 2000

FEX21RIM802 COND SPURS MID CH

Mkr1 2.988 GHz


Ref 33 dBm

Atten 15 dB

-24.12 dBm

Peak
Log
10
dB/
Offst
30
dB
DI
-13.0
dBm

M1 S2
S3 FC
AA

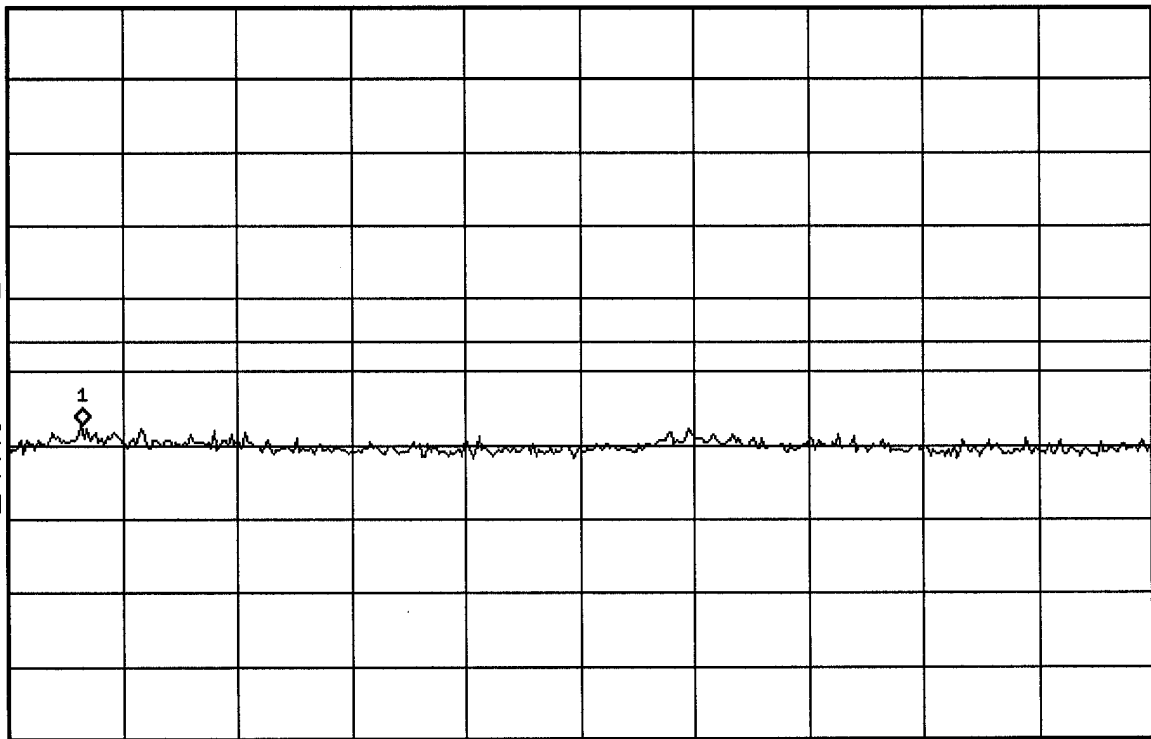


Start 2.5 GHz
*Res BW 1 MHz


VBW 1 MHz

Stop 10 GHz
Sweep 18.75 ms


CONDUCTED SPURIOUS – Channel 815

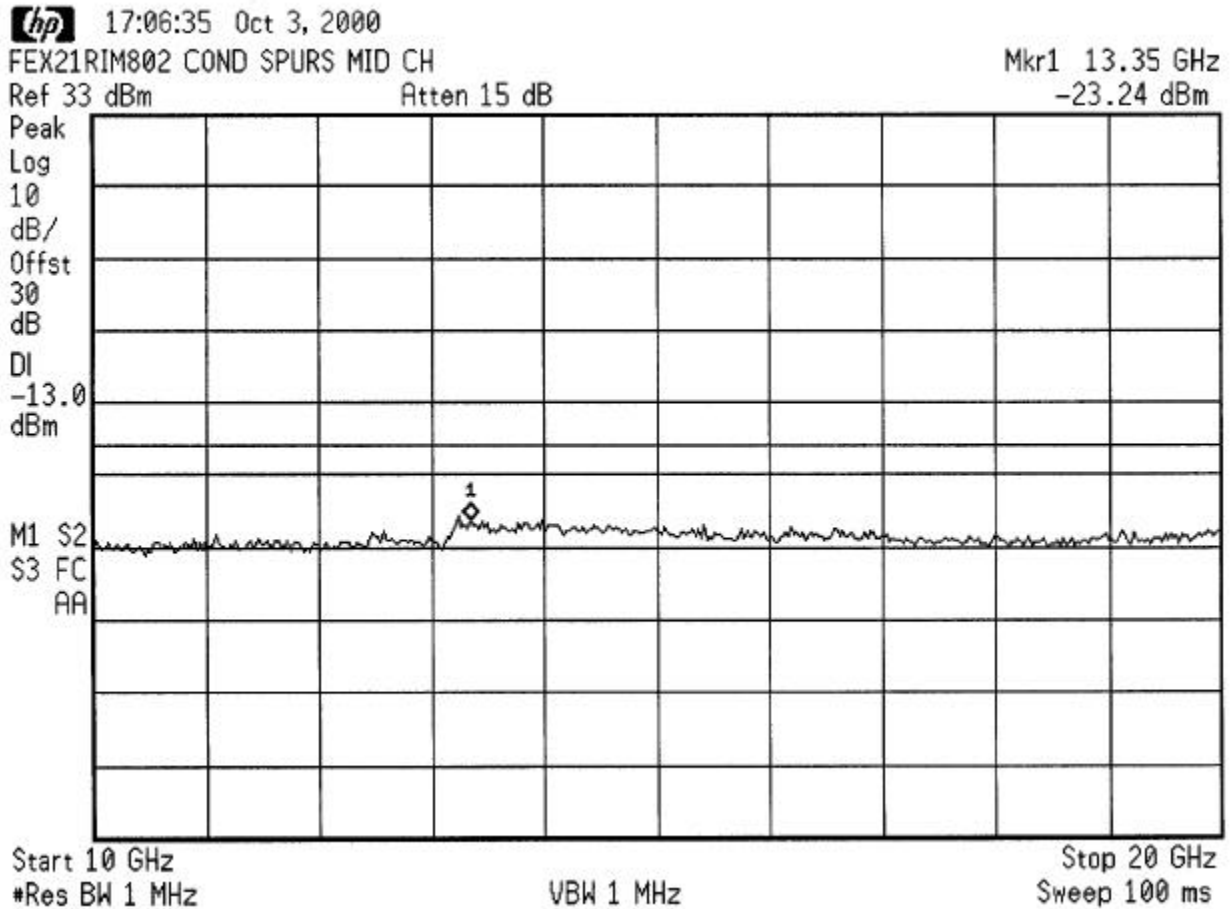


CONDUCTED SPURIOUS – Channel 821

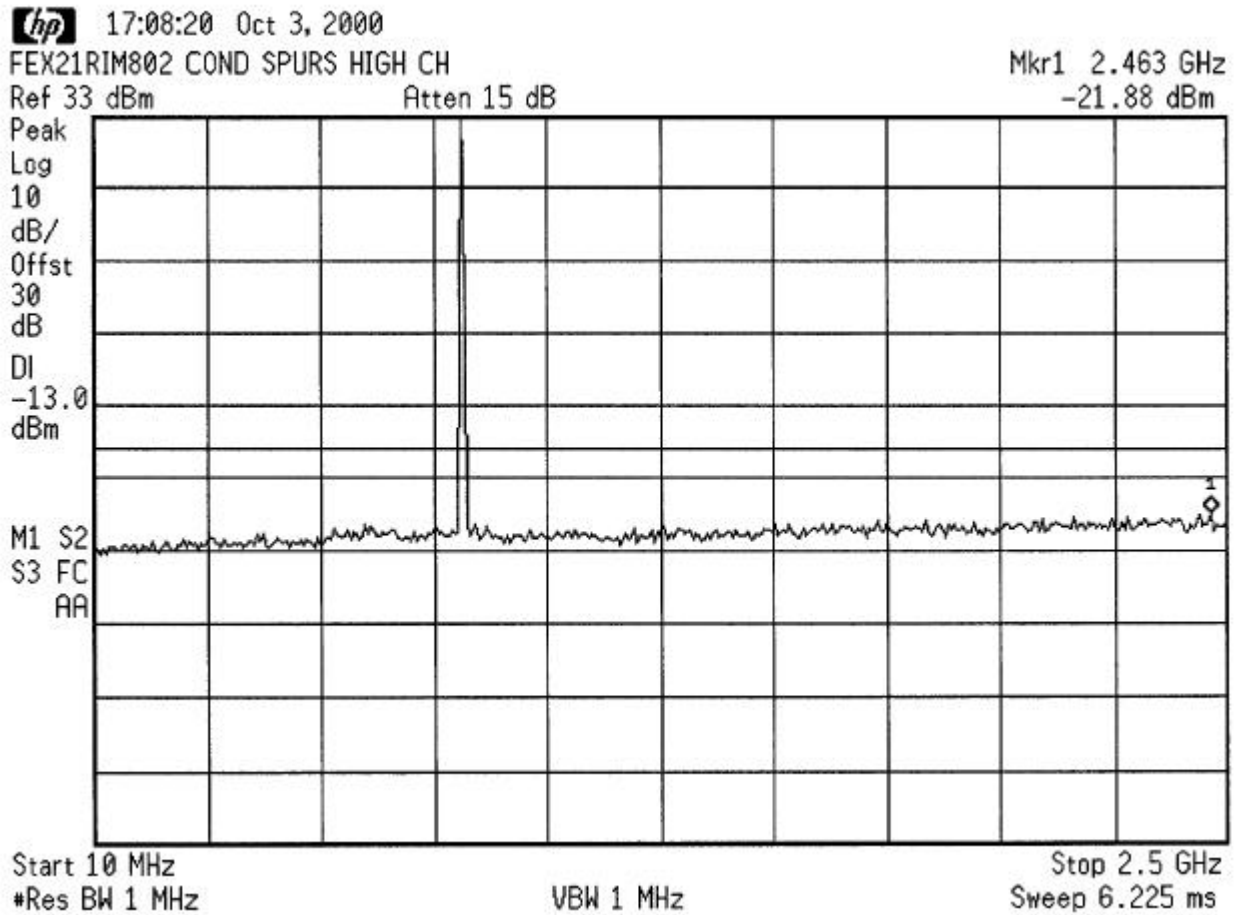

CONDUCTED SPURIOUS – Channel 821

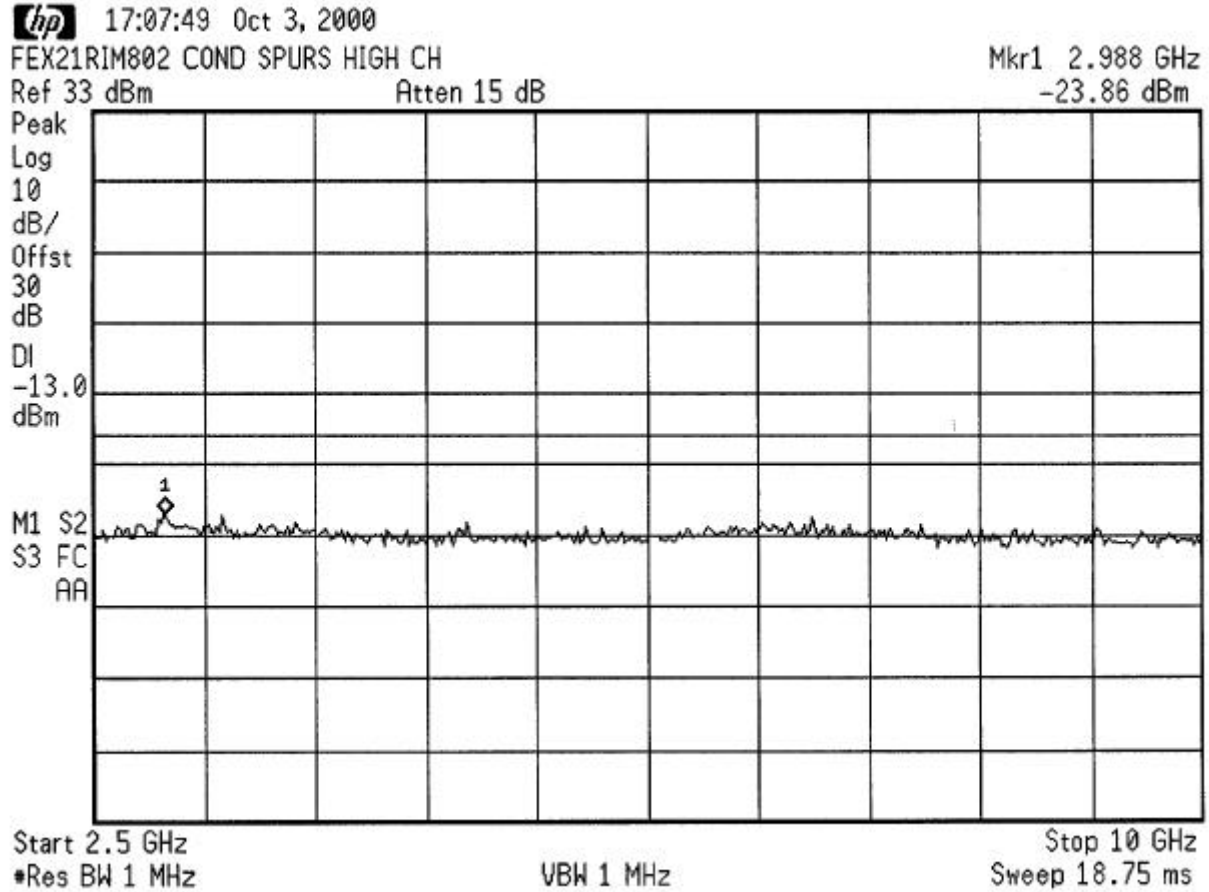

CONDUCTED SPURIOUS – Channel 821

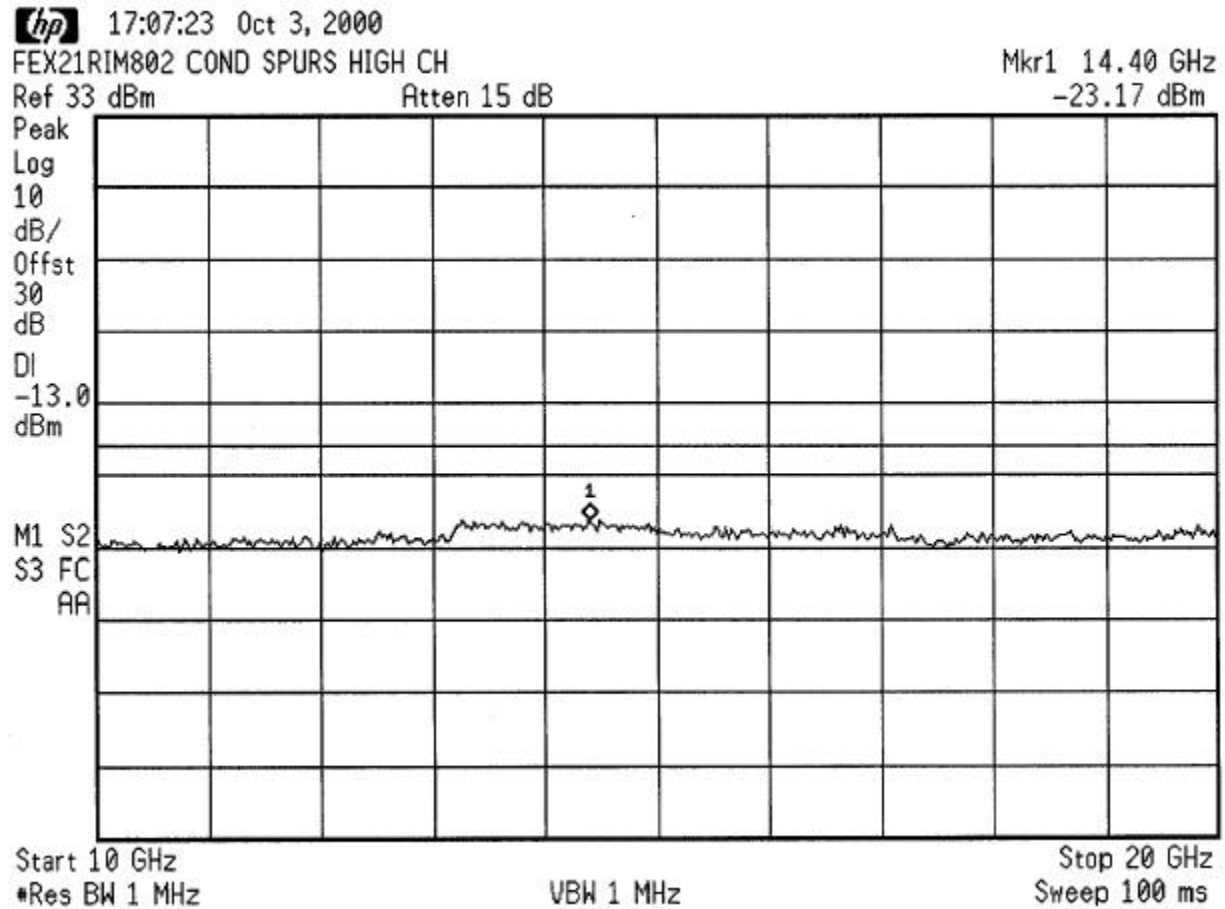

OCCUPIED BANDWIDTH
Channel 815
RD-LAP

14: 03: 13 OCT 03. 2000


~~hp~~ FEX21RIM802

REF 33.0 dBm

AT 20 dB

PEAK
LOG
10
dB/
OFFST
30.0
dB

WA SB
SC FC
CORR

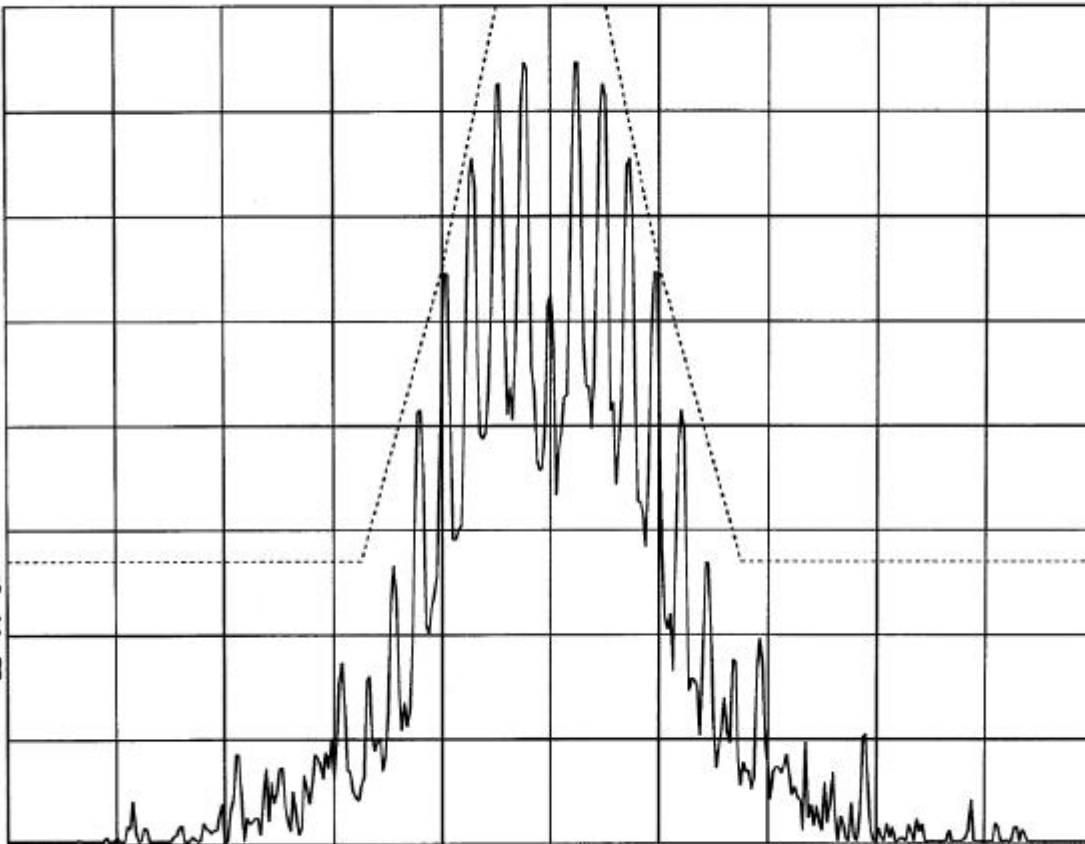

CLEAR
WRITE A

MAX
HOLD A

VIEW A

BLANK A

Trace
A B C

More
1 of 3

CENTER 815.0000 MHz

#RES BW 300 Hz

VBW 300 Hz


SPAN 100.0 kHz

SWP 3.33 sec

OCCUPIED BANDWIDTH
Channel 815
MDC

14:04:08 OCT 03, 2000
FEX21RIM802

REF 33.0 dBm AT 20 dB

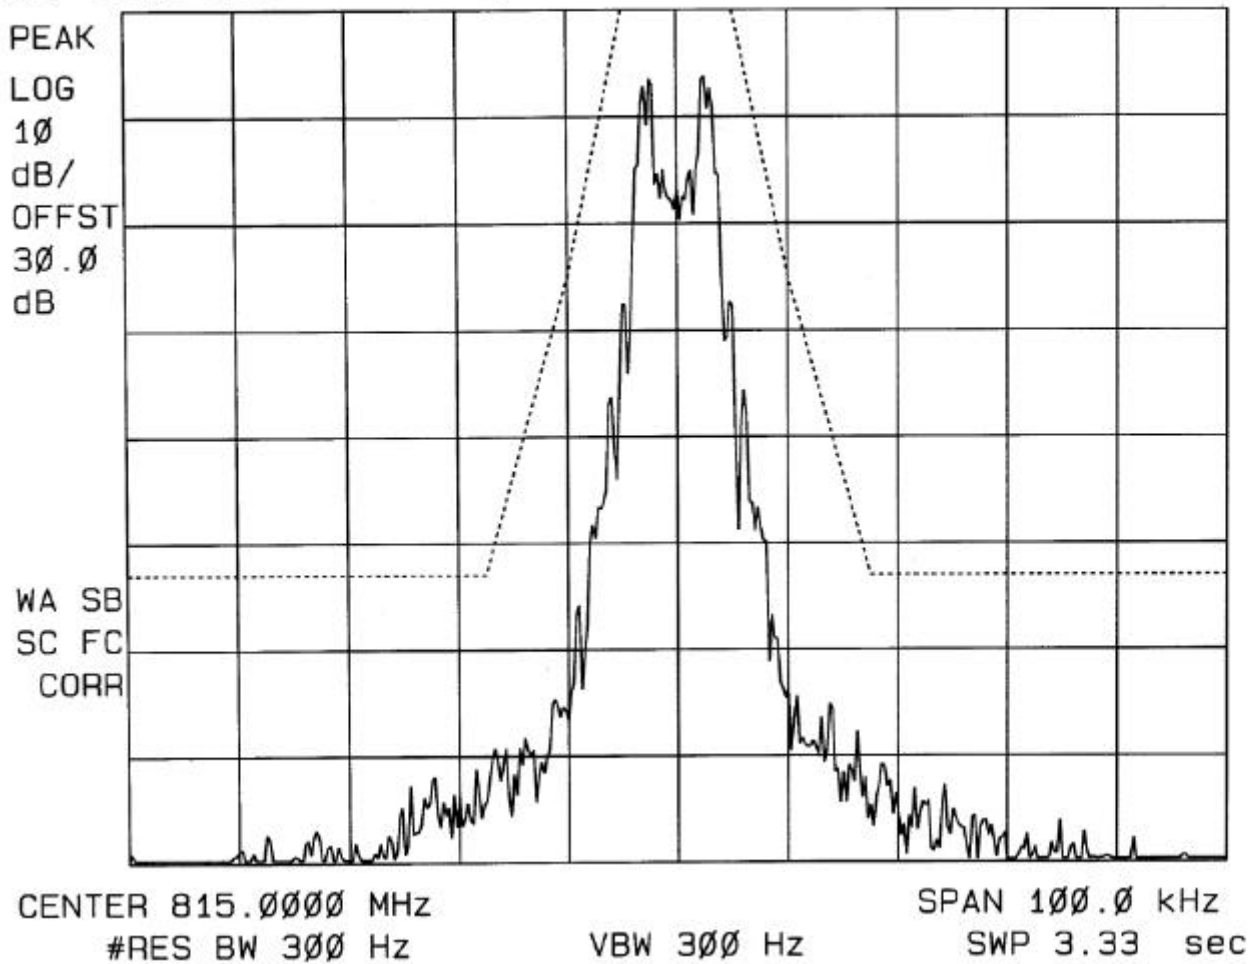

CLEAR
WRITE A

MAX
HOLD A

VIEW A

BLANK A

Trace
A B C

More
1 of 3

OCCUPIED BANDWIDTH
Channel 815
UNMODULATED CARRIER

14:01:32 OCT 03, 2000
FEX21RIM802

REF 33.0 dBm AT 20 dB

