

FCC Part 15B Compliance Test Report

Test Report no.:	Tre_FCC_0648_08.doc	Date of Report:	14.12.2006
Number of pages:	10	Customer's Contact person:	Pasi Tauriainen
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation P.O. Box 86 Joensuunkatu 7 FIN-24101 SALO, FINLAND Tel. +358 (0) 7180 08000 Fax. +358 (0) 7180 44277
FCC listing no.:	94436		
IC recognition no.:	3608		
Tested devices/ accessories:	Bluetooth headset HS-78W / AC charger AC-3		
FCC ID:	PYA1YH	IC:	661V-1YH
Supplement reports:			
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart B, ANSI C63.4 (2003), ICES-003, CISPR 22 and IC standards RSS-132, RSS-133 and RSS-210. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document.		
Date and signature for the contents:			

Jari Jantunen, System Manager

1. Summary for FCC Part 15B Compliance Test Report

Date of receipt	29.11.2006
Testing completed	
The customer's contact person	Pasi Tauriainen
Test Plan referred to	\EMC\TESTPLAN\
Notes	-
Document name	T:\Projects\accessor\BT_Headset\Ikarus\EMC\Results\FCC\Tre_FCC_0648_08.doc

1.1. EUT and Accessory Information

The EUT is a Bluetooth device. WCDMA band is tested in idle mode. Bluetooth is tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Bluetooth headset	HS-78W	822	B4.5	B3.3	RC4	40891
AC Charger	AC-3	-	1.3	1.1	-	40890

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in ICES-003	Name of the test	Result
15.107, a	5.3	AC powerline conducted emissions	PASSED
15.109, a	5.5	Radiated emissions	PASSED

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Tampere Laboratory.


CONTENTS

1. Summary for FCC Part 15B Compliance Test Report.....	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results.....	2
2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3).....	4
2.1. Test setup	4
2.2. Test method and limit.....	4
2.3. Bluetooth Test results	5
3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9) 6	6
3.1. Test setup	6
3.2. Test method and limit.....	6
3.3. Bluetooth Test results	7
4. Test Equipment.....	10
4.1. Conducted measurements	10
4.2. Radiated measurements	10

2. AC powerline conducted emissions (FCC §15.107, ICES-003 section 5.3)

EUT with DUT number	HS-78W DUT 40891
Accessories with DUT numbers	AC-3 DUT 40890
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	20 / 49 / 101.3
Date of measurements	1.12.2006
Measured by	Jari Jantunen

2.1. Test setup



2.2. Test method and limit

The measurement is made according to ANSI C63.4-2003 as follows:

The EUT is placed on a wooden table 80 cm above the reference groundplane.

The EUT is connected via LISN to a test power supply.

The measurement results are obtained as described below:

$$U [dB\mu V] = U_{RX} + A_{TOT}$$


Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable and pulse limiter attenuations.

CISPR 22 Class B limits

Frequency range [MHz]	Quasi peak limit [dBμV]	Average limit [dBμV]
0.15 - 0.5	66 - 56	56 - 46
0.5 - 5	56	46
5 - 30	60	50

2.3. Bluetooth Test results

TX mode, channel 40 / 2442 MHz

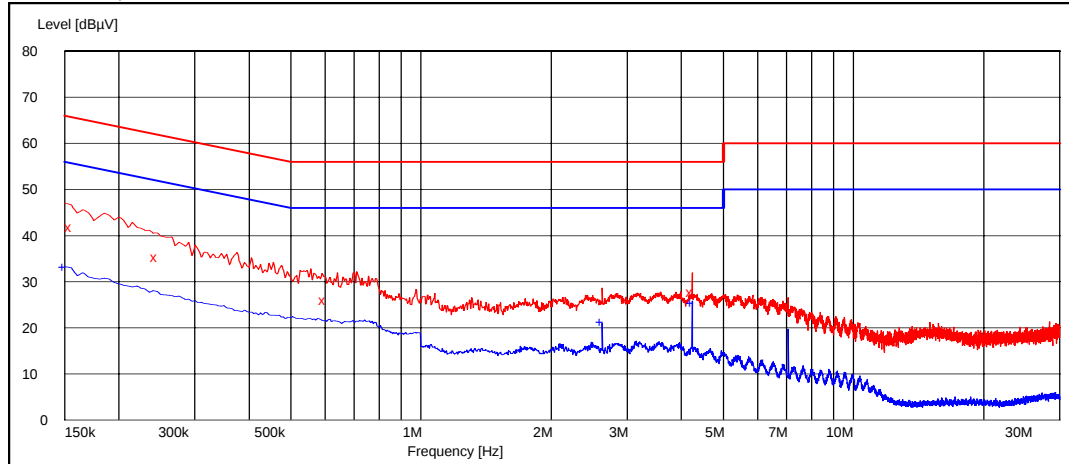

Quasi peak (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.155000	41.90	L1	PASSED
0.245000	35.40	L1	PASSED
0.600000	26.10	L1	PASSED
4.240000	27.80	N	PASSED


Average (RBW: 9 kHz)

Frequency [MHz]	U [dBμV]	Line	Result
0.150000	33.20	N	PASSED
2.625000	21.20	L1	PASSED
4.240000	25.50	L1	PASSED

3. Radiated emissions (FCC §15.109, ICES-003 section 5.5, RSS-132 6.6, RSS-133 9)

EUT with DUT number	HS-78W DUT 40891
Accessories with DUT numbers	AC-3E DUT 40890
Operation Voltage [V] / [Hz]	115 / 60
Result	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	22-23 / 44-47 / 100.1-100.9
Date of measurements	12-13.12.2006
Measured by	Jari Jantunen

3.1. Test setup

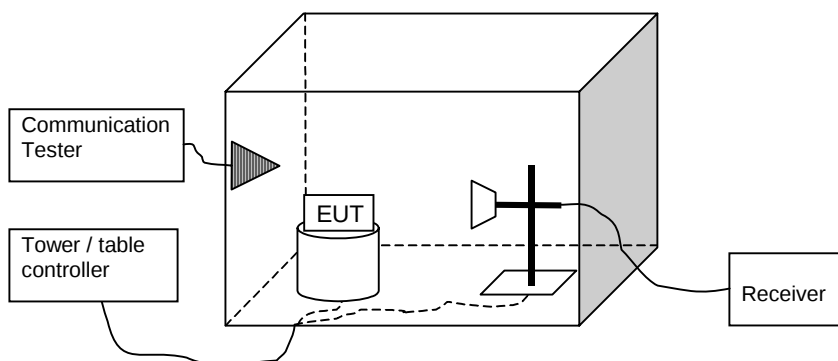

3.2. Test method and limit

The measurement is made according to ANSI C63.4-2003as follows:

The measurement is performed in the Semi-Anechoic Chamber with conducting metal floor.

The measurement distance is 3 m.

The EUT is placed on a nonconductive plate at 80 cm height.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu\text{V/m}] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + AF - G_{PREAMP}$).

CISPR 22 and FCC Part 15 Class B limits (3 m measurement distance)

Frequency range [MHz]	Quasi peak limit [dBμV/m]	Average limit [dBμV/m]	Peak limit [dBμV/m]
30 – 230	40	-	-
230 – 1000	47	-	-
Above 1000	-	54	74

3.3. Bluetooth Test results

TX mode, channel 0 / 2402 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	55.20	575.44	56.90	-1.70	HORIZONTAL	PASSED
7206.000000	41.90	124.45	40.20	1.70	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4804.000000	44.30	164.06	46.00	-1.70	HORIZONTAL	PASSED
7206.000000	29.50	29.85	27.80	1.70	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 120 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
30.400000	13.00	4.47	18.30	-5.30	VERTICAL	PASSED
38.135872	7.00	2.24	18.40	-11.40	VERTICAL	PASSED

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.767535	53.30	462.38	54.90	-1.60	HORIZONTAL	PASSED
4884.269539	54.00	501.19	55.60	-1.60	HORIZONTAL	PASSED

7279.063126	42.80	138.04	40.40	2.40	VERTICAL	D PASSE
7333.165331	43.80	154.88	41.50	2.30	VERTICAL	D PASSE
7416.337675	42.90	139.64	40.10	2.80	VERTICAL	D PASSE
7418.839679	42.80	138.04	40.00	2.80	VERTICAL	D PASSE
17914.329659	55.00	562.34	33.90	21.10	VERTICAL	D PASSE

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4883.767535	47.10	226.46	48.70	-1.60	HORIZONTAL	PASSED
4883.769539	47.80	245.47	49.40	-1.60	HORIZONTAL	PASSED
7278.063126	30.00	31.62	27.60	2.40	VERTICAL	PASSED
7333.165331	29.60	30.20	27.30	2.30	VERTICAL	PASSED
7418.339679	30.10	31.99	27.30	2.80	VERTICAL	PASSED
7420.837675	30.00	31.62	27.20	2.80	VERTICAL	PASSED
17918.829659	42.10	127.35	21.00	21.10	VERTICAL	PASSED

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	55.50	595.66	56.70	-1.20	HORIZONTAL	PASSED
7440.000000	43.70	153.11	41.00	2.70	HORIZONTAL	PASSED

Average (RBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.000000	44.70	171.79	45.90	-1.20	HORIZONTAL	PASSED
7440.000000	30.30	32.73	27.60	2.70	HORIZONTAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM37610	Spectrum analyzer	FSU	R&S	22/24, 15C
TM37678	Radio communication tester	CMU-200	R&S	22/24, 15C
	Attenuator 10 dB	6251.17.A	Huber+Suhner AG	22/24, 15C
TM37499	Power splitter	11667A	Agilent	22/24, 15C
	Temperature chamber	VT4002	Vötsch	22/24, 15C
TM38112	DC power supply	6632A	Agilent	22/24, 15C
TM38111	Multimeter	34401A	Agilent	22/24, 15C
	EMI Test receiver	ESPC	R&S	15C, 15B
TM37773	Radio communication tester	CMU-200	R&S	15C, 15B
TM38631	Signal generator	83640L	Agilent	15C, 15B
TM38114	DC power supply	6632A	Agilent	15C, 15B
TM22835	Multimeter	87	Fluke	15C, 15B
TM30600	Pulse Limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5/	R&S	15C, 15B
TM30636	LISN 50 µH	L2-16/	PMM	15C, 15B

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM30599	3m semi-anechoic chamber		TDK	22/24, 15C, 15B
TM38845	EMI receiver	ESI 40	R&S	22/24, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	MITEQ	22/24, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	MITEQ	22/24, 15C, 15B
TM37516	Biconilog antenna	HL562	R&S	22/24, 15C, 15B
TM26496	Double ridged waveguide antenna	3115	EMCO	22/24, 15C, 15B
TM39158	Horn antenna	3116	EMCO	22/24, 15C, 15B
TM26492	Reference dipole set	UHAP/VHAP	Schwarzbeck	22/24, 15C, 15B
TM37501	Dipole antenna	3125-870	EMCO	22/24
TM37502	Dipole antenna	3125-1880	EMCO	22/24
TM37773	Radio communication tester	CMU-200	R&S	22/24, 15C, 15B
TM38631	Signal generator	83640L	Agilent	22/24, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24, 15C, 15B
	High pass filter	WHK2010-10SS	Trilithic	22/24, 15C, 15B
	Low pass filter	WLK1750-10SS	Trilithic	22/24, 15C, 15B
TM26511	Tunable notch filter	WRCA870	Wainwright	22/24
TM38215	Tunable notch filter	WRCD1850/1910-0.2/40	Wainwright	22/24
TM38214	Band reject filter	WRCT 2402/2480-2400/2483.5-30	Wainwright	15C
TM30642	Turntable controller	HD-100	Deisel	22/24, 15C, 15B
TM26500	Turntable	DS412	Deisel	22/24, 15C, 15B
TM38842	Antenna mast controller	2090	EMCO	22/24, 15C, 15B
TM38843	Antenna mast	2075	EMCO	22/24, 15C, 15B
TM38114	DC power supply	6632A	Agilent	22/24, 15C, 15B
TM22835	Multimeter	87	Fluke	22/24, 15C, 15B