


Mode:	802.11 b Transmitting	Channel:	2412MHz
Remark:			


Test Graph

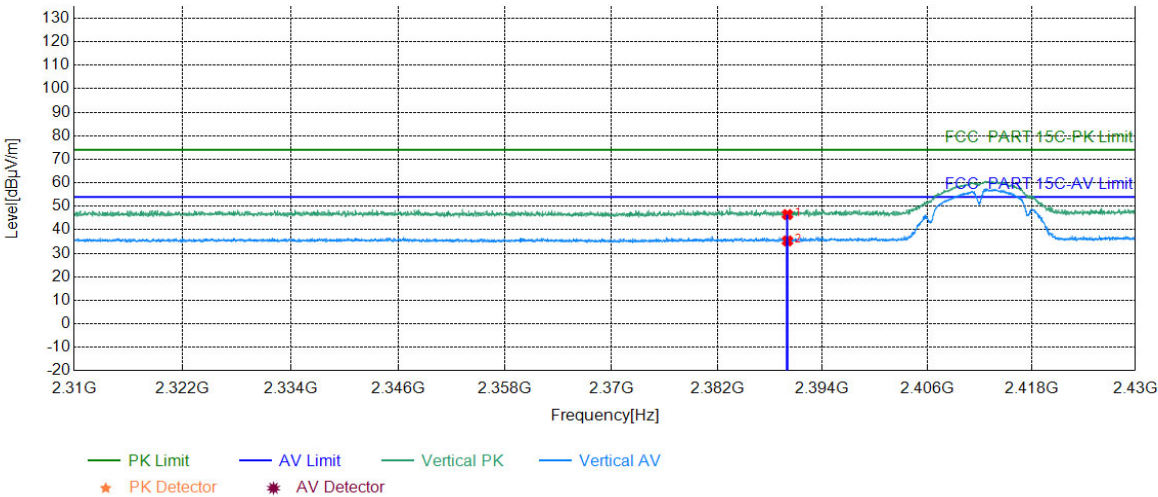

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	40.72	46.49	74.00	27.51	PASS	Vertical	PK
2	2390.0000	5.77	29.52	35.29	54.00	18.71	PASS	Vertical	AV

Mode:	802.11 b Transmitting	Channel:	2462MHz
Remark:			


Test Graph

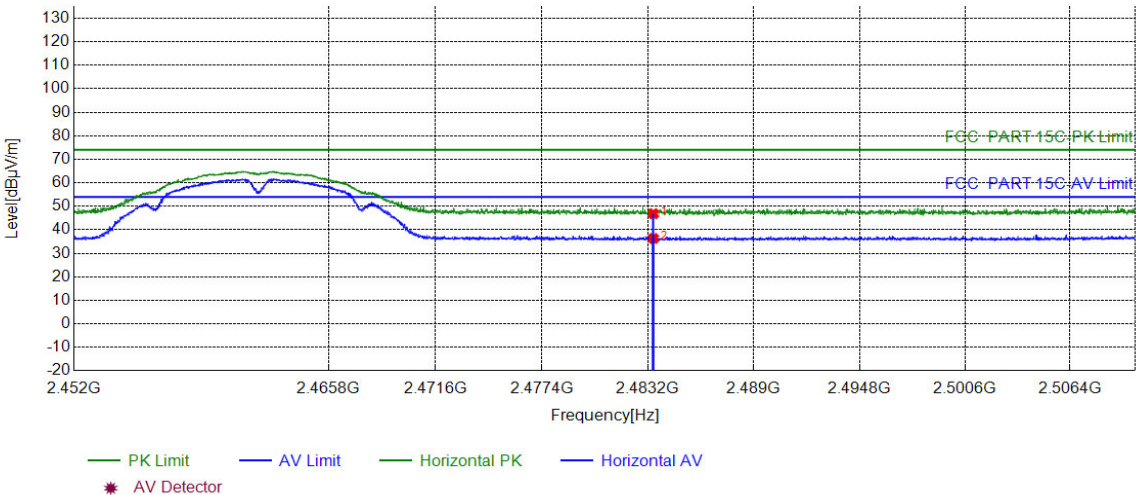

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	40.29	46.86	74.00	27.14	PASS	Horizontal	PK
2	2483.5000	6.57	29.75	36.32	54.00	17.68	PASS	Horizontal	AV

Mode:	802.11 b Transmitting	Channel:	2462MHz
Remark:			


Test Graph

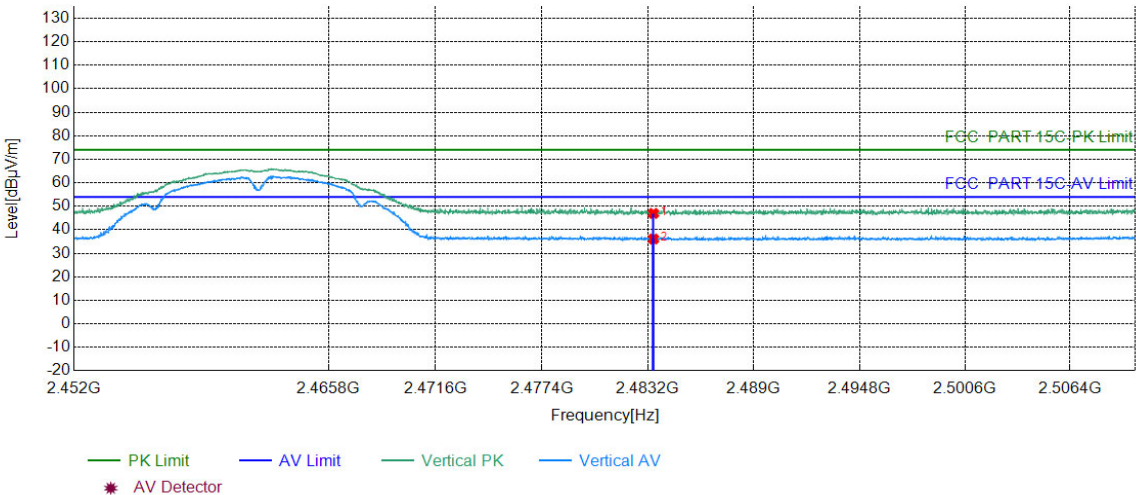

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	40.41	46.98	74.00	27.02	PASS	Vertical	PK
2	2483.5000	6.57	29.51	36.08	54.00	17.92	PASS	Vertical	AV

Mode:	802.11 g Transmitting	Channel:	2412MHz
Remark:			


Test Graph

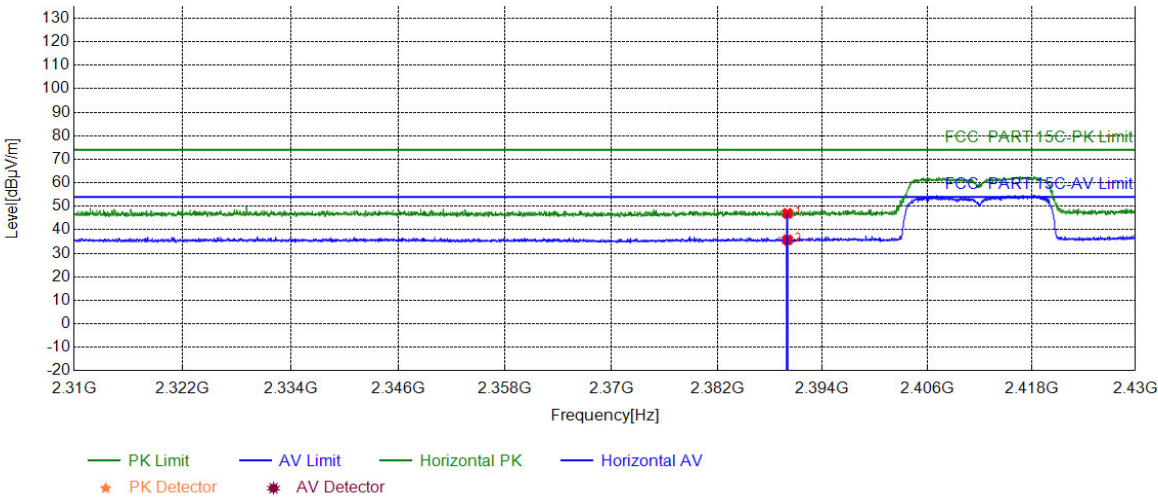

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	41.21	46.98	74.00	27.02	PASS	Horizontal	PK
2	2390.0000	5.77	29.93	35.70	54.00	18.30	PASS	Horizontal	AV

Mode:	802.11 g Transmitting	Channel:	2412MHz
Remark:			


Test Graph

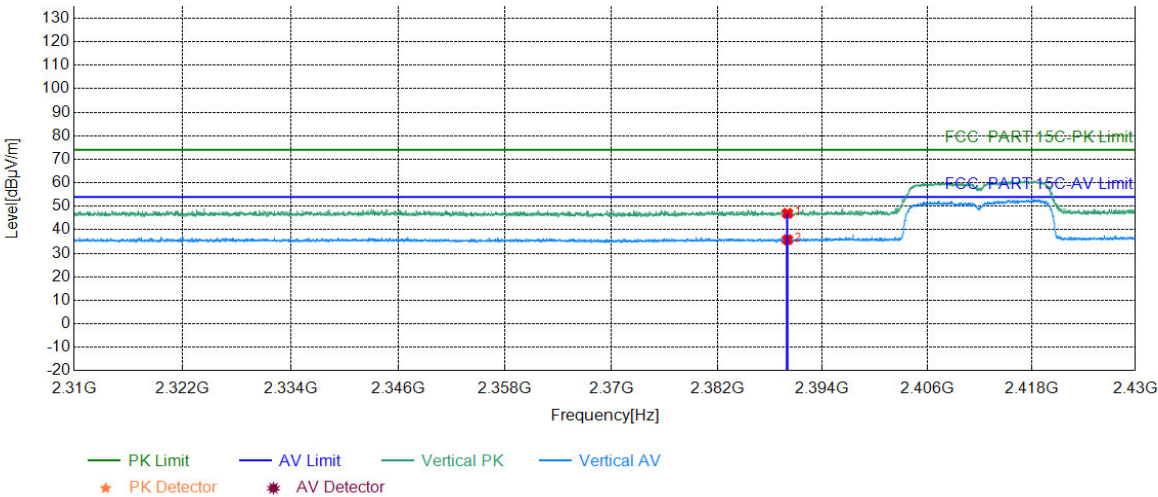

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	41.20	46.97	74.00	27.03	PASS	Vertical	PK
2	2390.0000	5.77	29.98	35.75	54.00	18.25	PASS	Vertical	AV

Mode:	802.11 g Transmitting	Channel:	2462MHz
Remark:			


Test Graph

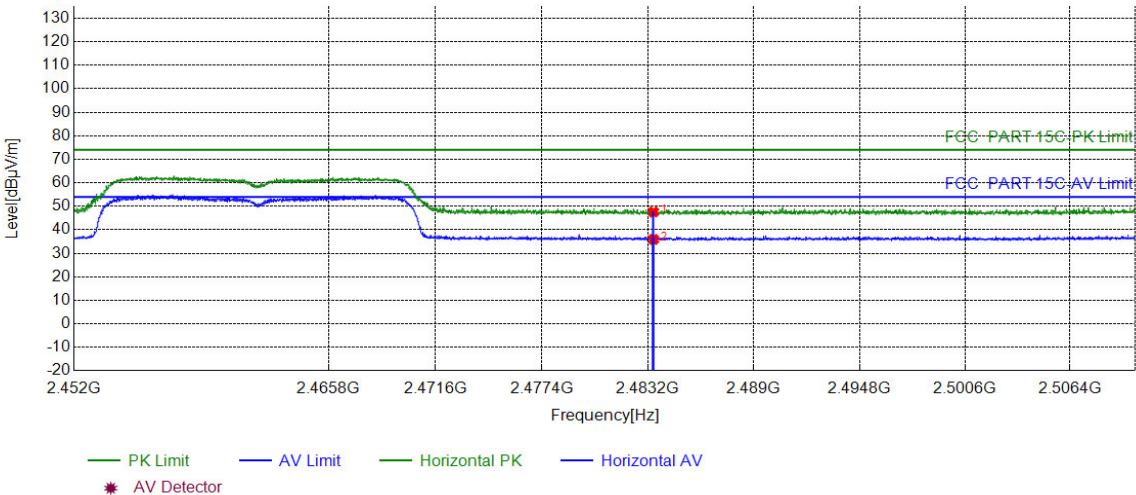

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	41.04	47.61	74.00	26.39	PASS	Horizontal	PK
2	2483.5000	6.57	29.35	35.92	54.00	18.08	PASS	Horizontal	AV

Mode:	802.11 g Transmitting	Channel:	2462MHz
Remark:			


Test Graph

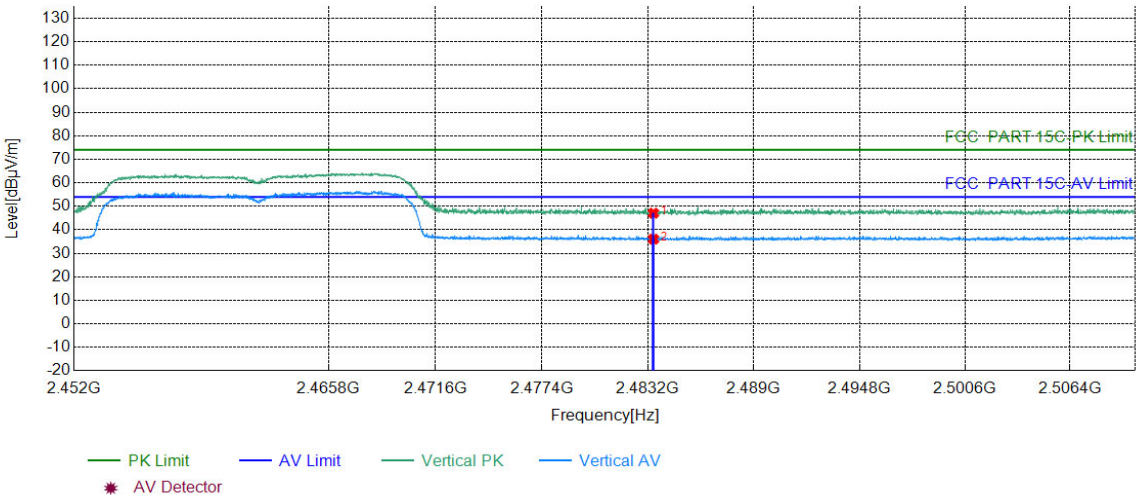

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	40.51	47.08	74.00	26.92	PASS	Vertical	PK
2	2483.5000	6.57	29.46	36.03	54.00	17.97	PASS	Vertical	AV

Mode:	802.11 n(HT20) Transmitting	Channel:	2412MHz
Remark:			


Test Graph

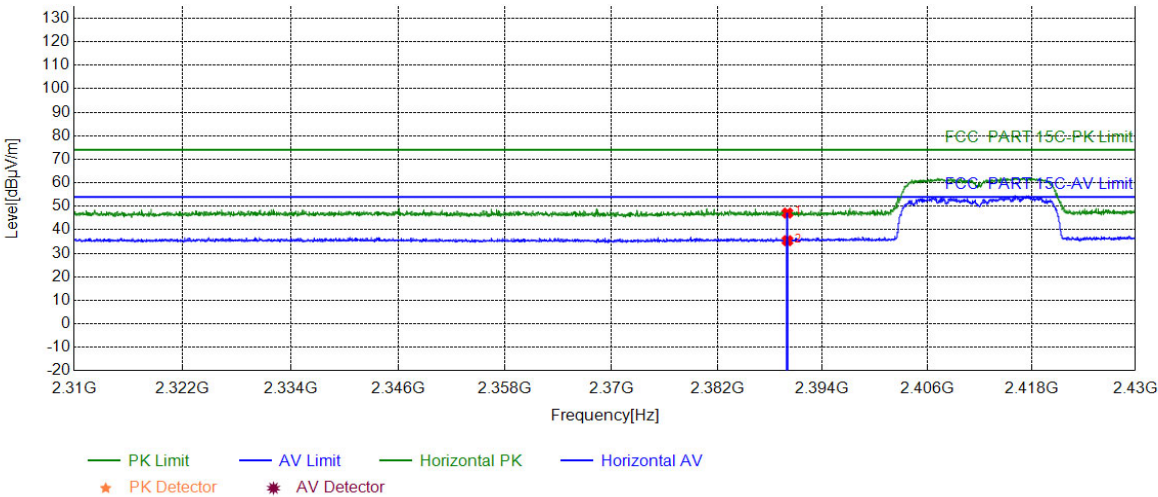

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	41.35	47.12	74.00	26.88	PASS	Horizontal	PK
2	2390.0000	5.77	29.61	35.38	54.00	18.62	PASS	Horizontal	AV

Mode:	802.11 n(HT20) Transmitting	Channel:	2412MHz
Remark:			


Test Graph

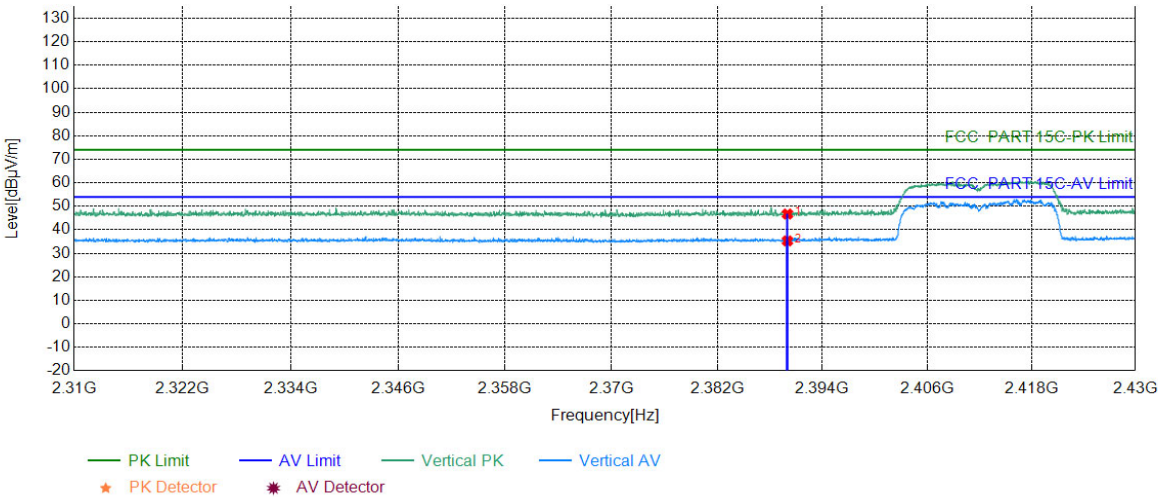

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	40.94	46.71	74.00	27.29	PASS	Vertical	PK
2	2390.0000	5.77	29.52	35.29	54.00	18.71	PASS	Vertical	AV

Mode:	802.11 n(HT20) Transmitting	Channel:	2462MHz
Remark:			


Test Graph

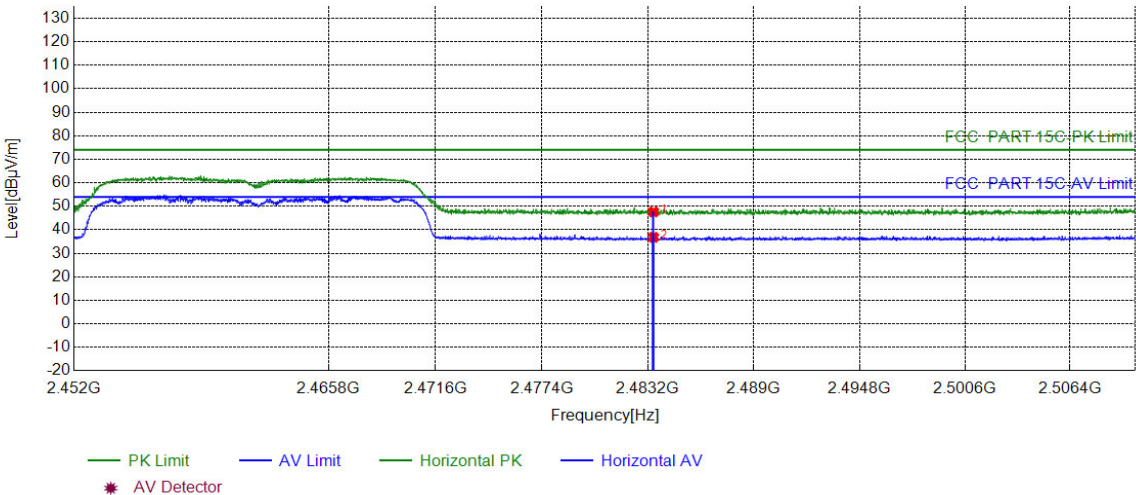

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	41.06	47.63	74.00	26.37	PASS	Horizontal	PK
2	2483.5000	6.57	30.23	36.80	54.00	17.20	PASS	Horizontal	AV

Mode:	802.11 n(HT20) Transmitting	Channel:	2462MHz
Remark:			


Test Graph

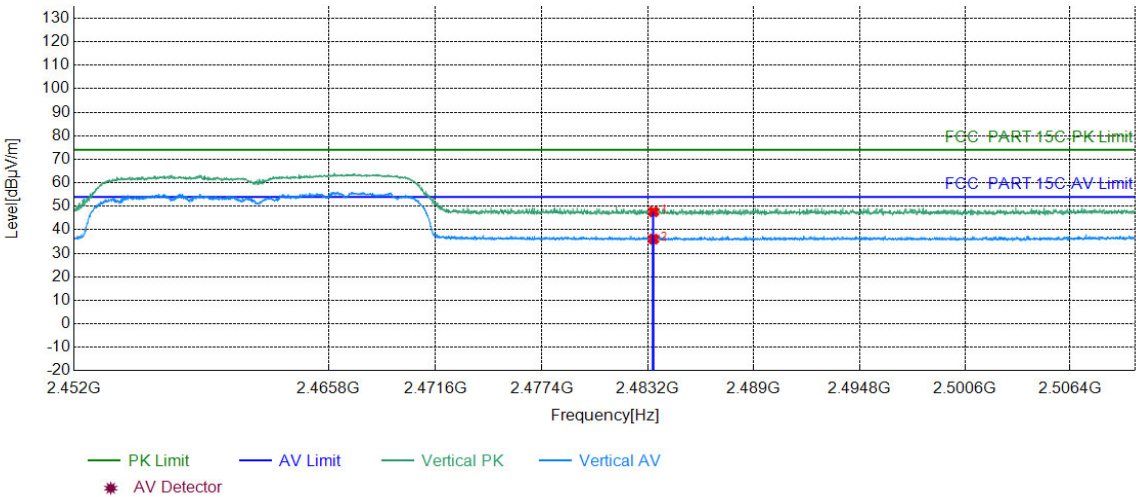

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	41.12	47.69	74.00	26.31	PASS	Vertical	PK
2	2483.5000	6.57	29.47	36.04	54.00	17.96	PASS	Vertical	AV

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:			


Test Graph

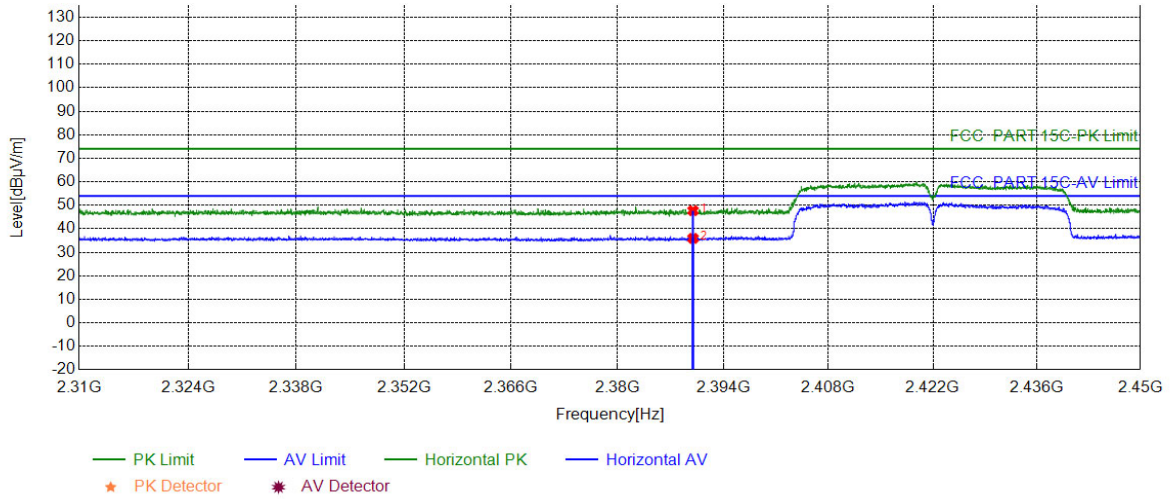

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	41.95	47.72	74.00	26.28	PASS	Horizontal	PK
2	2390.0000	5.77	30.17	35.94	54.00	18.06	PASS	Horizontal	AV

Mode:	802.11 n(HT40) Transmitting	Channel:	2422MHz
Remark:			


Test Graph

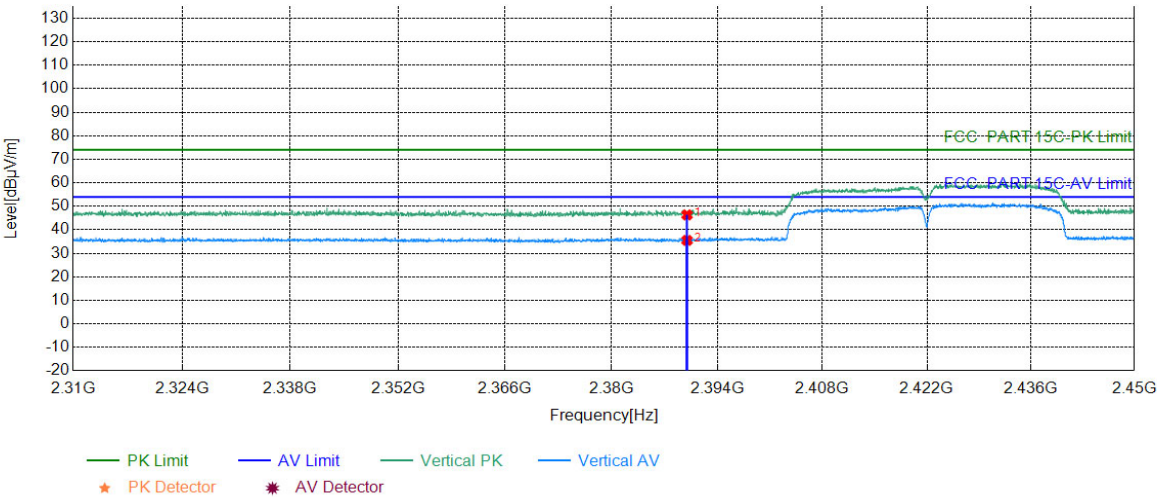

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2390.0000	5.77	40.57	46.34	74.00	27.66	PASS	Vertical	PK
2	2390.0000	5.77	29.73	35.50	54.00	18.50	PASS	Vertical	AV

Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:			


Test Graph

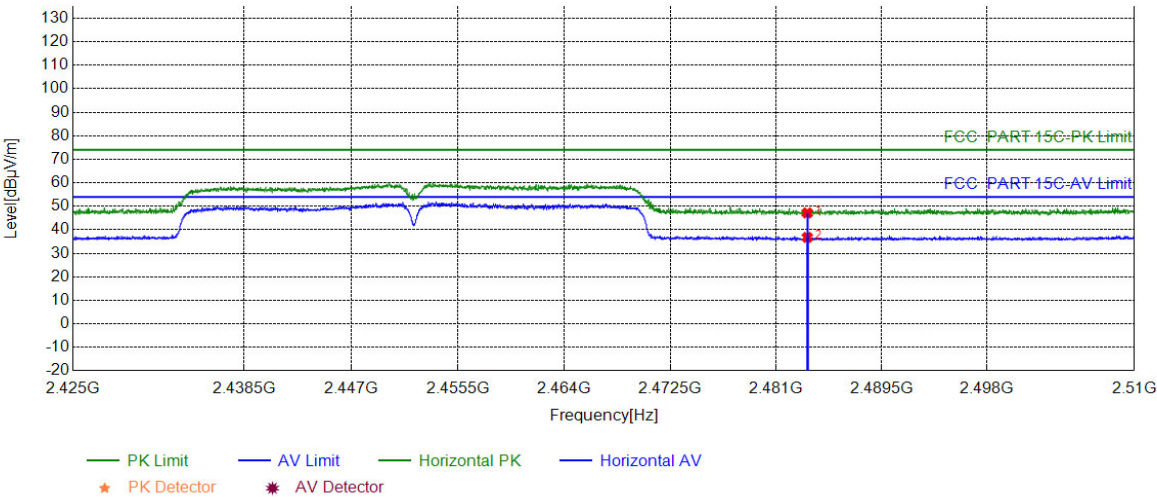

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	40.62	47.19	74.00	26.81	PASS	Horizontal	PK
2	2483.5000	6.57	30.19	36.76	54.00	17.24	PASS	Horizontal	AV

Mode:	802.11 n(HT40) Transmitting	Channel:	2452MHz
Remark:			

Test Graph

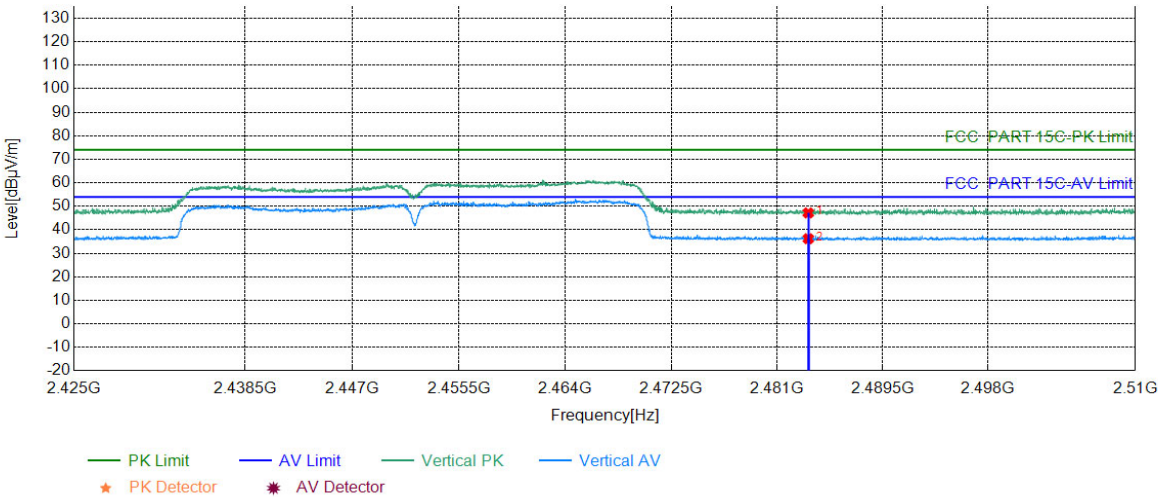

Suspected List									
NO	Freq. [MHz]	Factor [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Result	Polarity	Remark
1	2483.5000	6.57	40.62	47.19	74.00	26.81	PASS	Vertical	PK
2	2483.5000	6.57	29.65	36.22	54.00	17.78	PASS	Vertical	AV

Note:
The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level =Receiver Reading - Correct Factor
Correct Factor = Preamplifier Factor– Antenna Factor–Cable Factor

8 Appendix A

Refer to Appendix: 2.4G WIFI of EED32N80836801.