

Test Report S/N:	022305KBC-T616-E15B		Issue 1.0
Test Date(s):	21Sept04 - 14Oct04, 22Oct04		
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5	
Lab Registration(s):	FCC #714830	IC Lab	File #3874

# **B.6. SETUP PHOTOS**

Photograph B-1 - AC Powerline Conducted Emission Configuration



Photograph B-2 - AC Powerline Conducted Emission Cable Placement



Applicant:	Itronix Corporation	FCC ID:	KBCIX260PNLA580BT	IC ID:	1943A-IX260Pf	
Rugged Laptop PC with internal Cirronet BT2022 Bluetooth Transmitter		Model:	IX260PNLA580BT	<b>ITRONIX</b>		
2005 Calltach Labe Inc. This document is not to be reproduced in whole or in part without the written permission of Calltach Labe Inc. 16 of 45						



Test Report S/N:	022305KBC-T616-E15B		Issue 1.0
Test Date(s):	21Sept04 - 14Oct04, 22Oct04		
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5	
Lab Registration(s):	FCC #714830	IC Lab File #3874	

### H.7. SETUP PHOTOGRAPHS

Photograph H-1 - 3115 Horn Antenna (1-18GHz)



Photograph H-2 - 3160-09 Horn Antenna (18-26GHz)



## H.8. DUT OPERATING DESCRIPTION

Measurements were made at three channels throughout the band, Low Channel (2402 MHz), Mid Channel (2441 MHz), High Channel (2480 MHz). The configuration used was with a gain setting of 250/40 for the low channel, 250/44 for mid channel and 220/45 for the high channel. The modulation was set to 1000. As a worst-case, the band-edge measurements were made of the low and high channels with data stream modulation.



Test Report S/N:	022305KBC-T616-E15B		Issue 1.0
Test Date(s):	21Sept04 - 14Oct04, 22Oct04		
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5	
Lab Registration(s):	FCC #714830	IC Lab	File #3874

### I.7. SETUP PHOTOGRAPHS

Photograph I-1 - Loop Antenna (10kHz - 30MHz)




Photograph I-2 - Bilog Antenna (30MHz - 1 GHz)



Photograph I-3 - Horizontal Polarization (30MHz - 1 GHz)



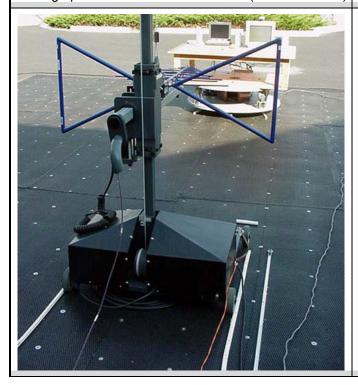






Test Report S/N:	022305KBC-T616-E15B		Issue 1.0
Test Date(s):	21Sept04 - 14Oct04, 22Oct04		
Test Type(s):	FCC §15.247	IC RSS-210 Issue 5	
Lab Registration(s):	FCC #714830	IC Lab	File #3874

Photograph I-5 - Front of Radiated Emission Configuration

Photograph I-6 - Back of Radiated Emission Configuration



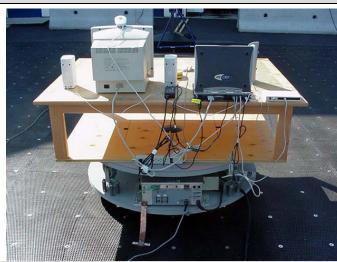

#### I.8. DUT OPERATING DESCRIPTION

Measurements were made at three channels throughout the band, Low Channel (2402 MHz), Mid Channel (2441 MHz), High Channel (2480 MHz). The configuration used was with a gain setting of 250/40 for the low channel, 250/44 for mid channel and 220/45 for the high channel. The modulation was set to 1000. As a worst-case, the band-edge measurements were made of the low and high channels with data stream modulation.