

FCC TEST REPORT

Product Name: Smart Phone
Trade Mark: BLU
Model No.: G72 MAX
Add. Model No.: N/A
Report Number: 2210112022RFM-1
Test Standards: FCC 47 CFR Part 22 Subpart H
FCC 47 CFR Part 24 Subpart E
FCC 47 CFR Part 27 Subpart L
FCC ID: YHLBLUG72MX
Test Result: PASS
Date of Issue: December 16, 2022

Prepared for:

BLU Products, Inc.
10814 NW 33rd St # 100 Doral, FL 33172, USA


Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
**Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China**

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:


Kieron Luo
Project Engineer

Reviewed by:


Henry Lu
Team Leader

Approved by:


Kevin Liang
Assistant Manager

Date: December 16, 2022

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

Version

Version No.	Date	Description
V1.0	December 16, 2022	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES.....	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
1.4 DESCRIPTION OF SUPPORT UNITS	7
1.5 TEST LOCATION.....	7
1.6 TEST FACILITY.....	7
1.7 DEVIATION FROM STANDARDS	7
1.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	7
1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.10 MEASUREMENT UNCERTAINTY	8
2. TEST SUMMARY	9
3. EQUIPMENT LIST	11
4. TEST CONFIGURATION	12
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	12
4.2 TEST SETUP	13
4.2.1 FOR RADIATED EMISSIONS TEST SETUP	13
4.2.2 FOR CONDUCTED RF TEST SETUP	14
4.3 TEST CHANNELS	15
4.4 SYSTEM TEST CONFIGURATION	15
4.5 PRE-SCAN.....	16
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	18
5.1 REFERENCE DOCUMENTS FOR TESTING	18
5.2 MAXIMUM ERP/EIRP	18
5.3 CONDUCTED OUTPUT POWER	20
5.4 PEAK-TO-AVERAGE RATIO	21
5.5 99%&26dB BANDWIDTH.....	22
5.6 BAND EDGE AT ANTENNA TERMINALS	23
5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	24
5.8 FIELD STRENGTH OF SPURIOUS RADIATION.....	25
5.9 FREQUENCY STABILITY	33
APPENDIX A RF TEST DATA.....	36
A.1 GSM 850.....	36
A.2 PCS 1900	48
A.3 WCDMA BAND II.....	60
A.4 WCDMA BAND IV	64
A.5 WCDMA BAND V	68
APPENDIX 1 PHOTOS OF TEST SETUP	72
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS.....	72

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	BLU Products, Inc.
Address of Applicant:	10814 NW 33rd St # 100 Doral, FL 33172, USA
Manufacturer:	BLU Products, Inc.
Address of Manufacturer:	10814 NW 33rd St # 100 Doral, FL 33172, USA

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Smart Phone		
Model No.:	G72 MAX		
Add. Model No.:	N/A		
Trade Mark:	BLU		
DUT Stage:	Identical Prototype		
EUT Supports Function: (Provided by the customer)	GSM Bands:	GSM850/PCS 1900	
	UTRA Bands:	WCDMA Band II/ Band IV/ Band V	
	E-UTRA Bands:	LTE FDD Band 2/ Band 4/ Band 5/ Band 7/ Band 12/ Band 17/ Band 66	
	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth 5.0	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
	RNSS Bands:	1559 MHz to 1610 MHz	GPS/ BDS/ Galileo/ GLONASS
BSR:	VHF Band II	FM	
Software Version:	BLU_G0770WW_V12.0.G.01.00_GENERIC (Provided by the customer)		
Hardware Version:	2003SD-MB-P1 (Provided by the customer)		
Sample Received Date:	September 7, 2022		
Sample Tested Date:	October 12, 2022 to November 11, 2022		
Remark: The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.			

1.2.2 Description of Accessories

Adapter	
Model No.:	US-HY-2000
Input:	100-240 V~50/60 Hz 0.3 A
Output:	5.0 V $\equiv$ 2000 mA
AC Cable:	N/A
DC Cable:	N/A

Battery	
Model No.:	C806051500P
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.87 Vdc
Limited Charge Voltage:	4.45 Vdc
Rated Capacity:	5000 mAh

Cable	
Description:	USB Type-C Plug Cable
Cable Type:	Shielded without ferrite
Length:	0.8 Meter

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Support Networks:	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA		
Type of Modulation:	GSM/GPRS:		GMSK
	EDGE:		GMSK, 8PSK
	WCDMA		BPSK
	HSDPA:		QPSK
	HSUPA:		QPSK
Frequency Range:	GSM/GPRS/EDGE 850:		824.2-848.8 MHz
	GSM/GPRS/EDGE 1900:		1850.2-1909.8 MHz
	WCDMA Band II:		1852.4-1907.6 MHz
	WCDMA Band IV:		1712.4-1752.6 MHz
	WCDMA Band V:		826.4-846.6 MHz
Max RF Output Power:	GSM/GPRS 850:		32.55 dBm
	EDGE 850:		27.50dBm
	GSM/GPRS 1900:		29.41 dBm
	EDGE 1900:		24.36 dBm
	WCDMA Band II:		21.44 dBm
	WCDMA Band IV:		23.04 dBm
	WCDMA Band V:		22.88 dBm
Emission Designator:	GSM/GPRS 850:		246KGXW
	EDGE 850:		245KG7W
	GSM/GPRS 1900:		245KGXW
	EDGE 1900:		249KG7W
	WCDMA Band II:		4M18F9W
	WCDMA Band IV:		4M18F9W
	WCDMA Band V:		4M19F9W
Antenna Type: (Provided by the customer)	FPCB Antenna		
Antenna Gain: (Provided by the customer)		Main Antenna	Diversity Antenna
	GSM 850:	-0.98 dBi	N/A
	PCS 1900:	-3.46 dBi	0.78 dBi
	WCDMA Band II:	-3.46 dBi	0.78 dBi
	WCDMA Band IV:	-3.74dBi	0.61 dBi
	WCDMA Band V:	-0.98 dBi	N/A
GPRS/EDGE Class:	Class 12		
Sample No.:	Radiated: S20220907475-ZJA05/5		
	Conducted: S20220907475-ZJA02/4		
Normal Test Voltage:	3.87 Vdc		
Extreme Test Voltage:	3.4 to 4.45Vdc		
Extreme Test Temperature:	-30 °C to +50 °C		

1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
--	--	--	--	--

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTrust

1.5 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.7 DEVIATION FROM STANDARDS

None.

1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

None.

1.10 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted Output Power	±0.7 dB
2	99%&26dB Bandwidth	±1.86 %
3	Emission Mask	±2.7 dBm
4	Spurious emissions at antenna terminals	±2.7 dBm
5	Field strength of spurious radiation	30 MHz-1 GHz: ±4.9 dB 1 GHz-18 GHz: ±4.8 dB 18 GHz-40 GHz: ±5.1 dB
6	Frequency stability	±6.5 x 10 ⁻⁸
7	Humidity	±3.9 %
8	Temperature	±0.62 °C
9	DC Voltages	±0.68 %

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

2. TEST SUMMARY

FCC 47 CFR Part 22 Subpart H Test Cases			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 22.355	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 24 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 24.232(d)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 24.238(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 24.235	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 27 Subpart L Test Cases			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(h)(1)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

Disclaimer and Explanations:

The declared of product specification and data (e.g. antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	22-Jan-2021	21-Jan-2024
☒	Receiver	R&S	ESIB26	100114	5-Nov-2021 03-Nov-2022	4-Nov-2022 02-Nov-2023
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	11-Nov-2021	10-Nov-2023
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	11-Nov-2021 03-Nov-2022	10-Nov-2023 02-Nov-2023
☒	Preamplifier	HP	8447F	2805A02960	5-Nov-2021 01-Nov-2022	4-Nov-2022 31-Oct-2023
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	17-Apr-2022	16-Apr-2024
☒	Pre-amplifier	ETS-LINDGREN	00118385	00201874	6-Nov-2021 01-Nov-2022	5-Nov-2022 31-Oct-2023
☐	Horn Antenna	ETS-LINDGREN	3116C	00200180	17-Apr-2022	16-Apr-2024
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	14-Nov-2020	13-Nov-2022
☒	Pre-amplifier	ETS-LINDGREN	00118384	00202652	17-Nov-2020	16-Nov-2022
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Signal Analyzer	KEYSIGHT	N9010B	MY62060155	02-Jun-2022	01-Jun-2023
☒	DC Source	KIKUSUI	PWR400L	LK003024	20-Aug-2022	19-Aug-2023
☒	Temp & Humidity chamber	Votisch	VT4002	58566133290020	15-Apr-2022	14-Apr-2023
☒	Wideband Radio Communication Tester	R&S	CMW500	119583	15-Apr-2022	14-Apr-2023
☒	Wideband Radio Communication Tester	R&S	CMW500	120932	15-Apr-2022	14-Apr-2023

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING


Test Environment	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
TN/VN	+15 to +35	3.87	20 to 75
TL/VL	-30	3.4	20 to 75
TH/VL	+50	3.4	20 to 75
TL/VH	-30	4.45	20 to 75
TH/VH	+50	4.45	20 to 75

Remark:


- 1) The EUT just work in such extreme temperature of -30 °C to +50 °C and the extreme voltage of 3.4 V to 4.45 V, so here the EUT is tested in the temperature of -30 °C to +50 °C and the voltage of 3.4 V to 4.45 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

4.2 TEST SETUP

4.2.1 For Radiated Emissions test setup

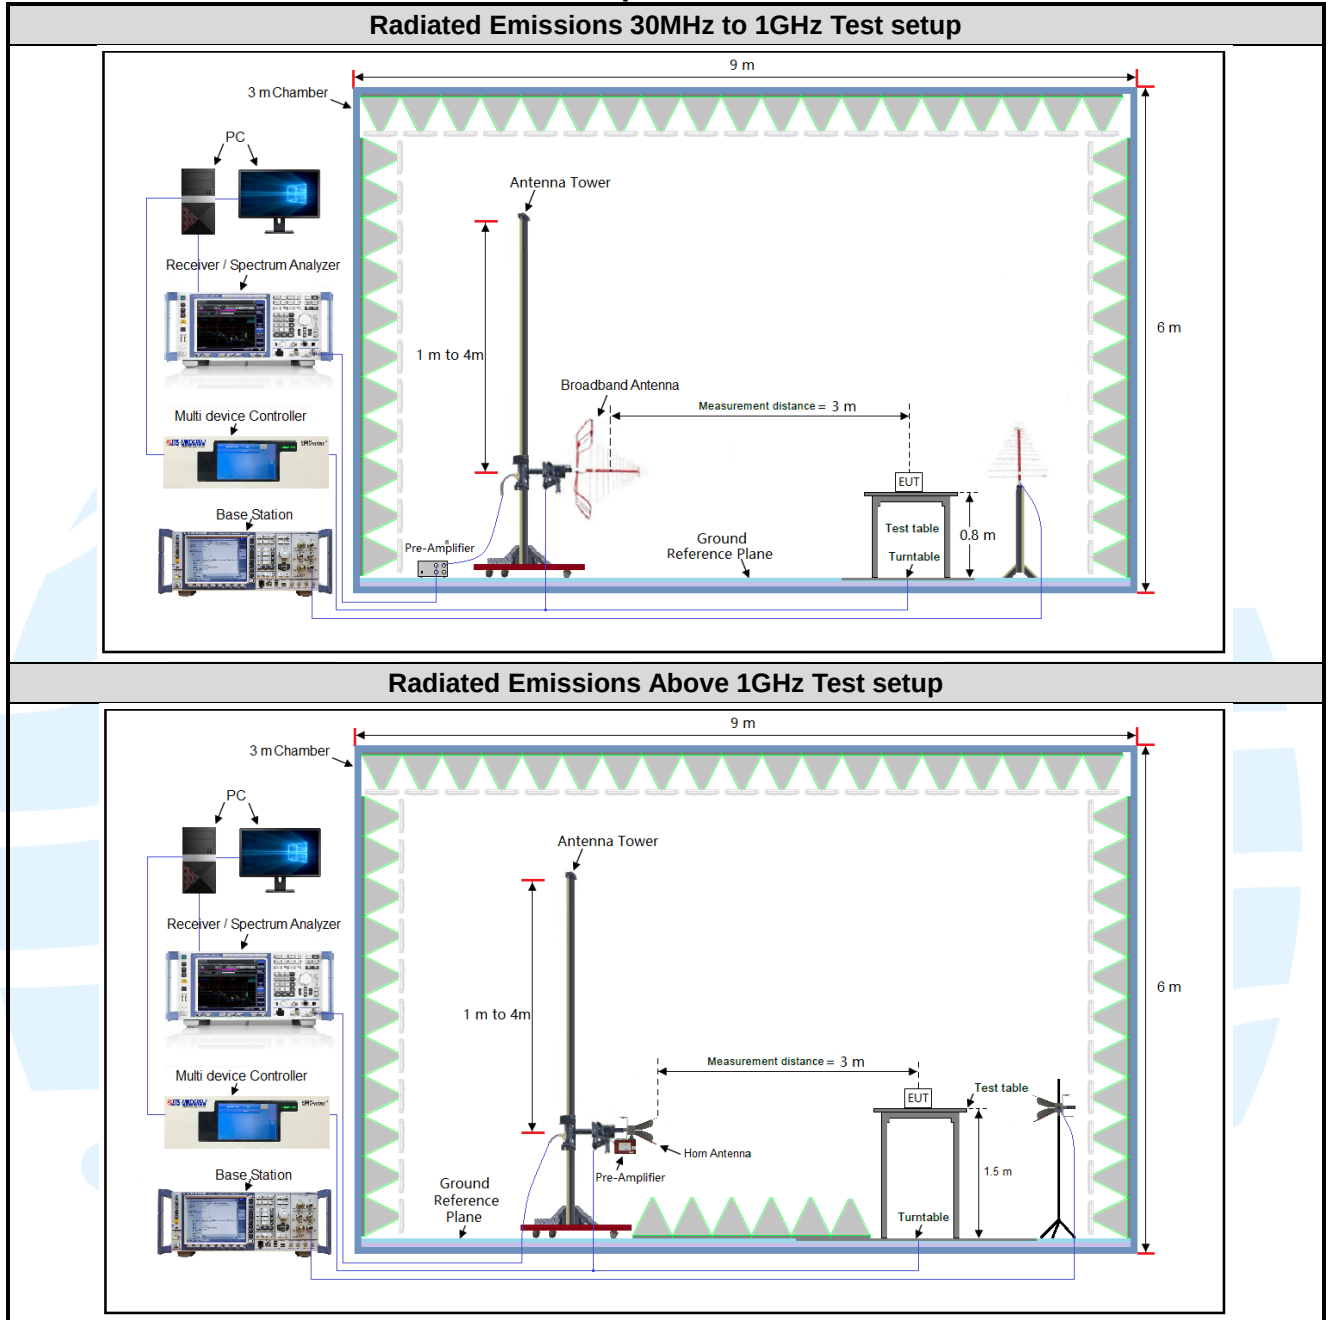

4.2.2 For Conducted RF test setup

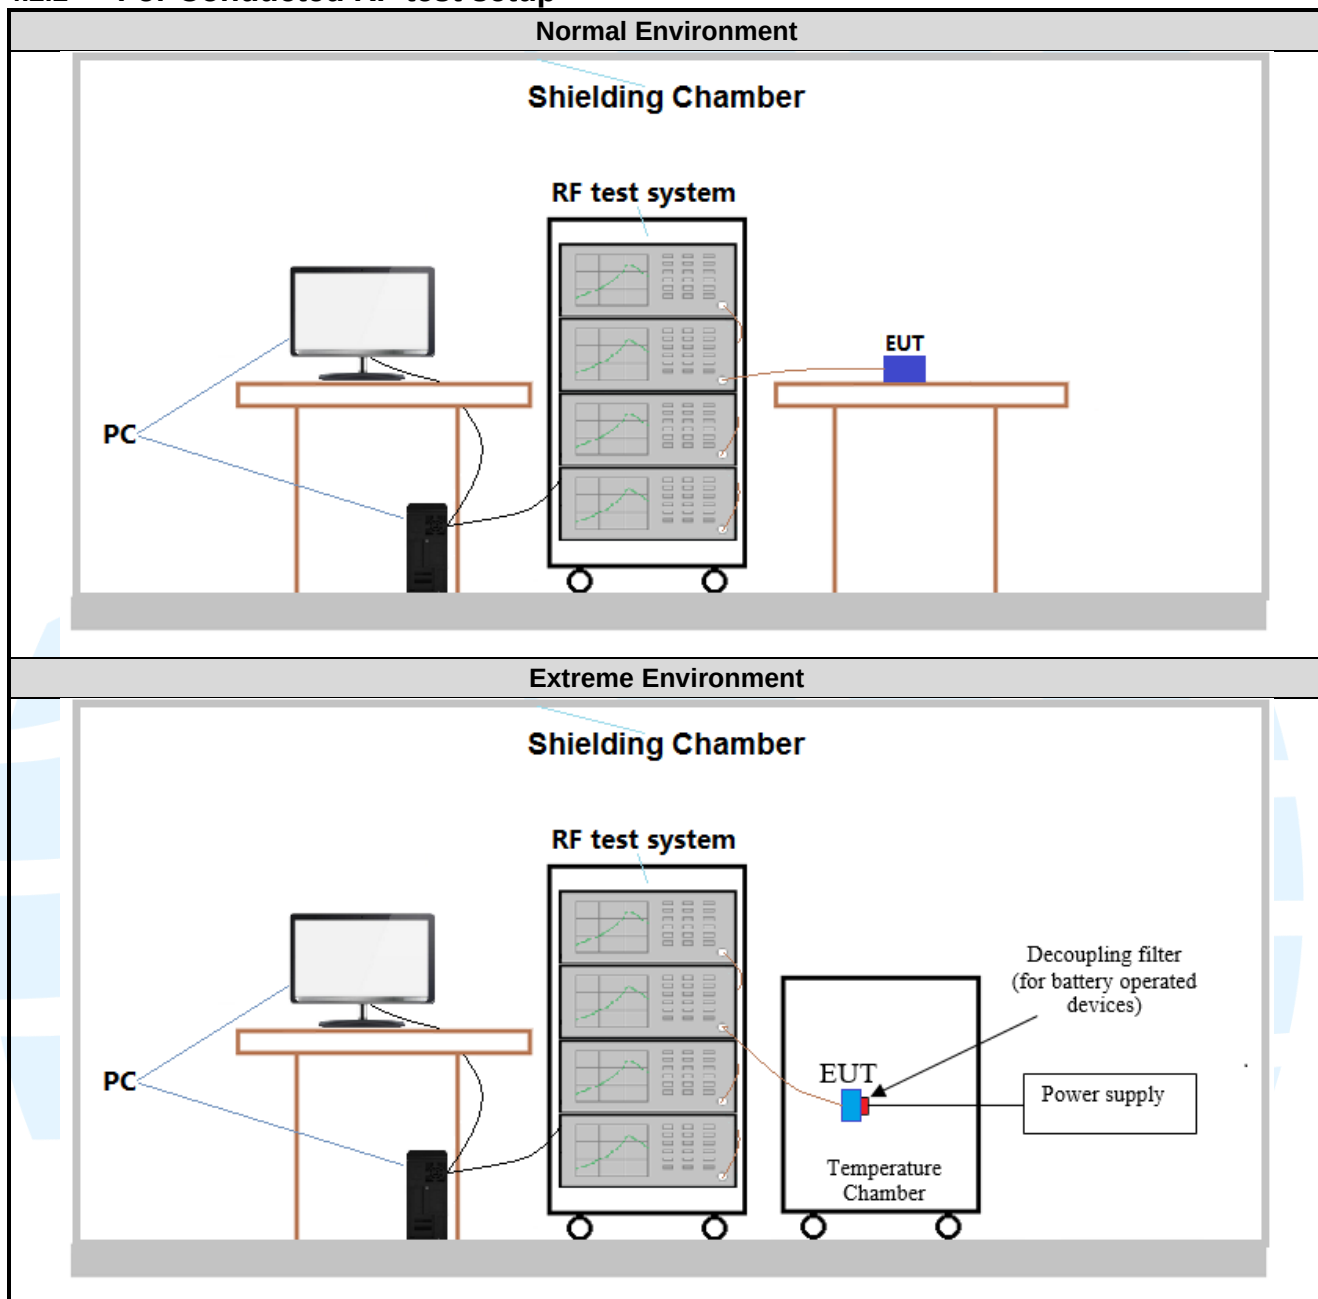

4.3 TEST CHANNELS

Bands	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/EDGE850	Tx (824 MHz ~ 849 MHz)	Channel 128	Channel 190	Channel 251
		824.2 MHz	836.6 MHz	848.8 MHz
WCDMA band V	Tx (824 MHz ~ 849 MHz)	Channel 4132	Channel 4182	Channel 4233
		826.4 MHz	836.4 MHz	846.6 MHz

Bands	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/EDGE1900	Tx (1850 MHz-1910 MHz)	Channel 512	Channel 661	Channel 810
		1850.2 MHz	1880.0 MHz	1909.8 MHz
WCDMA Band II	Tx (1850 MHz-1910 MHz)	Channel 9262	Channel 9400	Channel 9538
		1852.4 MHz	1880.0 MHz	1907.6 MHz

Bands	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
WCDMA Band IV	Tx (1710 MHz-1755 MHz)	Channel 1312	Channel 1412	Channel 1513
		1712.4 MHz	1732.4 MHz	1752.6 MHz

4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.87Vdc rechargeable Li-on battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.5 PRE-SCAN

Pre-scan under all rate at lowest middle and highest channel, find the transmitter power as below:
SIM 1 Card Conducted transmitter power measurement result.

GSM 850 Maximum Average Power (dBm)			
Channel	128	190	251
Frequency(MHz)	824.2 MHz	836.6 MHz	848.8 MHz
GSM (GMSK, 1Tx-slot)	32.46	32.55	32.34
GPRS (GMSK, 1Tx-slot)	32.47	32.55	32.35
GPRS (GMSK, 2Tx-slot)	31.69	31.83	31.62
GPRS (GMSK, 3Tx-slot)	29.91	30.09	29.91
GPRS (GMSK, 4Tx-slot)	28.84	29.02	28.78
EDGE (8PSK, 1Tx-slot)	26.85	27.01	27.50
EDGE (8PSK, 2Tx-slot)	25.68	25.87	25.44
EDGE (8PSK, 3Tx-slot)	23.77	23.89	23.51
EDGE (8PSK, 4Tx-slot)	22.14	22.34	22.22

PCS 1900 Maximum Average Power (dBm)			
Channel	512	661	810
Frequency(MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
GSM (GMSK, 1Tx-slot)	29.03	29.41	29.27
GPRS (GMSK, 1Tx-slot)	29.02	29.38	29.25
GPRS (GMSK, 2Tx-slot)	28.27	28.68	28.55
GPRS (GMSK, 3Tx-slot)	26.51	26.92	26.82
GPRS (GMSK, 4Tx-slot)	25.43	25.87	25.75
EDGE (8PSK, 1Tx-slot)	24.09	24.36	24.31
EDGE (8PSK, 2Tx-slot)	22.53	23.43	23.48
EDGE (8PSK, 3Tx-slot)	20.67	21.89	21.17
EDGE (8PSK, 4Tx-slot)	19.79	19.88	19.81

WCDMA Band II Maximum Average Power (dBm)			
Channel	9262	9400	9538
Frequency (MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz
RMC 12.2K	21.33	21.44	21.30
HSDPA Subtest-1	21.25	21.31	21.29
HSDPA Subtest-2	19.79	19.88	19.84
HSDPA Subtest-3	19.82	19.93	19.86
HSDPA Subtest-4	19.78	19.89	19.82
HSUPA Subtest-1	21.26	21.31	21.28
HSUPA Subtest-2	21.26	21.34	21.27
HSUPA Subtest-3	21.21	21.30	21.24
HSUPA Subtest-4	21.22	21.28	21.29
HSUPA Subtest-5	19.73	19.84	19.78

WCDMA Band IV Maximum Average Power (dBm)			
Channel	1312	1412	1513
Frequency (MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz
RMC 12.2K	22.79	22.84	23.04
HSDPA Subtest-1	22.80	22.84	23.01
HSDPA Subtest-2	21.29	21.34	21.53
HSDPA Subtest-3	21.32	21.37	21.52
HSDPA Subtest-4	21.30	21.34	21.54
HSUPA Subtest-1	22.78	22.82	23.02
HSUPA Subtest-2	22.76	22.84	23.01
HSUPA Subtest-3	22.79	22.81	23.02
HSUPA Subtest-4	22.71	22.85	23.00
HSUPA Subtest-5	21.28	21.31	21.53

WCDMA Band V Maximum Average Power (dBm)			
Channel	4132	4182	4233
Frequency (MHz)	826.4 MHz	836.4 MHz	846.6 MHz
RMC 12.2K	22.62	22.71	22.88
HSDPA Subtest-1	21.67	21.58	21.78
HSDPA Subtest-2	21.13	21.21	21.38
HSDPA Subtest-3	21.09	21.22	21.38
HSDPA Subtest-4	21.12	21.21	21.36
HSUPA Subtest-1	22.60	22.71	22.87
HSUPA Subtest-2	22.61	22.68	22.85
HSUPA Subtest-3	22.58	22.68	22.87
HSUPA Subtest-4	22.63	22.66	22.86
HSUPA Subtest-5	21.12	21.22	21.35

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
GSM/GPRS/EDGE 850/1900	1) GSM (GMSK, 1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link 3) EDGE (8PSK, 1Tx-slot) Link	1) GSM (GMSK,1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link 3) EDGE (8PSK, 1Tx-slot) Link
WCDMA Band II/IVV	RMC 12.2kbps Link	RMC 12.2kbps Link

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 22	Public Mobile Services
3	FCC 47 CFR Part 27	Miscellaneous Wireless Communications Services
4	FCC 47 CFR Part 24	Personal Communications Services
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
6	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01
7	KDB 412172 D01 Determining ERP and EIRP v01r01	Guidelines for determining the effective radiated power (ERP) and isotropically radiated power (EIRP) of an RF transmitting system

5.2 MAXIMUM ERP/EIRP

Test Requirement: FCC 47 CFR Part 2.1046(a),
FCC 47 CFR Part 22.913(a),
FCC 47 CFR Part 24.232(c),
FCC 47 CFR Part 27.50(d)(4)

Test Method: KDB 971168 D01v03r01 Section 5.6 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c)

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Test Procedure:

According to KDB 412172 D01 Power Approach,

- $ERP \text{ or } EIRP = P_T + G_T - L_C$
- $ERP = EIRP - 2.15$

where

- P_T = transmitter output power, expressed in dBW, dBm, or PSD;
- G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);
- L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup: Refer to section 4.2.1 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: See table below

Diversity Antenna

Band		Ant. Gain (dBi)	Maximum ERP/EIRP (dBm)				Maximum ERP/EIRP (W)				Result
			Low	Mid	High	Limit (dBm)	Low	Mid	High	Limit (W)	
PCS 1900	GSM	0.78	29.81	30.19	30.05	33.01	0.9572	1.0447	1.0116	2	Pass
	GPRS		29.80	30.16	30.03	33.01	0.9550	1.0375	1.0069	2	Pass
	EGPRS		24.87	25.14	25.09	33.01	0.3069	0.3266	0.3228	2	Pass

Band		Ant. Gain (dBi)	Maximum ERP/EIRP (dBm)				Maximum ERP/EIRP (W)				Result
			Low	Mid	High	Limit (dBm)	Low	Mid	High	Limit (W)	
WCDMA Band II	RMC 12.2K	0.78	22.11	22.22	22.08	33.01	0.1626	0.1667	0.1614	2	Pass
	HSDPA		22.03	22.09	22.07	33.01	0.1596	0.1618	0.1611	2	Pass
	HSUPA		22.04	22.12	22.07	33.01	0.1600	0.1629	0.1611	2	Pass
WCDMA Band IV	RMC 12.2K	0.61	23.40	23.45	23.65	30	0.2188	0.2213	0.2317	1	Pass
	HSDPA		23.41	23.45	23.62	30	0.2193	0.2213	0.2301	1	Pass
	HSUPA		23.40	23.46	23.63	30	0.2188	0.2218	0.2307	1	Pass

Main Antenna

Band		Ant. Gain (dBi)	Maximum ERP/EIRP (dBm)				Maximum ERP/EIRP (W)				Result
			Low	Mid	High	Limit (dBm)	Low	Mid	High	Limit (W)	
PCS 1900	GSM	-3.46	25.57	25.95	25.81	33.01	0.3606	0.3936	0.3811	2	Pass
	GPRS		25.56	25.92	25.79	33.01	0.3597	0.3908	0.3793	2	Pass
	EGPRS		20.63	20.90	20.85	33.01	0.1156	0.1230	0.1216	2	Pass
GSM 850	GSM	-0.98	29.33	29.42	29.21	38.45	0.8570	0.8750	0.8337	7	Pass
	GPRS		29.34	29.42	29.22	38.45	0.8590	0.8750	0.8356	7	Pass
	EGPRS		23.72	23.88	24.37	38.45	0.2355	0.2443	0.2735	7	Pass

Band		Ant. Gain (dBi)	Maximum ERP/EIRP (dBm)				Maximum ERP/EIRP (W)				Result
			Low	Mid	High	Limit (dBm)	Low	Mid	High	Limit (W)	
WCDMA Band II	RMC 12.2K	-3.46	17.87	17.98	17.84	33.01	0.0612	0.0628	0.0608	2	Pass
	HSDPA		17.79	17.85	17.83	33.01	0.0601	0.0610	0.0607	2	Pass
	HSUPA		17.80	17.88	17.83	33.01	0.0603	0.0614	0.0607	2	Pass
WCDMA Band IV	RMC 12.2K	-3.74	19.05	19.10	19.30	30	0.0804	0.0813	0.0851	1	Pass
	HSDPA		19.06	19.10	19.27	30	0.0805	0.0813	0.0845	1	Pass
	HSUPA		19.05	19.11	19.28	30	0.0804	0.0815	0.0847	1	Pass
WCDMA Band V	RMC 12.2K	-0.98	19.49	19.58	19.75	38.45	0.0889	0.0908	0.0944	7	Pass
	HSDPA		18.54	18.45	18.65	38.45	0.0714	0.0700	0.0733	7	Pass
	HSUPA		19.50	19.58	19.74	38.45	0.0891	0.0908	0.0942	7	Pass

Note: The maximum ERP/EIRP is calculated from max output power and antenna gain, the antenna gain provided by the customer, and the customer takes all the responsibilities for the accuracy of antenna gain.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

5.3 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 2.1046(a),
FCC 47 CFR Part 22.913(a),
FCC 47 CFR Part 24.232(c),
FCC 47 CFR Part 27.50(d)(4)

Test Method: KDB 971168 D01v03r01 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c)

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

Test Procedure:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA2000, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: The full result refer to section 4.5 for details.

5.4 PEAK-TO-AVERAGE RATIO

Test Requirement: FCC 47 CFR Part 22.913(a),
FCC 47 CFR Part 24.232(c),
FCC 47 CFR Part 27.50(d)(5)

Test Method: KDB 971168 D01v03r01 Section 5.7

Limit: In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

- Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth
- Set the number of counts to a value that stabilizes the measured CCDF curve
- Record the maximum PAPR level associated with a probability of 0.1 %

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: Please refer to Appendix A

5.599%&26DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 2.1049(h),
FCC 47 CFR Part 22.917(b),
FCC 47 CFR Part 24.238(b),
FCC 47 CFR Part 27.53(h)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01 Section 4

Limit: No Limit, for reporting purposes only.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: Please refer to Appendix A

5.6 BAND EDGE AT ANTENNA TERMINALS

Test Requirement: FCC 47 CFR Part 2.1051,
FCC 47 CFR Part 22.917(a),
FCC 47 CFR Part 24.238(a),
FCC 47 CFR Part 27.53(h)(1)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

For each band edge measurement:

- 1) Set the spectrum analyzer span to include the block edge frequency.
- 2) Set a marker to point the corresponding band edge frequency in each test case.
- 3) Set display line at -13 dBm
- 4) Set resolution bandwidth to at least 1% of emission bandwidth.
- 5) Set spectrum analyzer with RMS detector.
- 6) Record the max trace plot into the test report

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Requirement: FCC 47 CFR Part 2.1051,
FCC 47 CFR Part 22.917(a)(b),
FCC 47 CFR Part 24.238(a)(b),
FCC 47 CFR Part 27.53(h)(1)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

Test Procedure:

The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range. b. Measuring frequency range is from 30 MHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Please refer to Appendix A

5.8 FIELD STRENGTH OF SPURIOUS RADIATION

Test Requirement: FCC 47 CFR Part 2.1053,
FCC 47 CFR Part 22.917(a)(b),
FCC 47 CFR Part 24.238(a)(b),
FCC 47 CFR Part 27.53(h)(1)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01 Section 7

Limits:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

Test Setup: Refer to section 4.2.1 for details.

Test Procedures: KDB 971168 D01v03r01 Section 7

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The measurement data as follows:

GSM 850							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
Lowest Channel							
1	804.252	-87.8	41.4	-46.4	-13.0	-33.4	Horizontal
2	893.656	-87.8	42.8	-45.0	-13.0	-32.0	Horizontal
3	965.474	-87.3	43.1	-44.3	-13.0	-31.3	Horizontal
4	1648.4	-63.6	0.2	-63.4	-13.0	-50.4	Horizontal
5	2472.6	-63.8	3.6	-60.3	-13.0	-47.3	Horizontal
6	562.014	-89.1	37.2	-51.9	-13.0	-38.9	Vertical
7	693.91	-88.4	40.3	-48.1	-13.0	-35.1	Vertical
8	776.485	-87.9	40.8	-47.1	-13.0	-34.1	Vertical
9	1648.4	-62.6	0.2	-62.4	-13.0	-49.4	Vertical
10	2472.6	-63.0	3.6	-59.4	-13.0	-46.4	Vertical
Middle Channel							
1	684.226	-88.4	40.0	-48.4	-13.0	-35.4	Horizontal
2	781.961	-88.2	40.8	-47.4	-13.0	-34.4	Horizontal
3	972.283	-86.9	43.1	-43.8	-13.0	-30.8	Horizontal
4	1673.2	-62.4	0.4	-62.1	-13.0	-49.1	Horizontal
5	2509.8	-66.2	3.7	-62.5	-13.0	-49.5	Horizontal
6	679.435	-88.3	39.8	-48.4	-13.0	-35.4	Vertical
7	765.648	-88.4	41.0	-47.4	-13.0	-34.4	Vertical
8	938.714	-87.5	42.9	-44.5	-13.0	-31.5	Vertical
9	1673.2	-62.4	0.4	-62.0	-13.0	-49.0	Vertical
10	2509.8	-62.9	3.7	-59.2	-13.0	-46.2	Vertical
Middle Channel							
1	754.963	-87.9	40.6	-47.4	-13.0	-34.4	Horizontal
2	827.179	-87.0	41.6	-45.4	-13.0	-32.4	Horizontal
3	992.997	-87.3	43.4	-43.9	-13.0	-30.9	Horizontal
4	1697.6	-63.4	0.5	-62.9	-13.0	-49.9	Horizontal
5	2546.4	-64.4	3.8	-60.6	-13.0	-47.6	Horizontal
6	655.977	-88.1	39.5	-48.6	-13.0	-35.6	Vertical
7	703.731	-88.1	40.4	-47.6	-13.0	-34.6	Vertical
8	906.304	-86.9	42.8	-44.1	-13.0	-31.1	Vertical
9	1697.6	-61.2	0.5	-60.7	-13.0	-47.7	Vertical
10	2546.4	-62.4	3.8	-58.6	-13.0	-45.6	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

PCS 1900 (Main Antenna)							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
Lowest Channel							
1	642.292	-80.1	9.9	-70.2	-13.0	-57.2	Horizontal
2	703.731	-79.8	11.1	-68.8	-13.0	-55.8	Horizontal
3	938.714	-82.0	14.2	-67.9	-13.0	-54.9	Horizontal
4	3700.4	-64.0	7.6	-56.5	-13.0	-43.5	Horizontal
5	5550.6	-65.5	11.8	-53.7	-13.0	-40.7	Horizontal
6	689.051	-81.1	10.8	-70.2	-13.0	-57.2	Vertical
7	821.387	-80.7	12.3	-68.4	-13.0	-55.4	Vertical
8	952.0	-82.3	14.3	-68.0	-13.0	-55.0	Vertical
9	3700.4	-63.2	7.6	-55.6	-13.0	-42.6	Vertical
10	5550.6	-66.2	11.8	-54.4	-13.0	-41.4	Vertical
Middle Channel							
1	47.703	-70.4	-3.5	-73.9	-13.0	-60.9	Horizontal
2	474.791	-79.7	6.0	-73.8	-13.0	-60.8	Horizontal
3	979.139	-82.3	14.4	-67.9	-13.0	-54.9	Horizontal
4	3760	-63.1	7.8	-55.3	-13.0	-42.3	Horizontal
5	5640	-65.5	11.6	-53.9	-13.0	-40.9	Horizontal
6	615.774	-80.4	9.1	-71.3	-13.0	-58.3	Vertical
7	739.214	-81.3	11.6	-69.7	-13.0	-56.7	Vertical
8	979.139	-82.2	14.4	-67.7	-13.0	-54.7	Vertical
9	3760	-62.3	7.8	-54.5	-13.0	-41.5	Vertical
10	5640	-65.4	11.6	-53.8	-13.0	-40.8	Vertical
Highest Channel							
1	703.731	-80.9	11.1	-69.8	-13.0	-56.8	Horizontal
2	856.76	-81.6	13.1	-68.5	-13.0	-55.5	Horizontal
3	912.695	-81.8	14.0	-67.8	-13.0	-54.8	Horizontal
4	3819.6	-61.9	8.0	-53.9	-13.0	-40.9	Horizontal
5	5729.4	-66.1	11.4	-54.8	-13.0	-41.8	Horizontal
6	689.051	-80.8	10.8	-69.9	-13.0	-56.9	Vertical
7	718.725	-81.0	11.3	-69.6	-13.0	-56.6	Vertical
8	932.141	-81.2	14.1	-67.1	-13.0	-54.1	Vertical
9	3819.6	-62.8	8.0	-54.8	-13.0	-41.8	Vertical
10	5729.4	-65.0	11.4	-53.6	-13.0	-40.6	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

PCS 1900 (Diversity Antenna)							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
Lowest Channel							
1	723.793	-81.4	11.4	-70.0	-13.0	-57.0	Horizontal
2	919.132	-82.0	14.0	-68.0	-13.0	-55.0	Horizontal
3	992.997	-82.4	14.8	-67.6	-13.0	-54.6	Horizontal
4	3700.4	-64.3	7.6	-56.8	-13.0	-43.8	Horizontal
5	5550.6	-64.8	11.8	-53.0	-13.0	-40.0	Horizontal
6	749.676	-81.4	11.5	-70.0	-13.0	-57.0	Vertical
7	862.802	-81.7	13.1	-68.6	-13.0	-55.6	Vertical
8	965.474	-82.6	14.3	-68.2	-13.0	-55.2	Vertical
9	3700.4	-63.1	7.6	-55.5	-13.0	-42.5	Vertical
10	5550.6	-65.2	11.8	-53.4	-13.0	-40.4	Vertical
Middle Channel							
1	787.475	-81.2	11.8	-69.4	-13.0	-56.4	Horizontal
2	856.76	-81.9	13.1	-68.8	-13.0	-55.8	Horizontal
3	919.132	-82.8	14.0	-68.8	-13.0	-55.8	Horizontal
4	3760	-63.5	7.8	-55.7	-13.0	-42.7	Horizontal
5	5640	-65.1	11.6	-53.5	-13.0	-40.5	Horizontal
6	684.226	-80.6	10.6	-70.0	-13.0	-57.0	Vertical
7	798.62	-81.5	12.0	-69.5	-13.0	-56.5	Vertical
8	893.656	-82.5	13.9	-68.6	-13.0	-55.6	Vertical
9	3760	-64.4	7.8	-56.6	-13.0	-43.6	Vertical
10	5640	-64.1	11.6	-52.5	-13.0	-39.5	Vertical
Highest Channel							
1	708.694	-81.6	11.1	-70.5	-13.0	-57.5	Horizontal
2	749.676	-81.6	11.5	-70.1	-13.0	-57.1	Horizontal
3	979.139	-82.5	14.4	-68.0	-13.0	-55.0	Horizontal
4	3819.6	-64.2	8.0	-56.2	-13.0	-43.2	Horizontal
5	5729.4	-66.9	11.4	-55.5	-13.0	-42.5	Horizontal
6	176.275	-74.3	-0.7	-75.0	-13.0	-62.0	Vertical
7	611.462	-81.2	9.0	-72.2	-13.0	-59.2	Vertical
8	893.656	-81.8	13.9	-68.0	-13.0	-55.0	Vertical
9	3819.6	-63.7	8.0	-55.7	-13.0	-42.7	Vertical
10	5729.4	-67.1	11.4	-55.7	-13.0	-42.7	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

WCDMA Band II (Main Antenna)							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps _ Lowest Channel							
1	348.514	-79.0	4.4	-74.6	-13.0	-61.6	Horizontal
2	546.437	-80.0	7.8	-72.3	-13.0	-59.3	Horizontal
3	718.725	-81.1	11.3	-69.7	-13.0	-56.7	Horizontal
4	3704.8	-63.5	7.6	-55.9	-13.0	-42.9	Horizontal
5	5137.2	-65.9	10.0	-55.9	-13.0	-42.9	Horizontal
6	669.952	-80.5	10.1	-70.4	-13.0	-57.4	Vertical
7	744.427	-80.7	11.5	-69.3	-13.0	-56.3	Vertical
8	856.76	-81.9	13.1	-68.7	-13.0	-55.7	Vertical
9	3704.8	-62.8	7.6	-55.3	-13.0	-42.3	Vertical
10	5557.2	-66.4	11.8	-54.6	-13.0	-41.6	Vertical
RMC 12.2kbps _ Middle Channel							
1	586.217	-80.4	8.3	-72.2	-13.0	-59.2	Horizontal
2	809.924	-81.0	12.2	-68.8	-13.0	-55.8	Horizontal
3	850.76	-81.3	13.0	-68.3	-13.0	-55.3	Horizontal
4	3760	-62.5	7.8	-54.7	-13.0	-41.7	Horizontal
5	5640	-66.4	11.6	-54.8	-13.0	-41.8	Horizontal
6	495.238	-79.5	6.7	-72.9	-13.0	-59.9	Vertical
7	689.051	-80.4	10.8	-69.6	-13.0	-56.6	Vertical
8	925.613	-82.1	14.1	-68.1	-13.0	-55.1	Vertical
9	3760	-63.3	7.8	-55.5	-13.0	-42.5	Vertical
10	5640	-65.9	11.6	-54.3	-13.0	-41.3	Vertical
RMC 12.2kbps _ Highest Channel							
1	669.952	-80.6	10.1	-70.5	-13.0	-57.5	Horizontal
2	739.214	-79.7	11.6	-68.1	-13.0	-55.1	Horizontal
3	932.141	-81.7	14.1	-67.6	-13.0	-54.6	Horizontal
4	3811.519	-63.5	8.0	-55.5	-13.0	-42.5	Horizontal
5	5722.8	-66.3	11.4	-54.9	-13.0	-41.9	Horizontal
6	642.292	-80.8	9.9	-70.9	-13.0	-57.9	Vertical
7	679.435	-79.9	10.4	-69.5	-13.0	-56.5	Vertical
8	887.398	-81.4	13.7	-67.7	-13.0	-54.7	Vertical
9	3815.2	-62.6	8.0	-54.6	-13.0	-41.6	Vertical
10	5722.8	-66.4	11.4	-55.0	-13.0	-42.0	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

WCDMA Band II (Diversity Antenna)							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps _ Lowest Channel							
1	809.924	-82.0	12.2	-69.8	-13.0	-56.8	Horizontal
2	906.304	-82.5	13.9	-68.6	-13.0	-55.6	Horizontal
3	965.474	-82.8	14.3	-68.5	-13.0	-55.5	Horizontal
4	3704.8	-64.2	7.6	-56.6	-13.0	-43.6	Horizontal
5	5557.2	-65.7	11.8	-53.9	-13.0	-40.9	Horizontal
6	611.462	-80.2	9.0	-71.2	-13.0	-58.2	Vertical
7	899.958	-82.7	13.9	-68.9	-13.0	-55.9	Vertical
8	979.139	-82.6	14.4	-68.1	-13.0	-55.1	Vertical
9	3704.8	-64.7	7.6	-57.2	-13.0	-44.2	Vertical
10	5557.2	-64.2	11.8	-52.5	-13.0	-39.5	Vertical
RMC 12.2kbps _ Middle Channel							
1	739.214	-81.6	11.6	-70.0	-13.0	-57.0	Horizontal
2	862.802	-81.9	13.1	-68.8	-13.0	-55.8	Horizontal
3	972.283	-82.9	14.4	-68.5	-13.0	-55.5	Horizontal
4	3760	-64.9	7.8	-57.1	-13.0	-44.1	Horizontal
5	5640	-66.2	11.6	-54.6	-13.0	-41.6	Horizontal
6	760.287	-81.5	11.5	-70.0	-13.0	-57.0	Vertical
7	833.013	-81.8	12.6	-69.3	-13.0	-56.3	Vertical
8	938.714	-82.0	14.2	-67.8	-13.0	-54.8	Vertical
9	3760	-64.4	7.8	-56.6	-13.0	-43.6	Vertical
10	5640	-65.8	11.6	-54.3	-13.0	-41.3	Vertical
RMC 12.2kbps _ Highest Channel							
1	713.692	-81.4	11.2	-70.2	-13.0	-57.2	Horizontal
2	881.184	-82.5	13.6	-68.9	-13.0	-55.9	Horizontal
3	965.474	-81.5	14.3	-67.2	-13.0	-54.2	Horizontal
4	3815.2	-64.4	8.0	-56.5	-13.0	-43.5	Horizontal
5	5722.8	-67.9	11.4	-56.5	-13.0	-43.5	Horizontal
6	862.802	-82.0	13.1	-68.9	-13.0	-55.9	Vertical
7	893.656	-82.0	13.9	-68.1	-13.0	-55.1	Vertical
8	952.000	-82.1	14.3	-67.8	-13.0	-54.8	Vertical
9	3815.2	-65.1	8.0	-57.1	-13.0	-44.1	Vertical
10	5722.8	-66.9	11.4	-55.5	-13.0	-42.5	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

WCDMA Band IV (Main Antenna)							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps_ Lowest Channel							
1	527.571	-79.6	7.2	-72.5	-13.0	-59.5	Horizontal
2	660.602	-80.2	10.2	-70.0	-13.0	-57.0	Horizontal
3	809.924	-81.3	12.2	-69.1	-13.0	-56.1	Horizontal
4	3424.8	-63.9	6.5	-57.5	-13.0	-44.5	Horizontal
5	5137.2	-64.0	10.0	-53.9	-13.0	-40.9	Horizontal
6	611.462	-79.9	9.0	-70.9	-13.0	-57.9	Vertical
7	718.725	-81.2	11.3	-69.8	-13.0	-56.8	Vertical
8	771.047	-80.5	11.7	-68.7	-13.0	-55.7	Vertical
9	3424.8	-65.8	6.5	-59.4	-13.0	-46.4	Vertical
10	5137.2	-64.8	10.0	-54.8	-13.0	-41.8	Vertical
RMC 12.2kbps_ Middle Channel							
1	674.677	-80.0	10.3	-69.7	-13.0	-56.7	Horizontal
2	739.214	-80.1	11.6	-68.5	-13.0	-55.5	Horizontal
3	881.184	-82.1	13.6	-68.5	-13.0	-55.5	Horizontal
4	3464.8	-63.0	6.6	-56.4	-13.0	-43.4	Horizontal
5	5197.2	-66.2	10.2	-56.0	-13.0	-43.0	Horizontal
6	689.051	-81.3	10.8	-70.5	-13.0	-57.5	Vertical
7	713.692	-81.2	11.2	-70.0	-13.0	-57.0	Vertical
8	881.184	-81.5	13.6	-67.9	-13.0	-54.9	Vertical
9	3464.8	-64.3	6.6	-57.6	-13.0	-44.6	Vertical
10	5197.2	-67.5	10.2	-57.2	-13.0	-44.2	Vertical
RMC 12.2kbps_ Highest Channel							
1	703.731	-80.9	11.1	-69.9	-13.0	-56.9	Horizontal
2	893.656	-81.6	13.9	-67.7	-13.0	-54.7	Horizontal
3	932.141	-81.5	14.1	-67.4	-13.0	-54.4	Horizontal
4	3505.2	-65.7	6.8	-58.9	-13.0	-45.9	Horizontal
5	5257.8	-67.0	10.6	-56.5	-13.0	-43.5	Horizontal
6	739.214	-80.1	11.6	-68.5	-13.0	-55.5	Vertical
7	881.184	-81.9	13.6	-68.3	-13.0	-55.3	Vertical
8	972.283	-82.0	14.4	-67.6	-13.0	-54.6	Vertical
9	3505.2	-64.2	6.8	-57.4	-13.0	-44.4	Vertical
10	5257.8	-64.6	10.6	-54.0	-13.0	-41.0	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

WCDMA Band IV (Diversity Antenna)							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps_ Lowest Channel							
1	620.117	-80.0	9.1	-70.8	-13.0	-57.8	Horizontal
2	749.676	-81.7	11.5	-70.2	-13.0	-57.2	Horizontal
3	793.028	-81.5	11.8	-69.7	-13.0	-56.7	Horizontal
4	3424.8	-64.5	6.5	-58.0	-13.0	-45.0	Horizontal
5	5137.2	-64.5	10.0	-54.4	-13.0	-41.4	Horizontal
6	655.977	-81.5	10.1	-71.4	-13.0	-58.4	Vertical
7	809.924	-81.5	12.2	-69.3	-13.0	-56.3	Vertical
8	906.304	-82.3	13.9	-68.4	-13.0	-55.4	Vertical
9	3424.8	-65.4	6.5	-58.9	-13.0	-45.9	Vertical
10	5137.2	-66.4	10.0	-56.4	-13.0	-43.4	Vertical
RMC 12.2kbps_ Middle Channel							
1	651.383	-80.8	10.0	-70.8	-13.0	-57.8	Horizontal
2	804.252	-82.0	12.2	-69.8	-13.0	-56.8	Horizontal
3	833.013	-81.8	12.6	-69.3	-13.0	-56.3	Horizontal
4	3464.8	-65.9	6.6	-59.3	-13.0	-46.3	Horizontal
5	5197.2	-65.7	10.2	-55.5	-13.0	-42.5	Horizontal
6	734.037	-81.5	11.4	-70.2	-13.0	-57.2	Vertical
7	815.635	-81.5	12.2	-69.3	-13.0	-56.3	Vertical
8	893.656	-82.6	13.9	-68.7	-13.0	-55.7	Vertical
9	3464.8	-68.8	6.6	-62.2	-13.0	-49.2	Vertical
10	5197.2	-67.5	10.2	-57.3	-13.0	-44.3	Vertical
RMC 12.2kbps_ Highest Channel							
1	703.731	-81.8	11.1	-70.8	-13.0	-57.8	Horizontal
2	887.398	-82.5	13.7	-68.8	-13.0	-55.8	Horizontal
3	986.044	-82.8	14.6	-68.2	-13.0	-55.2	Horizontal
4	3505.2	-67.0	6.8	-60.2	-13.0	-47.2	Horizontal
5	5257.8	-67.8	10.6	-57.2	-13.0	-44.2	Horizontal
6	350.972	-78.5	4.5	-74.0	-13.0	-61.0	Vertical
7	412.539	-80.2	5.2	-74.9	-13.0	-61.9	Vertical
8	893.656	-82.6	13.9	-68.7	-13.0	-55.7	Vertical
9	3505.2	-66.9	6.8	-60.1	-13.0	-47.1	Vertical
10	5257.8	-65.4	10.6	-54.8	-13.0	-41.8	Vertical

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1

WCDMA Band V							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
RMC 12.2kbps _ Lowest Channel							
1	586.217	-88.1	37.7	-50.4	-13.0	-37.4	Horizontal
2	713.692	-88.6	40.5	-48.1	-13.0	-35.1	Horizontal
3	765.648	-88.1	41.0	-47.1	-13.0	-34.1	Horizontal
4	1652.8	-61.8	0.2	-61.6	-13.0	-48.6	Horizontal
5	2479.2	-63.6	3.6	-60.0	-13.0	-47.0	Horizontal
6	660.602	-88.4	39.6	-48.9	-13.0	-35.9	Vertical
7	744.427	-87.5	40.8	-46.7	-13.0	-33.7	Vertical
8	925.613	-87.0	42.9	-44.1	-13.0	-31.1	Vertical
9	1652.8	-62.1	0.2	-61.9	-13.0	-48.9	Vertical
10	2479.2	-64.1	3.6	-60.5	-13.0	-47.5	Vertical
RMC 12.2kbps _ Middle Channel							
1	523.876	-87.8	36.4	-51.4	-13.0	-38.4	Horizontal
2	655.977	-88.3	39.5	-48.7	-13.0	-35.7	Horizontal
3	958.714	-87.0	43.0	-44.0	-13.0	-31.0	Horizontal
4	1672.8	-63.6	0.4	-63.3	-13.0	-50.3	Horizontal
5	2509.2	-65.2	3.7	-61.5	-13.0	-48.5	Horizontal
6	620.117	-88.4	38.6	-49.8	-13.0	-36.8	Vertical
7	728.897	-89.1	40.8	-48.3	-13.0	-35.3	Vertical
8	945.334	-87.0	43.0	-44.0	-13.0	-31.0	Vertical
9	1672.8	-62.9	0.4	-62.5	-13.0	-49.5	Vertical
10	2509.2	-62.5	3.7	-58.8	-13.0	-45.8	Vertical
RMC 12.2kbps _ Highest Channel							
1	569.969	-88.8	37.3	-51.5	-13.0	-38.5	Horizontal
2	708.694	-87.9	40.4	-47.5	-13.0	-34.5	Horizontal
3	906.304	-88.1	42.8	-45.3	-13.0	-32.3	Horizontal
4	1693.2	-62.3	0.5	-61.8	-13.0	-48.8	Horizontal
5	2539.8	-64.6	3.8	-60.8	-13.0	-47.8	Horizontal
6	594.514	-87.3	38.0	-49.3	-13.0	-36.3	Vertical
7	760.287	-87.9	40.8	-47.1	-13.0	-34.1	Vertical
8	986.044	-86.2	43.3	-42.9	-13.0	-29.9	Vertical
9	1693.2	-62.2	0.5	-61.7	-13.0	-48.7	Vertical
10	2539.8	-63.1	3.8	-59.3	-13.0	-46.3	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

5.9 FREQUENCY STABILITY

Test Requirement: FCC 47 CFR Part 2.1055 &
FCC 47 CFR Part 22.355 &
FCC 47 CFR Part 24.235 &
FCC 47 CFR Part 27.54

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limits:

FCC 47 CFR Part 22.355,

The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC 47 CFR Part 24.235, FCC 47 CFR Part 27.54

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Setup: Refer to section 4.2.2 for details.

Test Procedures:

1) Use CMW 500 with Frequency Error measurement capability.

a) Temp. = -30° to $+50^{\circ}\text{C}$

b) Voltage = low voltage, 3.4 Vdc, Normal, 3.87 Vdc and High voltage, 4.45 Vdc.

2) Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to 20°C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}\text{C}$ is reached.

3) Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

Equipment Used: Refer to section 3 for details.

Test Result: Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature ($^{\circ}\text{C}$)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
GSM 850 1Tx-slot							
GMSK	190 / 836.6	VL	TN	-3.26	-0.0039	± 2.5	Pass
		VN		-2.49	-0.0030	± 2.5	Pass
		VH		-2.54	-0.0030	± 2.5	Pass
		VN	50	-2.87	-0.0034	± 2.5	Pass
			40	-3.03	-0.0036	± 2.5	Pass
			30	-3.16	-0.0038	± 2.5	Pass
			20	-2.49	-0.0030	± 2.5	Pass
			10	-2.81	-0.0034	± 2.5	Pass
			0	-1.94	-0.0023	± 2.5	Pass
			-10	-2.68	-0.0032	± 2.5	Pass
			-20	-2.39	-0.0029	± 2.5	Pass
			-30	-3.06	-0.0037	± 2.5	Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Result
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
GSM 1900 1Tx-slot							
GMSK	661 / 1880.0	VL	TN	7.47	0.0040	Note 1	Pass
		VN		3.71	0.0020		Pass
		VH		5.84	0.0031		Pass
		VN	50	6.68	0.0036		Pass
			40	7.31	0.0039		Pass
			30	6.94	0.0037		Pass
			20	3.71	0.0020		Pass
			10	5.84	0.0031		Pass
			0	5.84	0.0031		Pass
			-10	6.69	0.0036		Pass
			-20	3.11	0.0017		Pass
			-30	3.23	0.0017		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Result
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
EDGE 850 1Tx-slot							
8PSK	190 / 836.6	VL	TN	-3.31	-0.0040	± 2.5	Pass
		VN		-3.52	-0.0042	± 2.5	Pass
		VH		-2.88	-0.0034	± 2.5	Pass
		VN	50	-2.76	-0.0033	± 2.5	Pass
			40	-3.87	-0.0046	± 2.5	Pass
			30	-2.84	-0.0034	± 2.5	Pass
			20	-3.52	-0.0042	± 2.5	Pass
			10	-4.26	-0.0051	± 2.5	Pass
			0	-4.41	-0.0053	± 2.5	Pass
			-10	-3.97	-0.0047	± 2.5	Pass
			-20	-3.88	-0.0046	± 2.5	Pass
			-30	-4.24	-0.0051	± 2.5	Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Result
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
EDGE 1900 1Tx-slot							
8PSK	661 / 1880.0	VL	TN	4.55	0.0024	Note 1	Pass
		VN		3.83	0.0020		Pass
		VH		3.42	0.0018		Pass
		VN	50	4.26	0.0023		Pass
			40	4.51	0.0024		Pass
			30	4.13	0.0022		Pass
			20	3.83	0.0020		Pass
			10	3.52	0.0019		Pass
			0	3.66	0.0019		Pass
			-10	4.53	0.0024		Pass
			-20	2.89	0.0015		Pass
			-30	3.17	0.0017		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Result
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
WCDMA II RMC 12.2Kbps							
BPSK	9400 / 1880.0	VL	TN	-13.62	-0.0072	Note 1	Pass
		VN		-11.79	-0.0063		Pass
		VH		-14.27	-0.0076		Pass
		VN	50	-13.25	-0.0070		Pass
			40	-12.88	-0.0069		Pass
			30	-12.46	-0.0066		Pass
			20	-11.79	-0.0063		Pass
			10	-14.41	-0.0077		Pass
			0	-15.11	-0.0080		Pass
			-10	-15	-0.0080		Pass
			-20	-12.64	-0.0067		Pass
			-30	-13.43	-0.0071		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Result
	(MHz)	(Vdc)	(℃)	(Hz)	(ppm)	(ppm)	
WCDMA IV RMC 12.2Kbps							
BPSK	1412 / 1732.4	VL	TN	-10.71	-0.0062	Note 1	Pass
		VN		-9.41	-0.0054		Pass
		VH		-9.69	-0.0056		Pass
		VN	50	-8.88	-0.0051		Pass
			40	-9.74	-0.0056		Pass
			30	-9.61	-0.0055		Pass
			20	-9.41	-0.0054		Pass
			10	-8.37	-0.0048		Pass
			0	-10.44	-0.0060		Pass
			-10	-10.69	-0.0062		Pass
			-20	-10.21	-0.0059		Pass
			-30	-10.53	-0.0061		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Result
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
WCDMA V RMC 12.2Kbps							
BPSK	4182 / 836.4	VL	TN	-7.62	-0.0091	± 2.5	Pass
		VN		-9.88	-0.0118	± 2.5	Pass
		VH		-9.65	-0.0115	± 2.5	Pass
		VN	50	-9.16	-0.0110	± 2.5	Pass
			40	-9.33	-0.0112	± 2.5	Pass
			30	-9.66	-0.0115	± 2.5	Pass
			20	-9.88	-0.0118	± 2.5	Pass
			10	-8.35	-0.0100	± 2.5	Pass
			0	-10.06	-0.0120	± 2.5	Pass
			-10	-8.81	-0.0105	± 2.5	Pass
			-20	-8.88	-0.0106	± 2.5	Pass
			-30	-7.32	-0.0088	± 2.5	Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1


APPENDIX A RF TEST DATA

A.1 GSM 850


Peak to Average Ratio

Band	Channel	Freq (MHz)	Result (dB)	Limit (dB)	Verdict
GSM 850	190	836.6	0.13	13	PASS
GSM 850	251	848.8	0.14	13	PASS
GSM 850	128	824.2	0.14	13	PASS


GSM850_Channel190

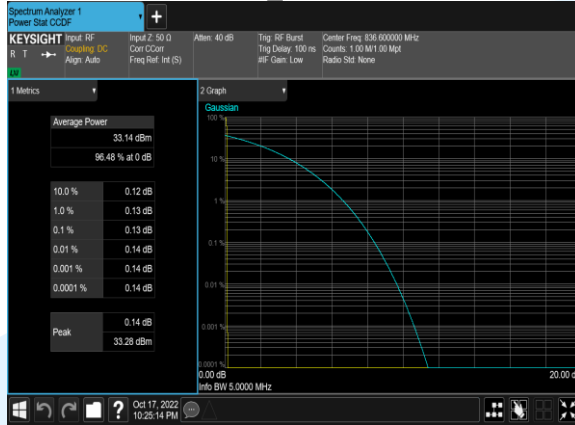

GSM850_Channel251

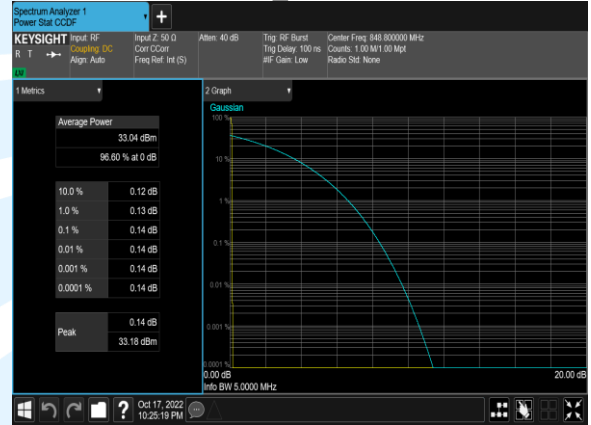


GSM850_Channel128

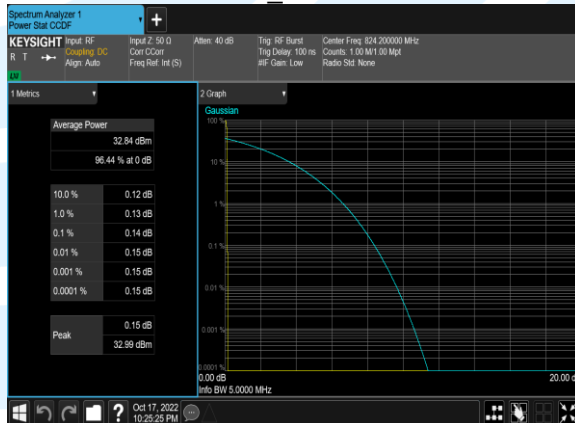


Occupied Bandwidth

Band	Channel	Freq. (MHz)	OBW (MHz)	26dB BW (MHz)
GSM 850	251	848.8	0.24611	0.3149
GSM 850	128	824.2	0.24500	0.3187
GSM 850	190	836.6	0.24430	0.3175


GSM850_Channel251

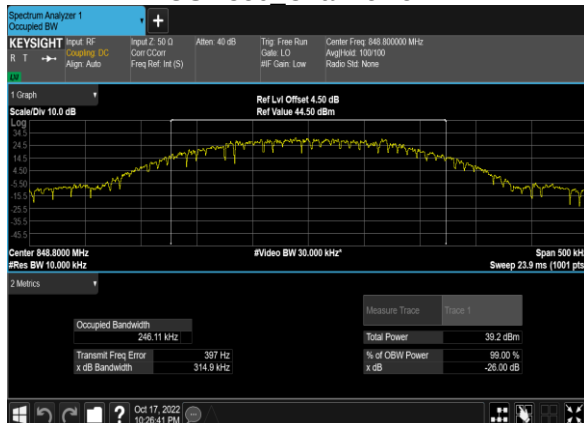

GSM850_Channel128

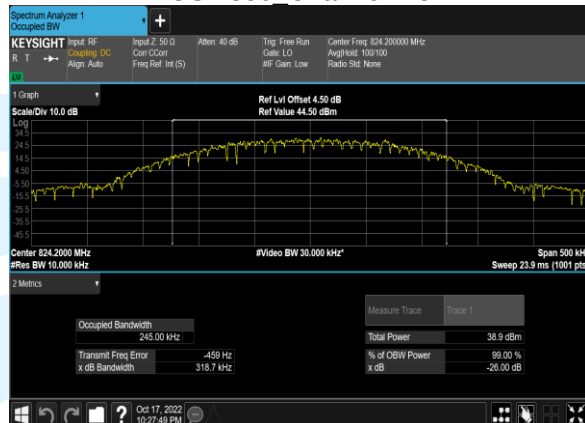

GSM850_Channel190

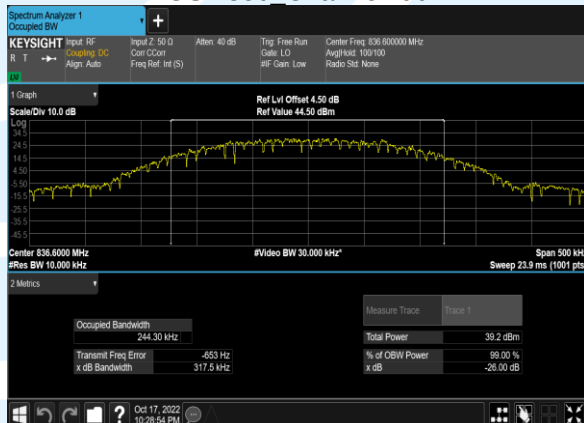


Conducted Spurious Emissions

Band	Channel	Freq (MHz)	Result (dBm)	Limit (dBm)	Verdict
GSM 850	251	848.8	-30.46	-13	PASS
GSM 850	128	824.2	-30.51	-13	PASS
GSM 850	190	836.6	-30.64	-13	PASS

GSM850_Channel251



GSM850_Channel128

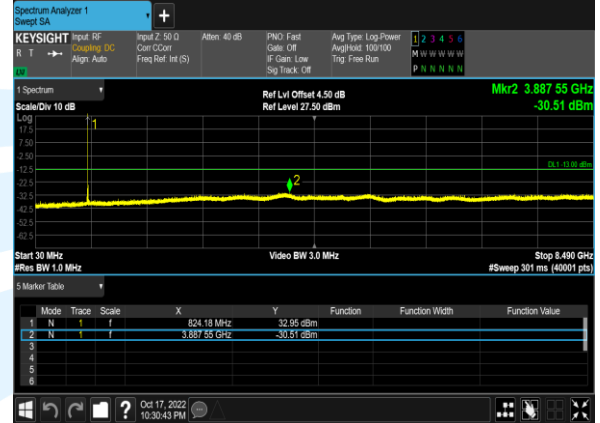


GSM850_Channel190



Conducted Band Edge

Band	Channel	Freq (MHz)	Result	Verdict
GSM 850	128	824.2	see graph	PASS
GSM 850	251	848.8	see graph	PASS

GSM850 Channel128

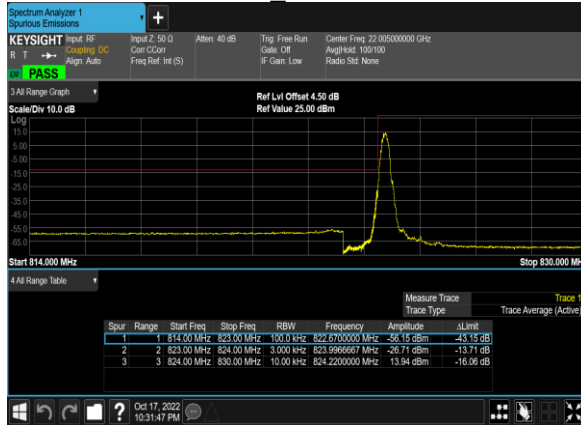

GSM850 Channel251



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1


Peak to Average Ratio GPRS

Band	Channel	Freq (MHz)	Slots	Result (dB)	Limit (dB)	Verdict
GSM 850	190	836.6	1 Tx	0.14	13	PASS
GSM 850	251	848.8	1 Tx	0.13	13	PASS
GSM 850	128	824.2	1 Tx	0.14	13	PASS


GSM850_Channel190

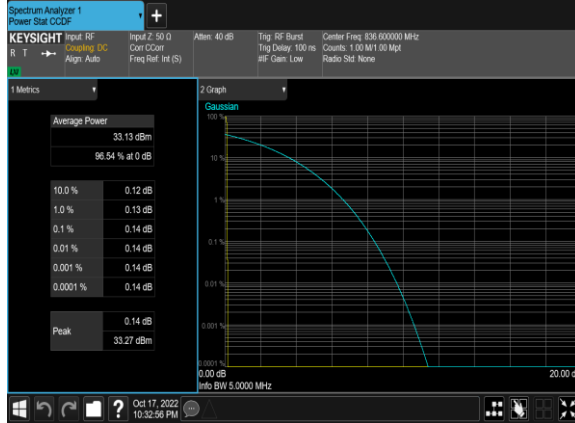

GSM850_Channel251

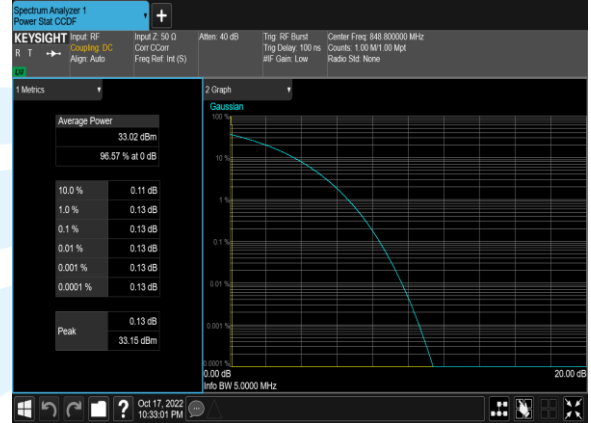


GSM850_Channel128

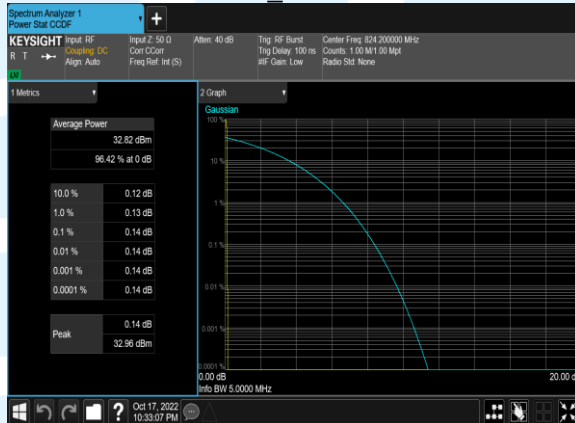

Occupied Bandwidth GPRS

Band	Channel	Freq (MHz)	Slots	OBW (MHz)	26dB BW (MHz)
GSM 850	190	836.6	1 Tx	0.24428	0.3137
GSM 850	251	848.8	1 Tx	0.24428	0.3213
GSM 850	128	824.2	1 Tx	0.24369	0.3231


GSM850_Channel190

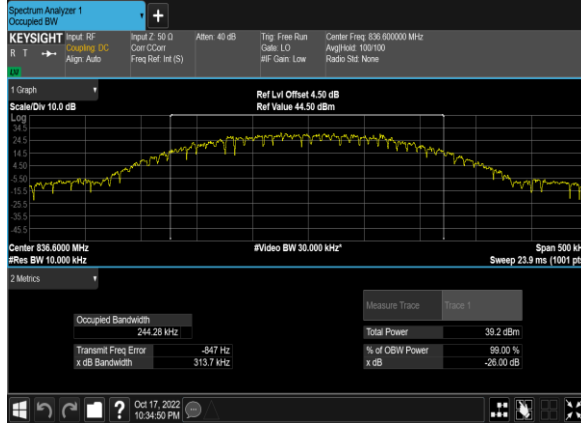

GSM850_Channel251



GSM850_Channel128

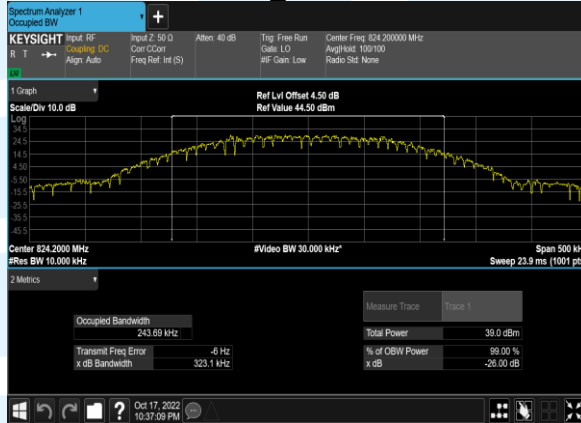

Conducted Spurious Emissions GPRS

Band	Channel	Freq (MHz)	Slots	Result (dBm)	Limit (dBm)	Verdict
GSM 850	190	836.6	1 Tx	-30.64	-13	PASS
GSM 850	251	848.8	1 Tx	-30.61	-13	PASS
GSM 850	128	824.2	1 Tx	-30.55	-13	PASS


GSM850 Channel 190



GSM850 Channel 251




GSM850 Channel 128

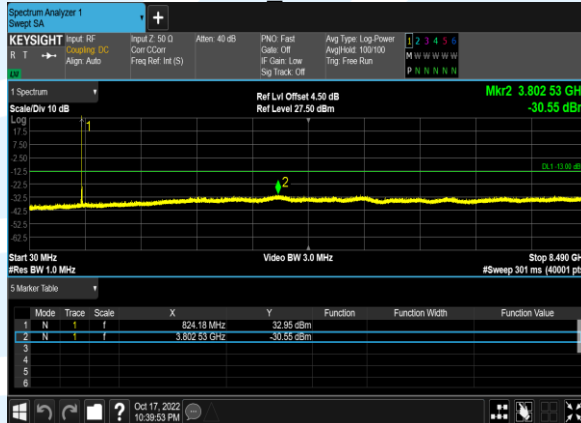

Conducted Band Edge GPRS

Band	Channel	Freq (MHz)	Slots	Result	Verdict
GSM 850	251	848.8	1 Tx	see graph	PASS
GSM 850	128	824.2	1 Tx	see graph	PASS

GSM850 Channel251

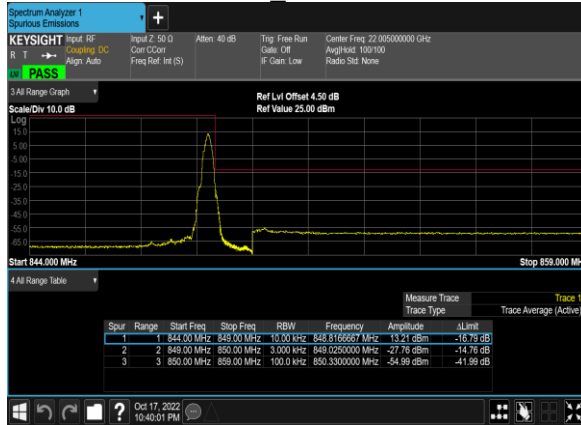

GSM850 Channel128



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC23G-V1.1