




**FCC Part 25, Certification Application  
of the  
Axonn, Corporation LLC  
Modular Satellite Transmitter Unit STX2**

**Issue Date: July 12, 2005  
UST Project No: 05-0141**



I certify that I am authorized to sign for the manufacturer and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

**UNITED STATES TECHNOLOGIES, INC. (AGENT RESPONSIBLE FOR TEST):**

By: 

Name: Louis A Feudi

Title: Operations Manager

Date: July 12, 2005

**Axon Corporation LLC  
2021 Lakeshore Drive, Suite 533  
New Orleans, LA 70122**

By: \_\_\_\_\_

Name: \_\_\_\_\_

Title: \_\_\_\_\_

Date: \_\_\_\_\_

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of U.S. Technologies. The results contained in this report are subject to the adequacy and representative character of the sample provided.

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

## MEASUREMENT/TECHNICAL REPORT

This report concerns (check one): Original grant X  
Class II change \_\_\_\_\_

Equipment type: Modular Transmitter

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes \_\_\_\_\_ No X

If yes, defer until: \_\_\_\_\_  
date

N.A. agrees to notify the Commission by N.A.  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

United States Technologies, Inc.  
3505 Francis Circle  
Alpharetta, GA 30004

Phone Number: (770) 740-0717  
Fax Number: (770) 740-1508

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## **TABLE OF CONTENTS**

### **AGENCY AGREEMENT LETTER OF CONFIDENTIALITY**

### **SECTION 1**

#### **GENERAL INFORMATION**

- 1.1 Product Description
- 1.2 Related Submittal(s)

### **SECTION 2**

#### **TESTS AND MEASUREMENTS**

- 2.1 Configuration of Tested EUT
- 2.2 Test Facility
- 2.3 Test Equipment
- 2.4 Modifications
- 2.5 Antenna Description
- 2.6 RF Power Output
- 2.7 Modulation Characteristics
- 2.8 Occupied Bandwidth
- 2.9 Spurious Emissions at Antenna Terminals
- 2.10 Field Strength of Spurious Radiation
- 2.11 Frequency Stability
- 2.12 Emissions from Mobile Earth Stations for Protection of Aeronautical Radionavigation-Satellite Service

### **SECTION 3**

#### **PHOTOGRAPHS**

### **SECTION 4**

#### **RF EXPOSURE INFORMATION**

### **SECTION 5**

#### **LABELING INFORMATION**

### **SECTION 6**

#### **BLOCK DIAGRAMS/SCHEMATICS**

### **SECTION 7**

#### **USER'S MANUAL**

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

## **LIST OF FIGURES AND TABLES**

### **FIGURES**

- 1) Test Configuration
- 2) Photograph(s) for Spurious Emissions
- 3) RF Power Output
- 4) Modulation Characteristics
- 5) Occupied Bandwidth
- 6) Spurious Emissions at Antenna Terminals
- 7) Field Strength of Spurious Emission
- 8) Emissions from Mobile Earth Stations for Protection of Aeronautical Radionavigation-Satellite Service

### **TABLES**

- 1) EUT and Peripherals
- 2) Test Instruments
- 3) RF Power Output
- 4) Field Strength of Spurious Emissions
- 5) Frequency Stability

U.S. Technologies, Inc.

FCC ID: L2V-STX2-1

FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

# SECTION 1

## GENERAL INFORMATION

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## GENERAL INFORMATION

### 1.1 Product Description

The Equipment Under Test (EUT) is the Axonn Corporation, L.L.C. Model STX2. The STX2 is a battery operated, modular telemetry device designed to communicate with the Globalstar satellite constellation and provide cost-efficient and reliable asset tracking and fleet management.

The STX2 can be installed in a compact rugged enclosure designed to attach easily, with either screws or auto-body grade adhesive, to the top of a cargo container, railcar or trailer. The Unit operates at the following 4 transmit frequencies: 1611.25, 1613.75, 1616.26 and 1618.25 MHz. Once service is established with Globalstar, STX2 sends information to Globalstar satellites which relay the information to ground stations. The processed information is then available to the user via the internet. The device is delivered complete and ready-to-go with no need for an external antenna or power source.

The EUT was configured to operate at 1611.25 and 1618.25 MHz, 255 Symbols, BPSK Demod on continuous transmit mode.

For the purpose of this test the EUT was placed into a (+20 dBm) constant TX mode of operation.

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## **1.2 Related Submittal(s)/Grant(s)**

The EUT is subject to the following authorizations:

- a) Certification as a modular transmitter as specified by Part 25.

The information contained in this report is presented for the Part 25 Certification authorization(s) for the EUT.



U.S. Technologies, Inc.

FCC ID: L2V-STX2-1

FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## SECTION 2

# TEST AND MEASUREMENTS

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## **TEST AND MEASUREMENTS**

### **2.1 Configuration of Tested System**

Prepared in accordance with the requirements of the FCC Rules and Regulations Part 2 & 25. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. A block diagram of the tested system is shown in Figure 1. Test configuration photographs for spurious emissions are shown in Figure 2.

### **2.2 Test Facility**

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and registered by the FCC under Registration Number 91037. Additionally, this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file IC2982.

### **2.3 Test Equipment**

Table 2 describes test equipment used to evaluate this product.


### **2.4 Modifications**

No modifications were made by US Tech to bring the EUT into compliance with FCC Part 25 limits for the transmitter portion of the EUT.

---

**FIGURE 1**

**TEST CONFIGURATION**

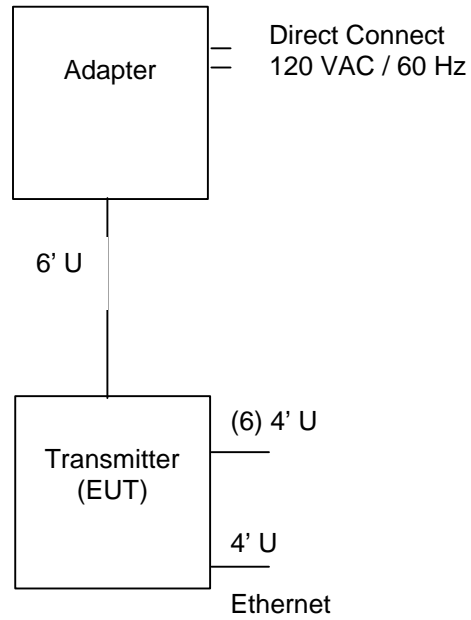

U.S. Technologies, Inc.

FCC ID: L2V-STX2-1

FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**TABLE 1**

**EUT and Peripherals**

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
Transmitter Axonn Corporation (EUT)	STX2	50009	None	6' U Power Cable 4' U Ethernet (6) 4' U
Adapter	DSA-0151A-06	None	N/A	None

U.S. Technologies, Inc.

FCC ID: L2V-STX2-1

FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

**FIGURE 2a**

**Photograph(s) for Spurious Emissions**



---

**FIGURE 2b**

**Photograph(s) for Spurious Emissions (Cont.)**



Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**TABLE 2**  
**TEST INSTRUMENTS**

EQUIPMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	DATE OF LAST CALIBRATION
SPECTRUM ANALYZER	8558B	HEWLETT-PACKARD	2332A10055	02/19/04
SPECTRUM ANALYZER	8593E	HEWLETT-PACKARD	3205A00124	3/1/05
RF PREAMP	8447D	HEWLETT-PACKARD	2944A07436	4/6/05
RF PREAMP	8449B	HEWLETT-PACKARD	3008A00480	6/23/04
LOG PERIODIC ANTENNA	3146	EMCO	3236	6/3/05
LISN (x 2) 8028-50-TS24-BNC	8028	SOLAR ELE.	910494 & 910495	1/27/05
HORN ANTENNA	3115	HEWLETT-PACKARD	9107-3723	
CALCULATION PROGRAM	N/A	N/A	EMCCALC	N/A

U.S. Technologies, Inc.

FCC ID: L2V-STX2-1

FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## **2.5 Antenna Description**

The EUT will incorporate a Satellite transmit antenna: 25 mm ceramic patch, +4 dBi gain. GPS receive antenna: ceramic patch, passive.



Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## **2.6 RF Power Output (FCC Section 2.1046)**

In bands shared coequally with terrestrial radio communications services, the equivalent isotropically radiated power transmitted in any direction towards the horizon by an earth station operating in frequency bands between 1 and 15 GHz, shall not exceed the limits below.

For angles of elevation of the horizon greater than 5 degrees there shall be no restriction as to the equivalent isotropically radiated power transmitted by an earth station towards the horizon.

### **FCC Minimum Standard (FCC Section 25.204 & )**

EIRP < +40 dBW in any 4 kHz band for  $\theta=0$  degrees

The manufacturer has stated that the EUT has a maximum output power of +22 dBm.

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**TABLE 3**  
**RF POWER OUTPUT**

Frequency of Fundamental (MHz)	Measurement (dBm)	Cable Loss (dBm)	Adjusted Measurement (dBm)	Measurement (Watt)
1611.188	20.33	1.1	21.43	0.139
1618.713	19.12	1.1	20.22	0.105

Note: Given the output power and antenna gain of +4 dBi, even the direct lobe of radiation meets the FCC's EIRP Requirement for  $\theta = 0$  (+40 dBW)

**Test Date: March 30, 2004**


**Tester**  
**Signature:** David P. Blethen

**Name:** David Blethen

Report Number: 05-0141  
 Customer: Axonn Corporation  
 Model: GENSTXII

Issue Date: July 12, 2005

**Figure 3a.**  
**RF Power Output Low**

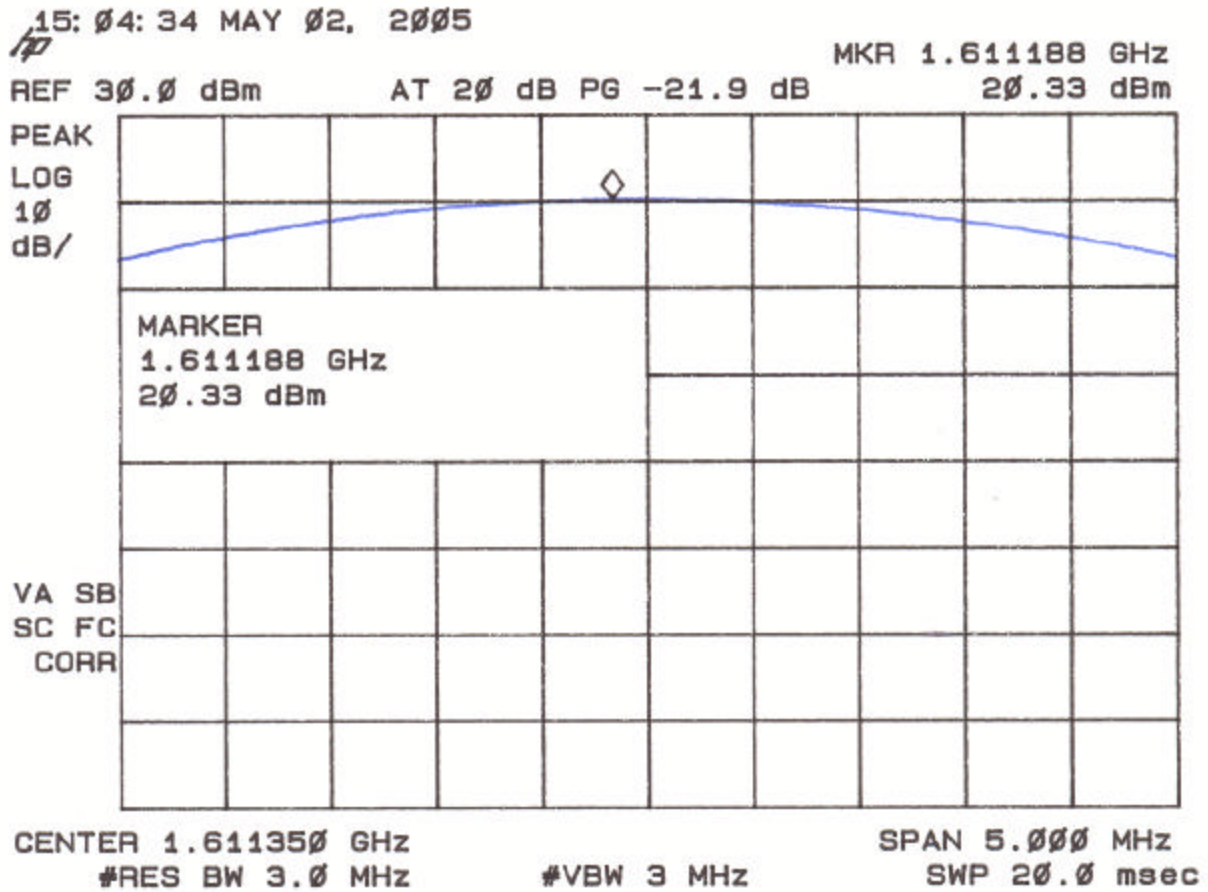

U.S. Technologies, Inc.


FCC ID: L2V-STX2-1

FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**Figure 3b.**  
**RF Power Output High**

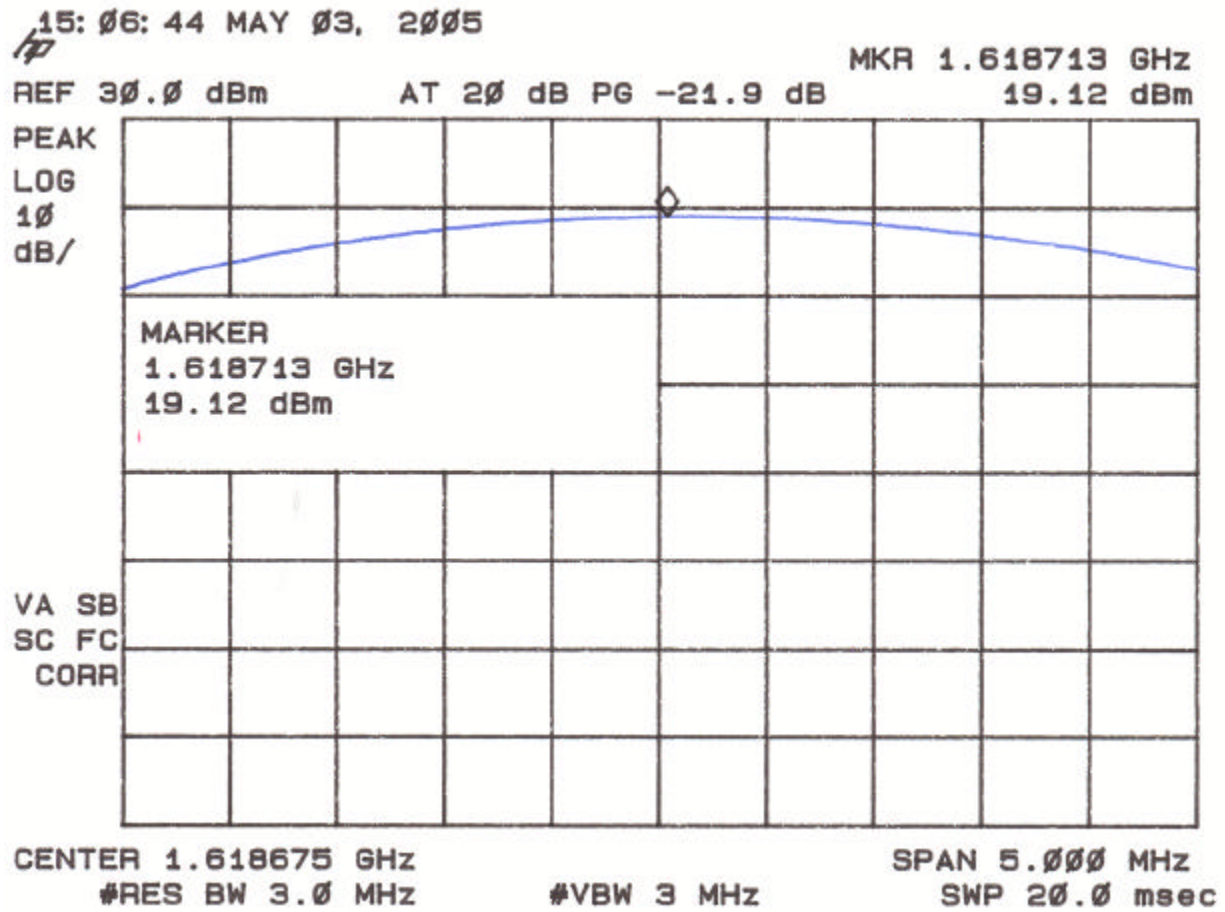

U.S. Technologies, Inc.

FCC ID: L2V-STX2-1

FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## **2.7 Modulation Characteristics (FCC Section 2.1047)**

Since the device incorporates digital modulation techniques, this information is not necessary.

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

**Figure 4.**  
**Modulation Characteristics**

**The EUT uses digital modulation techniques only which were employed during the tests for occupied bandwidth.**

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## 2.8 Occupied Bandwidth (FCC Section 2.1049)

EUT was modulated by its own internal sources. Low and High Channels were tested. The bandwidth of the fundamental was measured using a spectrum. The results are shown in Figure 5a through Figure 5d. Long sweep times were applied near to the fundamental to ensure a good signal was obtained.

### FCC Minimum Standard (FCC Section 25.202(f))

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency by more than 50% up to and including 100% of the authorized bandwidth (2.5 MHz), at least 25 dB.

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency by more than 100% up to and including 250% of the authorized bandwidth (2.5 MHz), at least 35 dB.

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (2.5 MHz), at least

$43 + 10 \log (P_{\text{Watts}})$  attenuation below the mean power of the transmitter.

For Lowest Channel =  $43 + 10 \log (0.139) = 34.4 \text{ dB}$

For Highest Channel =  $43 + 10 \log (0.105) = 33.2 \text{ dB}$


#### Note:

A 10 kHz RBW was used instead. This was deemed to meet the to 4 kHz RBW requirement.

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**Figure 5a.**  
**99 % Occupied Bandwidth – Low**

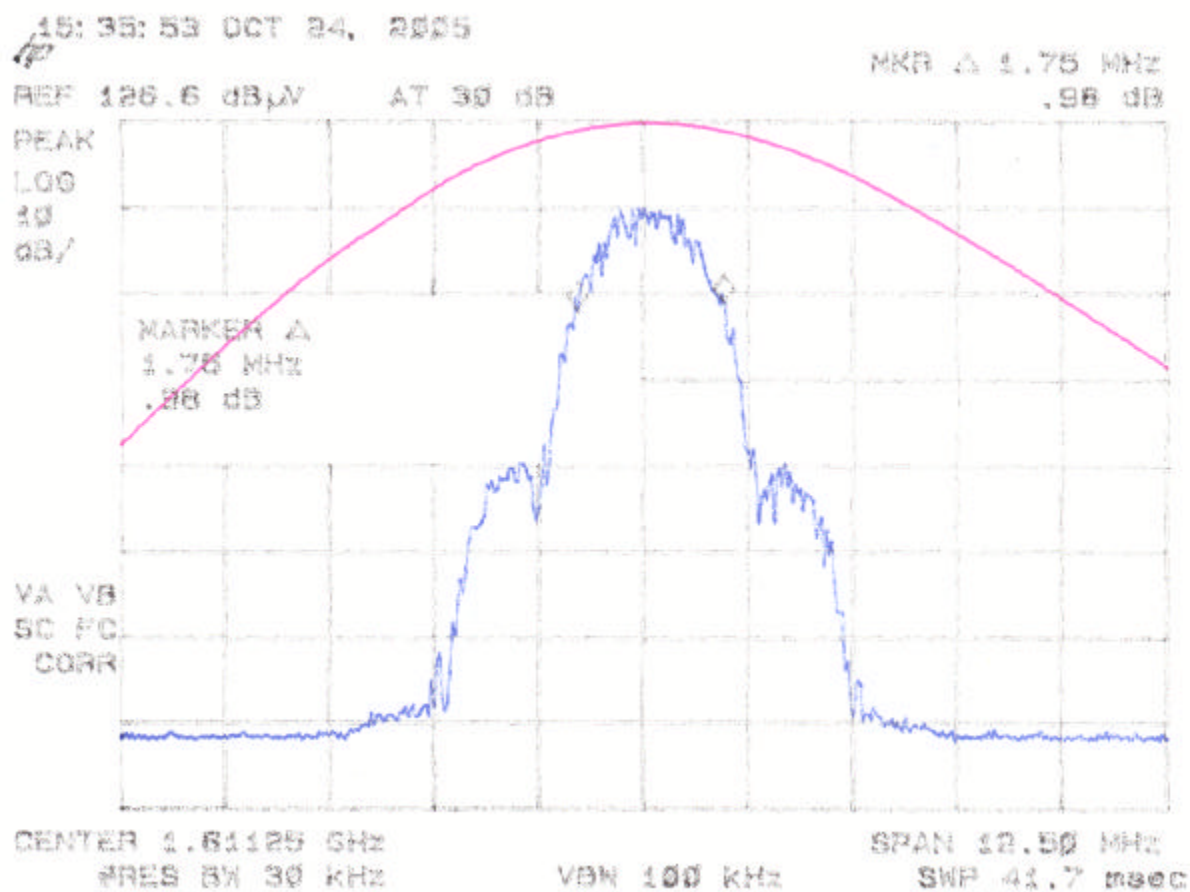




Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005


**Figure 5b.**  
**Occupied Bandwidth > 50% From Edge of Authorized Bandwidth – Low**

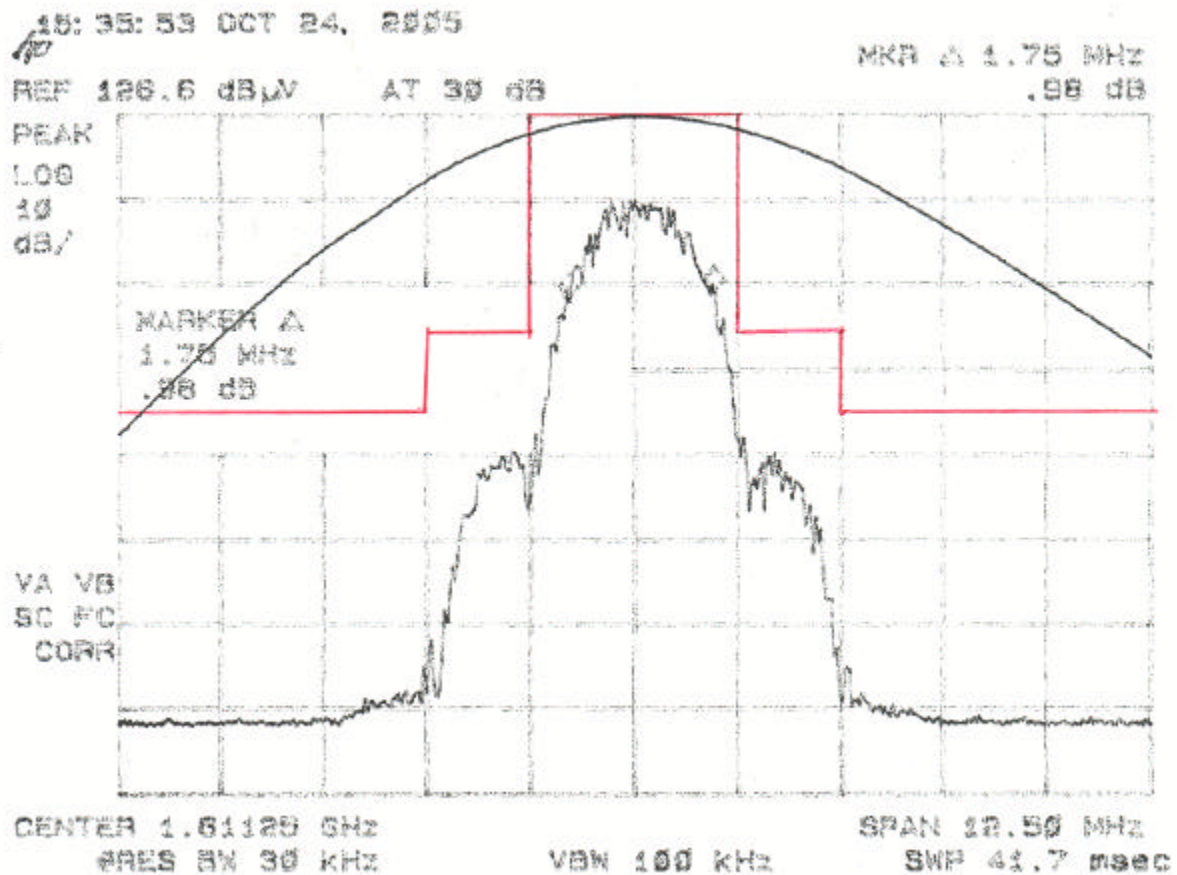

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005


**Figure 5c.**  
**99% Occupied Bandwidth – High**

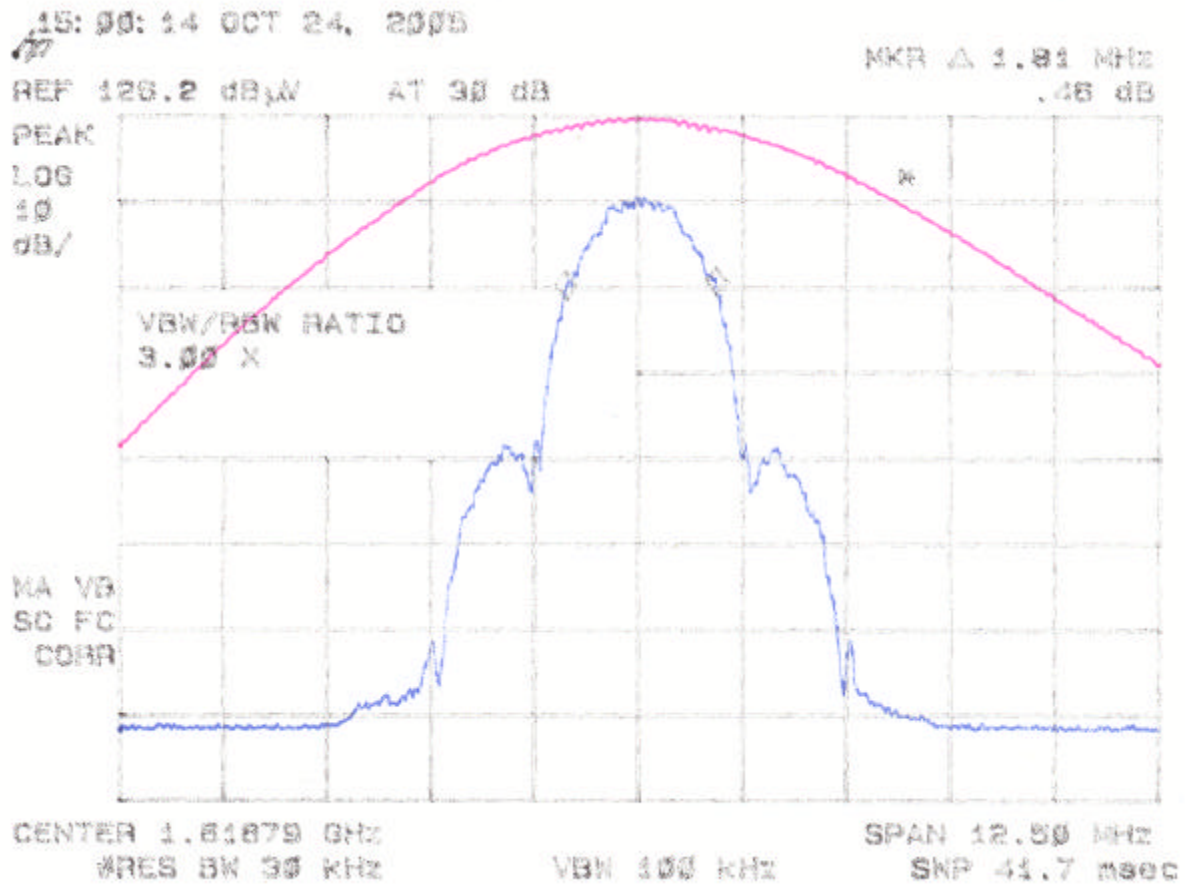

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**Figure 5d.**  
**Occupied Bandwidth > 50% From Edge of Authorized Bandwidth – High**

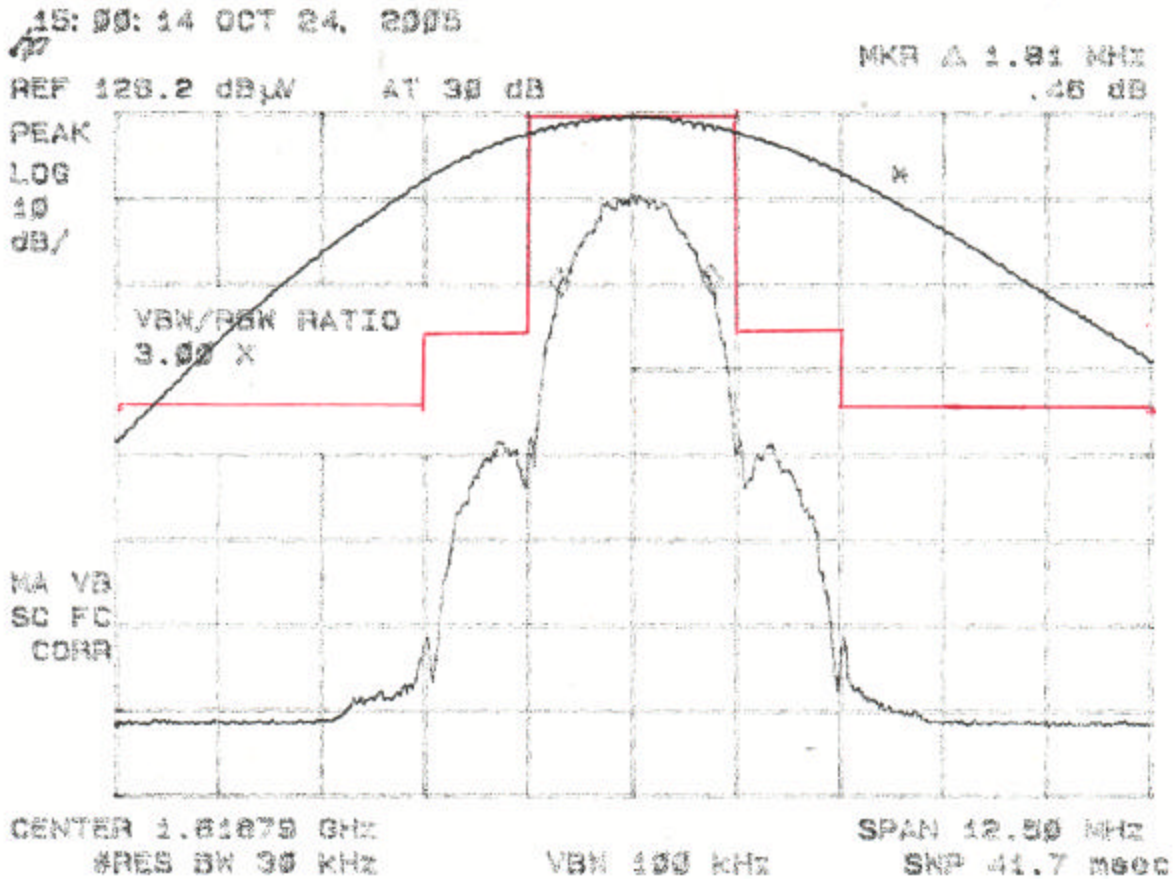

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## 2.9 Spurious Emissions at Antenna Terminals (FCC Section 2.1051)

Spurious emissions appearing at the antenna terminals were measured with a spectrum analyzer by connecting the spectrum analyzer directly via a short cable to the antenna output terminals or across the antenna leads on the PCB as specified by the manufacturer. Results are shown in Figures 6a – 6n.

Protection of the radio-navigation-satellite service. Mobile earth stations operating in the 1610-1626.5 MHz band shall limit out-of- band emissions in the 1574.397-1576.443 MHz band so as not to exceed an e.i.r.p. density level of -70 dB (W/MHz) averaged over any 20 ms period. The e.i.r.p. of any discrete spurious emission (i.e., bandwidth less than 600 Hz) in the 1574.397-1576.443 MHz band shall not exceed -80 dBW.

### FCC Minimum Standard (FCC Section 25.202(f))

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (2.5 MHz), at least

$$43 + 10 \log (P_{\text{Watts}}) \text{ attenuation below the mean power of the transmitter.}$$

For Lowest Channel =  $43 + 10 \log (0.139) = 34.4 \text{ dB}$

For Highest Channel =  $43 + 10 \log (0.105) = 33.2 \text{ dB}$

Note:

A 10 kHz RBW was used instead. This was deemed to be comparable to 4 kHz RBW.


### Additional requirement for 1574.397 - 157.443 MHz (FCC Section 25.213(b))

- 80 dBW (- 50 dBm)

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005


**Figure 6a.**  
**Spurious Emissions at Antenna Terminals – Low Channel**

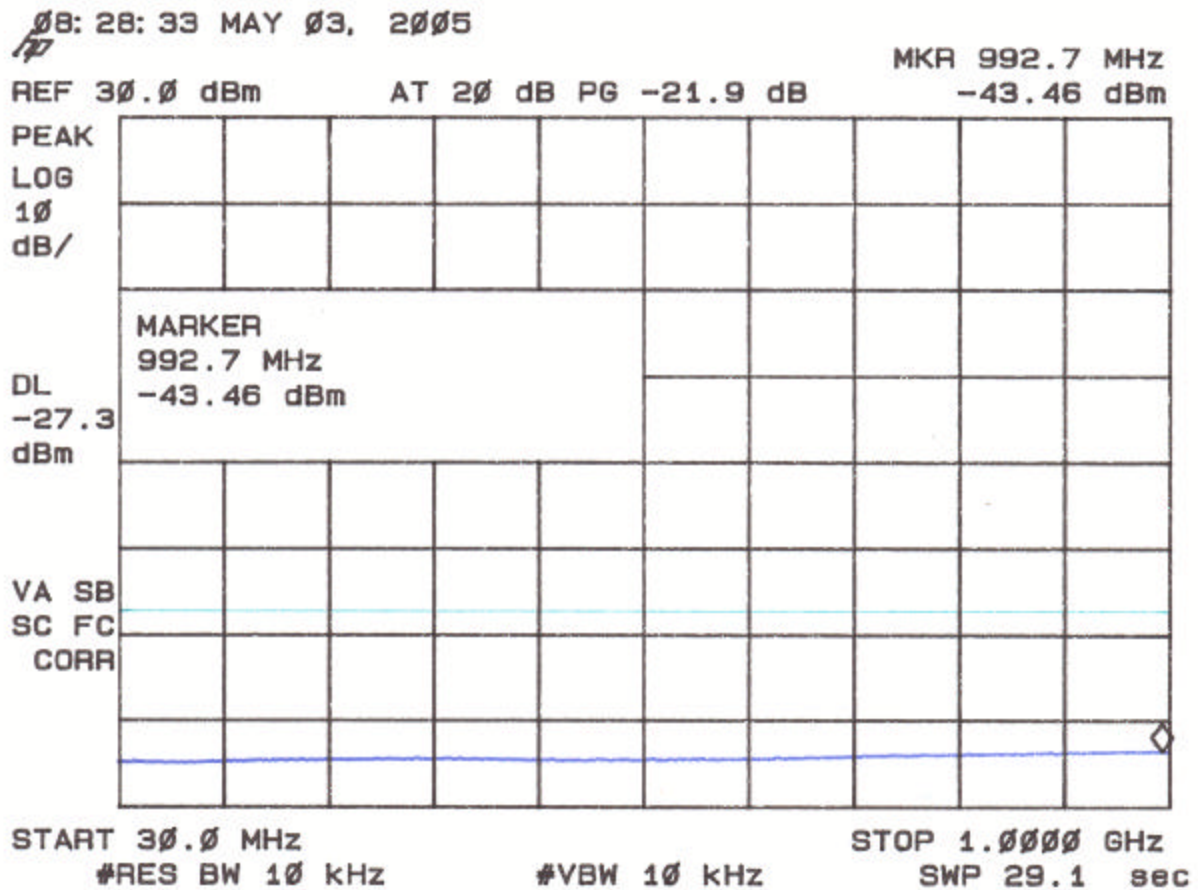

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**Figure 6b.**  
**Spurious Emissions at Antenna Terminals – Low Channel**

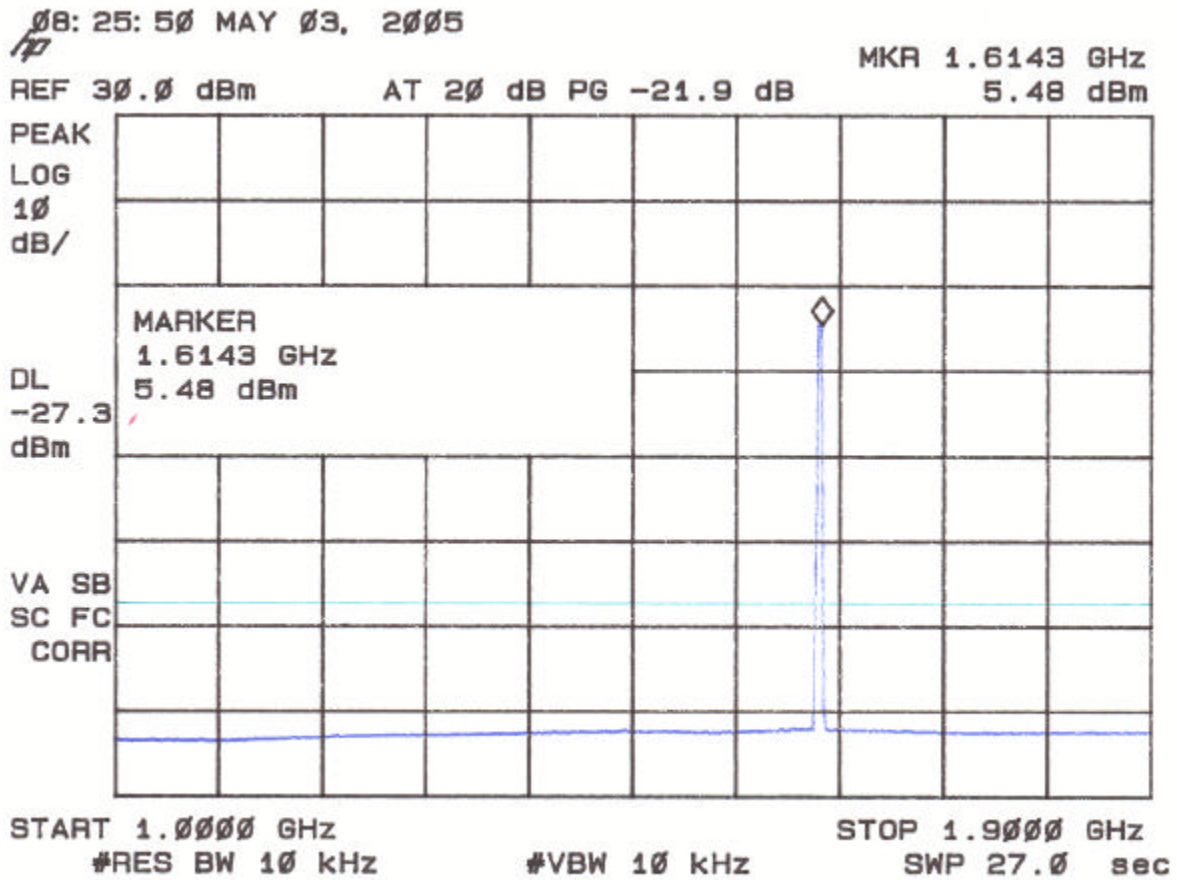




Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005


**Figure 6c.**  
**Spurious Emissions at Antenna Terminals – Low Channel**

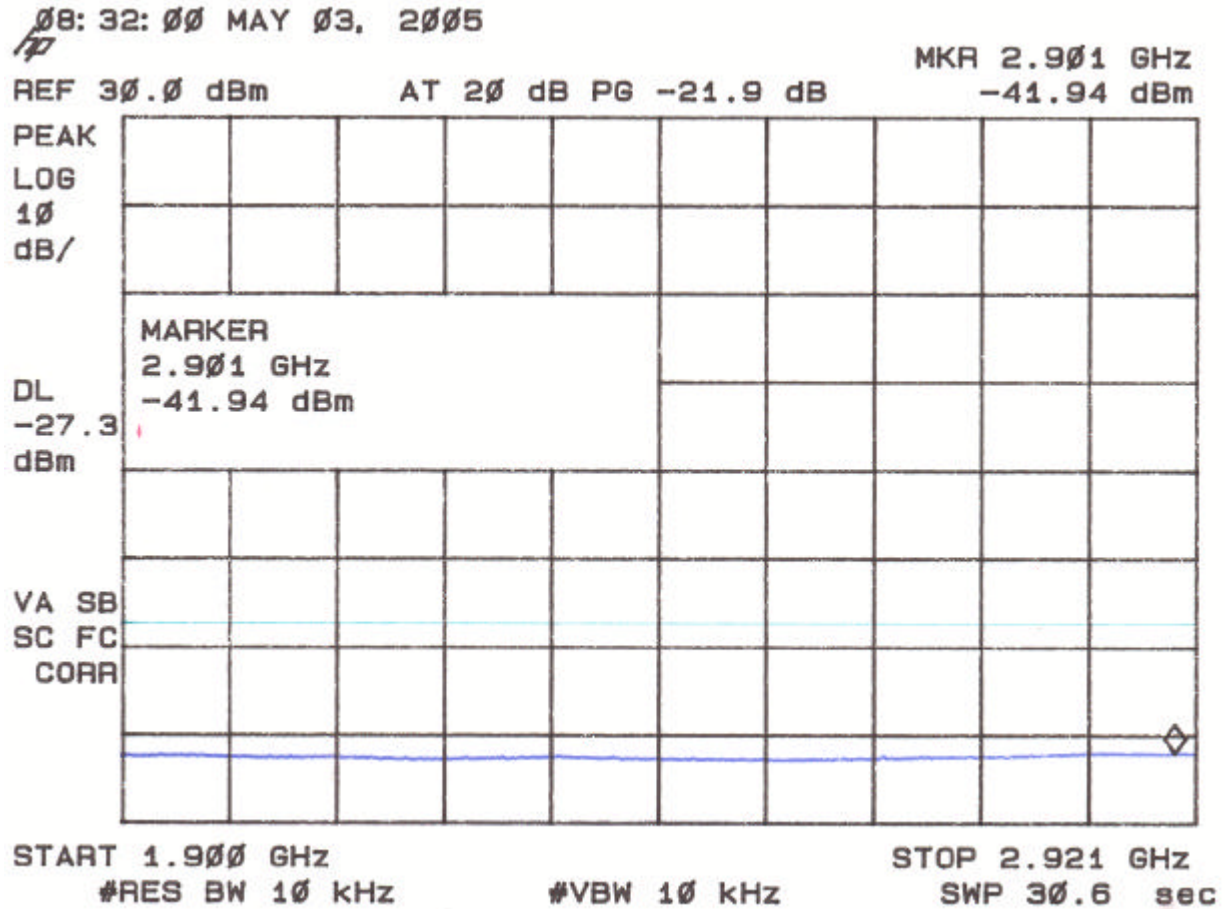

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**Figure 6d.**  
**Spurious Emissions at Antenna Terminals – Low Channel**

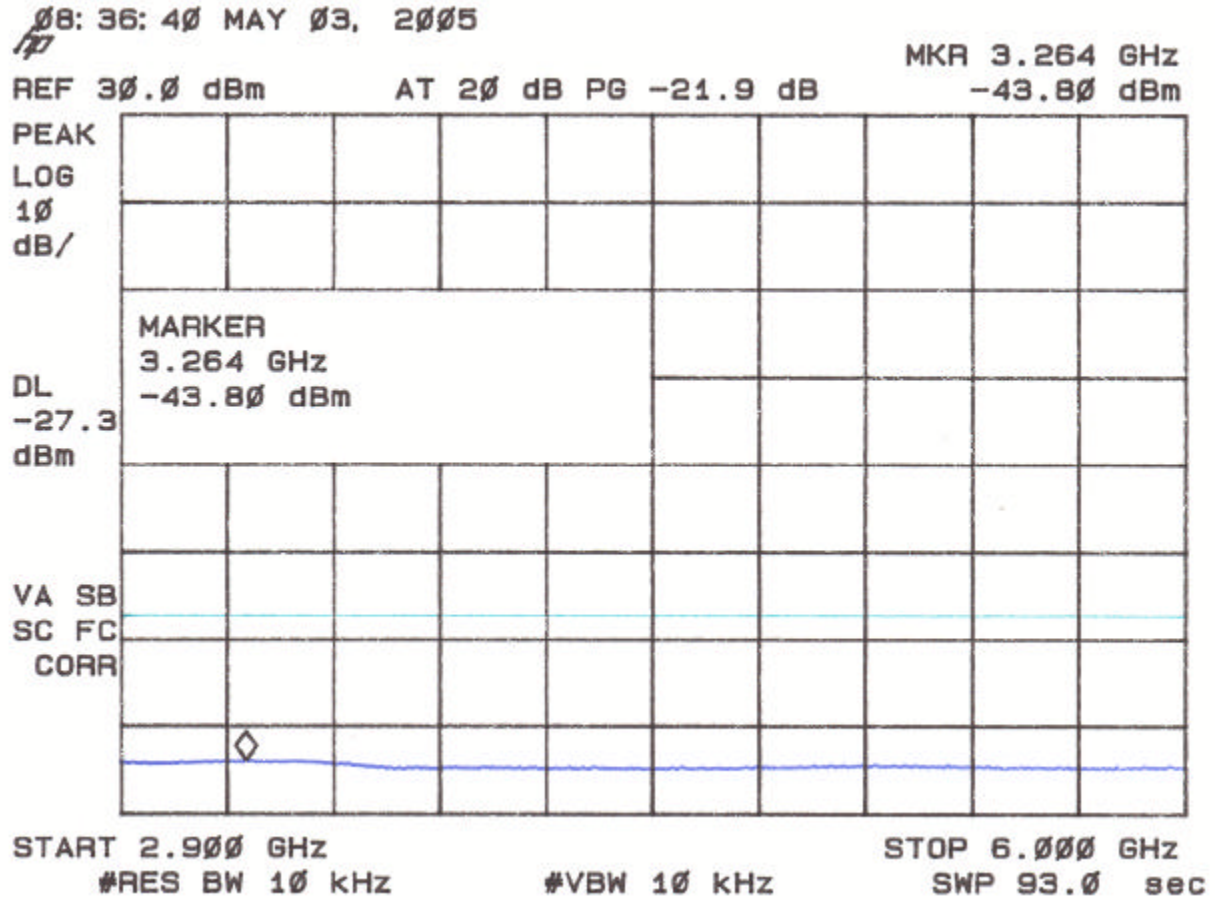




Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005


**Figure 6e.**  
**Spurious Emissions at Antenna Terminals – Low Channel**

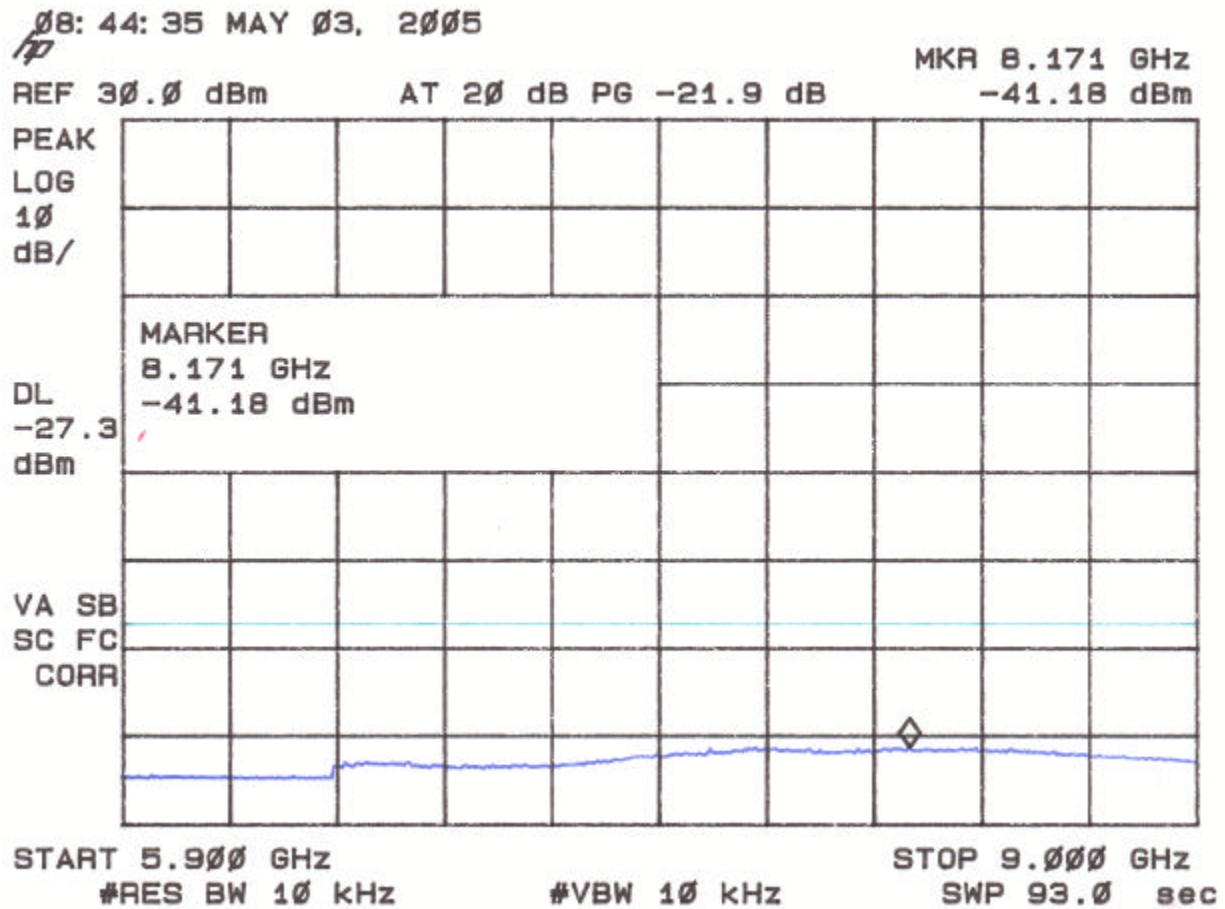

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005


**Figure 6f**  
**Spurious Emissions at Antenna Terminals – Low Channel**

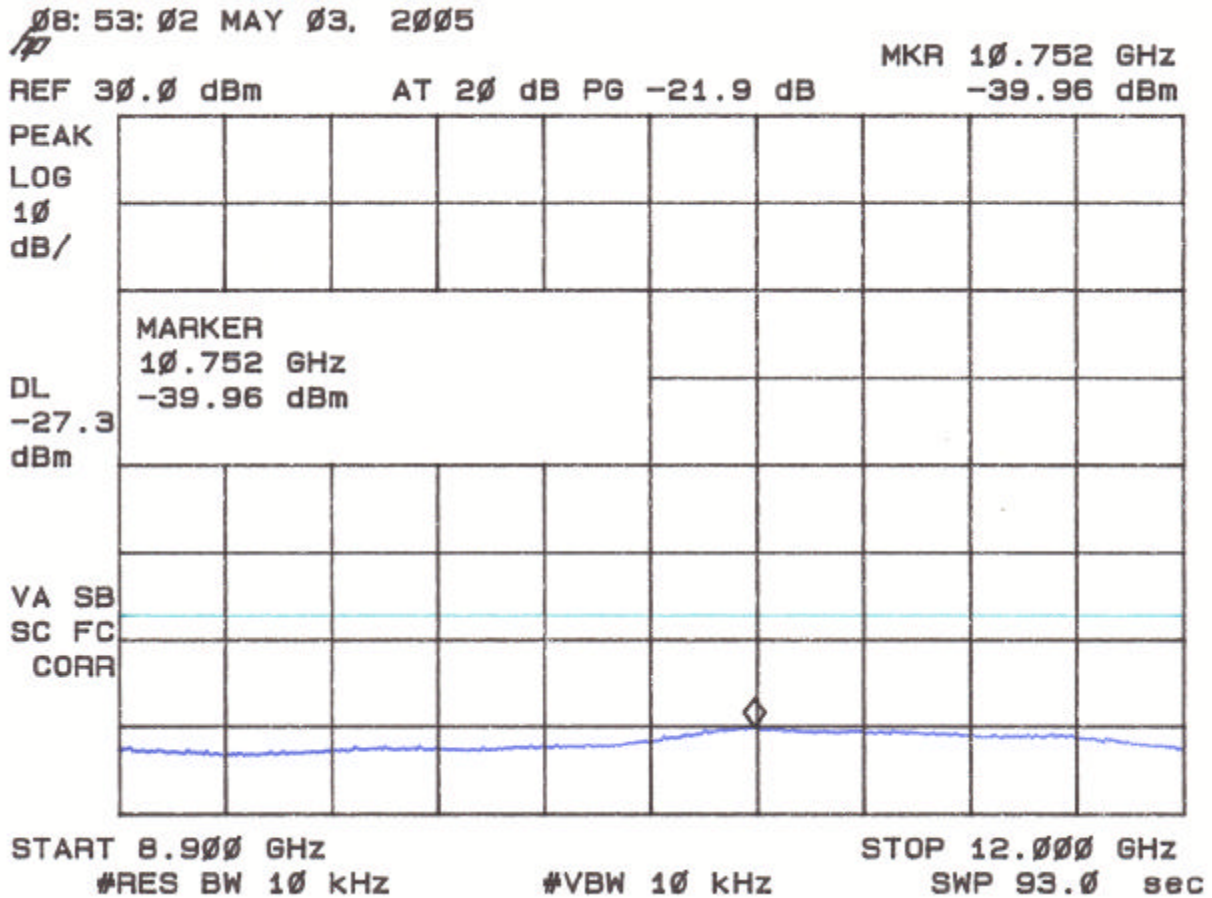

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005


**Figure 6g**  
**Spurious Emissions at Antenna Terminals – Low Channel**

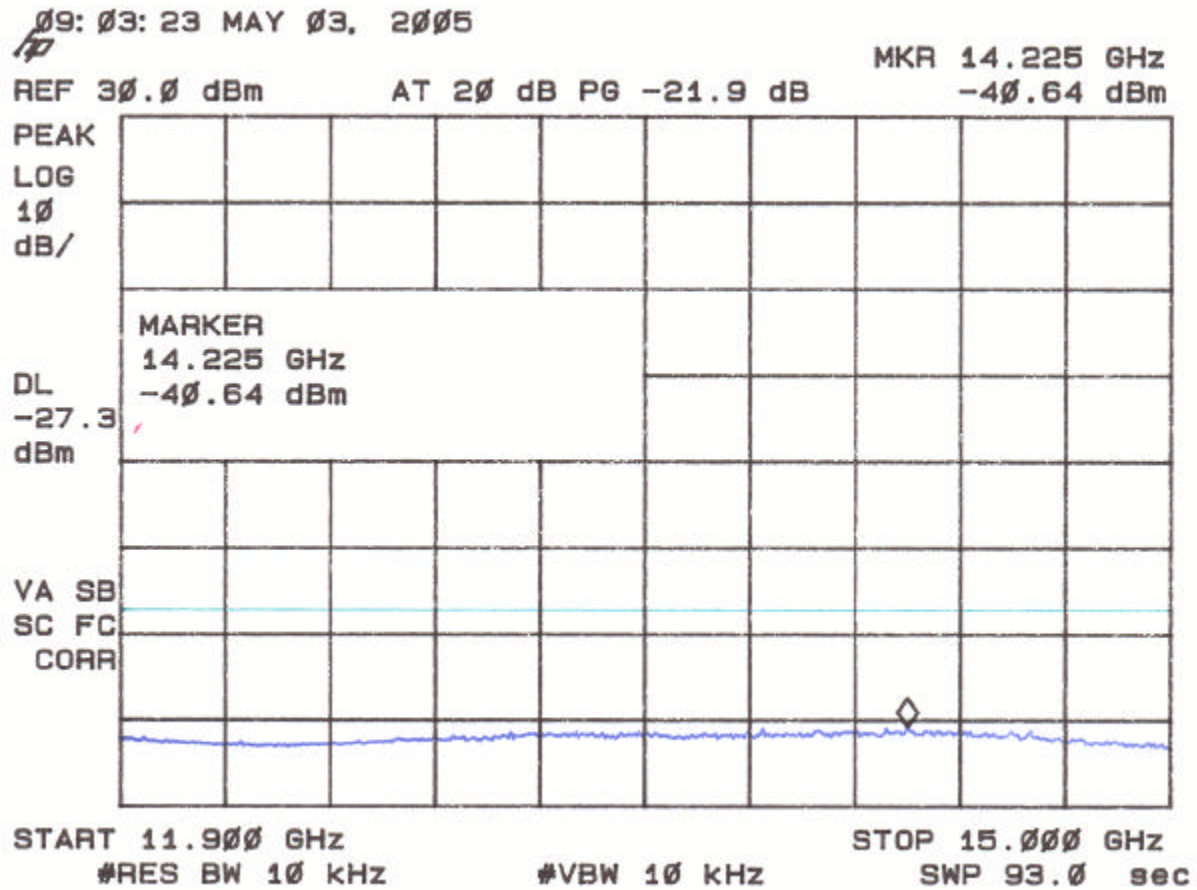

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**Figure 6h**  
**Spurious Emissions at Antenna Terminals – Low Channel**

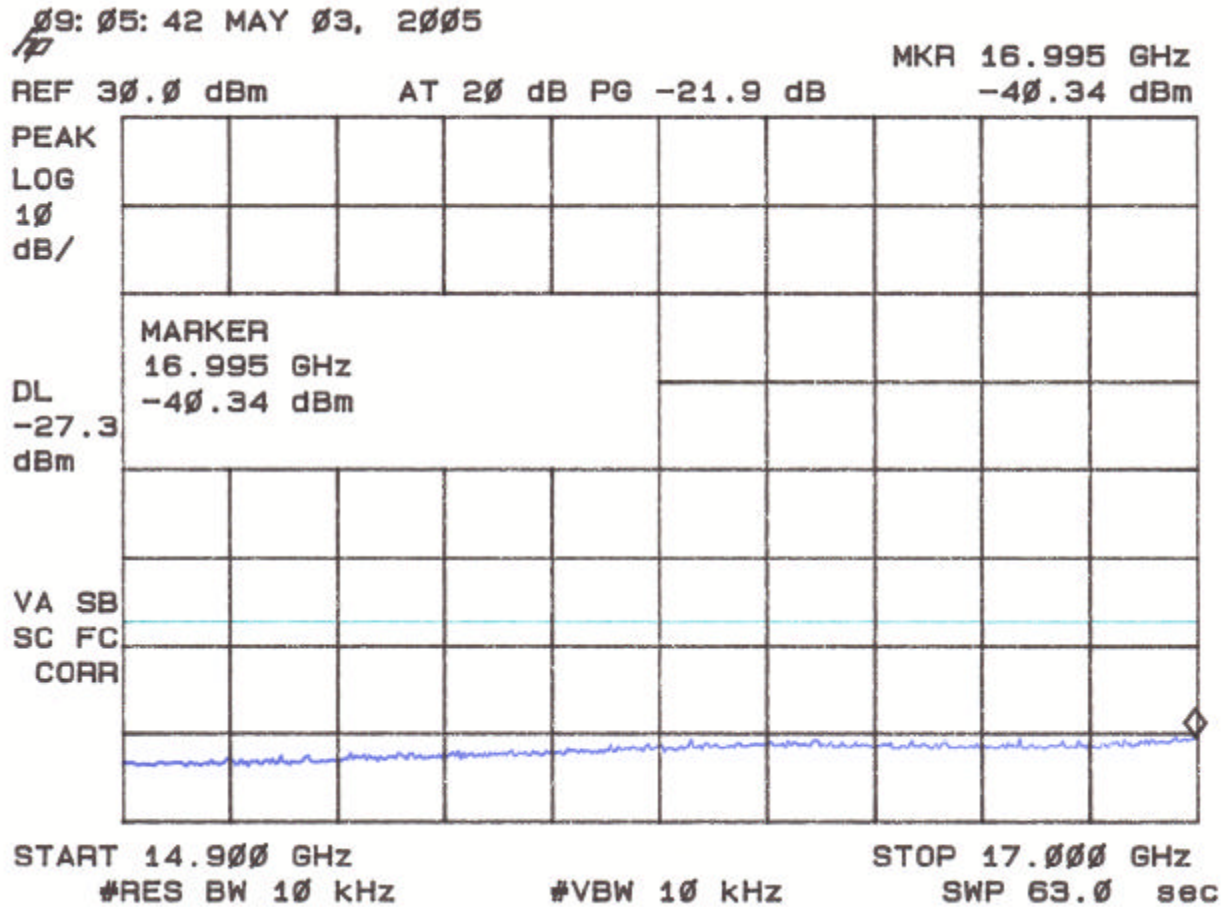


Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**Figure 6i**  
**Spurious Emissions at Antenna Terminals - High Channel**

Limit = -80 dBW = -50 dBm

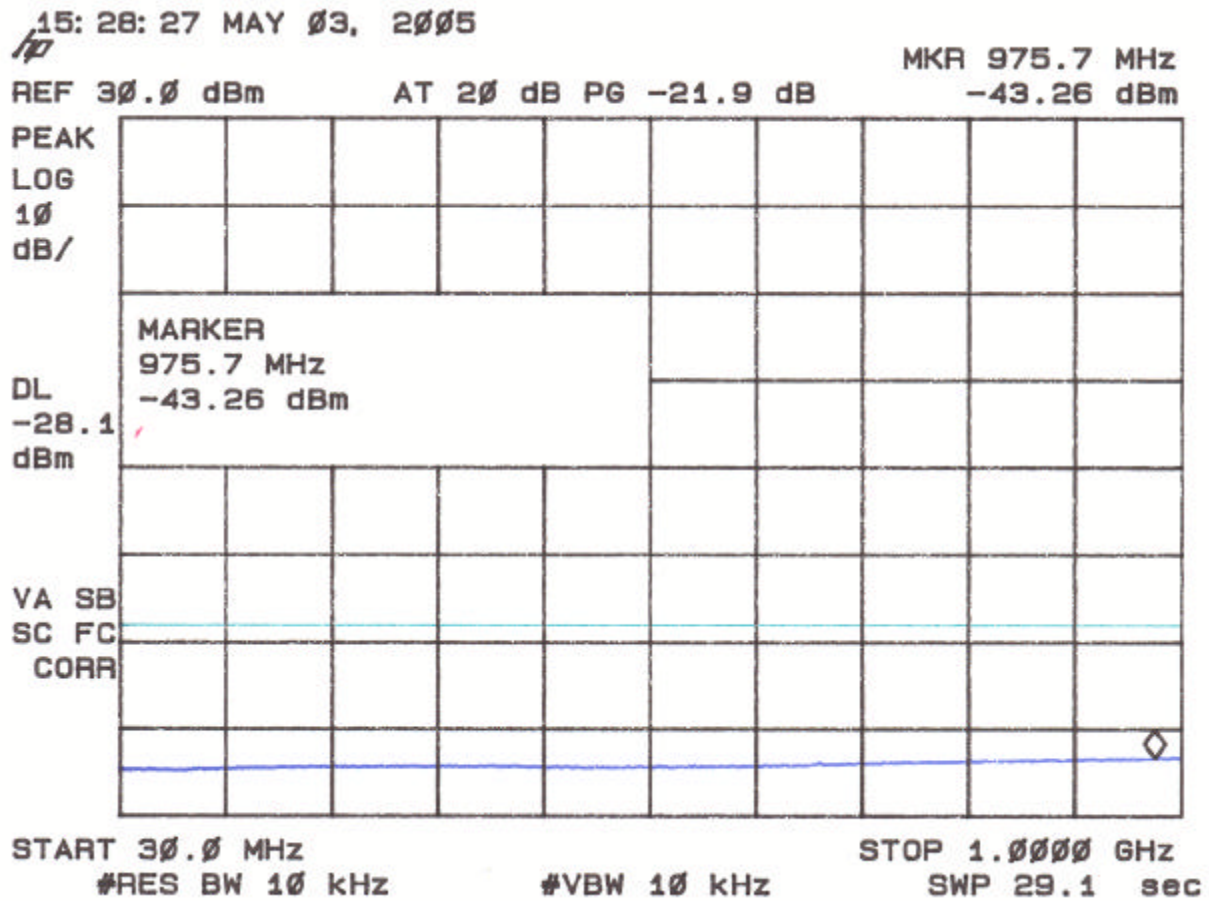




Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**Figure 6j.**  
**Spurious Emissions at Antenna Terminals**

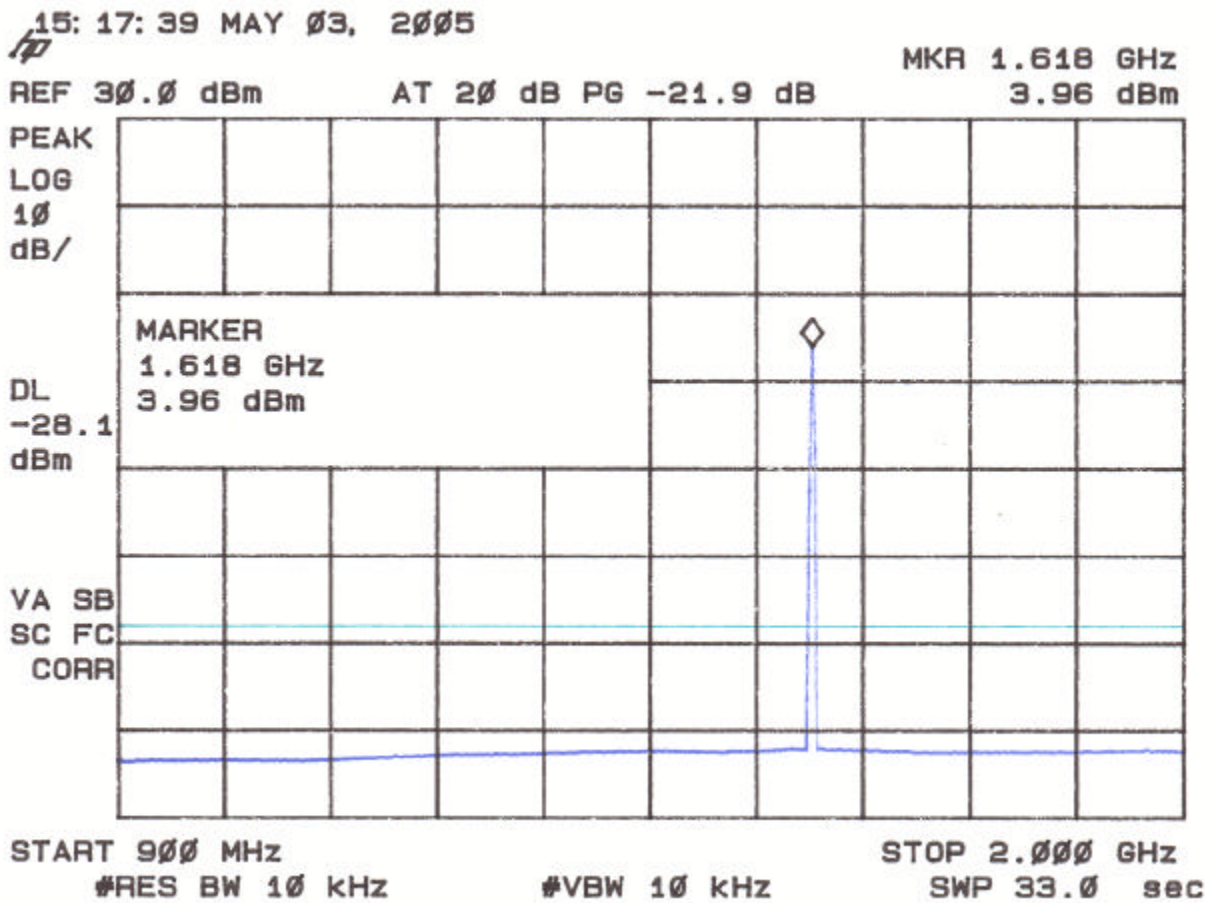


**NOTE: Marker shows Fundamental Frequency**

Report Number: 05-0141  
 Customer: Axonn Corporation  
 Model: GENSTXII

Issue Date: July 12, 2005


**Figure 6k.**  
**Spurious Emissions at Antenna Terminals – High Channel**

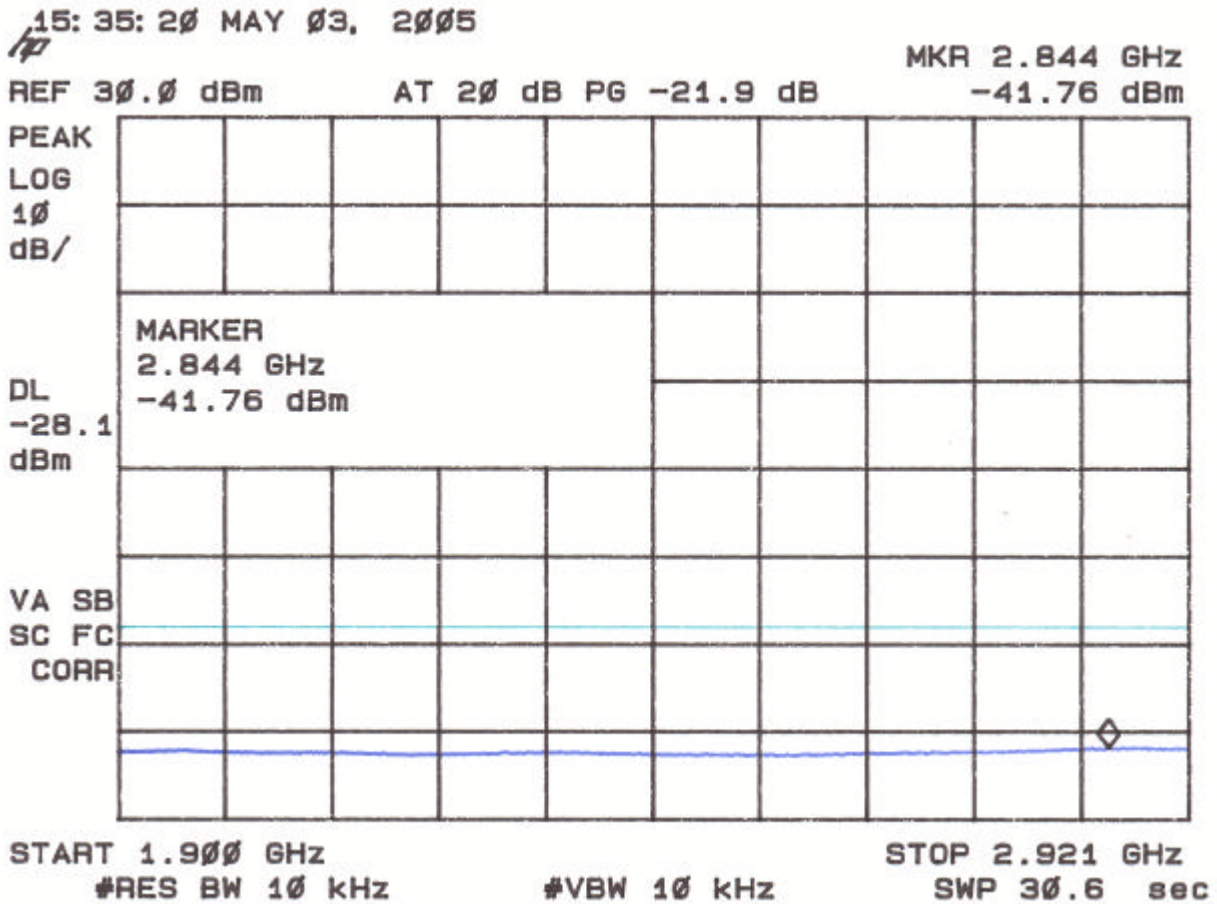

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**Figure 6l**  
**Spurious Emissions at Antenna Terminals – High Channel**

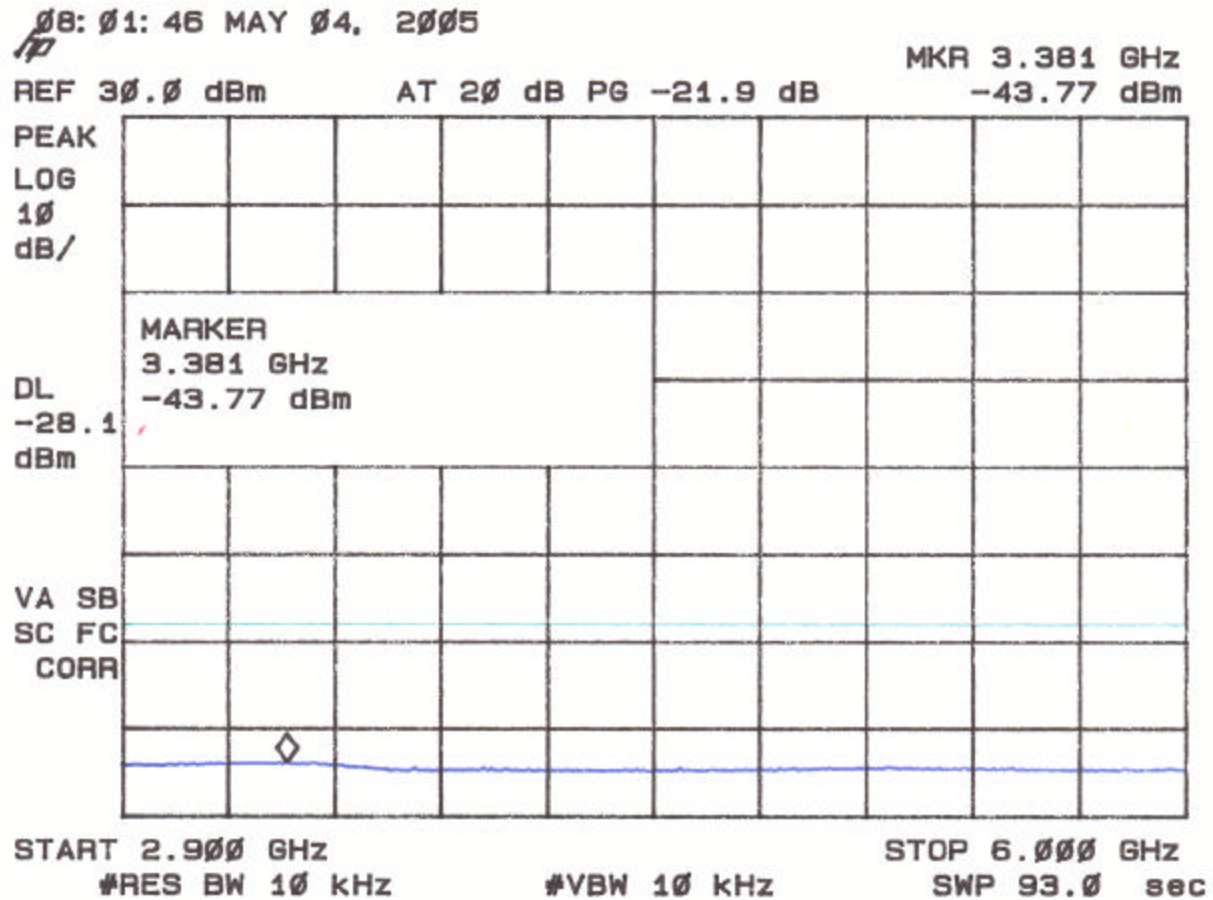




Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005


**Figure 6m.**  
**Spurious Emissions at Antenna Terminals – High Channel**

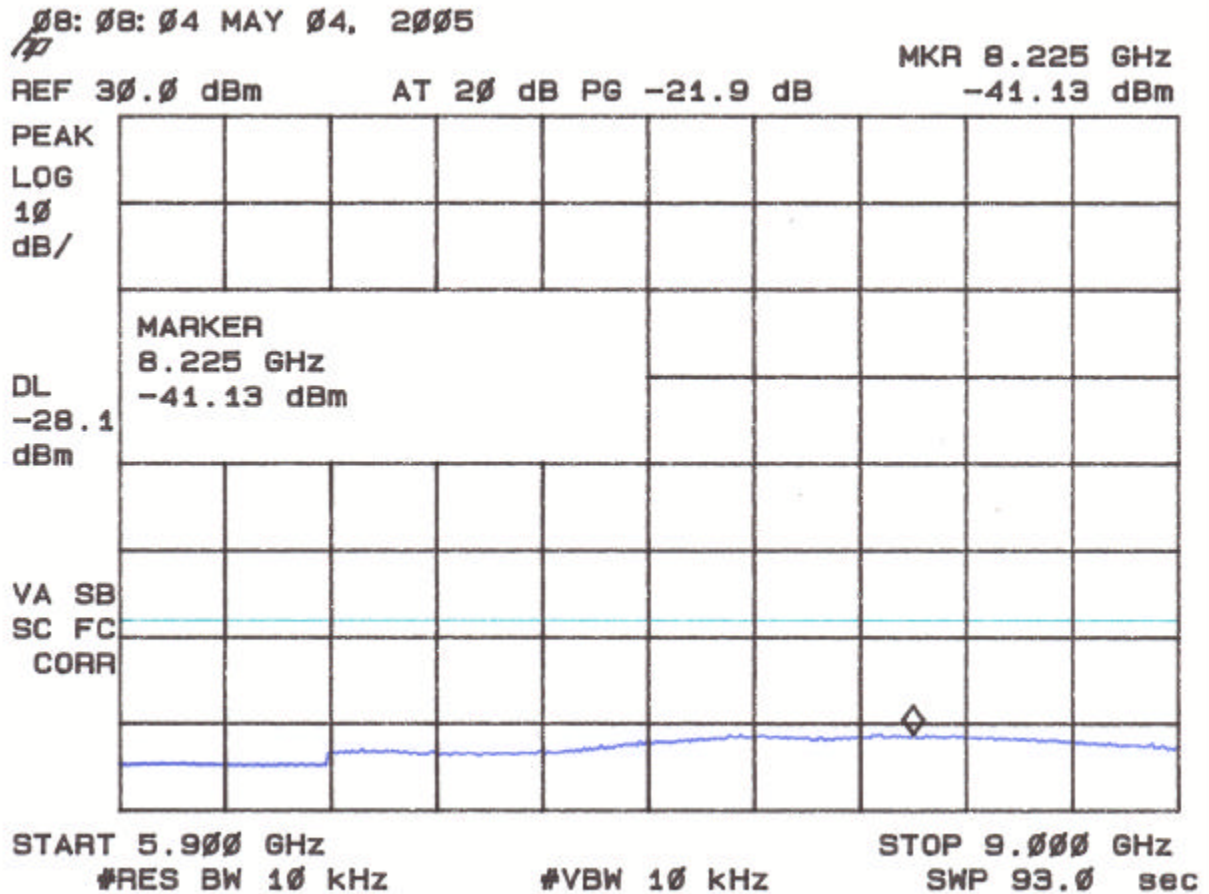

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005


**Figure 6n.**  
**Spurious Emissions at Antenna Terminals – High Channel**

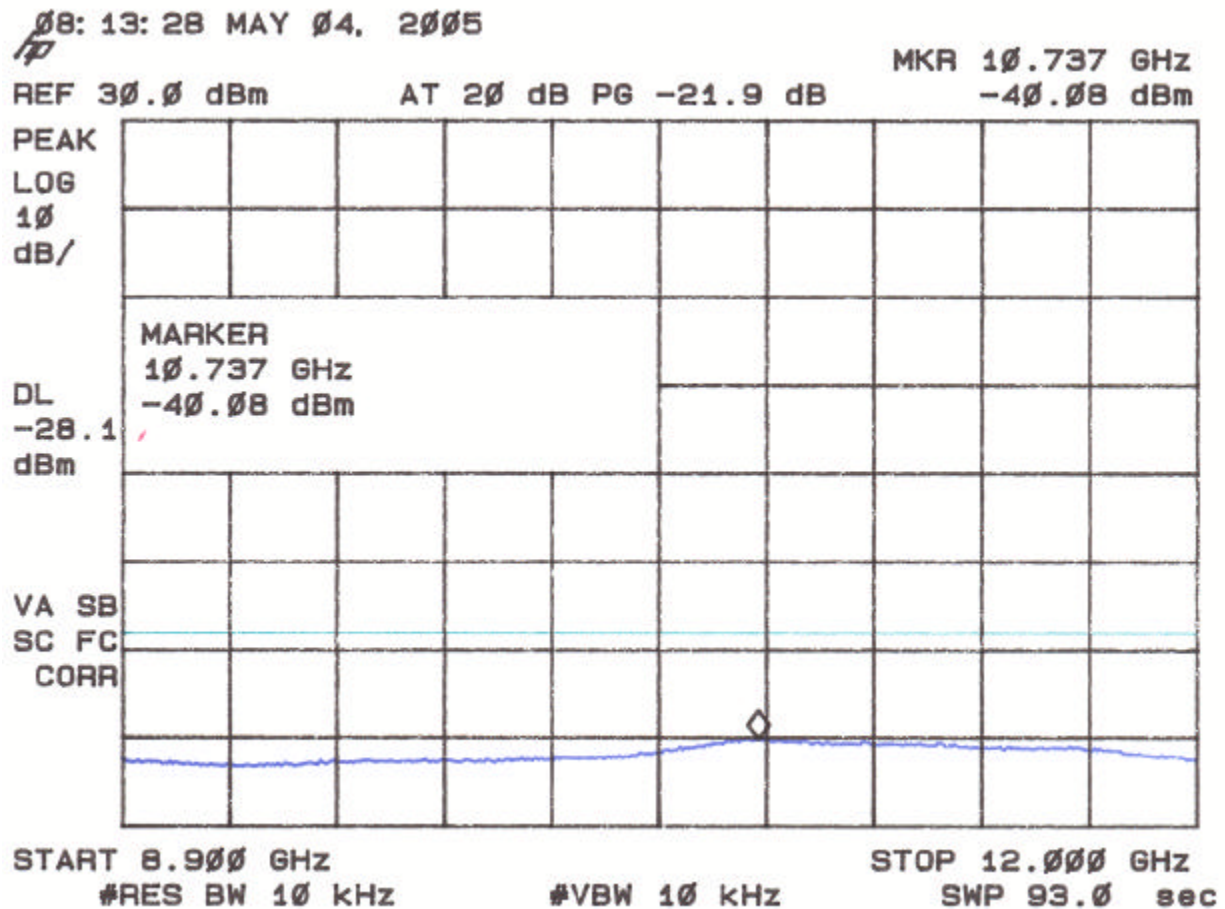

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005


**Figure 60**  
**Spurious Emissions at Antenna Terminals – High Channel**

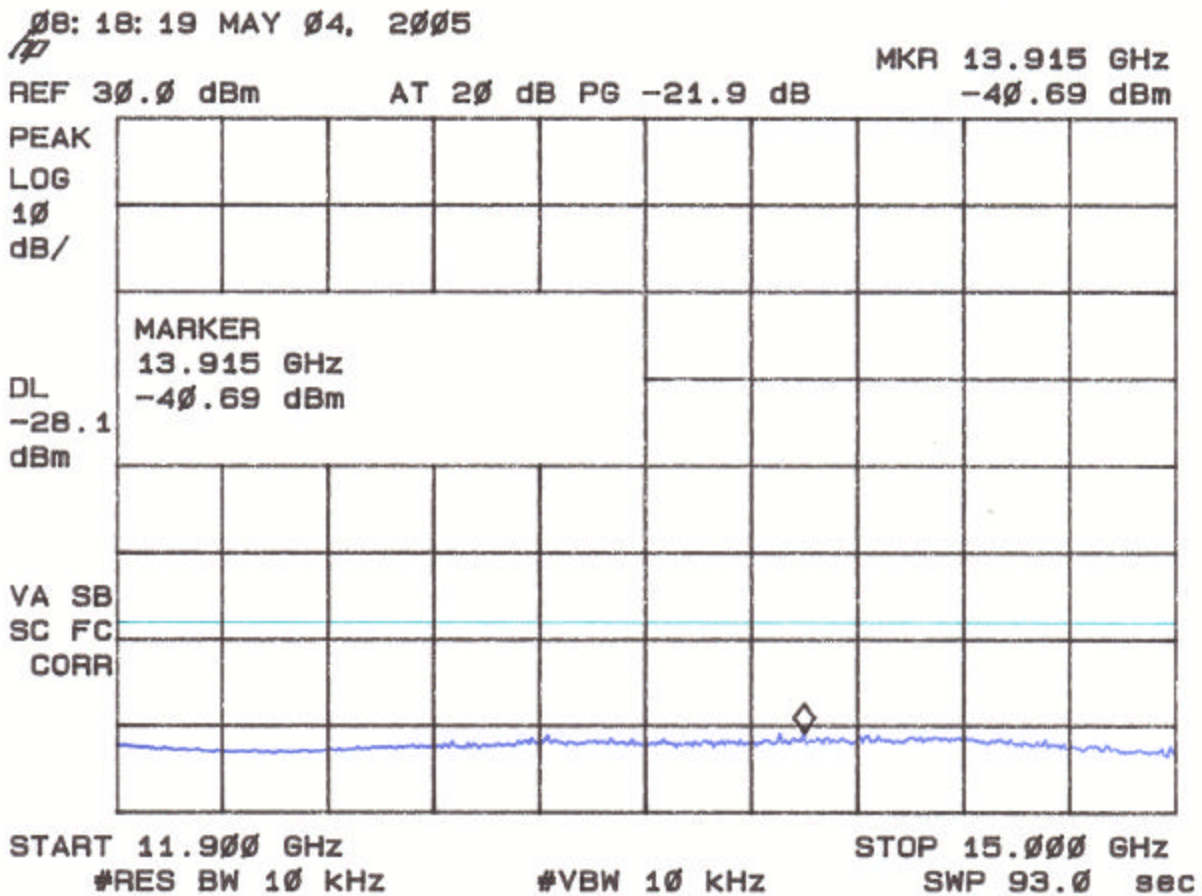

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

**Figure 6p**  
**Spurious Emissions at Antenna Terminals – High Channel**

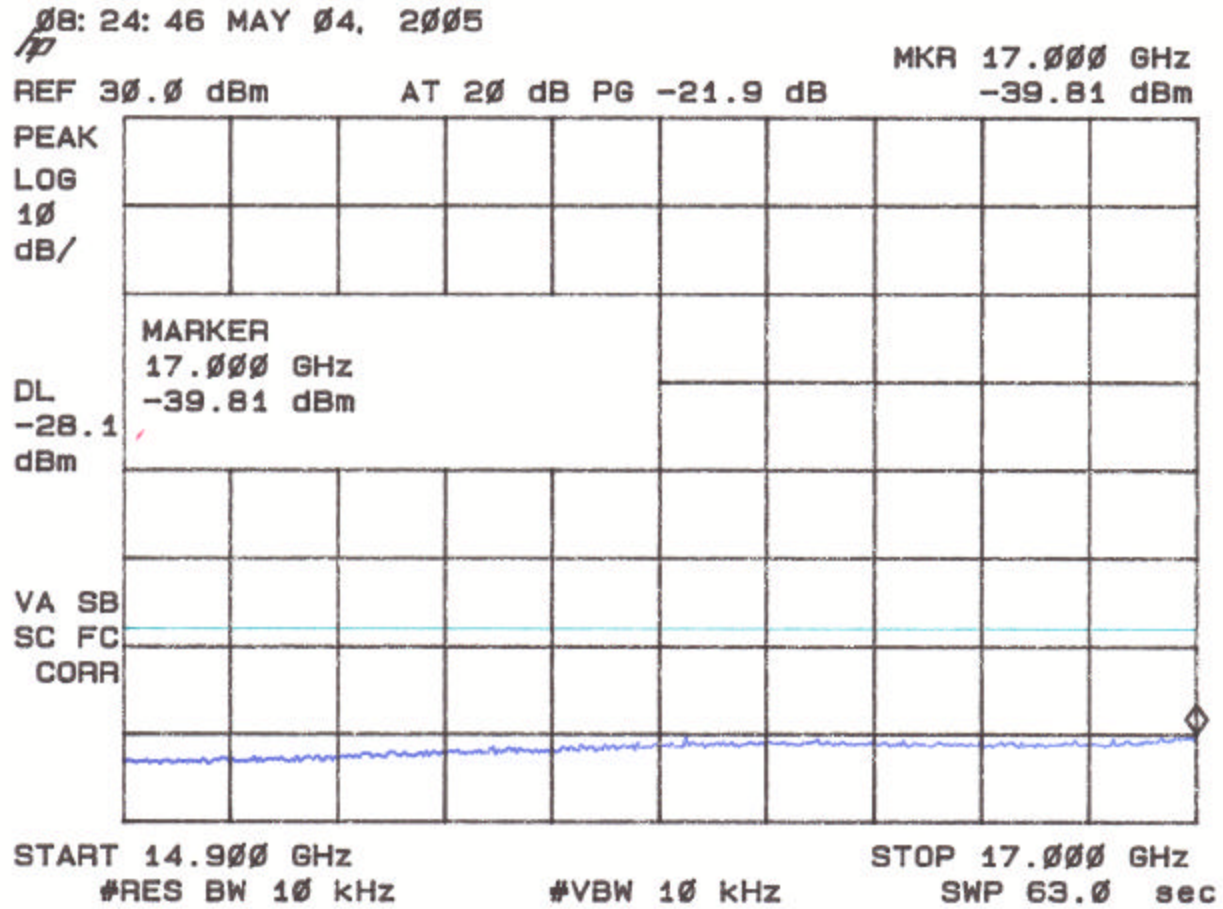

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## **2.10 Field Strength of Spurious Radiation (FCC Section 2.1053)**

Spurious emissions were evaluated from 30 MHz to 16.2 GHz at an EUT to antenna distance of 1 or 3 meters. The EUT was tested with an external power source and modulated by its own internal sources. Both a low and high channel were tested. The EUT was placed on an open area test site and the spurious emissions tested with the Substitution Method as stipulated by EIT/TIA-603: 1992 section 2.2.12. Measurements for 30 to 1000 MHz were made with the analyzer's bandwidth set to 120 kHz. Measurements above 1 GHz were made with the analyzer's bandwidth set to 1 MHz. The worse case results are shown in Table 4.

### **FCC Minimum Standard (FCC Section 25.202(f))**

For out-of-band emissions for frequencies removed from the midpoint of the assigned frequency segment by more than 250% of the authorized bandwidth (2.5 MHz), at least

$43 + 10 \log (P_{\text{Watts}})$  attenuation below the mean power of the transmitter.

For Lowest Channel =  $43 + 10 \log (0.139) = 34.4 \text{ dB}$

For Highest Channel =  $43 + 10 \log (0.105) = 33.2 \text{ dB}$

Report Number: 05-0141  
 Customer: Axonn Corporation  
 Model: GENSTXII

Issue Date: July 12, 2005

## FIELD STRENGTH OF SPURIOUS RADIATION

**Limit:  $43 + 10 \log (P_{\text{Watts}}) = 43 + 10 \log (0.195) = 35.9 \text{ dB}$**   
 $43 + 10 \log (P_{\text{watts}}) = 43 + 10 \log (0.139) = 34.4$

**TABLE 4**

Worse Case Mode = Low Channel

Frequency (MHz)	Polarity (H or V)	Corrected Substitution Level Relative to Dipole (dBm)	Attenuated Level Below Carrier Power (dB)
3236.2	V	-63.2	83.4
4854.2	V	-68.2	88.4
6471.1	V	-63.2	89.4
8089.1	V	-63.0	83.2
9707.1	V	-59.1	75.3

## SAMPLE CALCULATION:

**Attenuated Level Below Carrier Power =**  
 $10 \log (\text{TX Power in mW}) - \text{Corrected Substitution Level (dBm)}$   
 $10 \log (195.0) - -63.2 = 83.4$

**Test Date: March 30, 2004**

**Tester**  
**Signature:** David P. Blethen **Name:** David Blethen

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

---

## **2.11 Frequency Stability (FCC Section 2.1055 and 25.202(d))**

The frequency tolerance of the carrier signal was measured by while ambient temperature was varied from -30 to 50 degrees centigrade. The frequency tolerance was verified at 10 degree increments. Additionally, the supply voltage was varied from 85% to 115% of the nominal value (except for hand carried, battery powered equipment which was additionally measured at battery endpoint).

### **FCC Minimum Standard**

None



U.S. Technologies, Inc.

FCC ID: L2V-STX2-1  
FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

FCC Certification  
Axonn L.L.C Model GEN STX  
Frequency Stability vs. Temperature (At Startup)

Test Results Reviewed By:




Louis A. Feudi

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.249227	0.5
-20	1611.248262	-0.1
-10	1611.248162	-0.1
0	1611.248969	0.4
10	1611.248804	0.3
20	1611.248362	0.0
30	1611.248585	0.1
40	1611.248140	-0.1
50	1611.248815	0.3

Actual TX Frequency was: 1611.248362 MHz

Maximum Deviation = 0.001% or 10ppm  
Reference Point from 20 degrees C: 1611.248 MHz

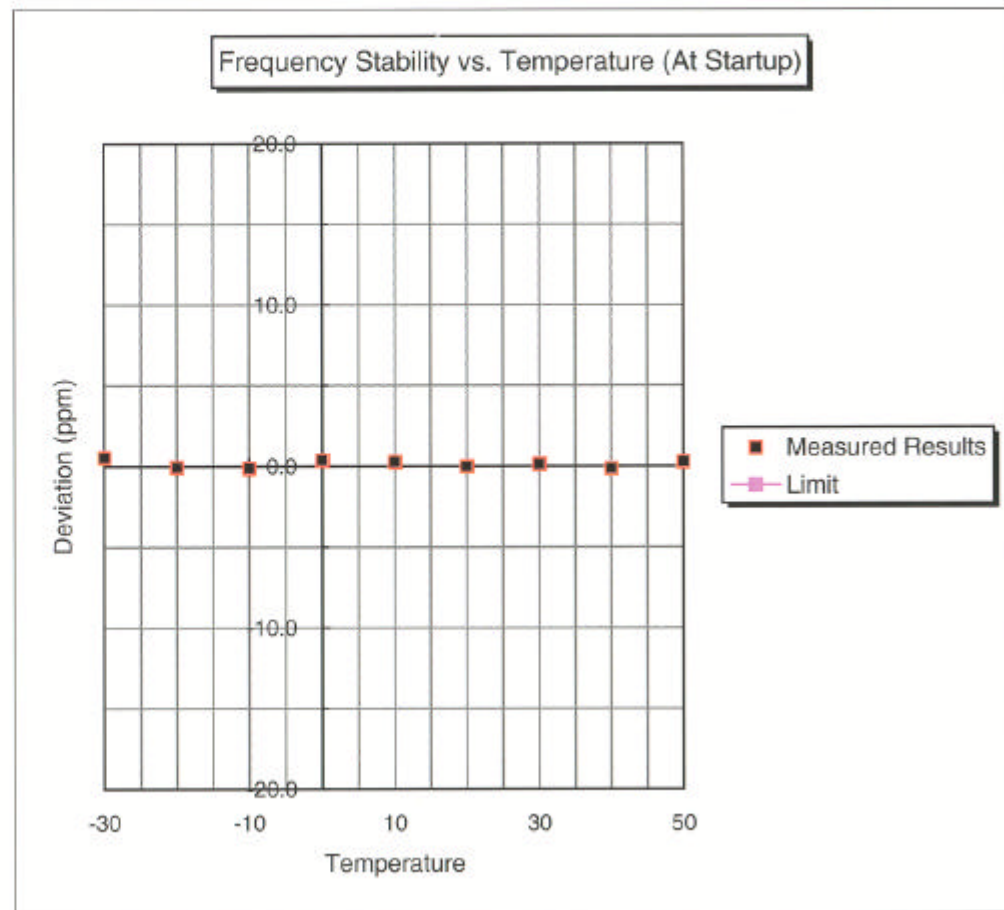



U.S. Technologies, Inc.

FCC ID: L2V-STX2-1  
FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII


Issue Date: July 12, 2005

FCC Certification

Axonn L.L.C. Model GEN STX

Frequency Stability vs. Temperature (2 Minutes After Startup)

Test Results Reviewed By:




Louis A. Feudi

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.248808	0.3
-20	1611.247907	-0.3
-10	1611.247889	-0.3
0	1611.248727	0.2
10	1611.248634	0.2
20	1611.248257	-0.1
30	1611.248557	0.1
40	1611.248170	-0.1
50	1611.248875	0.3

Actual TX Frequency was: 1611.248362 MHz

Maximum Deviation = 0.001% or 10ppm

Reference Point from 20 degrees C: 1611.248 MHz

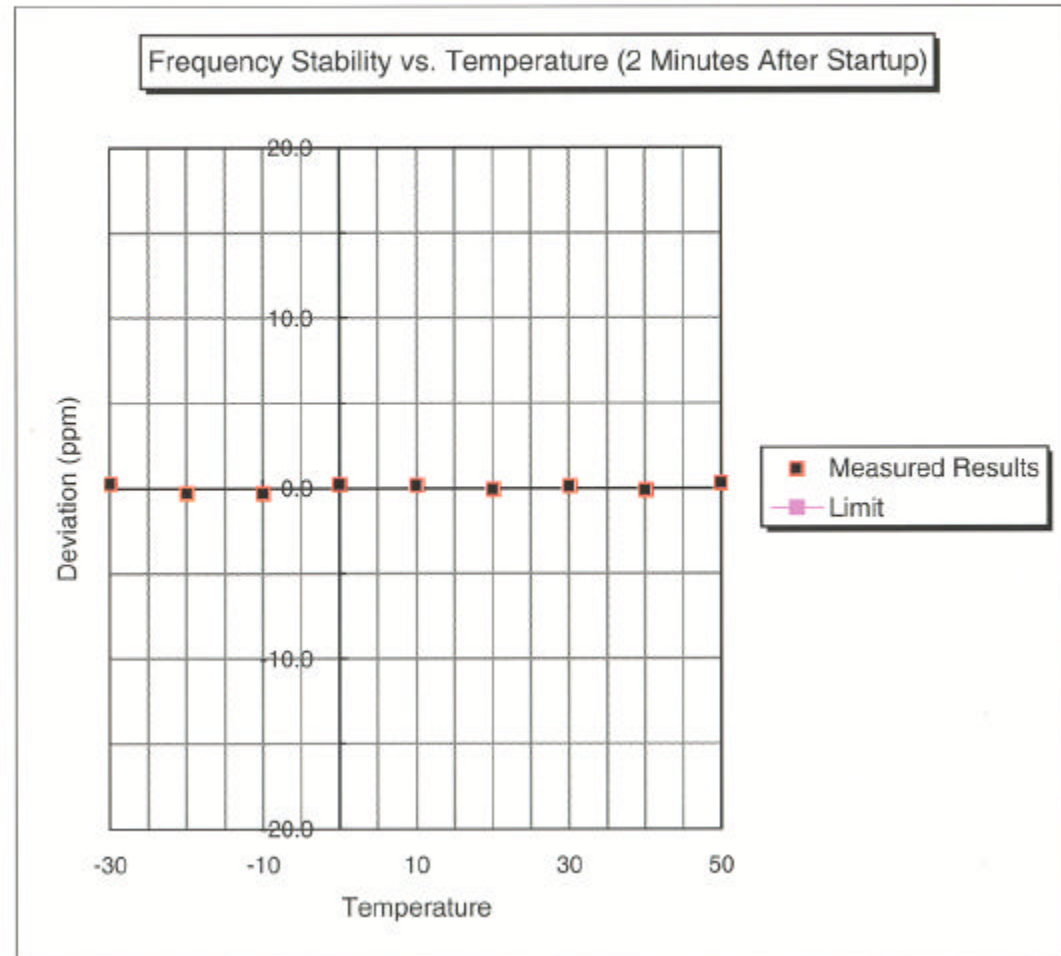

U.S. Technologies, Inc.

FCC ID: L2V-STX2-1  
FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

FCC Certification  
Axonn L.L.C. Model GEN STX  
Frequency Stability vs. Temperature (5 Minutes After Startup)

Test Results Reviewed By:




Louis A. Feudi

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.248788	0.3
-20	1611.247894	-0.3
-10	1611.247874	-0.3
0	1611.248689	0.2
10	1611.248672	0.2
20	1611.248305	0.0
30	1611.248560	0.1
40	1611.248195	-0.1
50	1611.248885	0.3

Actual TX Frequency was: 1611.248362 MHz

Maximum Deviation = .0001% or 10ppm

Reference Point from 20 degrees C: 1611.248 MHz

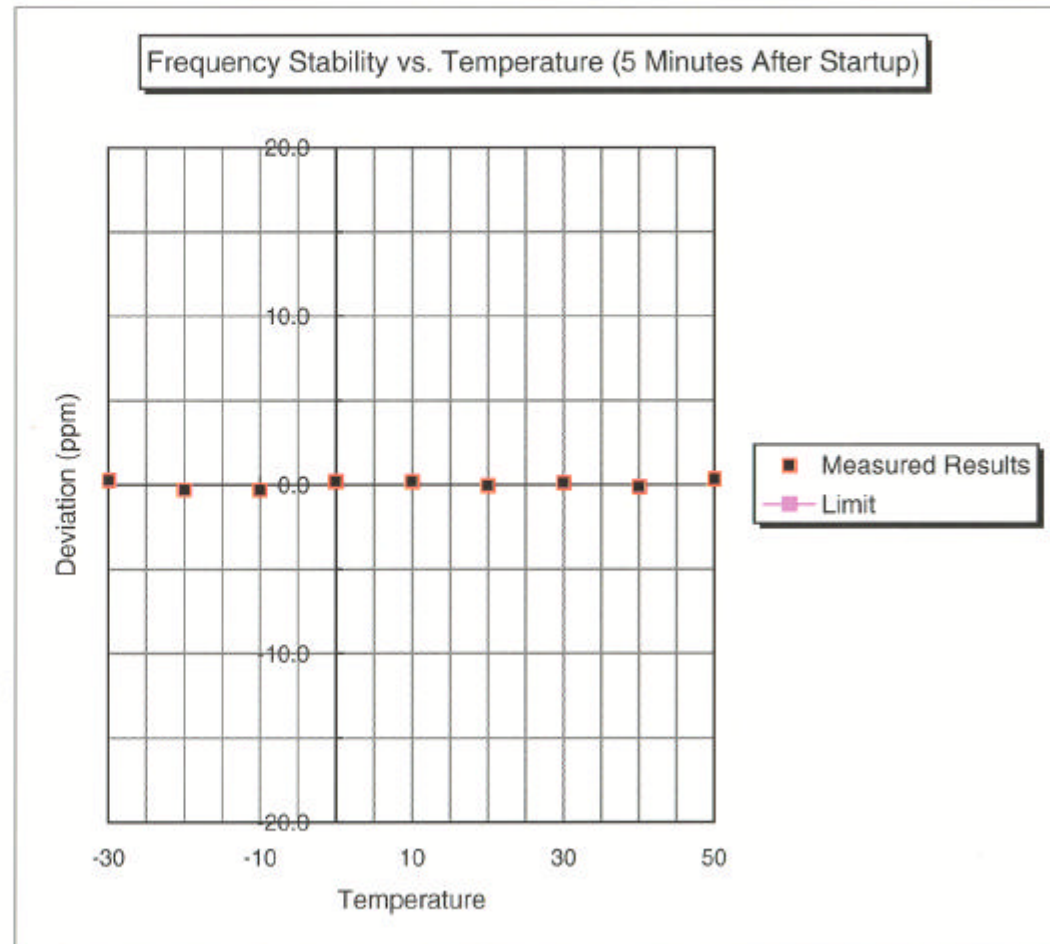

U.S. Technologies, Inc.

FCC ID: L2V-STX2-1  
FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

FCC Certification  
Axonn L.L.C. Model GEN STX  
Frequency Stability vs. Temperature (10 Minutes After Startup)

Test Results Reviewed By:




Louis A. Feudi

Temperature (degrees C)	Measured Frequency (MHz)	Deviation (ppm)
-30	1611.248788	0.3
-20	1611.247407	-0.6
-10	1611.247874	-0.3
0	1611.248617	0.2
10	1611.248682	0.2
20	1611.248297	0.0
30	1611.248582	0.1
40	1611.248215	-0.1
50	1611.248912	0.3

Actual TX Frequency was: 1611.248362 MHz

Maximum Deviation = 0.0001% or 10ppm

Reference Point from 20 degrees C: 1611.248 MHz

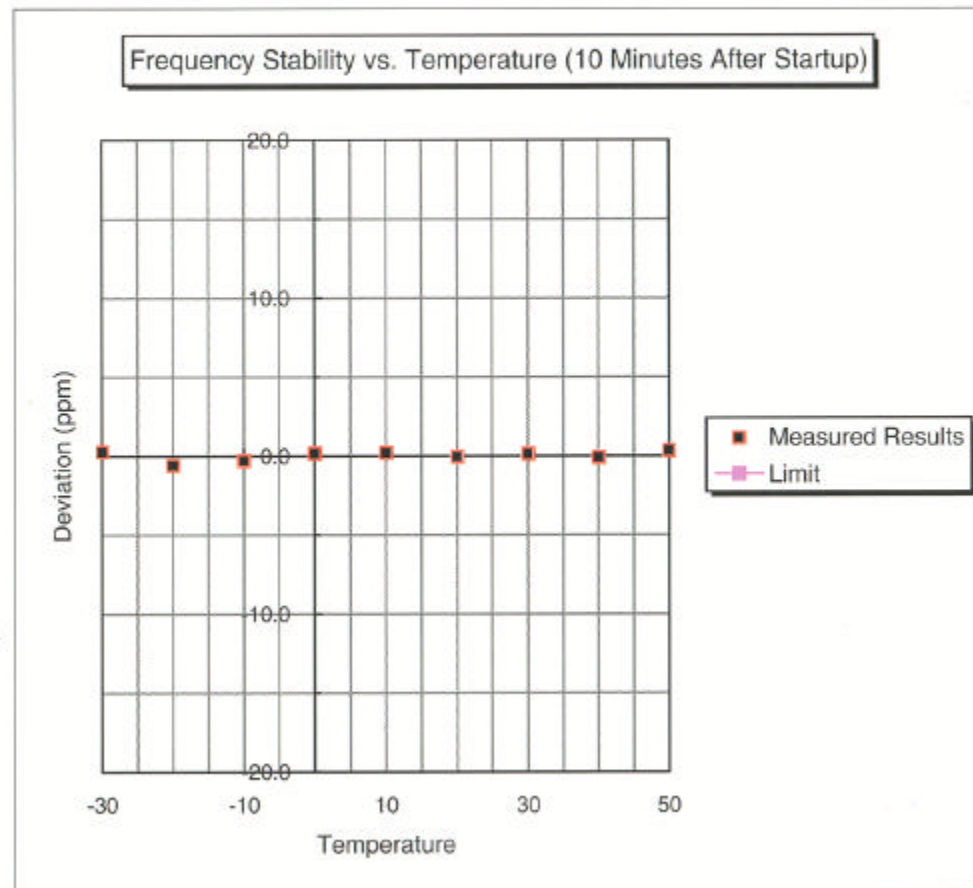

U.S. Technologies, Inc.

FCC ID: L2V-STX2-1  
FCC Part 25 Certification

Report Number: 05-0141  
Customer: Axonn Corporation  
Model: GENSTXII

Issue Date: July 12, 2005

FCC Certification  
Axonn L.L.C. Model GEN STX  
Frequency Stability vs. Voltage

Voltage (V DC)	Measured Frequency (MHz)	Deviation (ppm)
7.5	1611.2485	0.1
6	1611.2484	0.0
4.5	1611.2485	0.1

Actual TX Frequency was: 1611.248362 MHz

Maximum Deviation = 0.001% or 10ppm  
Reference Point From 20 degrees C: 1611.248 MHz

Test Results Reviewed By:



Louis A. Feudi

