


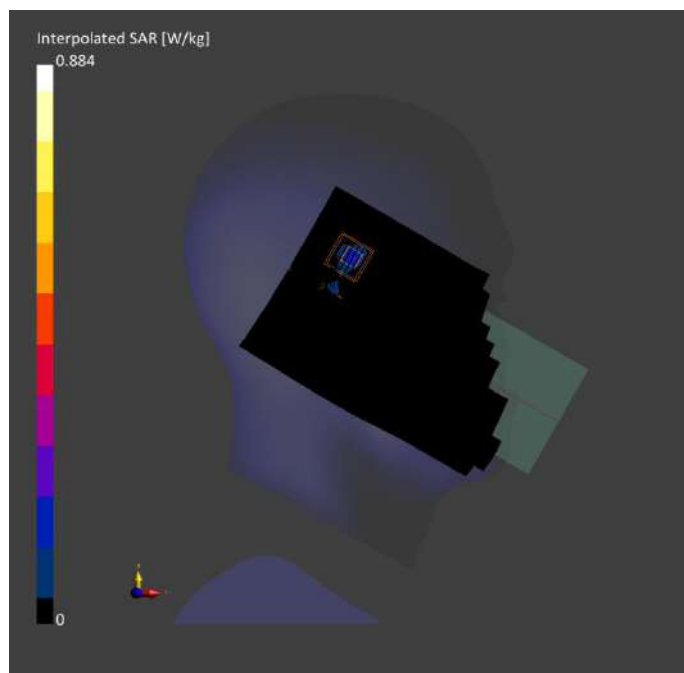

Meas.122 Body Plane with Back Side 15mm on 15 Channel in IEEE802.11ax160 mode with Antenna 11

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	U-NII-5	WLAN, 10743-AAC	6025.0, 15	5.45	5.36	35.8	22.5	21.2

Hardware Setup


Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-23	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	119.0 x 187.0	27.2 x 27.2 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	Yes	Yes
Grading Ratio	1.5	1.4
MAIA	Y	Y
Surface Detection	VMS + 6p	VMS + 6p
Scan Method	Measured	Measured

Measurement Results

	Area Scan	Zoom Scan
Date	2024-08-23	2024-08-23
psSAR1g [W/kg]	0.030	0.034
psSAR10g [W/kg]	0.011	0.012
Power Drift [dB]	-0.10	-0.01
Power Scaling	Disabled	Disabled
Scaling Factor [dB]		
TSL Correction	No correction	No correction
M2/M1 [%]		58.0
Dist 3dB Peak [mm]		> 13.6

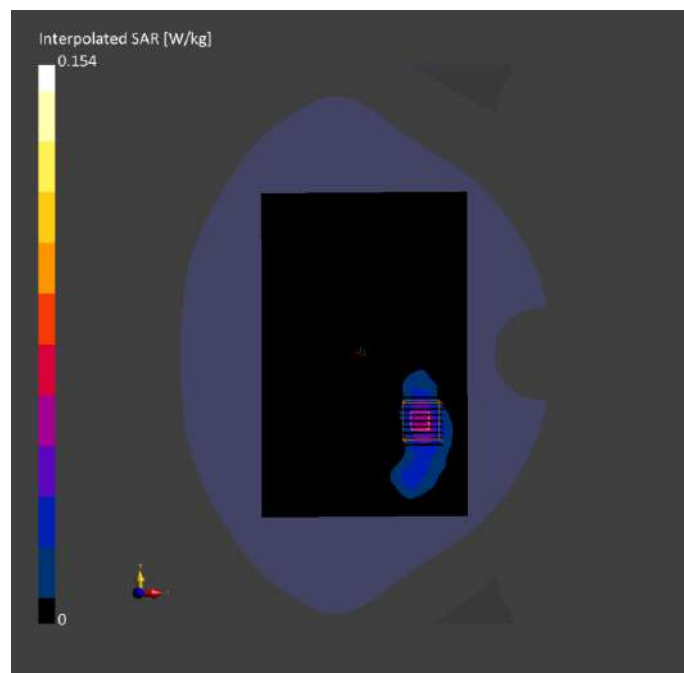

Meas.123 Body Plane with Top Edge 0mm on 15 Channel in IEEE802.11ax160 mode with Antenna 15

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE TOP, 0.00	U-NII-5	WLAN, 10743-AAC	6025.0, 15	5.45	5.36	35.8	22.5	21.2


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-23	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 136.0	27.2 x 27.2 x 22.0	Date	2024-08-23	2024-08-23
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4	psSAR1g [W/kg]	1.14	1.36
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.237	0.264
Graded Grid	Yes	Yes	Power Drift [dB]	0.02	0.06
Grading Ratio	1.5	1.4	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		57.4
			Dist 3dB Peak [mm]		4.1

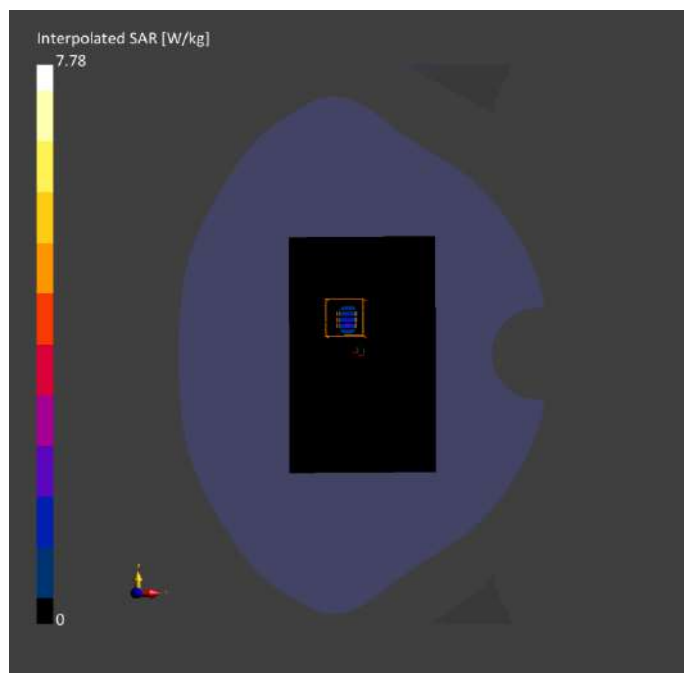

Meas.124 Left Head with Cheek on 0 Channel in Bluetooth mode with Antenna 9

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	165.0 x 75.0 x 10.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
LeftHead,	TILT,	ISM 2.4	Bluetooth,	2402.0,	7.75	1.74	39.8	22.6	21.5
HSL	0.00	GHz	10032-CAA	0					
		Band							


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-26	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0	Date	2024-08-26	2024-08-26
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.420	0.502
Sensor Surface	3.0	1.4	psSAR10g [W/kg]	0.209	0.211
[mm]			Power Drift [dB]	0.08	0.09
Graded Grid	Yes	Yes	Power Scaling	Disabled	Disabled
Grading Ratio	1.5	1.5	Scaling Factor		
MAIA	N/A	N/A	[dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		40.7
			Dist 3dB Peak		5.7
			[mm]		

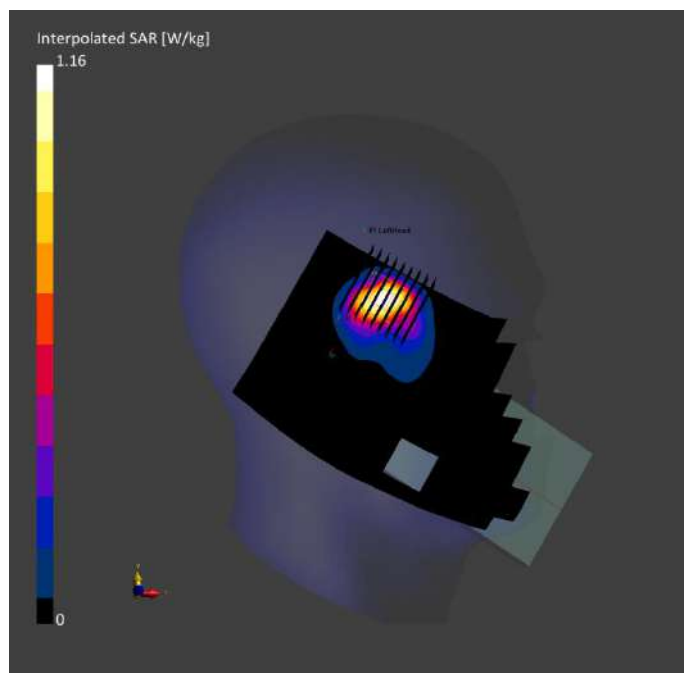

Meas.125 Body Plane with Back Side 15mm on 78 Channel in Bluetooth mode with Antenna 9
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	162.0 x 75.0 x 10.0	Phone


Exposure Conditions

Phantom	Position, Test Section, TSL	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	BACK, 15.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2402.0, 0	7.75	1.74	39.8	22.6	21.5

Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-26	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup			Measurement Results		
	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	120.0 x 192.0	30.0 x 30.0 x 30.0	Date	2024-08-26	2024-08-26
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.061	0.062
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.032	0.032
Graded Grid	Yes	Yes	Power Drift [dB]	-0.09	-0.11
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	Y	Scaling Factor		
Surface	VMS + 6p	VMS + 6p	[dB]		
Detection			TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		56.1
			Dist 3dB Peak [mm]		> 15.0

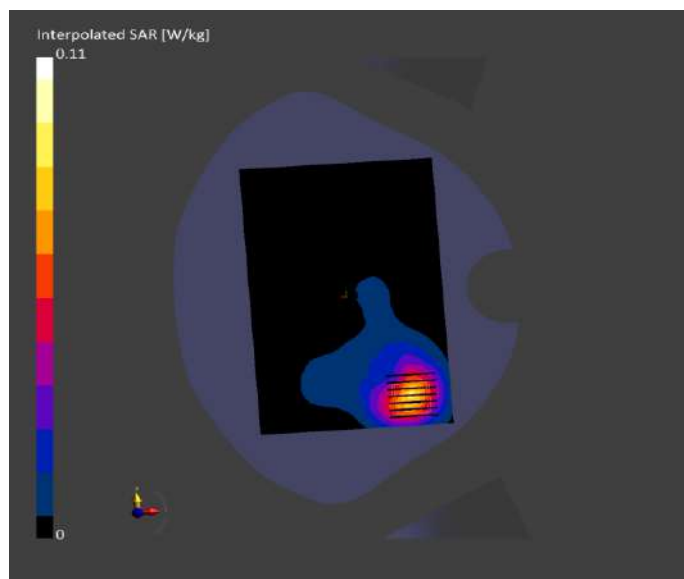

Meas.126 Body Plane with Right Edge 10mm on 78 Channel in Bluetooth mode with Antenna 9
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	158.2 x 77.9 x 8.0	Phone

Exposure Conditions

Phantom Section, TSL	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity	Ambient Temperature [°C]	Liquid Temperature [°C]
Flat, HSL	EDGE RIGHT, 10.00	ISM 2.4 GHz Band	Bluetooth, 10032-CAA	2480.0, 78	7.75	1.85	39.1	22.6	21.5


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-26	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 192.0	30.0 x 30.0 x 30.0	Date	2024-08-26	2024-08-26
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	0.206	0.237
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.102	0.104
Graded Grid	Yes	Yes	Power Drift [dB]	0.00	0.02
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	Y	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		51.2
			Dist 3dB Peak [mm]		7.0

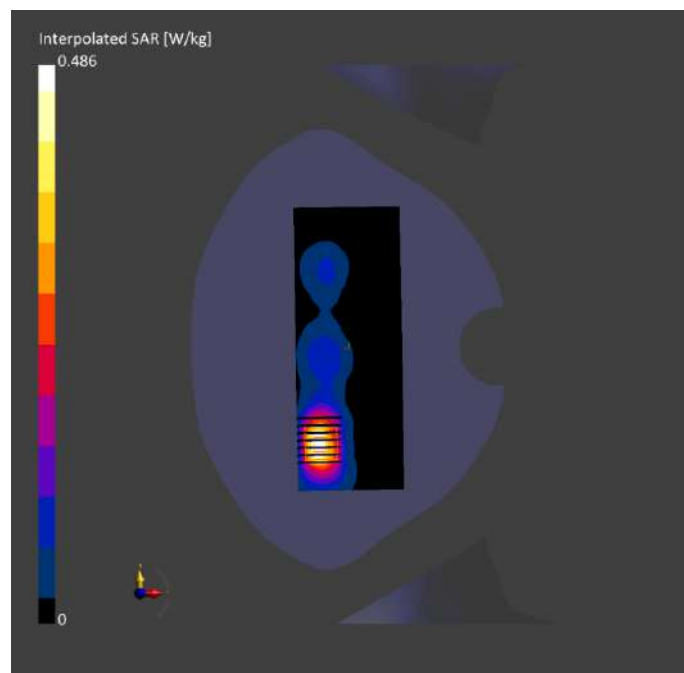

Meas.127 Body Plane with Top Edge 0mm on 0 Channel in Bluetooth mode with Antenna 7
Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	158.2 x 77.9 x 8.0	Phone

Exposure Conditions

Phantom	Position,	Band	Group,	Frequency	Conversion	TSL	TSL	Ambient	Liquid
Section,	Test		UID	[MHz],	Factor	Conductivit	Permittivity	Temperatur	Temperatur
TSL	Distance			Channel		y [S/m]		e	e
	[mm]			Number				[°C]	[°C]
Flat,	EDGE TOP,	ISM 2.4	Bluetooth,	2402.0,	7.75	1.74	39.8	22.6	21.5
HSL	0.00	GHz	10032-CAA	0					
		Band							


Hardware Setup

Phantom	TSL, Measured Date	Probe, Calibration Date	DAE, Calibration Date
Twin-SAM V5.0 (30deg probe tilt) - 1859	HBBL-600-10000 2024-08-26	EX3DV4 - SN7350, 2023-12-13	DAE4 Sn1711, 2024-03-18

Scan Setup

Measurement Results

	Area Scan	Zoom Scan		Area Scan	Zoom Scan
Grid Extents [mm]	72.0 x 120.0	30.0 x 30.0 x 30.0	Date	2024-08-26	2024-08-26
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0	psSAR1g [W/kg]	2.11	2.18
Sensor Surface [mm]	3.0	1.4	psSAR10g [W/kg]	0.723	0.718
Graded Grid	Yes	Yes	Power Drift [dB]	-0.13	-0.12
Grading Ratio	1.5	1.5	Power Scaling	Disabled	Disabled
MAIA	N/A	N/A	Scaling Factor [dB]		
Surface Detection	VMS + 6p	VMS + 6p	TSL Correction	No correction	No correction
Scan Method	Measured	Measured	M2/M1 [%]		38.6
			Dist 3dB Peak [mm]		5.0

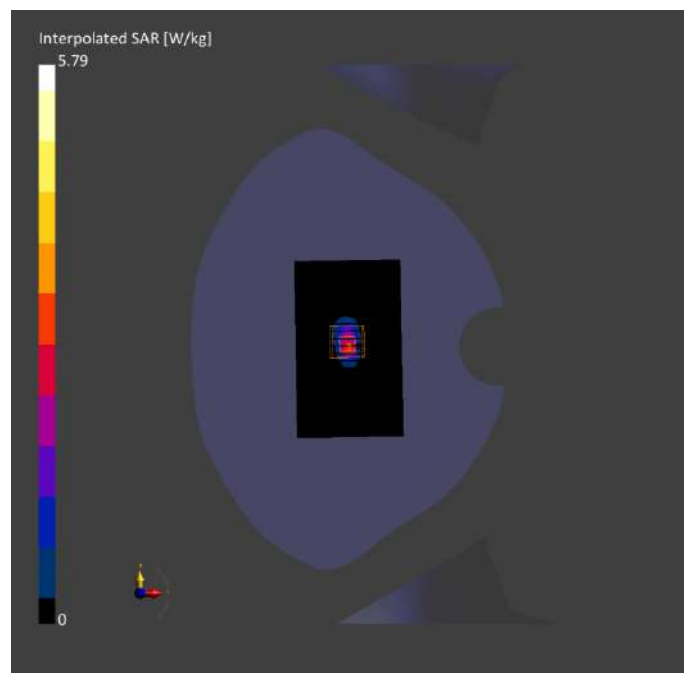

Meas.128 Body Plane with Top Edge 0mm on Low Channel in WCDMA Band2 mode with Antenna 2

Date: 2024.08.23

Communication System Band: BAND 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.208$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9262/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 4.99 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.84 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 8.18 W/kg

SAR(1 g) = 3.87 W/kg; SAR(10 g) = 1.88 W/kg

Maximum value of SAR (measured) = 4.49 W/kg

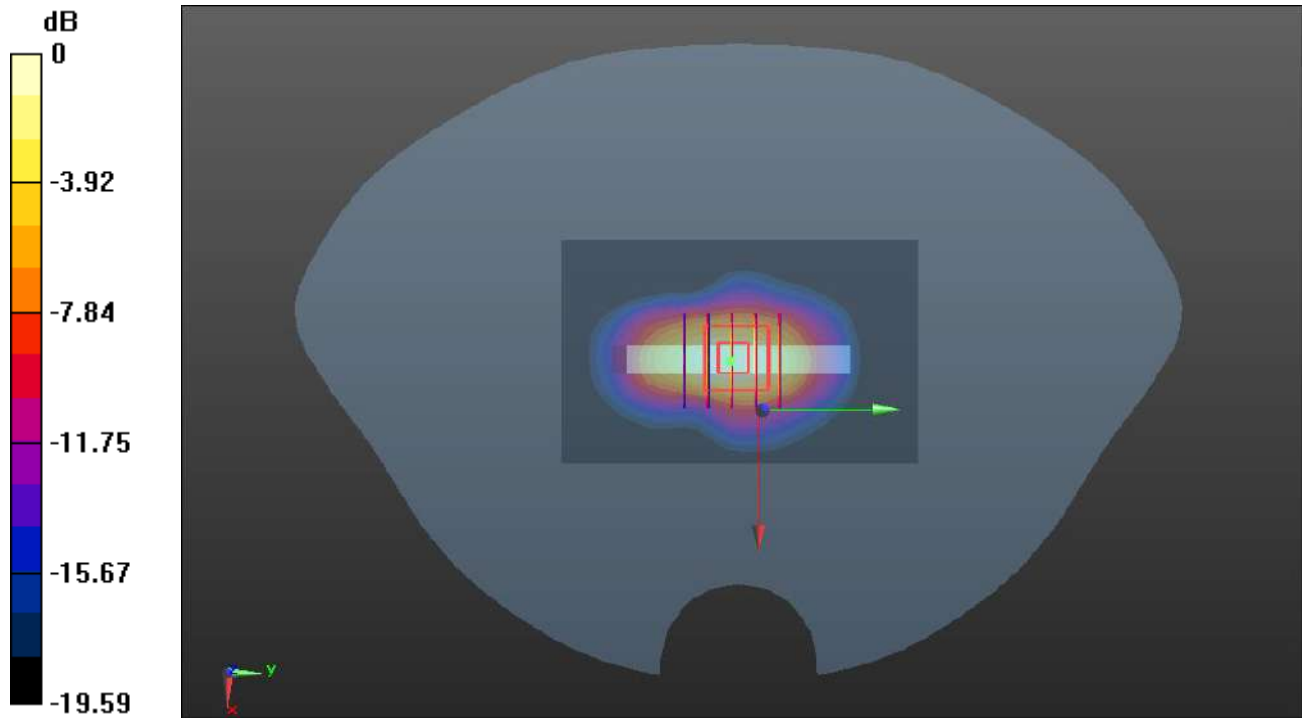

0 dB = 4.49 W/kg

Meas.129 Body Plane with Top Edge 0mm on Low Channel in WCDMA Band2 mode with Antenna 2

Date: 2024.08.23

Communication System Band: BAND 2; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.388$ S/m; $\epsilon_r = 40.208$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.1°C Liquid Temperature: 21.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9262/Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 5.12 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.35 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 7.66 W/kg

SAR(1 g) = 3.76 W/kg; SAR(10 g) = 1.82 W/kg

Maximum value of SAR (measured) = 4.32 W/kg

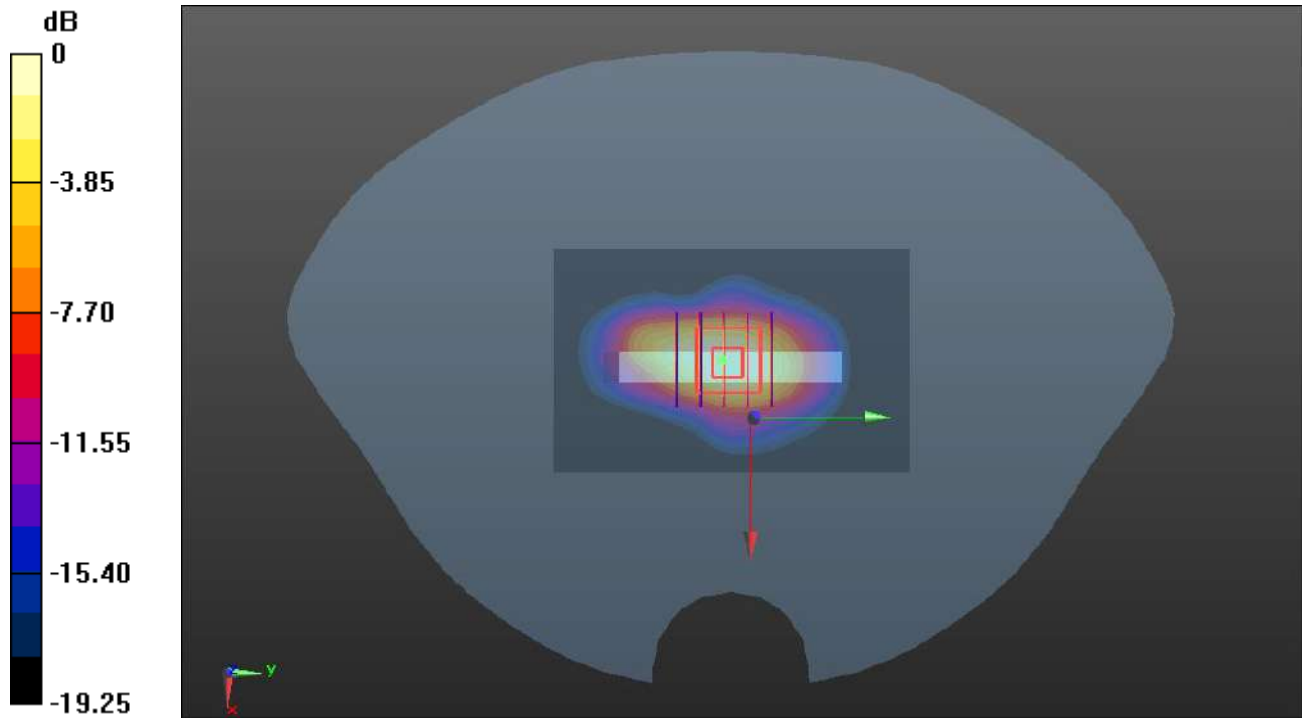

0 dB = 4.32 W/kg

Meas.130 Body Plane with Left Edge 10mm on Low Channel in WCDMA Band5 mode with Antenna 1

Date: 2024.08.27

Communication System Band: BAND 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.363$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.97, 9.97, 9.97); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH4132/Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.741 W/kg


CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.79 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.07 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.329 W/kg

Maximum value of SAR (measured) = 0.698 W/kg

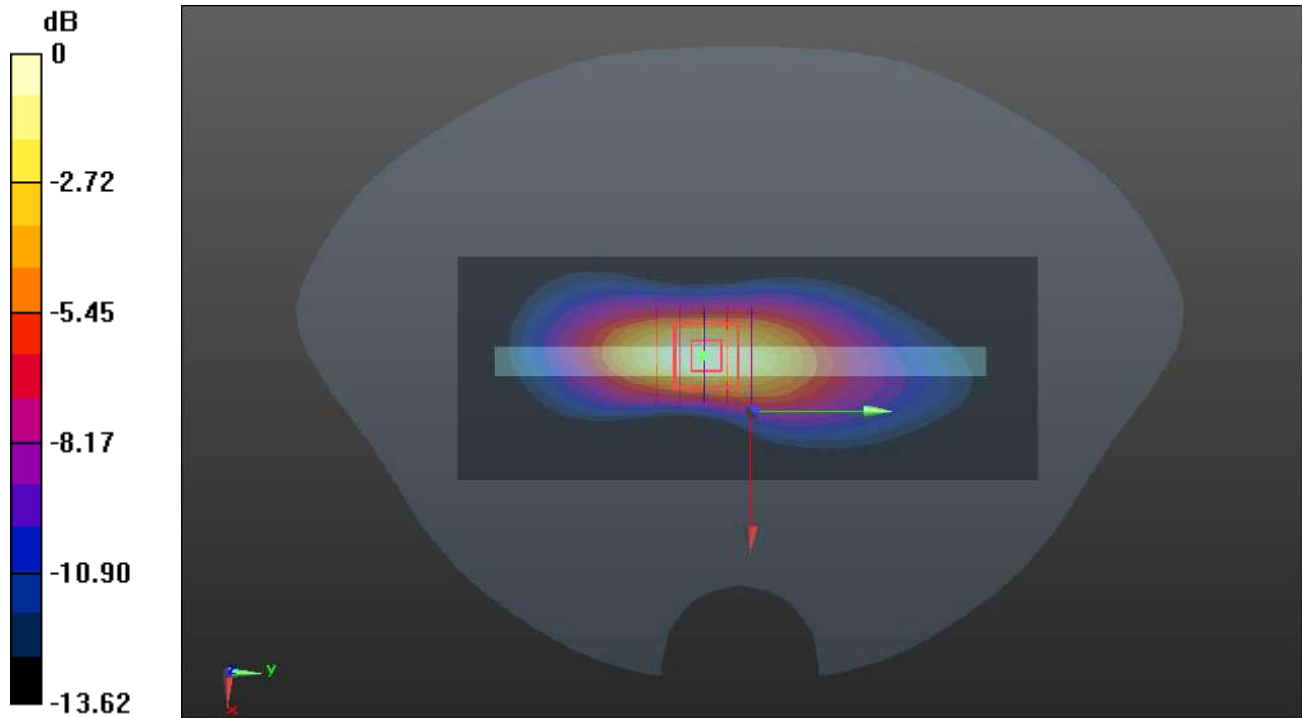

Meas.131 Body Plane with Left Edge 10mm on Low Channel in WCDMA Band5 mode with Antenna 1

Date: 2024.08.27

Communication System Band: BAND 5; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.363$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(9.97, 9.97, 9.97); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH4132/Area Scan (51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.664 W/kg


CH4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.54 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.925 W/kg

SAR(1 g) = 0.551 W/kg; SAR(10 g) = 0.310 W/kg

Maximum value of SAR (measured) = 0.617 W/kg

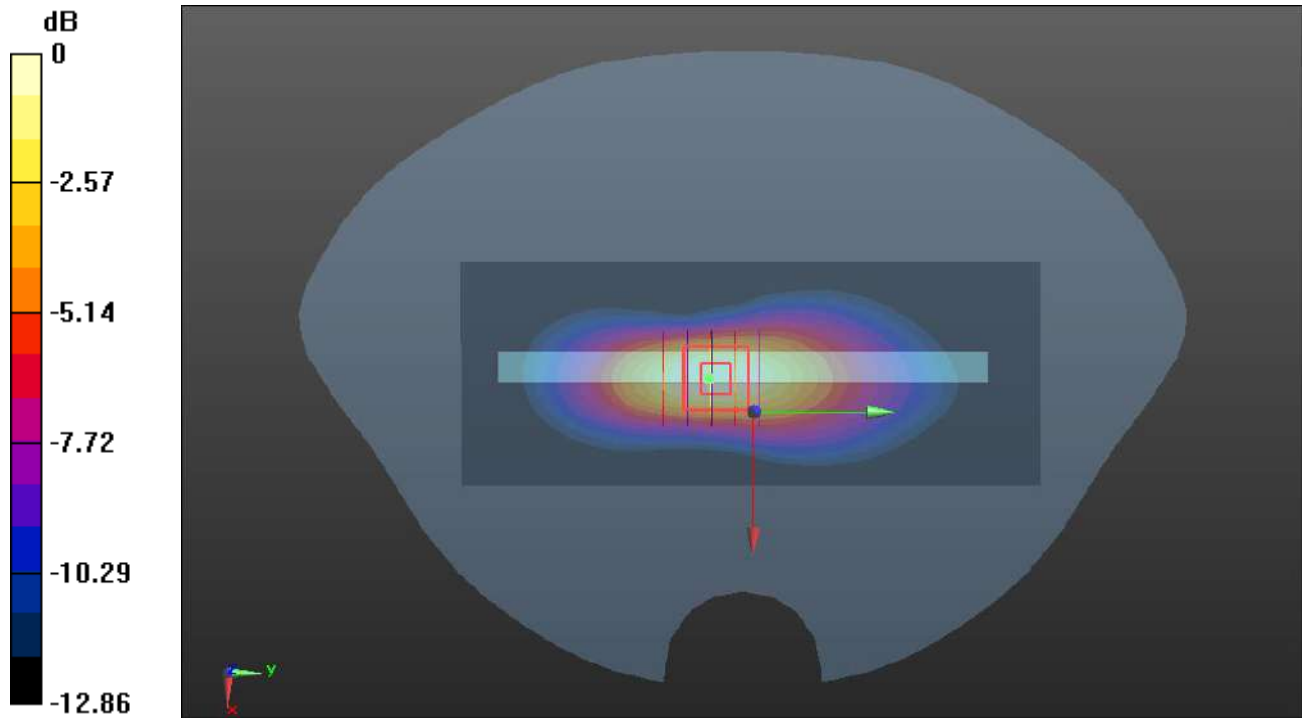

0 dB = 0.617 W/kg

Meas.132 Body Plane with Back Side 15mm on Middle Channel in LTE Band4 mode with Antenna 2

Date: 2024.08.26

Communication System Band: BAND 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 40.173$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH20175/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.680 W/kg


CH20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.88 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.485 W/kg

Maximum value of SAR (measured) = 0.787 W/kg

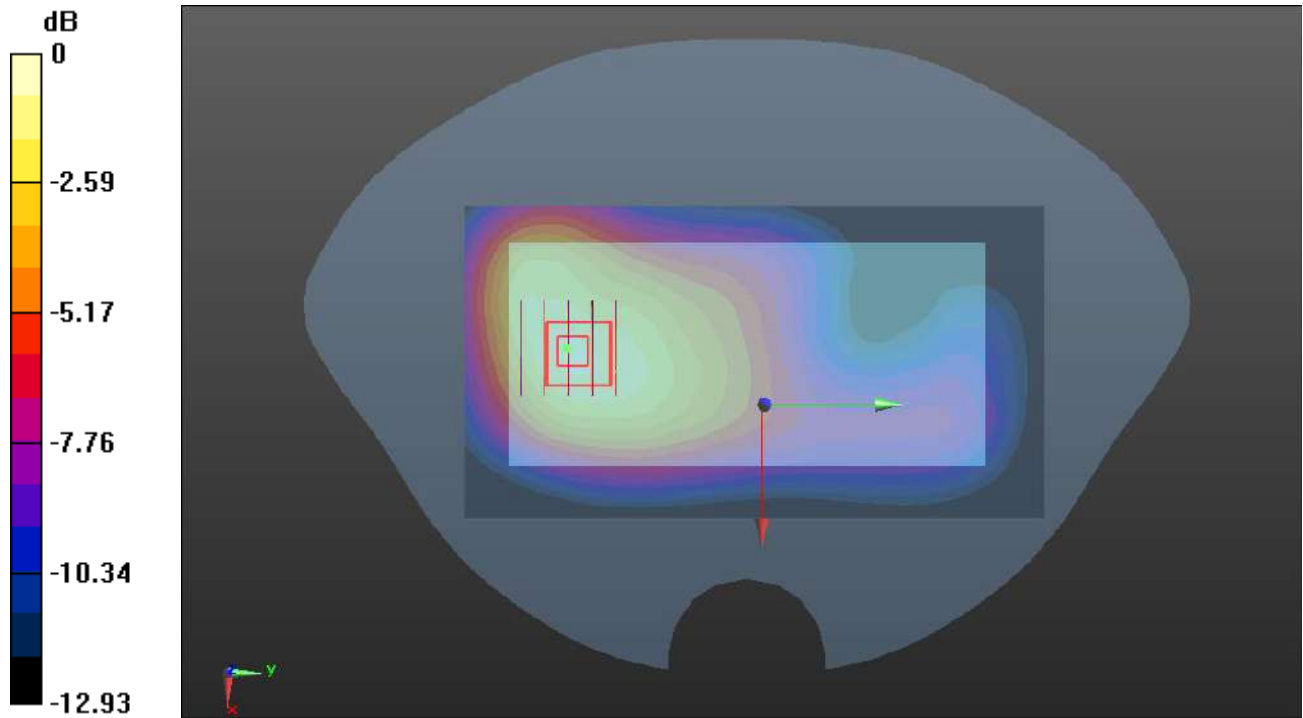

0 dB = 0.787 W/kg

Meas.133 Body Plane with Back Side 15mm on Middle Channel in LTE Band4 mode with Antenna 2

Date: 2024.08.26

Communication System Band: BAND 4; Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1732.5$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 40.173$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Ambient Temperature: 22.5°C Liquid Temperature: 21.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(7.35, 7.35, 7.35); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

CH20175/Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.704 W/kg


CH20175/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.26 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.968 W/kg

SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.428 W/kg

Maximum value of SAR (measured) = 0.685 W/kg

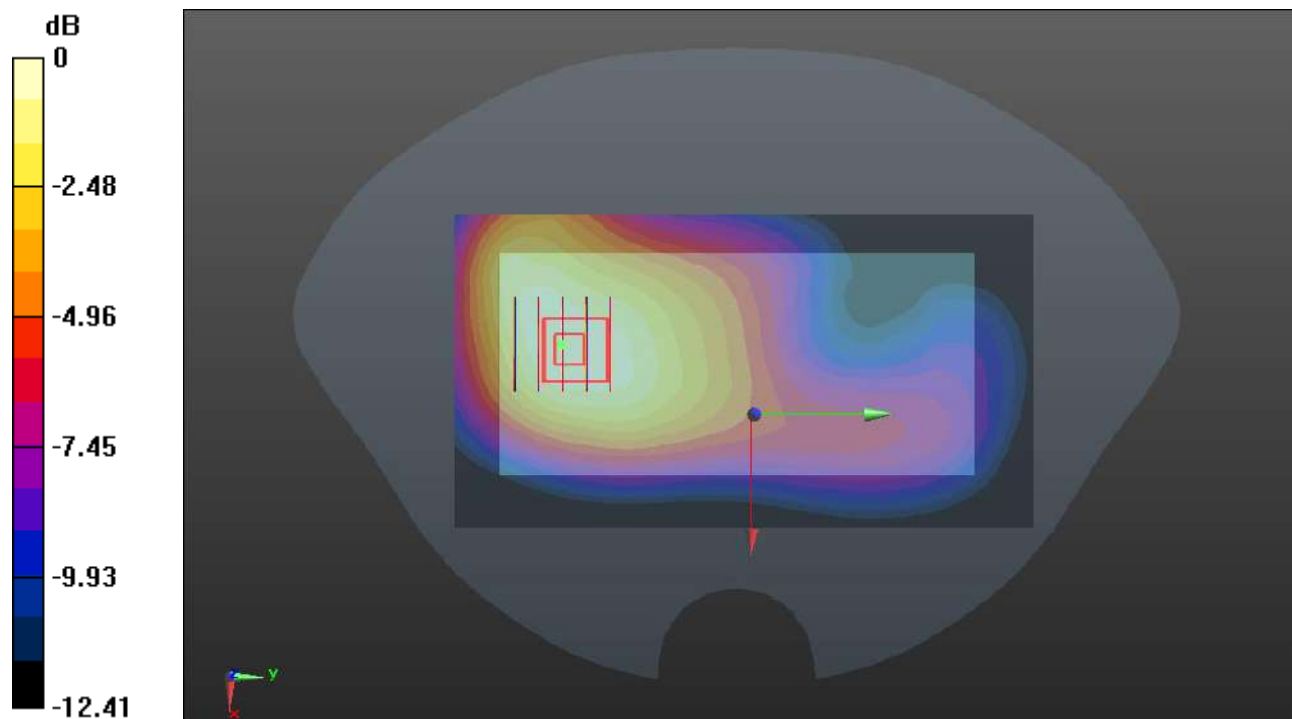

0 dB = 0.685 W/kg

Meas.134 Right Head with Cheek on Low Channel in LTE Band7 mode with Antenna 2

Date: 2024.08.31

Communication System Band: BAND 7; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 39.701$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20850/Area Scan (81x161x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.802 W/kg


Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.55 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.587 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.639 W/kg

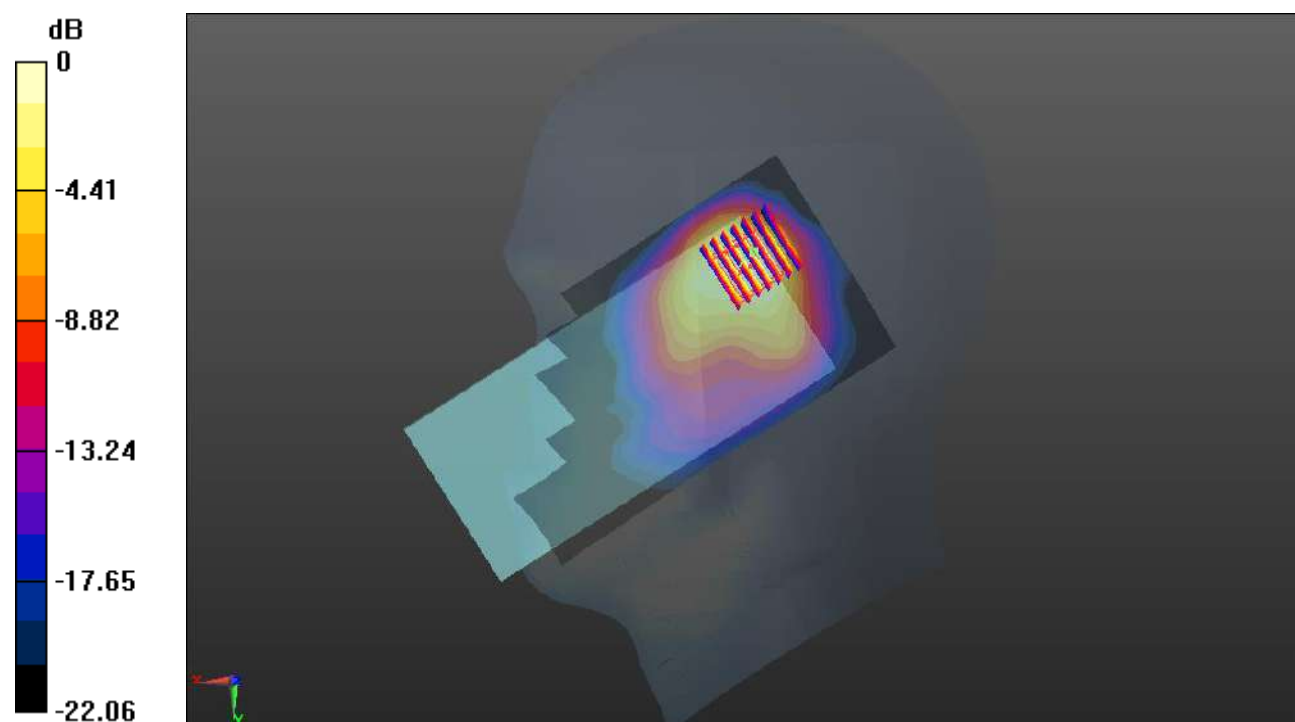

0 dB = 0.639 W/kg

Meas.135 Right Head with Cheek on Low Channel in LTE Band7 mode with Antenna 2

Date: 2024.08.31

Communication System Band: BAND 7; Frequency: 2510 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2510$ MHz; $\sigma = 1.834$ S/m; $\epsilon_r = 39.701$; $\rho = 1000$ kg/m³

Phantom section: Right Section

Ambient Temperature: 22.4°C Liquid Temperature: 21.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3748; ConvF(6.8, 6.8, 6.8); Calibrated: 2024.04.12;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1710; Calibrated: 2024.01.03
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1576
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch20850/Area Scan (81x161x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.804 W/kg


Ch20850/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 11.13 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.34 W/kg

SAR(1 g) = 0.612 W/kg; SAR(10 g) = 0.313 W/kg

Maximum value of SAR (measured) = 0.653 W/kg

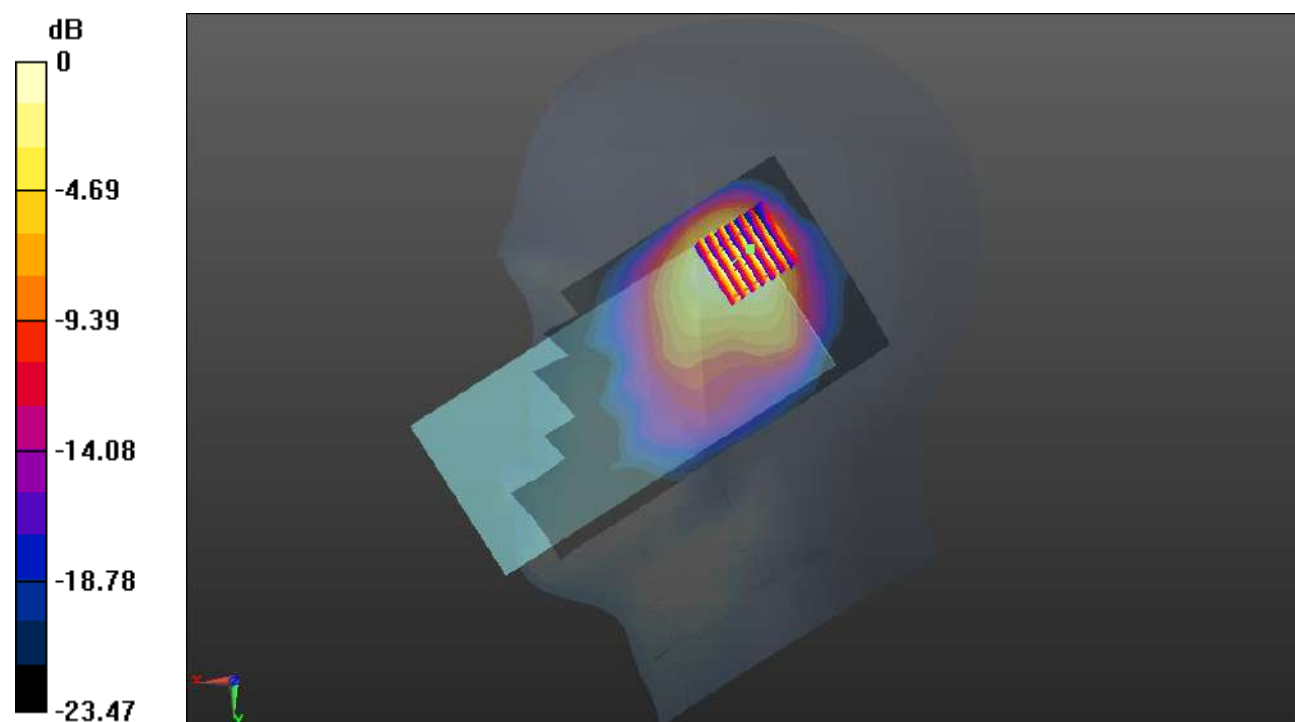

0 dB = 0.653 W/kg

ANNEX D EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2470686-AW.pdf”.

ANNEX E SAR TEST SETUP PHOTOS

Please refer the document “BL-SZ2470686-AS.pdf”.

ANNEX F CALIBRATION REPORT

Please refer the document “BL-SZ2470686-AC.pdf”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--