



TEST REPORT

Report Reference No..... : TRE17050084 R/C.....: 47770
FCC ID..... : YAMPD48XVHF
Applicant's name..... : Hytera Communications Corporation Limited
Address..... : Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, People's Republic of China
Manufacturer..... : Hytera Communications Corporation Limited
Address..... : Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, People's Republic of China
Test item description : DIGITAL PORTABLE RADIO
Trade Mark : Hytera
Model/Type reference..... : PD485 VHF
Listed Model(s)..... : PD482 VHF, PD486 VHF, PD488 VHF
Standard : FCC 47 CFR Part2.1093
ANSI/IEEE C95.1: 1999
IEEE 1528: 2013 IEC62209-2:2010
Date of receipt of test sample..... : May 10, 2017
Date of testing..... : May 10, 2017 - Jun. 03, 2017
Date of issue..... : Jun. 05, 2017
Result..... : PASS

Compiled by
(position+printed name+signature)...: File administrators:Candy Liu

Candy Liu

Supervised by
(position+printed name+signature)...: Test Engineer: SiyuanRao

Siyuan Rao

Approved by
(position+printed name+signature)...: Manager: Hans Hu

Hans Hu

Testing Laboratory Name : Shenzhen Huatongwei International Inspection Co., Ltd.

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

<u>1.</u>	<u>Test Standards and Report version</u>	<u>3</u>
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>Summary</u>	<u>4</u>
2.1.	Client Information	4
2.2.	Product Description	4
2.3.	Test frequency list	5
<u>3.</u>	<u>Test Environment</u>	<u>6</u>
3.1.	Address of the test laboratory	6
3.2.	Test Facility	6
3.3.	Environmental conditions	7
<u>4.</u>	<u>Equipments Used during the Test</u>	<u>7</u>
<u>5.</u>	<u>Measurement Uncertainty</u>	<u>8</u>
<u>6.</u>	<u>SAR Measurements System Configuration</u>	<u>9</u>
6.1.	SAR Measurement Set-up	9
6.2.	DASY5 E-field Probe System	10
6.3.	Phantoms	11
6.4.	Device Holder	11
<u>7.</u>	<u>SAR Test Procedure</u>	<u>12</u>
7.1.	Scanning Procedure	12
7.2.	Data Storage and Evaluation	13
<u>8.</u>	<u>Position of the wireless device in relation to the phantom</u>	<u>15</u>
8.1.	Front-of-face	15
8.2.	Body Position	15
<u>9.</u>	<u>SAR System Validation</u>	<u>16</u>
<u>10.</u>	<u>System Verification</u>	<u>17</u>
10.1.	Tissue Dielectric Parameters	17
10.2.	SAR System Verification	19
<u>11.</u>	<u>SAR Exposure Limits</u>	<u>23</u>
<u>12.</u>	<u>Conducted Power Measurement Results</u>	<u>24</u>
<u>13.</u>	<u>Maximum Tune-up Limit</u>	<u>25</u>
<u>14.</u>	<u>SAR Measurement Results</u>	<u>26</u>
<u>15.</u>	<u>TestSetup Photos</u>	<u>36</u>
<u>16.</u>	<u>Photos of the EUT</u>	<u>37</u>

1 . Test Standards and Report version

1.1. Test Standards

The tests were performed according to following standards:

[IEEE Std C95.1, 1999](#): IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 KHz to 300 GHz.

[IEEE Std 1528™-2013](#): IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.

[IEC 62209-2:2010](#): Human exposure to radio frequency fields from hand-held and bodymounted wireless communication devices.Human models,instrumentation, and procedures.Part 2: Procedure to determine thespecific absorption rate (SAR) forwireless communication devices usedin close proximity to the human body(frequency range of 30 MHz to 6 GHz)

[KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04](#): SAR Measurement Requirements for 100 MHz to 6 GHz

[KDB 865664 D02 RF Exposure Reporting v01r02](#): RF Exposure Compliance Reporting and Documentation Considerations

[KDB 447498 D01](#):General RF Exposure Guidance v05r02: Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

[KDB 643646 D01](#):SAR Test for PTT Radios v01r03 :SAR Test Reduction Considerations for Occupational PTT Radios

1.2. Report version

Version No.	Date of issue	Description
00	Jun. 05, 2017	Original

2. Summary

2.1. Client Information

Applicant:	Hytera Communications Corporation Limited
Address:	Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, People's Republic of China
Manufacturer:	Hytera Communications Corporation Limited
Address:	Hytera Tower, Hi-Tech Industrial Park North, 9108# Beihuan Road, Nanshan District, Shenzhen, People's Republic of China

2.2. Product Description

Name of EUT:	DIGITAL PORTABLE RADIO		
Trade mark:	Hytera		
Model/Type reference:	PD485 VHF		
Listed mode(s):	PD482 VHF, PD486 VHF, PD488 VHF		
Device Category:	Portable		
Power supply:	7.4V		
Hardware Version:	115601007301305000110110000000		
Software Version:	V1.01.08.001		
Maximum SAR Value			
Separation Distance:	Body:	0mm	
	Face:	25mm	
Maximun SAR Value (1g):	Body:	1.21 W/Kg	
	Face:	0.595 W/Kg	
PTT			
Operation Frequency Range:	From 136MHz to 174MHz		
Rated Output Power:	<input checked="" type="checkbox"/> High Power: 5 W (37.00dBm) <input checked="" type="checkbox"/> Low Power 1W (30.00dBm)		
Modulation Type:	Analog	FM	
	Digital:	4FSK	
Channel Separation:	Analog:	<input checked="" type="checkbox"/> 12.5kHz	<input type="checkbox"/> 20kHz <input type="checkbox"/> 25kHz
	Digital:	<input type="checkbox"/> 6.25kHz	<input checked="" type="checkbox"/> 12.5kHz
Digital Type:	DMR		
Antenna type:	External		
Bluetooth			
Version:	Supported BT4.0+EDRcompatibility		
Modulation:	GFSK, π/4DQPSK, 8DPSK		
Operation frequency:	2402MHz~2480MHz		
Channel number:	79		
Channel separation:	1MHz		

2.3. Test frequency list

Mode	Channel Separation (KHz)	Operation Frequency Range	Channel	Frequency (MHz)
Analog	12.5	136 MHz~150 MHz	Ch1	136.05
			Ch2	143.00
			Ch3	149.95
Digital	12.5	136 MHz~150 MHz	Ch1	136.05
			Ch2	143.00
			Ch3	149.95

Mode	Channel Separation (KHz)	Operation Frequency Range	Channel	Frequency (MHz)
Analog	12.5	146 MHz~174 MHz	Ch1	146.05
			Ch2	153.05
			Ch3	160.05
			Ch4	167.05
			Ch5	173.95
Digital	12.5	146 MHz~174 MHz	Ch1	146.05
			Ch2	153.05
			Ch3	160.05
			Ch4	167.05
			Ch5	173.95

3. Test Environment

3.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC 17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until April 30, 2017.

FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

IC-Registration No.: 5377B

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

ACA

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	18-25 ° C
Humidity:	40-65 %
Atmospheric pressure:	950-1050mbar

4. Equipments Used during the Test

Test Equipment	Manufacturer	Type/Model	Serial Number	Calibration	
				Last Calibration	Calibration Interval
Data Acquisition Electronics DAEx	SPEAG	DAE4	1315	2016/07/26	1
E-field Probe	SPEAG	EX3DV4	3842	2017/02/23	1
System Validation Dipole CLA150	SPEAG	CLA150	4019	2016/02/11	3
Dielectric Probe Kit	SPEAG	DAK-3.5	1038	2016/08/25	1
Power meter	Agilent	E4417A	GB41292254	2016/10/25	1
Power sensor	Agilent	8481H	MY41095360	2016/10/25	1
Power sensor	Agilent	E9327A	US40441621	2016/10/25	1
Network analyzer	Agilent	8753E	US37390562	2016/10/24	1
Signal Generator	ROHDE & SCHWARZ	SMBV100A	258525	2016/10/22	1
Power Divider	ARRA	A3200-2	N/A	N/A	N/A
Dual Directional Coupler	Agilent	778D	50783	Note	
Attenuator 1	PE	PE7005-10	N/A	Note	
Attenuator 2	PE	PE7005-10	N/A	Note	
Attenuator 3	PE	PE7005-3	N/A	Note	
Power Amplifier	AR	5S1G4M2	0328798	Note	

Note:

1. The Probe, Dipole and DAE calibration reference to the Appendix A.

5. Measurement Uncertainty

No.	Error Description	Type	Uncertainty Value	Probably Distribution	Div.	(Ci) 1g	(Ci) 10g	Std. Unc. (1g)	Std. Unc. (10g)	Degree of freedom
Measurement System										
1	Probe calibration	B	6.0%	N	1	1	1	6.0%	6.0%	∞
2	Axial isotropy	B	4.70%	R	$\sqrt{3}$	0.7	0.7	1.90%	1.90%	∞
3	Hemispherical isotropy	B	9.60%	R	$\sqrt{3}$	0.7	0.7	3.90%	3.90%	∞
4	Boundary Effects	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	∞
5	Probe Linearity	B	4.70%	R	$\sqrt{3}$	1	1	2.70%	2.70%	∞
6	Detection limit	B	1.00%	R	$\sqrt{3}$	1	1	0.60%	0.60%	∞
7	RF ambient conditions-noise	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
8	RF ambient conditions-reflection	B	0.00%	R	$\sqrt{3}$	1	1	0.00%	0.00%	∞
9	Response time	B	0.80%	R	$\sqrt{3}$	1	1	0.50%	0.50%	∞
10	Integration time	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	∞
11	RF ambient	B	3.00%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
12	Probe positioned mech. restrictions	B	0.40%	R	$\sqrt{3}$	1	1	0.20%	0.20%	∞
13	Probe positioning with respect to phantom shell	B	2.90%	R	$\sqrt{3}$	1	1	1.70%	1.70%	∞
14	Max.SAR evalation	B	3.90%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
Test Sample Related										
15	Test sample positioning	A	1.86%	N	1	1	1	1.86%	1.86%	∞
16	Device holder uncertainty	A	1.70%	N	1	1	1	1.70%	1.70%	∞
17	Drift of output power	B	5.00%	R	$\sqrt{3}$	1	1	2.90%	2.90%	∞
Phantom and Set-up										
18	Phantom uncertainty	B	4.00%	R	$\sqrt{3}$	1	1	2.30%	2.30%	∞
19	Liquid conductivity (target)	B	5.00%	R	$\sqrt{3}$	0.64	0.43	1.80%	1.20%	∞
20	Liquid conductivity (meas.)	A	0.50%	N	1	0.64	0.43	0.32%	0.26%	∞
21	Liquid permittivity (target)	B	5.00%	R	$\sqrt{3}$	0.64	0.43	1.80%	1.20%	∞
22	Liquid cpermittivity (meas.)	A	0.16%	N	1	0.64	0.43	0.10%	0.07%	∞
Combined standard uncertainty		$u_c = \sqrt{\sum_{i=1}^{22} c_i^2 u_i^2}$		/	/	/	/	9.79%	9.67%	∞
Expanded uncertainty (confidence interval of 95 %)		$u_e = 2u_c$		R	K=2	/	/	19.57%	19.34%	∞

6. SAR Measurements System Configuration

6.1. SAR Measurement Set-up

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stäubli RX family) with controller and software. An arm extension for accommodating the data acquisition electronics (DAE).

A dosimetric probe, i.e. an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronic (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

A unit to operate the optical surface detector which is connected to the EOC.

The Electro-Optical Coupler (EOC) performs the conversion from the optical into a digital electric signal of the DAE. The EOC is connected to the DASY5 measurement server.

The DASY5 measurement server, which performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. A computer operating Windows 2003.

DASY5 software and SEMCAD data evaluation software.


Remote control with teach panel and additional circuitry for robot safety such as warning lamps, etc.

The generic twin phantom enabling the testing of left-hand and right-hand usage.

The device holder for handheld Mobile Phones.

Tissue simulating liquid mixed according to the given recipes.

System validation dipoles allowing to validate the proper functioning of the system.

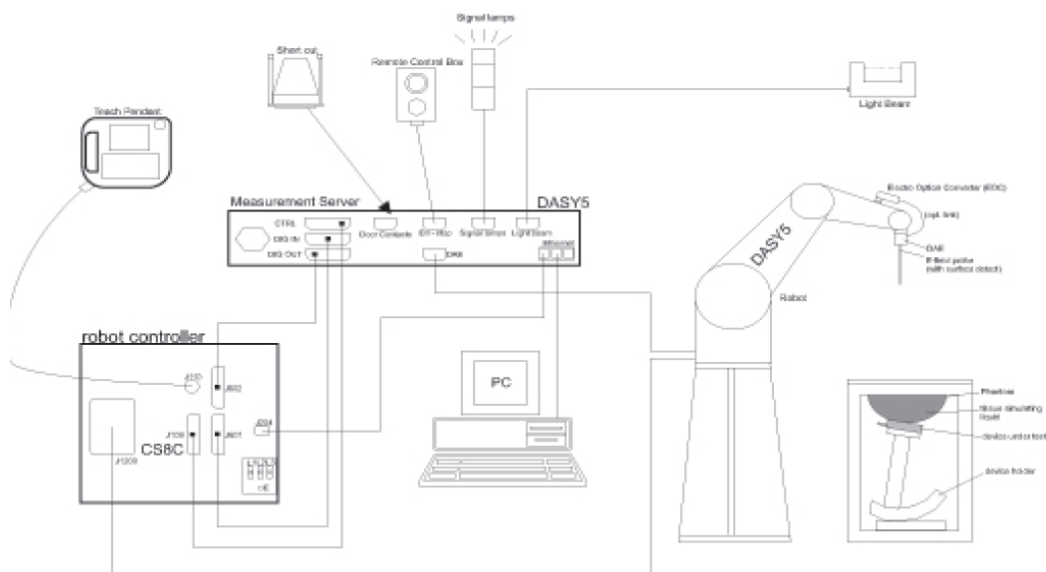

6.2. DASY5 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ES3DV3 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation.

● Probe Specification

Construction Symmetrical design with triangular core
 Interleaved sensors
 Built-in shielding against static charges
 PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

Calibration ISO/IEC 17025 calibration service available.


Frequency	10 MHz to 4 GHz; Linearity: ± 0.2 dB (30 MHz to 4 GHz)
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)
Dynamic Range	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm
Application	General dosimetry up to 4 GHz Dosimetry in strong gradient fields Compliance tests of Mobile Phones
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



● Isotropic E-Field Probe

The isotropic E-Field probe has been fully calibrated and assessed for isotropicity, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change.

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

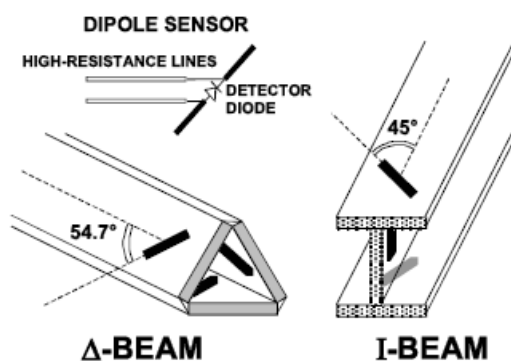

6.3. Phantoms

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.



ELI4 Phantom

6.4. Device Holder

The device was placed in the device holder (illustrated below) that is supplied by SPEAG as an integral part of the DASY system.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Device holder supplied by SPEAG

7. SAR Test Procedure

7.1. Scanning Procedure

The DASY5 installation includes predefined files with recommended procedures for measurements and validation. They are read-only document files and destined as fully defined but unmeasured masks. All test positions (head or body-worn) are tested with the same configuration of test steps differing only in the grid definition for the different test positions.

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure. The indicated drift is mainly the variation of the DUT’s output power and should vary max. $\pm 5\%$.

The “surface check” measurement tests the optical surface detection system of the DASY5 system by repeatedly detecting the surface with the optical and mechanical surface detector and comparing the results. The output gives the detecting heights of both systems, the difference between the two systems and the standard deviation of the detection repeatability. Air bubbles or refraction in the liquid due to separation of the sugar-water mixture gives poor repeatability (above $\pm 0.1\text{mm}$). To prevent wrong results tests are only executed when the liquid is free of air bubbles. The difference between the optical surface detection and the actual surface depends on the probe and is specified with each probe (It does not depend on the surface reflectivity or the probe angle to the surface within $\pm 30^\circ$.)

Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values before running a detailed measurement around the hot spot. Before starting the area scan a grid spacing of 15 mm x 15 mm is set. During the scan the distance of the probe to the phantom remains unchanged. After finishing area scan, the field maxima within a range of 2 dB will be ascertained.

Zoom Scan

Zoom Scans are used to estimate the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan is done by 7x7x5 points within a cube whose base is centered around the maxima found in the preceding area scan.

Spatial Peak Detection

The procedure for spatial peak SAR evaluation has been implemented and can determine values of masses of 1g and 10g, as well as for user-specific masses. The DASY5 system allows evaluations that combine measured data and robot positions, such as: • maximum search • extrapolation • boundary correction • peak search for averaged SAR. During a maximum search, global and local maxima searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard’s method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation. Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Zoom Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard’s method for extrapolation. For a grid using 7x7x5 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10g cubes.

A Z-axis scan measures the total SAR value at the x-and y-position of the maximum SAR value found during the cube 7x7x5 scan. The probe is moved away in z-direction from the bottom of the SAM phantom in 5mm steps.

7.2. Data Storage and Evaluation

Data Storage

The DASY5 software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DA4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [mW/g], [mW/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

Data Evaluation

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	Sensitivity:	Normi, ai0, ai1, ai2
	Conversion factor:	ConvFi
	Diode compression point:	Dcpi
Device parameters:	Frequency:	f
	Crest factor:	cf
Media parameters:	Conductivity:	σ
	Density:	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY5 components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Vi:	compensated signal of channel (i = x, y, z)
Ui:	input signal of channel (i = x, y, z)
cf:	crest factor of exciting field (DASY parameter)
dcp _i :	diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\mathbf{E} - \text{fieldprobes :} \quad E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\mathbf{H} - \text{fieldprobes :} \quad H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

Vi:	compensated signal of channel (i = x, y, z)
Normi:	sensor sensitivity of channel (i = x, y, z), [mV/(V/m)²] for E-field Probes
ConvF:	sensitivity enhancement in solution
aij:	sensor sensitivity factors for H-field probes
f:	carrier frequency [GHz]
Ei:	electric field strength of channel i in V/m
Hi:	magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$


SAR: local specific absorption rate in mW/g
Etot: total field strength in V/m
 σ : conductivity in [mho/m] or [Siemens/m]
 ρ : equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

8. Position of the wireless device in relation to the phantom


8.1. Front-of-face

A typical example of a front-of-face device is a two-way radio that is held at a distance from the face of the user when transmitting. In these cases the device under test shall be positioned at the distance to the phantom surface that corresponds to the intended use as specified by the manufacturer in the user instructions. If the intended use is not specified, a separation distance of 25 mm between the phantom surface and the device shall be used.

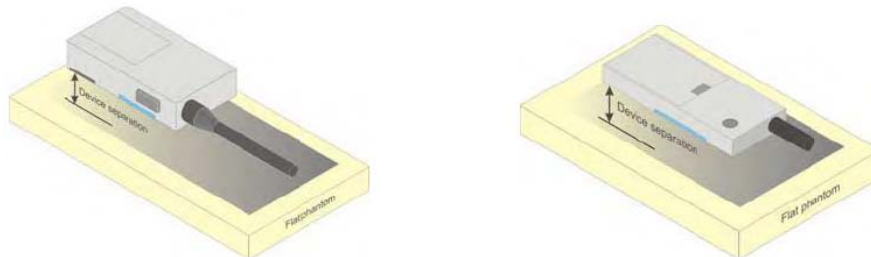

8.2. Body Position

A typical example of a body-worn device is a mobile phone, wireless enabled PDA or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.

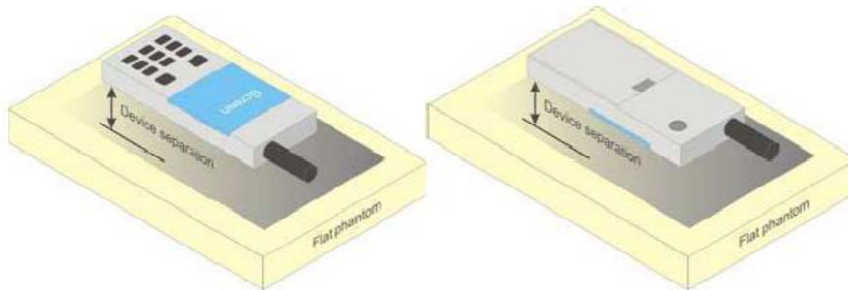

9. SAR System Validation

Per FCC KDB 865664 D02, SAR system validation status should be documented to confirm measurement accuracy. The SAR systems (including SAR probes, system components and software versions) used for this device were validated against its performance specifications prior to the SAR measurements. Reference dipoles were used with the required tissue-equivalent media for system validation, according to the procedures outlined in FCC KDB 865664 D01 and IEEE 1528-2013. Since SAR probe calibrations are frequency dependent, each probe calibration point, using the system that normally operates with the probe for routine SAR measurements and according to the required tissue-equivalent media.

A tabulated summary of the system validation status including the validation date(s), measurement frequencies, SAR probes and tissue dielectric parameters has been included.

SAR System Validation Summary

Probe	Probe type	Probe Calibration Point		Dielectric Parameters		CW Validation			Modulation Validation		
				Conductivity	Permittivity	Sensitivity	Probe linearity	Probe Isotropy	Modulation type	Duty factor	PAR
3842	EX3DV4	150	Head	0.76	52.3	PASS	PASS	PASS	4FSK/FM	PASS	N/A
3842	EX3DV4	150	Body	0.80	61.9	PASS	PASS	PASS	4FSK/FM	PASS	N/A

NOTE:

While the probes have been calibrated for both CW and modulated signals, all measurements were performed using communication systems calibrated for CW signals only. Modulations in the table above represent test configurations for which the measurement system has been validated per FCC KDB Publication 865664 D01 for scenarios when CW probe calibrations are used with other signal types.

10. System Verification

10.1. Tissue Dielectric Parameters

The liquid used for the frequency consisted of water, sugar, salt and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 1 and 2 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the KDB865664 D01.

Table 1. Composition of the Head Tissue Equivalent Matter

Mixture %	Frequency 150MHz
Water	38.36
Sugar	55.42
Salt	5.11
Preventol	0.10
Cellulose	1.07
Dielectric Parameters Target Value	f=150MHz $\epsilon_r=52.3$ $\sigma=0.76$

Table 2. Composition of the Body Tissue Equivalent Matter

Mixture %	Frequency 150MHz
Water	46.22
Sugar	49.78
Salt	3.07
Preventol	0.10
Cellulose	0.47
Dielectric Parameters Target Value	f=150MHz $\epsilon_r=61.9$ $\sigma=0.80$

Table 3. Targets for tissue simulating liquid

Frequency (MHz)	Head Tissue		Body Tissue	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

CheckResult:

Dielectric performance of Head tissue simulating liquid				
Frequency (MHz)	Description	DielectricParameters		Temp
		ϵ_r	$\sigma(\text{s/m})$	°C
150	Recommended result ±5% window	52.3 49.69–54.92	0.76 0.72–0.80	/
	Measurement value 2017-05-31	53.5	0.77	21


Dielectric performance of Body tissue simulating liquid				
Frequency (MHz)	Description	DielectricParameters		Temp
		ϵ_r	$\sigma(\text{s/m})$	°C
150	Recommended result ±5% window	61.9 58.81–65.00	0.80 0.76–0.84	/
	Measurement value 2017-06-01	60.7	0.79	21

10.2. SAR System Verification

The purpose of the system check is to verify that the system operates within its specifications at the device test frequency. The system check is simple check of repeatability to make sure that the system works correctly at the time of the compliance test;

System check results have to be equal or near the values determined during dipole calibration with the relevant liquids and test system ($\pm 10\%$).

System check is performed regularly on all frequency bands where tests are performed with the DASY5 system.

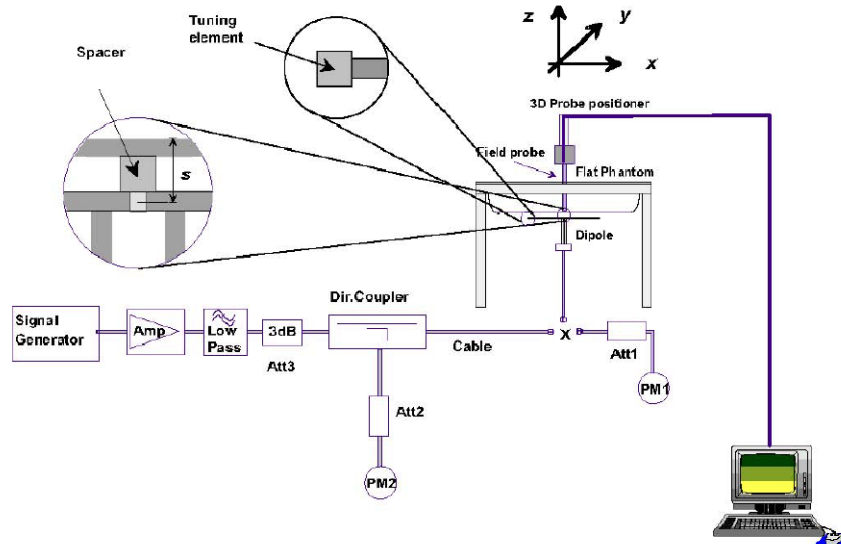

The output power on dipole port must be calibrated to 30 dBm (1000mW) before dipole is connected.



Photo of Dipole Setup

Check Result:

System Validation Result for Head				
Frequency (MHz)	Description	SAR(W/kg)		Temp
		1g	10g	°C
150	Recommended result ±5% window	3.79 3.60 – 3.98	2.52 2.39–2.65	/
	Measurement value 2017-05-31	3.85	2.56	21

System Validation Result for Body				
Frequency (MHz)	Description	SAR(W/kg)		Temp
		1g	10g	°C
150	Recommended result ±5% window	3.89 3.70 – 4.08	2.59 2.46–2.72	/
	Measurement value 2017-06-01	3.96	2.68	21

Note:

1. the graph results see follow.
2. Recommended Values used derive from the calibration certificate and 398mW is used as feeding power to the calibrated dipole.

System Performance Check at 150 MHz Head

DUT: Dipole150 MHz; Type: CLA150; Serial: 4019

Date:2017-05-31

Communication System: DuiJiangJi; Frequency: 150 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 150$ MHz; $\sigma = 0.77$ S/m; $\epsilon_r = 53.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842;ConvF(11.84,11.84,11.84); Calibrated: 23/02/2017;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 26/07/2016

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

System Performance Check at 150MHz/Area Scan (61x201x1):Interpolated grid: dx=1.500 mm, dy=1.50 mm

Maximum value of SAR (interpolated) = 4.19 W/Kg


System Performance Check at 150MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.0 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 6.22 W/kg

SAR(1 g) = 3.85 mW/g; SAR(10 g) = 2.56 mW/g

Maximum value of SAR (measured) = 4.17 mW/g

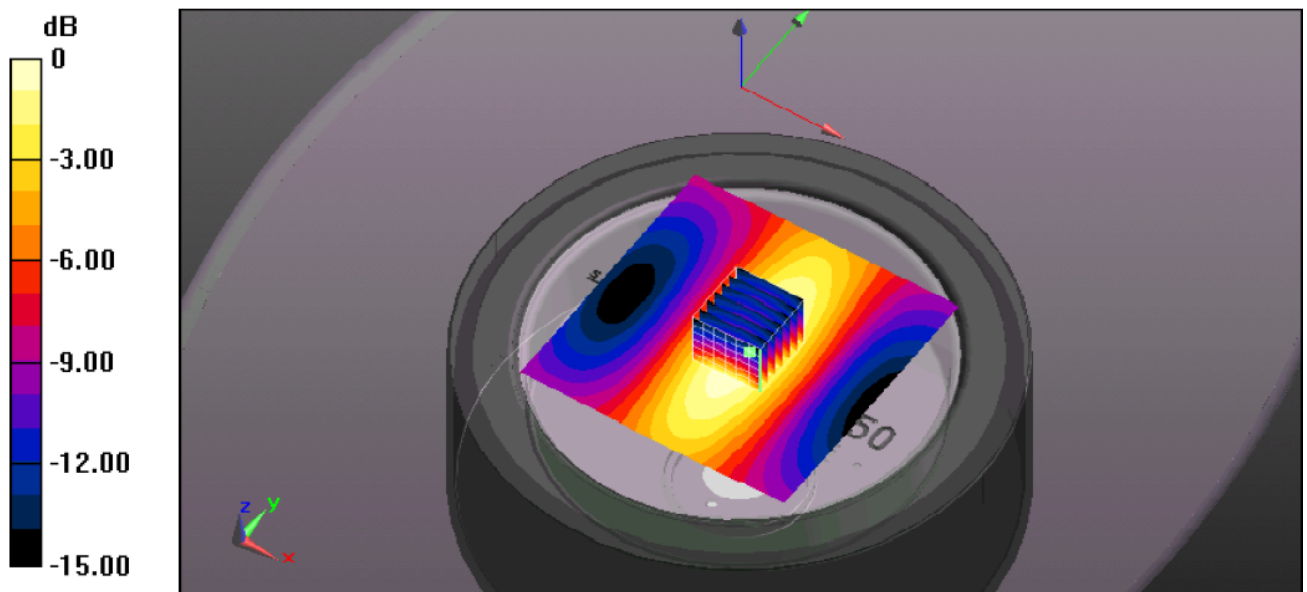

System Performance Check 150MHz Head 1 W

System Performance Check at 150 MHz Body

DUT: Dipole150 MHz; Type: CLA150; Serial: 4019

Date:2017-06-01

Communication System: DuiJiangJi; Frequency: 150 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 150 \text{ MHz}$; $\sigma = 0.79 \text{ S/m}$; $\epsilon_r = 60.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

Probe: EX3DV4 - SN3842;ConvF(10.86,10.86,10.86); Calibrated: 23/02/2017;

Sensor-Surface: 2mm (Mechanical Surface Detection)

Electronics: DAE4 Sn1315; Calibrated: 26/07/2016

Phantom: ELI 4.0; Type: QDOVA001BA;

Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

System Performance Check at 150MHz/Area Scan (61x201x1):Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.50 \text{ mm}$

Maximum value of SAR (interpolated) = 4.28 W/Kg


System Performance Check at 150MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.33 V/m ; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 6.36 W/kg

SAR(1 g) = 3.96 mW/g ; SAR(10 g) = 2.68 mW/g

Maximum value of SAR (measured) = 4.42 mW/g

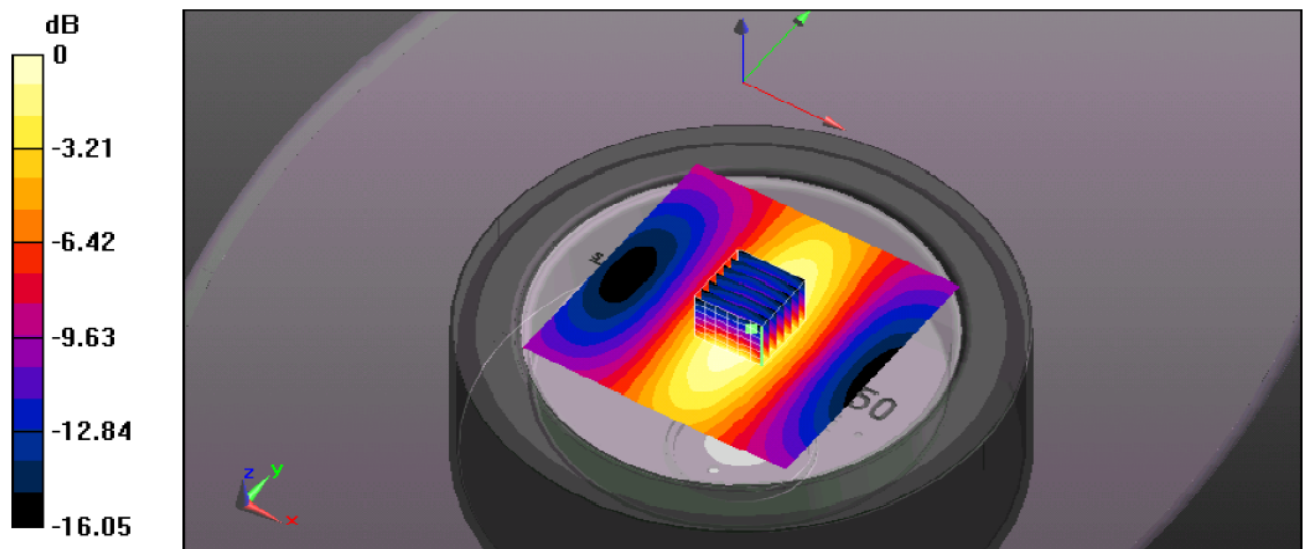

System Performance Check 150MHz Body 1 W

11. SAR Exposure Limits

Type Exposure	Limit (W/kg)	
	General Population / Uncontrolled Exposure Environment	Occupational / Controlled Exposure Environment
Spatial Average SAR (whole body)	0.08	0.4
Spatial Peak SAR (1g cube tissue for head and trunk)	1.60	8.0
Spatial Peak SAR (10g for limb)	4.0	20.0

Population/Uncontrolled Environments: are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments: are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

12. Conducted Power Measurement Results

Mode	Channel	Frequency (MHz)	Conducted power (dBm)
Analog / 12.5KHz	CH1	136.05	36.48
	CH2	143.00	36.49
	CH3	149.95	36.49
Digital / 12.5KHz	CH1	136.05	36.42
	CH2	143.00	36.43
	CH3	149.95	36.43

Mode	Channel	Frequency (MHz)	Conducted power (dBm)
Analog / 12.5KHz	CH4	146.05	36.50
	CH5	153.05	36.53
	CH6	160.05	36.61
	CH7	167.05	36.63
	CH8	173.95	36.68
Digital / 12.5KHz	CH4	146.05	36.45
	CH5	153.05	36.55
	CH6	160.05	36.63
	CH7	167.05	36.51
	CH8	173.95	36.40

Bluetooth			
Mode	Channel	Frequency (MHz)	Conducted power (dBm)
GFSK	0	2402	3.99
	39	2441	5.15
	78	2480	4.76
$\pi/4$ QPSK	0	2402	2.84
	39	2441	3.90
	78	2480	3.42
8DPSK	0	2402	2.99
	39	2441	4.11
	78	2480	3.71

13. Maximum Tune-up Limit

This device operates using the following maximum output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB publication 447498 D01

Mode	Channel Separation (KHz)	Operation Frequency Range	Tune up power
Analog / Digital	12.5	136 MHz~174 MHz	37.0dBm

Bluetooth			
Mode	Channel	Frequency (MHz)	Conducted power (dBm)
GFSK	0	2402	5.50
	39	2441	5.50
	78	2480	5.50
$\pi/4$ QPSK	0	2402	4.00
	39	2441	4.00
	78	2480	4.00
8DPSK	0	2402	4.50
	39	2441	4.50
	78	2480	4.50

Per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100MHz to 6GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. Power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] * [\sqrt{f}(\text{GHz})] \leq 15.0$ for 1-g SAR

Band/Mode	F(GHz)	Position	SAR test exclusion threshold (mW)	RF output power		SAR test exclusion
				dBm	mW	
Bluetooth	2.45	Head	48	5.5	3.55	Yes
		Body	96	5.5	3.55	Yes

Per KDB 447498 D01, when the minimum test separation distance is <5mm, a distance of 5mm is applied to determine SAR test exclusion.

14. SAR Measurement Results

Antenna 1

Front of Face										
Test Position	Frequency		Conducted Power (dBm)	Tune-up limit	Power Drift(dB)	Tune-up Scaling factor	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	SAR 50% duty (W/kg)	Test Plot
	CH	MHz								
Analog mode										
Front of Face	CH1	136.05	36.48	37.00	-0.11	1.13	1.00	1.13	0.565	-
	CH2	143.00	36.49	37.00	-0.13	1.12	1.02	1.15	0.575	1AF
	CH3	149.95	36.49	37.00	-0.09	1.12	0.966	1.09	0.545	-
Diatigal mode										
Front of Face	CH1	136.05	36.42	37.00	0.01	1.14	1.01	1.15	0.575	-
	CH2	143.00	36.43	37.00	0.07	1.14	1.04	1.19	0.595	1DF
	CH3	149.95	36.43	37.00	0.03	1.14	0.981	1.12	0.560	-

Body-worn										
Test Position	Frequency		Conducted Power (dBm)	Tune-up limit	Power Drift(dB)	Tune-up Scaling factor	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	SAR 50% duty (W/kg)	Test Plot
	CH	MHz								
Analog mode										
Rear	CH1	136.05	36.48	37.00	-0.07	1.13	1.94	2.19	1.10	-
	CH2	143.00	36.49	37.00	-0.12	1.12	2.01	2.25	1.13	1AB
	CH3	149.95	36.49	37.00	-0.10	1.12	1.92	2.15	1.08	-
Diatigal mode										
Rear	CH1	136.05	36.42	37.00	-0.02	1.14	2.07	2.36	1.18	-
	CH2	143.00	36.43	37.00	-0.15	1.14	2.12	2.42	1.21	1DB
	CH3	149.95	36.43	37.00	-0.12	1.14	2.02	2.30	1.15	-

Note:

1. The value with blue color is the maximum SAR Value of each test band.
2. Batteries are fully charged at the beginning of the SAR measurements
3. The Body-worn SAR evaluation was performed with the Leather Case body-worn accessory attached to the DUT and touching the outer surface of the planar phantom
4. When the SAR for all antennas tested using the default battery is ≤ 3.5 W/kg (50% PTT duty factor), testing of all other required channels is not necessary.
5. When the SAR of an antenna tested on the highest output power using the default battery is > 3.5 W/Kg and ≤ 4.0 W/Kg (50% PTT duty factor), testing of the immediately adjacent channel(s) is not necessary, but testing of other required channels may still be required.
6. When the SAR for all antennas tested using the default battery ≤ 4.0 W/kg(50% PTT duty factor), test additional batteries using the antenna and channel configuration that resulted in the highest SAR.

Antenna2

Front of Face										
Test Position	Frequency		Conducted Power (dBm)	Tune-up limit	Power Drift(dB)	Tune-up Scaling factor	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	SAR 50% duty (W/kg)	Test Plot
	CH	MHz								
Analog mode										
Front of Face	CH4	146.05	36.50	37.00	-0.02	1.12	0.968	1.09	0.545	-
	CH5	153.05	36.53	37.00	-	-	-	-	-	-
	CH6	160.05	36.61	37.00	-0.03	1.09	1.01	1.10	0.550	2AF
	CH7	167.05	36.63	37.00	-	-	-	-	-	-
	CH8	173.95	36.68	37.00	-0.01	1.08	0.933	1.00	0.500	-
Diatigal mode										
Front of Face	CH4	146.05	36.45	37.00	-0.03	1.14	0.971	1.10	0.550	-
	CH5	153.05	36.55	37.00	-	-	-	-	-	-
	CH6	160.05	36.63	37.00	-0.18	1.09	1.02	1.11	0.555	2DF
	CH7	167.05	36.51	37.00	-	-	-	-	-	-
	CH8	173.95	36.40	37.00	-0.10	1.15	0.959	1.10	0.550	-
Body-worn										
Test Position	Frequency		Conducted Power (dBm)	Tune-up limit	Power Drift(dB)	Tune-up Scaling factor	Measured SAR(1g) (W/kg)	Report SAR(1g) (W/kg)	SAR 50% duty (W/kg)	Test Plot
	CH	MHz								
Analog mode										
Rear	CH4	146.05	36.50	37.00	0.01	1.12	1.61	1.80	0.900	-
	CH5	153.05	36.53	37.00	-	-	-	-	-	-
	CH6	160.05	36.61	37.00	0.07	1.09	1.73	1.89	0.945	2AB
	CH7	167.05	36.63	37.00	-	-	-	-	-	-
	CH8	173.95	36.68	37.00	0.06	1.08	1.54	1.66	0.830	-
Diatigal mode										
Rear	CH4	146.05	36.45	37.00	-0.06	1.14	1.69	1.93	0.965	-
	CH5	153.05	36.55	37.00	-	-	-	-	-	-
	CH6	160.05	36.63	37.00	-0.10	1.09	1.80	1.96	0.980	2DB
	CH7	167.05	36.51	37.00	-	-	-	-	-	-
	CH8	173.95	36.40	37.00	-0.04	1.15	1.64	1.89	0.945	-

Note:

1. The value with blue color is the maximum SAR Value of each test band.
2. Batteries are fully charged at the beginning of the SAR measurements
3. The Body-worn SAR evaluation was performed with the Leather Case body-worn accessory attached to the DUT and touching the outer surface of the planar phantom
4. When the SAR for all antennas tested using the default battery is ≤ 3.5 W/kg (50% PTT duty factor), testing of all other required channels is not necessary.
5. When the SAR of an antenna tested on the highest output power using the default battery is > 3.5 W/Kg and ≤ 4.0 W/Kg (50% PTT duty factor), testing of the immediately adjacent channel(s) is not necessary, but testing of other required channels may still be required.
6. When the SAR for all antennas tested using the default battery ≤ 4.0 W/kg(50% PTT duty factor), test additional batteries using the antenna and channel configuration that resulted in the highest SAR.

SAR Test Data Plots

Test Plot:	1AF	Test Position:	Front of Face
------------	-----	----------------	---------------

Date:2017-05-31

Communication System: Customer System; Frequency: 152.05MHz;
Medium parameters used (interpolated): $f = 152.05$ MHz; $\sigma = 0.77$ S/m; $\epsilon_r = 53.43$; $\rho = 1000$ kg/m³
Phantom section : Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842;ConvF(11.84,11.84,11.84); Calibrated: 23/02/2017;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 26/07/2016
- Phantom: ELI v4.0; Type: QDOVA001BB
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan(51x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.06 W/kg


Zoom Scan (5x5x6)/Cube 0: Measurement grid: $dx=7$ mm, $dy=7$ mm, $dz=5$ mm

Reference Value = 22.197 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.518 mW/g

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.716 mW/g

Maximum value of SAR (measured) = 1.12 W/kg

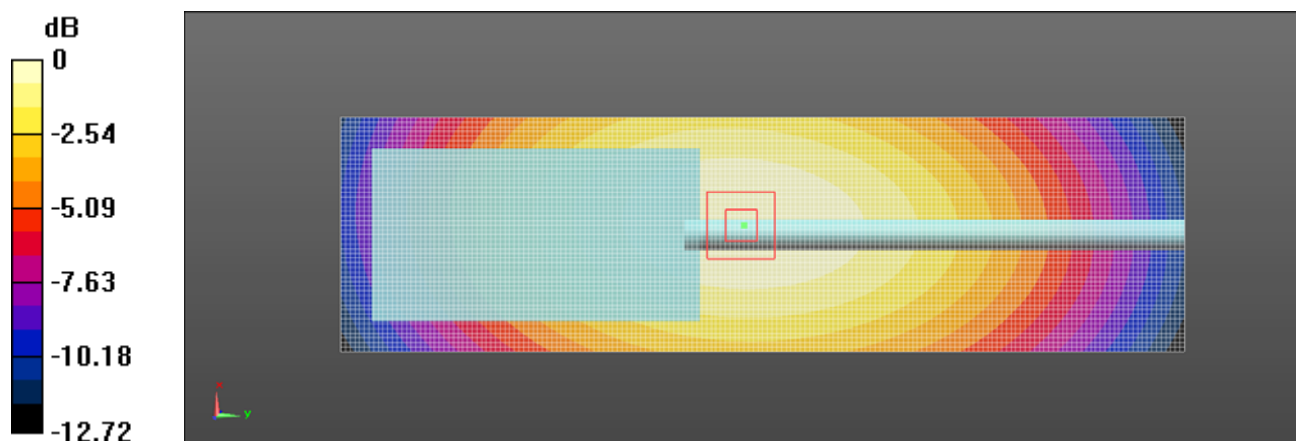

Test Plot:	1DF	Test Position:	Front of Face
------------	-----	----------------	---------------

Date: 2017-05-31

Communication System: Customer System; Frequency: 152.05 MHz;

Medium parameters used (interpolated): $f = 152.05$ MHz; $\sigma = 0.77$ S/m; $\epsilon_r = 53.43$; $\rho = 1000$ kg/m³

Phantom section : Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(11.84, 11.84, 11.84); Calibrated: 23/02/2017;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 26/07/2016
- Phantom: ELI v4.0; Type: QDOVA001BB
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan(51x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.09 W/kg


Zoom Scan (5x5x6)/Cube 0: Measurement grid: $dx=7$ mm, $dy=7$ mm, $dz=5$ mm

Reference Value = 22.237 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 1.538 mW/g

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.738 mW/g

Maximum value of SAR (measured) = 1.11 W/kg

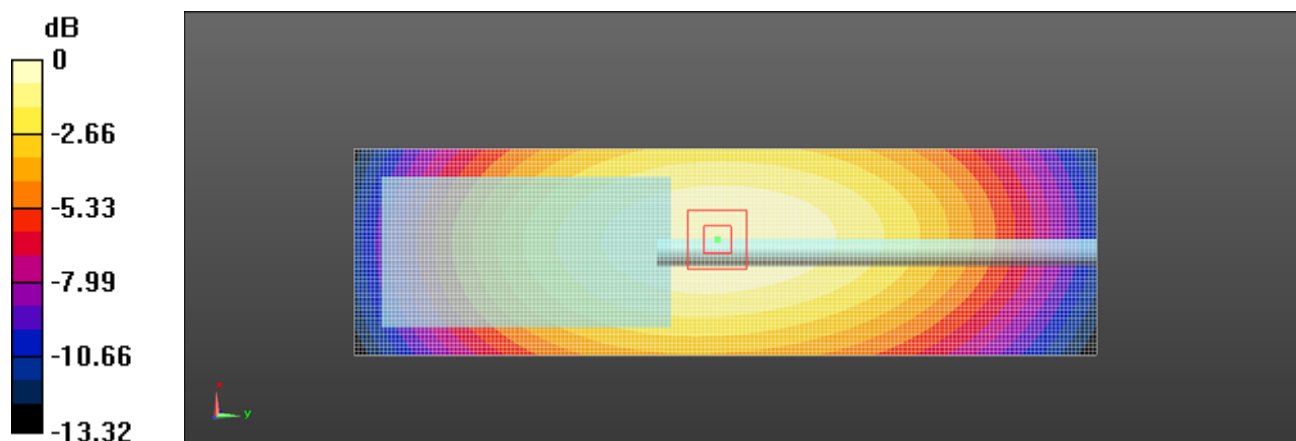

Test Plot:	1AB	Test Position:	Body-worn
------------	-----	----------------	-----------

Date:2017-06-01

Communication System: Customer System; Frequency: 152.05 MHz;

Medium parameters used (interpolated): $f = 152.05$ MHz; $\sigma = 0.79$ S/m; $\epsilon_r = 60.08$; $\rho = 1000$ kg/m³

Phantom section : Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842;ConvF(10.86,10.86,10.86); Calibrated: 23/02/2017;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 26/07/2016
- Phantom: ELI v4.0; Type: QDOVA001BB
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan(51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.23 W/kg


Zoom Scan (5x5x6)/Cube 0: Measurement grid: dx=7mm, dy=7mm, dz=5mm

Reference Value = 27.569 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.997 mW/g

SAR(1 g) = 2.01 mW/g; SAR(10 g) = 1.15 mW/g

Maximum value of SAR (measured) = 2.19 W/kg

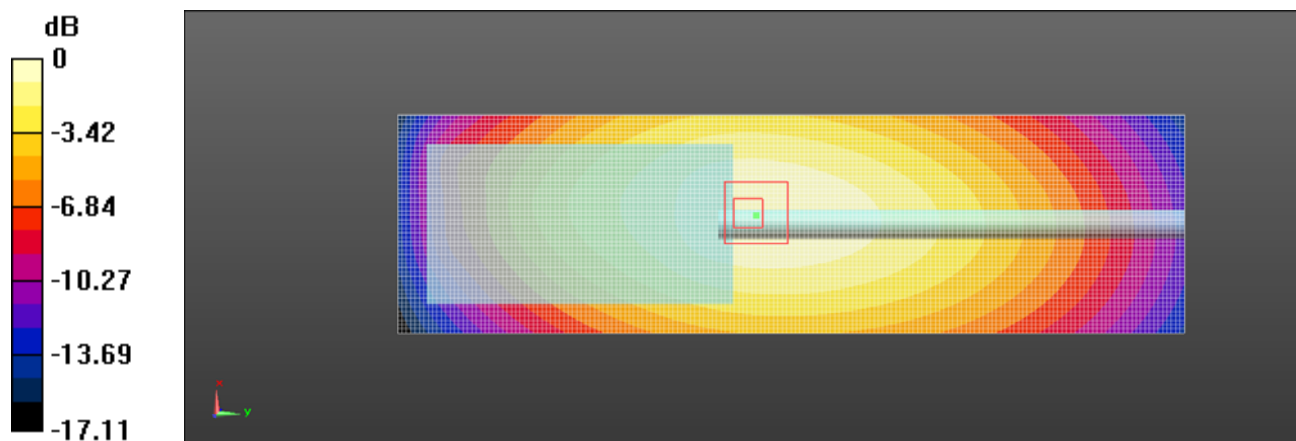

Test Plot:	1DB	Test Position:	Body-worn
------------	-----	----------------	-----------

Date:2017-06-01

Communication System: Customer System; Frequency: 152.05 MHz;

Medium parameters used (interpolated): $f = 152.05$ MHz; $\sigma = 0.79$ S/m; $\epsilon_r = 60.08$; $\rho = 1000$ kg/m³

Phantom section : Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842;ConvF(10.86,10.86,10.86); Calibrated: 23/02/2017;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 26/07/2016
- Phantom: ELI v4.0; Type: QDOVA001BB
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan(51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) =2.49 W/kg


Zoom Scan (5x5x6)/Cube 0: Measurement grid: dx=7mm, dy=7mm, dz=5mm

Reference Value = 29.817 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 4.611 mW/g

SAR(1 g) = 2.12 mW/g; SAR(10 g) = 1.19 mW/g

Maximum value of SAR (measured) = 2.46 W/kg

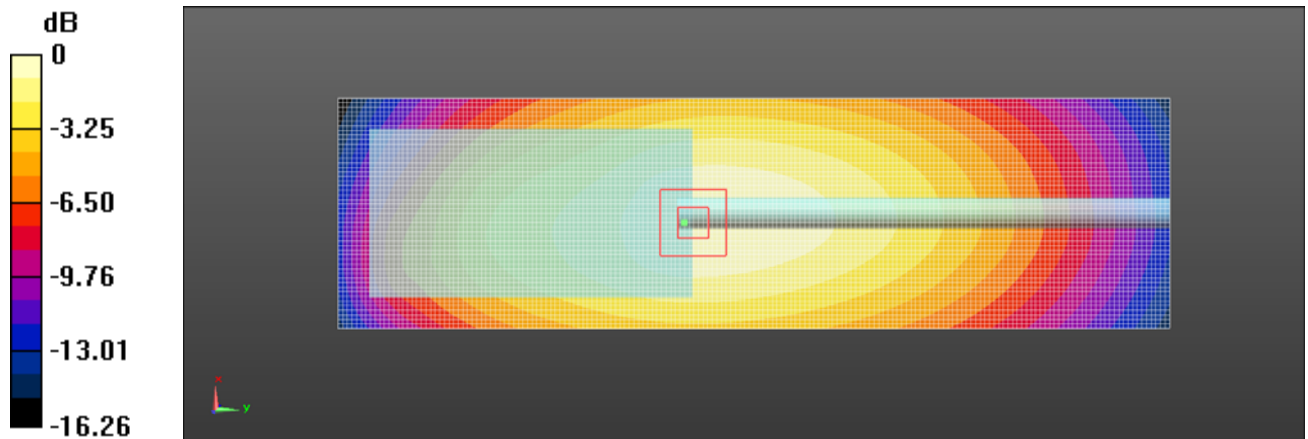

Test Plot:	2AF	Test Position:	Front of Face
------------	-----	----------------	---------------

Date:2017-05-31

Communication System: Customer System; Frequency: 152.05 MHz;
Medium parameters used (interpolated): $f = 152.05$ MHz; $\sigma = 0.77$ S/m; $\epsilon_r = 53.43$; $\rho = 1000$ kg/m³
Phantom section : Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842;ConvF(11.84,11.84,11.84); Calibrated: 23/02/2017;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 26/07/2016
- Phantom: ELI v4.0; Type: QDOVA001BB
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan(51x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) =1.13 W/kg


Zoom Scan (5x5x6)/Cube 0: Measurement grid: $dx=7$ mm, $dy=7$ mm, $dz=5$ mm

Reference Value = 22.786 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.676 mW/g

SAR(1 g) = 1.01 mW/g; SAR(10 g) = 0.707 mW/g

Maximum value of SAR (measured) =1.19 W/kg

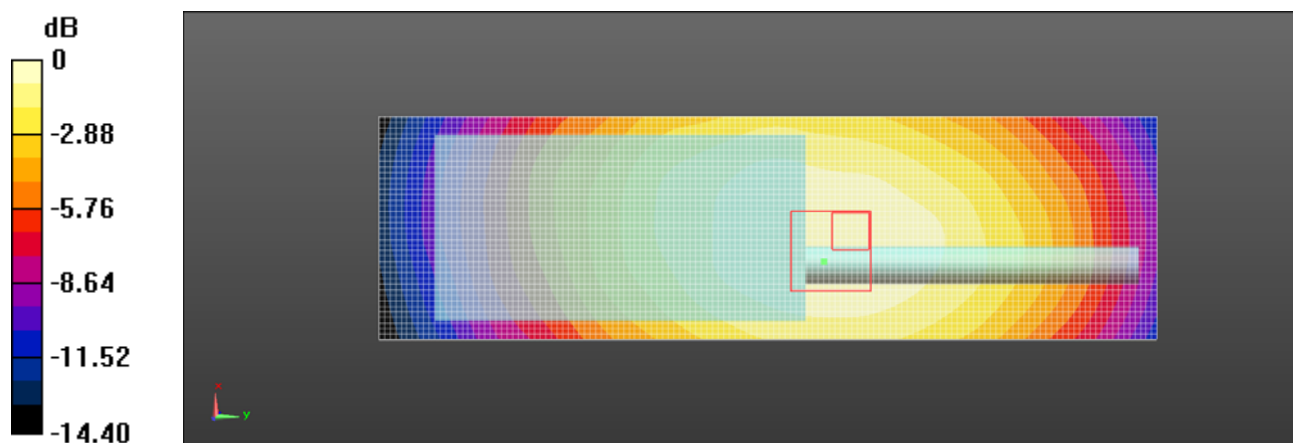

Test Plot:	2DF	Test Position:	Front of Face
------------	-----	----------------	---------------

Date: 2017-05-31

Communication System: Customer System; Frequency: 152.05 MHz;

Medium parameters used (interpolated): $f = 152.05$ MHz; $\sigma = 0.77$ S/m; $\epsilon_r = 53.43$; $\rho = 1000$ kg/m³

Phantom section : Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(11.84, 11.84, 11.84); Calibrated: 23/02/2017;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 26/07/2016
- Phantom: ELI v4.0; Type: QDOVA001BB
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan(51x131x1): Interpolated grid: $dx = 1.500$ mm, $dy = 1.500$ mm

Maximum value of SAR (interpolated) = 1.19 W/kg


Zoom Scan (5x5x6)/Cube 0: Measurement grid: $dx = 7$ mm, $dy = 7$ mm, $dz = 5$ mm

Reference Value = 24.451 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.558 mW/g

SAR(1 g) = 1.02 mW/g; SAR(10 g) = 0.713 mW/g

Maximum value of SAR (measured) = 1.16 W/kg

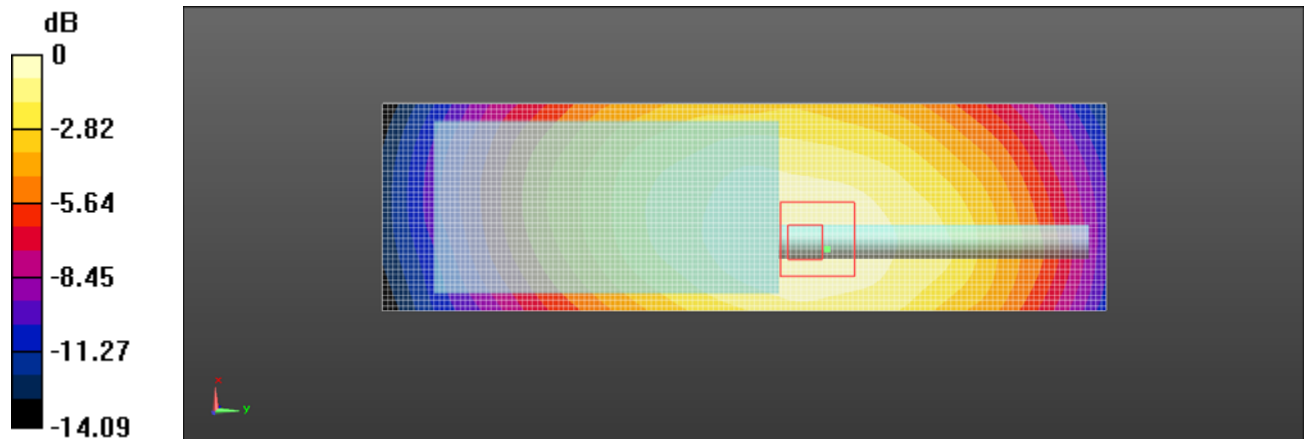

Test Plot:	2AB	Test Position:	Body-worn
------------	-----	----------------	-----------

Date:2017-06-01

Communication System: Customer System; Frequency: 152.05 MHz;

Medium parameters used (interpolated): $f = 152.05$ MHz; $\sigma = 0.79$ S/m; $\epsilon_r = 60.08$; $\rho = 1000$ kg/m³

Phantom section : Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842;ConvF(10.86,10.86,10.86); Calibrated: 23/02/2017;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 26/07/2016
- Phantom: ELI v4.0; Type: QDOVA001BB
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan(51x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) =1.93 W/kg


Zoom Scan (5x5x6)/Cube 0: Measurement grid: dx=7mm, dy=7mm, dz=5mm

Reference Value = 28.976 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 3.461 mW/g

SAR(1 g) = 1.73 mW/g; SAR(10 g) = 0.998 mW/g

Maximum value of SAR (measured) = 1.91 W/kg

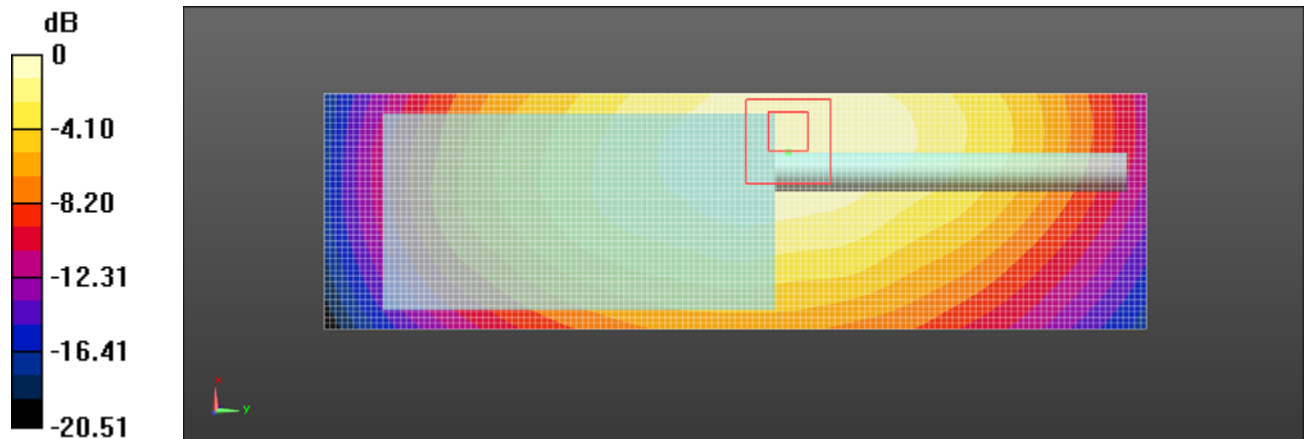

Test Plot:	2DB	Test Position:	Body-worn
------------	-----	----------------	-----------

Date: 2017-06-01

Communication System: Customer System; Frequency: 152.05 MHz;

Medium parameters used (interpolated): $f = 152.05$ MHz; $\sigma = 0.79$ S/m; $\epsilon_r = 60.08$; $\rho = 1000$ kg/m³

Phantom section : Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3842; ConvF(10.86,10.86,10.86); Calibrated: 23/02/2017;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1315; Calibrated: 26/07/2016
- Phantom: ELI v4.0; Type: QDOVA001BB
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Area Scan(51x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.98 W/kg


Zoom Scan (5x5x6)/Cube 0: Measurement grid: $dx=7$ mm, $dy=7$ mm, $dz=5$ mm

Reference Value = 30.576 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 3.486 mW/g

SAR(1 g) = 1.80 mW/g; SAR(10 g) = 1.05 mW/g

Maximum value of SAR (measured) = 1.91 W/kg

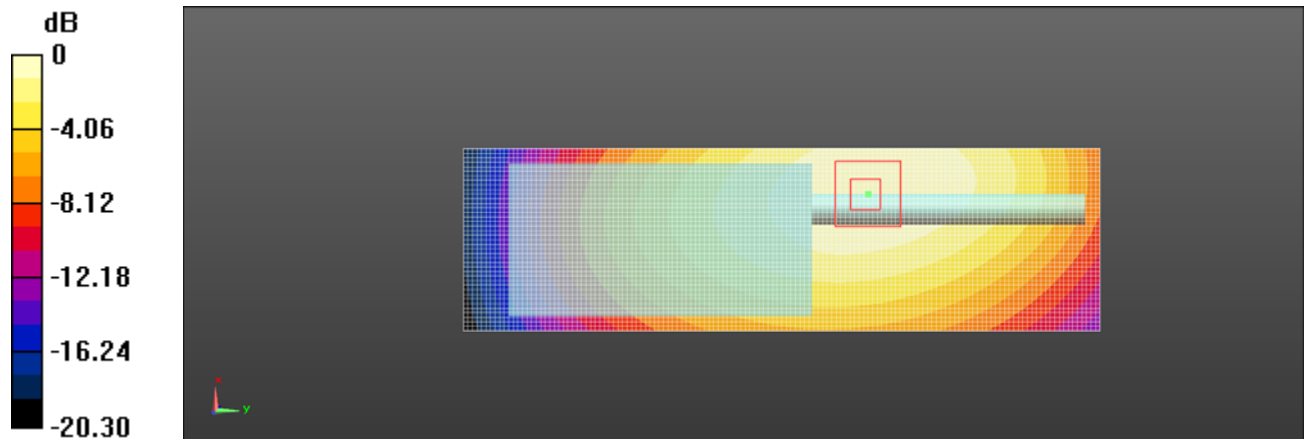


15. TestSetup Photos

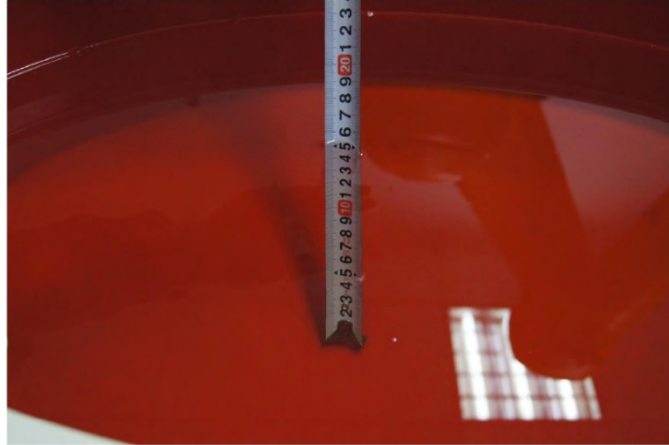


Liquid depth in the flat Phantom (150MHz) (15.3cm deep)

Antenna 1

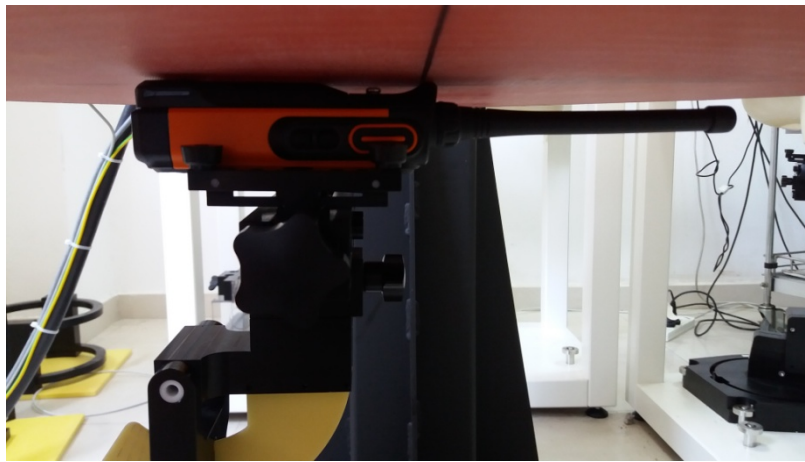

Body (0mm)

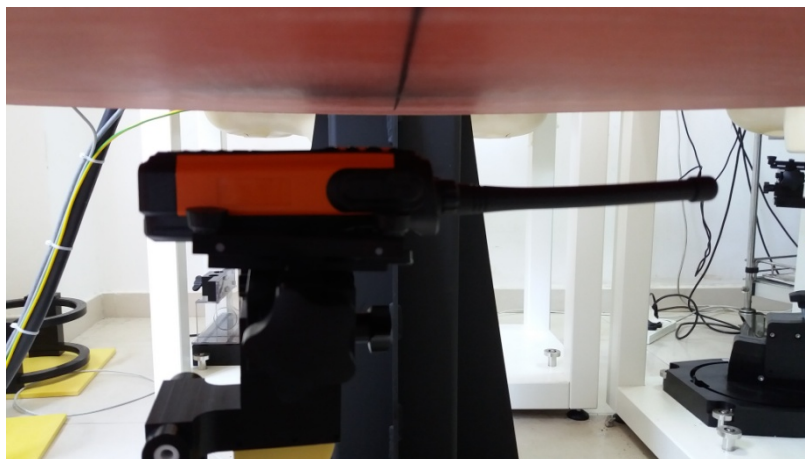


Face (25mm)

Antenna 2



Body (0mm)

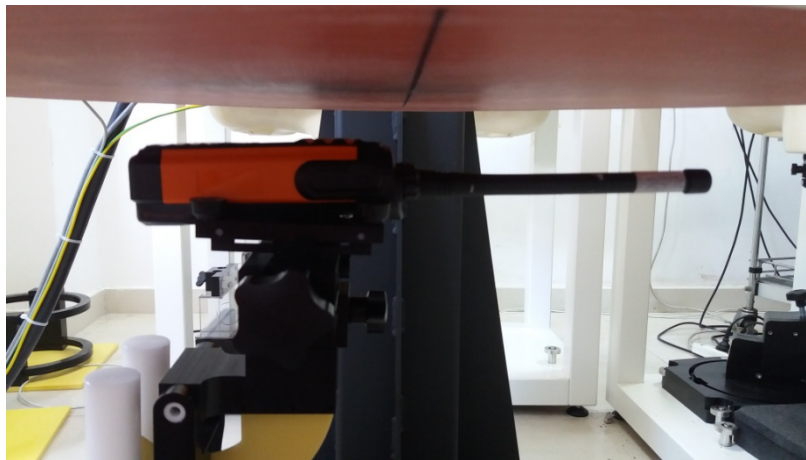

Face (25mm)

16. Photos of the EUT

Please refer to the test report No.: TRE1705008301

-----End of Report-----