

RF Test Report

Applicant : D-Link Corporation
Product Type : Wireless AC1200 4G LTE Router
Trade Name : D-Link
Model Number : DWR-961
Test Specification : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013
Receive Date : Aug. 18, 2017
Test Period : Sep. 06 ~ Sep. 18, 2017
Issue Date : Oct. 03, 2017

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +86-3-2710188 / Fax : +86-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Test Firm MRA designation number: TW0010

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Revised By
00	Oct. 03, 2017	Initial Issue	Nina Lin

Verification of Compliance

Issued Date: Oct. 03, 2017

Applicant : D-Link Corporation
Product Type : Wireless AC1200 4G LTE Router
Trade Name : D-Link
Model Number : DWR-961
FCC ID : KA2WR961C1
EUT Rated Voltage : DC 12.0V, 1.5A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C)
Tel : +86-3-2710188 / Fax : +86-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu Reviewed By : Eric Ou Yang
(Manager) (Fly Lu) (Testing Engineer) (Eric Ou Yang)

TABLE OF CONTENTS

1	General Information.....	5
1.1.	Summary of Test Result	5
1.2.	Measurement Uncertainty	5
2	EUT Description.....	6
3	Test Methodology	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software	13
3.3.	Configuration of Test System Details	14
3.4.	Test Instruments.....	15
3.5.	Test Site Environment	16
4	Test Results	17
4.1.	AC Power Conducted Emission Measurement	17
4.2.	Test Procedure	18
4.3.	Transmitter Radiated Emissions Measurement.....	21
4.4.	Maximum Conducted Output Power	119
4.5.	26dB RF Bandwidth & 99 % Occupied Bandwidth Measurement	123
4.6.	6dB RF Bandwidth Measurement	131
4.7.	Maximum Power Spectral Density Measurement.....	139
4.8.	Frequency Stability Measurement.....	162
4.9.	Antenna Requirement	164

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
FCC			
15.407(b)(6) 15.207	AC Power Conducted Emission	PASS	---
15.407(b) 15.205 / 15.209	Transmitter Radiated Emissions	PASS	---
15.407(a)	Maximum Conducted Output Power	PASS	---
15.407(a)	26dB RF Bandwidth	Reference	---
15.407(e)	6dB RF Bandwidth	PASS	----
15.407(a)	Maximum Power Spectral Density	PASS	---
15.407(g)	Frequency Stability	PASS	---
15.407(a) 15.203	Antenna Requirement	PASS	---

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	9kHz ~ 150KHz	2.7
	150kHz ~ 30MHz	2.7
Radiated Emission	9kHz ~ 30MHz	1.7
	30MHz ~ 1000MHz	5.7
	1000MHz ~ 18000MHz	5.5
	18000MHz ~ 26500MHz	4.8
	26500MHz ~ 40000MHz	4.8
Conducted Output Power		+0.27 dB / -0.28 dB
RF Bandwidth		4.96%
Power Spectral Density		+0.71 dB / -0.77 dB
Frequency Stability		+ 2.212 x 10 ⁻⁷ % / - 2.170 x 10 ⁻⁷
Duty Cycle		1.06%
Time Occupancy		1.40%



2 EUT Description

Applicant	D-Link Corporation 17595 Mt. Herrmann, Fountain Valley, California, 92708, United States			
Manufacturer	CAMEO COMMUNICATIONS,INC. 5F, No.158, Ruihu St., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)			
Product Type	Wireless AC1200 4G LTE Router			
Trade Name	D-Link			
Model No.	DWR-961			
FCC ID	KA2WR961C1			
IMEI No.	359073060110107			
Operate Frequency	Frequency Band		Frequency Range (MHz)	Number of Channels
	IEEE 802.11a	U-NII Band I	5180 – 5240	4
		U-NII Band III	5745 – 5825	5
	IEEE 802.11n 5GHz 20 MHz / IEEE 802.11ac 20 MHz	U-NII Band I	5180 – 5240	4
		U-NII Band III	5745 – 5825	5
	IEEE 802.11n 5GHz 40 MHz / IEEE 802.11ac 40 MHz	U-NII Band I	5190 – 5230	2
		U-NII Band III	5755 – 5795	2
	IEEE 802.11ac 80 MHz	U-NII Band I	5210	1
U-NII Band III		5775	1	
Modulation Type	OFDM			
Equipment Type	Master			
Antenna information	Main	Type		Max. Gain (dBi)
	ANT-0	Internal Antenna		3.01
	ANT-1	Internal Antenna		3.07
	G _{ANT}			3.04
Antenna Delivery	Reference section 3.1			
Frequency stability specification	± 20 ppm			
Operate Temp. Range	0 ~ 40 ℃			



Frequency Band		RF Output Power (W)
IEEE 802.11a	U-NII Band I	0.268
	U-NII Band III	0.250
IEEE 802.11ac 20 MHz	U-NII Band I	0.257
	U-NII Band III	0.247
IEEE 802.11ac 40 MHz	U-NII Band I	0.190
	U-NII Band III	0.219
IEEE 802.11ac 80 MHz	U-NII Band I	0.026
	U-NII Band III	0.179

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11a Continuous TX mode
Mode 3: IEEE 802.11ac 20MHz Continuous TX mode
Mode 4: IEEE 802.11ac 40MHz Continuous TX mode
Mode 5: IEEE 802.11ac 80MHz Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Equipment Type	
Outdoor access point	---
Indoor access point	V
Fixed point-to-point access points	---
Client devices	---
Mobile access point	---

Test Mode	ANT-0	ANT-1	ANT-0+1
Mode 2	V	V	V
Mode 3	V	V	V
Mode 4	V	V	V
Mode 5	V	V	V

Test Mode	Antenna Delivery	Data Rate	Band	Test Channel
Mode 2	2TX (CDD)	6M	U-NII Band I	36, 40, 48
			U-NII Band III	149, 157, 165
Mode 3	2TX (CDD)	6.5M	U-NII Band I	36, 40, 48
			U-NII Band III	149, 157, 165
Mode 4	2TX (CDD)	13.5M	U-NII Band I	38, 46
			U-NII Band III	151,159
Mode 5	2TX (CDD)	29.3M	U-NII Band I	42
			U-NII Band III	155




Duty cycle

Test Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
Mode 2	5180.0	1.000	1.000	1.000	0.000	0.010
Mode 3	5180.0	1.000	1.000	1.000	0.000	0.010
Mode 4	5190.0	1.000	1.000	1.000	0.000	0.010
Mode 5	5210.0	1.000	1.000	1.000	0.000	0.010

Duty Cycle Graphs


Mode 2: IEEE 802.11a Continuous TX mode	
On time	Agilent Spectrum Analyzer - Screenshot 54 Ref Offset 11.6 dB Ref 20.00 dBm Mkr1 720.0 us 8.59 dBm Center 5.180000000 GHz Res BW 1.0 MHz VBW 1.0 MHz Sweep 20.00 ms (1001 pts) File <BB6.png> saved
On+off time	Agilent Spectrum Analyzer - Screenshot 54 Ref Offset 11.6 dB Ref 20.00 dBm Mkr1 17.24 ms 8.54 dBm Center 5.180000000 GHz Res BW 1.0 MHz VBW 1.0 MHz Sweep 20.00 ms (1001 pts) File <BB6.png> saved

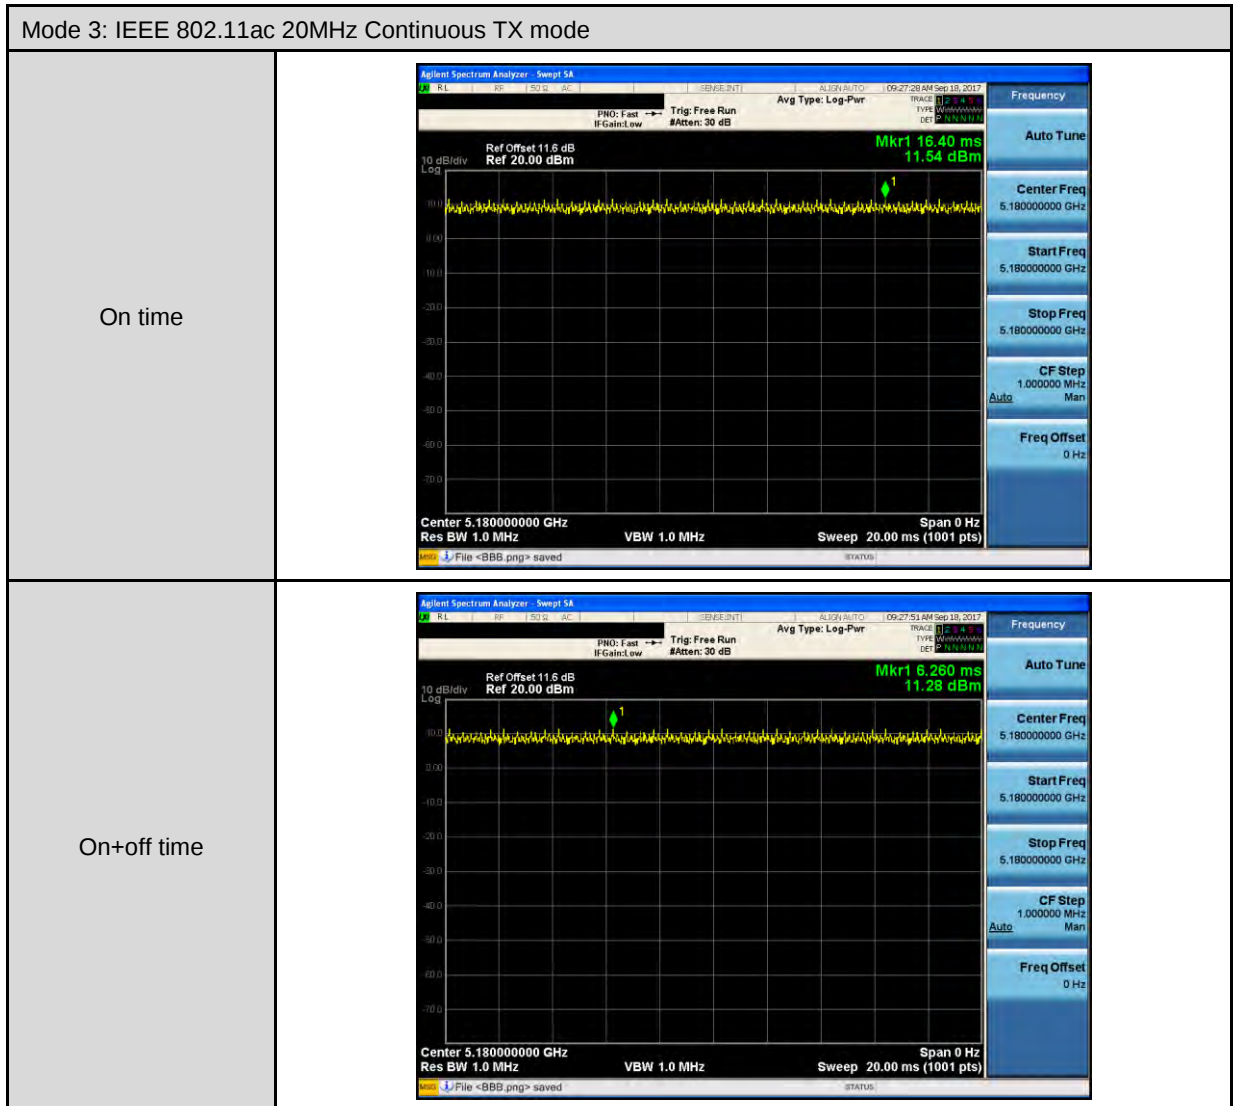




Mode 4: IEEE 802.11ac 40MHz Continuous TX mode



On time

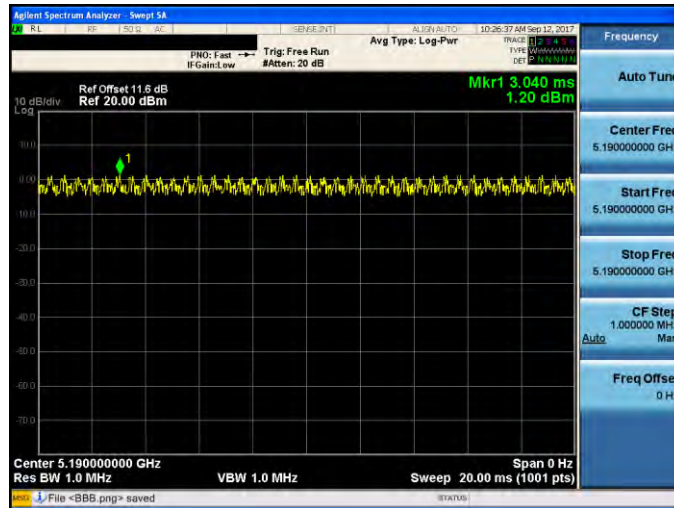

On+off time

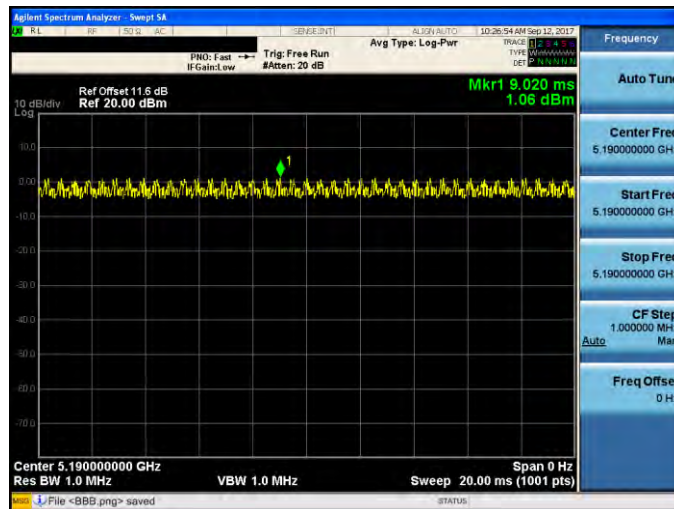

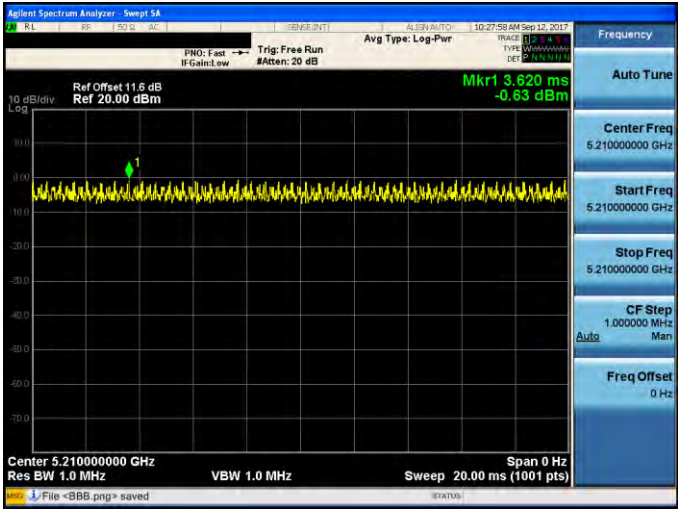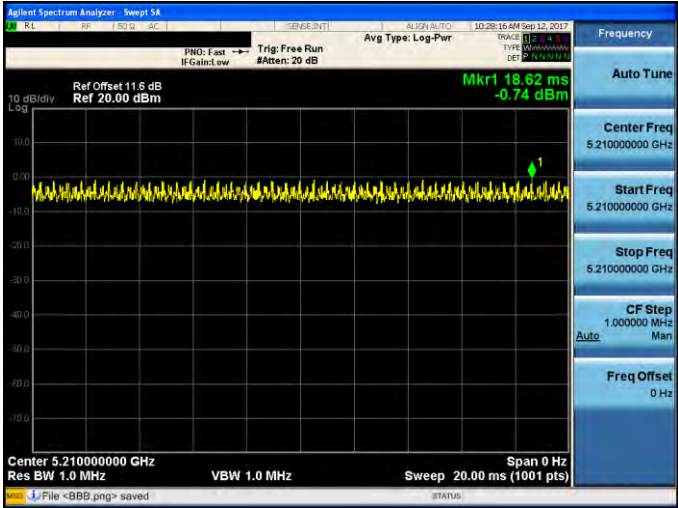

Mode 5: IEEE 802.11ac 80MHz Continuous TX mode	
On time	 The screenshot shows a spectrum analyzer interface with a yellow signal trace. A green marker is positioned at 3.620 ms with a reading of -0.63 dBm. The center frequency is 5.210000000 GHz, resolution bandwidth is 1.0 MHz, and sweep time is 20.00 ms. The right-hand panel displays frequency settings: Center Freq (5.210000000 GHz), Start Freq (5.210000000 GHz), Stop Freq (5.210000000 GHz), CF Step (1.000000 MHz), and Freq Offset (0 Hz).
On+off time	 The screenshot shows a similar spectrum analyzer interface. A green marker is positioned at 18.62 ms with a reading of -0.74 dBm. The center frequency is 5.210000000 GHz, resolution bandwidth is 1.0 MHz, and sweep time is 20.00 ms. The right-hand panel displays the same frequency settings as the previous screenshot.



3.2. EUT Exercise Software

The EUT is operated in the engineering mode to fix the TX frequency for the purposes of measurement.


According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

1.	Setup the EUT shown on “Configuration of Test System Details”
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.


Measurement Software	
1	EZ-EMC Ver. ATL-03A1-1
2	EZ-EMC Ver ATL-ITC-3A1-1

3.3. Configuration of Test System Details

Conducted Emission

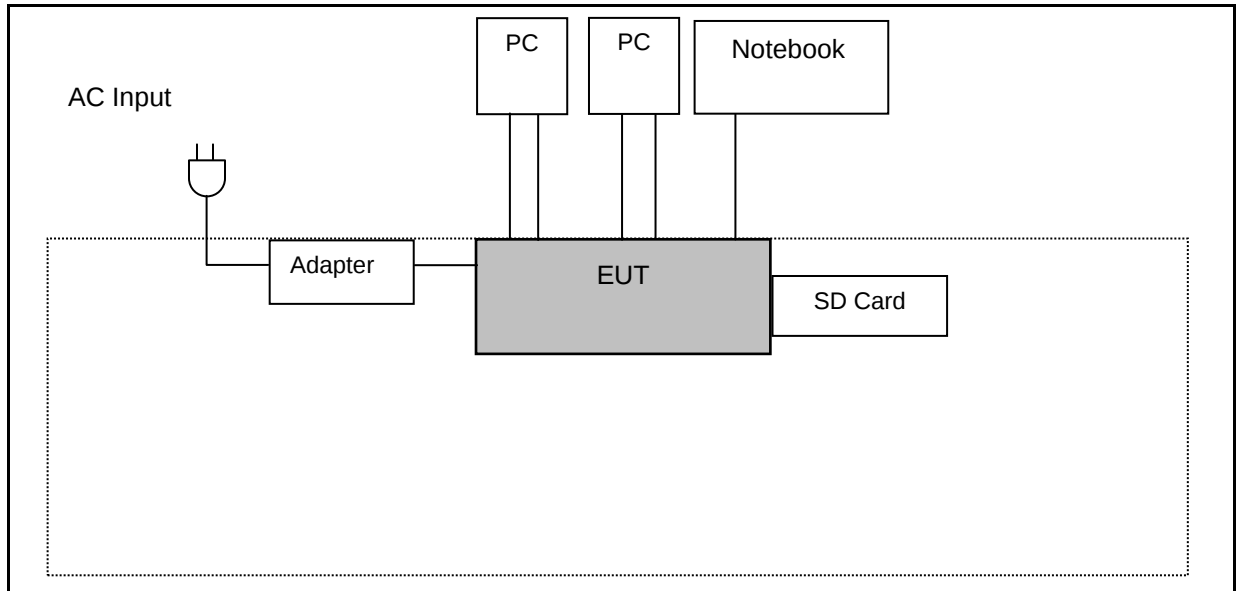

Radiated Emission

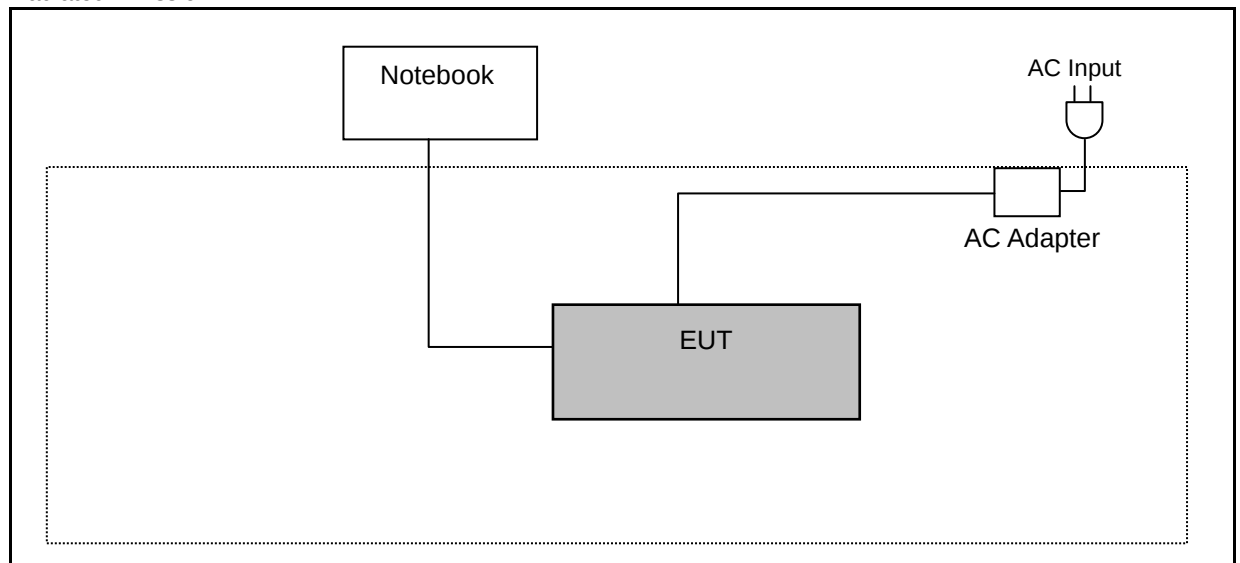



3.4. Test Instruments

For Conducted Emission

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/18/2017	1 year
LISN	R&S	ENV216	101040	04/01/2017	1 year
LISN	R&S	ENV216	101041	03/15/2017	1 year
RF Cable	Woken	00100D1380194M	TE-02-02	05/19/2017	1 year
Test Site	ATL	TE02	TE02	N.C.R.	-----

For Radiated Emissions

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector (9KHz~1GHz)	Agilent	N9039A	MY46520256	04/24/2017	1 year
Spectrum Analyzer (3Hz~44GHz)	Agilent	E4446A	MY46180578	04/24/2017	1 year
Pre Amplifier (1~26.5GHz)	Agilent	8449B	3008A02237	10/11/2016	1 year
Pre Amplifier (100KHz~1.3GHz)	Agilent	8447D	2944A11119	01/12/2017	1 year
Pre Amplifier (26.5~40GHz)	EMCI	EMC2654045	980028	08/29/2017	1 year
Pre Amplifier (1~26.5GHz)	EMCI	EMC012645SE	980289	01/16/2017	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/13/2016	1 year
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/22/2017	1 year
Horn Antenna (18~40GHz)	ETS	3116	86467	09/11/2017	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	01/26/2017	1 year
Microwave Cable	EMCI	EMC102-KM-KM-1 4000	151001	02/20/2017	1 year
Microwave Cable	EMCI	EMC-104-SM-SM- 14000	140202	02/20/2017	1 year
Microwave Cable	EMCI	EMC104-SM-SM-6 00	140301	02/20/2017	1 year
Test Site	ATL	TE01	888001	08/29/2017	1 year

Note: N.C.R. = No Calibration Request.



For Conducted

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Power Sensor	Agilent	N1921A	MY45241957	12/05/2016	1 year
Power Meter	Agilent	N1911A	MY45101619	12/05/2016	1 year
Spectrum Analyzer (20Hz~26.5GHz)	Agilent	N9020A	US47520902	09/21/2016	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 500	140303	02/22/2017	1 year
Temperature & Humidity Chamber	TAICHY	MHU-225LA	980729	04/17/2017	1 year
Test Site	ATL	TE05	TE05	N.C.R.	-----

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950


4 Test Results

4.1. AC Power Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

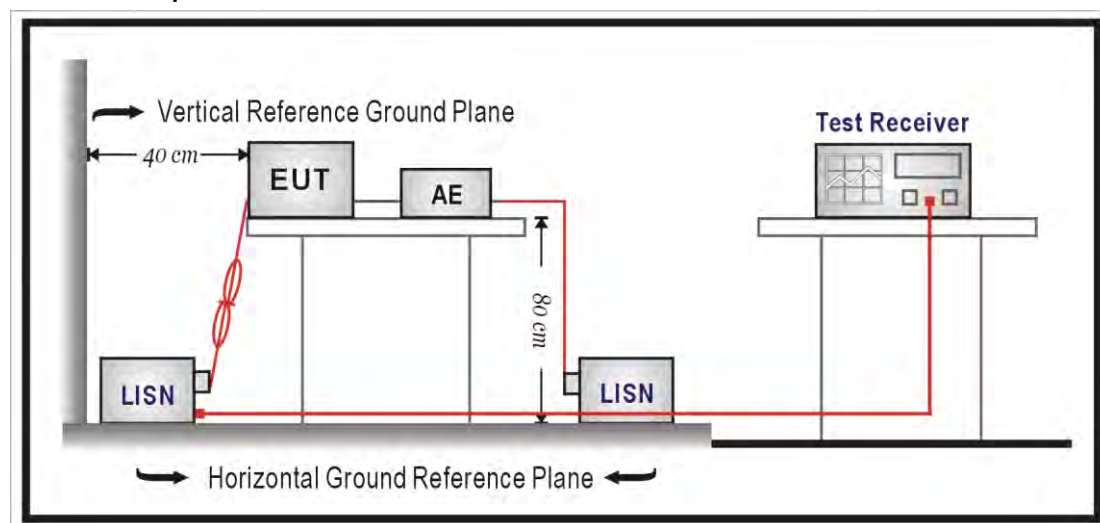

4.2. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\Omega // 50\mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\Omega // 50\mu\text{H}$ coupling impedance with 50ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12mm insulating material.


Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150kHz to 30MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0,8 m from the AMN. If the mains power cable is longer than 1m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4m. All of interconnecting cables that hang closer than 40cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

Test Result

Standard:	FCC Part 15.407	Line:	L1
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
		Date:	09/06/2017
Description:			

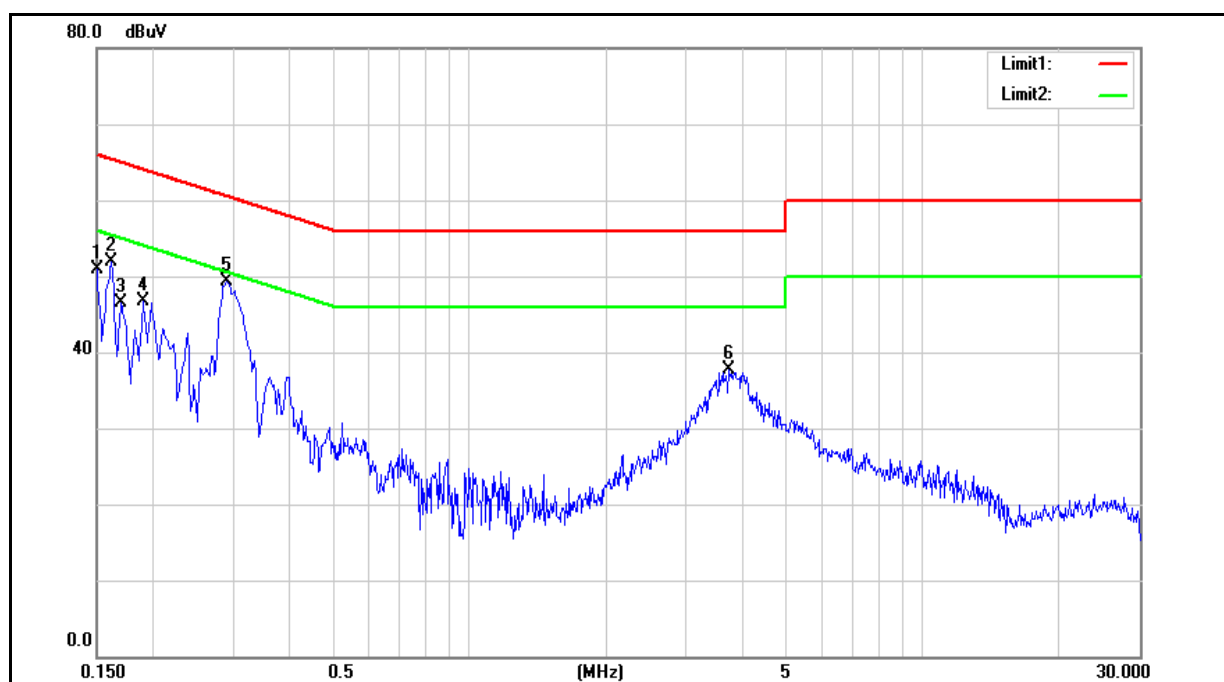


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1500	38.68	24.83	9.53	48.21	34.36	66.00	56.00	-17.79	-21.64	Pass
2	0.1620	33.74	19.22	9.54	43.28	28.76	65.36	55.36	-22.08	-26.60	Pass
3	0.1712	35.45	21.27	9.54	44.99	30.81	64.90	54.90	-19.91	-24.09	Pass
4	0.1900	32.74	20.25	9.53	42.27	29.78	64.04	54.04	-21.77	-24.26	Pass
5	0.2900	37.64	31.23	9.53	47.17	40.76	60.52	50.52	-13.35	-9.76	Pass
6	3.7300	24.08	17.23	9.66	33.74	26.89	56.00	46.00	-22.26	-19.11	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.

Standard:	FCC Part 15.407	Line:	N
Test item:	Conducted Emission	Power:	AC 120V/60Hz
Test Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
		Date:	09/06/2017
Description:			

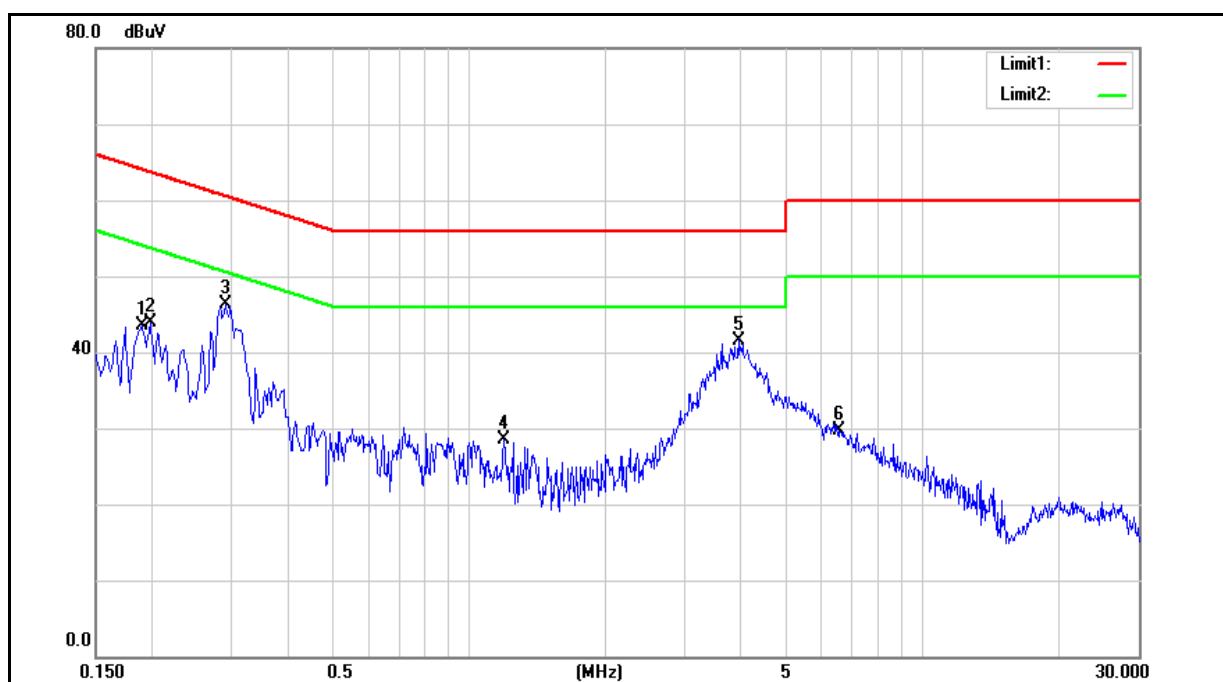

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1900	31.24	18.80	9.63	40.87	28.43	64.04	54.04	-23.17	-25.61	Pass
2	0.1980	31.32	19.92	9.63	40.95	29.55	63.69	53.69	-22.74	-24.14	Pass
3	0.2900	35.61	28.70	9.63	45.24	38.33	60.52	50.52	-15.28	-12.19	Pass
4	1.1940	13.76	7.96	9.68	23.44	17.64	56.00	46.00	-32.56	-28.36	Pass
5	3.9260	27.12	20.51	9.77	36.89	30.28	56.00	46.00	-19.11	-15.72	Pass
6	6.5580	16.81	12.01	9.84	26.65	21.85	60.00	50.00	-33.35	-28.15	Pass

Note: 1. Result = Correction factor + Reading

2. Correction factor = Antenna Factor + Cable loss – Pre-Amplifier gain.

4.3. Transmitter Radiated Emissions Measurement

■ Limit

(1)Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(a)For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(b)For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(c)For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(d)For transmitters operating in the 5.725-5.85 GHz band:

(i)All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(2)Limits of Radiated Emission Measurement

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequency Range (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	10	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3


Note: 1. The lower limit shall apply at the transition frequencies.

2. Emission level (dBuV/m) = 20 log Emission level (uV/m).


3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

■ Setup


9kHz ~ 30MHz

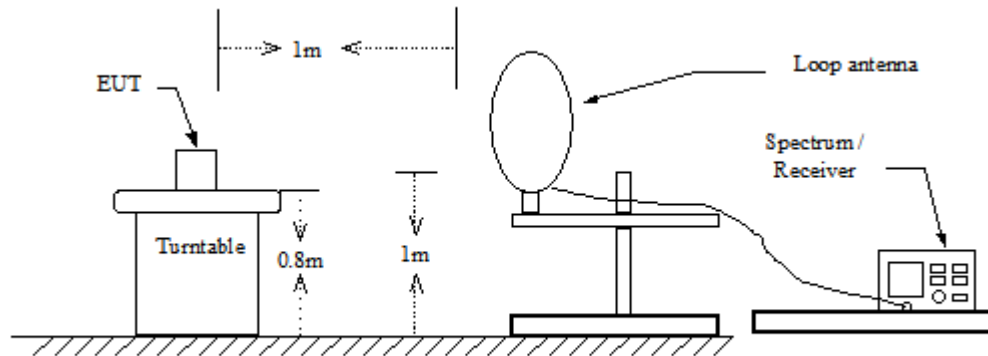

30MHz ~ 1GHz

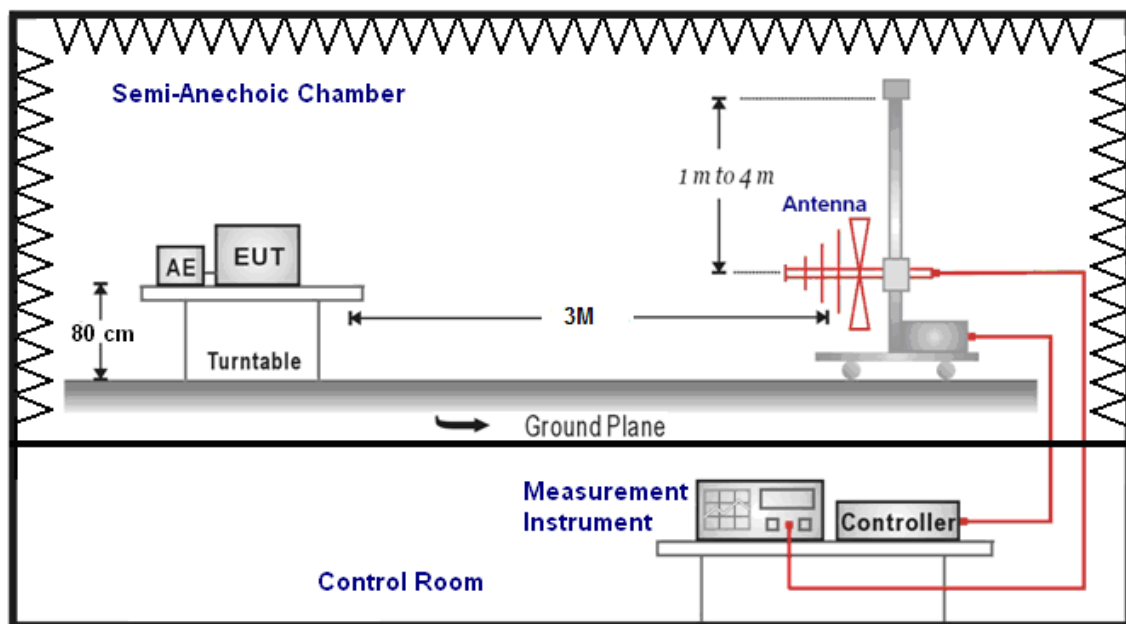

Above 1GHz

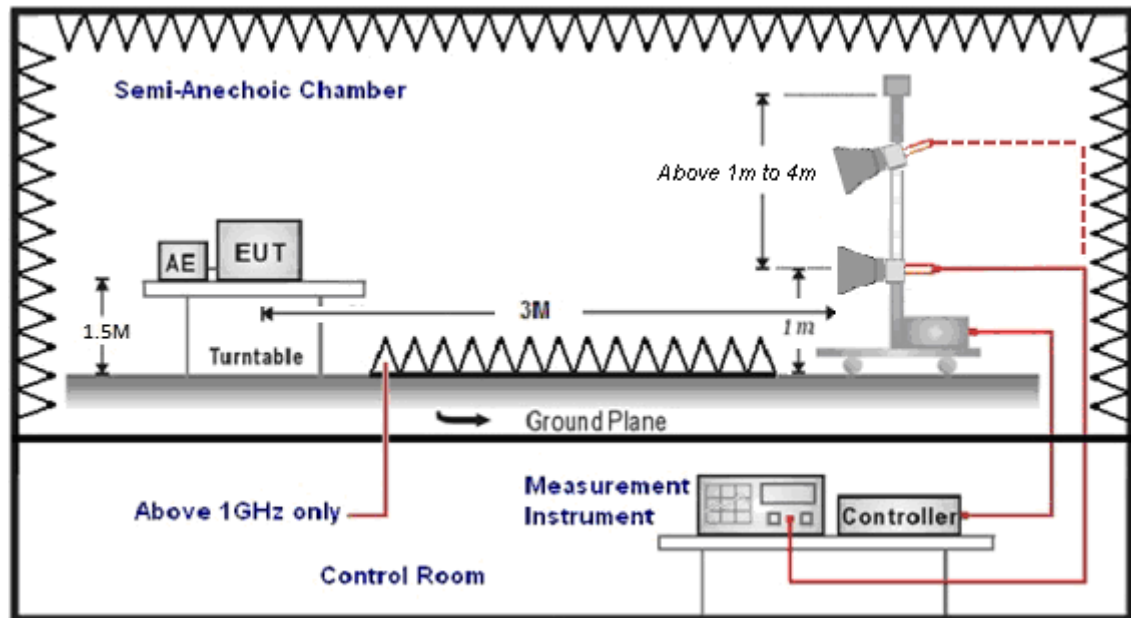

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height (below 1GHz use 0.8m turntable / above 1GHz use 1.5m turntable), top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 40 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For restricted measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle > 0.98 / 1/T for average measurements when Duty cycle < 0.98.

For out of band measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Trilog-Broadband Antenna at 3 Meter and the ETS-Lindgren Double-Ridged Waveguide Horn antenna Schwarzbeck Mess-Elektronik Broadband Horn Antenna was used in frequencies 1 – 40 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Measuring Instruments and setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000MHz
Stop Frequency	40GHz
RBW/VBW(Emission in restricted band)	1MHz / 3MHz for Peak 1MHz / (1/T) for Average
RBW/VBW(Emission in non-restricted band)	1MHz / 3MHz for Peak



■ Test Result

Below 1GHz

Standard:	FCC Part 15.407			Test Distance:	3m		
Test item:	Harmonic			Power:	AC 120V/60Hz		
Test Mode:	Mode 1			Temp.(°C)/Hum.(%RH):	26(°C)/60%RH		
Description:				Date:	09/16/2017		
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
200.7200	43.69	-6.69	37.00	43.50	-6.50	QP	H
250.1900	39.15	-4.58	34.57	46.00	-11.43	QP	H
400.5400	38.70	-0.78	37.92	46.00	-8.08	QP	H
490.7500	40.33	1.01	41.34	46.00	-4.66	QP	H
522.7600	38.61	1.68	40.29	46.00	-5.71	QP	H
600.3600	35.50	3.34	38.84	46.00	-7.16	QP	H
200.7200	44.14	-6.69	37.45	43.50	-6.05	QP	V
400.5400	35.56	-0.78	34.78	46.00	-11.22	QP	V
490.7500	39.92	1.01	40.93	46.00	-5.07	QP	V
500.4500	38.94	1.21	40.15	46.00	-5.85	QP	V
515.0000	39.24	1.52	40.76	46.00	-5.24	QP	V
600.3600	37.06	3.34	40.40	46.00	-5.60	QP	V


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Above 1GHz

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Horizontal		

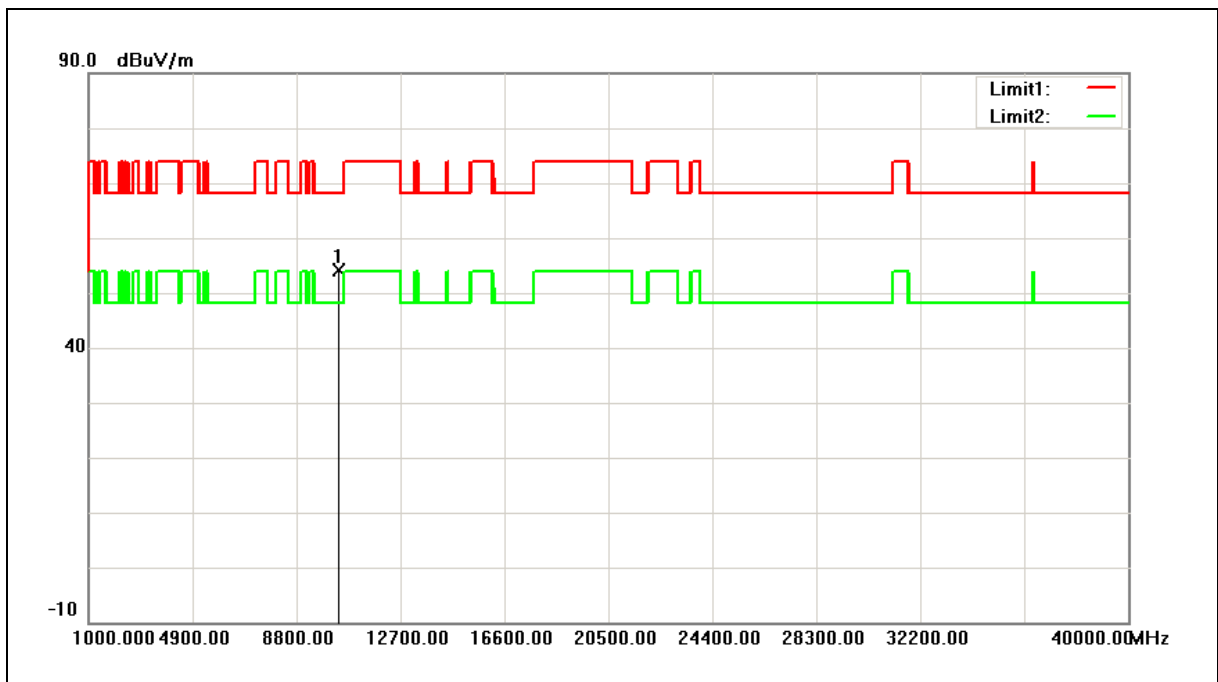


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	51.08	2.93	54.01	68.20	-14.19	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Vertical		

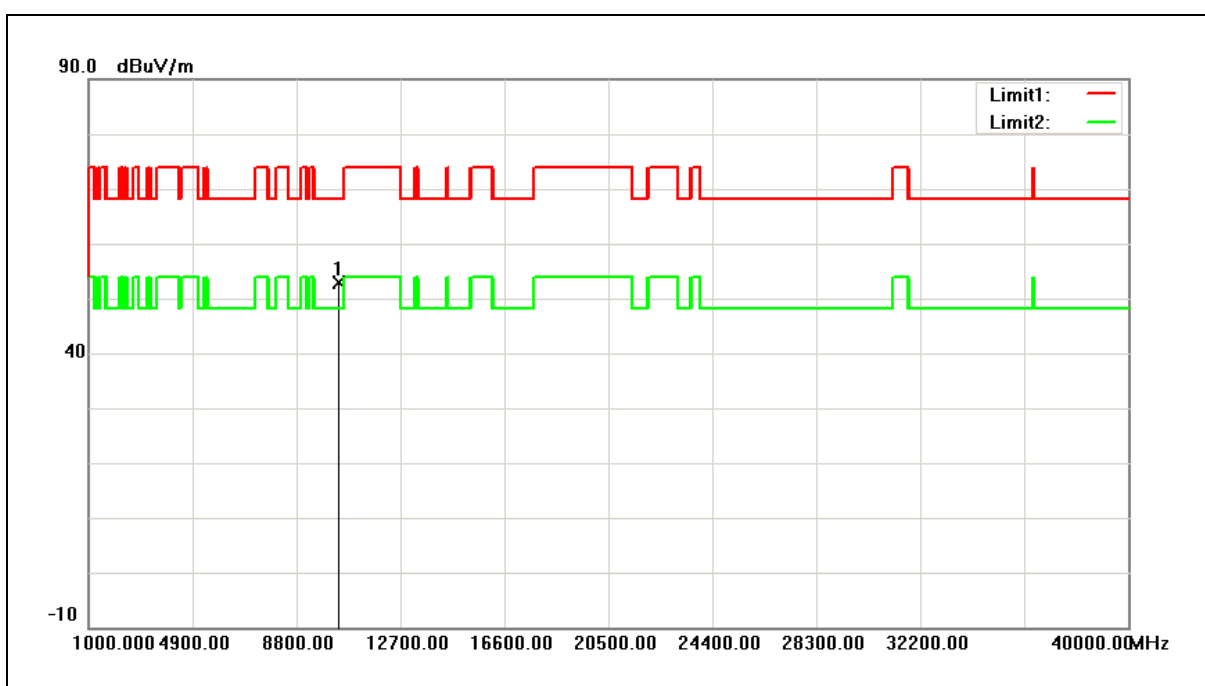


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	49.83	2.93	52.76	68.20	-15.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Horizontal		

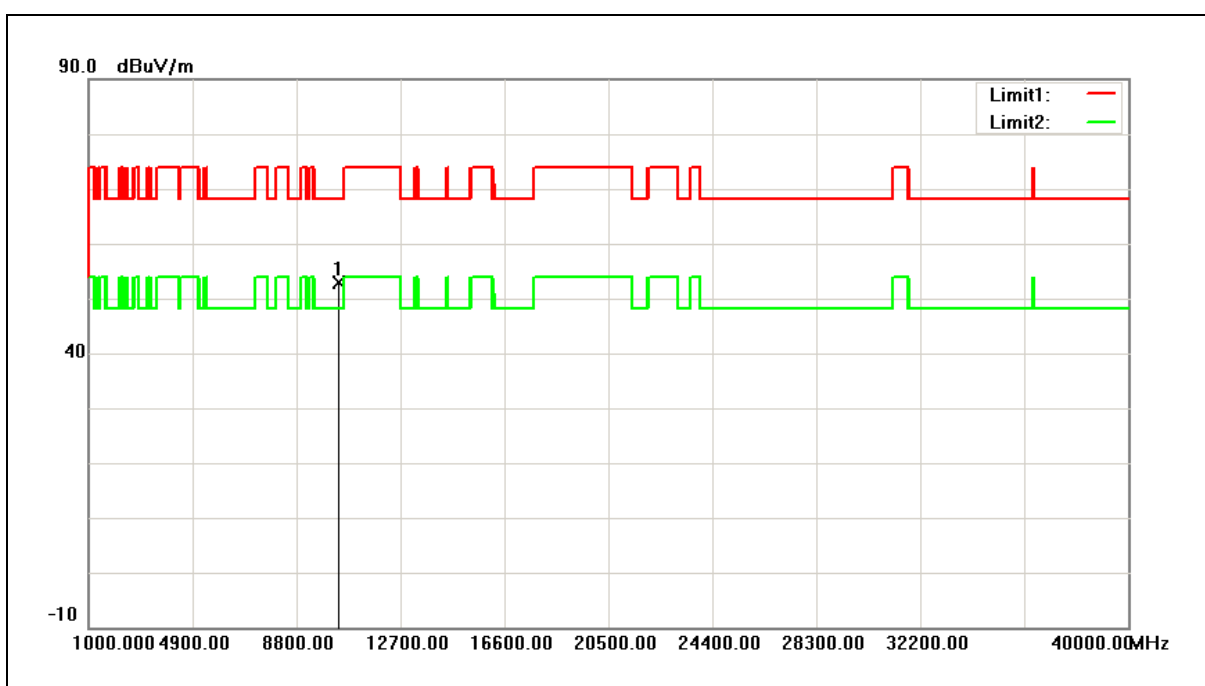


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	49.74	3.02	52.76	68.20	-15.44	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Vertical		

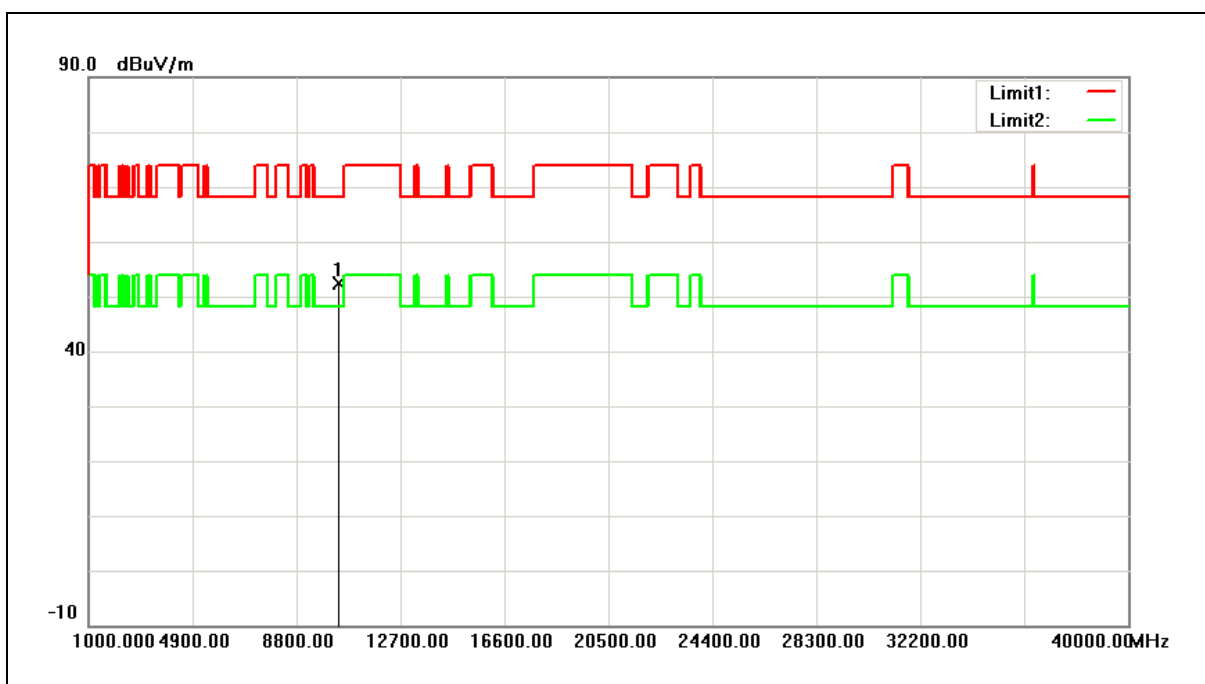


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	49.47	3.02	52.49	68.20	-15.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Horizontal		

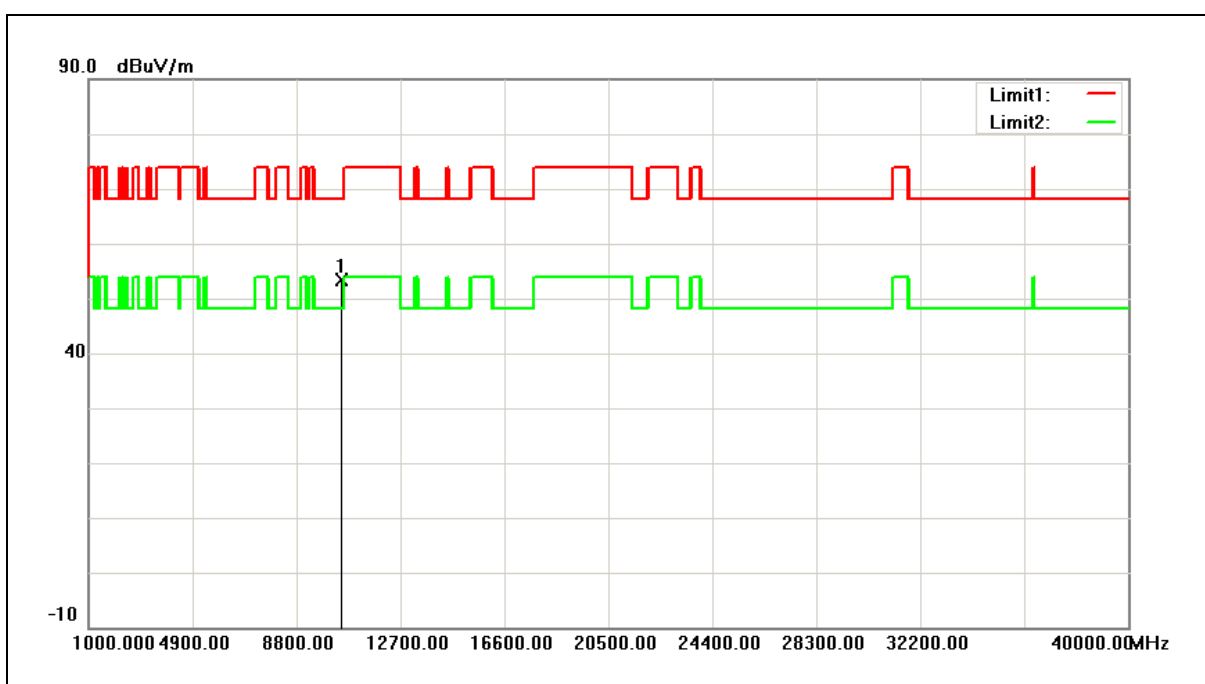


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	50.26	3.19	53.45	68.20	-14.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Vertical		

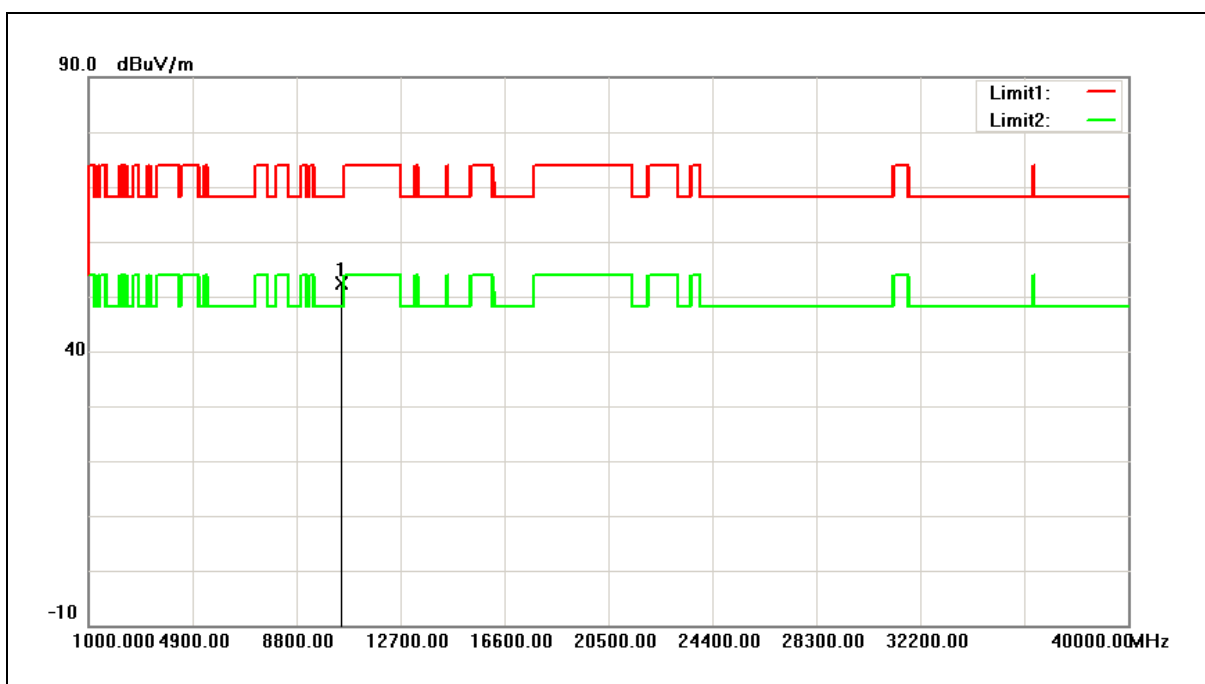


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	49.19	3.19	52.38	68.20	-15.82	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Horizontal		

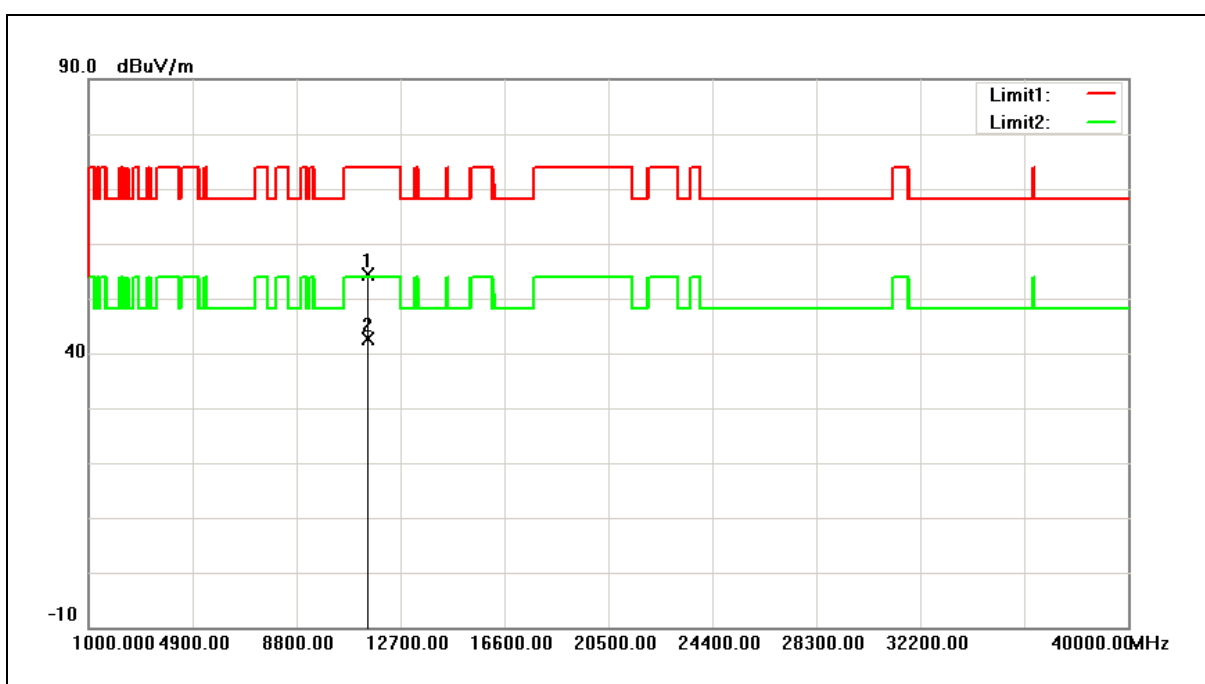


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	50.33	4.06	54.39	74.00	-19.61	peak
2	11490.000	38.60	4.06	42.66	54.00	-11.34	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Vertical		

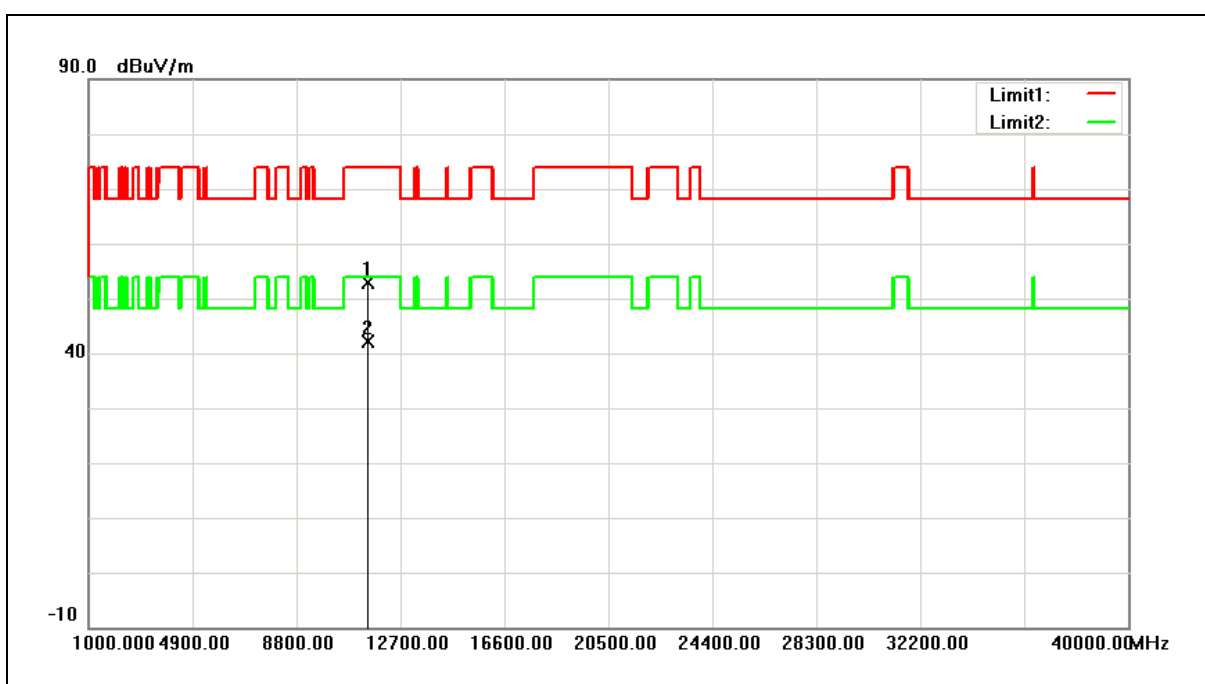


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	48.75	4.06	52.81	74.00	-21.19	peak
2	11490.000	38.01	4.06	42.07	54.00	-11.93	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Horizontal		

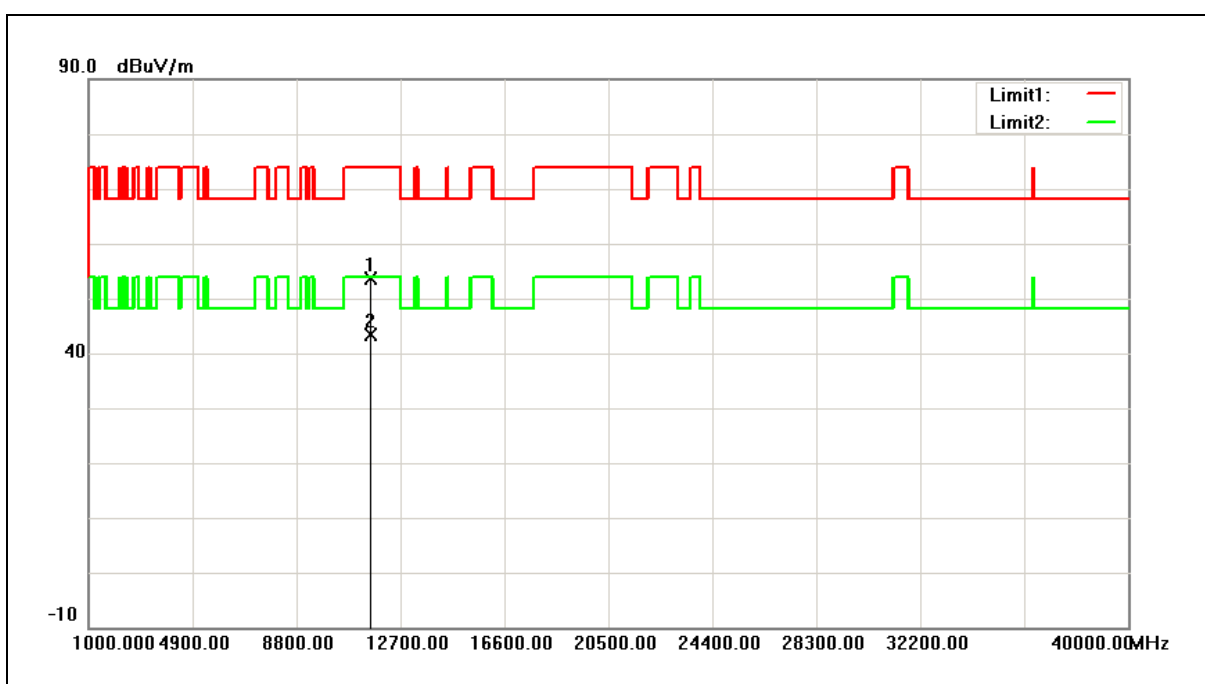


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	49.55	3.96	53.51	74.00	-20.49	peak
2	11570.000	39.36	3.96	43.32	54.00	-10.68	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Vertical		

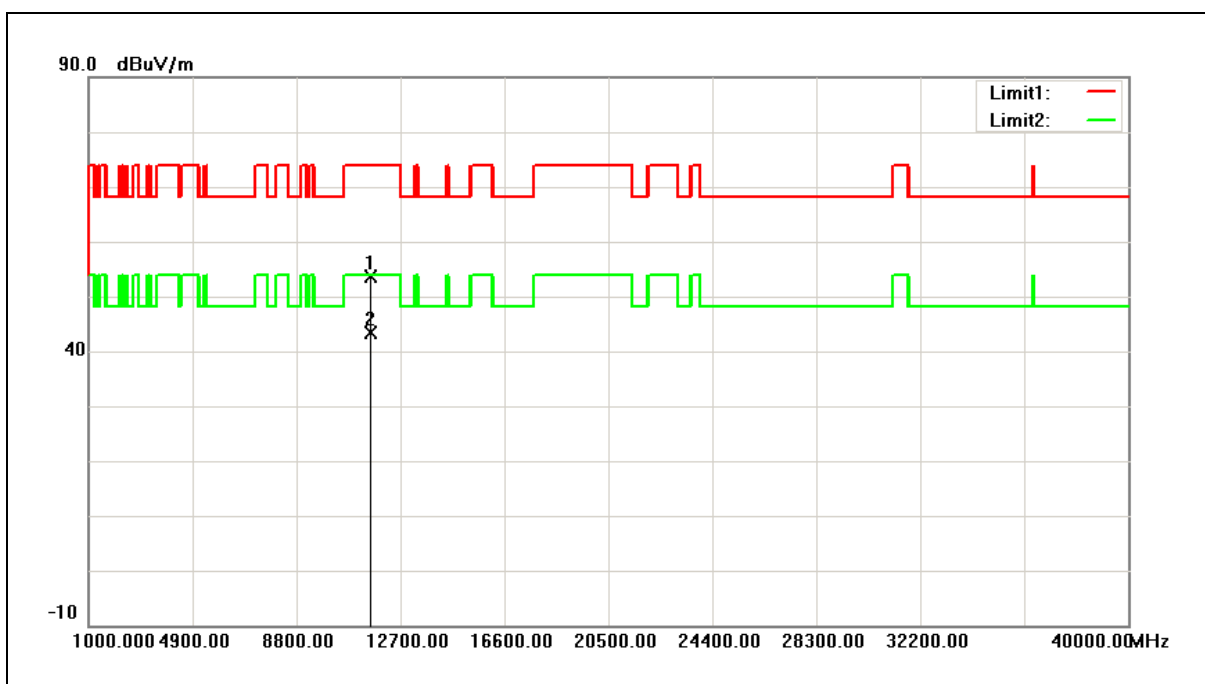


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	49.69	3.96	53.65	74.00	-20.35	peak
2	11570.000	39.46	3.96	43.42	54.00	-10.58	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Horizontal		

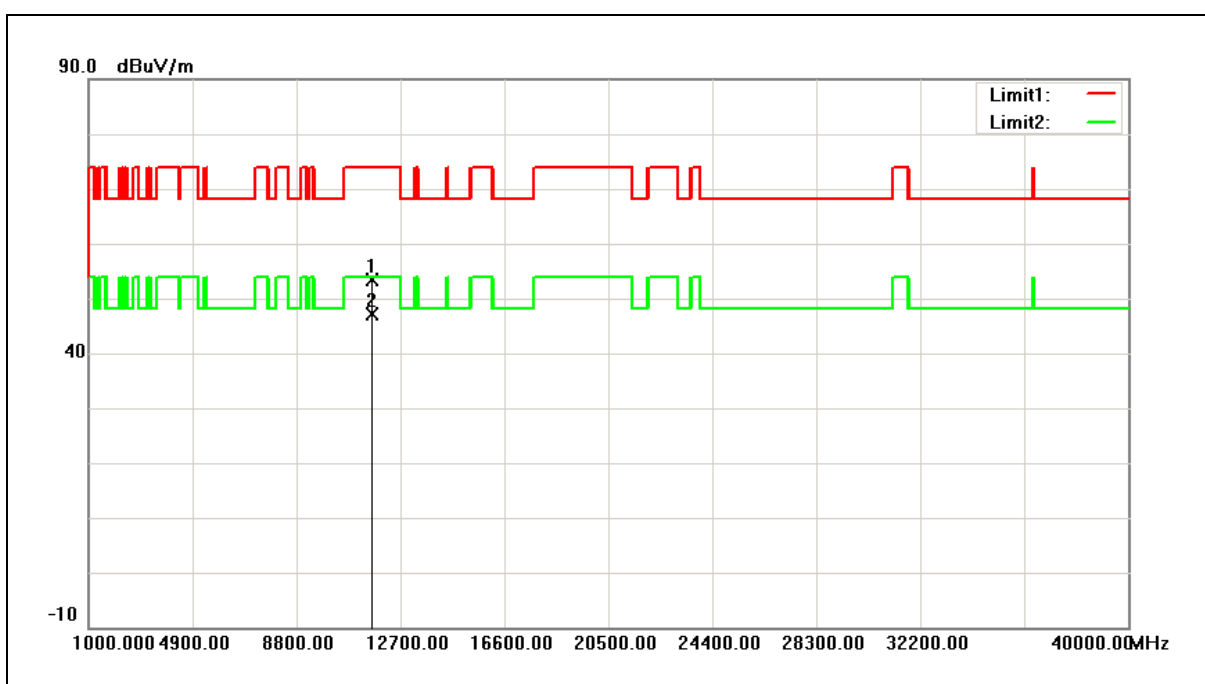

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	49.57	3.84	53.41	74.00	-20.59	peak
2	11650.000	43.27	3.84	47.11	54.00	-6.89	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Vertical		

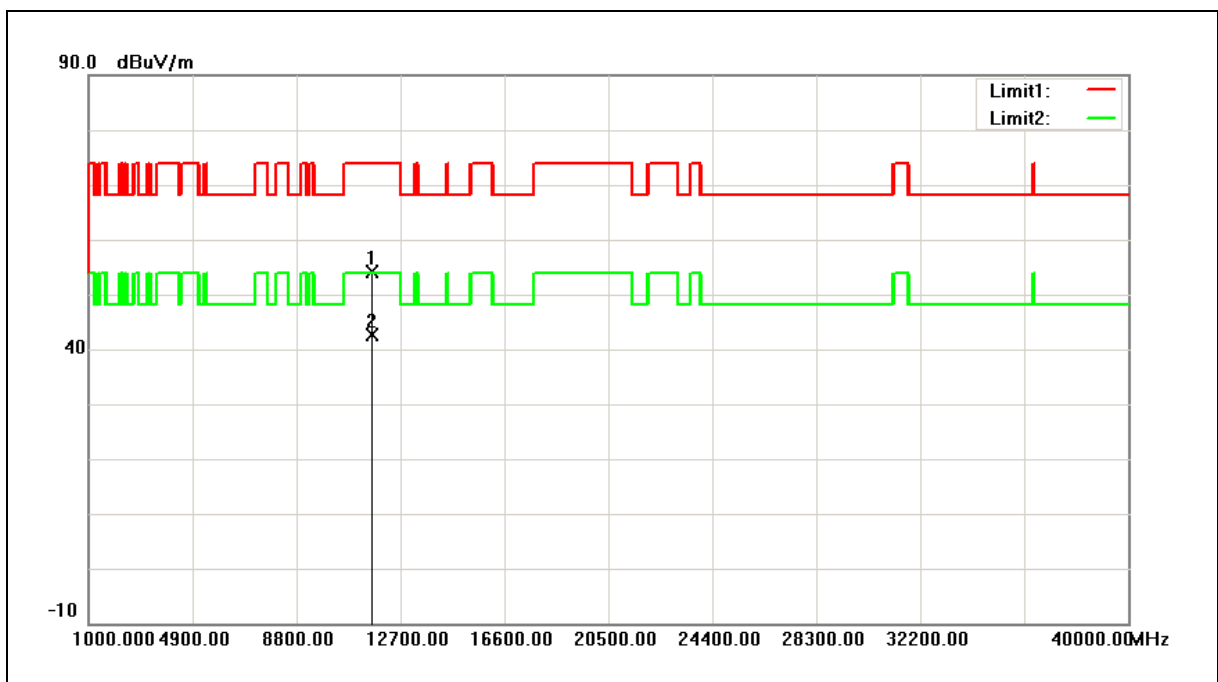


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	50.34	3.84	54.18	74.00	-19.82	peak
2	11650.000	38.76	3.84	42.60	54.00	-11.40	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Horizontal		

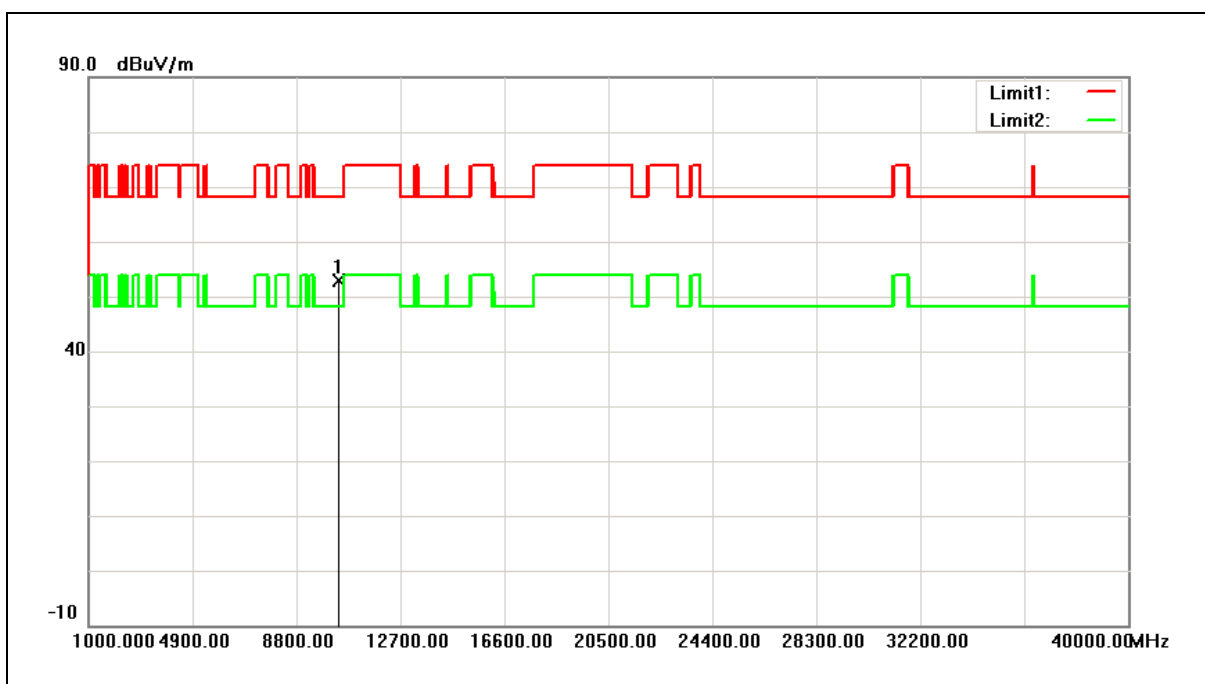


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	49.99	2.93	52.92	68.20	-15.28	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Vertical		

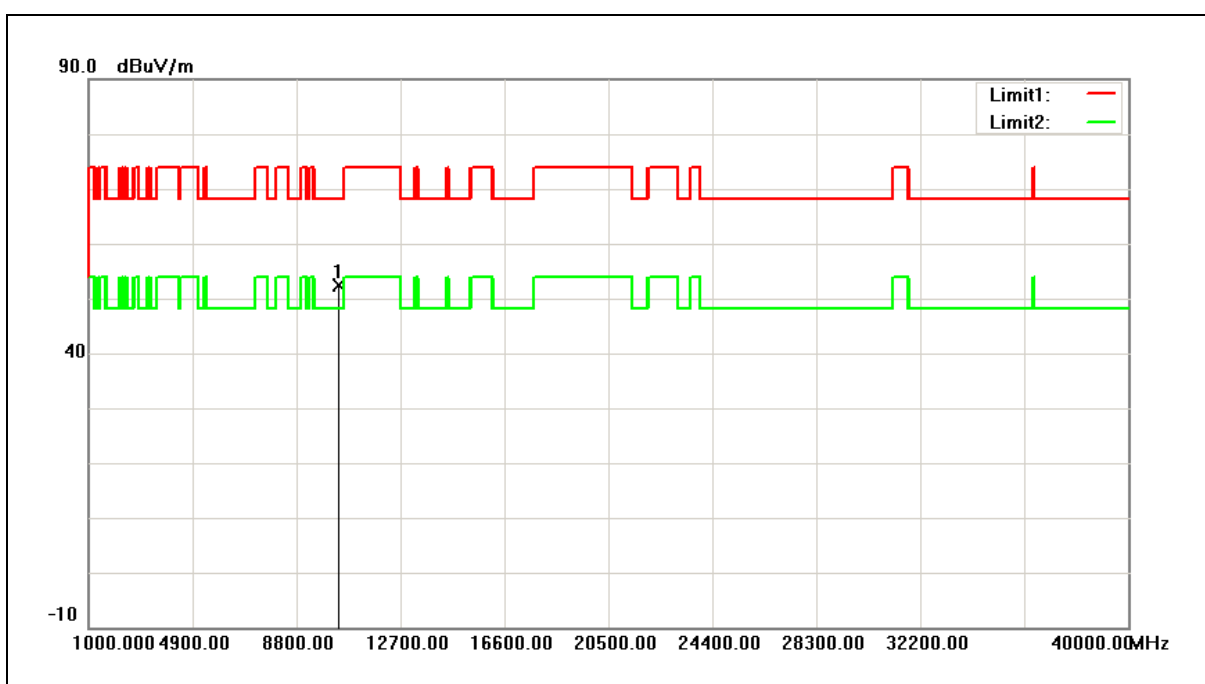


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	49.46	2.93	52.39	68.20	-15.81	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Horizontal		

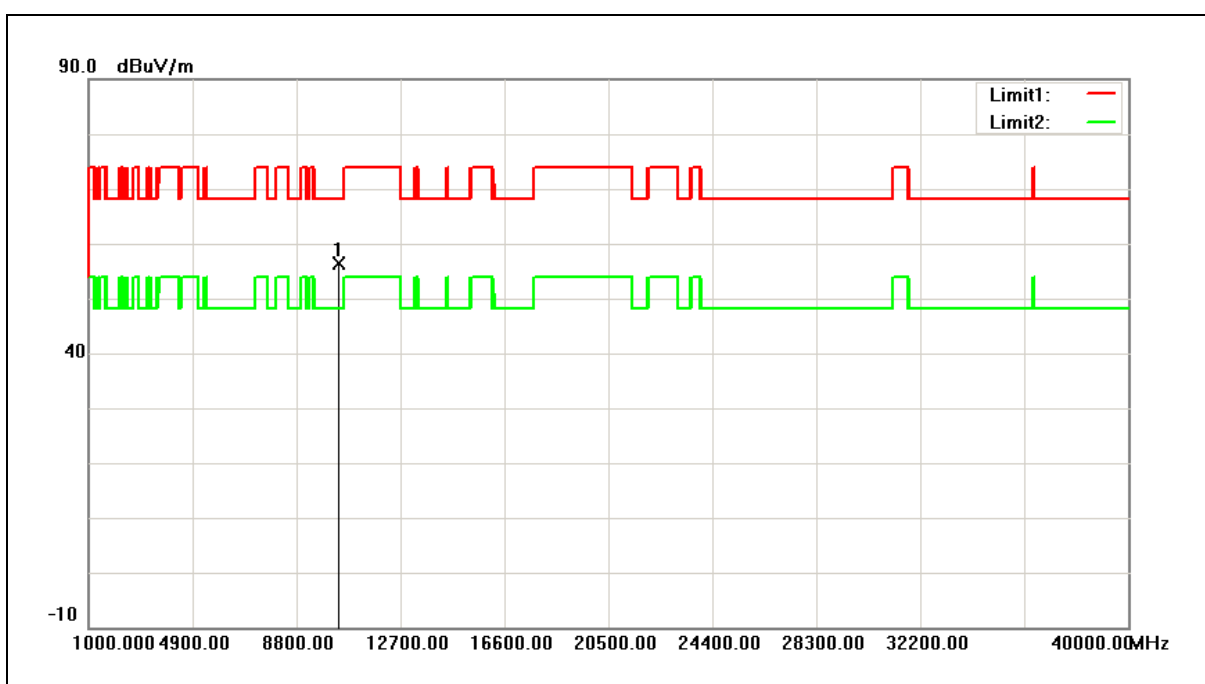


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	53.31	3.02	56.33	68.20	-11.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Vertical		

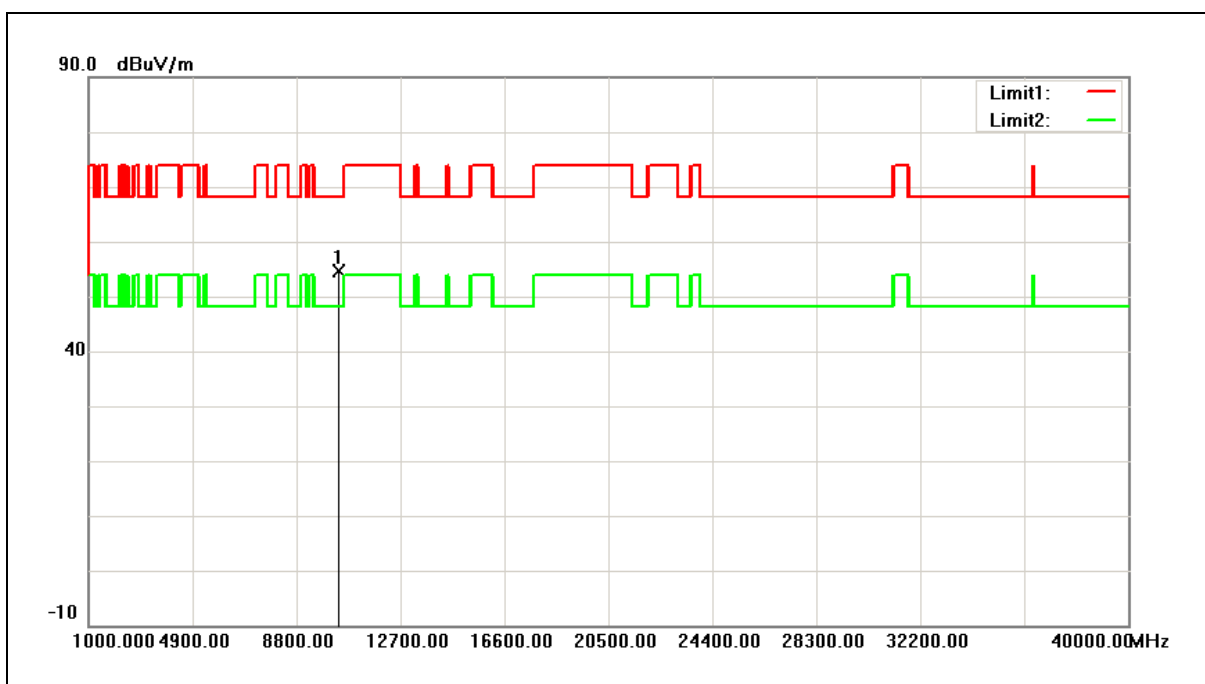


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10400.000	51.64	3.02	54.66	68.20	-13.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Horizontal		

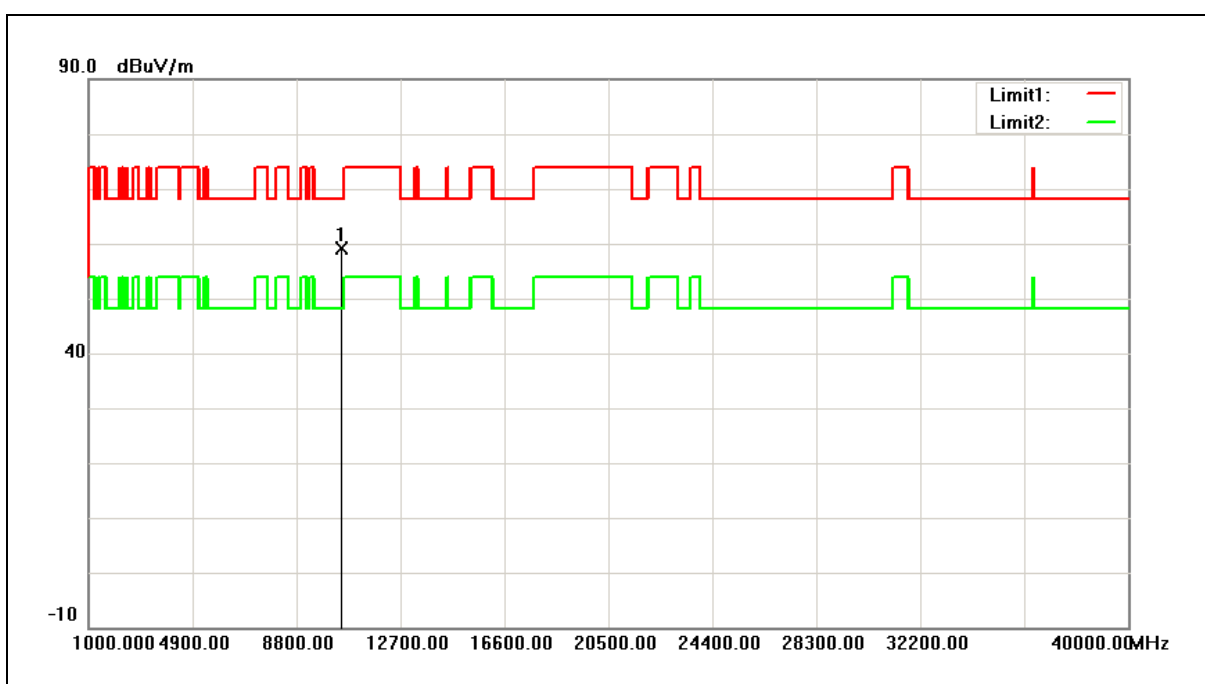


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	55.97	3.19	59.16	68.20	-9.04	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Vertical		

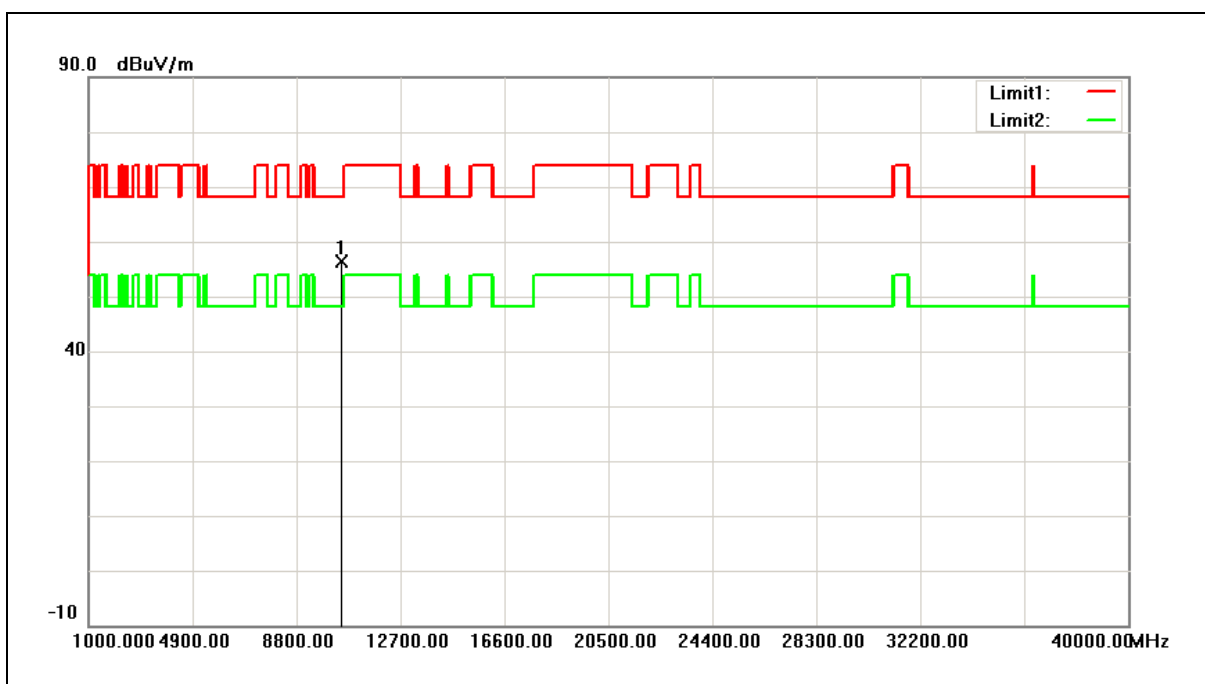


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10480.000	53.26	3.19	56.45	68.20	-11.75	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Horizontal		

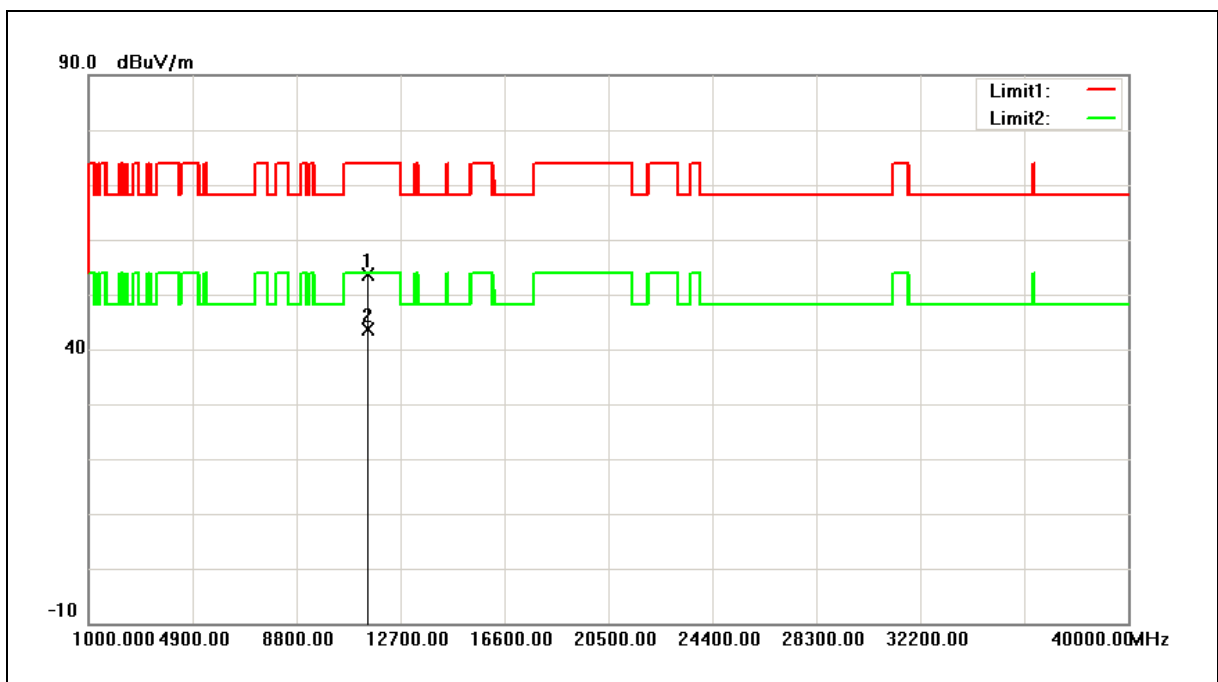


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	49.50	4.06	53.56	74.00	-20.44	peak
2	11490.000	39.49	4.06	43.55	54.00	-10.45	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Vertical		

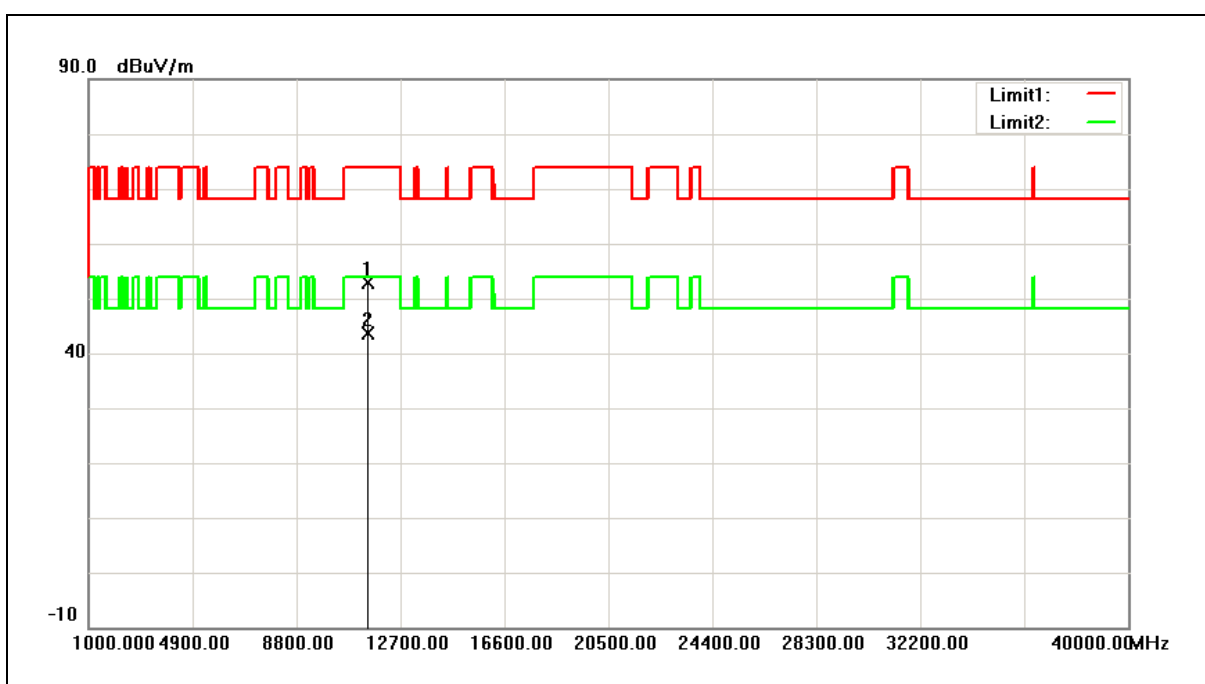


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11490.000	48.84	4.06	52.90	74.00	-21.10	peak
2	11490.000	39.68	4.06	43.74	54.00	-10.26	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Horizontal		

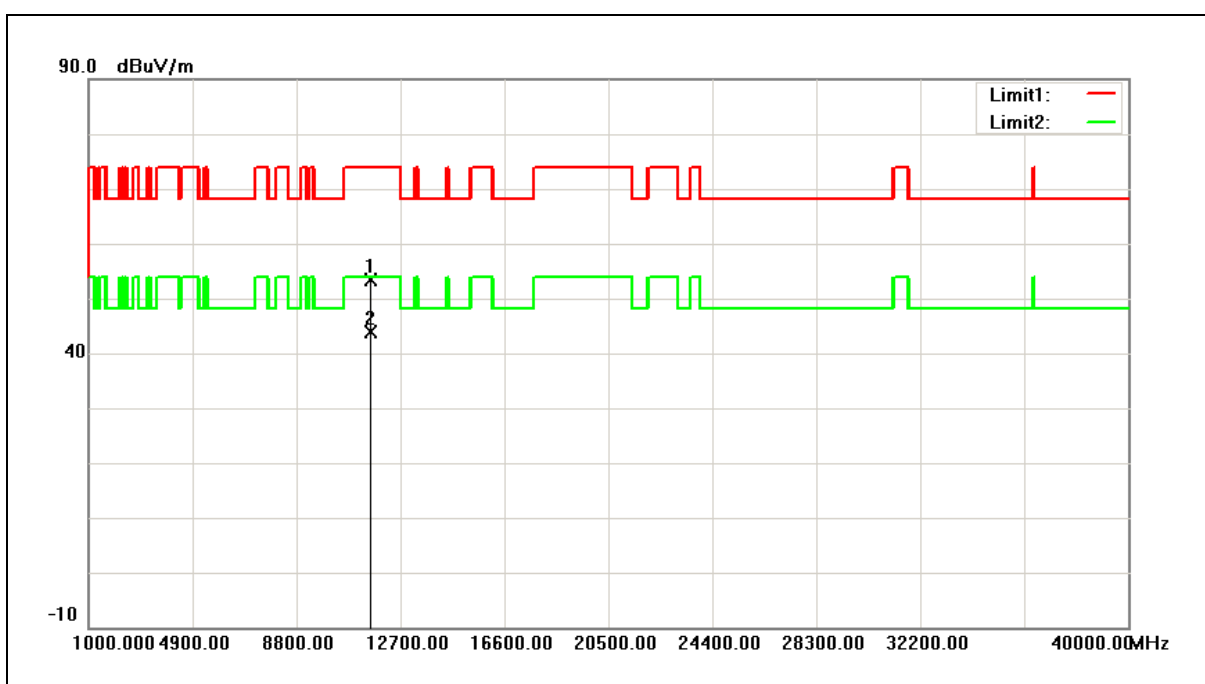


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	49.52	3.96	53.48	74.00	-20.52	peak
2	11570.000	39.89	3.96	43.85	54.00	-10.15	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Vertical		

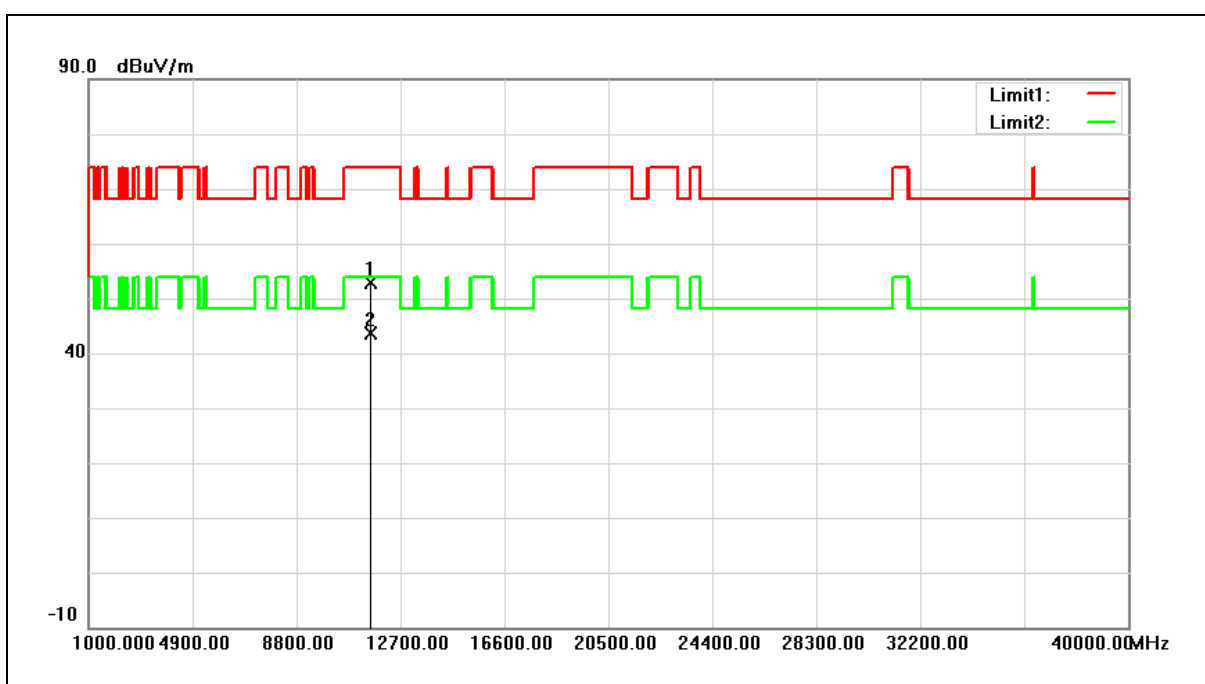


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11570.000	48.90	3.96	52.86	74.00	-21.14	peak
2	11570.000	39.78	3.96	43.74	54.00	-10.26	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Horizontal		

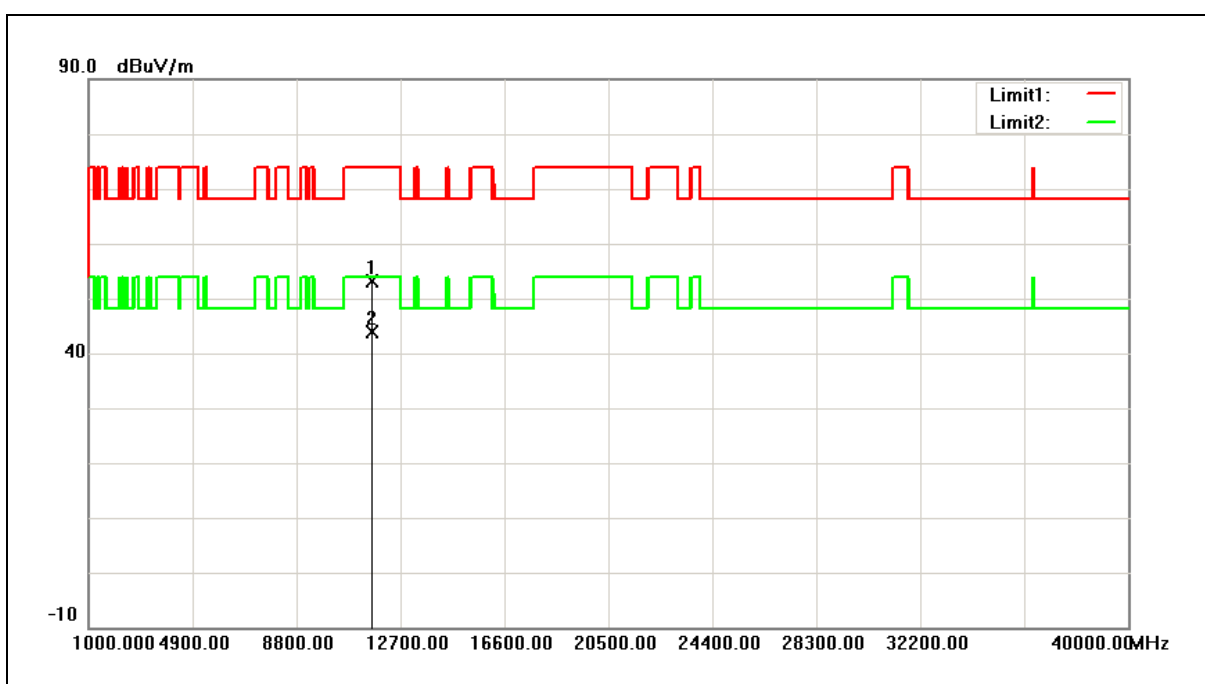


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	49.28	3.84	53.12	74.00	-20.88	peak
2	11650.000	40.13	3.84	43.97	54.00	-10.03	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Vertical		

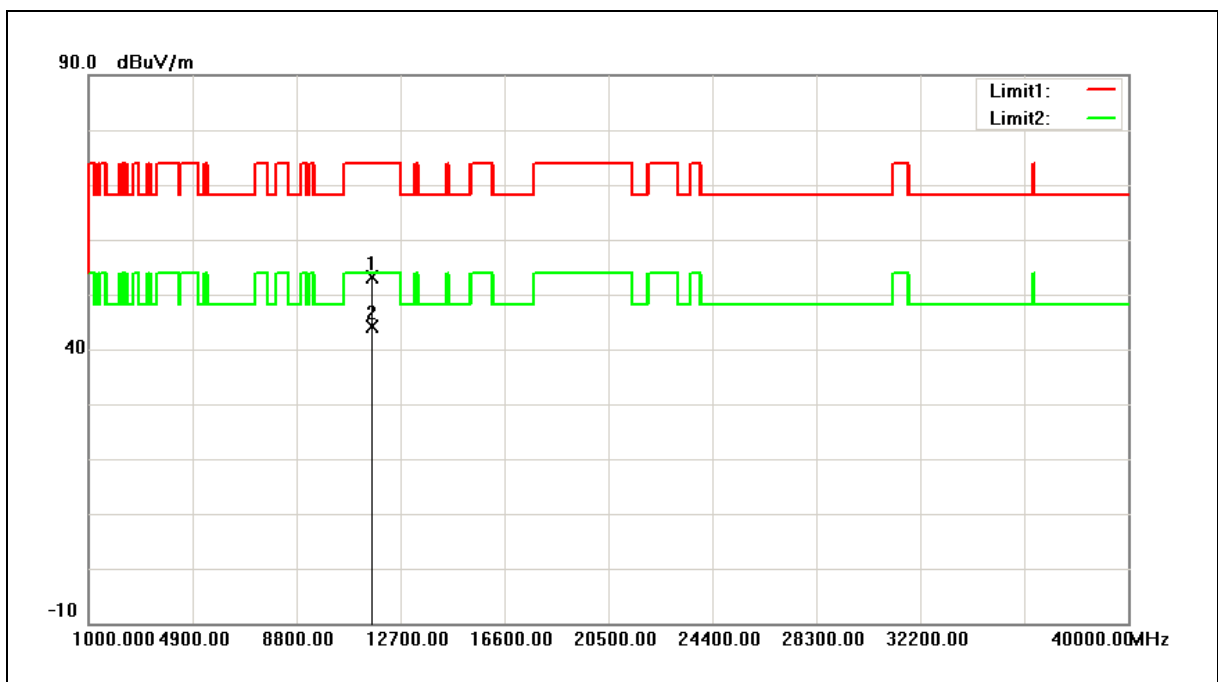


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11650.000	49.40	3.84	53.24	74.00	-20.76	peak
2	11650.000	40.18	3.84	44.02	54.00	-9.98	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/16/2017
Ant.Polar.:	Horizontal		

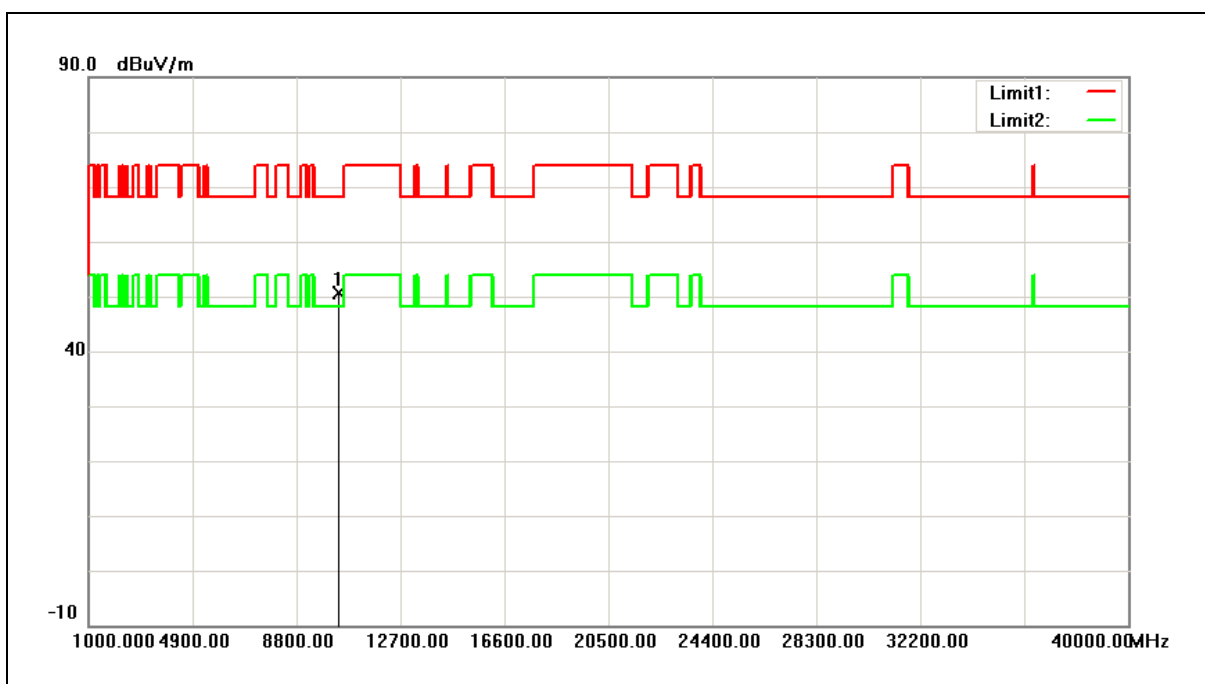


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	47.60	2.97	50.57	68.20	-17.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/16/2017
Ant.Polar.:	Vertical		

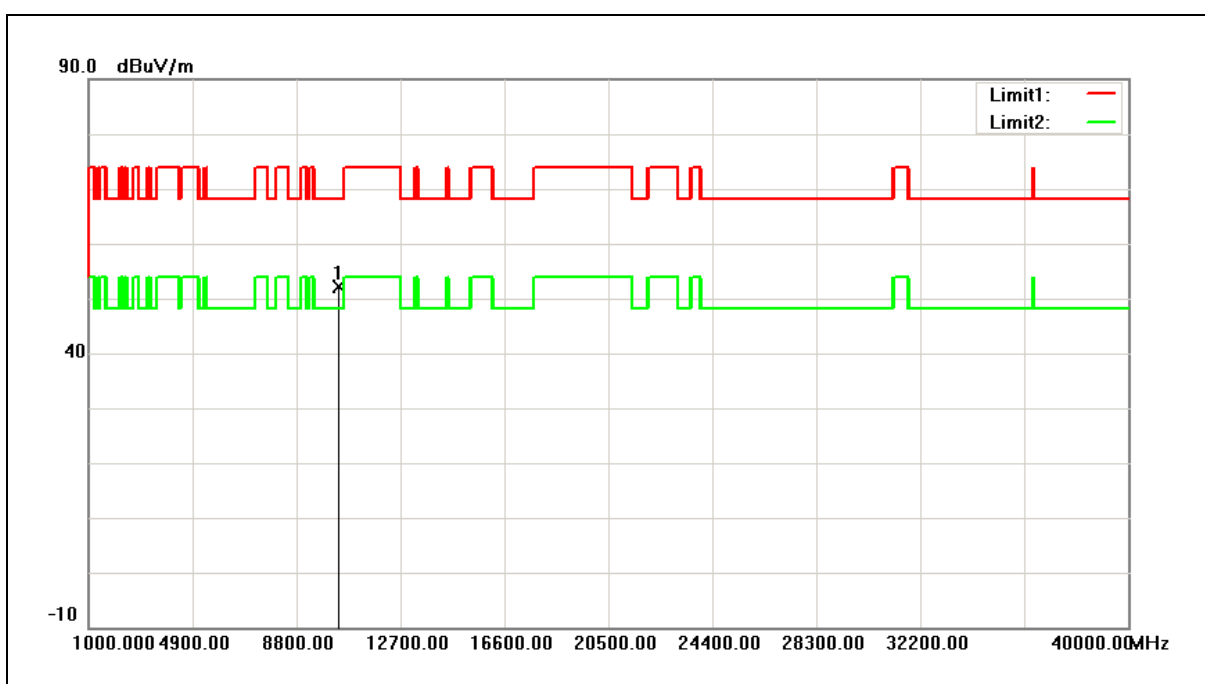


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10380.000	49.12	2.97	52.09	68.20	-16.11	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/16/2017
Ant.Polar.:	Horizontal		

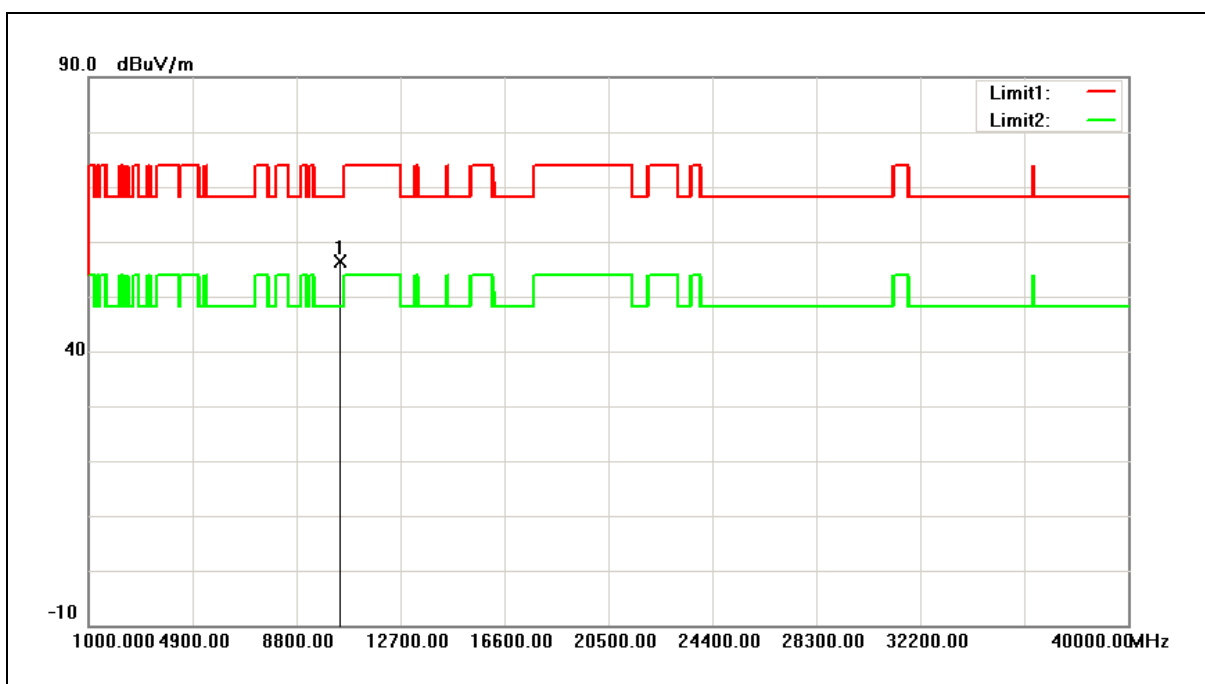


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	53.22	3.15	56.37	68.20	-11.83	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/16/2017
Ant.Polar.:	Vertical		

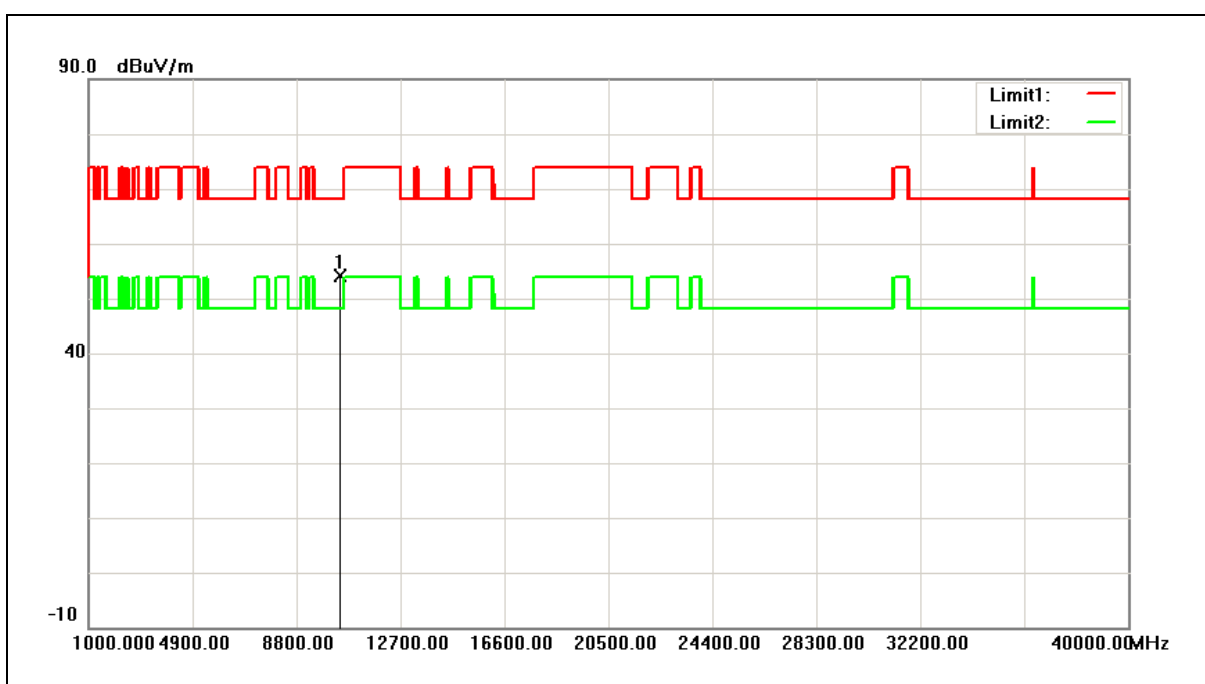


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10460.000	51.02	3.15	54.17	68.20	-14.03	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/16/2017
Ant.Polar.:	Horizontal		

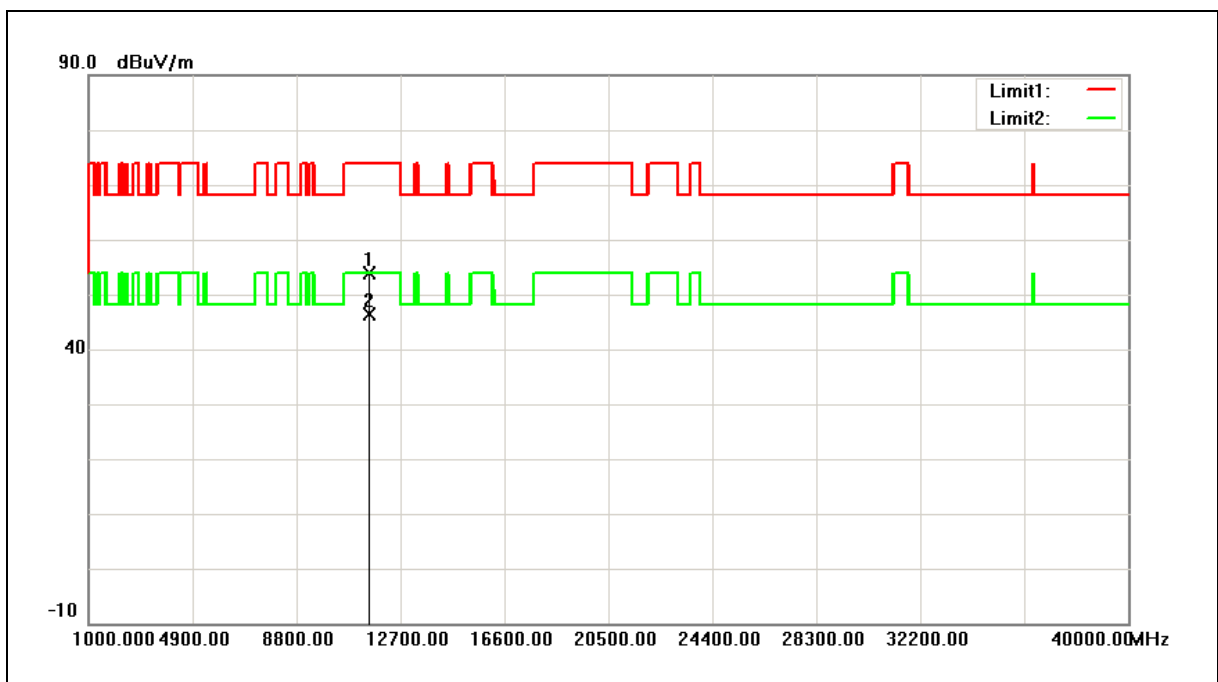

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	49.91	4.05	53.96	74.00	-20.04	peak
2	11510.000	42.31	4.05	46.36	54.00	-7.64	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/16/2017
Ant.Polar.:	Vertical		

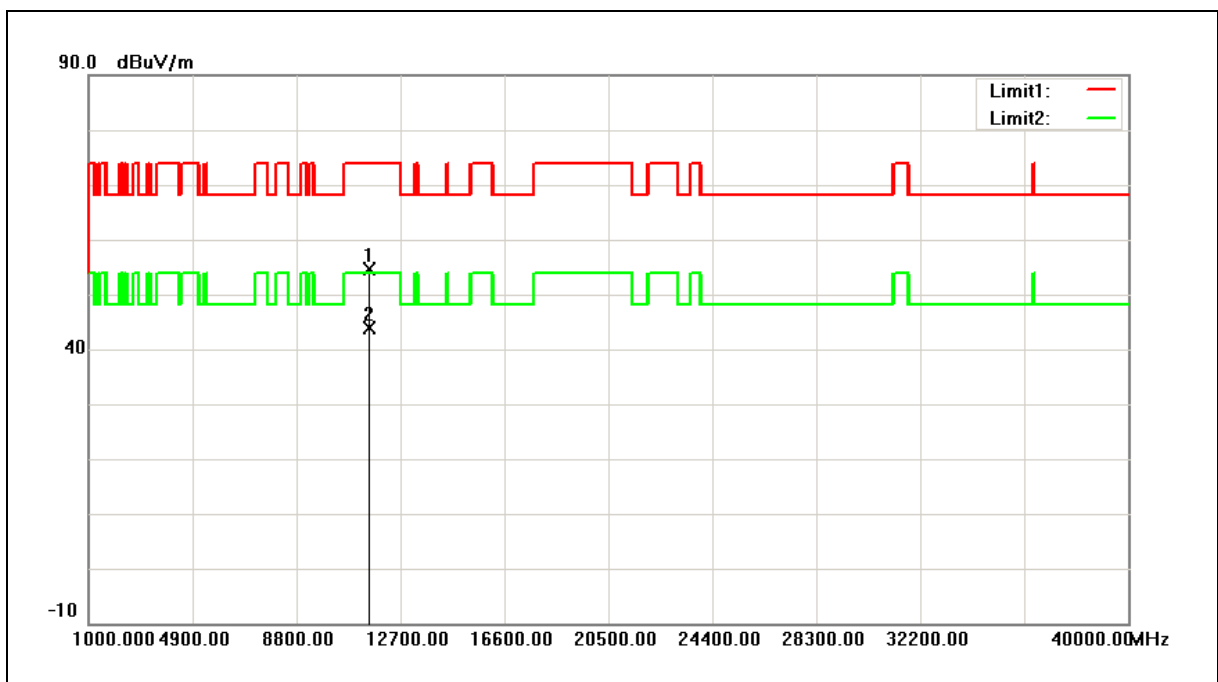


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11510.000	50.59	4.05	54.64	74.00	-19.36	peak
2	11510.000	39.91	4.05	43.96	54.00	-10.04	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/16/2017
Ant.Polar.:	Horizontal		

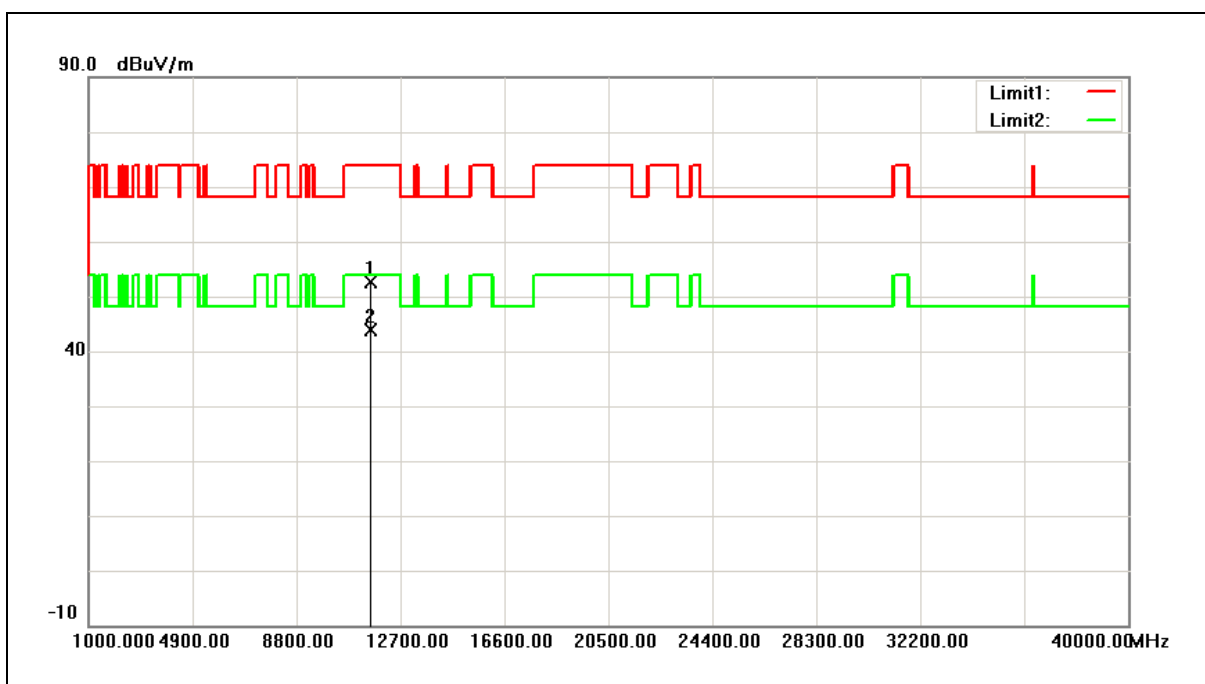


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	48.82	3.93	52.75	74.00	-21.25	peak
2	11590.000	39.86	3.93	43.79	54.00	-10.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/16/2017
Ant.Polar.:	Vertical		

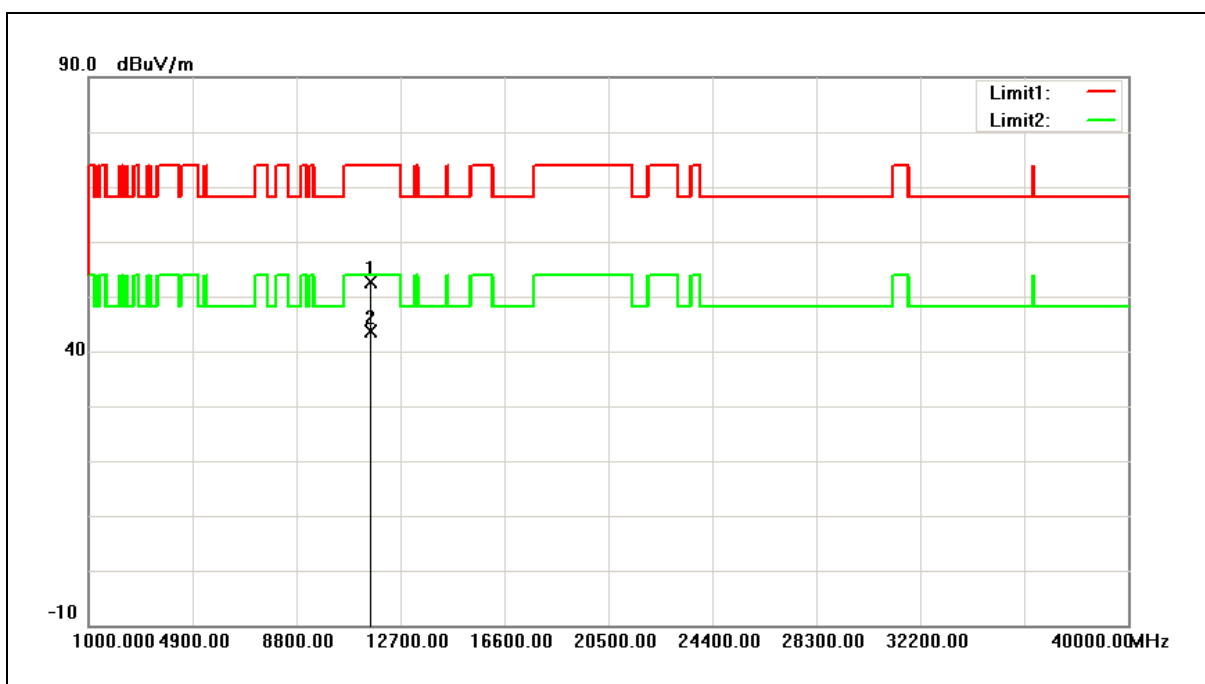


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11590.000	48.72	3.93	52.65	74.00	-21.35	peak
2	11590.000	39.77	3.93	43.70	54.00	-10.30	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/16/2017
Ant.Polar.:	Horizontal		

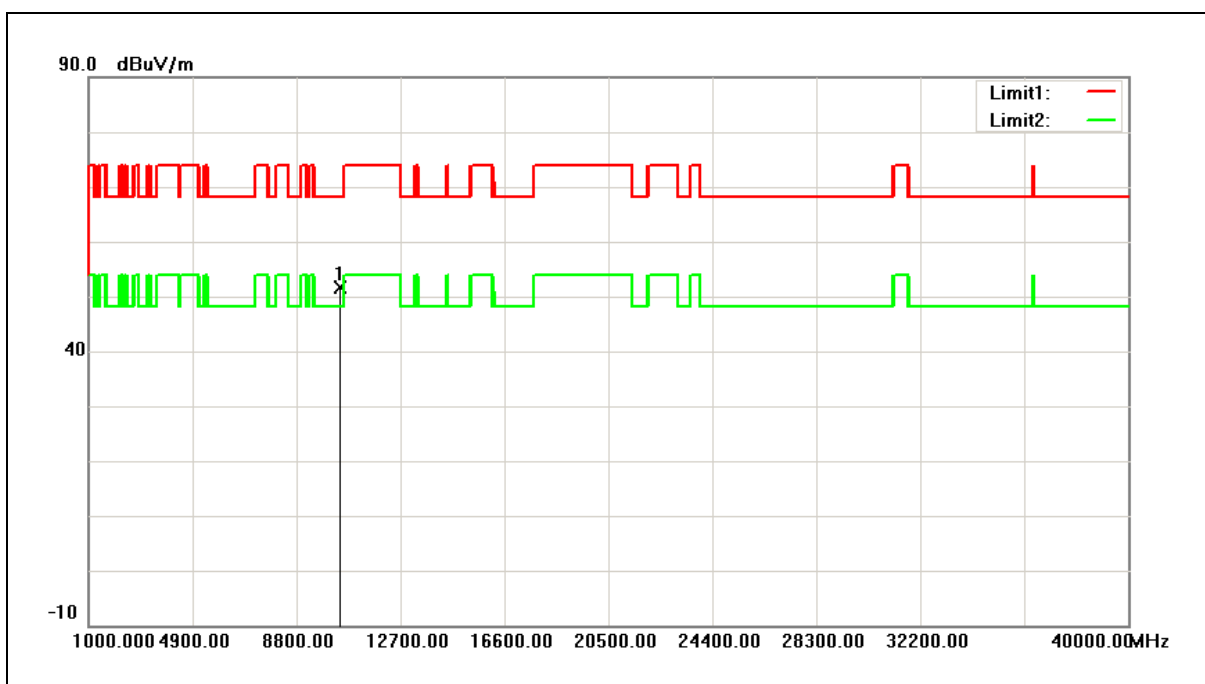


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	48.52	3.06	51.58	68.20	-16.62	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/16/2017
Ant.Polar.:	Vertical		

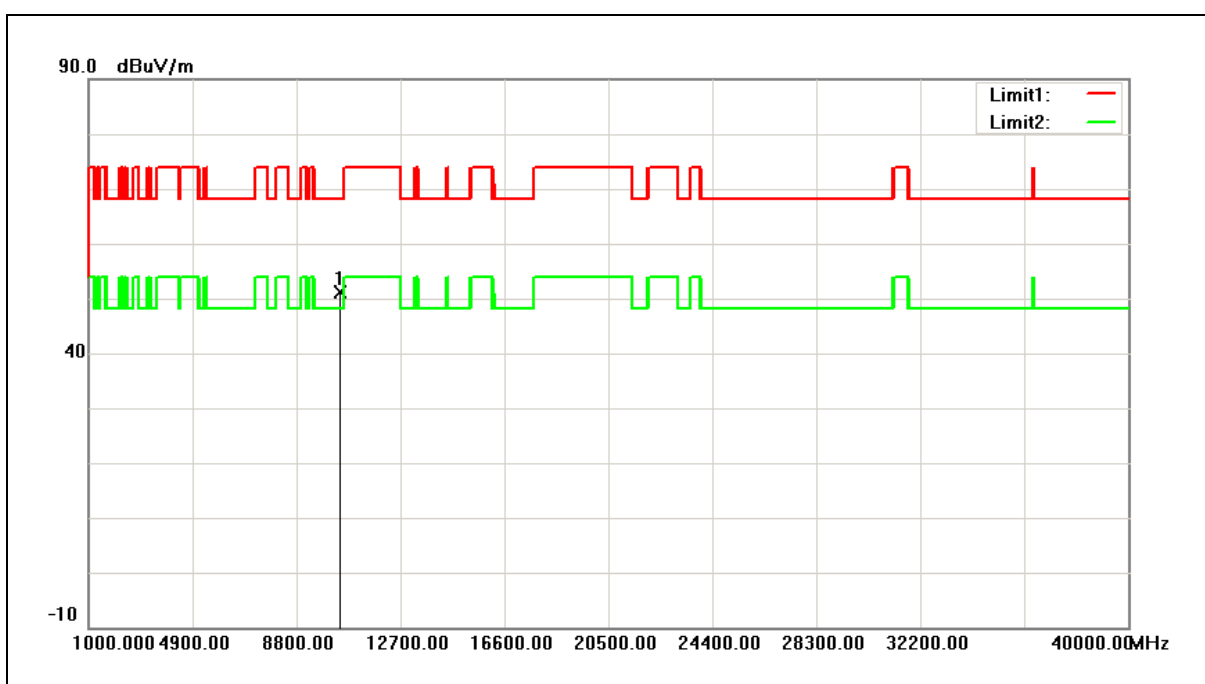


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10420.000	48.04	3.06	51.10	68.20	-17.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/16/2017
Ant.Polar.:	Horizontal		

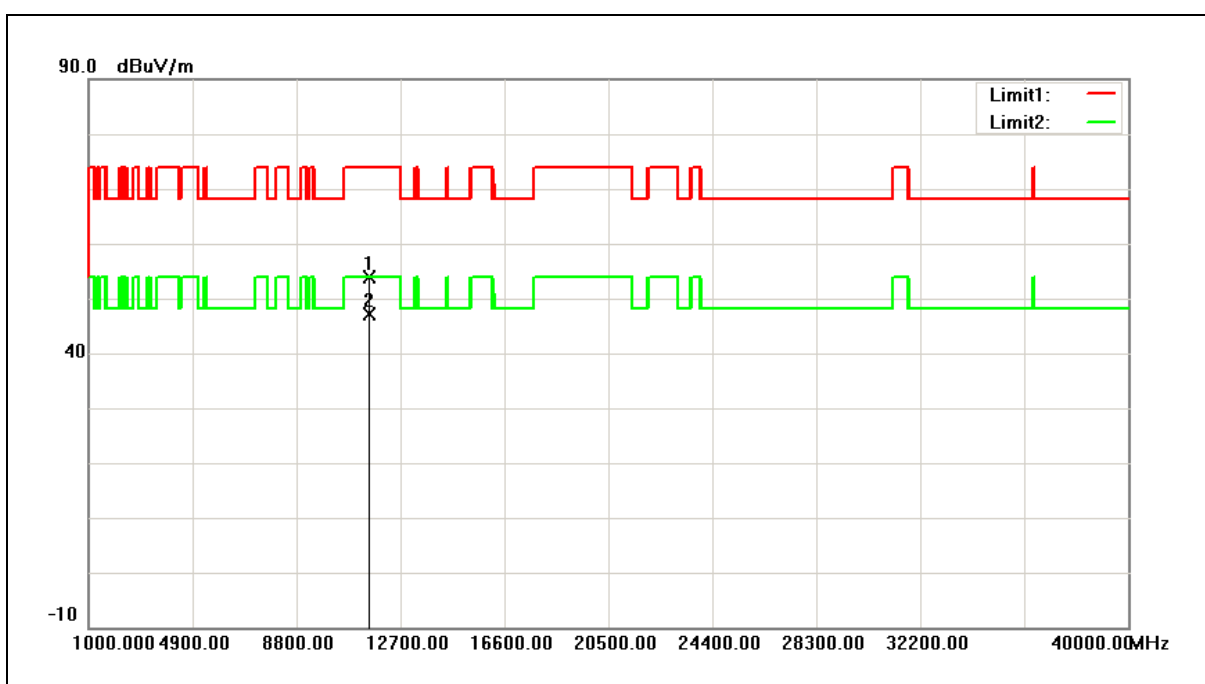


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	49.77	3.99	53.76	74.00	-20.24	peak
2	11550.000	43.06	3.99	47.05	54.00	-6.95	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/16/2017
Ant.Polar.:	Vertical		

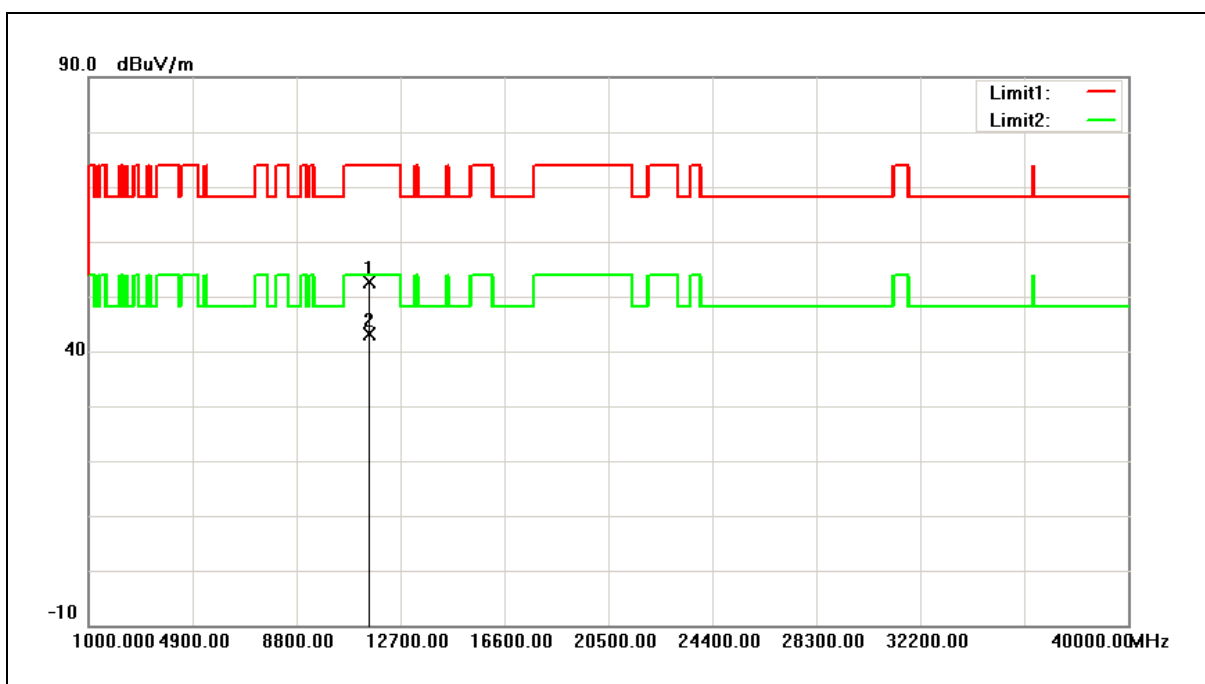


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	11550.000	48.66	3.99	52.65	74.00	-21.35	peak
2	11550.000	39.22	3.99	43.21	54.00	-10.79	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Test Mode:	Simultaneous Transmitting	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
	(DTS+NII)	Date:	09/16/2017
Ant.Polar.:	Horizontal		

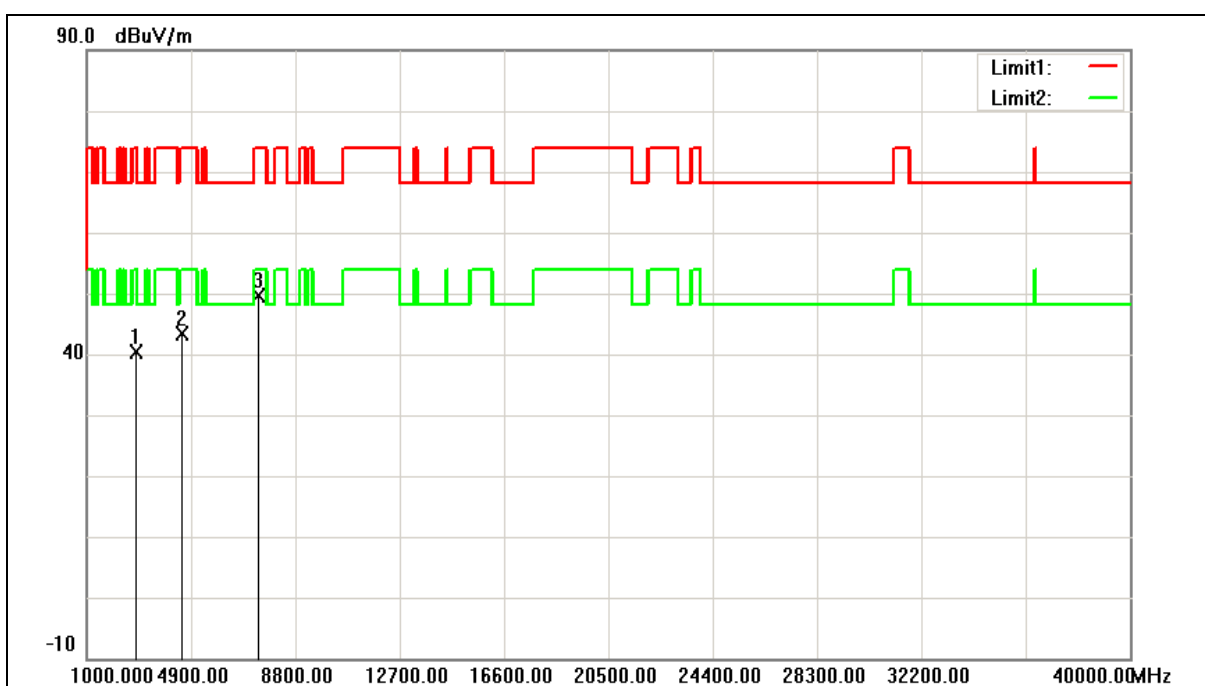


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	54.68	-14.23	40.45	74.00	-33.55	peak
2	4587.000	53.64	-10.27	43.37	74.00	-30.63	peak
3	7426.000	51.57	-2.02	49.55	74.00	-24.45	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Harmonic	Power:	AC 120V/60Hz
Test Mode:	Simultaneous Transmitting	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
	(DTS+NII)	Date:	09/16/2017
Ant.Polar.:	Vertical		

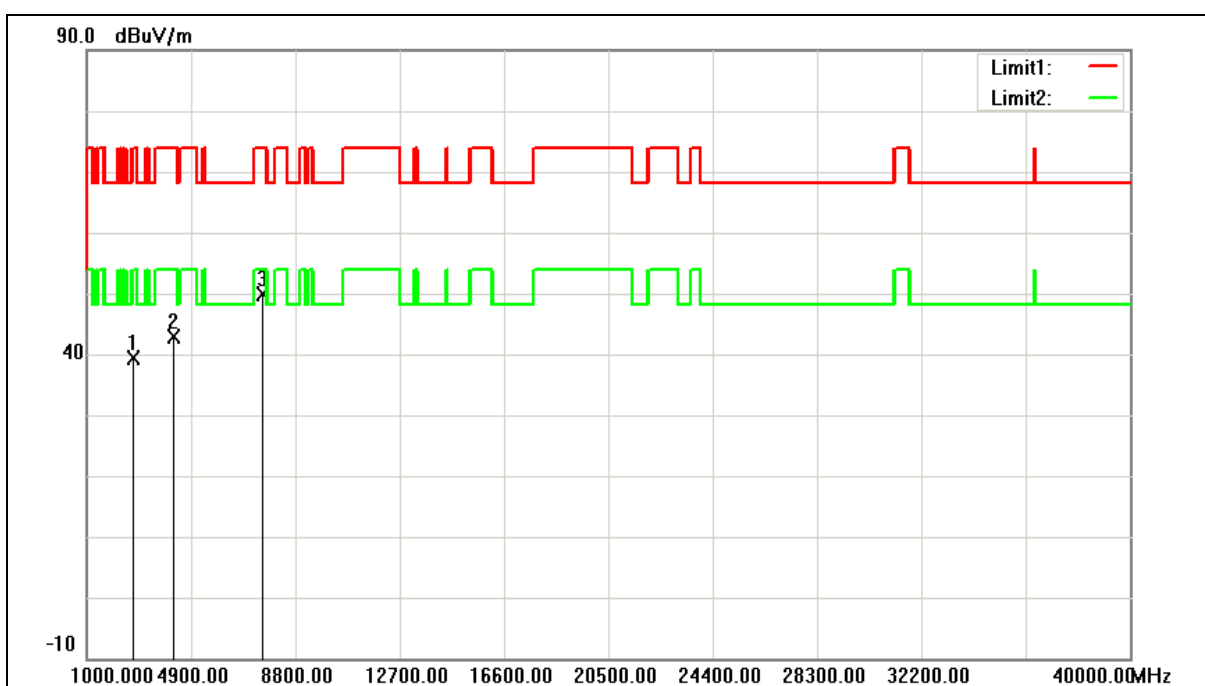

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	53.67	-14.37	39.30	74.00	-34.70	peak
2	4230.000	54.13	-11.16	42.97	74.00	-31.03	peak
3	7562.000	51.41	-1.64	49.77	74.00	-24.23	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Horizontal		

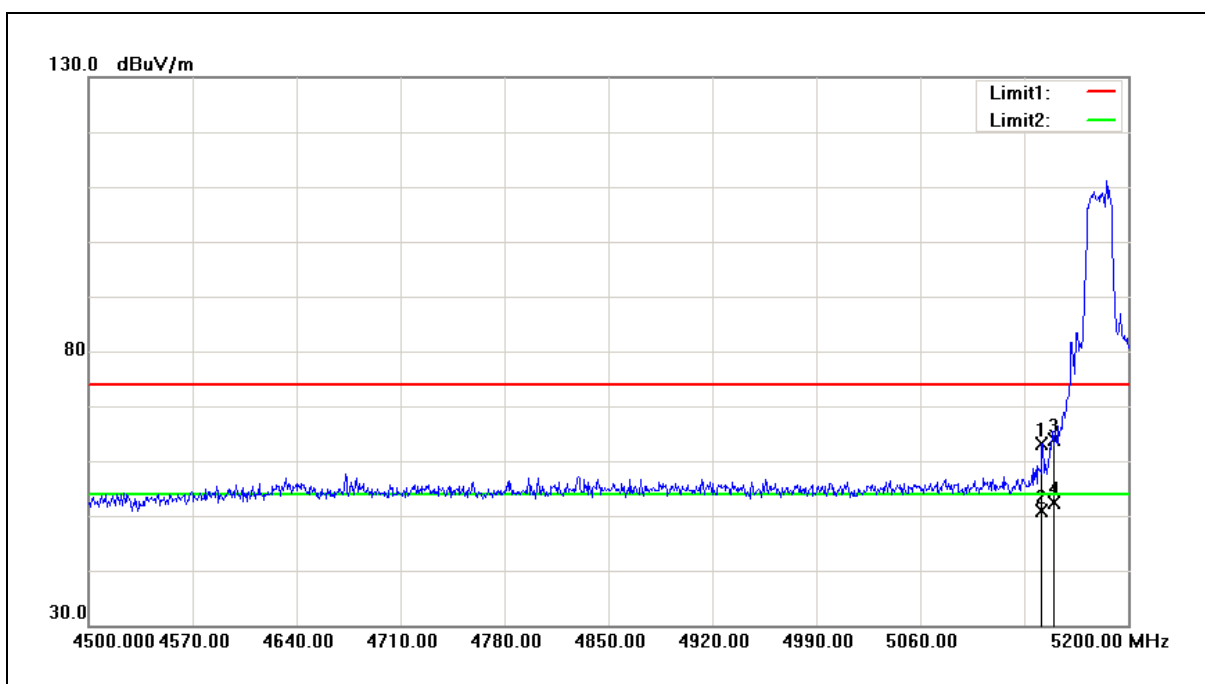

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.900	57.31	5.74	63.05	74.00	-10.95	peak
2	5141.900	45.19	5.74	50.93	54.00	-3.07	AVG
3	5150.000	58.19	5.75	63.94	74.00	-10.06	peak
4	5150.000	46.60	5.75	52.35	54.00	-1.65	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Vertical		

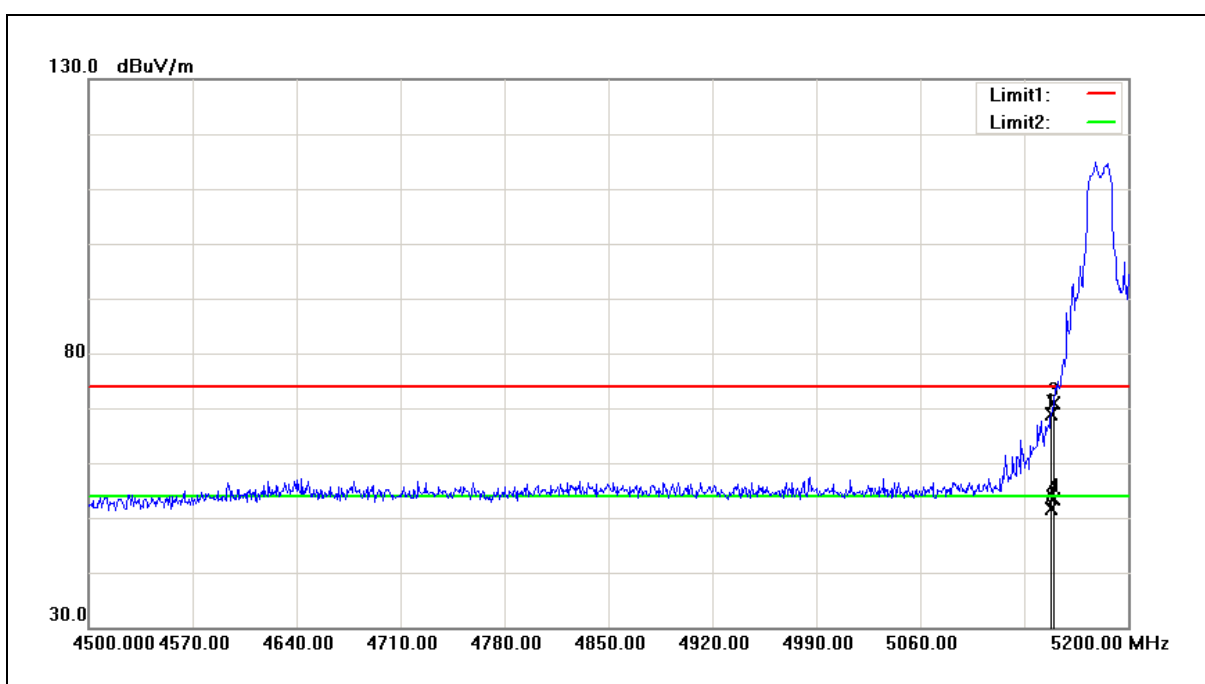

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.200	63.05	5.74	68.79	74.00	-5.21	peak
2	5148.200	45.83	5.74	51.57	54.00	-2.43	AVG
3	5150.000	65.02	5.75	70.77	74.00	-3.23	peak
4	5150.000	47.68	5.75	53.43	54.00	-0.57	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Horizontal		

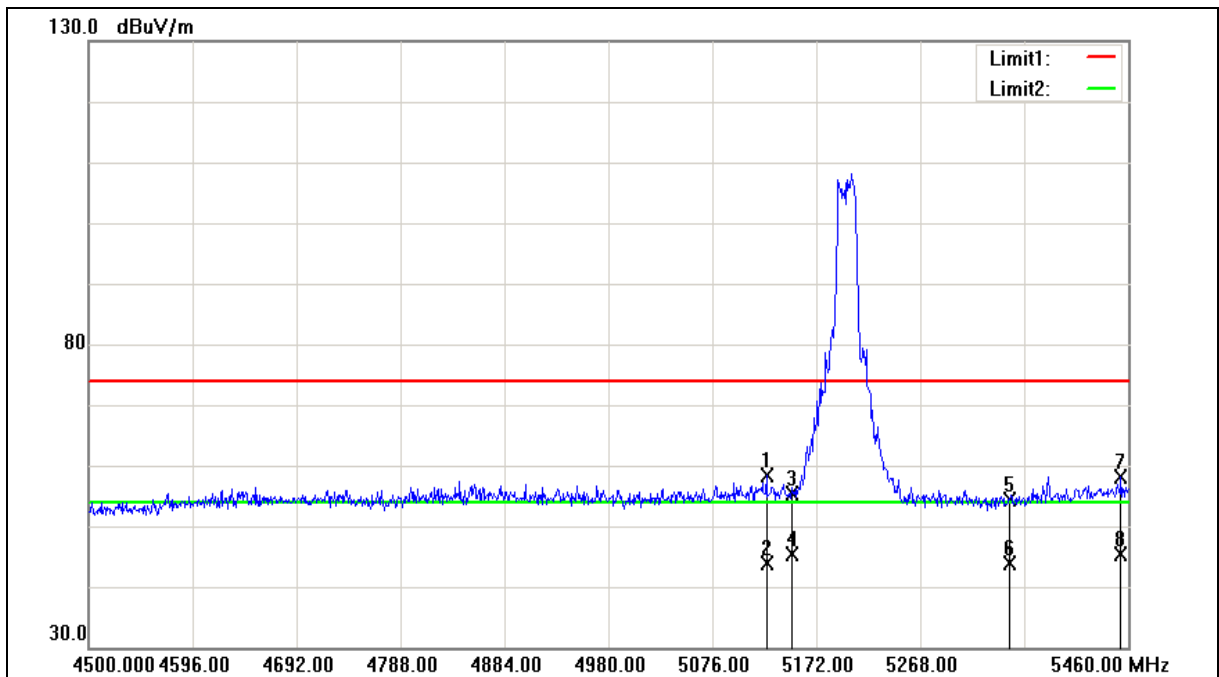



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5125.920	52.57	5.72	58.29	74.00	-15.71	peak
2	5125.920	38.19	5.72	43.91	54.00	-10.09	AVG
3	5150.000	49.54	5.75	55.29	74.00	-18.71	peak
4	5150.000	39.67	5.75	45.42	54.00	-8.58	AVG
5	5350.000	48.29	6.03	54.32	74.00	-19.68	peak
6	5350.000	37.87	6.03	43.90	54.00	-10.10	AVG
7	5453.280	52.01	6.19	58.20	74.00	-15.80	peak
8	5453.280	39.31	6.19	45.50	54.00	-8.50	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Vertical		

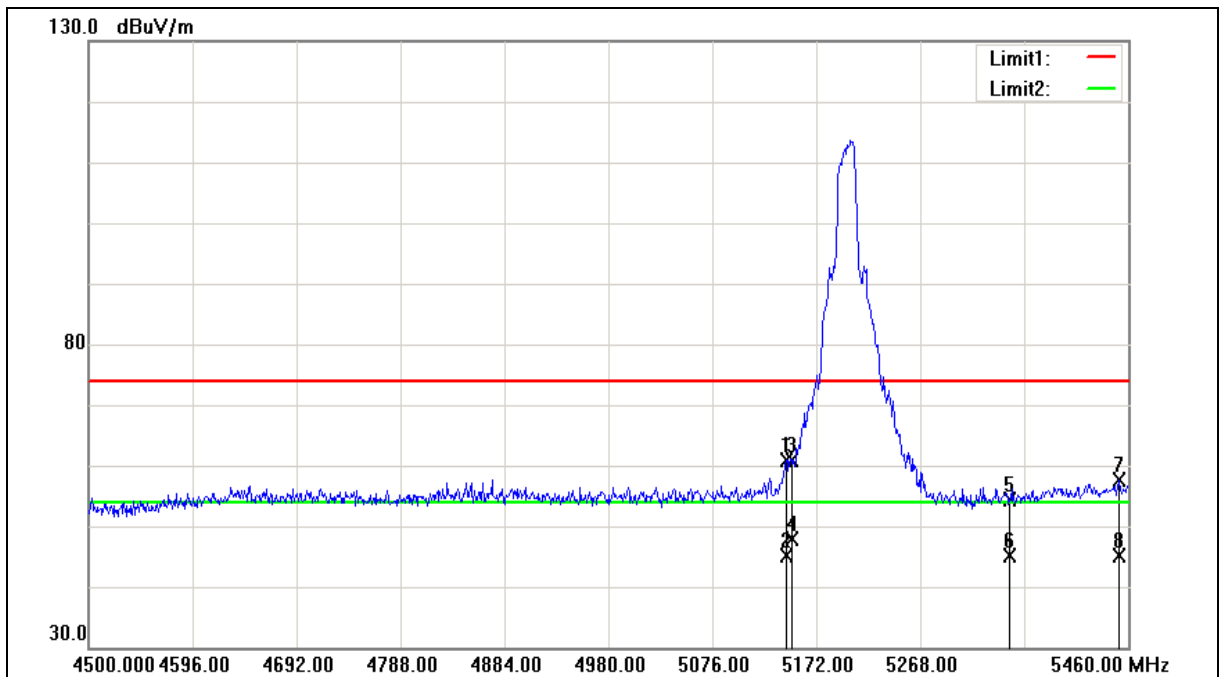



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.160	55.02	5.74	60.76	74.00	-13.24	peak
2	5144.160	39.45	5.74	45.19	54.00	-8.81	AVG
3	5150.000	55.19	5.75	60.94	74.00	-13.06	peak
4	5150.000	42.13	5.75	47.88	54.00	-6.12	AVG
5	5350.000	48.25	6.03	54.28	74.00	-19.72	peak
6	5350.000	39.22	6.03	45.25	54.00	-8.75	AVG
7	5451.360	51.37	6.19	57.56	74.00	-16.44	peak
8	5451.360	39.02	6.19	45.21	54.00	-8.79	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Horizontal		

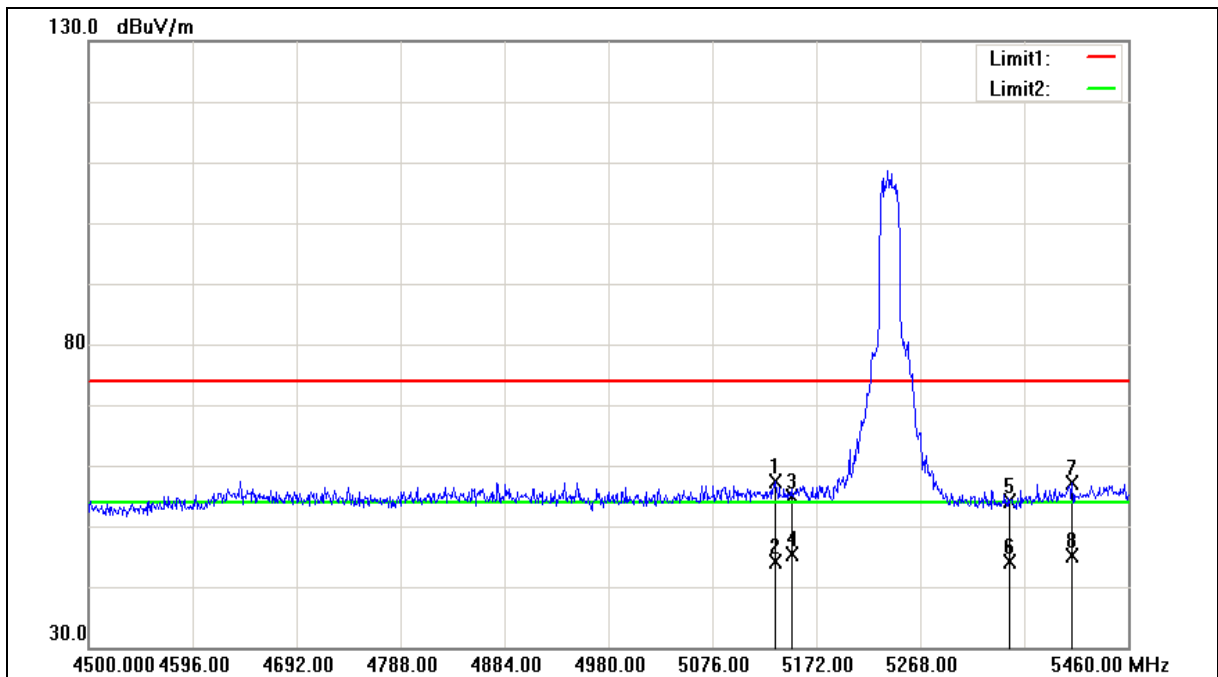



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5133.600	51.54	5.72	57.26	74.00	-16.74	peak
2	5133.600	38.29	5.72	44.01	54.00	-9.99	AVG
3	5150.000	49.05	5.75	54.80	74.00	-19.20	peak
4	5150.000	39.53	5.75	45.28	54.00	-8.72	AVG
5	5350.000	48.01	6.03	54.04	74.00	-19.96	peak
6	5350.000	38.07	6.03	44.10	54.00	-9.90	AVG
7	5408.160	50.94	6.12	57.06	74.00	-16.94	peak
8	5408.160	39.08	6.12	45.20	54.00	-8.80	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Vertical		

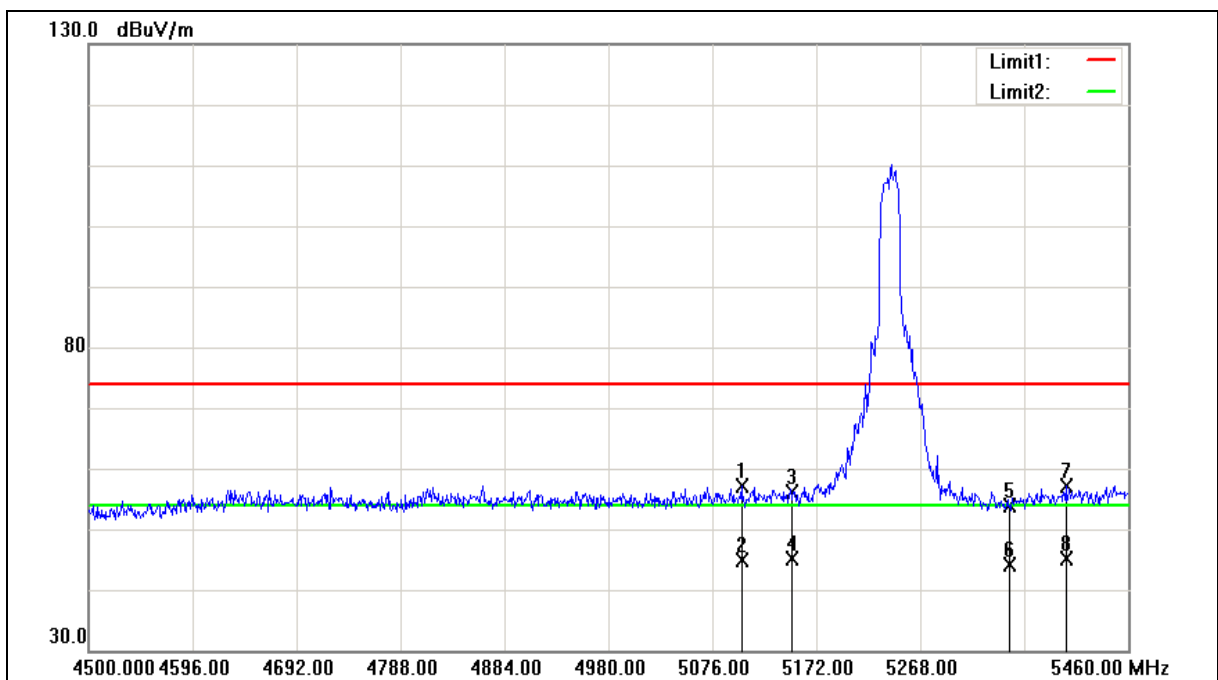



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5102.880	51.57	5.67	57.24	74.00	-16.76	peak
2	5102.880	39.10	5.67	44.77	54.00	-9.23	AVG
3	5150.000	50.30	5.75	56.05	74.00	-17.95	peak
4	5150.000	39.40	5.75	45.15	54.00	-8.85	AVG
5	5350.000	47.85	6.03	53.88	74.00	-20.12	peak
6	5350.000	38.06	6.03	44.09	54.00	-9.91	AVG
7	5402.400	50.95	6.12	57.07	74.00	-16.93	peak
8	5402.400	38.90	6.12	45.02	54.00	-8.98	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Horizontal		

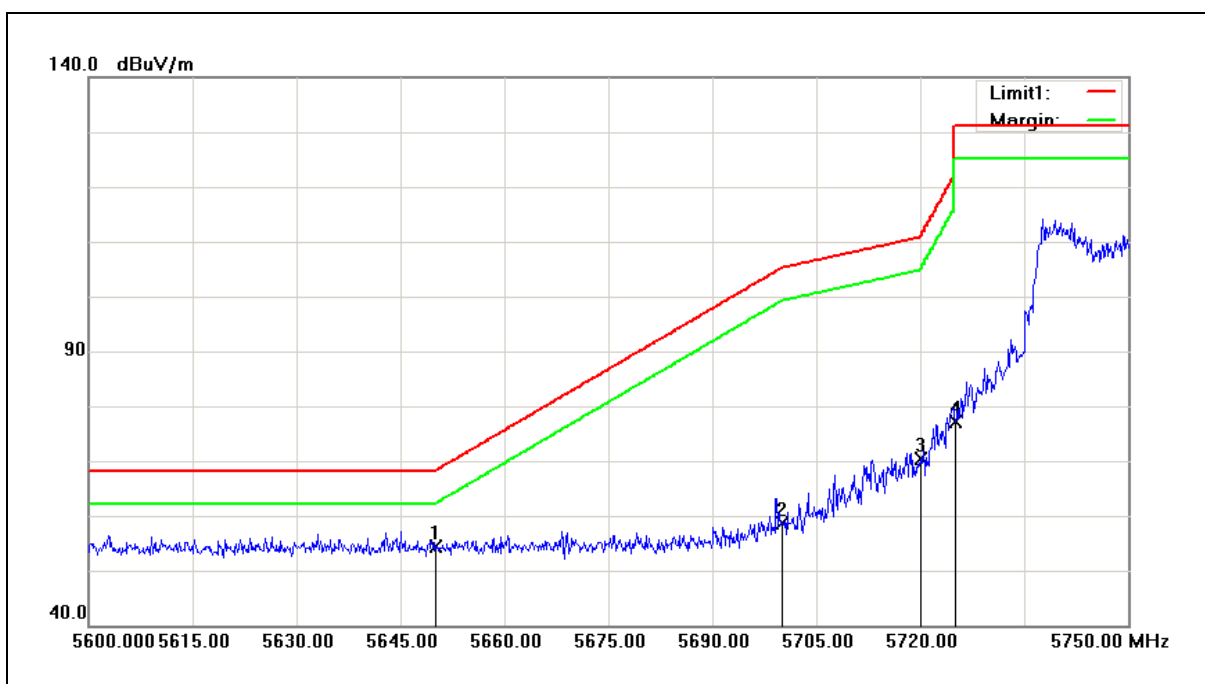


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.87	6.58	54.45	68.20	-13.75	peak
2	5700.000	52.00	6.68	58.68	105.20	-46.52	peak
3	5720.000	63.68	6.73	70.41	110.80	-40.39	peak
4	5725.000	70.44	6.74	77.18	122.20	-45.02	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Vertical		

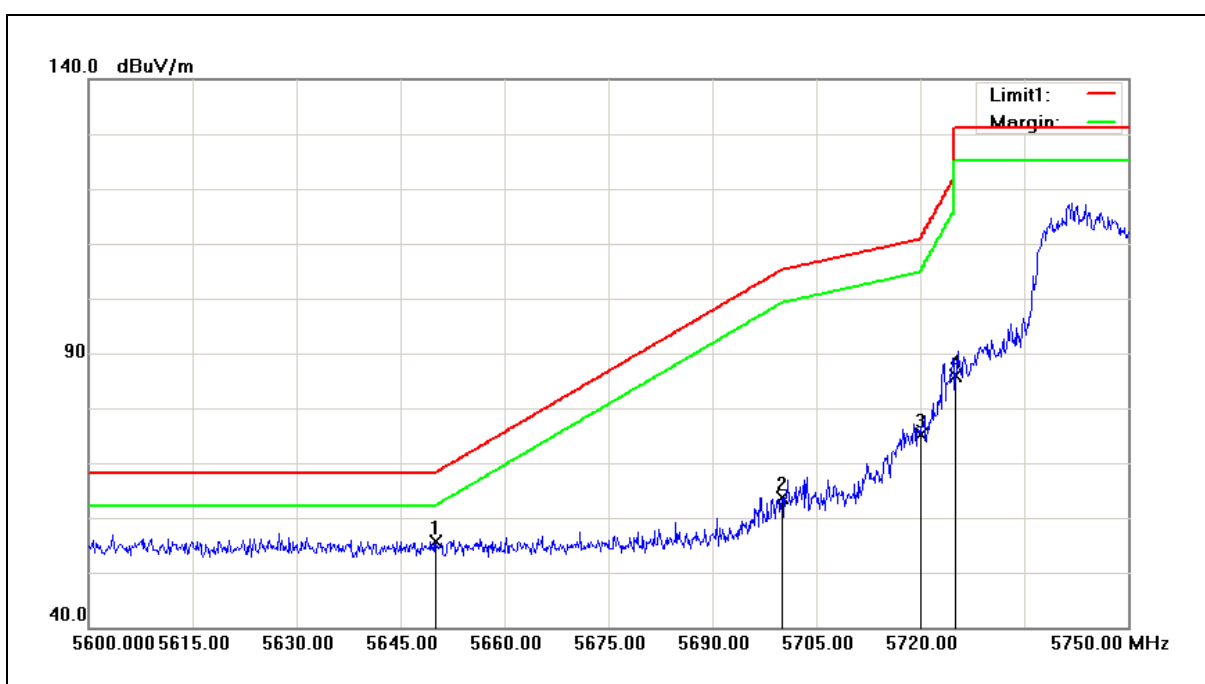

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	49.11	6.58	55.69	68.20	-12.51	peak
2	5700.000	56.85	6.68	63.53	105.20	-41.67	peak
3	5720.000	68.29	6.73	75.02	110.80	-35.78	peak
4	5725.000	79.07	6.74	85.81	122.20	-36.39	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Horizontal		

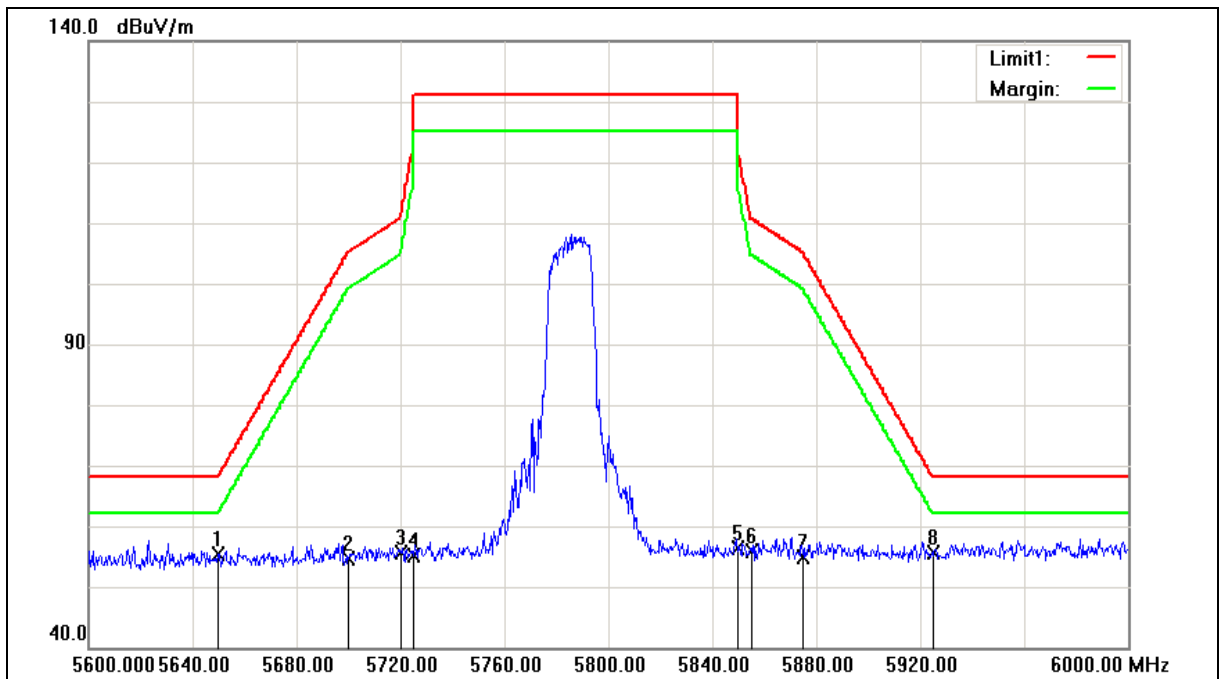



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.75	6.58	55.33	68.20	-12.87	peak
2	5700.000	47.92	6.68	54.60	105.20	-50.60	peak
3	5720.000	48.79	6.73	55.52	110.80	-55.28	peak
4	5725.000	48.39	6.74	55.13	122.20	-67.07	peak
5	5850.000	49.45	6.99	56.44	122.20	-65.76	peak
6	5855.000	48.90	7.00	55.90	110.80	-54.90	peak
7	5875.000	47.94	7.05	54.99	105.20	-50.21	peak
8	5925.000	48.45	7.16	55.61	68.20	-12.59	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Vertical		

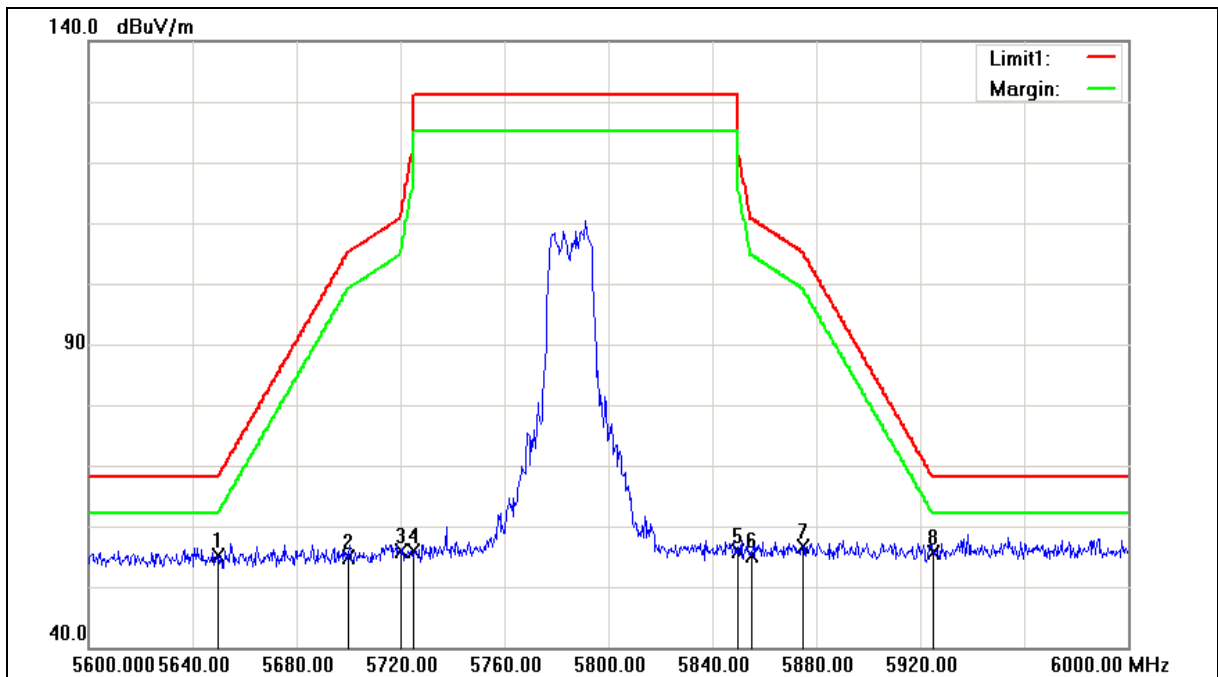



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/16/2017
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	48.54	6.58	55.12	68.20	-13.08	peak
2	5700.000	48.19	6.68	54.87	105.20	-50.33	peak
3	5720.000	49.09	6.73	55.82	110.80	-54.98	peak
4	5725.000	49.02	6.74	55.76	122.20	-66.44	peak
5	5850.000	48.87	6.99	55.86	122.20	-66.34	peak
6	5855.000	48.11	7.00	55.11	110.80	-55.69	peak
7	5875.000	49.53	7.05	56.58	105.20	-48.62	peak
8	5925.000	48.43	7.16	55.59	68.20	-12.61	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Horizontal		

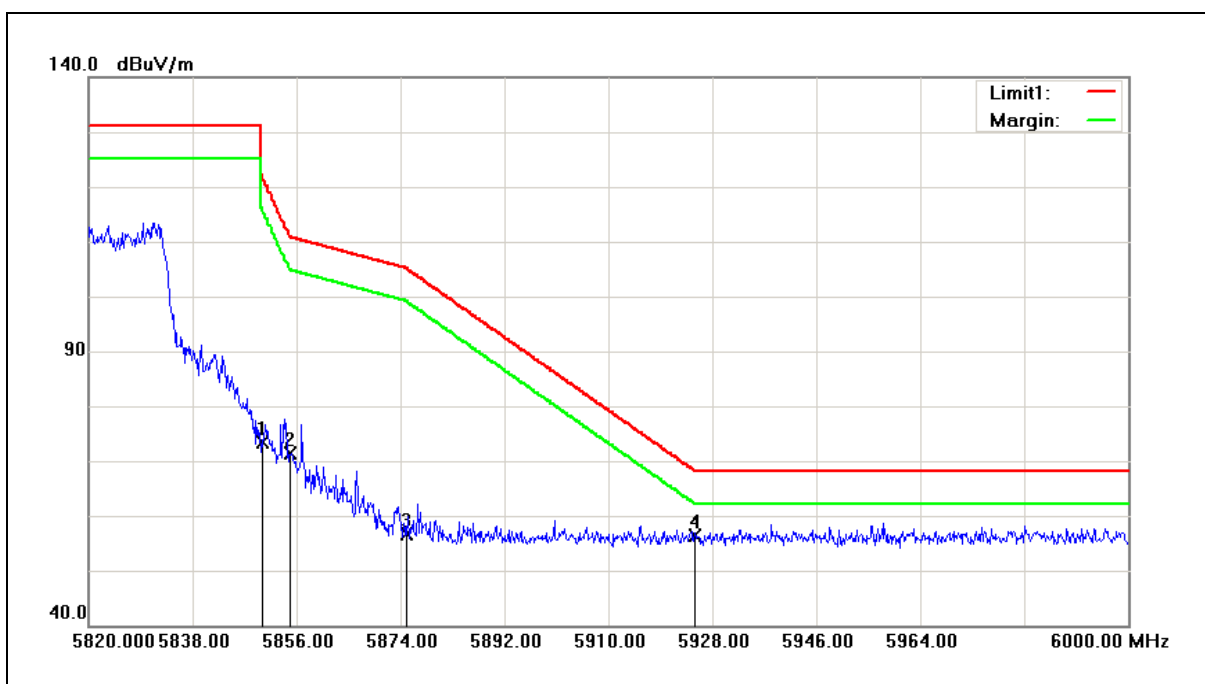


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	66.48	6.99	73.47	122.20	-48.73	peak
2	5855.000	64.44	7.00	71.44	110.80	-39.36	peak
3	5875.000	49.46	7.05	56.51	105.20	-48.69	peak
4	5925.000	49.28	7.16	56.44	68.20	-11.76	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 2	Date:	09/13/2017
Ant.Polar.:	Vertical		

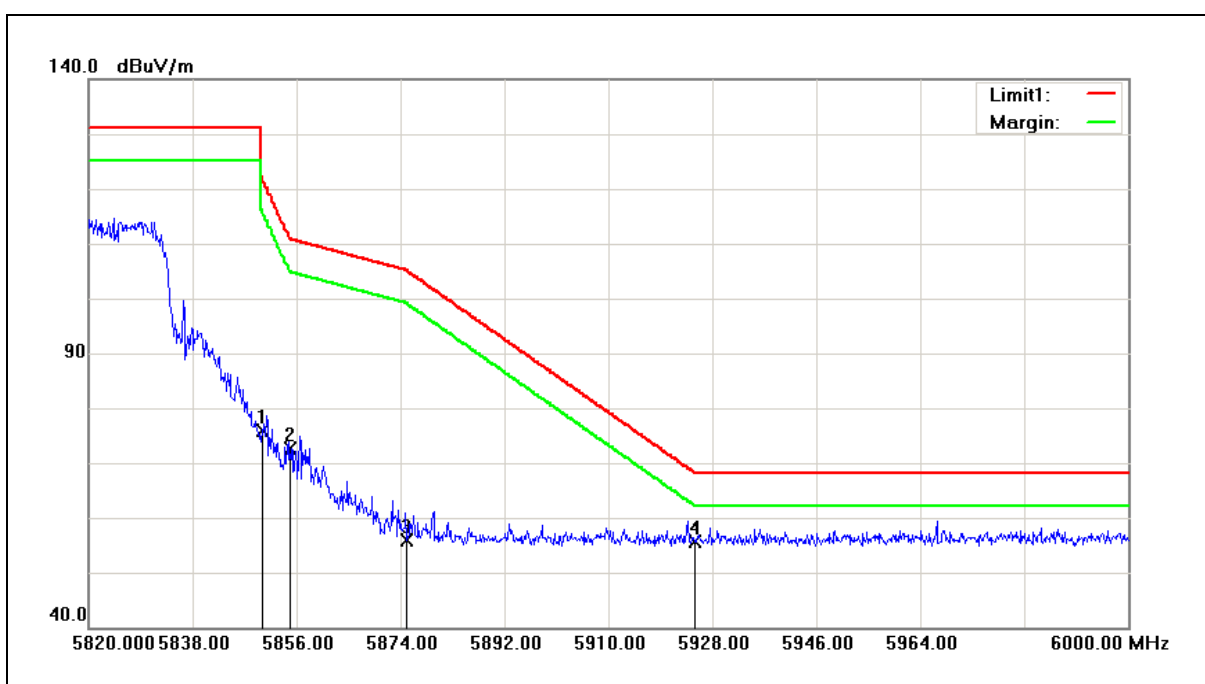

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	68.82	6.99	75.81	122.20	-46.39	peak
2	5855.000	65.71	7.00	72.71	110.80	-38.09	peak
3	5875.000	48.90	7.05	55.95	105.20	-49.25	peak
4	5925.000	48.35	7.16	55.51	68.20	-12.69	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/13/2017
Ant.Polar.:	Horizontal		

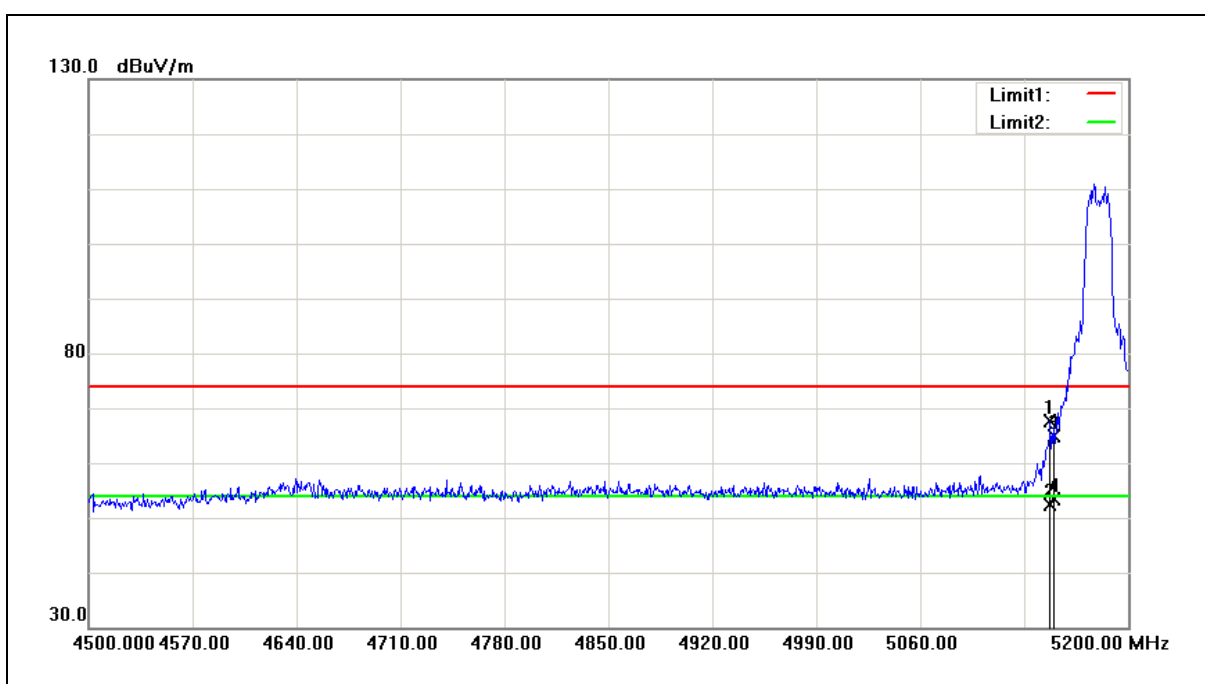

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.500	61.96	5.74	67.70	74.00	-6.30	peak
2	5147.500	46.75	5.74	52.49	54.00	-1.51	AVG
3	5150.000	59.09	5.75	64.84	74.00	-9.16	peak
4	5150.000	47.72	5.75	53.47	54.00	-0.53	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5180MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/13/2017
Ant.Polar.:	Vertical		

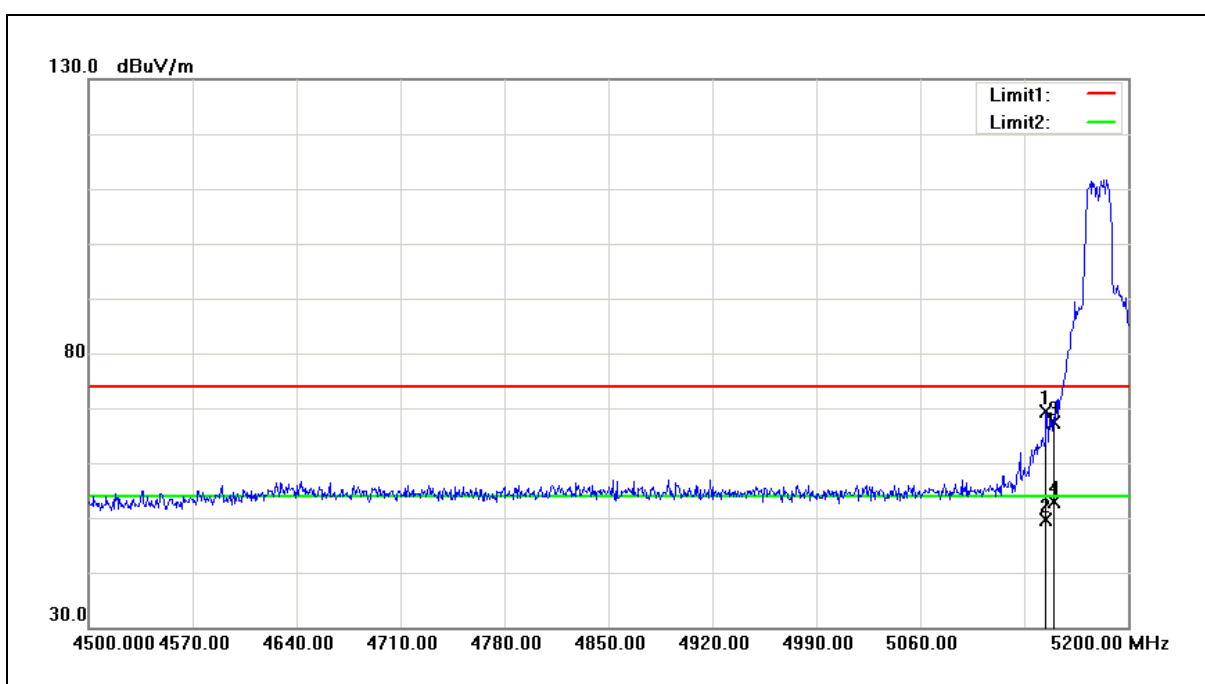

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.700	63.70	5.74	69.44	74.00	-4.56	peak
2	5144.700	43.98	5.74	49.72	54.00	-4.28	AVG
3	5150.000	61.67	5.75	67.42	74.00	-6.58	peak
4	5150.000	47.02	5.75	52.77	54.00	-1.23	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/13/2017
Ant.Polar.:	Horizontal		

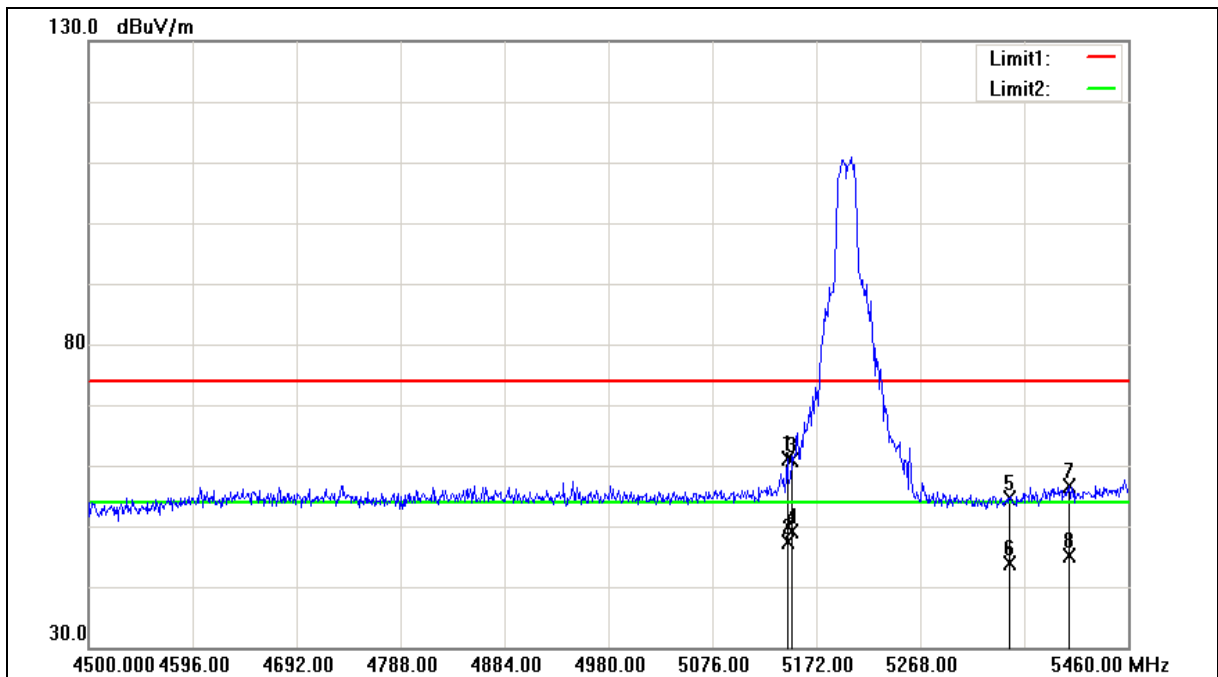



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/13/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5145.120	55.33	5.74	61.07	74.00	-12.93	peak
2	5145.120	41.58	5.74	47.32	54.00	-6.68	AVG
3	5150.000	55.10	5.75	60.85	74.00	-13.15	peak
4	5150.000	43.28	5.75	49.03	54.00	-4.97	AVG
5	5350.000	48.55	6.03	54.58	74.00	-19.42	peak
6	5350.000	37.81	6.03	43.84	54.00	-10.16	AVG
7	5405.280	50.47	6.12	56.59	74.00	-17.41	peak
8	5405.280	38.94	6.12	45.06	54.00	-8.94	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/13/2017
Ant.Polar.:	Vertical		

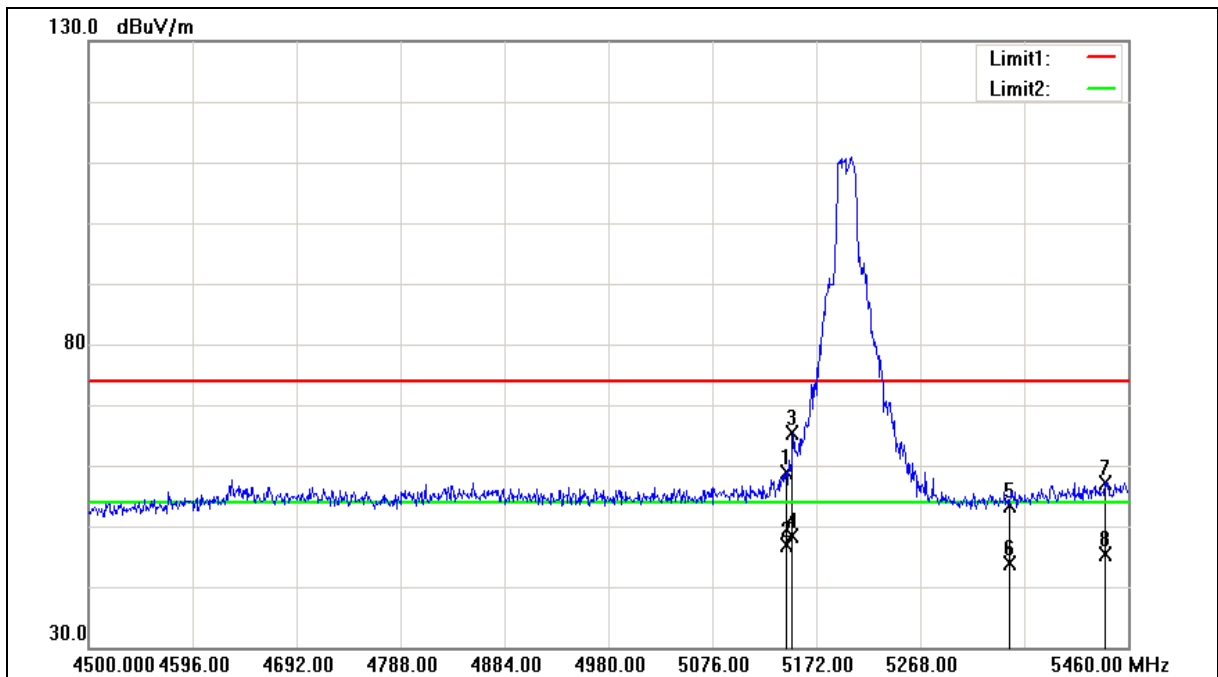



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5200MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/13/2017
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.160	53.08	5.74	58.82	74.00	-15.18	peak
2	5144.160	41.22	5.74	46.96	54.00	-7.04	AVG
3	5150.000	59.62	5.75	65.37	74.00	-8.63	peak
4	5150.000	42.60	5.75	48.35	54.00	-5.65	AVG
5	5350.000	47.25	6.03	53.28	74.00	-20.72	peak
6	5350.000	37.78	6.03	43.81	54.00	-10.19	AVG
7	5438.880	51.08	6.17	57.25	74.00	-16.75	peak
8	5438.880	39.23	6.17	45.40	54.00	-8.60	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/13/2017
Ant.Polar.:	Horizontal		

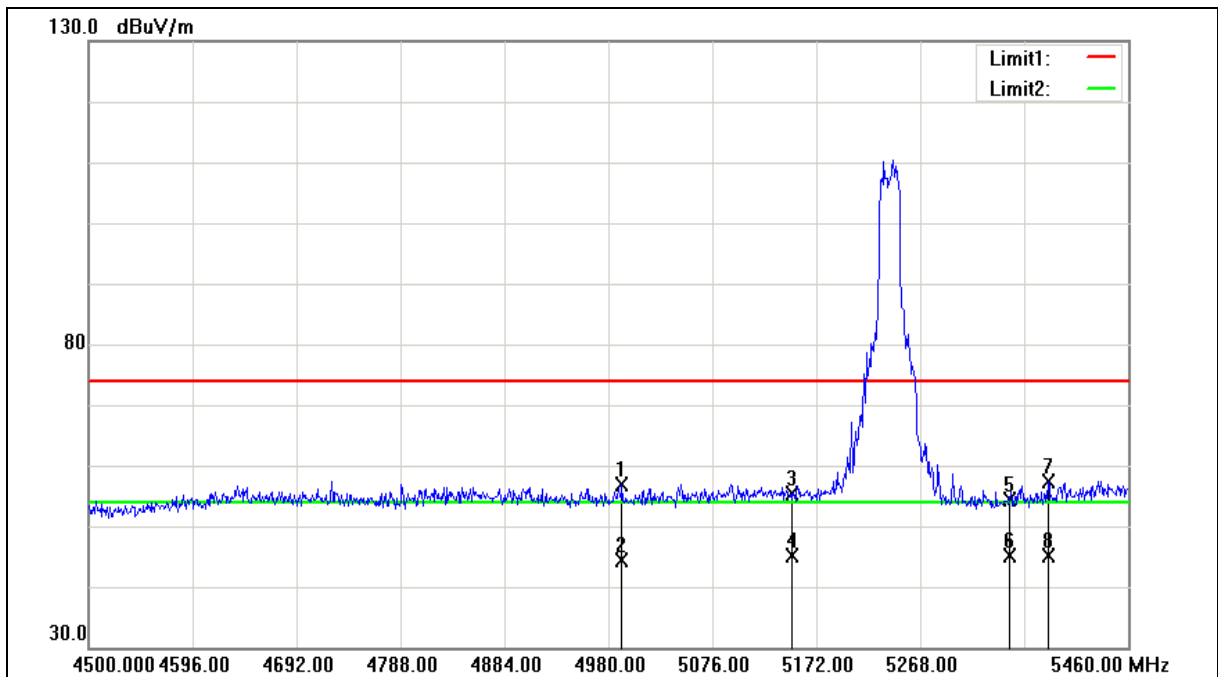



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/13/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4992.480	51.46	5.49	56.95	74.00	-17.05	peak
2	4992.480	38.79	5.49	44.28	54.00	-9.72	AVG
3	5150.000	49.54	5.75	55.29	74.00	-18.71	peak
4	5150.000	39.32	5.75	45.07	54.00	-8.93	AVG
5	5350.000	48.26	6.03	54.29	74.00	-19.71	peak
6	5350.000	39.04	6.03	45.07	54.00	-8.93	AVG
7	5386.080	51.40	6.09	57.49	74.00	-16.51	peak
8	5386.080	39.03	6.09	45.12	54.00	-8.88	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/13/2017
Ant.Polar.:	Vertical		

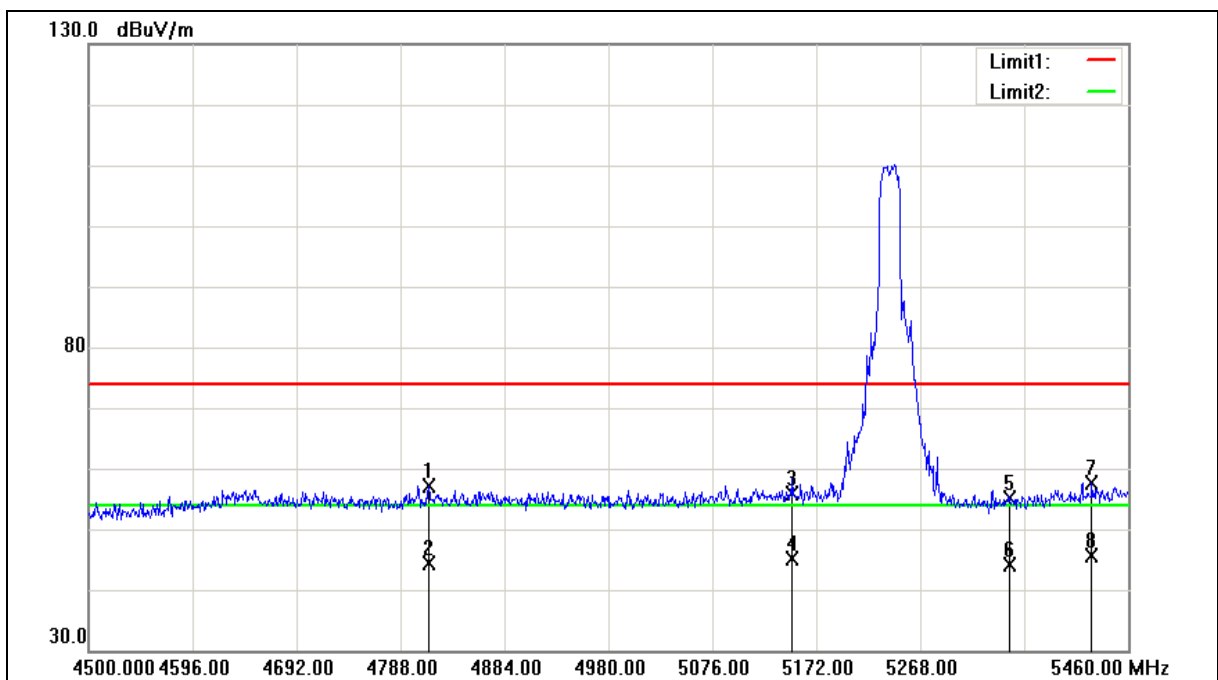



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5240MHz	Temp.(°C)/Hum. (%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/13/2017
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4813.920	52.22	4.93	57.15	74.00	-16.85	peak
2	4813.920	39.57	4.93	44.50	54.00	-9.50	AVG
3	5150.000	50.12	5.75	55.87	74.00	-18.13	peak
4	5150.000	39.38	5.75	45.13	54.00	-8.87	AVG
5	5350.000	49.16	6.03	55.19	74.00	-18.81	peak
6	5350.000	38.04	6.03	44.07	54.00	-9.93	AVG
7	5426.400	51.53	6.16	57.69	74.00	-16.31	peak
8	5426.400	39.35	6.16	45.51	54.00	-8.49	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Horizontal		

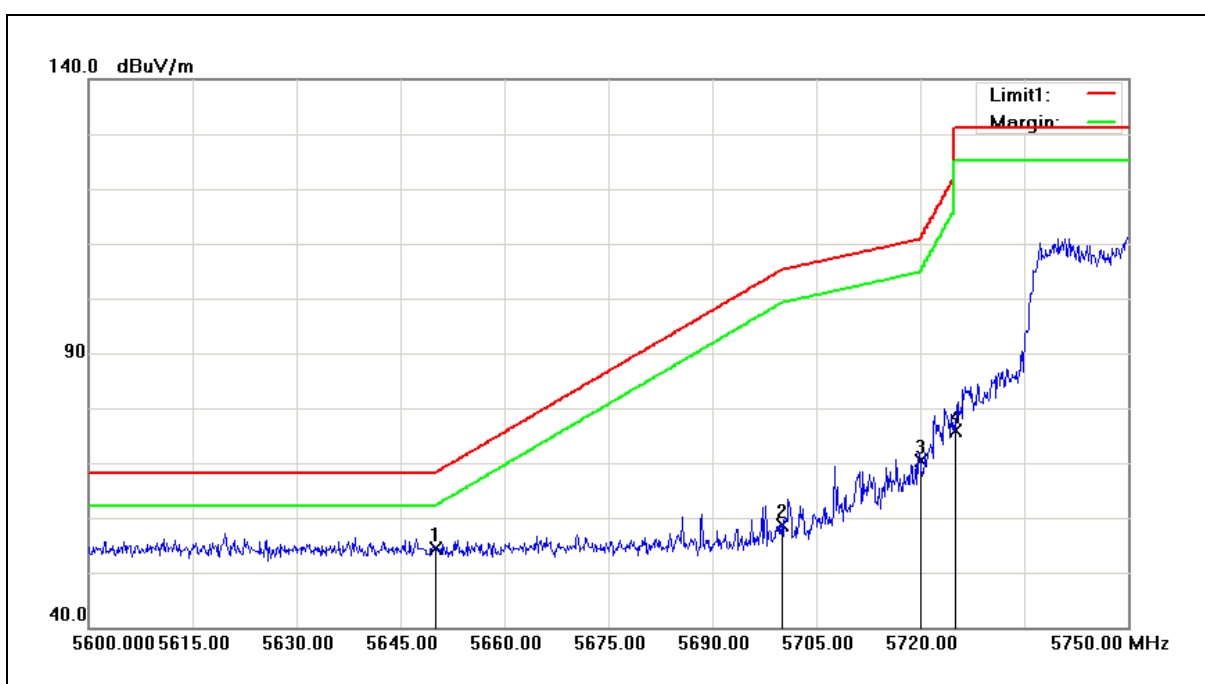


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.77	6.58	54.35	68.20	-13.85	peak
2	5700.000	51.89	6.68	58.57	105.20	-46.63	peak
3	5720.000	63.58	6.73	70.31	110.80	-40.49	peak
4	5725.000	69.10	6.74	75.84	122.20	-46.36	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5745MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Vertical		

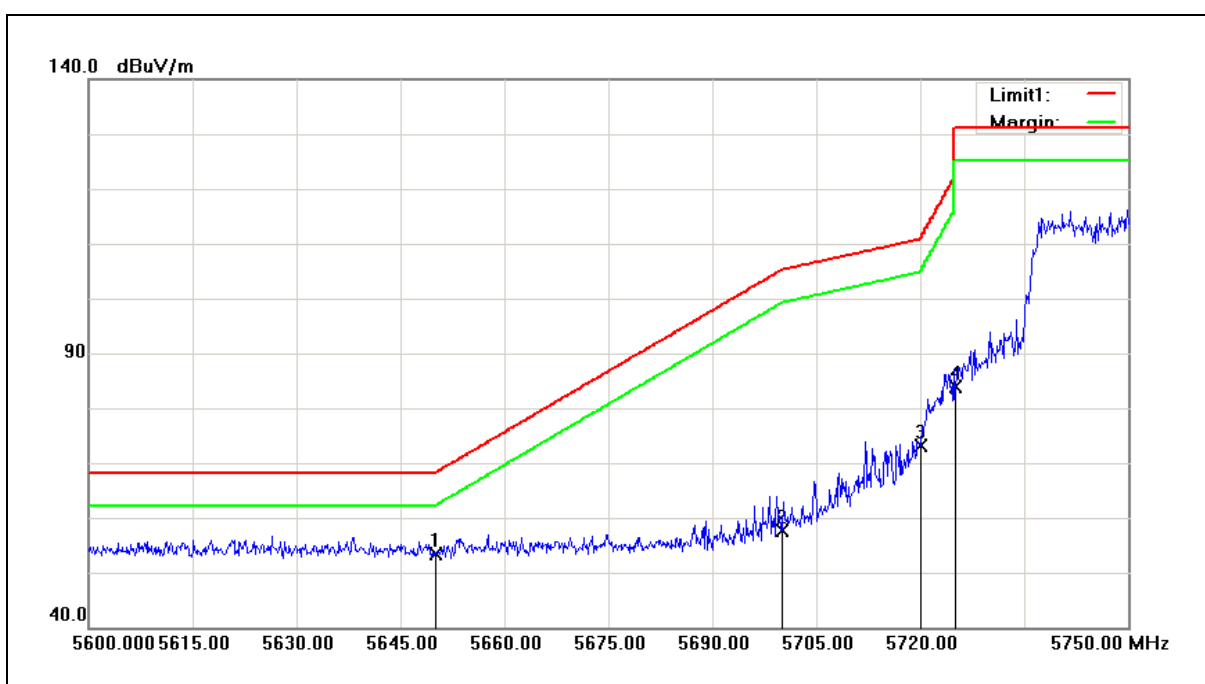

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.86	6.58	53.44	68.20	-14.76	peak
2	5700.000	51.02	6.68	57.70	105.20	-47.50	peak
3	5720.000	66.39	6.73	73.12	110.80	-37.68	peak
4	5725.000	77.13	6.74	83.87	122.20	-38.33	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Horizontal		

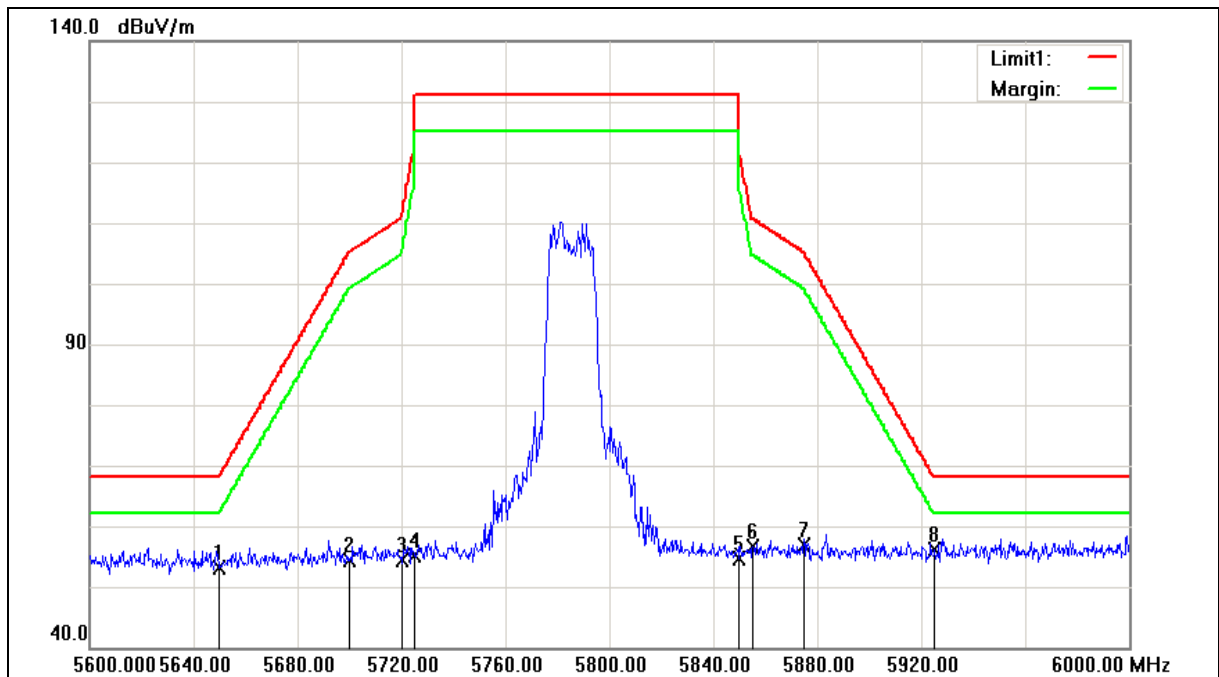



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	46.67	6.58	53.25	68.20	-14.95	peak
2	5700.000	47.77	6.68	54.45	105.20	-50.75	peak
3	5720.000	47.58	6.73	54.31	110.80	-56.49	peak
4	5725.000	48.45	6.74	55.19	122.20	-67.01	peak
5	5850.000	47.63	6.99	54.62	122.20	-67.58	peak
6	5855.000	49.66	7.00	56.66	110.80	-54.14	peak
7	5875.000	49.90	7.05	56.95	105.20	-48.25	peak
8	5925.000	49.05	7.16	56.21	68.20	-11.99	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Vertical		

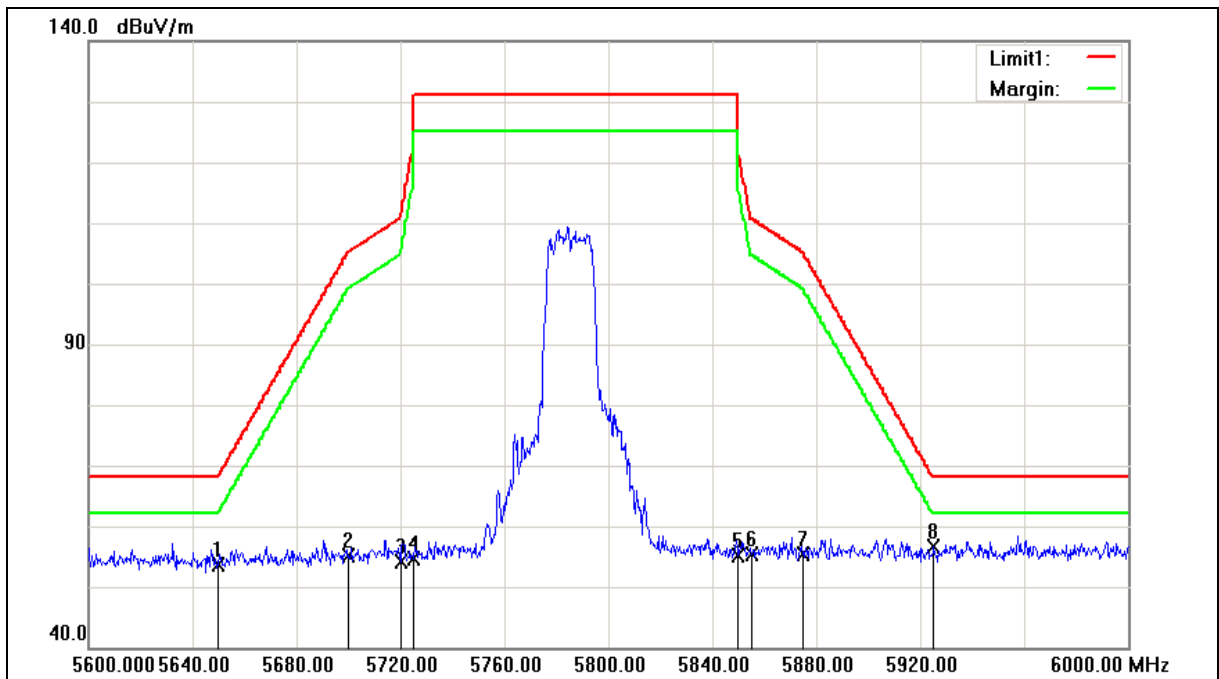



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5785MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	47.14	6.58	53.72	68.20	-14.48	peak
2	5700.000	48.36	6.68	55.04	105.20	-50.16	peak
3	5720.000	47.31	6.73	54.04	110.80	-56.76	peak
4	5725.000	47.94	6.74	54.68	122.20	-67.52	peak
5	5850.000	48.09	6.99	55.08	122.20	-67.12	peak
6	5855.000	48.39	7.00	55.39	110.80	-55.41	peak
7	5875.000	48.27	7.05	55.32	105.20	-49.88	peak
8	5925.000	49.46	7.16	56.62	68.20	-11.58	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Horizontal		

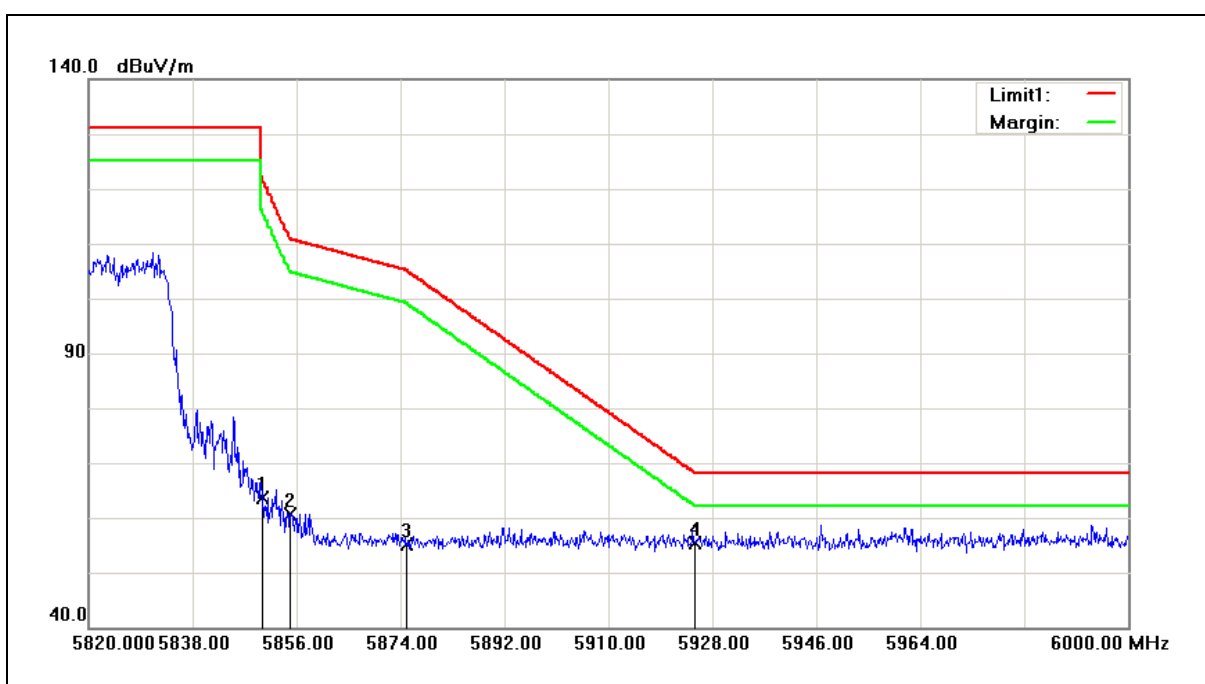


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	56.64	6.99	63.63	122.20	-58.57	peak
2	5855.000	53.54	7.00	60.54	110.80	-50.26	peak
3	5875.000	48.10	7.05	55.15	105.20	-50.05	peak
4	5925.000	48.17	7.16	55.33	68.20	-12.87	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5825MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 3	Date:	09/16/2017
Ant.Polar.:	Vertical		

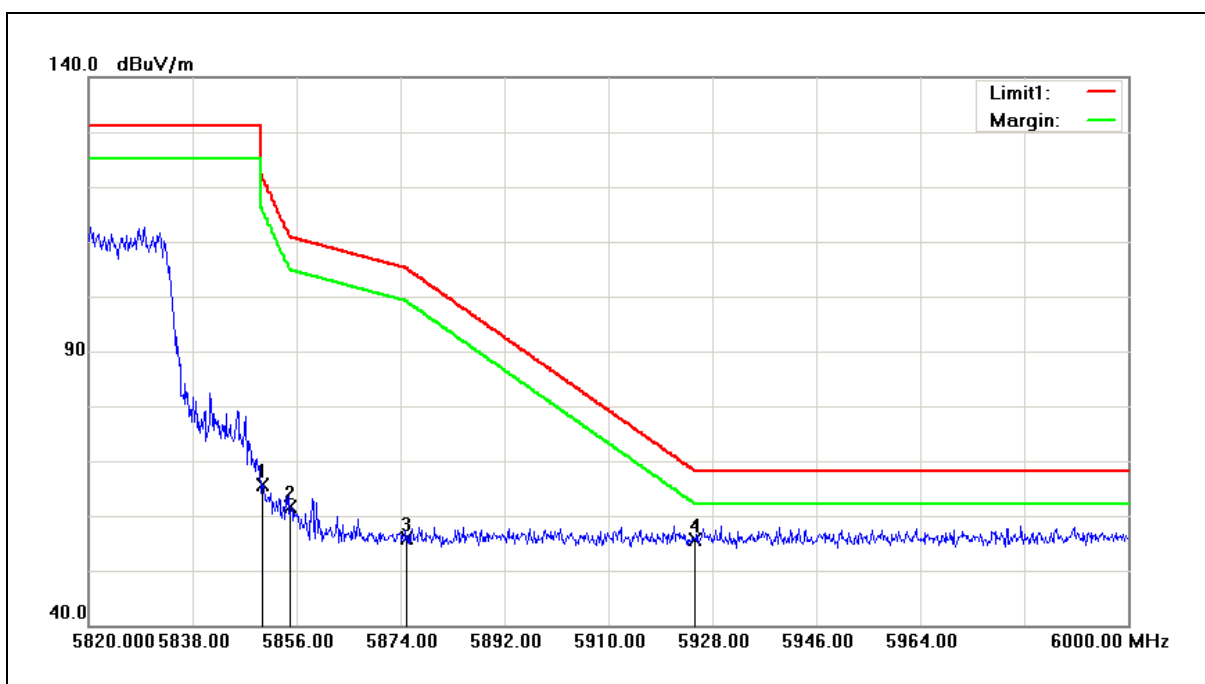

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	58.61	6.99	65.60	122.20	-56.60	peak
2	5855.000	54.60	7.00	61.60	110.80	-49.20	peak
3	5875.000	48.89	7.05	55.94	105.20	-49.26	peak
4	5925.000	48.50	7.16	55.66	68.20	-12.54	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/13/2017
Ant.Polar.:	Horizontal		

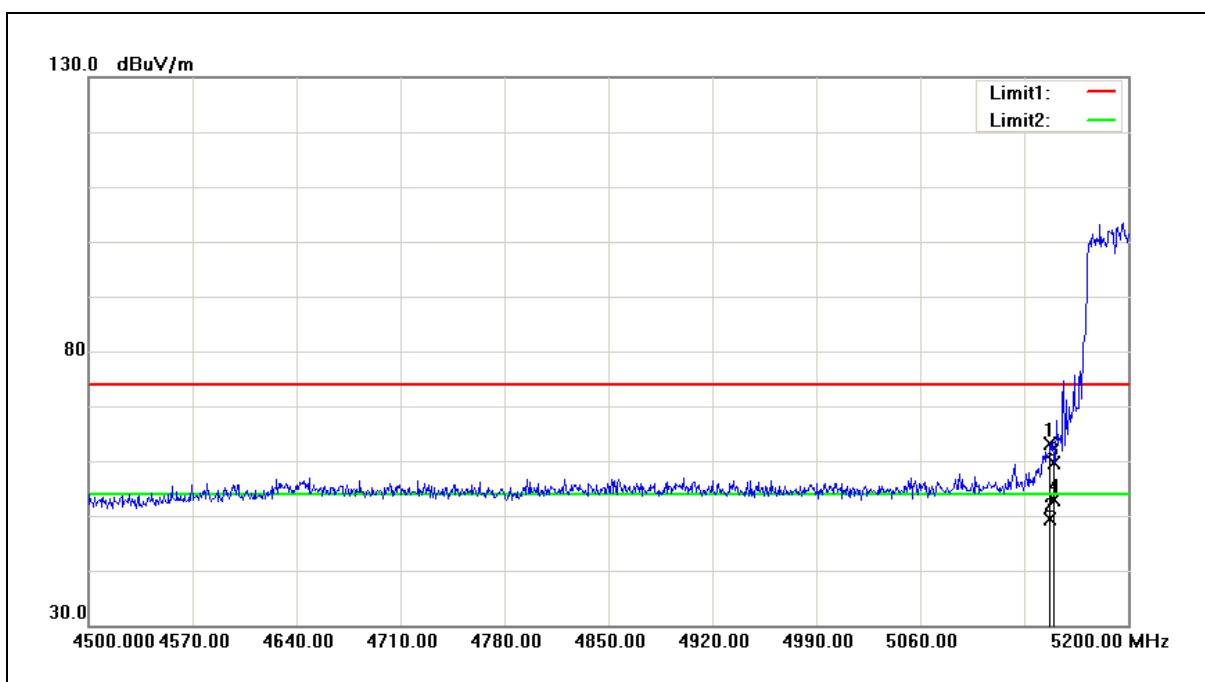


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5147.500	57.45	5.74	63.19	74.00	-10.81	peak
2	5147.500	43.65	5.74	49.39	54.00	-4.61	AVG
3	5150.000	53.94	5.75	59.69	74.00	-14.31	peak
4	5150.000	47.08	5.75	52.83	54.00	-1.17	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5190MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/13/2017
Ant.Polar.:	Vertical		

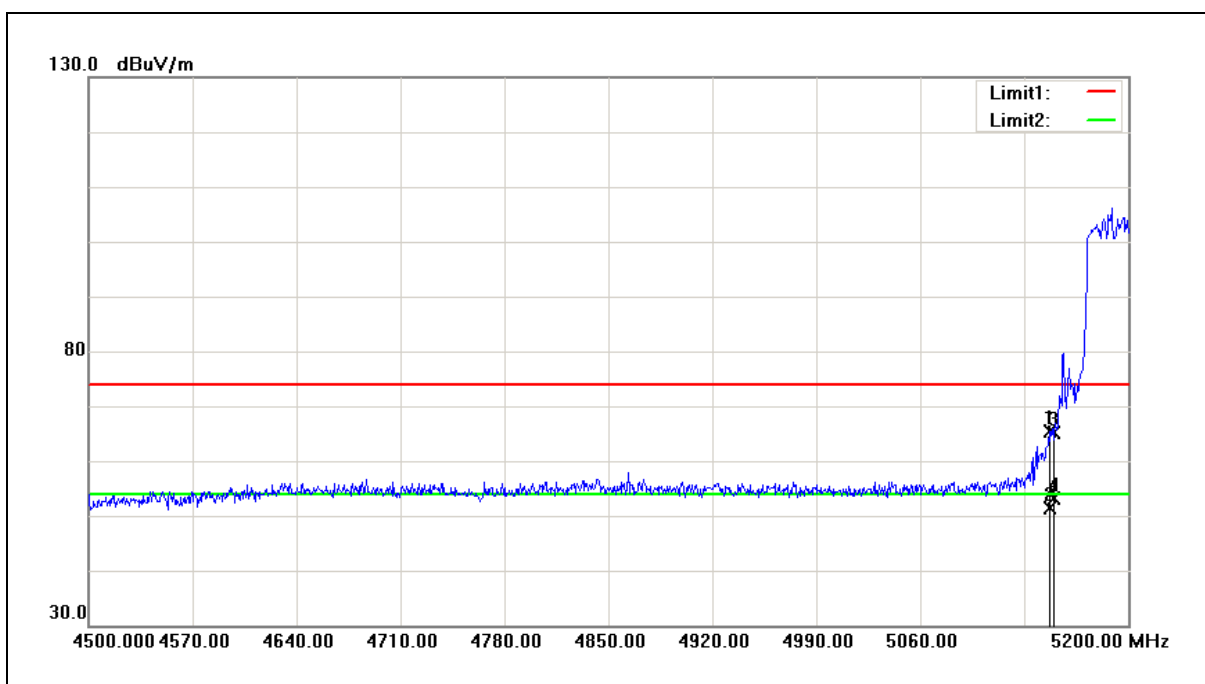

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.800	59.64	5.74	65.38	74.00	-8.62	peak
2	5146.800	45.52	5.74	51.26	54.00	-2.74	AVG
3	5150.000	59.35	5.75	65.10	74.00	-8.90	peak
4	5150.000	47.40	5.75	53.15	54.00	-0.85	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/13/2017
Ant.Polar.:	Horizontal		

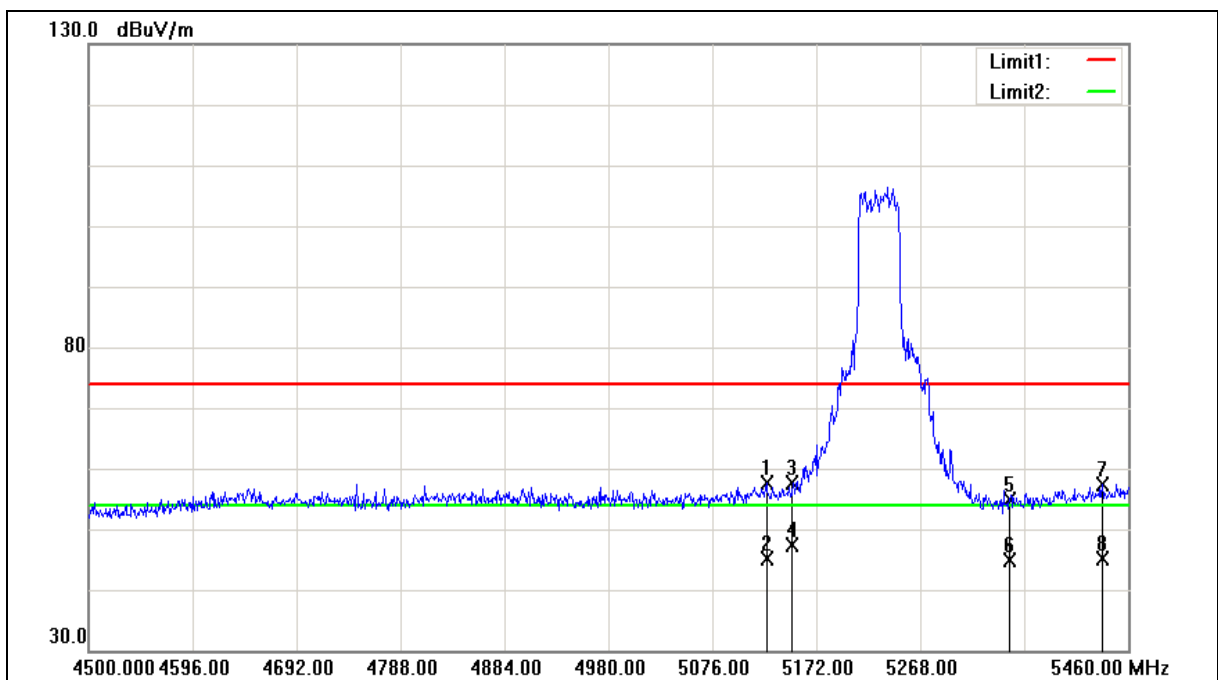



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/13/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5125.920	51.91	5.72	57.63	74.00	-16.37	peak
2	5125.920	39.33	5.72	45.05	54.00	-8.95	AVG
3	5150.000	51.83	5.75	57.58	74.00	-16.42	peak
4	5150.000	41.56	5.75	47.31	54.00	-6.69	AVG
5	5350.000	48.83	6.03	54.86	74.00	-19.14	peak
6	5350.000	38.94	6.03	44.97	54.00	-9.03	AVG
7	5436.000	51.17	6.17	57.34	74.00	-16.66	peak
8	5436.000	38.96	6.17	45.13	54.00	-8.87	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/13/2017
Ant.Polar.:	Vertical		

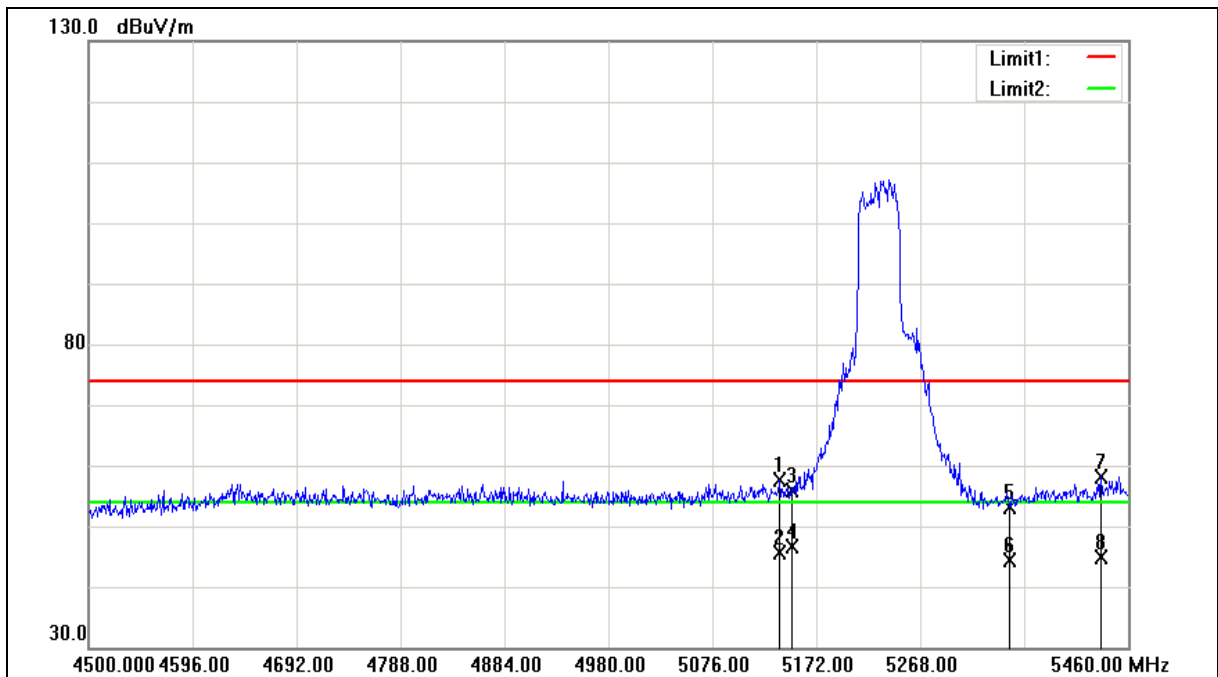



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5230MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/13/2017
Ant.Polar.:	Vertical		


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5138.400	51.78	5.73	57.51	74.00	-16.49	peak
2	5138.400	39.99	5.73	45.72	54.00	-8.28	AVG
3	5150.000	50.21	5.75	55.96	74.00	-18.04	peak
4	5150.000	40.91	5.75	46.66	54.00	-7.34	AVG
5	5350.000	47.02	6.03	53.05	74.00	-20.95	peak
6	5350.000	38.35	6.03	44.38	54.00	-9.62	AVG
7	5435.040	52.08	6.17	58.25	74.00	-15.75	peak
8	5435.040	38.62	6.17	44.79	54.00	-9.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/13/2017
Ant.Polar.:	Horizontal		

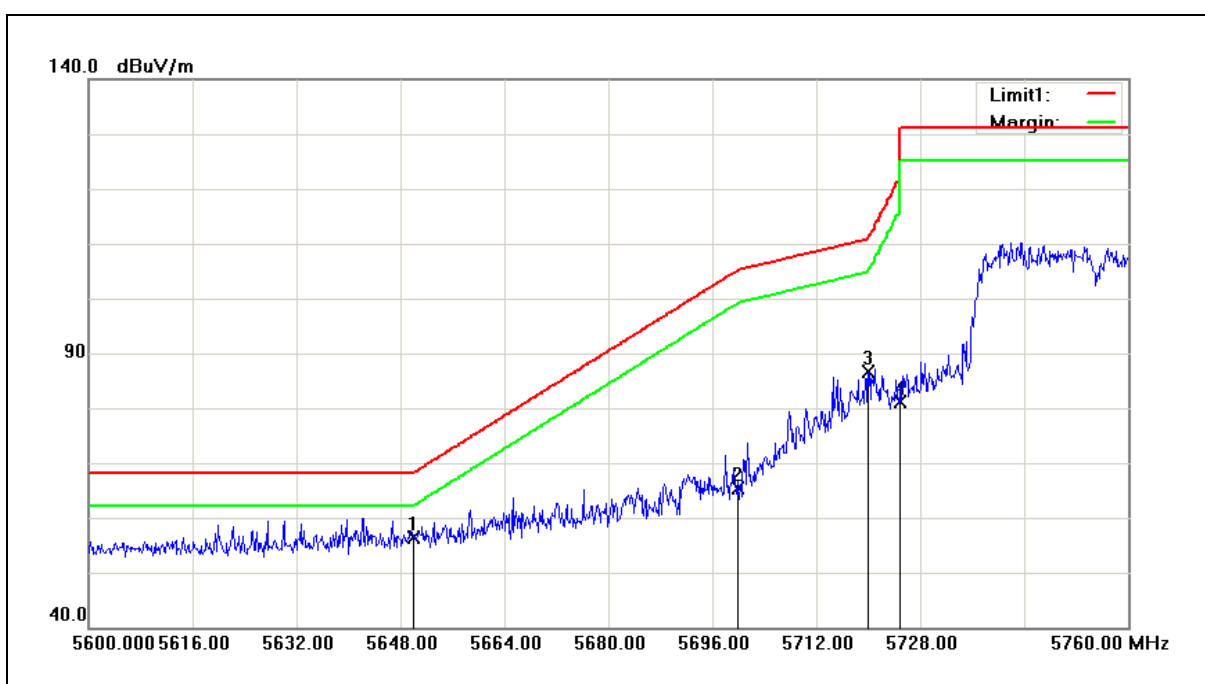


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	49.87	6.58	56.45	68.20	-11.75	peak
2	5700.000	58.65	6.68	65.33	105.20	-39.87	peak
3	5720.000	79.88	6.73	86.61	110.80	-24.19	peak
4	5725.000	74.30	6.74	81.04	122.20	-41.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5755MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/13/2017
Ant.Polar.:	Vertical		

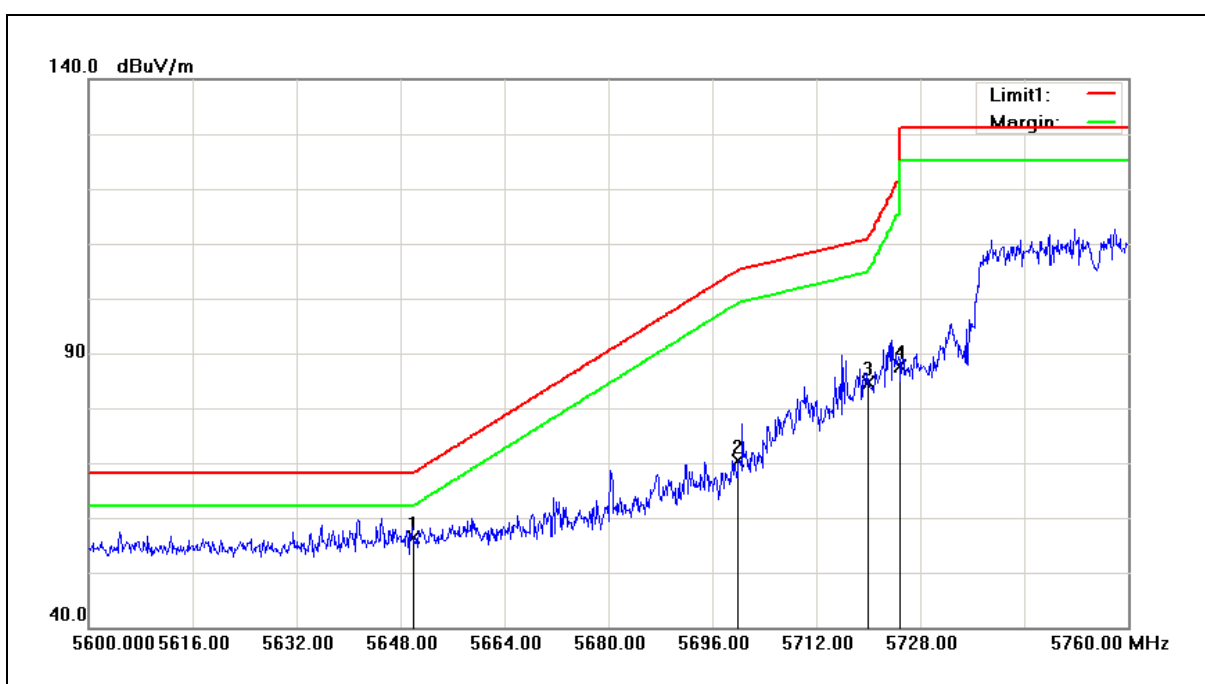


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	49.69	6.58	56.27	68.20	-11.93	peak
2	5700.000	63.79	6.68	70.47	105.20	-34.73	peak
3	5720.000	77.93	6.73	84.66	110.80	-26.14	peak
4	5725.000	80.92	6.74	87.66	122.20	-34.54	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/16/2017
Ant.Polar.:	Horizontal		

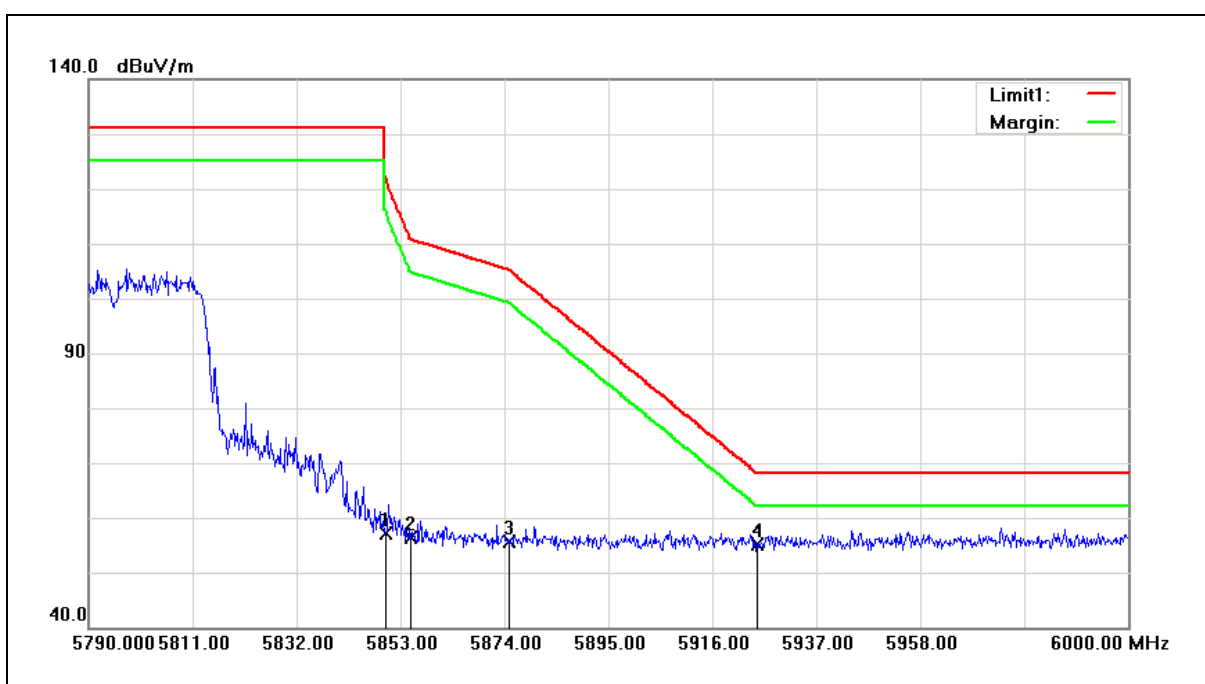

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	50.03	6.99	57.02	122.20	-65.18	peak
2	5855.000	49.46	7.00	56.46	110.80	-54.34	peak
3	5875.000	48.60	7.05	55.65	105.20	-49.55	peak
4	5925.000	47.85	7.16	55.01	68.20	-13.19	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5795MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 4	Date:	09/16/2017
Ant.Polar.:	Vertical		

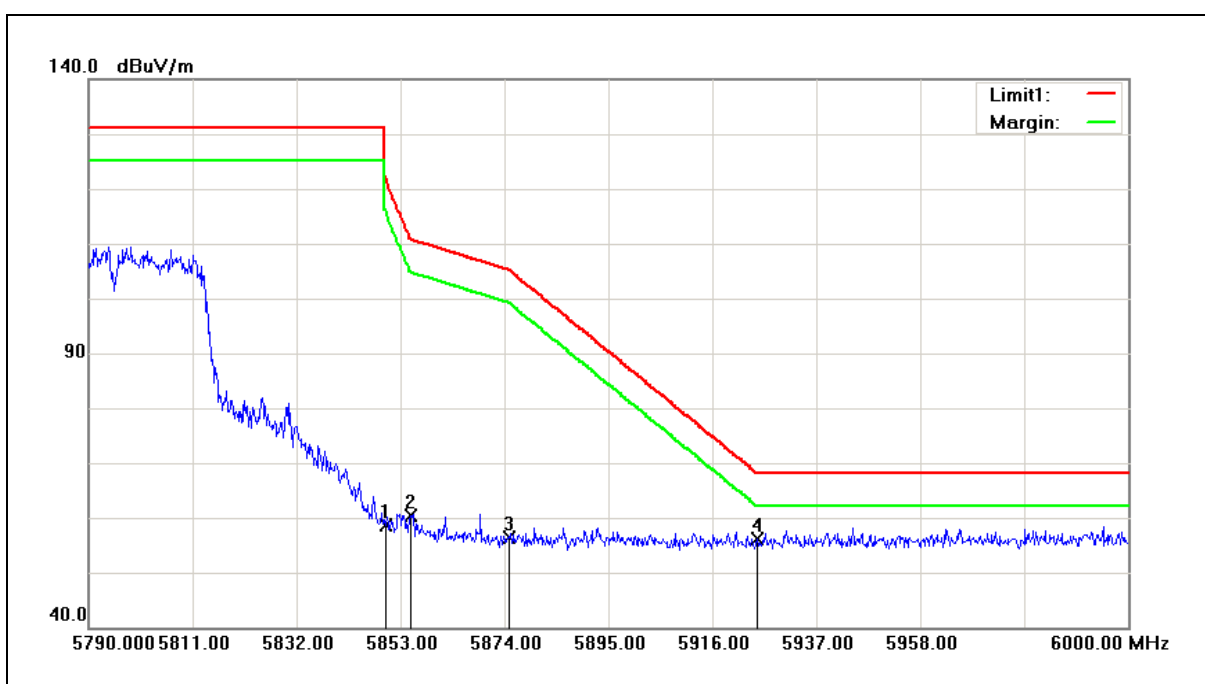

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	51.64	6.99	58.63	122.20	-63.57	peak
2	5855.000	53.44	7.00	60.44	110.80	-50.36	peak
3	5875.000	49.28	7.05	56.33	105.20	-48.87	peak
4	5925.000	48.98	7.16	56.14	68.20	-12.06	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/13/2017
Ant.Polar.:	Horizontal		

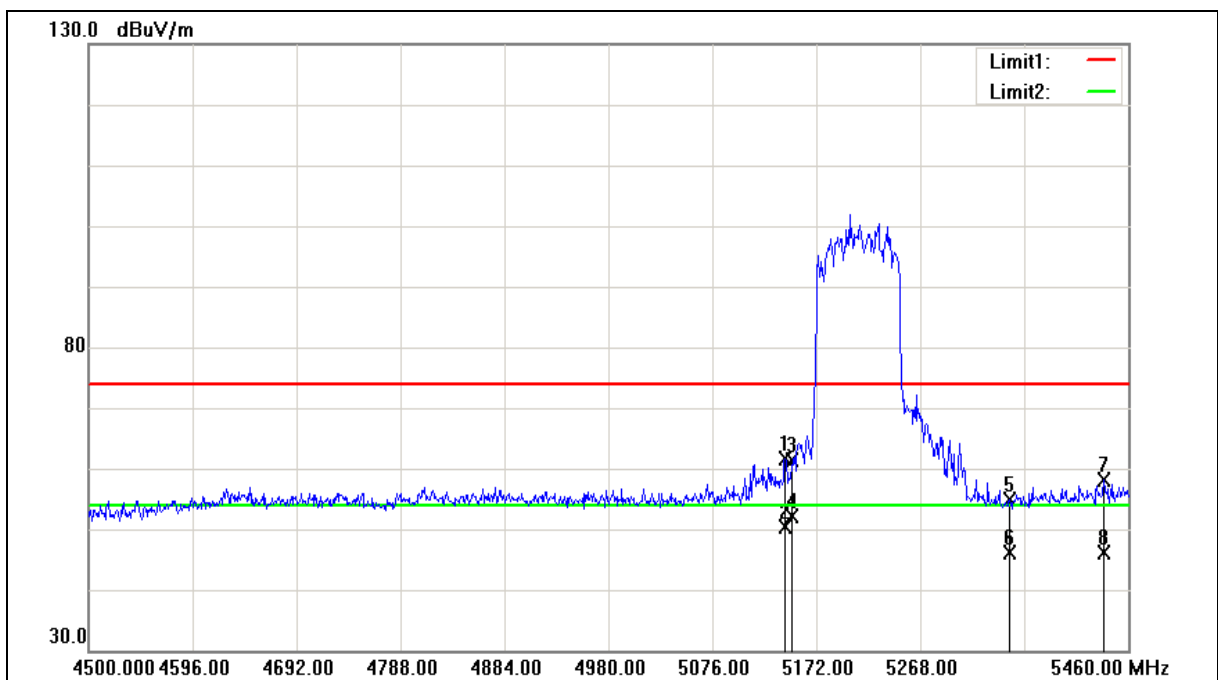



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/13/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.200	55.77	5.74	61.51	74.00	-12.49	peak
2	5143.200	44.70	5.74	50.44	54.00	-3.56	AVG
3	5150.000	55.69	5.75	61.44	74.00	-12.56	peak
4	5150.000	46.48	5.75	52.23	54.00	-1.77	AVG
5	5350.000	48.90	6.03	54.93	74.00	-19.07	peak
6	5350.000	40.02	6.03	46.05	54.00	-7.95	AVG
7	5437.920	51.87	6.17	58.04	74.00	-15.96	peak
8	5437.920	39.94	6.17	46.11	54.00	-7.89	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/13/2017
Ant.Polar.:	Vertical		

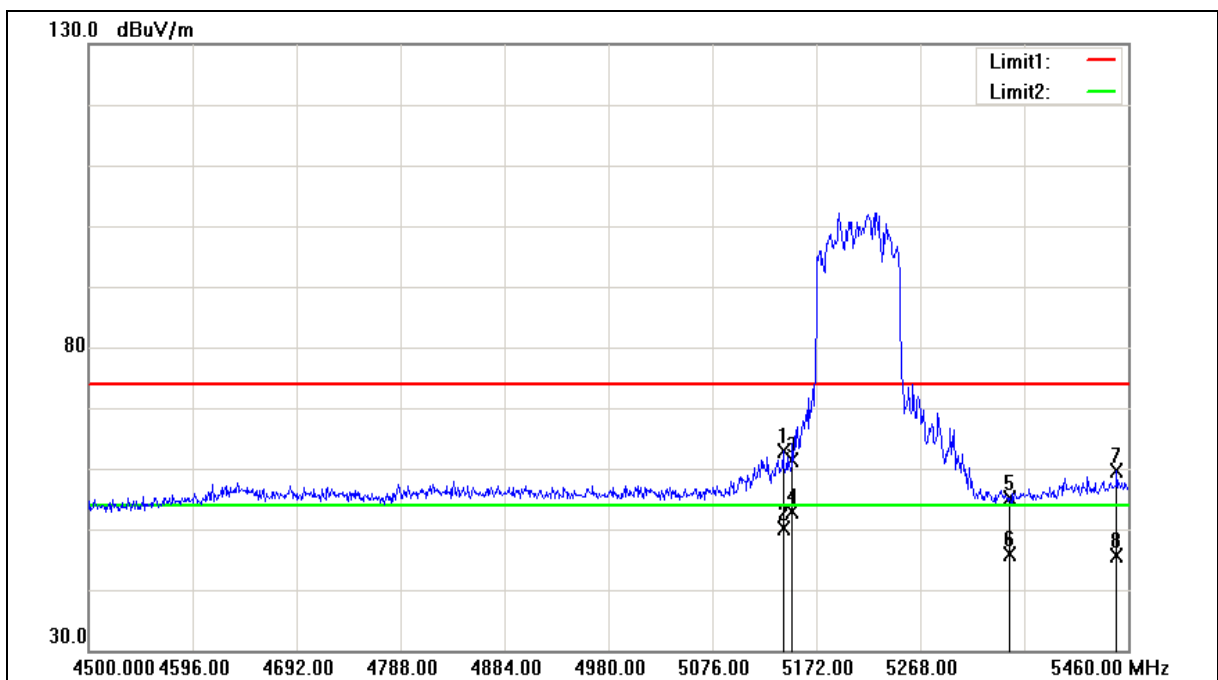



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5210MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/13/2017
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5141.280	57.05	5.73	62.78	74.00	-11.22	peak
2	5141.280	44.48	5.73	50.21	54.00	-3.79	AVG
3	5150.000	55.55	5.75	61.30	74.00	-12.70	peak
4	5150.000	47.22	5.75	52.97	54.00	-1.03	AVG
5	5350.000	49.09	6.03	55.12	74.00	-18.88	peak
6	5350.000	39.90	6.03	45.93	54.00	-8.07	AVG
7	5449.440	53.36	6.19	59.55	74.00	-14.45	peak
8	5449.440	39.47	6.19	45.66	54.00	-8.34	AVG


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/13/2017
Ant.Polar.:	Horizontal		

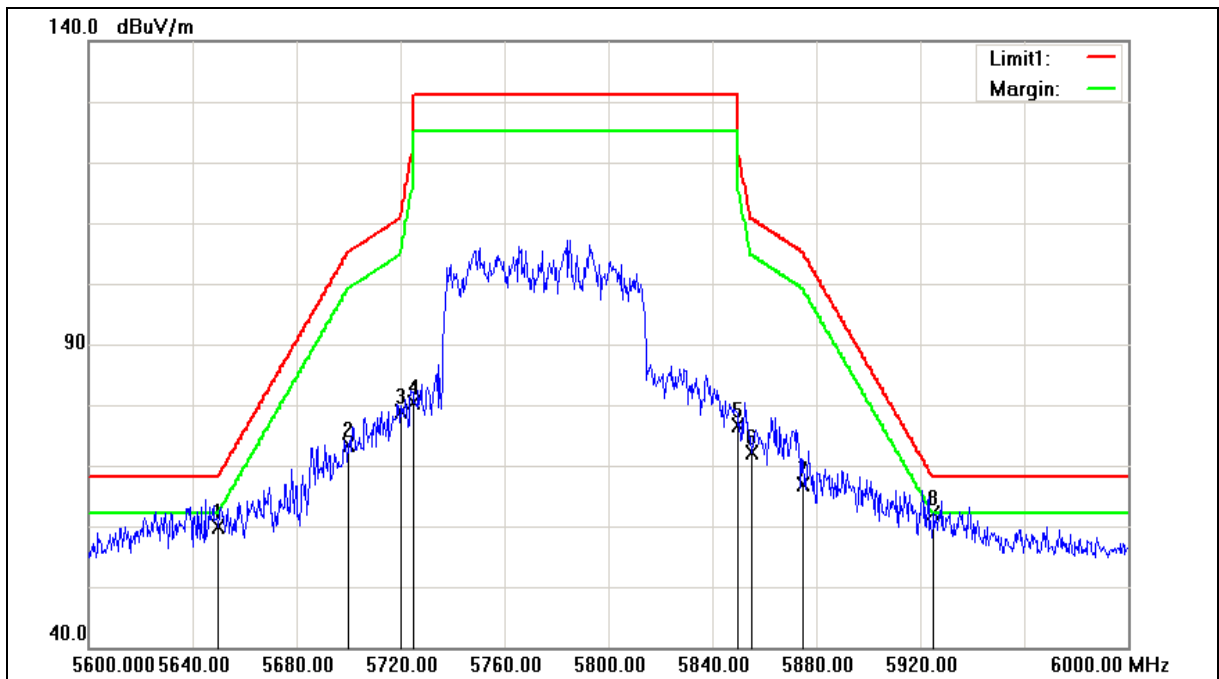



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/13/2017
Ant.Polar.:	Horizontal		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	53.29	6.58	59.87	68.20	-8.33	peak
2	5700.000	66.75	6.68	73.43	105.20	-31.77	peak
3	5720.000	72.19	6.73	78.92	110.80	-31.88	peak
4	5725.000	73.74	6.74	80.48	122.20	-41.72	peak
5	5850.000	69.65	6.99	76.64	122.20	-45.56	peak
6	5855.000	65.08	7.00	72.08	110.80	-38.72	peak
7	5875.000	59.71	7.05	66.76	105.20	-38.44	peak
8	5925.000	54.94	7.16	62.10	68.20	-6.10	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.



Standard:	FCC Part 15.407	Test Distance:	3m
Test item:	Band edge	Power:	AC 120V/60Hz
Frequency:	5775MHz	Temp.(°C)/Hum.(%RH):	26(°C)/60%RH
Mode:	Mode 5	Date:	09/13/2017
Ant.Polar.:	Vertical		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5650.000	52.81	6.58	59.39	68.20	-8.81	peak
2	5700.000	66.74	6.68	73.42	105.20	-31.78	peak
3	5720.000	74.08	6.73	80.81	110.80	-29.99	peak
4	5725.000	73.62	6.74	80.36	122.20	-41.84	peak
5	5850.000	69.36	6.99	76.35	122.20	-45.85	peak
6	5855.000	71.60	7.00	78.60	110.80	-32.20	peak
7	5875.000	61.66	7.05	68.71	105.20	-36.49	peak
8	5925.000	51.82	7.16	58.98	68.20	-9.22	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

4.4. Maximum Conducted Output Power


■ Limit

Frequency Range (MHz)	FCC Maximum Conducted Output Power Limit
	Master
5.150 ~ 5.250 GHz	The lesser of 1W (30dBm)
5.725 ~ 5.850 GHz	The lesser of 1W (30dBm)

According FCC KDB 662911 D01 v02r01 – for power measurements on IEEE802.11 devices,

* CDD mode : $G_{ANT} = 10 \cdot \log\{[10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}] / N_{ANT}\} = 3.04 \text{ dBi} < 6 \text{ dBi}$

■ Test Setup

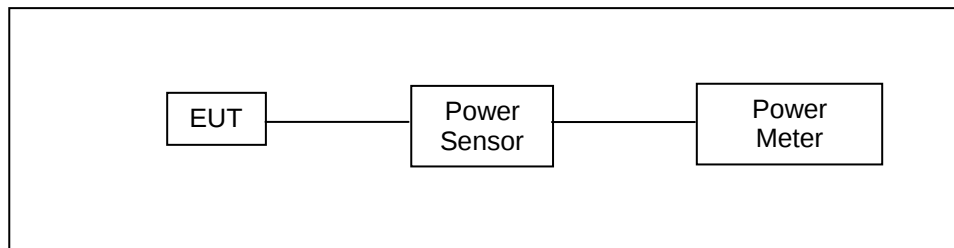

■ Test Procedure

The test is performed in accordance with KDB789033: D02 General UNII Test Procedures New Rules v01r04, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices

Section (E) Maximum Conducted Output Power

3. Measurement using a Power Meter (PM)

b) Method PM-G (Measurement using a gated RF average power meter)



Test Result

Test Item		Maximum Conducted Output Power						
Test Mode		Mode 2: IEEE 802.11a Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Outup Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180	6M	16.58	0.045	16.25	0.042	19.43	0.088	≤ 30
5200		21.10	0.129	20.84	0.121	23.98	0.250	
5220		21.40	0.138	21.15	0.130	24.29	0.268	
5240		19.41	0.087	19.21	0.083	22.32	0.171	
5745		20.97	0.125	20.84	0.121	23.92	0.246	
5765		21.02	0.126	20.91	0.123	23.98	0.250	≤ 30
5785		20.42	0.110	20.36	0.109	23.40	0.219	
5805		20.50	0.112	20.54	0.113	23.53	0.225	
5825		19.46	0.088	19.16	0.082	22.32	0.171	
5180		54M	16.46	0.044	16.13	0.041	19.31	
5200	21.00		0.126	20.73	0.118	23.88	0.244	
5220	21.28		0.134	21.02	0.126	24.16	0.261	
5240	19.30		0.085	19.07	0.081	22.20	0.166	
5745	20.85		0.122	20.72	0.118	23.80	0.240	
5765	20.91		0.123	20.78	0.120	23.86	0.243	≤ 30
5785	20.29		0.107	20.24	0.106	23.28	0.213	
5805	20.37		0.109	20.42	0.110	23.41	0.219	
5825	19.34		0.086	19.05	0.080	22.21	0.166	



Test Item		Maximum Conducted Output Power						
Test Mode		Mode 3: IEEE 802.11ac 20MHz Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Outup Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5180	6.5M	18.03	0.064	17.96	0.063	21.01	0.126	≤ 30
5200		20.92	0.124	20.74	0.119	23.84	0.242	
5220		21.03	0.127	21.15	0.130	24.10	0.257	
5240		19.83	0.096	19.61	0.091	22.73	0.188	≤ 30
5745		20.80	0.120	20.78	0.120	23.80	0.240	
5765		20.89	0.123	20.93	0.124	23.92	0.247	
5785		20.41	0.110	19.95	0.099	23.20	0.209	
5805		20.25	0.106	20.10	0.102	23.19	0.208	
5825		19.76	0.095	19.30	0.085	22.55	0.180	
5180	86.7M	17.92	0.062	17.84	0.061	20.89	0.123	≤ 30
5200		20.80	0.120	20.61	0.115	23.72	0.235	
5220		20.93	0.124	21.02	0.126	23.99	0.250	
5240		19.71	0.094	19.49	0.089	22.61	0.182	≤ 30
5745		20.68	0.117	20.65	0.116	23.68	0.233	
5765		20.78	0.120	20.81	0.121	23.81	0.240	
5785		20.30	0.107	19.82	0.096	23.08	0.203	
5805		20.14	0.103	19.98	0.100	23.07	0.203	
5825		19.63	0.092	19.15	0.082	22.41	0.174	



Test Item		Maximum Conducted Output Power						
Test Mode		Mode 4: IEEE 802.11ac 40MHz Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Outup Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5190	13.5M	12.22	0.017	12.51	0.018	15.38	0.034	≤ 30
5230		19.77	0.095	19.80	0.095	22.80	0.190	
5755		20.46	0.111	20.16	0.104	23.32	0.215	≤ 30
5795		20.51	0.112	20.27	0.106	23.40	0.219	
5190	200M	12.09	0.016	12.37	0.017	15.24	0.033	≤ 30
5230		19.65	0.092	19.69	0.093	22.68	0.185	
5755		20.31	0.107	20.00	0.100	23.17	0.207	≤ 30
5755		20.40	0.110	20.15	0.104	23.29	0.213	


Test Item		Maximum Conducted Output Power						
Test Mode		Mode 5: IEEE 802.11ac 80MHz Continuous TX mode						
Frequency (MHz)	Data Rate	ANT-0		ANT-1		ANT-0+1		FCC Limit (dBm)
		Max. Outup Power						
		(dBm)	(W)	(dBm)	(W)	(dBm)	(W)	
5210	29.3M	11.18	0.013	11.20	0.013	14.20	0.026	≤ 30
5775		19.61	0.091	19.43	0.088	22.53	0.179	≤ 30
5210	433.3M	11.02	0.013	11.07	0.013	14.06	0.025	≤ 30
5775		19.47	0.089	19.28	0.085	22.39	0.173	≤ 30

4.5. 26dB RF Bandwidth & 99 % Occupied Bandwidth Measurement

■ Limit

N/A

■ Test Setup

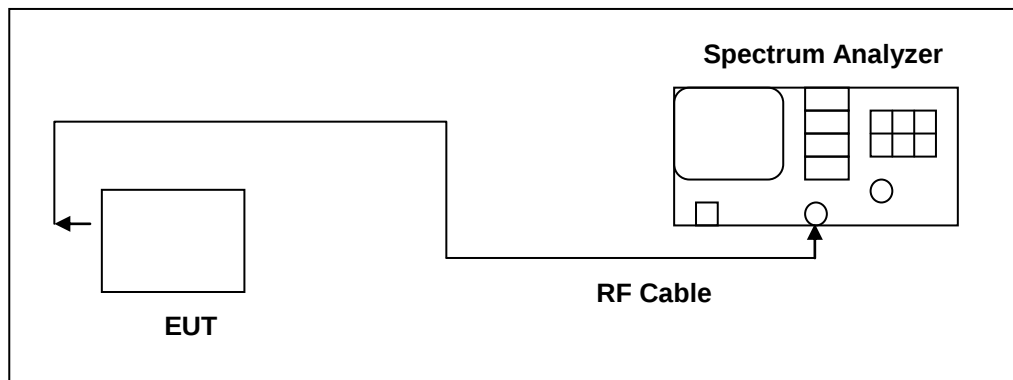

■ Test Procedure

The test is performed in accordance with KDB789033: D02 General UNII Test Procedures New Rules v01r04, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	>26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

Test Result

Test Item	26dB RF Bandwidth & 99 % Occupied Bandwidth Measurement			
Test Mode	Mode 2: IEEE 802.11a Continuous TX mode			
Frequency (MHz)	Ant-0	Ant-1	Ant-0	Ant-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5180	20.810	21.130	16.517	16.477
5200	34.370	34.820	17.703	18.591
5240	34.150	34.240	17.370	17.209

Test Item	26dB RF Bandwidth & 99 % Occupied Bandwidth Measurement			
Test Mode	Mode 3: IEEE 802.11ac 20MHz Continuous TX mode			
Frequency (MHz)	Ant-0	Ant-1	Ant-0	Ant-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5180	21.530	21.750	17.576	17.540
5200	37.430	40.390	18.524	19.387
5240	36.730	36.970	18.533	18.268

Test Item	26dB RF Bandwidth & 99 % Occupied Bandwidth Measurement			
Test Mode	Mode 4: IEEE 802.11ac 40MHz Continuous TX mode			
Frequency (MHz)	Ant-0	Ant-1	Ant-0	Ant-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5190	43.650	43.290	36.474	36.397
5230	44.950	46.970	36.525	36.486

Test Item	26dB RF Bandwidth & 99 % Occupied Bandwidth Measurement			
Test Mode	Mode 5: IEEE 802.11ac 80MHz Continuous TX mode			
Frequency (MHz)	Ant-0	Ant-1	Ant-0	Ant-1
	26dB Bandwidth (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
5210	81.820	81.800	74.816	74.630

Note: The 99% occupied bandwidth not crossed 5250MHz.



■ Test Graphs

Mode 2: IEEE 802.11a Continuous TX mode_ Ant-0

5180 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.18000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Span 25 MHz Sweep 1 ms Occupied Bandwidth 16.517 MHz Total Power 22.6 dBm Transmit Freq Error -71.813 kHz OBW Power 99.00 % x dB Bandwidth 20.81 MHz x dB -26.00 dB File <BBB.png> saved STATUS
5200 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.20000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.703 MHz Total Power 26.4 dBm Transmit Freq Error 91.667 kHz OBW Power 99.00 % x dB Bandwidth 34.37 MHz x dB -26.00 dB File <BBB.png> saved STATUS
5240 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.24000000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.370 MHz Total Power 26.4 dBm Transmit Freq Error 34.451 kHz OBW Power 99.00 % x dB Bandwidth 34.15 MHz x dB -26.00 dB File <BBB.png> saved STATUS



Mode 3: IEEE 802.11ac 20MHz Continuous TX mode_ ANT-0


5180 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.18000000 GHz Trig: Free Run #Atten: 20 dB Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Span 25 MHz Sweep 1 ms Occupied Bandwidth 17.576 MHz Total Power 23.7 dBm Transmit Freq Error -30.249 kHz OBW Power 99.00 % x dB Bandwidth 21.53 MHz x dB -26.00 dB File <BBB.png> saved
5200 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.20000000 GHz Trig: Free Run #Atten: 20 dB Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 18.524 MHz Total Power 26.7 dBm Transmit Freq Error 159.60 kHz OBW Power 99.00 % x dB Bandwidth 37.43 MHz x dB -26.00 dB File <BBB.png> saved
5240 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.24000000 GHz Trig: Free Run #Atten: 20 dB Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 18.533 MHz Total Power 26.7 dBm Transmit Freq Error 185.35 kHz OBW Power 99.00 % x dB Bandwidth 36.73 MHz x dB -26.00 dB File <BBB.png> saved



Mode 4: IEEE 802.11ac 40MHz Continuous TX mode_ ANT-0



Mode 5: IEEE 802.11ac 80MHz Continuous TX mode_ ANT-0

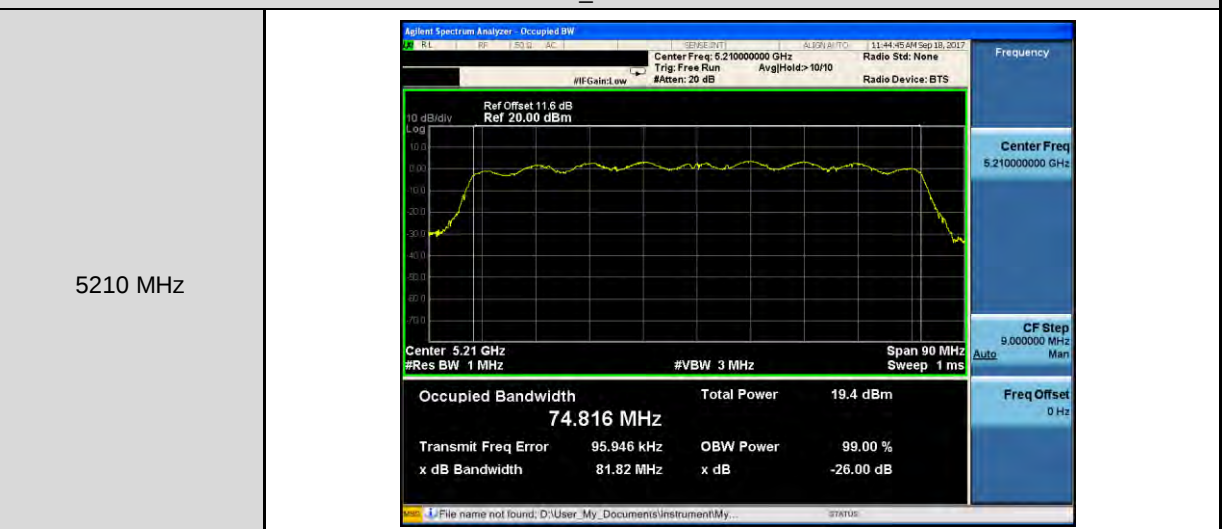



Mode 2: IEEE 802.11a Continuous TX mode_ Ant-1

5180 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.18000000 GHz Trig: Free Run #Atten: 20 dB Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Span 25 MHz Sweep 1 ms Occupied Bandwidth 16.477 MHz Total Power 22.7 dBm Transmit Freq Error -45.586 kHz OBW Power 99.00 % x dB Bandwidth 21.13 MHz x dB -26.00 dB File name not found, D:\User_My_Documents\instrument\My...
5200 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.20000000 GHz Trig: Free Run #Atten: 20 dB Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 18.591 MHz Total Power 26.5 dBm Transmit Freq Error -283.74 kHz OBW Power 99.00 % x dB Bandwidth 34.82 MHz x dB -26.00 dB File <BBB.png> saved
5240 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.24000000 GHz Trig: Free Run #Atten: 20 dB Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 17.209 MHz Total Power 25.9 dBm Transmit Freq Error -23.964 kHz OBW Power 99.00 % x dB Bandwidth 34.24 MHz x dB -26.00 dB File <BBB.png> saved



Mode 3: IEEE 802.11ac 20MHz Continuous TX mode_ ANT-1

5180 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.18000000 GHz Trig: Free Run #Atten: 20 dB Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.18 GHz #Res BW 300 kHz #VBW 1 MHz Span 25 MHz Sweep 1 ms Occupied Bandwidth 17.540 MHz Total Power 23.9 dBm Transmit Freq Error -30.443 kHz OBW Power 99.00 % x dB Bandwidth 21.75 MHz x dB -26.00 dB Center Freq 5.18000000 GHz CF Step 2.500000 MHz Freq Offset 0 Hz File <BBB.png> saved
5200 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.20000000 GHz Trig: Free Run #Atten: 20 dB Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.2 GHz #Res BW 300 kHz #VBW 1 MHz Span 45 MHz Sweep 1 ms Occupied Bandwidth 19.387 MHz Total Power 26.3 dBm Transmit Freq Error 229.06 kHz OBW Power 99.00 % x dB Bandwidth 40.39 MHz x dB -26.00 dB Center Freq 5.20000000 GHz CF Step 4.500000 MHz Freq Offset 0 Hz File <BBB.png> saved
5240 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.24000000 GHz Trig: Free Run #Atten: 20 dB Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.24 GHz #Res BW 300 kHz #VBW 1 MHz Span 40 MHz Sweep 1 ms Occupied Bandwidth 18.268 MHz Total Power 25.9 dBm Transmit Freq Error 57.175 kHz OBW Power 99.00 % x dB Bandwidth 36.97 MHz x dB -26.00 dB Center Freq 5.24000000 GHz CF Step 4.000000 MHz Freq Offset 0 Hz File <BBB.png> saved



Mode 4: IEEE 802.11ac 40MHz Continuous TX mode_ ANT-1

5190 MHz



5230 MHz



Mode 5: IEEE 802.11ac 80MHz Continuous TX mode_ ANT-1

5210 MHz




4.6. 6dB RF Bandwidth Measurement

■ Limit

6dB RF Bandwidth

Systems using digital modulation techniques may operate in the 5725~5850MHz bands. The minimum 6 dB band-width shall be at least 500 kHz.

■ Test Setup

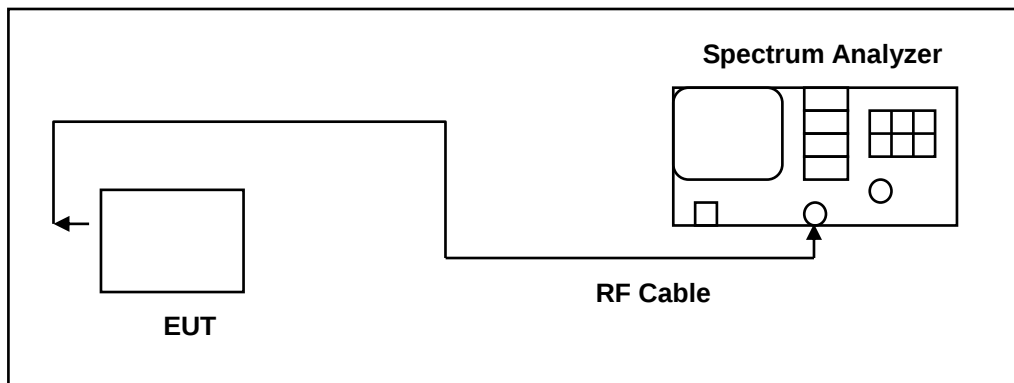

■ Test Procedure

6dB RF Bandwidth

The EUT tested to UNII test procedure of KDB789033 D02 v01r04 for compliance to FCC 47CFR 15.407 requirements.

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A peak output reading was taken, a DISPLAY line was drawn 6 dB lower than peak level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

The test was performed at 3 channels.

Test Result

Test Item	6dB RF Bandwidth		
Test Mode	Mode 2: IEEE 802.11a Continuous TX mode		
Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
	ANT-0	ANT-1	
5745	16450	16410	> 500
5785	16470	16400	> 500
5825	16460	16410	> 500

Test Item	6dB RF Bandwidth		
Test Mode	Mode 3: IEEE 802.11ac 20MHz Continuous TX mode		
Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
	ANT-0	ANT-1	
5745	17600	17570	> 500
5785	17600	17610	> 500
5825	17620	17580	> 500

Test Item	6dB RF Bandwidth		
Test Mode	Mode 4: IEEE 802.11ac 40MHz Continuous TX mode		
Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
	ANT-0	ANT-1	
5755	36410	36360	> 500
5795	36410	36380	> 500

Test Item	6dB RF Bandwidth		
Test Mode	Mode 5: IEEE 802.11ac 80MHz Continuous TX mode		
Frequency (MHz)	6dB Bandwidth (kHz)		Limit (kHz)
	ANT-0	ANT-1	
5775	75280	74330	> 500




■ Test Graphs

Mode 2: IEEE 802.11a Continuous TX mode_ANT-0

5745 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.74500000 GHz Ref Offset 11.6 dB Ref 20.00 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 16.942 MHz Total Power 27.3 dBm Transmit Freq Error -15.187 kHz OBW Power 99.00 % x dB Bandwidth 16.45 MHz x dB -6.00 dB File <BBB.png> saved
5785 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.78500000 GHz Ref Offset 11.6 dB Ref 20.00 dBm Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 16.646 MHz Total Power 26.1 dBm Transmit Freq Error -19.545 kHz OBW Power 99.00 % x dB Bandwidth 16.47 MHz x dB -6.00 dB File <BBB.png> saved
5825 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.82500000 GHz Ref Offset 11.6 dB Ref 20.00 dBm Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 16.536 MHz Total Power 25.6 dBm Transmit Freq Error -30.917 kHz OBW Power 99.00 % x dB Bandwidth 16.46 MHz x dB -6.00 dB File <BBB.png> saved



Mode 3: IEEE 802.11ac 20MHz Continuous TX mode_ANT-0

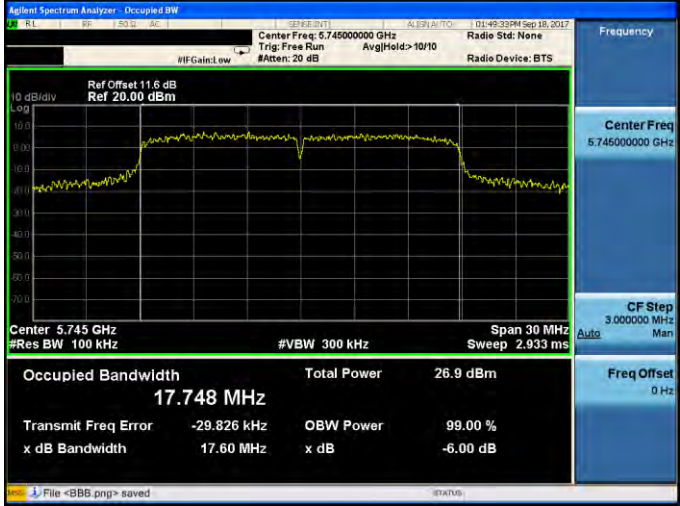
5745 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.74500000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.748 MHz Total Power 26.9 dBm Transmit Freq Error -29.826 kHz OBW Power 99.00 % x dB Bandwidth 17.60 MHz x dB -6.00 dB File <BBB.png> saved
5785 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.78500000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.712 MHz Total Power 25.9 dBm Transmit Freq Error -34.539 kHz OBW Power 99.00 % x dB Bandwidth 17.60 MHz x dB -6.00 dB File <BBB.png> saved
5825 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.82500000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms Occupied Bandwidth 17.642 MHz Total Power 25.5 dBm Transmit Freq Error -28.659 kHz OBW Power 99.00 % x dB Bandwidth 17.62 MHz x dB -6.00 dB File <BBB.png> saved



Mode 4: IEEE 802.11ac 40MHz Continuous TX mode_ANT-0


5755 MHz	
5795 MHz	

Mode 5: IEEE 802.11ac 80MHz Continuous TX mode_ANT-0

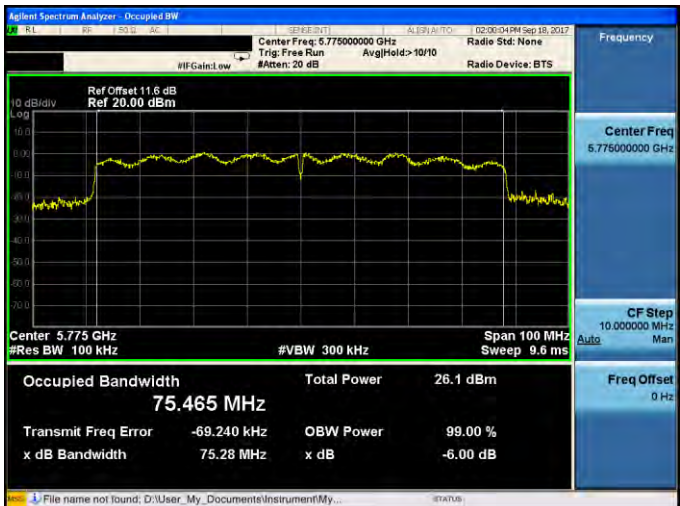5775 MHz	
----------	--






Mode 2: IEEE 802.11a Continuous TX mode_ANT-1

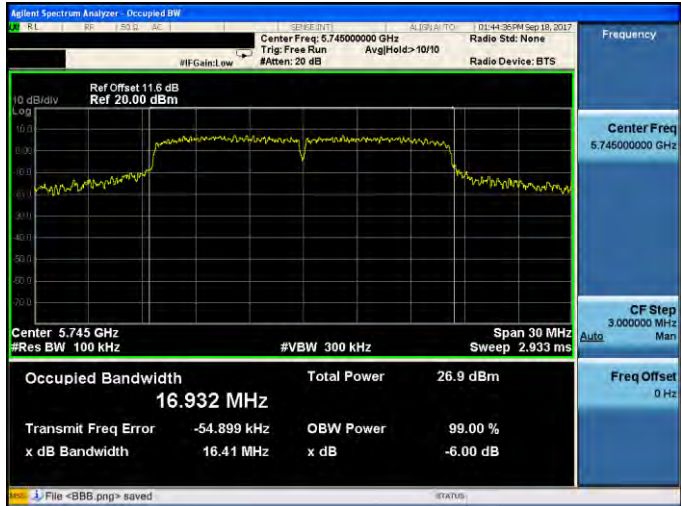5745 MHz	
5785 MHz	
5825 MHz	



Mode 3: IEEE 802.11ac 20MHz Continuous TX mode_ANT-1

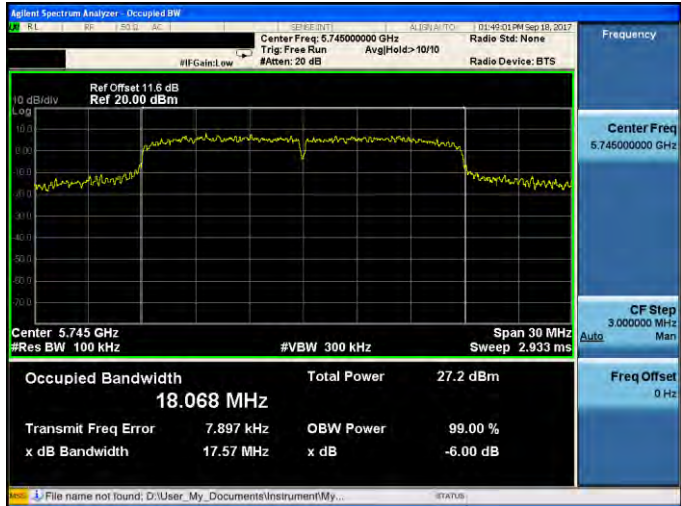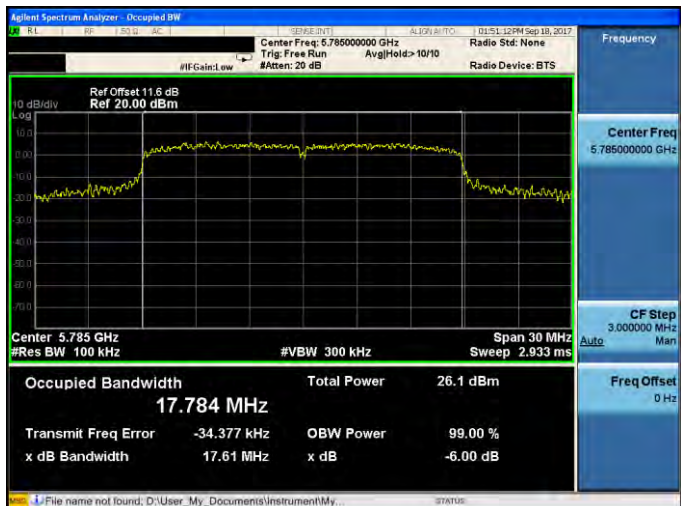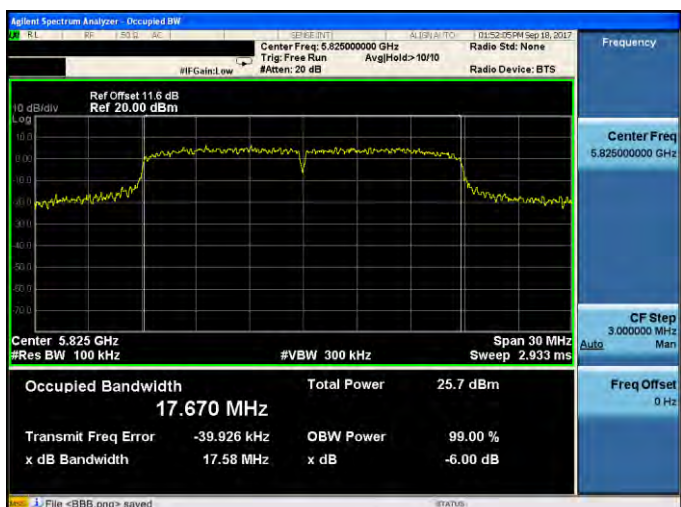5745 MHz	
5785 MHz	
5825 MHz	



Mode 4: IEEE 802.11ac 40MHz Continuous TX mode_ANT-1

5755 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.75500000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.755 GHz #Res BW 100 kHz #VBW 300 kHz Span 50 MHz Sweep 4.8 ms Occupied Bandwidth 36.379 MHz Total Power 27.2 dBm Transmit Freq Error -45.278 kHz OBW Power 99.00 % x dB Bandwidth 36.36 MHz x dB -6.00 dB Frequency Center Freq 5.75500000 GHz CF Step 5.000000 MHz Freq Offset 0 Hz
5795 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.79500000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.795 GHz #Res BW 100 kHz #VBW 300 kHz Span 50 MHz Sweep 4.8 ms Occupied Bandwidth 36.257 MHz Total Power 26.0 dBm Transmit Freq Error -31.577 kHz OBW Power 99.00 % x dB Bandwidth 36.38 MHz x dB -6.00 dB Frequency Center Freq 5.79500000 GHz CF Step 5.000000 MHz Freq Offset 0 Hz

Mode 5: IEEE 802.11ac 80MHz Continuous TX mode_ANT-1

5775 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.77500000 GHz Trig: Free Run Avg/Hold: 10/10 Radio Std: None Radio Device: BTS Ref Offset 11.6 dB Ref 20.00 dBm Center 5.775 GHz #Res BW 100 kHz #VBW 300 kHz Span 100 MHz Sweep 9.6 ms Occupied Bandwidth 75.576 MHz Total Power 26.4 dBm Transmit Freq Error -96.950 kHz OBW Power 99.00 % x dB Bandwidth 74.33 MHz x dB -6.00 dB Frequency Center Freq 5.77500000 GHz CF Step 10.000000 MHz Freq Offset 0 Hz
----------	--

4.7. Maximum Power Spectral Density Measurement

■ Limit

Conducted power spectral density

Frequency Range (MHz)	FCC Limit
	Master
5.150 ~ 5.250 GHz	17 dBm/MHz
5.725 ~ 5.850 GHz	30 dBm/500KHz


According FCC KDB 662911 D01 v02r01 – for power spectral density measurements on IEEE802.11 devices,

* CDD mode : Directional Gain = $10 \cdot \log\{[10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20}]^2 / N\}$ = 6.05 dBi > 6dBi

CDD mode power limit shall be reduced = $17 - 0.05 = 16.95$ dBm/MHz (5.150 ~ 5.250 GHz)

CDD mode power limit shall be reduced = $30 - 0.05 = 29.95$ dBm/500KHz (5.725 ~ 5.850 GHz)

■ Test Setup

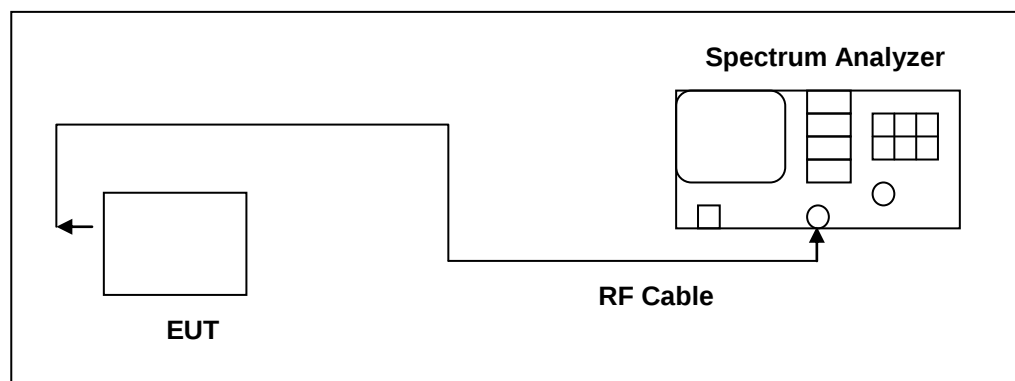

**■ Test Procedure**

The test is performed in accordance with KDB789033: D02 General UNII Test Procedures New Rules v01r04, Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz (5725 ~ 5850MHz use 100 kHz)
VBW	3 MHz (5725 ~ 5850MHz use 300 kHz)
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times
Note: If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/100\text{kHz})$ to the measured result.	

Test Result

Test Item	Conducted power spectral density			
Test Mode	Mode 2: IEEE 802.11a link mode			
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	5.575	0.000	5.575	< 16.95
5200	9.513	0.000	9.513	
5240	8.242	0.000	8.242	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	5.510	0.000	5.510	< 16.95
5200	10.056	0.000	10.056	
5240	7.941	0.000	7.941	
Frequency (MHz)	ANT-0+1			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5180	8.553			< 16.95
5200	12.803			
5240	11.104			

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.



Test Item	Conducted power spectral density			
Test Mode	Mode 2: IEEE 802.11a link mode			
Frequency (MHz)	ANT-0			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/500KHz)
5745	0.65	0.000	7.64	< 29.95
5785	-0.07	0.000	6.92	
5825	-0.38	0.000	6.61	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/500KHz)
5745	1.20	0.000	8.19	< 29.95
5785	-0.47	0.000	6.52	
5825	-0.76	0.000	6.23	
Frequency (MHz)	ANT-0+1			Limit (dBm/500KHz)
	Calculated (dBm/500KHz)			
5745	10.93			< 29.95
5785	9.74			
5825	9.43			

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500k/100k)

Test Item	Conducted power spectral density			
Test Mode	Mode 3: IEEE 802.11ac 20MHz link mode			
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	5.133	0.000	5.133	< 16.95
5200	9.547	0.000	9.547	
5240	5.539	0.000	5.539	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	4.430	0.000	4.430	< 16.95
5200	9.219	0.000	9.219	
5240	4.464	0.000	4.464	
Frequency (MHz)	ANT-0+1			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5180	7.806			< 16.95
5200	12.396			
5240	8.045			

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Item	Conducted power spectral density			
Test Mode	Mode 3: IEEE 802.11ac 20MHz link mode			
Frequency (MHz)	ANT-0			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/500KHz)
5745	1.11	0.000	8.10	< 29.95
5785	-0.17	0.000	6.82	
5825	-0.32	0.000	6.67	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/500KHz)
5745	0.63	0.000	7.62	< 29.95
5785	0.09	0.000	7.08	
5825	-0.89	0.000	6.10	
Frequency (MHz)	ANT-0+1			Limit (dBm/500KHz)
	Calculated (dBm/500KHz)			
5745	10.88			< 29.95
5785	9.97			
5825	9.41			

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500k/100k)



Test Item	Conducted power spectral density			
Test Mode	Mode 4: IEEE 802.11ac 40MHz link mode			
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	-1.593	0.000	-1.593	< 16.95
5230	6.839	0.000	6.839	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	-1.567	0.000	-1.567	< 16.95
5230	6.770	0.000	6.770	
Frequency (MHz)	ANT-0+1			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5190	1.430			< 16.95
5230	9.815			

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Item	Conducted power spectral density			
Test Mode	Mode 4: IEEE 802.11ac 40MHz link mode			
Frequency (MHz)	ANT-0			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/500KHz)
5755	-2.96	0.000	4.03	< 29.95
5795	-3.11	0.000	3.88	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/500KHz)
5755	-2.69	0.000	4.30	< 29.95
5795	-3.39	0.000	3.60	
Frequency (MHz)	ANT-0+1			Limit (dBm/500KHz)
	Calculated (dBm/500KHz)			
5755	7.18			< 29.95
5795	6.75			

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500k/100k)

Test Item	Conducted power spectral density			
Test Mode	Mode 5: IEEE 802.11ac 80MHz link mode			
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-4.321	0.000	-4.321	< 16.95
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-4.275	0.000	-4.275	< 16.95
Frequency (MHz)	ANT-0+1			
	Calculated (dBm/MHz)			Limit (dBm/MHz)
5210	-1.288			< 16.95

Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Item	Conducted power spectral density			
Test Mode	Mode 5: IEEE 802.11ac 80MHz link mode			
Frequency (MHz)	ANT-0			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/MHz)
5775	-5.50	0.000	1.49	< 29.95
Frequency (MHz)	ANT-1			
	Measurement (dBm/100KHz)	Duty Factor (dB)	Calculated (dBm/500KHz)	Limit (dBm/MHz)
5775	-5.48	0.000	1.51	< 29.95
Frequency (MHz)	ANT-0+1			
	Calculated (dBm/500KHz)			Limit (dBm/MHz)
5775	4.51			< 29.95


Note: Method SA-2, Power density = measured result + 10log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500k/100k)





■ Test Graphs

Mode 2: IEEE 802.11a Continuous TX mode_ ANT-0

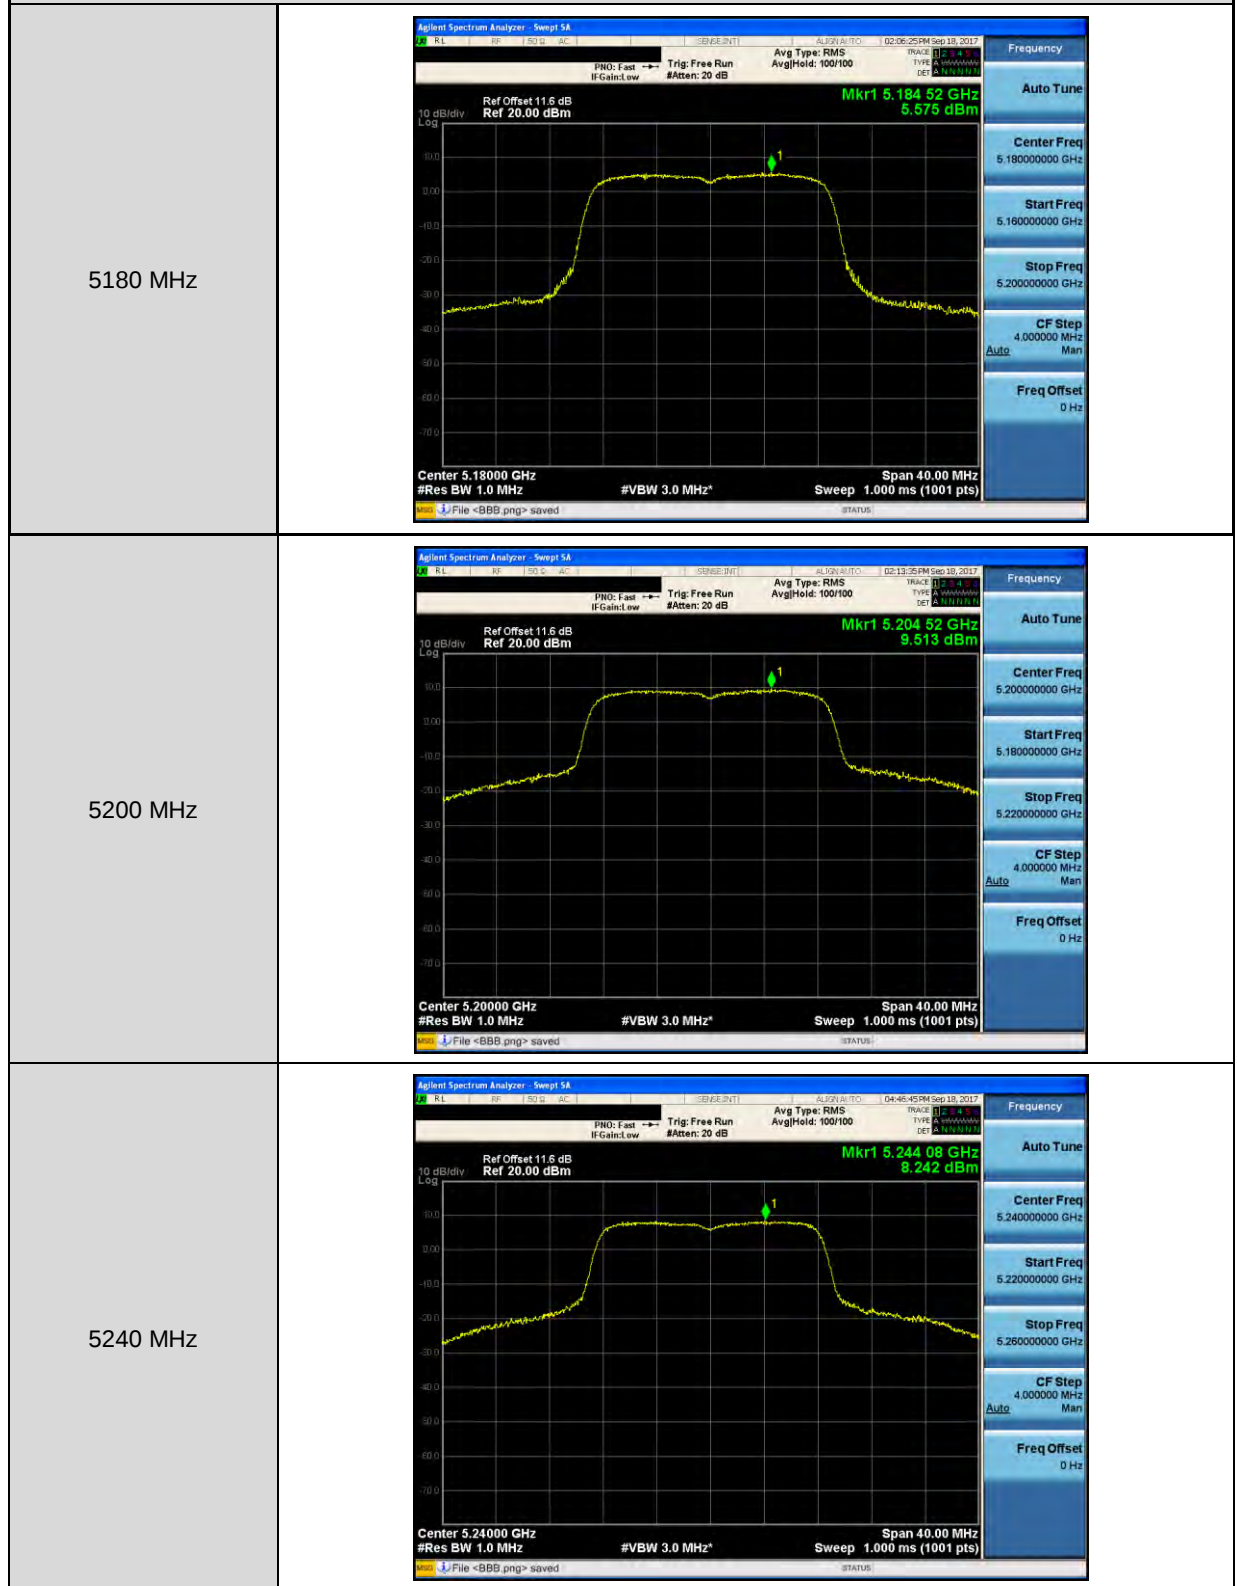



Mode 2: IEEE 802.11a Continuous TX mode_ ANT-0

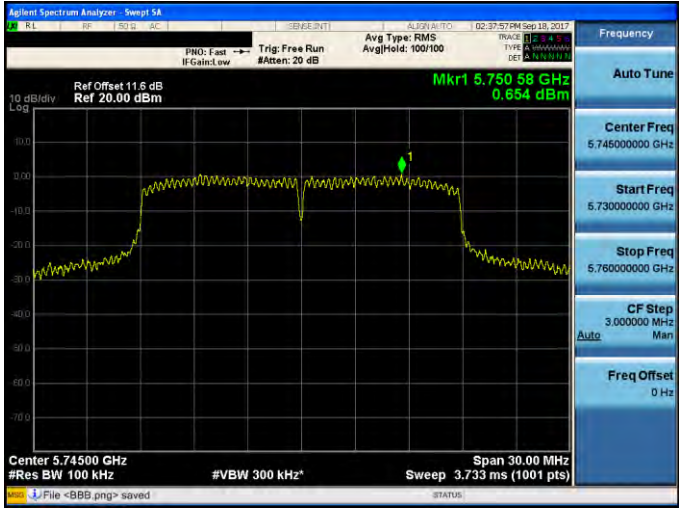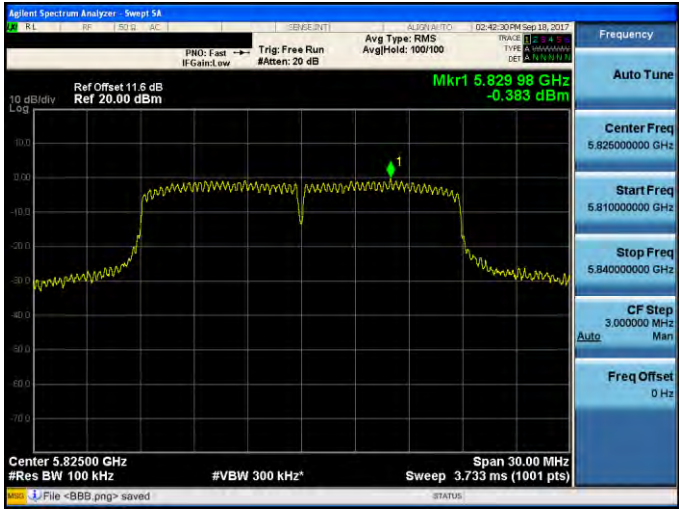5745 MHz	
5785 MHz	
5825 MHz	





Mode 3: IEEE 802.11ac 20MHz Continuous TX mode _ ANT-0

5180 MHz	
5200 MHz	
5240 MHz	




Mode 3: IEEE 802.11ac 20MHz Continuous TX mode _ ANT-0

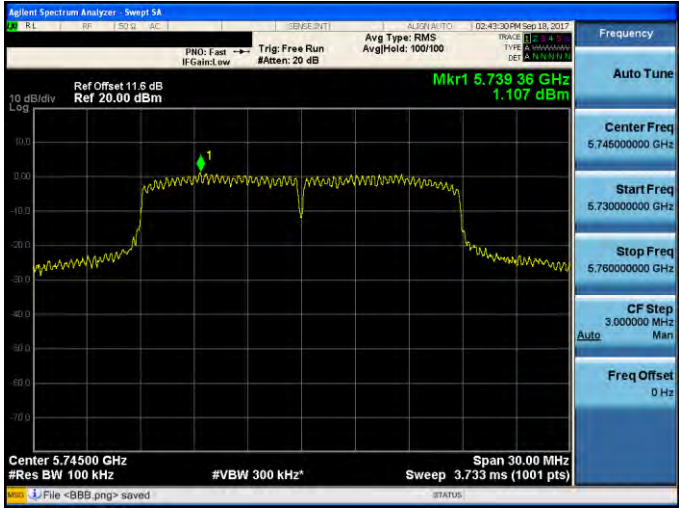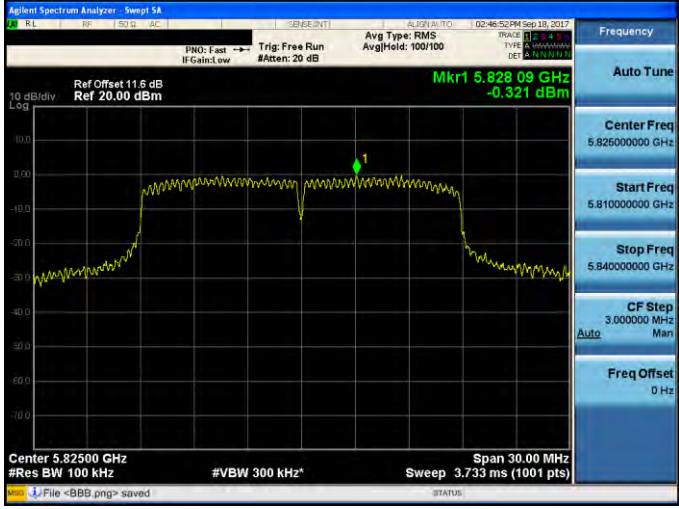5745 MHz	 Agilent Spectrum Analyzer: Sweep 5A PBD: Fast Trig: Free Run Avg Type: RMS IF Gain: Low #Atten: 20 dB AvgHold: 100/100 Ref Offset 11.5 dB Ref 20.00 dBm Mkr1 5.739 36 GHz 1.107 dBm Center 5.74500 GHz #Res BW 100 kHz Span 30.00 MHz #VBW 300 kHz Sweep 3.733 ms (1001 pts) File <888.png> saved
5785 MHz	 Agilent Spectrum Analyzer: Sweep 5A PBD: Fast Trig: Free Run Avg Type: RMS IF Gain: Low #Atten: 20 dB AvgHold: 100/100 Ref Offset 11.5 dB Ref 20.00 dBm Mkr1 5.781 85 GHz -0.186 dBm Center 5.78500 GHz #Res BW 100 kHz Span 30.00 MHz #VBW 300 kHz Sweep 3.733 ms (1001 pts) File <888.png> saved
5825 MHz	 Agilent Spectrum Analyzer: Sweep 5A PBD: Fast Trig: Free Run Avg Type: RMS IF Gain: Low #Atten: 20 dB AvgHold: 100/100 Ref Offset 11.5 dB Ref 20.00 dBm Mkr1 5.828 09 GHz -0.321 dBm Center 5.82500 GHz #Res BW 100 kHz Span 30.00 MHz #VBW 300 kHz Sweep 3.733 ms (1001 pts) File <888.png> saved




Mode 4: IEEE 802.11ac 40MHz Continuous TX mode_ ANT-0

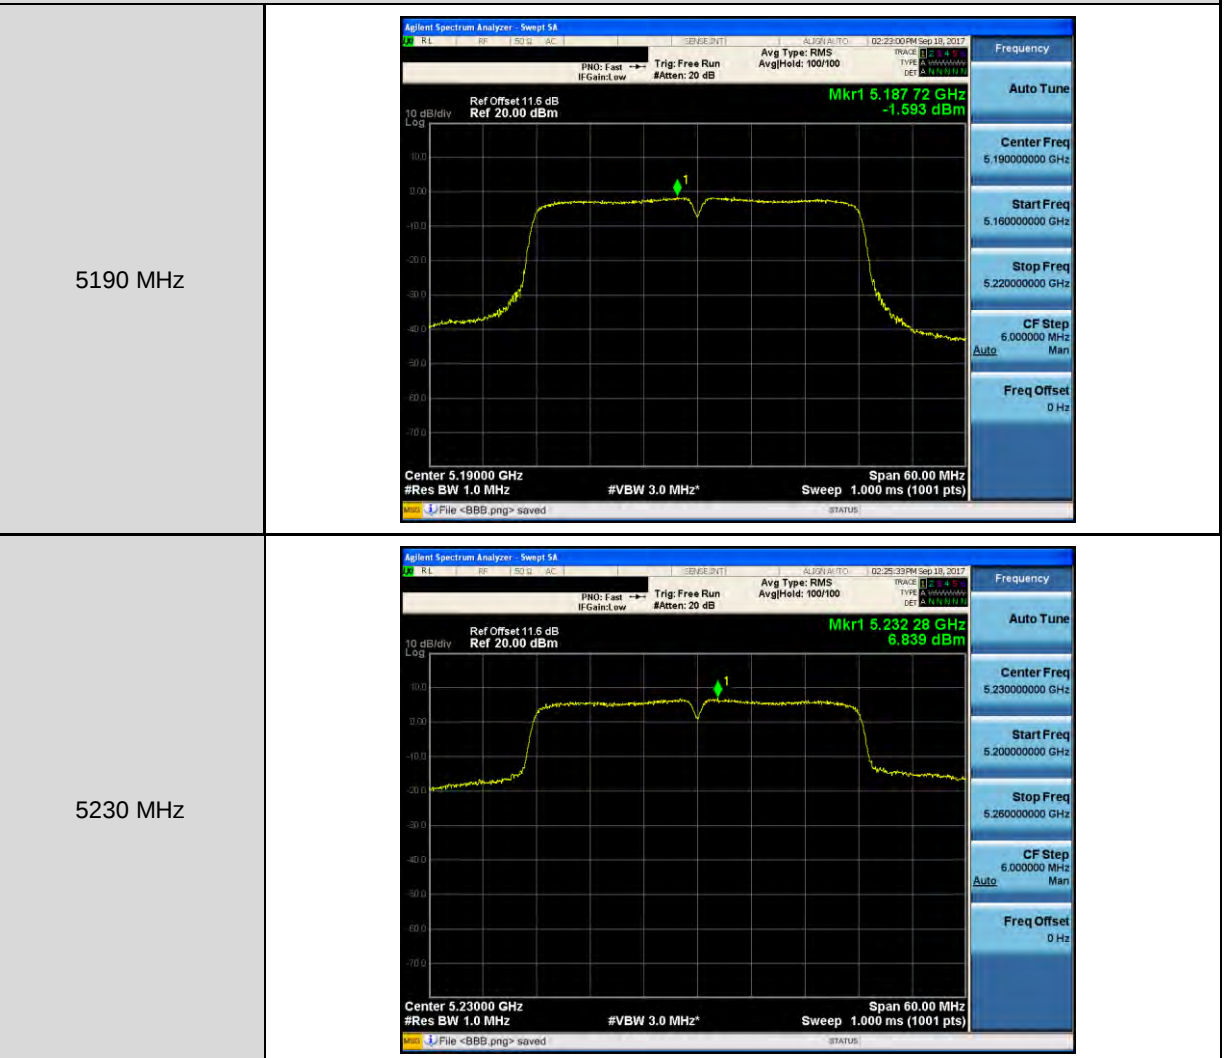




Mode 4: IEEE 802.11ac 40MHz Continuous TX mode_ ANT-0

5755 MHz

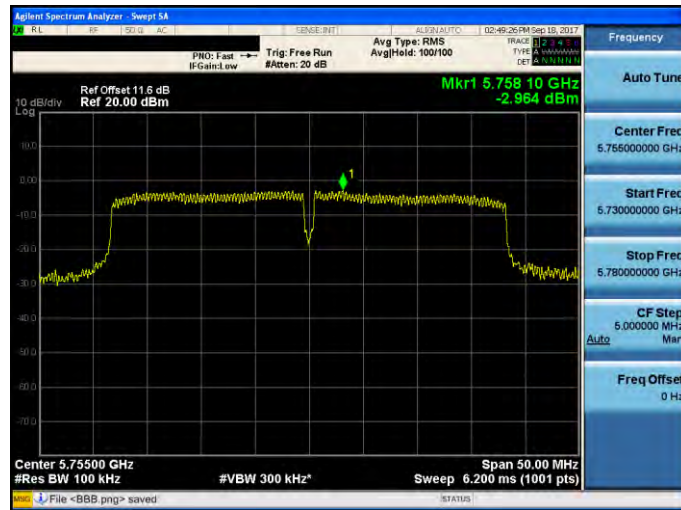


5795 MHz

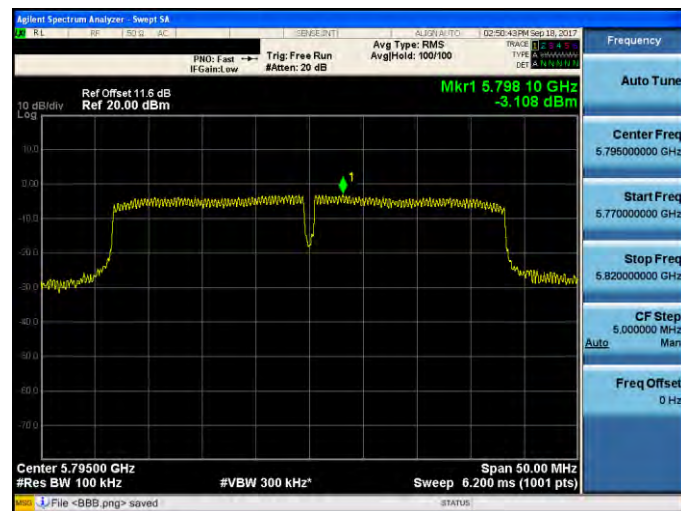



Mode 5: IEEE 802.11ac 80MHz Continuous TX mode _ANT-0

5210 MHz

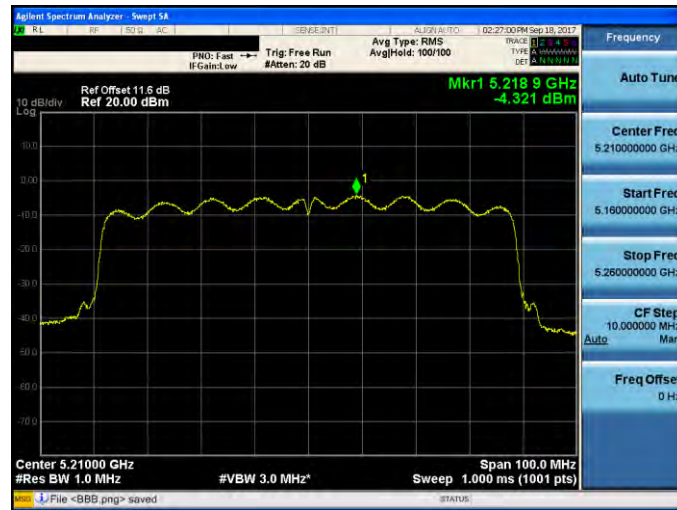


Mode 5: IEEE 802.11ac 80MHz Continuous TX mode _ANT-0

5775 MHz






Mode 2: IEEE 802.11a Continuous TX mode_ ANT-1

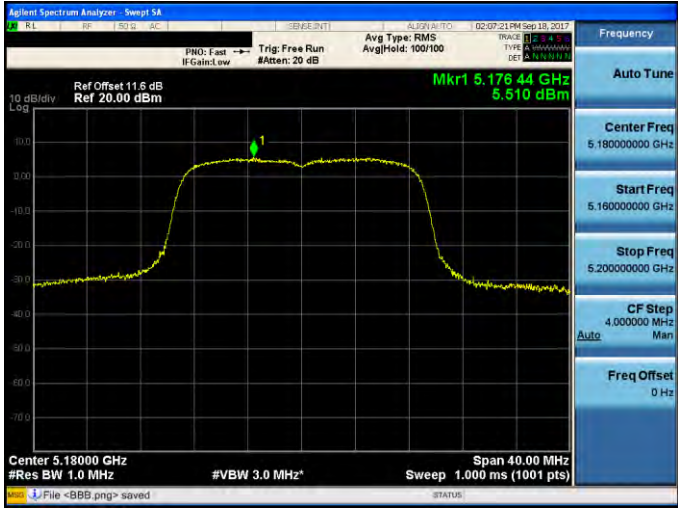5180 MHz	
5200 MHz	
5240 MHz	




Mode 2: IEEE 802.11a Continuous TX mode_ ANT-1


5745 MHz

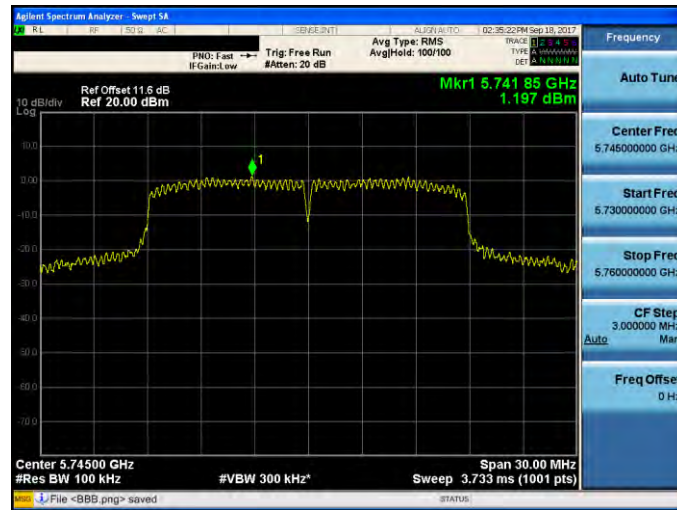

5785 MHz

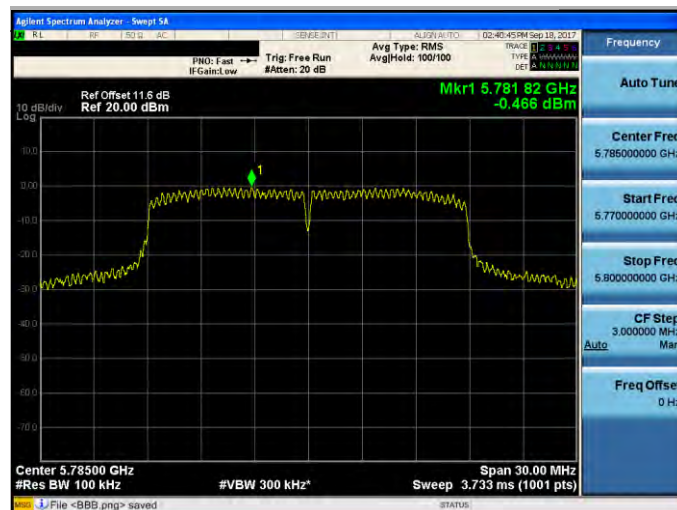

5825 MHz

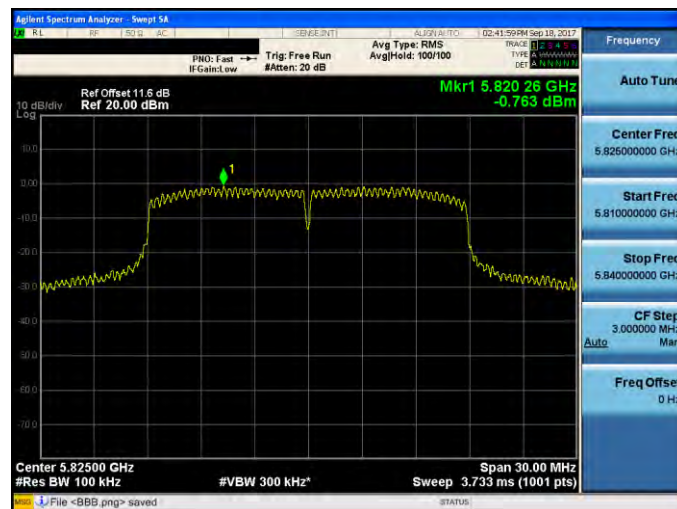




Mode 3: IEEE 802.11ac 20MHz Continuous TX mode _ ANT-1

5180 MHz	
5200 MHz	
5240 MHz	




Mode 3: IEEE 802.11ac 20MHz Continuous TX mode _ ANT-1


5745 MHz

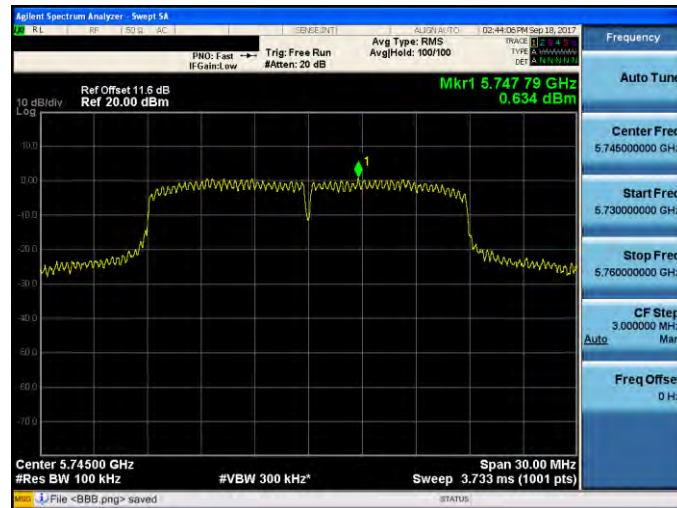

5785 MHz

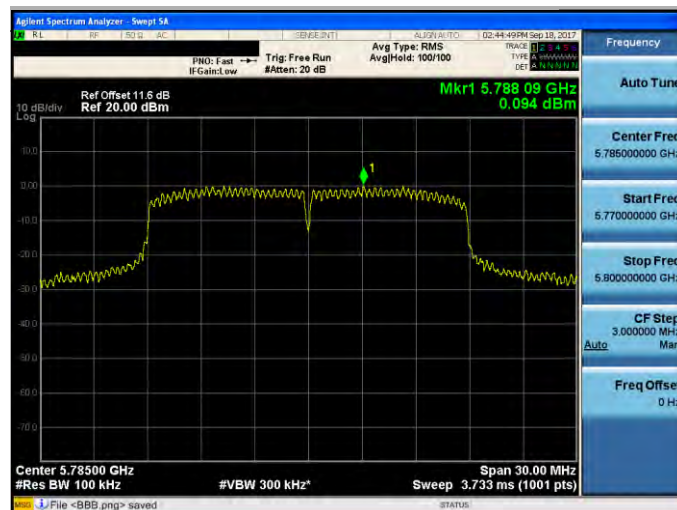

5825 MHz

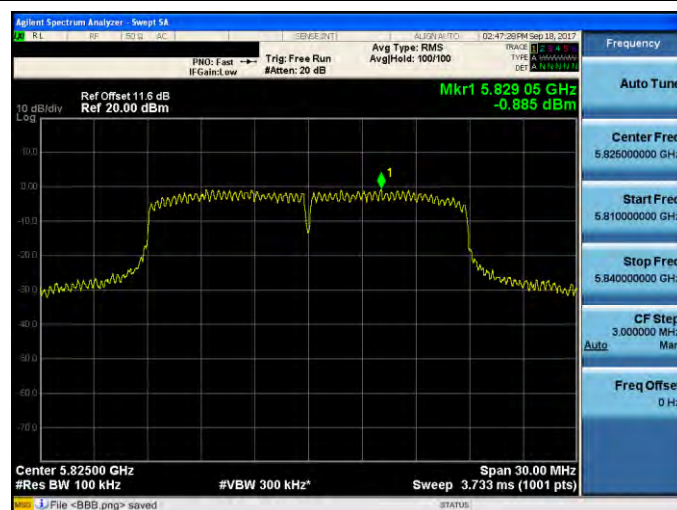







Mode 4: IEEE 802.11ac 40MHz Continuous TX mode_ ANT-1

5755 MHz

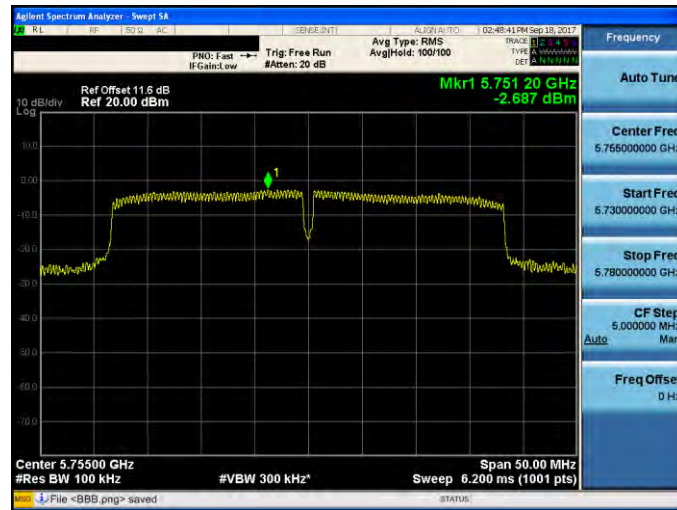

5795 MHz

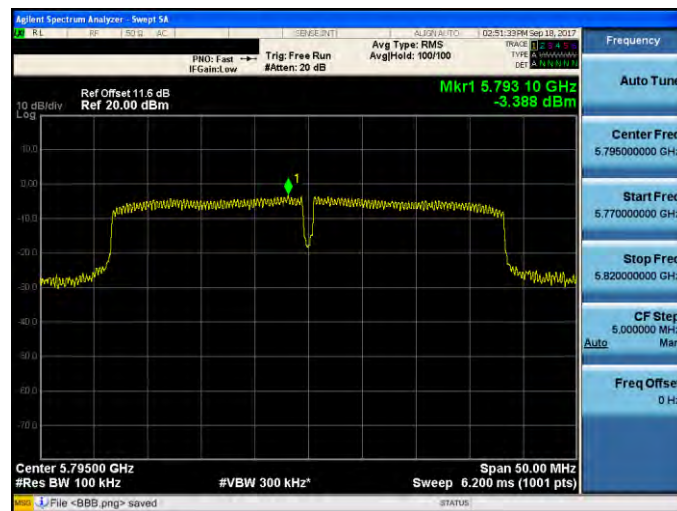




Mode 5: IEEE 802.11ac 80MHz Continuous TX mode _ANT-1

5210 MHz



Mode 5: IEEE 802.11ac 80MHz Continuous TX mode _ANT-1

5775 MHz

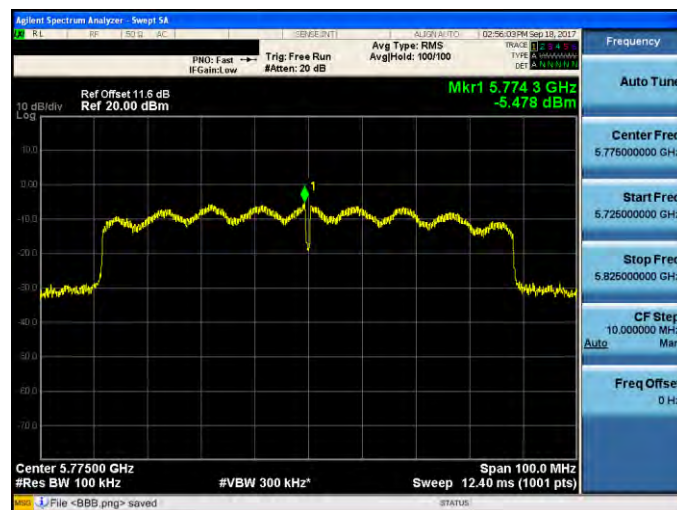


4.8. Frequency Stability Measurement

■ Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

■ Test Setup

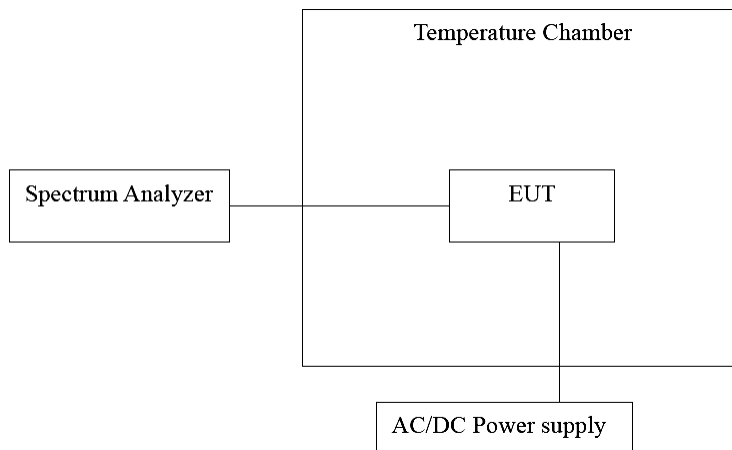

■ Test Procedure

1. The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.



■ Test Result

Temperature Variations

Test Item	Frequency Stability					
Frequency	Temp. (°C)	Voltage (Vdc)	Measured Freq. (MHz)	Delta Freq. (Hz)	Tolerance (ppm)	Result (Pass/Fail)
5200 MHz	0	120	5199.9179	-82100	-15.788	Pass
	10		5199.9338	-66200	-12.731	Pass
	20		5199.9667	-33300	-6.404	Pass
	30		5200.0019	1900	0.365	Pass
	40		5200.0302	30200	5.808	Pass
5785 MHz	0	120	5784.9201	-79900	-13.812	Pass
	10		5784.9428	-57200	-9.888	Pass
	20		5784.9604	-39600	-6.845	Pass
	30		5784.9915	-8500	-1.469	Pass
	40		5785.0136	13600	2.351	Pass

Voltage Variations

Test Item	Frequency Stability					
Frequency	Temp. (°C)	Voltage (Vac)	Measured Freq. (MHz)	Delta Freq. (Hz)	Tolerance (ppm)	Result (Pass/Fail)
5200 MHz	20	138	5200.0269	26900	5.173	Pass
		120	5200.039	39000	7.500	Pass
		102	5200.0509	50900	9.788	Pass
5785 MHz	20	138	5785.0268	26800	4.633	Pass
		120	5785.031	31000	5.359	Pass
		102	5785.0503	50300	8.695	Pass

Note: The manufacturer's frequency stability specification is better than 20ppm.



4.9. Antenna Requirement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.407 (a), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

■ Antenna Connector Construction

See section 2 – antenna information.

■ Directional Gain Calculated

For Maximum Power Spectral Density

Directional Gain = $10 \cdot \log\{[10^{G1/20} + 10^{G2/20} + \dots + 10^{Gn/20}]^2 / NANT\}$ = 6.05 dBi > 6dBi

Operate Freq. Band		Directional Gain (dBi)
IEEE 802.11a	U-NII Band I	6.05
	U-NII Band III	6.05
IEEE 802.11ac 20MHz	U-NII Band I	6.05
	U-NII Band III	6.05
IEEE 802.11ac 40MHz	U-NII Band I	6.05
	U-NII Band III	6.05
IEEE 802.11ac 80MHz	U-NII Band I	6.05
	U-NII Band III	6.05