



FCC Radio Test Report

FCC ID: 2BCVT-NES-1

Report No. : TBR-C-202309-0169-81
Applicant : Cherub Technology Co., Ltd.
Equipment Under Test (EUT)
EUT Name : Digital Wind Instrument
Model No. : NES-1
Serial Model No. : ----
Brand Name : NUX
Sample ID : 202309-0169-4-1# & 202309-0169-4-2#
Receipt Date : 2024-01-11
Test Date : 2024-01-11 to 2024-02-22
Issue Date : 2024-02-22
Standards : FCC Part 15, Subpart C 15.249
Test Method : ANSI C63.10:2013
Conclusions : **PASS**

In the configuration tested, the EUT complied with the standards specified above,

The EUT technically complies with the FCC requirements

Tested By :  Jolin Lee

Reviewed By :  Seven.wu

Approved By :  Ivan Su



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.

Contents

CONTENTS.....	2
1. GENERAL INFORMATION ABOUT EUT	5
1.1 Client Information.....	5
1.2 General Description of EUT (Equipment Under Test)	5
1.3 Block Diagram Showing the Configuration of System Tested.....	7
1.4 Description of Support Units	7
1.5 Description of Test Mode.....	8
1.6 Description of Test Software Setting	8
1.7 Measurement Uncertainty	9
1.8 Test Facility.....	10
2. TEST SUMMARY	11
3. TEST SOFTWARE.....	11
4. TEST EQUIPMENT	12
5. CONDUCTED EMISSION TEST	13
4.1 Test Standard and Limit.....	13
4.2 Test Setup.....	13
4.3 Test Procedure.....	13
4.4 EUT Operating Mode	14
4.5 Test Data.....	14
6. RADIATED EMISSION TEST	15
5.1 Test Standard and Limit.....	15
5.2 Test Setup.....	16
5.3 Test Procedure.....	17
5.4 EUT Operating Condition	18
5.5 Test Data.....	18
7. BANDWIDTH TEST	19
6.1 Test Setup.....	19
6.2 Test Procedure.....	19
6.3 EUT Operating Condition	19
6.4 Test Data.....	19
8. ANTENNA REQUIREMENT.....	20
7.1 Standard Requirement.....	20
7.2 Antenna Connected Construction	20



7.3 Result.....	20
ATTACHMENT A-- CONDUCTED EMISSION TEST DATA	21
ATTACHMENT B-- RADIATED EMISSION TEST DATA	23
ATTACHMENT C--BANDWIDTH TEST DATA.....	37



Revision History

Report No.	Version	Description	Issued Date
TBR-C-202309-0169-81	Rev.01	Initial issue of report	2024-02-22



1. General Information about EUT

1.1 Client Information

Applicant	:	Cherub Technology Co., Ltd.
Address	:	No.10, Keji 9th Road, Tangjiawan Town, Zhuhai High-tech Zone Zhuhai, Guangdong, China 519080
Manufacturer	:	Cherub Technology Co., Ltd.
Address	:	No.10, Keji 9th Road, Tangjiawan Town, Zhuhai High-tech Zone Zhuhai, Guangdong, China 519080

1.2 General Description of EUT (Equipment Under Test)

EUT Name	:	Digital Wind Instrument	
Model(s)	:	NES-1	
Model Difference	:	----	
Product Description	:	Operation Frequency: 5729~5846MHz	
		Number of Channel:	40 Channel
		Out Power:	87.26dBuV/m@3m Peak
		Antenna Gain:	3.43dBi PCB antenna
		Modulation Type:	FSK
Power Rating	:	Input: DC 5V	
Li-ion Polymer Battery	:	DC 3.7V by 5000mAh Rechargeable Li-ion battery	
Software Version	:	V1.0	
Hardware Version	:	V1.0	
Connecting I/O Port(S)	:	Please refer to the User's Manual	

Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.





(2) Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	5729	21	5789
02	5732	22	5792
03	5735	23	5795
04	5738	24	5798
05	5741	25	5801
06	5744	26	5804
07	5747	27	5807
08	5750	28	5810
09	5753	29	5813
10	5756	30	5816
11	5759	31	5819
12	5762	32	5822
13	5765	33	5725
14	5765	34	5828
15	5771	35	5831
16	5774	36	5834
17	5777	37	5837
18	5780	38	5840
19	5783	39	5843
20	5786	40	5846



1.3 Block Diagram Showing the Configuration of System Tested

1.4 Description of Support Units

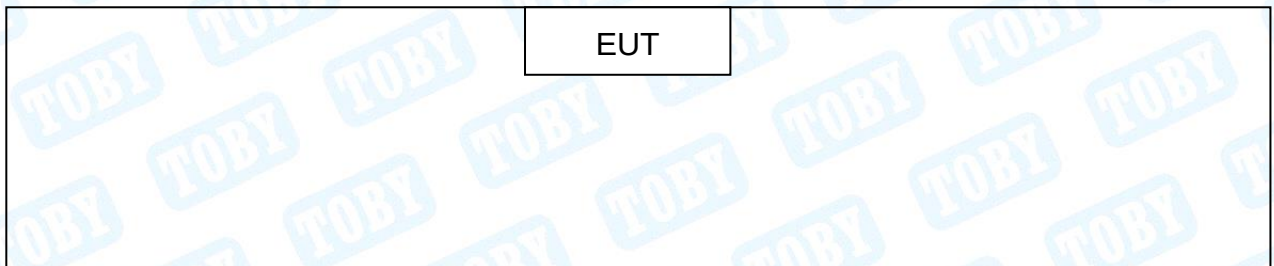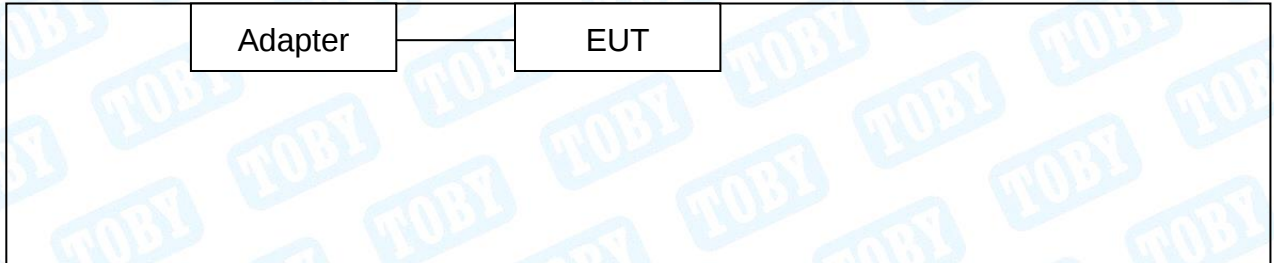

Equipment Information				
Name	Model	FCC ID/SDOC	Manufacturer	Used “√”
Adapter	----	----	----	----
Cable Information				
Number	Shielded Type	Ferrite Core	Length	Note
Cable 1	----	----	0.6M	Accessory
Remark: The USB Cable and adapter provided by the Applicant.				



1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode(01/20/39)

Note:

For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate.

- (1) According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels.
- (2) During the testing procedure, the continuously transmitting with the maximum power mode was programmed by the customer.
- (3) The EUT is considered a Mobile unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

1.6 Description of Test Software Setting

During testing channel & Power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of RF mode.

Test Software Version	EMI Tool (for FW adopt OLD RF structure)		
	V9_2019_1218_CustomerUse		
Frequency	5729 MHz	5786MHz	5846MHz
FSK	Default	Default	Default



1.7 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Parameters	Expanded Uncertainty (U_{Lab})
Conducted Emission	Level Accuracy: 9kHz~150kHz	± 3.42 dB
	150kHz to 30MHz	± 3.42 dB
Radiated Emission	Level Accuracy: 9kHz to 30 MHz	± 4.60 dB
Radiated Emission	Level Accuracy: 30MHz to 1000 MHz	± 4.40 dB
Radiated Emission	Level Accuracy: Above 1000MHz	± 4.20 dB



1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1/F., Building 6, Rundongsheng Industrial Zone, Longzhu, Xixiang, Bao'an District, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

CNAS (L5813)

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

A2LA Certificate No.: 4750.01

The laboratory has been accredited by American Association for Laboratory Accreditation(A2LA) to ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories for the technical competence in the field of Electrical Testing. And the A2LA Certificate No.: 4750.01.FCC Accredited Test Site Number: 854351. Designation Number: CN1223.

IC Registration No.: (11950A)

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A. CAB identifier: CN0056.



2. Test Summary

FCC Part 15 Subpart C(15.249)				
Standard Section	Test Item	Test Sample(s)	Judgment	Remark
FCC				
15.203	Antenna Requirement	202309-0169-4-2#	PASS	N/A
15.205	Restricted Bands	202309-0169-4-1#	PASS	N/A
15.207	AC Power Conducted Emission	202309-0169-4-1#	PASS	N/A
15.249 & 15.209	Radiated Spurious Emission	202309-0169-4-2#	PASS	N/A
15.215(C)	20dB Bandwidth	202309-0169-4-2#	PASS	N/A
Note: N/A is an abbreviation for Not Applicable.				

3. Test Software

Test Item	Test Software	Manufacturer	Version No.
Conducted Emission	EZ-EMC	EZ	CDI-03A2
Radiation Emission	EZ-EMC	EZ	FA-03A2RE
RF Conducted Measurement	MTS-8310	MWRFTest	V2.0.0.0
RF Test System	JS1120-3	Tonscend	V3.2.22



4. Test Equipment

Conducted Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
EMI Test Receiver	Rohde & Schwarz	ESCI	100321	Jun. 20, 2023	Jun. 19, 2024
RF Switching Unit	Compliance Direction Systems Inc	RSU-A4	34403	Jun. 20, 2023	Jun. 19, 2024
AMN	SCHWARZBECK	NNBL 8226-2	8226-2/164	Jun. 20, 2023	Jun. 19, 2024
LISN	Rohde & Schwarz	ENV216	101131	Jun. 20, 2023	Jun. 19, 2024
Radiation Emission Test					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Agilent	N9020A	MY49100060	Aug. 30, 2023	Aug. 29, 2024
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 20, 2023	Jun. 19, 2024
EMI Test Receiver	Rohde & Schwarz	ESU-8	100472/008	Feb. 23, 2023	Feb. 22, 2024
Bilog Antenna	SCHWARZBECK	VULB 9168	1225	Nov. 12, 2023	Nov. 13, 2025
Horn Antenna	SCHWARZBECK	BBHA 9120 D	2463	Feb. 26, 2022	Feb.25, 2024
Horn Antenna	SCHWARZBECK	BBHA 9170	1118	Jun. 26, 2022	Jun.25, 2024
Loop Antenna	SCHWARZBECK	FMZB 1519 B	1519B-059	Jun. 26, 2022	Jun.25, 2024
HF Amplifier	Tonscend	TAP9E6343	AP21C806117	Aug. 30, 2023	Aug. 29, 2024
HF Amplifier	Tonscend	TAP051845	AP21C806141	Aug. 30, 2023	Aug. 29, 2024
HF Amplifier	Tonscend	TAP0184050	AP21C806129	Aug. 30, 2023	Aug. 29, 2024
Highpass Filter	CD	HPM-6.4/18G	---	N/A	N/A
Highpass Filter	CD	HPM-2.8/18G	---	N/A	N/A
Highpass Filter	XINBO	XBLBQ-HTA67(8-25G)	22052702-1	N/A	N/A
Antenna Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due Date
Spectrum Analyzer	Rohde & Schwarz	FSV40-N	102197	Jun. 20, 2023	Jun. 19, 2024
MXA Signal Analyzer	KEYSIGHT	N9020B	MY60110172	Aug. 30, 2023	Aug. 29, 2024
MXA Signal Analyzer	Agilent	N9020A	MY47380425	Aug. 30, 2023	Aug. 29, 2024
Vector Signal Generator	Agilent	N5182A	MY50141294	Aug. 30, 2023	Aug. 29, 2024
Analog Signal Generator	Agilent	N5181A	MY48180463	Aug. 30, 2023	Aug. 29, 2024
Vector Signal Generator	KEYSIGHT	N5182B	MY59101429	Aug. 30, 2023	Aug. 29, 2024
Analog Signal Generator	KEYSIGHT	N5173B	MY61252685	Aug. 30, 2023	Aug. 29, 2024
RF Control Unit	Tonsced	JS0806-2	21F8060439	Aug. 30, 2023	Aug. 29, 2024
Band Reject Filter Group	Tonsced	JS0806-F	21D8060414	Jun. 20, 2023	Jun. 19, 2024
Power Control Box	Tonsced	JS0806-4ADC	21C8060387	N/A	N/A
Temperature and Humidity Chamber	ZhengHang	ZH-QTH-1500	ZH2107264	Jun. 20, 2023	Jun. 19, 2024



5. Conducted Emission Test

4.1 Test Standard and Limit

4.1.1 Test Standard

FCC Part 15.207

4.1.2 Test Limit


Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Notes:

- (1) *Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2 Test Setup

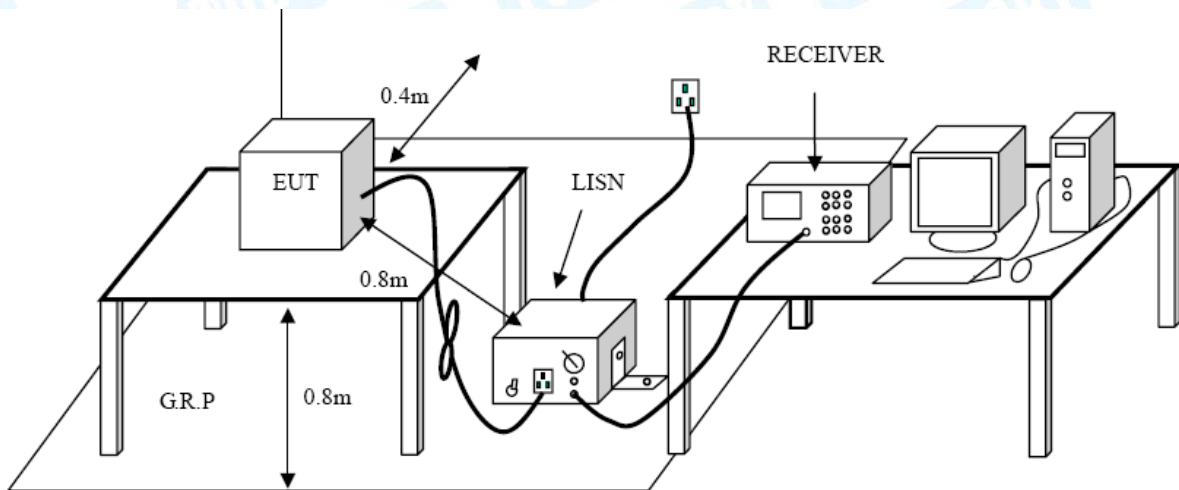

4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back



and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN is at least 80 cm from nearest part of EUT chassis.

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

4.4 EUT Operating Mode

Please refer to the description of test mode.

4.5 Test Data

Please refer to the Attachment A.



6. Radiated Emission Test

5.1 Test Standard and Limit

5.1.1 Test Standard

FCC Part 15.209

5.1.2 Test Limit

Radiated Emission Limit (9kHz~1000MHz)

Frequency (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Radiated Emission Limit (Above 1000MHz)

Frequency (MHz)	Distance Meters (at 3m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(Uv/m)

Limits of radiated emission measurement (15.249)


FCC Part 15 (15.249), Subpart C	
Limit	Frequency Range (MHz)
Field strength of fundamental 50000 μ V/m (94 dB μ V/m) @ 3 m	5725~5875
Field strength of harmonics 500 μ V/m (54 dB μ V/m) @ 3 m	Below 5725 and Above 5875




**Restricted bands requirement for equipment operating in 902MHz to 928 MHz
(15.249)**

Restricted Frequency Band (MHz)	(dBuV/m)(at 3 M)
5725~5875	Attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation


5.2 Test Setup

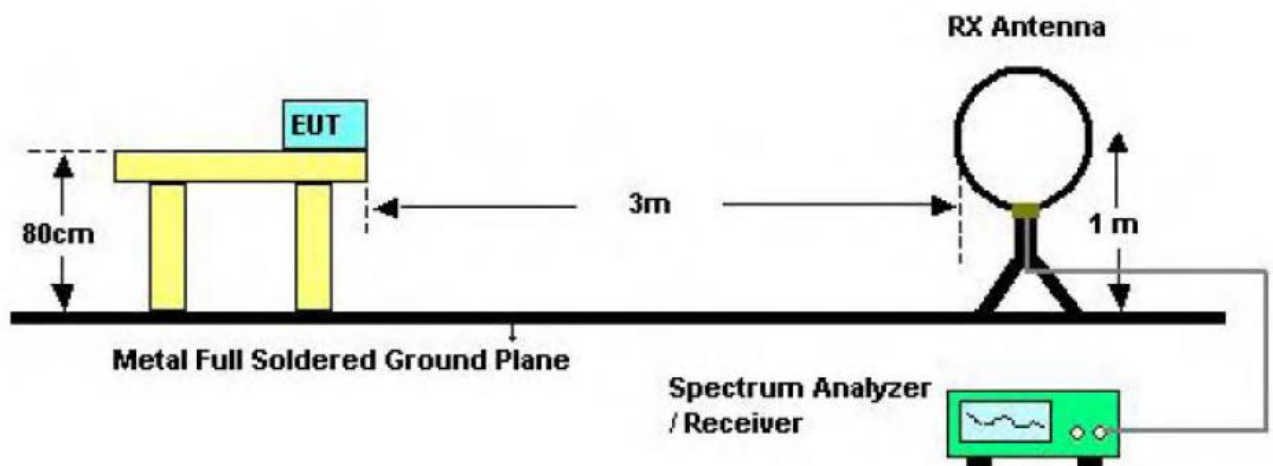

Below 30MHz Test Setup

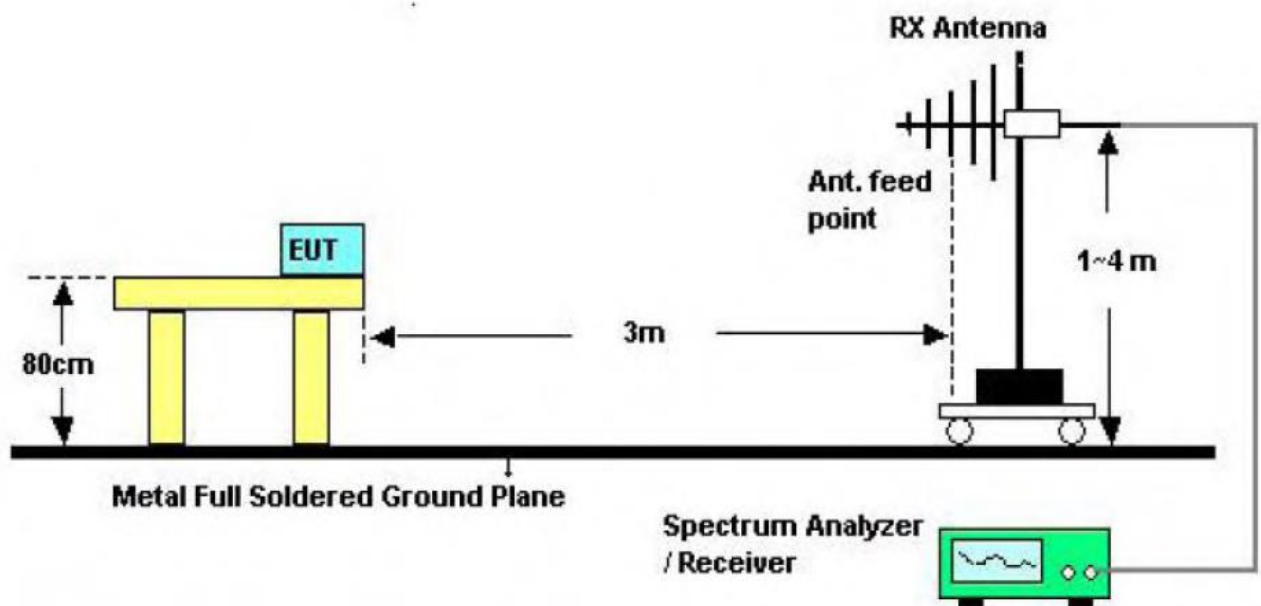

Bellow 1000MHz Test Setup

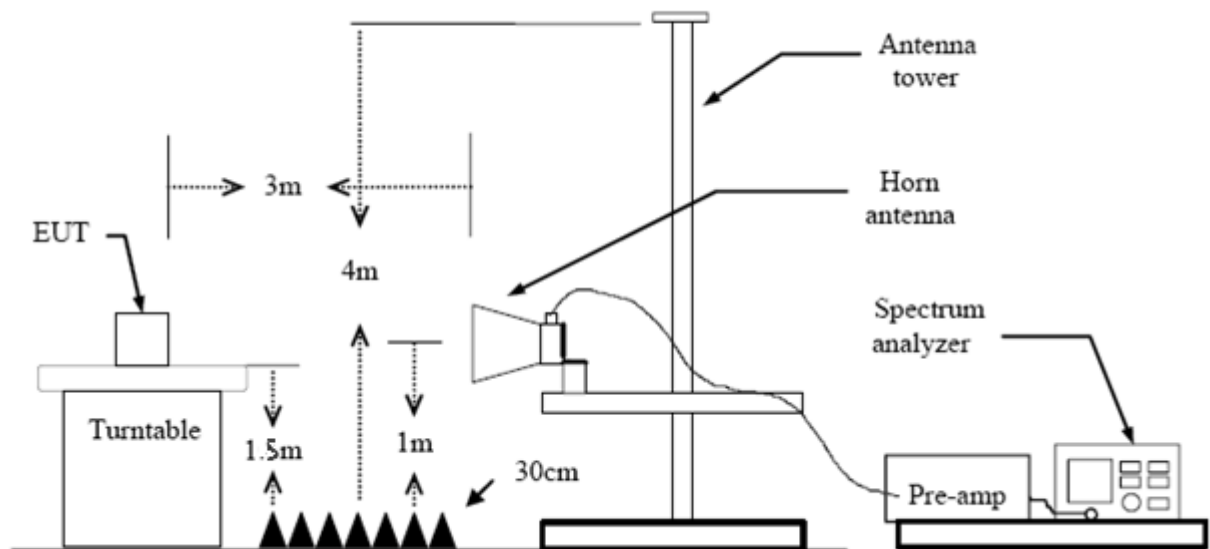

Above 1GHz Test Setup

5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency Below 1GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.



(8) For the actual test configuration, please see the test setup photo.

5.4 EUT Operating Condition

The EUT was set to Continual Transmitting in maximum power, and new batteries are used during testing.


5.5 Test Data

Please refer to the Attachment B.



7. Bandwidth Test

6.1 Test Setup



6.2 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:
Bandwidth: RBW=100 kHz, VBW=300kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.

6.3 EUT Operating Condition

The EUT was set to continuously transmitting for the Bandwidth Test.

6.4 Test Data

Please refer to the Attachment C.



8. Antenna Requirement

7.1 Standard Requirement

7.1.1 Standard

FCC Part 15.203

7.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

7.2 Antenna Connected Construction

The gains of the antenna used for transmitting is 3.43dBi, and the antenna de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

7.3 Result


The EUT antenna is PCB antenna Antenna. It complies with the standard requirement.

Antenna Type
☒ Permanent attached antenna
☐ Unique connector antenna
☐ Professional installation antenna



Attachment A-- Conducted Emission Test Data

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Test Mode:	Mode 1
Remark:	Only worse case is reported.

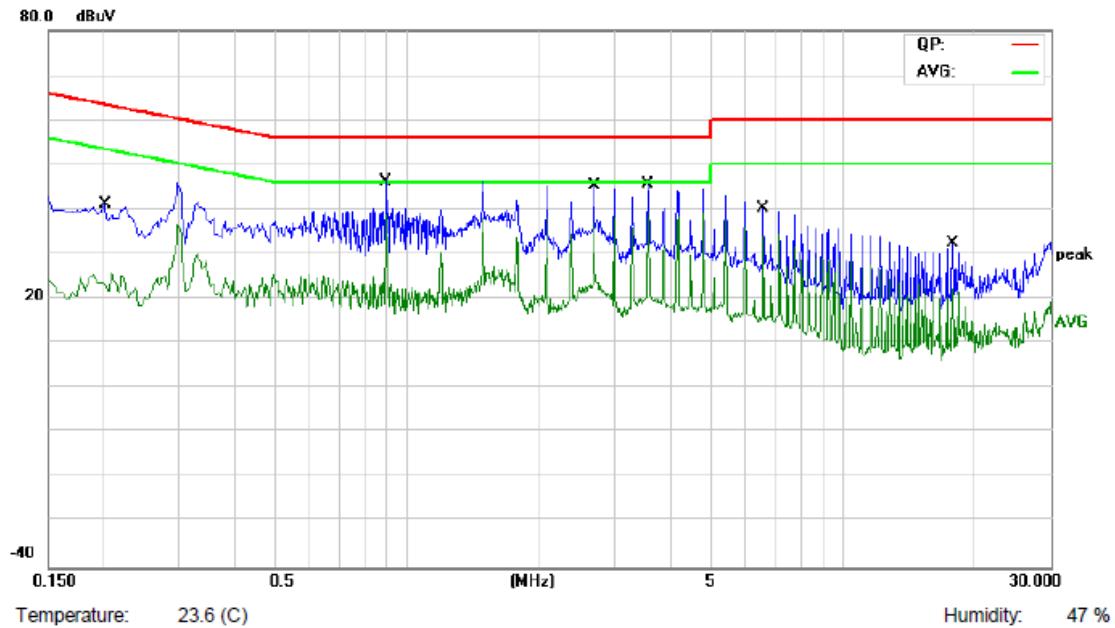

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	0.2020	20.57	9.72	30.29	63.52	-33.23	QP
2	0.2020	9.18	9.72	18.90	53.52	-34.62	AVG
3	0.8980	33.13	10.01	43.14	56.00	-12.86	QP
4 *	0.8980	27.87	10.01	37.88	46.00	-8.12	AVG
5	2.6859	30.96	10.12	41.08	56.00	-14.92	QP
6	2.6859	25.45	10.12	35.57	46.00	-10.43	AVG
7	3.5819	31.92	9.99	41.91	56.00	-14.09	QP
8	3.5819	26.56	9.99	36.55	46.00	-9.45	AVG
9	6.5659	23.03	9.85	32.88	60.00	-27.12	QP
10	6.5659	15.25	9.85	25.10	50.00	-24.90	AVG
11	17.9139	8.96	10.38	19.34	60.00	-40.66	QP
12	17.9139	0.90	10.38	11.28	50.00	-38.72	AVG


Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

2. Margin (dB) = QuasiPeak/Average (dBuV) - Limit (dBuV)



Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Test Mode:	Mode 1
Remark:	Only worse case is reported.

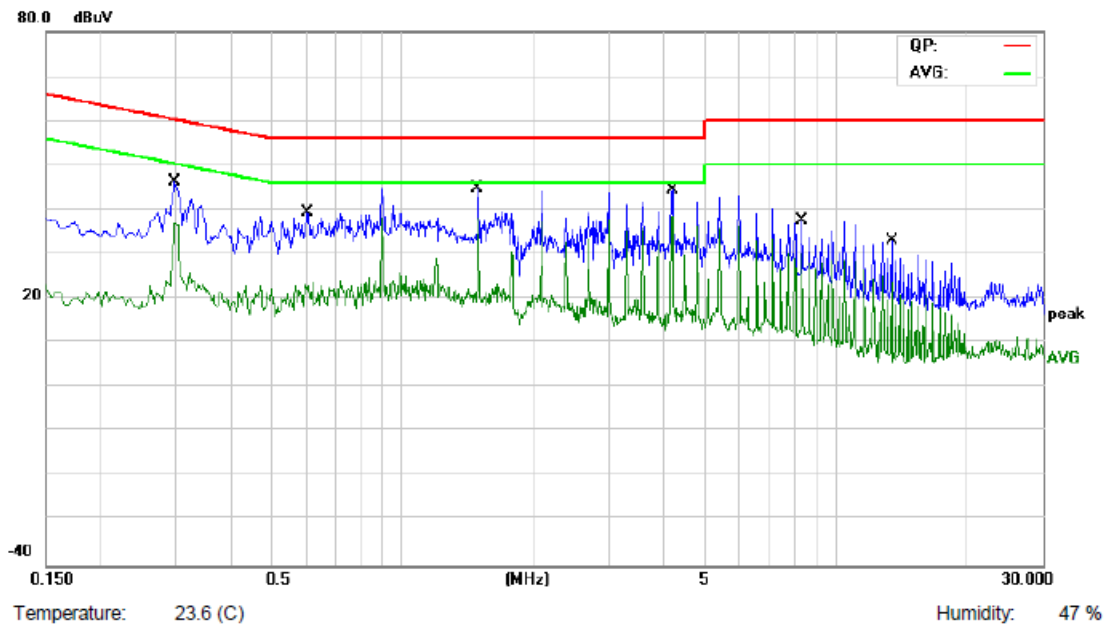

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.2977	33.55	9.80	43.35	60.30	-16.95	QP
2		0.2977	27.76	9.80	37.56	50.30	-12.74	AVG
3		0.6018	22.68	10.00	32.68	56.00	-23.32	QP
4		0.6018	12.50	10.00	22.50	46.00	-23.50	AVG
5		1.4939	33.38	9.98	43.36	56.00	-12.64	QP
6		1.4939	28.54	9.98	38.52	46.00	-7.48	AVG
7		4.1817	34.37	9.80	44.17	56.00	-11.83	QP
8	*	4.1817	29.41	9.80	39.21	46.00	-6.79	AVG
9		8.3619	23.74	9.88	33.62	60.00	-26.38	QP
10		8.3619	17.87	9.88	27.75	50.00	-22.25	AVG
11		13.4379	14.77	10.09	24.86	60.00	-35.14	QP
12		13.4379	6.91	10.09	17.00	50.00	-33.00	AVG

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)

2. Margin (dB) = QuasiPeak/Average (dBuV)-Limit (dBuV)




Attachment B-- Radiated Emission Test Data


Radiated Spurious Emission (9 KHz~30 MHz)

From 9 KHz to 30 MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Radiated Spurious Emission (Below 1 GHz)

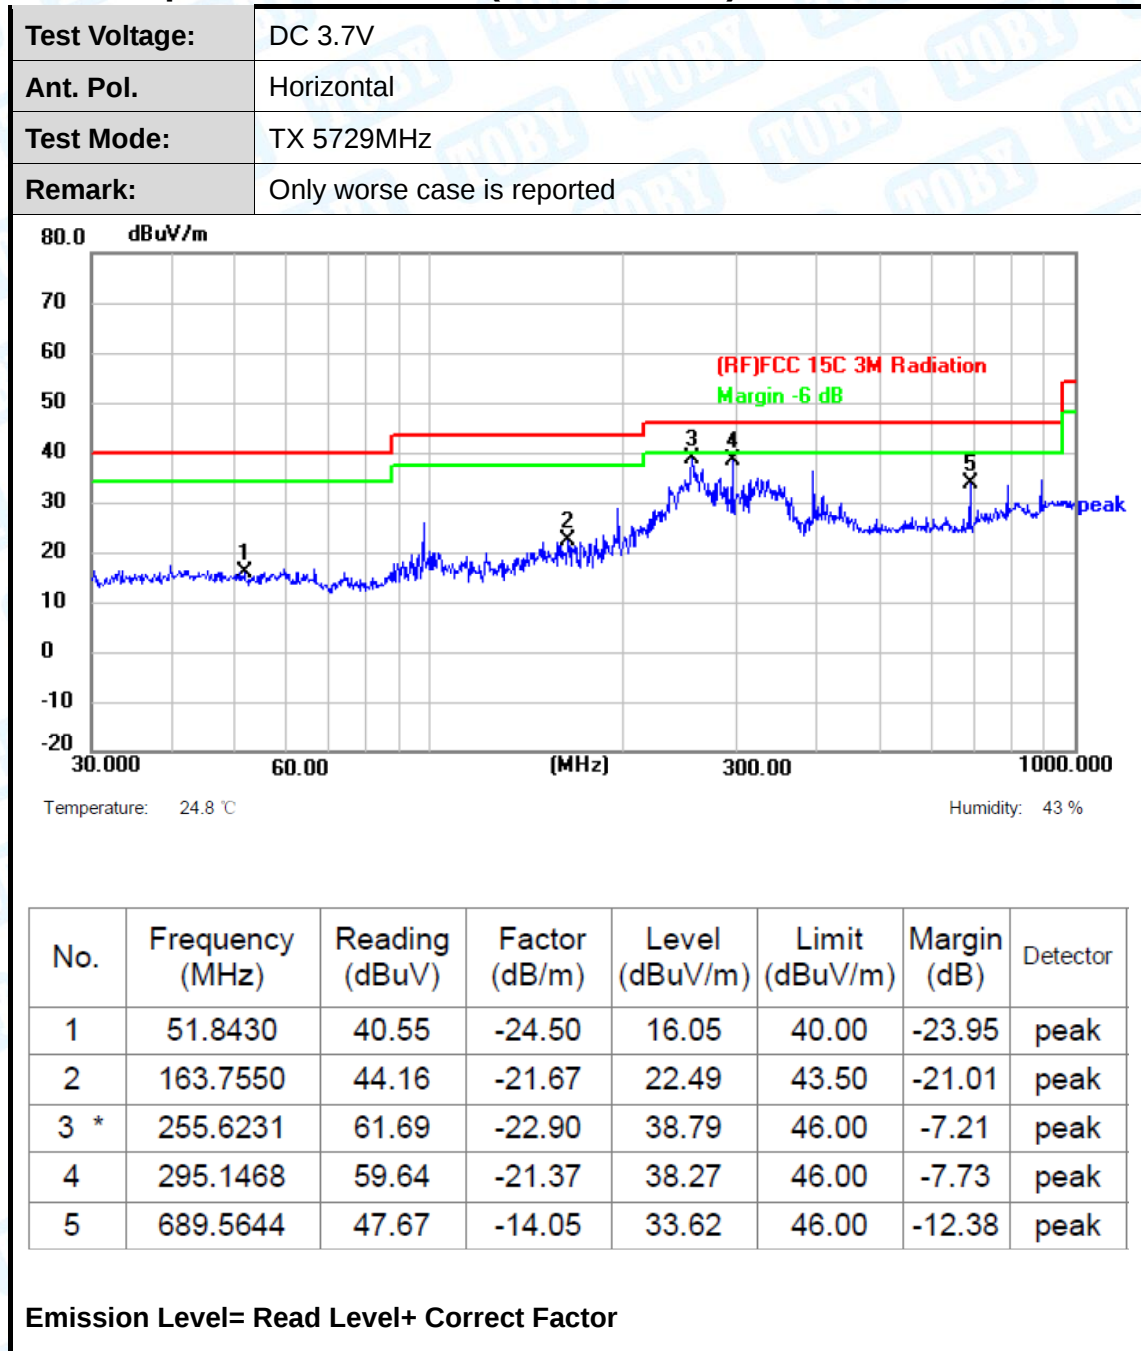

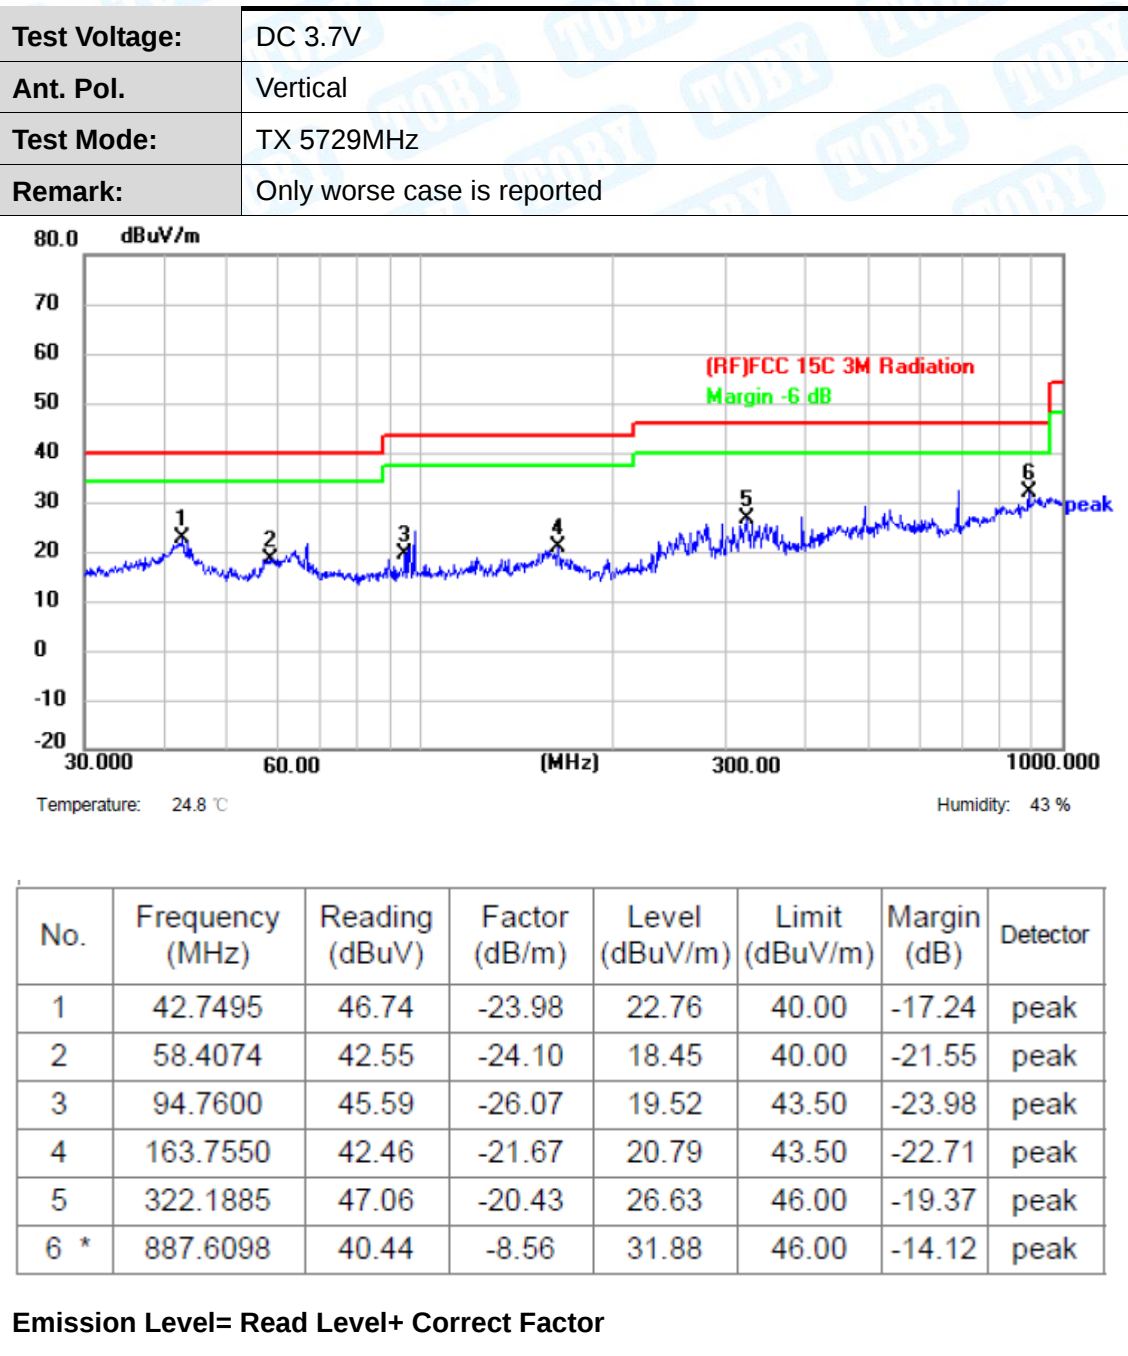

Radiated Spurious Emission (Above 1 GHz)

Test Voltage:	DC 3.7V
Ant. Pol.	Horizontal
Test Mode:	TX 5729MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

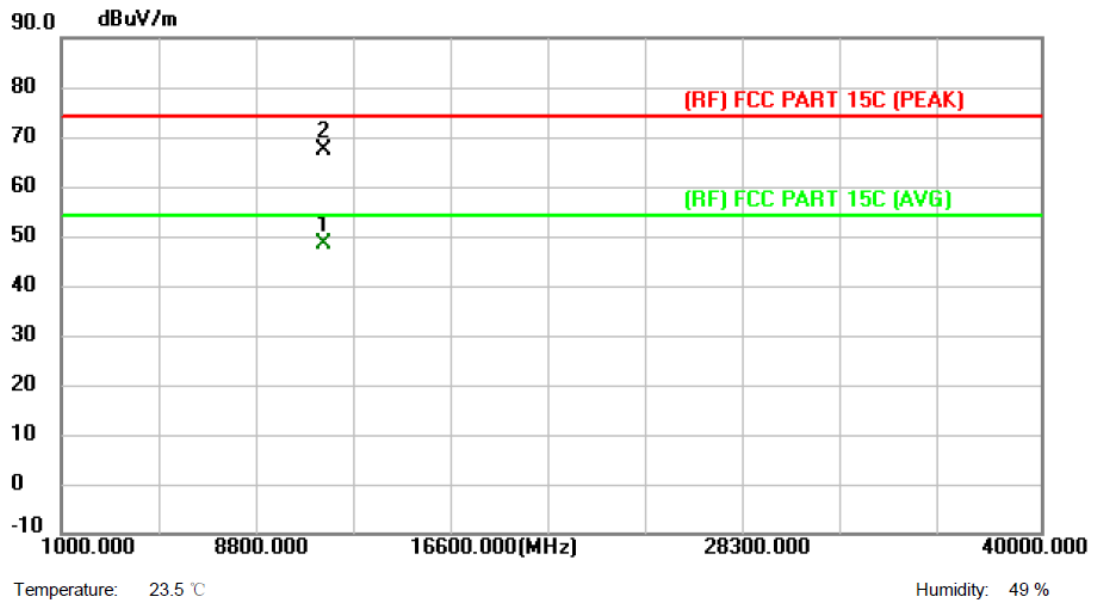


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11458.239	47.88	0.68	48.56	54.00	-5.44	AVG
2	11458.789	66.56	0.70	67.26	74.00	-6.74	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Test Voltage:	DC 3.7V
Ant. Pol.	Vertical
Test Mode:	TX 5729MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

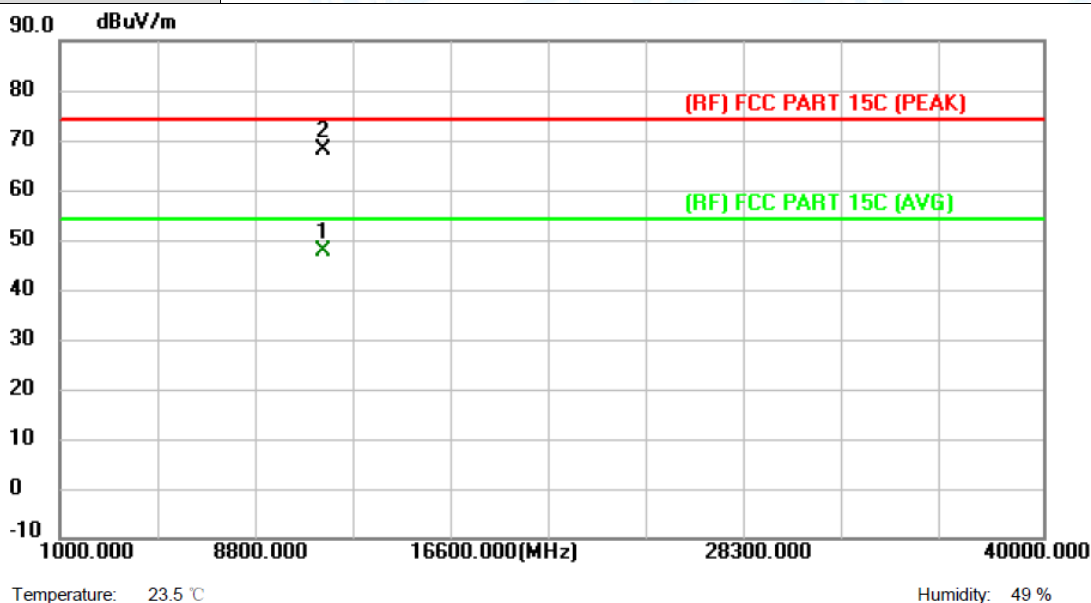


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11458.342	46.82	0.70	47.52	54.00	-6.48	AVG
2 *	11458.691	67.28	0.70	67.98	74.00	-6.02	peak

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Test Voltage:	DC 3.7V
Ant. Pol.	Horizontal
Test Mode:	TX 5786MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

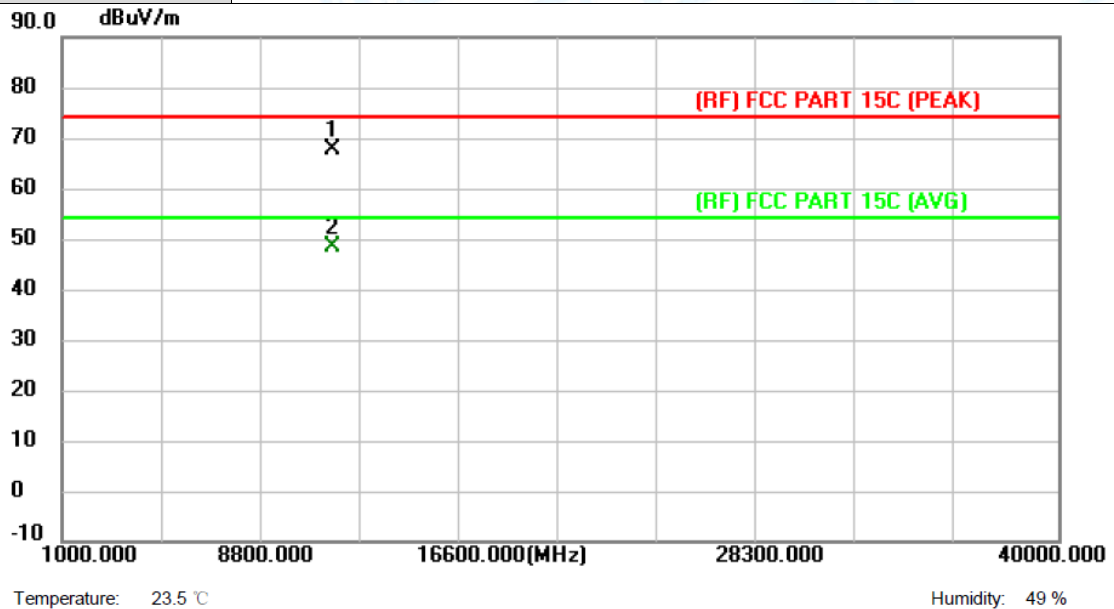


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	11572.153	67.01	0.84	67.85	74.00	-6.15	peak
2 *	11572.394	47.69	0.84	48.53	54.00	-5.47	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Test Voltage:	DC 3.7V
Ant. Pol.	Vertical
Test Mode:	TX 5786MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

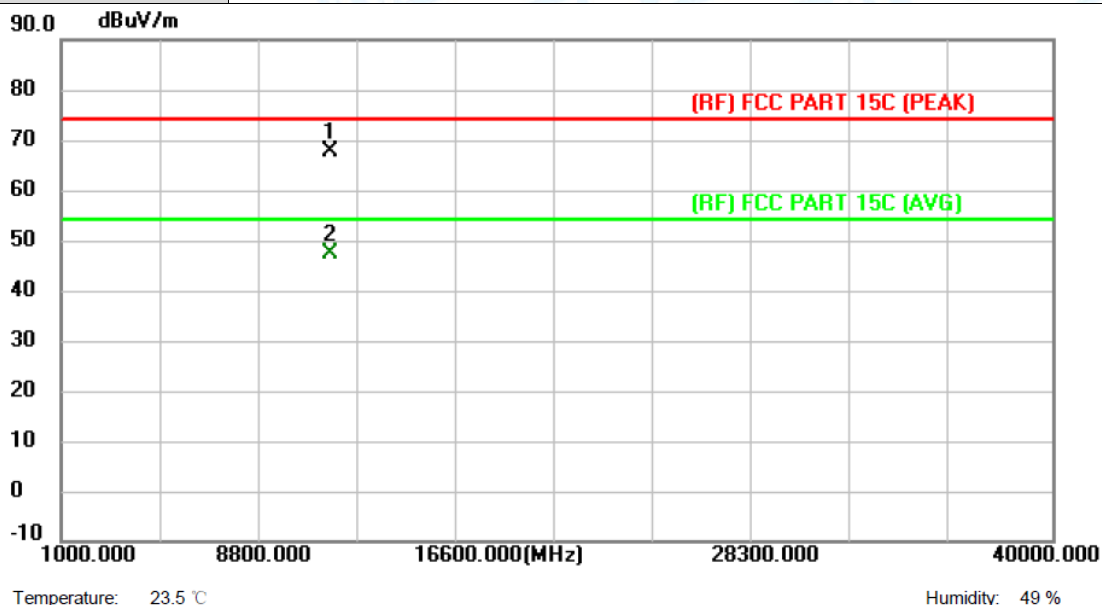


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11572.692	66.99	0.84	67.83	74.00	-6.17	peak
2	11572.867	46.45	0.84	47.29	54.00	-6.71	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Test Voltage:	DC 3.7V
Ant. Pol.	Horizontal
Test Mode:	TX 5846MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

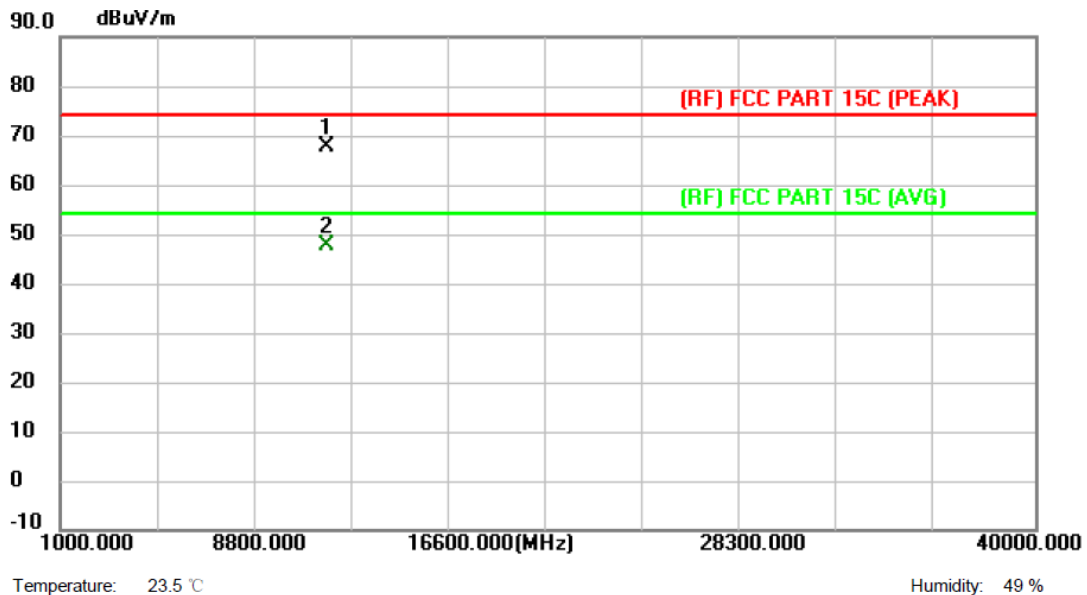


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11692.158	66.61	1.03	67.64	74.00	-6.36	peak
2	11692.489	46.59	1.03	47.62	54.00	-6.38	AVG

Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Test Voltage:	DC 3.7V
Ant. Pol.	Vertical
Test Mode:	TX 5846MHz
Remark:	No report for the emission which more than 10 dB below the prescribed limit.

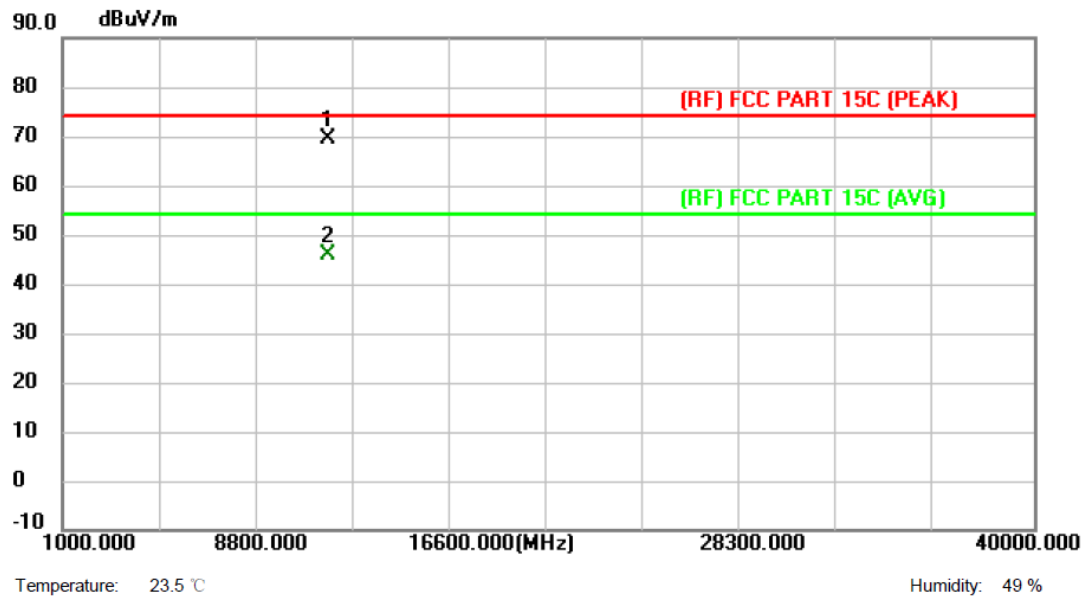

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	11692.436	68.53	1.03	69.56	74.00	-4.44	peak
2	11692.723	44.86	1.03	45.89	54.00	-8.11	AVG


Remark:

1. Corr. = Antenna Factor (dB/m) + Cable Loss (dB)
2. Peak/AVG (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Peak/AVG (dBuV/m) - Limit PK/AVG (dBuV/m)
4. The tests evaluated 1-26.5GHz, The testing has been conformed to the 10th harmonic of the highest fundamental frequency.
5. No report for the emission which more than 20dB below the prescribed limit.
6. The peak value < average limit, So only show the peak value.



Field Strength of the Fundamental

Test Voltage:	DC 3.7V
Ant. Pol.	Horizontal
Test Mode:	TX 5729MHz
Remark:	

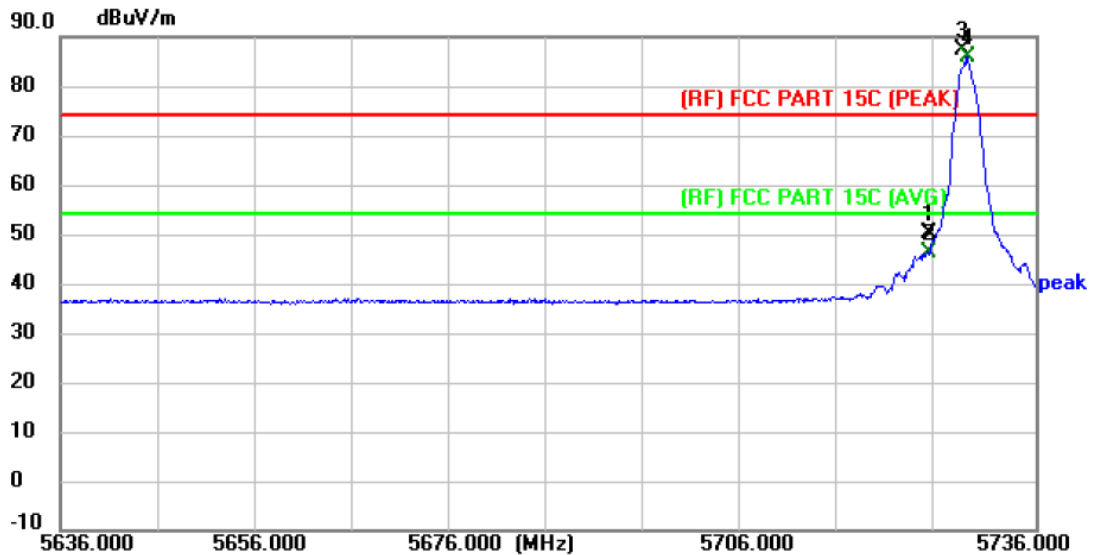


Temperature: 23.5 °C


Humidity: 49 %


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5725.000	53.30	-3.02	50.28	74.00	-23.72	peak
2	5725.000	49.32	-3.02	46.30	54.00	-7.70	AVG
3 X	5728.500	90.29	-3.03	87.26	114.00	-26.74	peak
4 *	5729.000	88.77	-3.02	85.75	94.00	-8.25	AVG


Emission Level= Read Level+ Correct Factor




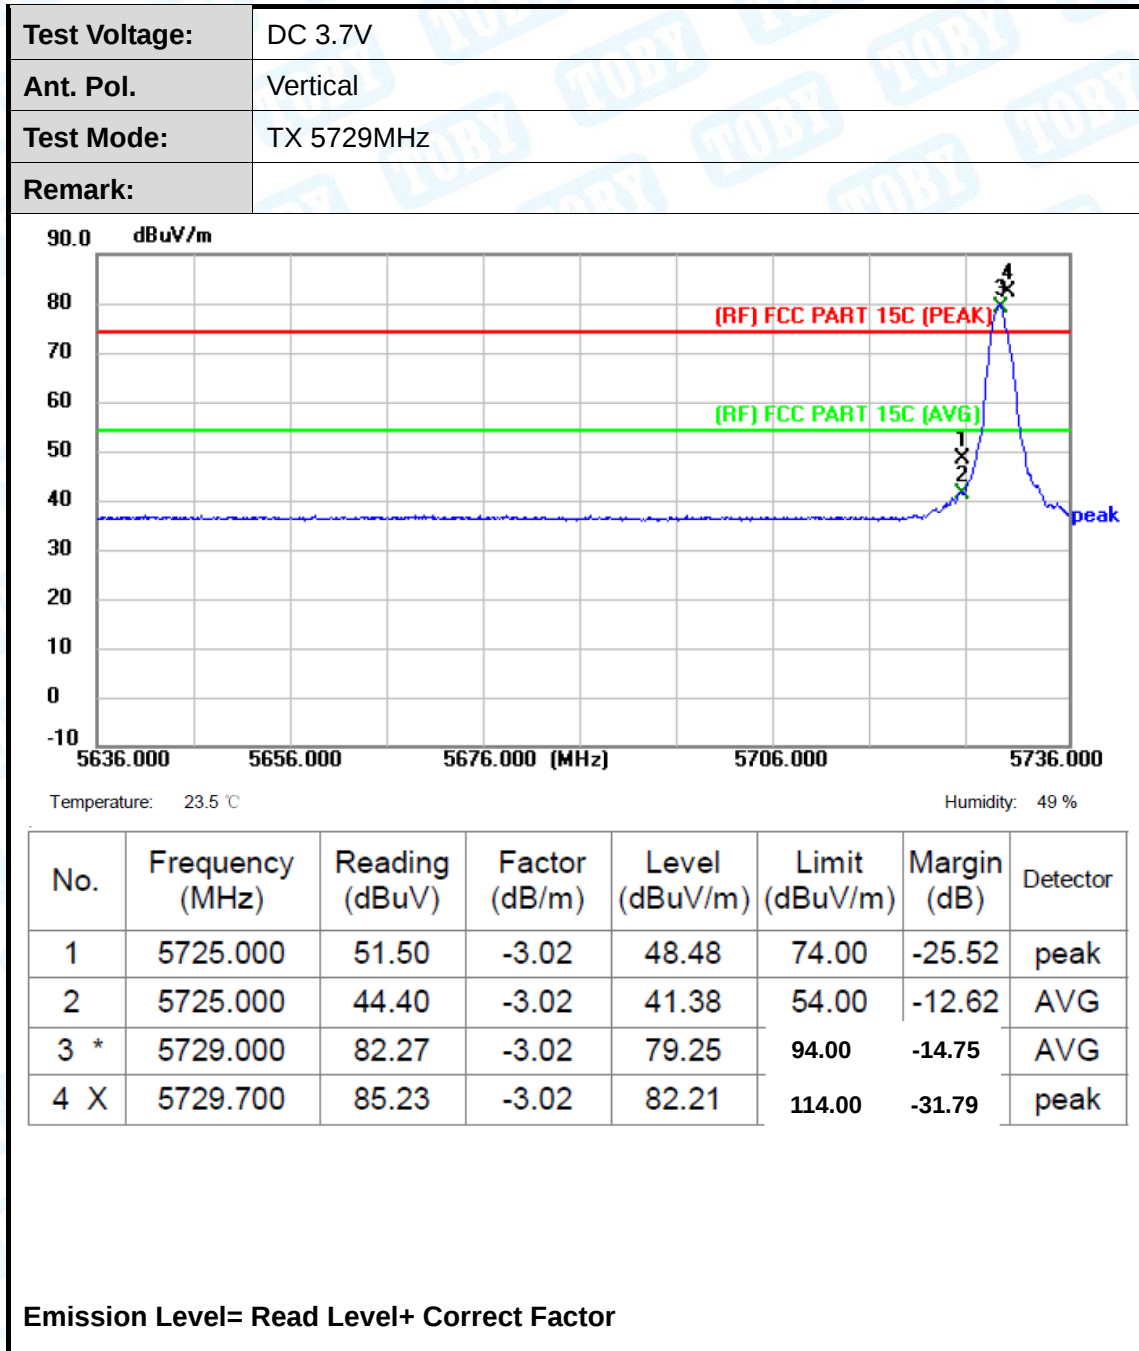

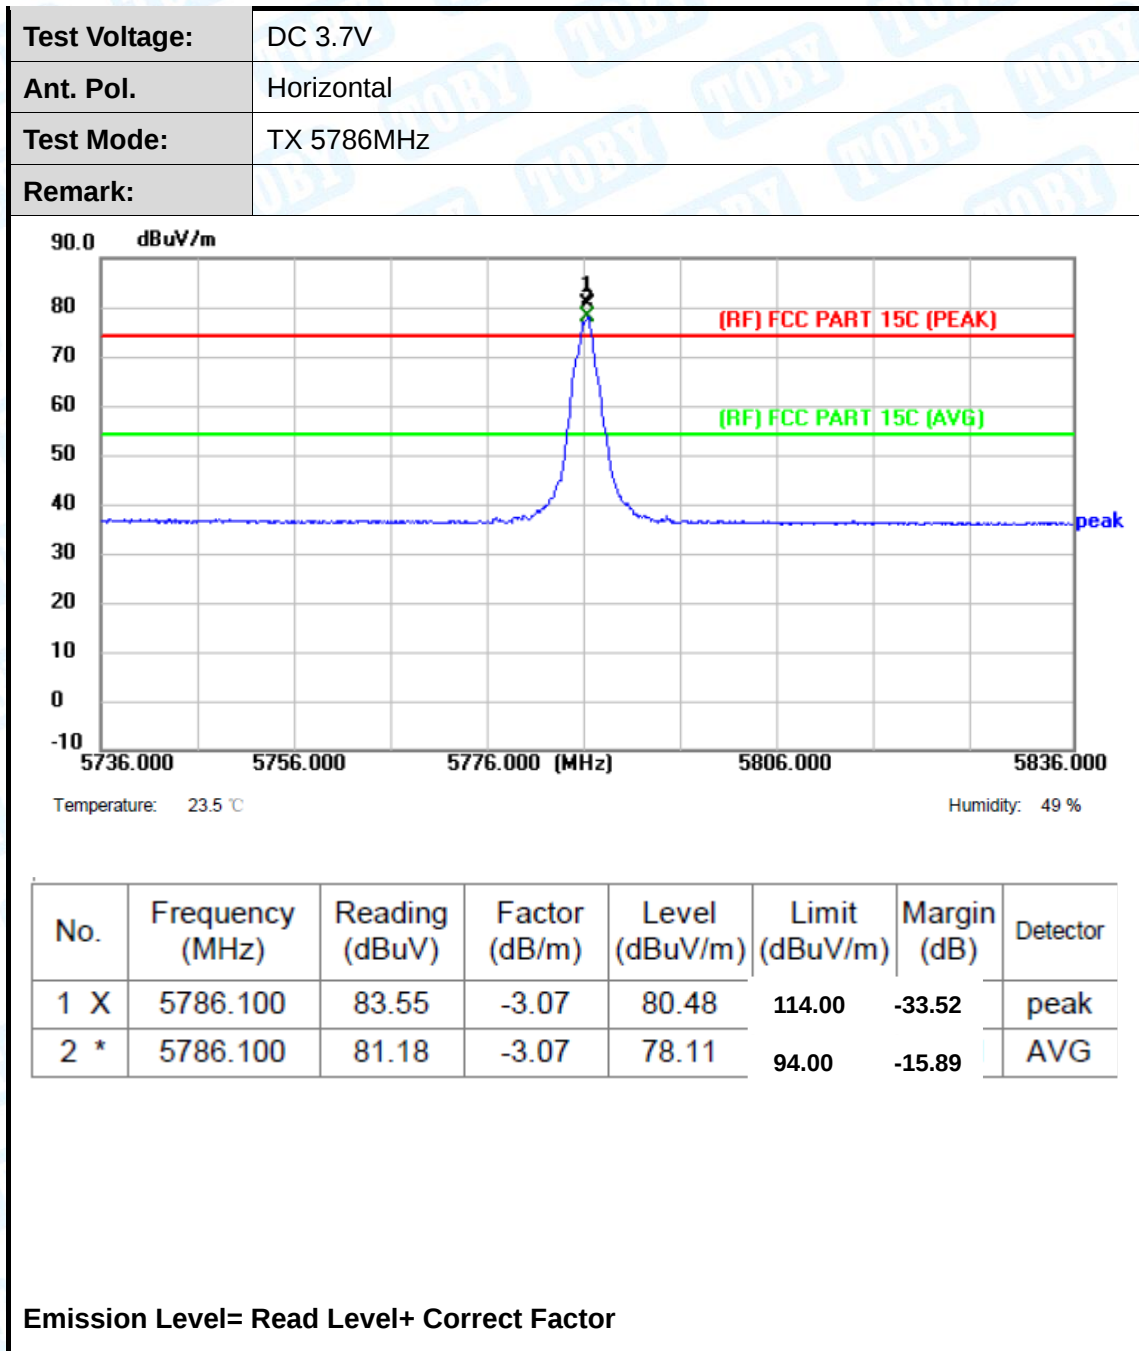

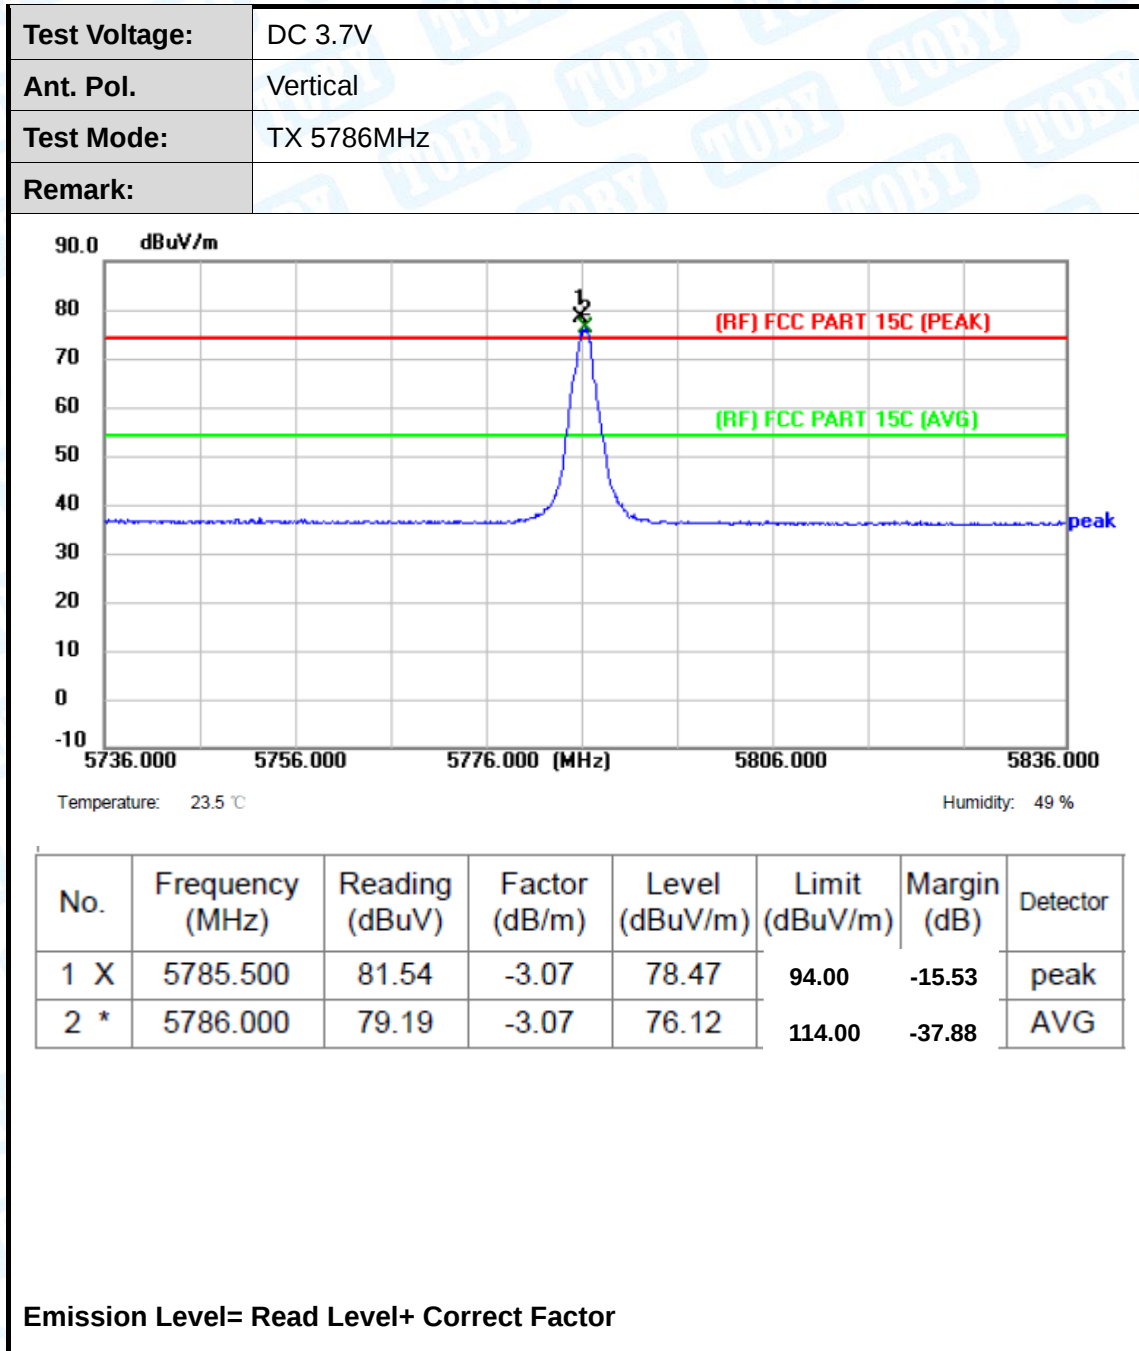


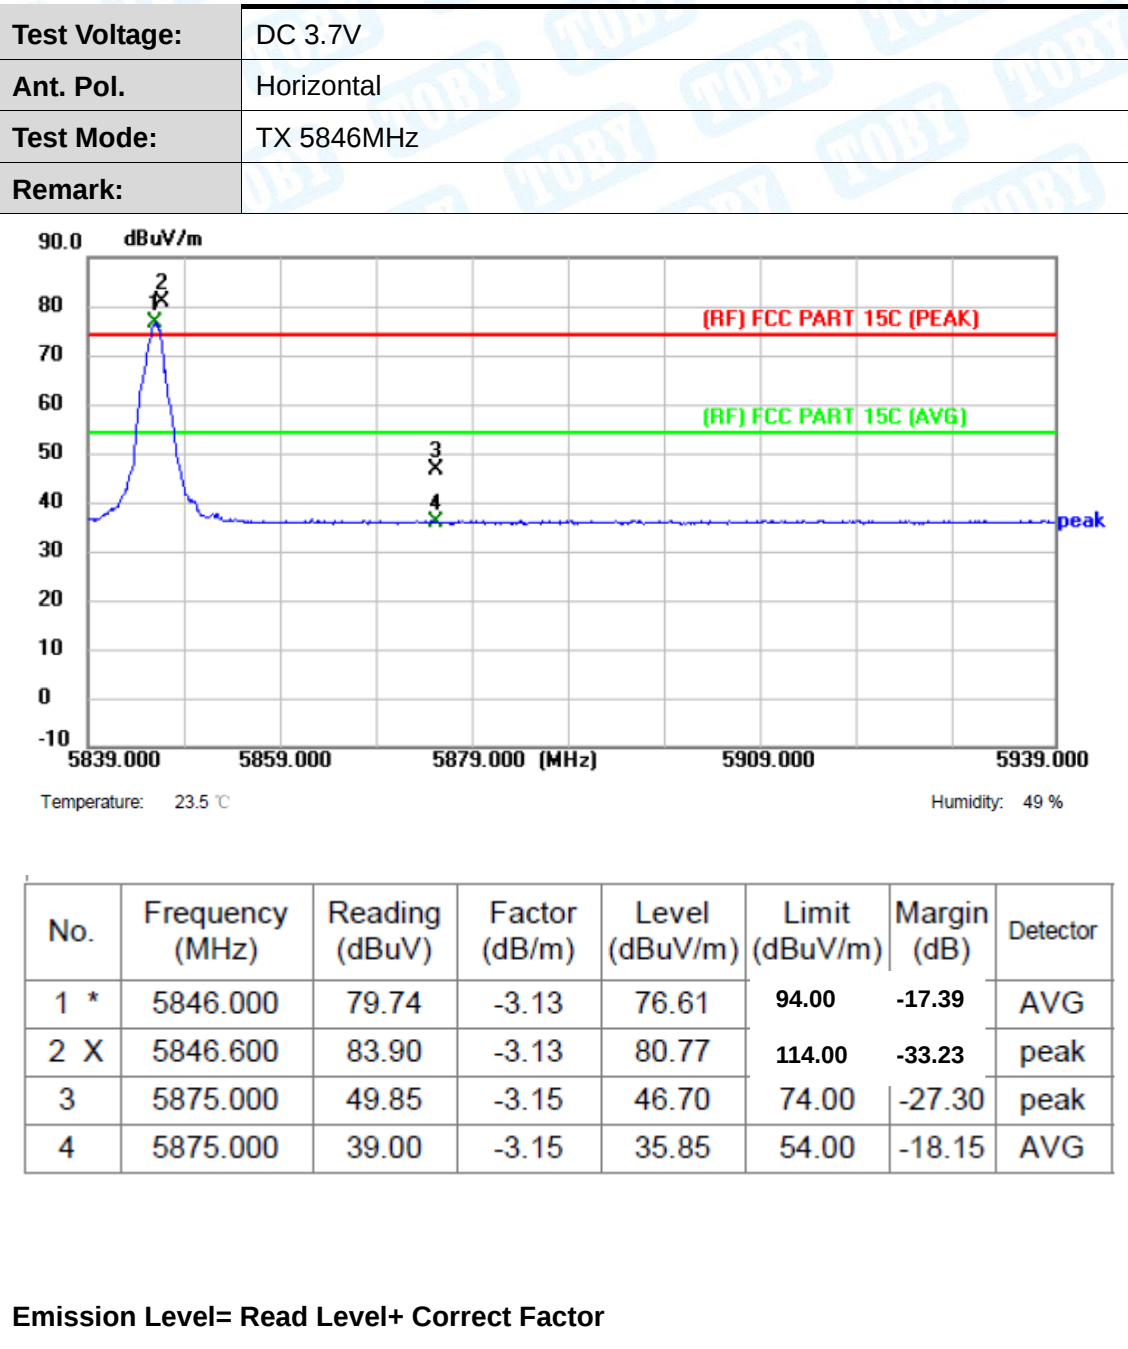


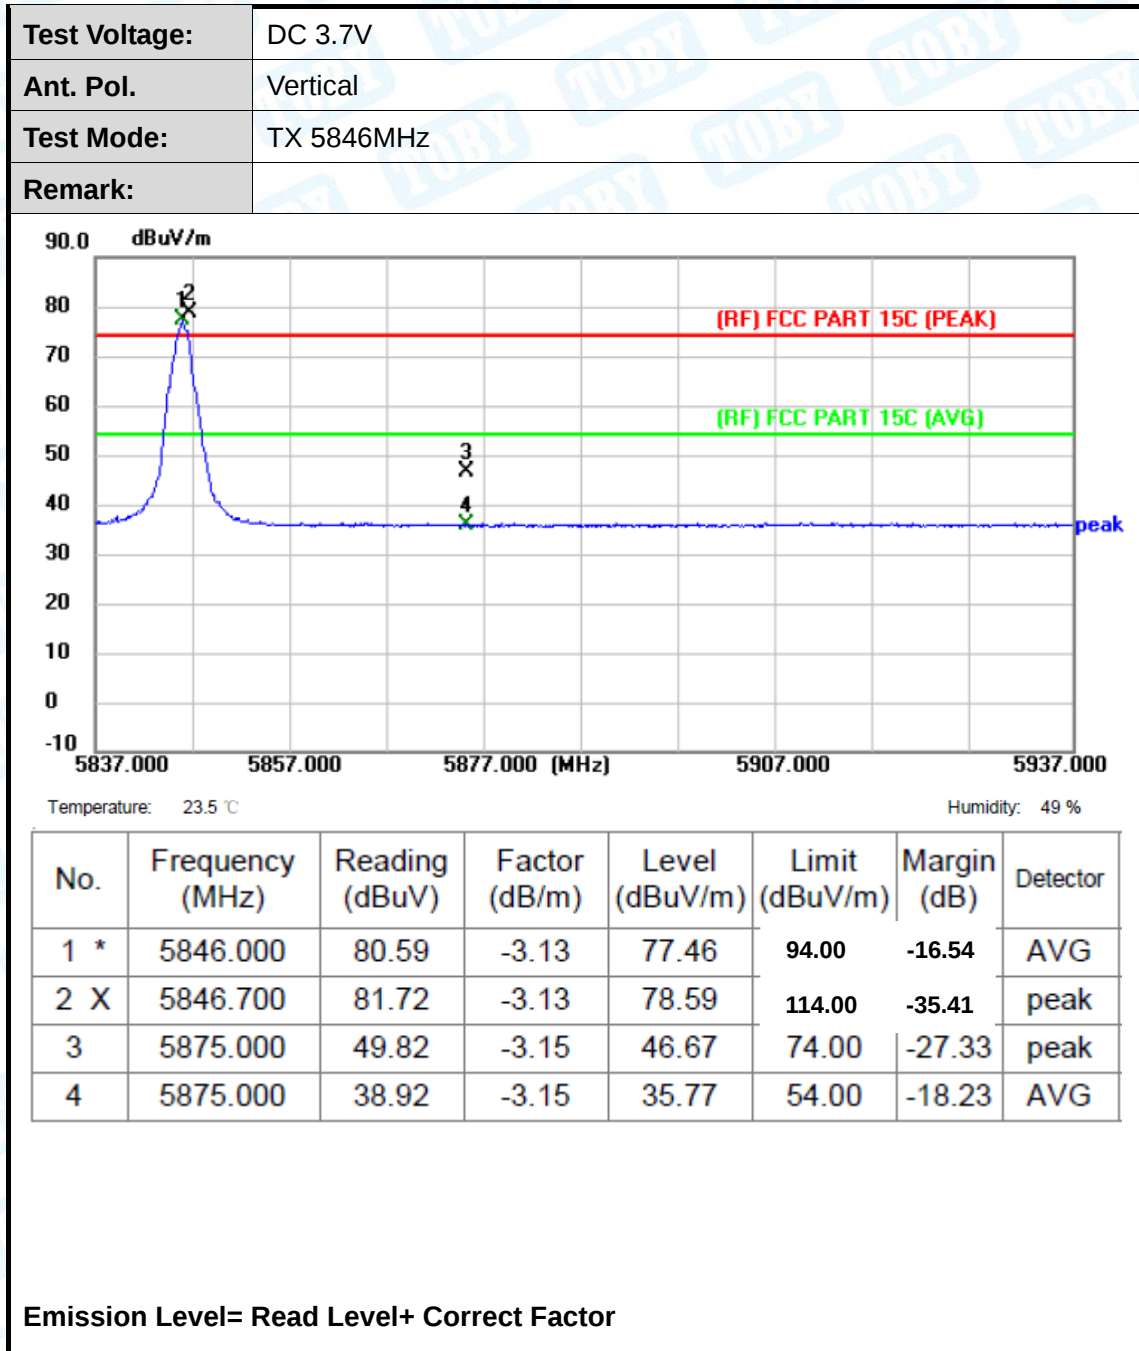

Attachment C--Bandwidth Test Data

Channel Frequency (MHz)	20dB Bandwidth (MHz)
5729	2.64
5786	2.61
5846	2.71

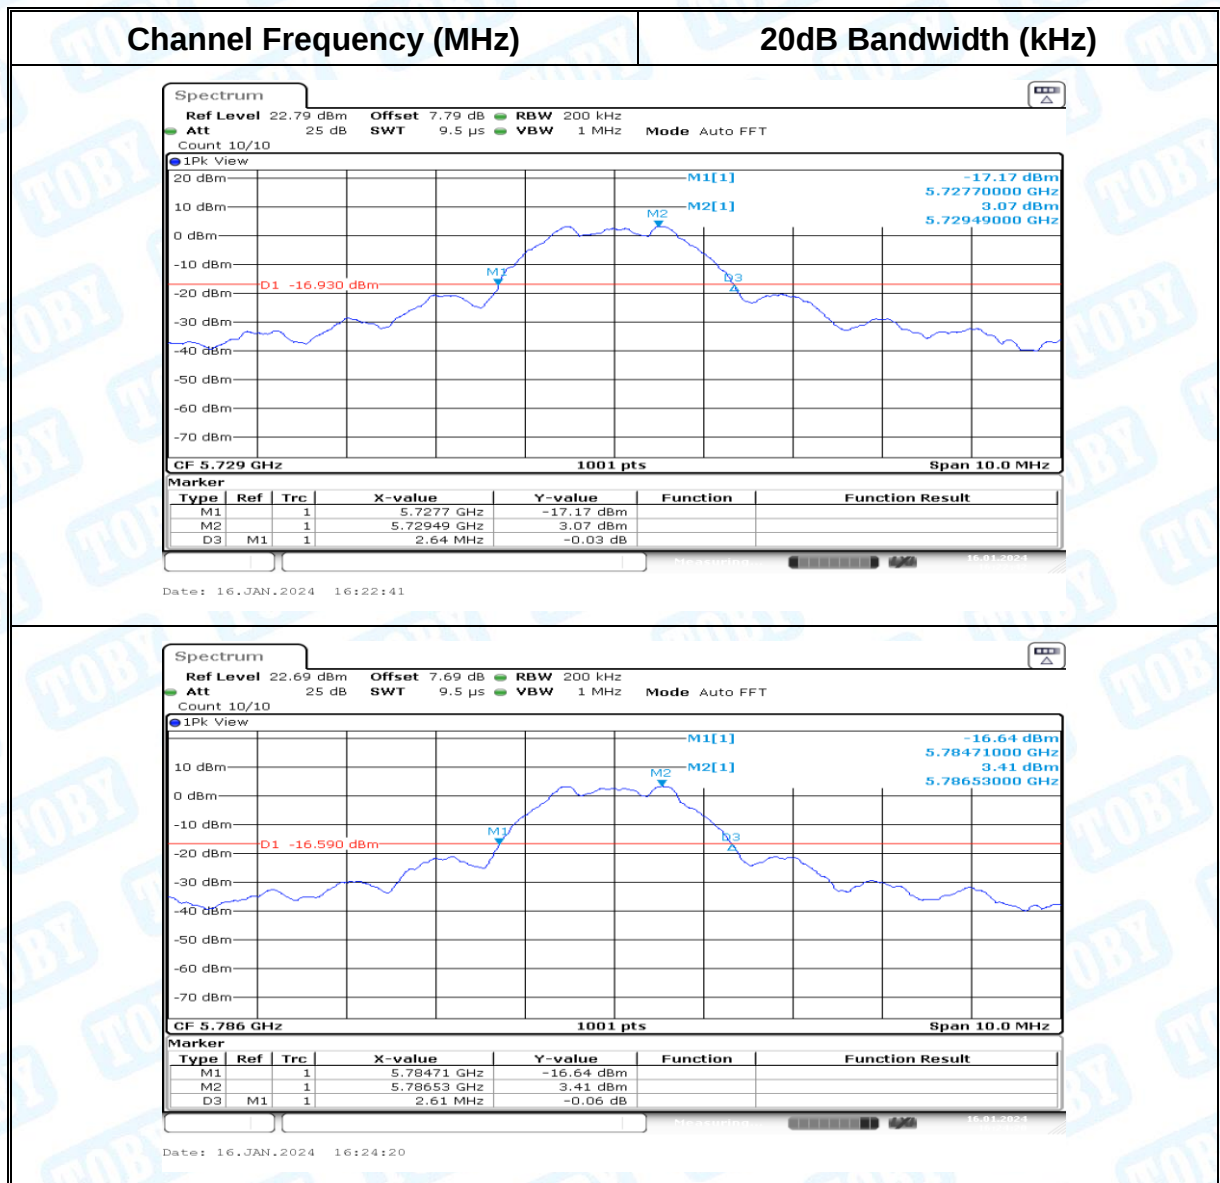

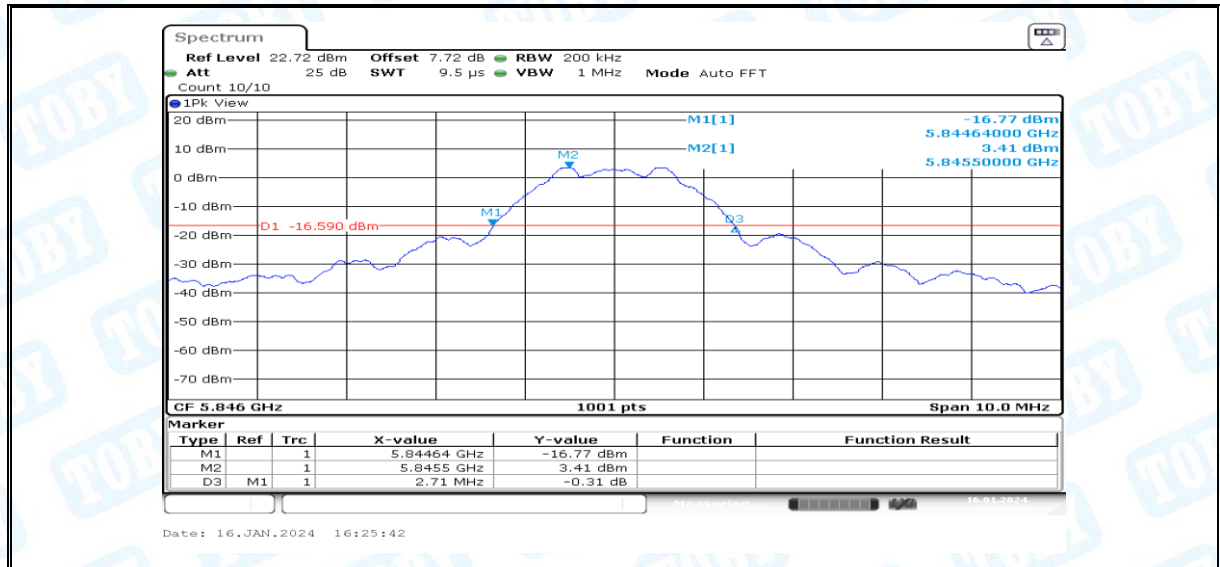

-----END OF THE REPORT-----

