

FCC Radio Test Report


FCC ID: QISCMR-AL09

This report concerns (check one): ☒ Original Grant ☐ Class I Change ☐ Class II Change


Project No. : 1712C036A
Equipment : Tablet
Model Name : CMR-AL09
Applicant : Huawei Technologies Co., Ltd.
Address : Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District Shenzhen China

Date of Receipt : Dec, 02, 2017
Date of Test : Dec, 02, 2017 ~ Jan, 17, 2018
Issued Date : Jan, 23, 2018
Tested by : BTL Inc.

Technical Engineer :


(Kenji Lin)

Authorized Signatory :


(Andy Chiu)

B T L I N C .

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City
221, Taiwan

TEL:+886-2-2657-3299 FAX: +886-2- 2657-3331



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL's** authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION	11
3.3 BLOCK DIGRAM SHOWING THECONFIGURATIONOFSYSTEMTESTED FOR RADIATED	12
3.4 DESCRIPTION OF SUPPORT UNITS	12
4 . TEST RESULT	13
4.1 OUTPUT POWER MEASUREMENT	13
4.1.1 LIMIT	13
4.1.2 TEST PROCEDURE	13
4.1.3 TESTSETUP LAYOUT	13
4.1.4 TEST DEVIATION	13
4.1.5 TEST RESULTS	13
4.2 OCCUPIED BANDWIDTH MEASUREMENT	14
4.2.1 TEST PROCEDURE	14
4.2.2 TEST SETUP LAYOUT	14
4.2.3 TEST DEVIATION	14
4.2.4 TEST RESULTS	14
4.3 CONDUCTED EMISSIONS MEASUREMENT	15
4.3.1 LIMIT	15
4.3.2 TEST PROCEDURES	15
4.3.3 TESTSETUP LAYOUT	15
4.3.4 TESTDEVIATION	15
4.3.5 TEST RESULTS	15
4.4 RADIATED EMISSIONS MEASUREMENT	16
4.4.1 LIMIT	16
4.4.2 TEST PROCEDURES	16
4.4.3 TESTSETUP LAYOUT	17
4.4.4 TESTDEVIATION	18
4.4.5 TEST RESULTS	18
4.5 BAND EDGE /EMISSION MASK MEASUREMENT	19
4.5.1 LIMIT	19

Table of Contents	Page
4.5.2 TEST PROCEDURES	19
4.5.3 TESTSETUP LAYOUT	19
4.5.4 TESTDEVIATION	19
4.5.5 TEST RESULTS	19
4.6 FREQUENCY STABILITY MEASUREMENT	20
4.6.1 LIMIT	20
4.6.2 TEST PROCEDURES	20
4.6.3 TESTSETUP LAYOUT	20
4.6.4 TESTDEVIATION	20
4.6.5 TEST RESULTS	20
5. LIST OF MEASUREMENT EQUIPMENTS	21
APPENDIX A - OUTPUT POWER	22
APPENDIX B - OCCUPIED BANDWIDTH	27
APPENDIX C - CONDUCTED EMISSIONS	35
APPENDIX D - RADIATED EMISSION	40
APPENDIX E - EMISSION MASK	57
APPENDIX F - FREQUENCY STABILITY	62

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-9-1712C036	Original Report	Jan, 18, 2018
BTL-FCCP-9-1712C036A	Compared with the previous report (BTL-FCCP-9-1712C036), The model name is changed which does not affected the test result the rest are kept the same.	Jan. 23, 2018

1. CERTIFICATION

Equipment : Tablet
Brand Name : HUAWEI
Model Name : CMR-AL09
Applicant : Huawei Technologies Co.,Ltd.
Manufacturer : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,
Shenzhen 518129, P.R.China
Factory : Huawei Technologies Co.,Ltd.
Address : Administration Building, Huawei Base, Bantian, Longgang District ,
Shenzhen 518129, P.R.China
Date of Test : Dec, 02, 2017 ~ Jan, 17, 2018
Test Sample : Engineering Sample
Standard(s) : 47 CFR FCC Part 90 Subpart S
47 CFR FCC Part 2 & ANSI/TIA-603-D-2010
FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-9-1712C036A) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the LTE Band 26 part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 90 Subpart S & Part 2			
Standard(s) Section	Test Item	Judgment	Tested By
2.1046 & 90.635 (b)	Radiated power	PASS	Paul Li
2.1046 & 90.635 (b)	Conducted Output Power	PASS	Paul Li
2.1049 & 90.209	Occupied Bandwidth	PASS	Paul Li
2.1051 & 90.691	Conducted Spurious Emissions	PASS	Paul Li
2.1053 & 90.691	Radiated Spurious Emissions	PASS	Paul Li
2.1055 & 90.213	Frequency Stability	PASS	Paul Li
2.1051 & 90.209	Emission Mask	PASS	Paul Li

Note:

(1) "N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

Radiated emissions Test (Below 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Radiated emissions Test (Above 1 GHz):

CB15: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Conducted Test:

TR01: (FCC RN:674415; FCC DN:TW0659)

No. 68-1, Ln. 169, Sec.2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U,(dB)
CB15 (3m)	CISPR	9kHz ~ 150kHz	2.82
		150kHz ~ 30MHz	2.58

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
CB15 (3m)	CISPR	30MHz ~ 200MHz	V	4.20
		30MHz ~ 200MHz	H	3.64
		200MHz ~ 1,000MHz	V	4.56
		200MHz ~ 1,000MHz	H	3.90

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
CB15 (3m)	CISPR	1GHz ~ 6GHz	V	4.46
		1GHz ~ 6GHz	H	4.40
		6GHz ~ 18GHz	V	3.88
		6GHz ~ 18GHz	H	4.00

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Tablet			
Brand Name	HUAWEI			
Model Name	CMR-AL09			
Model Difference	N/A			
Modulation Type	UP: QPSK,16QAM DL: QPSK,16QAM,64AQM			
Operation Frequency	Bandwidth: 1.4MHz	814.7 ~ 823.3 MHz		
	Bandwidth: 3MHz	815.5 ~ 822.5 MHz		
	Bandwidth: 5MHz	816.5 ~ 821.5 MHz		
	Bandwidth: 10MHz	819 MHz		
Max. ERP Power	Bandwidth: 1.4MHz	QPSK	19.90	dBm
		16QAM	19.19	dBm
	Bandwidth: 3MHz	QPSK	19.93	dBm
		16QAM	19.23	dBm
	Bandwidth: 5MHz	QPSK	20.50	dBm
		16QAM	19.82	dBm
	Bandwidth: 10MHz	QPSK	20.32	dBm
		16QAM	19.60	dBm
Antenna Type	Fixed Internal Antenna			
Antenna Gain	-1.2 dBi			
Hardware Version	SH1CMRONLM			
Software Version	CMR-AL09 8.0.1.3(SP1C331)			
IMEI No	Radiated	867030030002165		
	Conducted	867030030002397		
Power Source	#1 Supplied from AC/DC adapter. #2 Battery Supplied.			
Power Rating	#1 Input: 100V~240V AC and 50/60 Hz,0.5A Output: 5V --- 2A OR 9V --- 2A #2 --- 3.82V 7350mAh			

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. The EUT contains following accessory devices.

Item	Mfr/Brand	Model.
Battery	SCUD (FUJIAN) Electronics Co., Ltd	HB2994I8ECW
	Sunwoda Electronic Co., LTD.	HB2994I8ECW
	Huizhou Desay Battery Co., Ltd	HB2994I8ECW
USB Cable	HONGLIN TECHNOLOGY CO.,LTD	130-26988
	Luxshare Precision Industry Co., Ltd	L99UC001-CS-H
	FOXCONN INTERCONNECT TECHNOLOGY LIMITED	CUDU01B-HC288-EH
	foxlink cheng uei precision industry Co., Ltd	6691-10YZ-0183
USB Type-C to 3.5 mm headset jack adapter cable	FOSTER ELECTRIC CO. (HONG KONG) LTD	620891
	Boluo County Quancheng Electronic Co.,Ltd.	6001-7001-TC-294
	Jiangxi Lianchuang Hongsheng Electronic Co.,LTD	HWTYPEC3R5009AW
	MERRY ELECTRONICS CO., LTD.	L99UD002-CS-H
Adapter	Salcomp (Shenzhen) Co., Ltd.	HW-059200UHQ
	HUIZHOU BYD ELECTRONIC CO.,LTD	

3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION

Following channel(s) was (were) selected for the final test as listed below:

LTE Band 26												
Test Item	Channel Bandwidth(MHz)				Modulation		Tested Channel			RB		
	1.4	3	5	10	QPSK	16QAM	Low	Middle	High	1	50%	100%
ERP	V	V	V	V	V	V	V	V	V	V	V	V
Occupied Bandwidth	V	V	V	V	V	V	V	V	V	-	-	V
Conducted Emission	V	V	V	V	V	-	-	V	-	V	-	-
Emission Mask	V	V	V	V	V	-	V	-	V	V	-	V
Radiated Emission	V	-	-	V	V	-	-	V	-	V	-	-
Frequency Stability	V	V	V	V	V	-	-	V	-	-	-	V


Note:

- 1) The mark "V" means that this configuration is chosen for testing.
- 2) The mark "-" means that this configuration is not testing.

EUT TEST CONDITIONS:

Test Item	Environmental Conditions	Test Voltage
ERP	24°C, 63%RH	DC 3.82V
Conducted Output Power	25°C, 65%RH	DC 3.82V
Occupied Bandwidth	25°C, 65%RH	DC 3.82V
Conducted Emission	25°C, 65%RH	DC 3.82V
Radiated Emission	25°C, 60%RH	AC 120V/60Hz
Emission Mask	25°C, 65%RH	DC 3.82V
Frequency Stability	25°C, 65%RH	DC 3.82V

3.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED FOR RADIATED

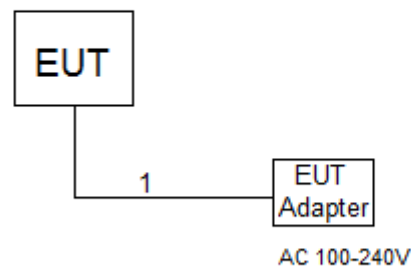

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-	-	-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.2m	USB cable

4. TEST RESULT

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

Mobile / Portable station are limited to 100 watts e.r.p.

4.1.2 TEST PROCEDURE

EIRP/ERP:

EIRP= Conducted Power +Antenan gain


ERP power=EIPR power-2.15dBi.

Conducted Power:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TESTSETUP LAYOUT

Conducted Power Measurement



4.1.4 TEST DEVIATION

No deviation

4.1.5 TEST RESULTS


Please refer to the Appendix A.

4.2 OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 TEST PROCEDURE

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.

4.2.2 TEST SETUP LAYOUT

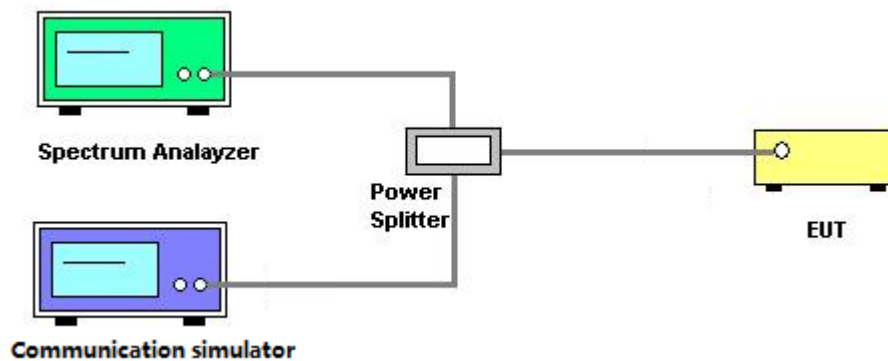

4.2.3 TEST DEVIATION

No deviation

4.2.4 TEST RESULTS

Please refer to the Appendix B.

4.3 CONDUCTED EMISSIONS MEASUREMENT


4.3.1 LIMIT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB. The limit of emission is equal to -13dBm.

4.3.2 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set $RBW \geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10 \log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10 \log(P)](dB)$
 $= [30 + 10 \log(P)](dBm) - [43 + 10 \log(P)](dB)$
 $= -13dBm$

4.3.3 TESTSETUP LAYOUT

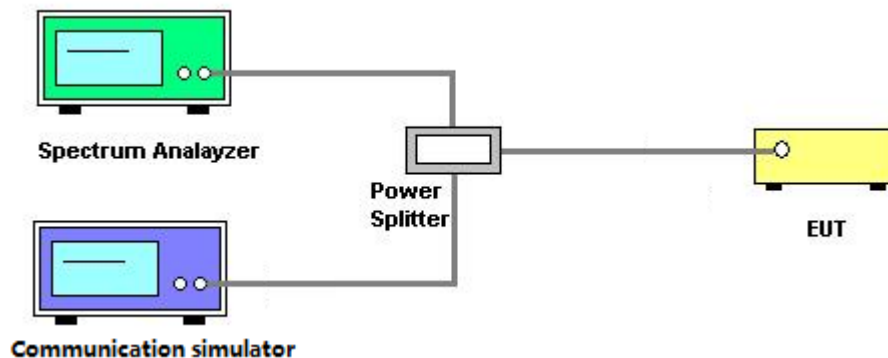

4.3.4 TESTDEVIATION

No deviation

4.3.5 TEST RESULTS

Please refer to the Appendix C.

4.4 RADIATED EMISSIONS MEASUREMENT


4.4.1 LIMIT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB. The limit of emission is equal to -13dBm.


4.4.2 TEST PROCEDURES

1. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
3. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.


4.4.3 TESTSETUP LAYOUT Below 1G

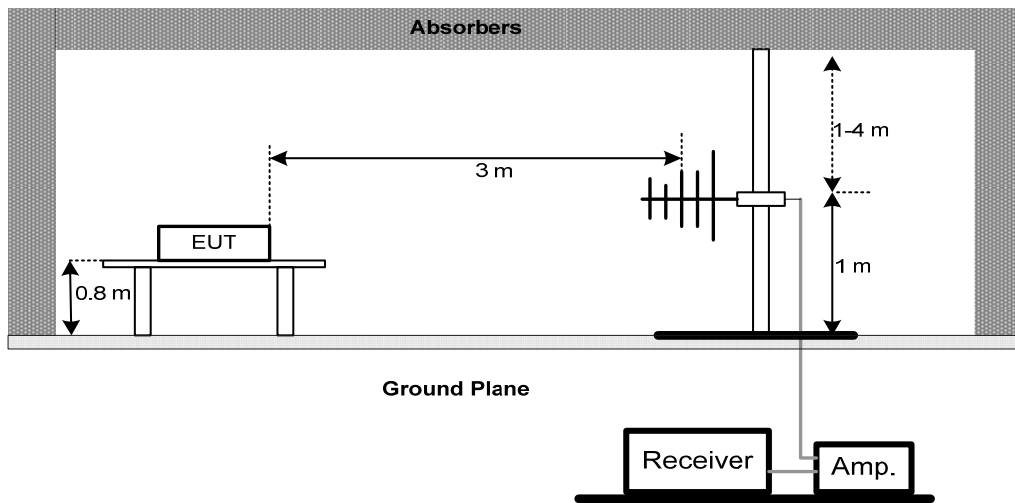

Above 1G

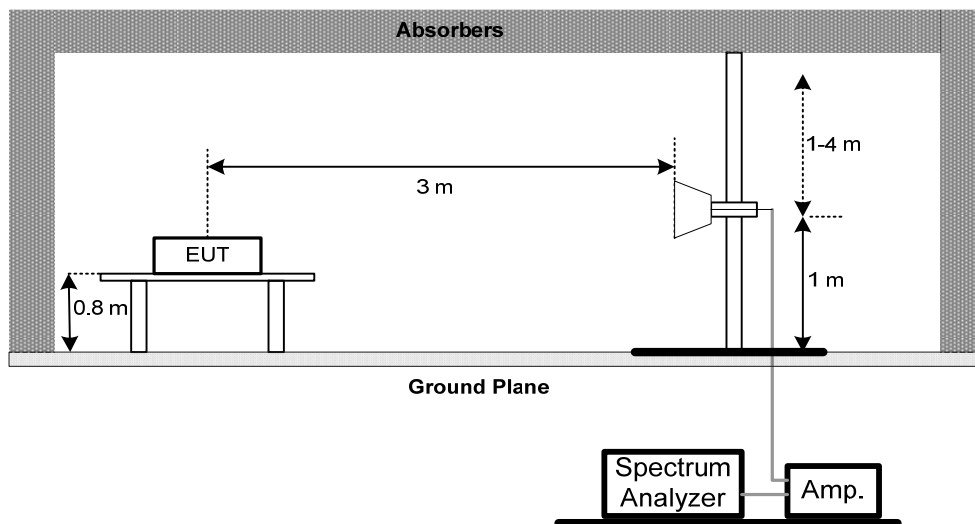

Below 30MHz

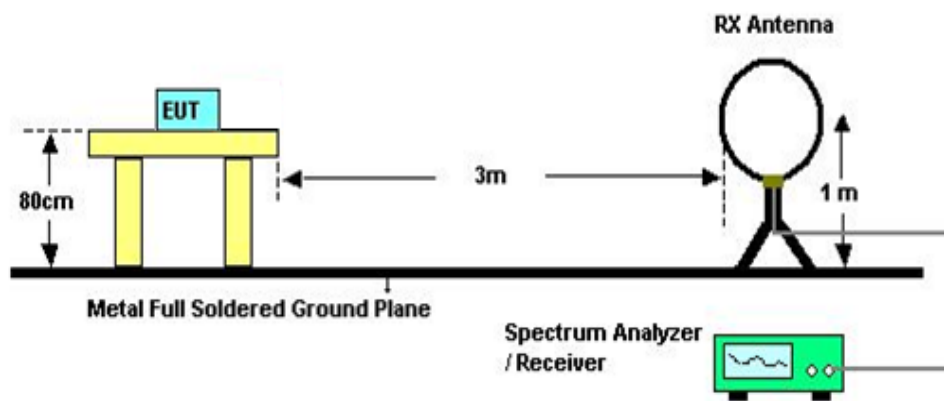

4.4.4 TESTDEVIATION

No deviation

4.4.5 TEST RESULTS

Please refer to the Appendix D.

4.5 BAND EDGE /EMISSION MASK MEASUREMENT


4.5.1 LIMIT

According to FCC part 90.691 shall be tested the emission mask. For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \log_{10}(f/6.1)$ decibels or $50 + 10 \log_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

4.5.2 TEST PROCEDURES

1. All measurements were done at low and high operational frequency range.
2. Set RBW=1% of 26dBc bandwidth, VBW=3 X RBW, detector=RMS, Sweep time = Auto.
3. Record the max trace plot into the test report.

4.5.3 TESTSETUP LAYOUT

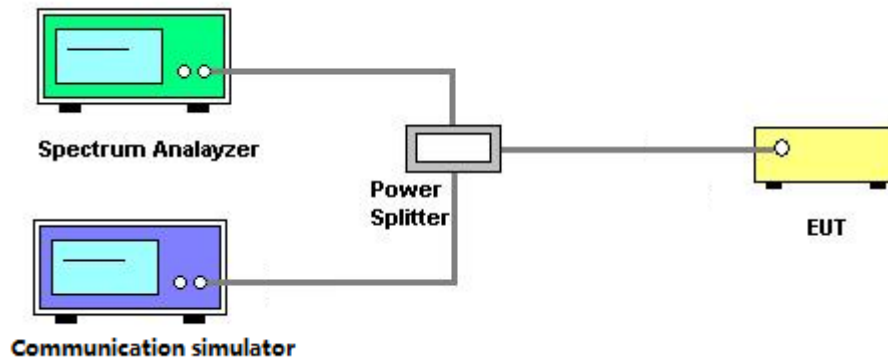

4.5.4 TESTDEVIATION

No deviation

4.5.5 TEST RESULTS

Please refer to the Appendix E.

4.6 FREQUENCY STABILITY MEASUREMENT


4.6.1 LIMIT

1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.6.2 TEST PROCEDURES

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

4.6.3 TESTSETUP LAYOUT

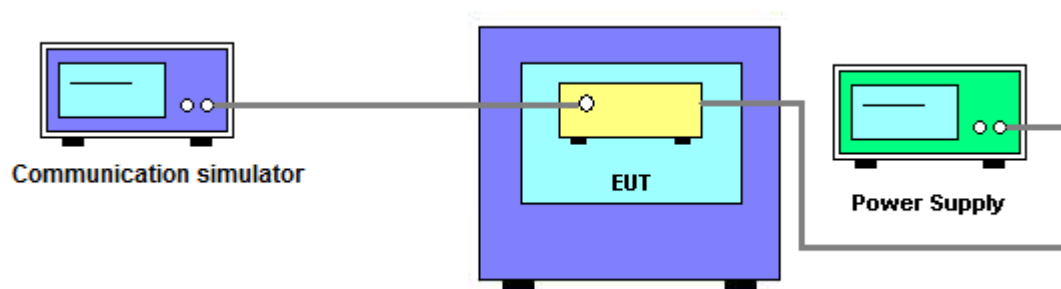

4.6.4 TESTDEVIATION

No deviation

4.6.5 TEST RESULTS

Please refer to the Appendix F.

5. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Preamplifier	EMCI	012645B	980267	Feb. 28, 2018
2	Preamplifier	EMCI	EMC02325	980217	Dec. 28, 2018
3	Preamplifier	EMCI	EMC2654045	980030	Feb. 14, 2018
4	Test Cable	EMCI	EMC104-SM-S M-8000	8m	Jan. 03, 2019
5	Test Cable	EMCI	EMC104-SM-S M-800	150207	Jan. 03, 2019
6	Test Cable	EMCI	EEMC104-SM-S M-3000	151205	Jan. 03, 2019
7	MXE EMI Receiver	Agilent	N9038A	MY55420127	Jan. 08, 2019
8	Signal Analyzer	Agilent	N9010A	MY52220990	Feb. 22, 2018
9	Loop Ant	EMCO	6502	42960	Nov. 23, 2018
10	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	Feb. 28, 2018
11	Horn Ant	Schwarzbeck	BBHA 9170	187	Dec. 06, 2018
12	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	9168-548	Jan. 15, 2019
13	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0623	Jan. 15, 2019

Conducted Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Keysight	N9010A	MY54200240	Aug. 27, 2018
2	Radio Com Analyzer	Anritsu	MT8820C	6201525878	Sep. 05, 2019

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Keysight	N9010A	MY54200240	Aug. 27, 2018
2	Radio Com Analyzer	Anritsu	MT8820C	6201525878	Sep. 05, 2019
3	Thermal Chamber	HOLINK	CHOLINK/H-T-1F-D	BA03101701	May 14, 2018

Remark: "N/A" denotes no model name, serial no. or calibration specified.
All calibration period of equipment list is one year.

APPENDIX A - OUTPUT POWER

Conducted Power_Band 26						
Bandwith	Modulation	RB Sizer	RB Offset	Low CH	Mid CH	High CH
				26697 CH	26740 CH	26783 CH
				814.7 MHz	819 MHz	823.3 MHz
1.4M	QPSK	1	0	22.84	22.97	23.25
		1	2	22.91	23.11	23.23
		1	5	22.80	22.98	22.95
		3	0	22.84	23.02	23.16
		3	1	22.87	23.05	23.16
		3	2	22.86	23.04	23.12
		6	0	22.00	22.17	22.17
	16QAM	1	0	22.05	22.45	22.35
		1	2	22.13	22.54	22.34
		1	5	22.02	22.43	22.08
		3	0	22.03	22.20	22.21
		3	1	22.07	22.21	22.22
		3	2	22.06	22.23	22.18
		6	0	21.17	21.32	21.22
Bandwith	Modulation	RB Sizer	RB Offset	Low CH	Mid CH	High CH
				26705 CH	26740 CH	26775 CH
				815.5 MHz	819 MHz	822.5 MHz
3M	QPSK	1	0	22.74	22.98	22.90
		1	7	23.03	23.15	23.28
		1	14	22.63	22.78	22.74
		8	0	22.02	22.21	22.26
		8	4	22.04	22.18	22.29
		8	7	21.96	22.11	22.14
		15	0	22.00	22.13	22.18
	16QAM	1	0	22.15	22.38	22.24
		1	7	22.39	22.55	22.58
		1	14	22.07	22.21	22.05
		8	0	21.09	21.31	21.28
		8	4	21.12	21.28	21.31
		8	7	21.03	21.22	21.16
		15	0	21.00	21.15	21.18

Note: The Conducted Power=measured value+cabel loss.

Conducted Power_Band 26						
Bandwith	Modulation	RB Siset	RB Offset	Low CH	Mid CH	High CH
				26715 CH	26740 CH	26765 CH
				816.5 MHz	819 MHz	821.5 MHz
5M	QPSK	1	0	23.33	23.50	23.57
		1	13	23.54	23.68	23.85
		1	24	23.45	23.54	23.32
		12	0	22.59	22.80	22.73
		12	6	22.64	22.77	22.82
		12	11	22.62	22.69	22.76
		25	0	22.55	22.75	22.61
	16QAM	1	0	22.54	22.97	22.94
		1	13	22.81	23.10	23.17
		1	24	22.74	22.96	22.88
		12	0	21.63	21.88	21.77
		12	6	21.70	21.89	21.90
		12	11	21.69	21.81	21.78
		25	0	21.58	21.83	21.67

Bandwith	Modulation	RB Siset	RB Offset	Mid CH
				26740 CH
				819 MHz
10M	QPSK	1	0	23.42
		1	25	23.67
		1	49	23.29
		25	0	22.67
		25	13	22.79
		25	25	22.61
		50	0	22.64
	16QAM	1	0	22.66
		1	25	22.95
		1	49	22.54
		25	0	21.69
		25	13	21.81
		25	25	21.64
		50	0	21.68

Note: The Conducted Power=measured value+cabel loss.

ERP Power_Band 26						
Bandwith	Modulation	RB Sizet	RB Offset	Low CH	Mid CH	High CH
				26697 CH	26740 CH	26783 CH
				814.7 MHz	819 MHz	823.3 MHz
1.4M	QPSK	1	0	19.49	19.62	19.90
		1	2	19.56	19.76	19.88
		1	5	19.45	19.63	19.60
		3	0	19.49	19.67	19.81
		3	1	19.52	19.70	19.81
		3	2	19.51	19.69	19.77
		6	0	18.65	18.82	18.82
	16QAM	1	0	18.70	19.10	19.00
		1	2	18.78	19.19	18.99
		1	5	18.67	19.08	18.73
		3	0	18.68	18.85	18.86
		3	1	18.72	18.86	18.87
		3	2	18.71	18.88	18.83
		6	0	17.82	17.97	17.87
Bandwith	Modulation	RB Sizet	RB Offset	Low CH	Mid CH	High CH
				26705 CH	26740 CH	26775 CH
				815.5 MHz	819 MHz	822.5 MHz
3M	QPSK	1	0	19.39	19.63	19.55
		1	7	19.68	19.80	19.93
		1	14	19.28	19.43	19.39
		8	0	18.67	18.86	18.91
		8	4	18.69	18.83	18.94
		8	7	18.61	18.76	18.79
		15	0	18.65	18.78	18.83
	16QAM	1	0	18.80	19.03	18.89
		1	7	19.04	19.20	19.23
		1	14	18.72	18.86	18.70
		8	0	17.74	17.96	17.93
		8	4	17.77	17.93	17.96
		8	7	17.68	17.87	17.81
		15	0	17.65	17.80	17.83

EIRP Power_Band 26						
Bandwith	Modulation	RB Sizet	RB Offset	Low CH	Mid CH	High CH
				26715 CH	26740 CH	26765 CH
				816.5 MHz	819 MHz	821.5 MHz
5M	QPSK	1	0	19.98	20.15	20.22
		1	13	20.19	20.33	20.50
		1	24	20.10	20.19	19.97
		12	0	19.24	19.45	19.38
		12	6	19.29	19.42	19.47
		12	11	19.27	19.34	19.41
		25	0	19.20	19.40	19.26
	16QAM	1	0	19.19	19.62	19.59
		1	13	19.46	19.75	19.82
		1	24	19.39	19.61	19.53
		12	0	18.28	18.53	18.42
		12	6	18.35	18.54	18.55
		12	11	18.34	18.46	18.43
		25	0	18.23	18.48	18.32


Bandwith	Modulation	RB Sizet	RB Offset	Mid CH
				26740 CH
				819 MHz
10M	QPSK	1	0	20.07
		1	25	20.32
		1	49	19.94
		25	0	19.32
		25	13	19.44
		25	25	19.26
		50	0	19.29
	16QAM	1	0	19.31
		1	25	19.60
		1	49	19.19
		25	0	18.34
		25	13	18.46
		25	25	18.29
		50	0	18.33

APPENDIX B - OCCUPIED BANDWIDTH

LTE Band 26_1.4M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
26697	814.7	1.0986	26697	814.7	1.0898
26740	819	1.0962	26740	819	1.0954
26783	823.3	1.0936	26783	823.3	1.1032
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26697	814.7	1.234	26697	814.7	1.241
26740	819	1.246	26740	819	1.237
26783	823.3	1.239	26783	823.3	1.234

Spectrum Plot


QPSK-26697

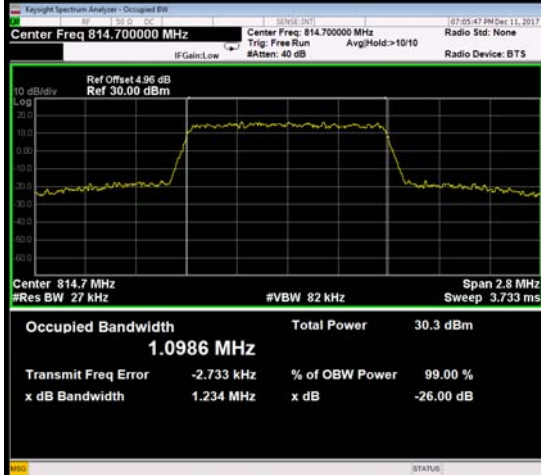

QPSK-26740




QPSK-26783

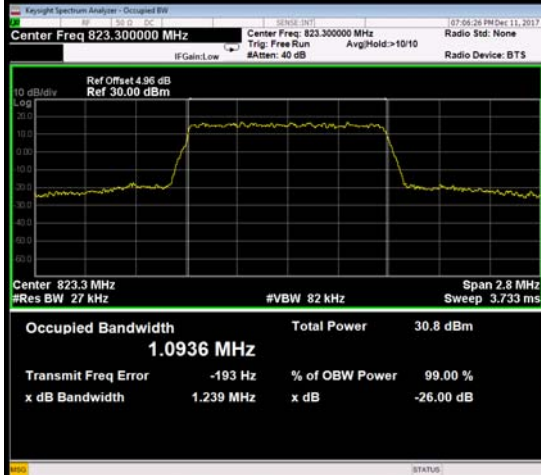

16QAM-26697



16QAM-26740

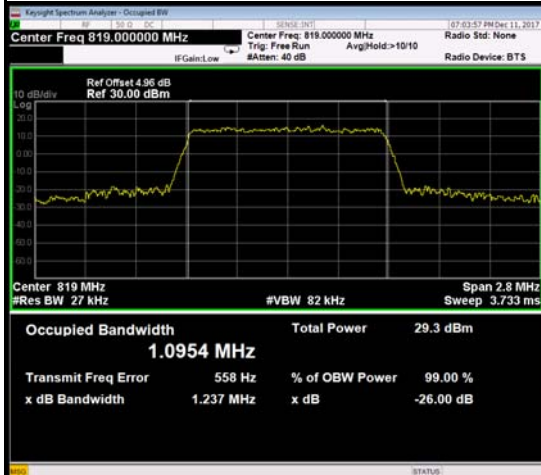


16QAM-26783



LTE Band 26_3M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
26705	815.5	2.7067	26705	815.5	2.7100
26740	819	2.7100	26740	819	2.7070
26775	822.5	2.7151	26775	822.5	2.7130
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26705	815.5	2.993	26705	815.5	2.993
26740	819	2.991	26740	819	2.988
26775	822.5	2.999	26775	822.5	2.984

Spectrum Plot


QPSK-26705

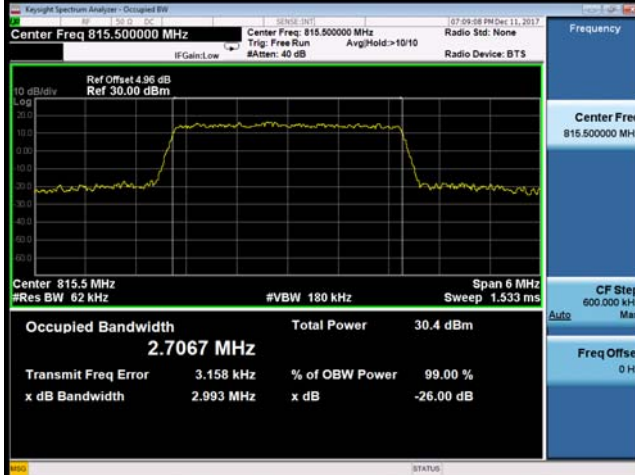


QPSK-26740




QPSK-26775

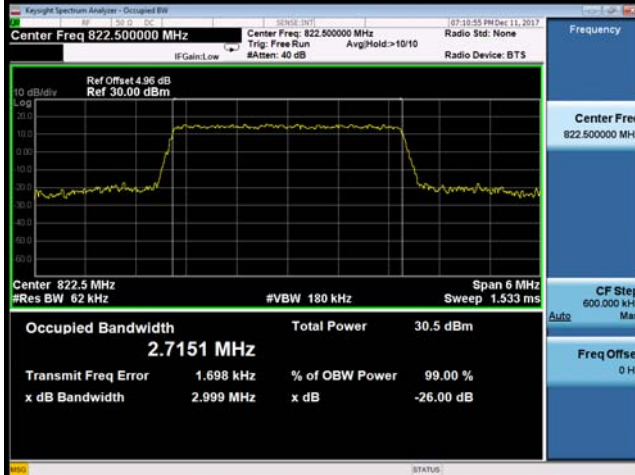

16QAM-26705

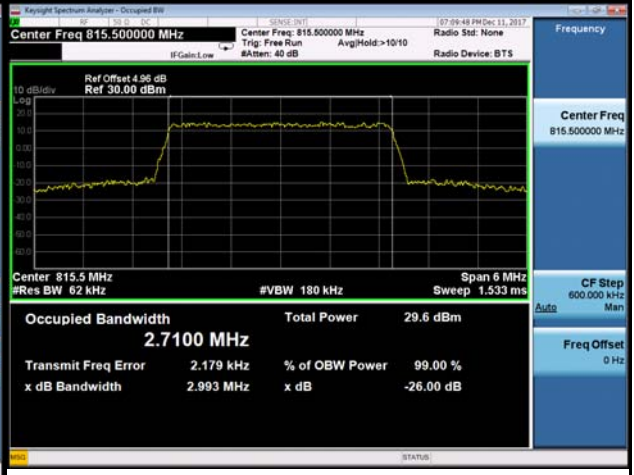

16QAM-26740

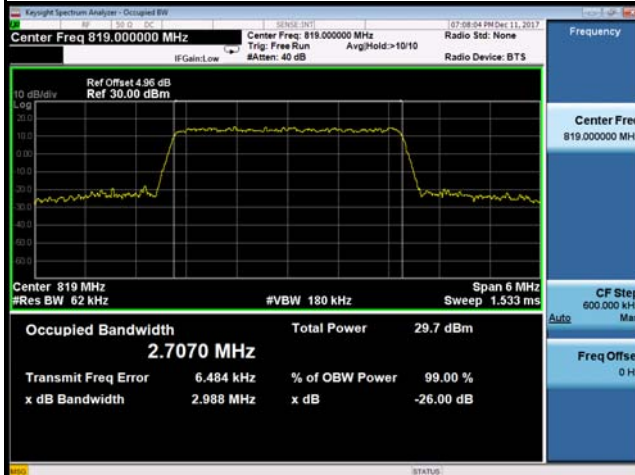

16QAM-26775



LTE Band 26_5M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
26715	816.5	4.5121	26715	816.5	4.5053
26740	819	4.5076	26740	819	4.5200
26765	821.5	4.5156	26765	821.5	4.5023
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26715	816.5	4.959	26715	816.5	4.979
26740	819	4.981	26740	819	4.975
26765	821.5	4.967	26765	821.5	4.981

Spectrum Plot

QPSK-26715



QPSK-26740



QPSK-26765



16QAM-26715




16QAM-26740






16QAM-26765





LTE Band 26_10M					
QPSK			16QAM		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
26740	819	9.0117	26740	819	9.0187
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
26740	819	9.930	26740	819	9.933



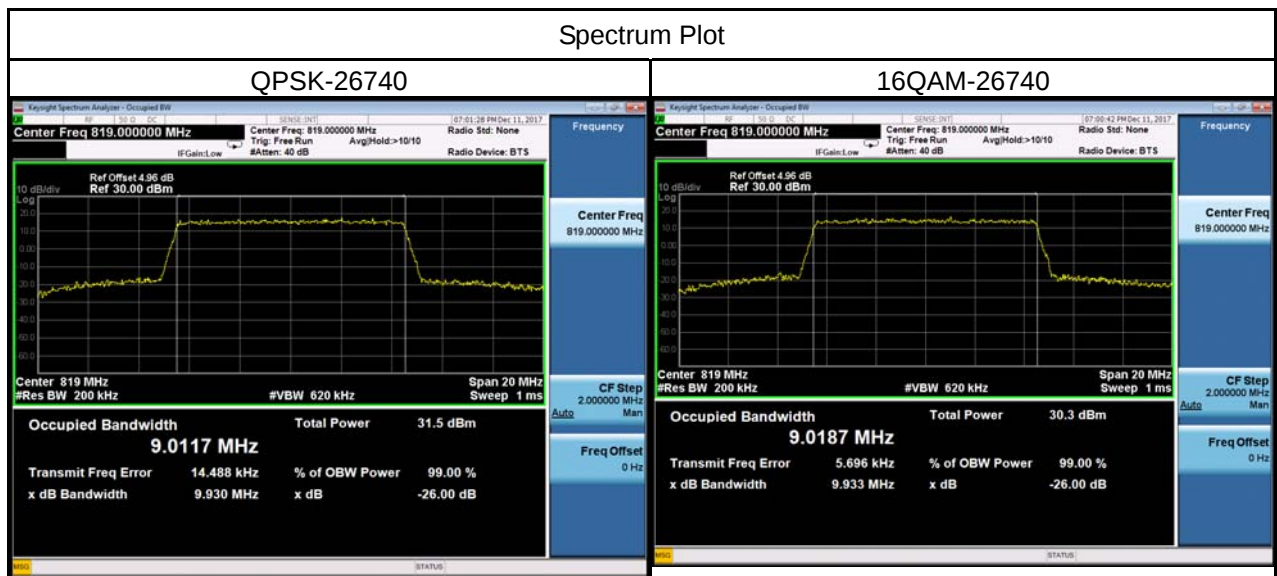


APPENDIX C - CONDUCTED EMISSIONS

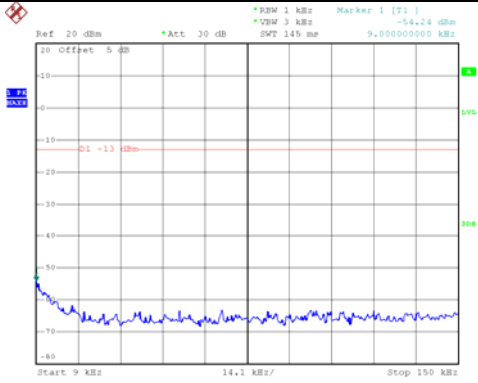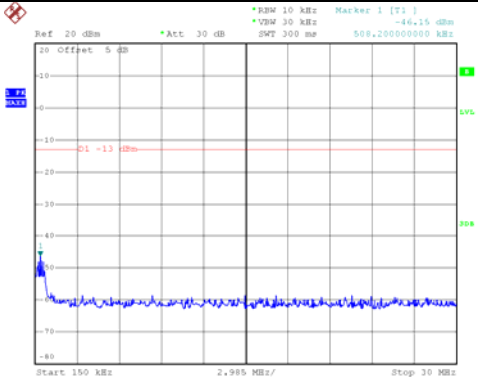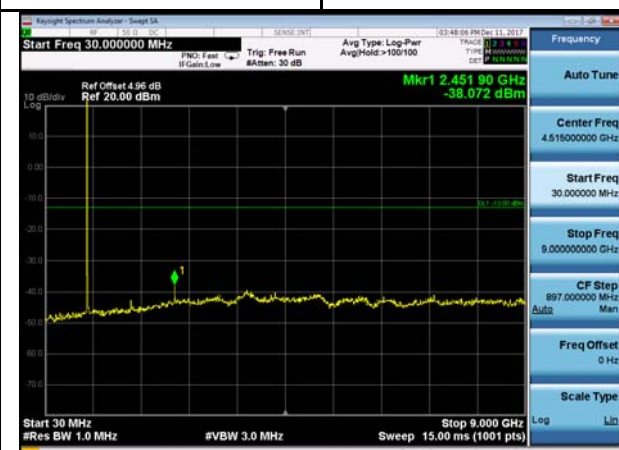LTE Band 26_1.4M			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
26740	819	26740	819
 Date: 11.DEC.2017 13:01:39		 Date: 11.DEC.2017 13:04:32	
Channel	Frequency(MHz)		
26740	819	-	-
			

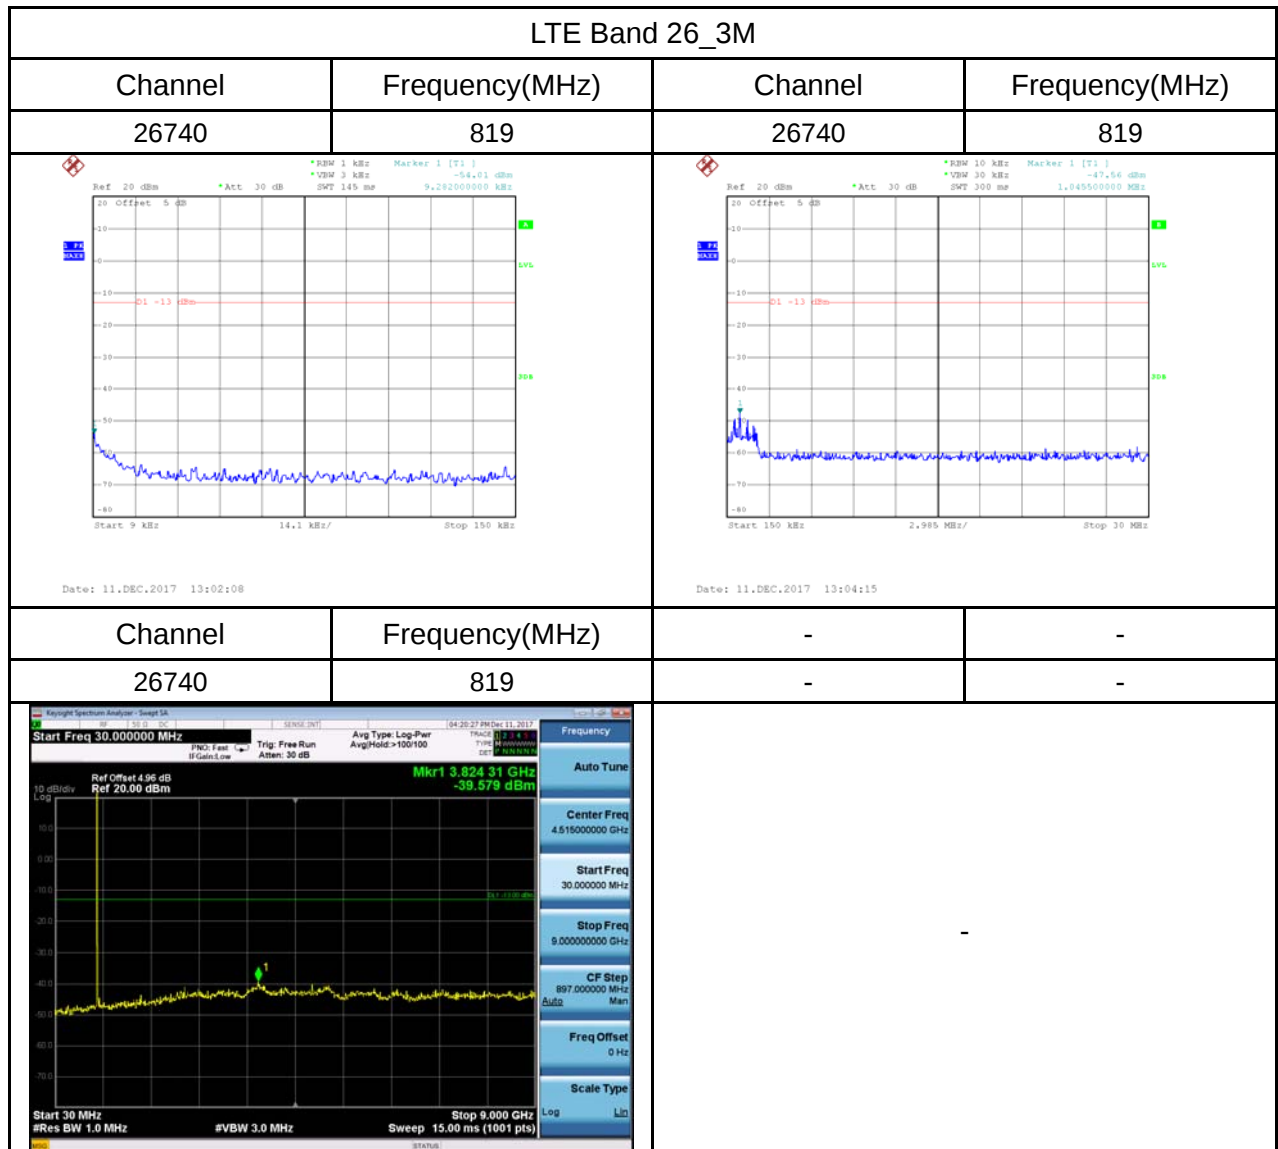

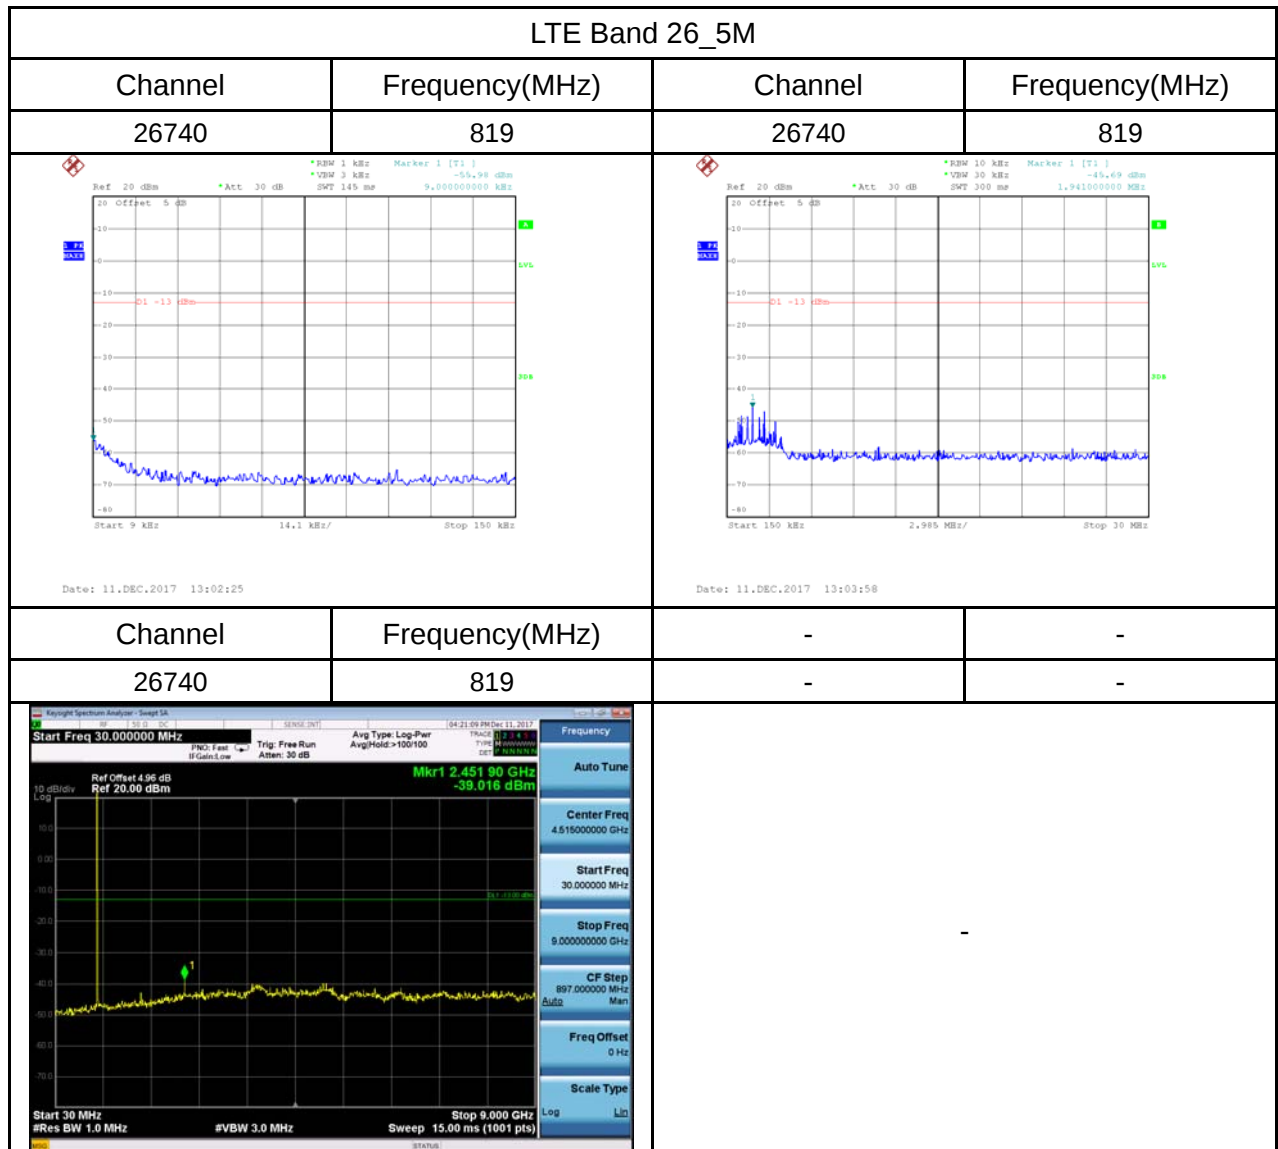


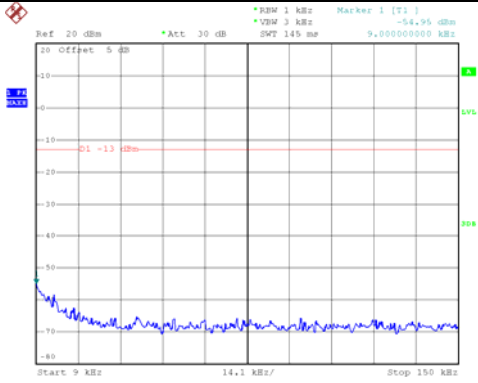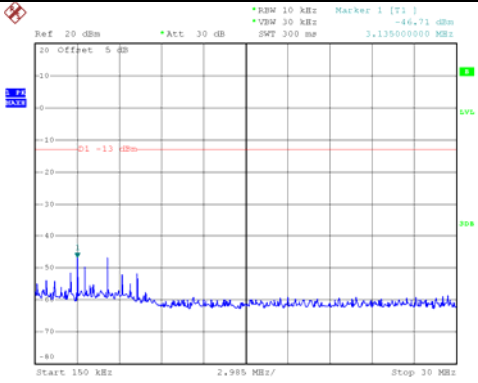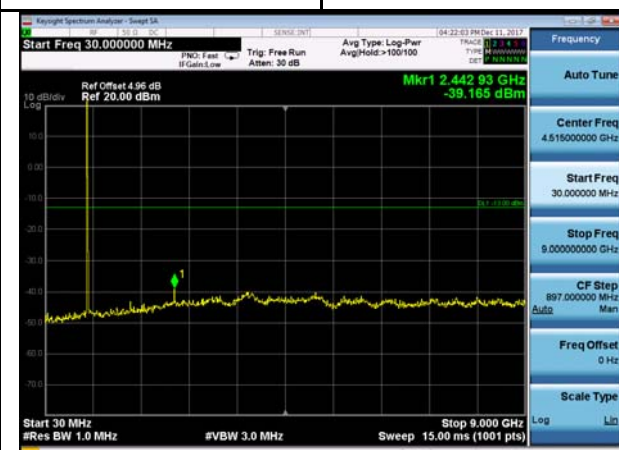LTE Band 26_10M			
Channel	Frequency(MHz)	Channel	Frequency(MHz)
26740	819	26740	819
 Date: 11.DEC.2017 13:02:44		 Date: 11.DEC.2017 13:03:34	
Channel	Frequency(MHz)		
26740	819	-	-
			

APPENDIX D - RADIATED EMISSION

Test Mode: TX Mode _Adapter: BYD


Ant 0°

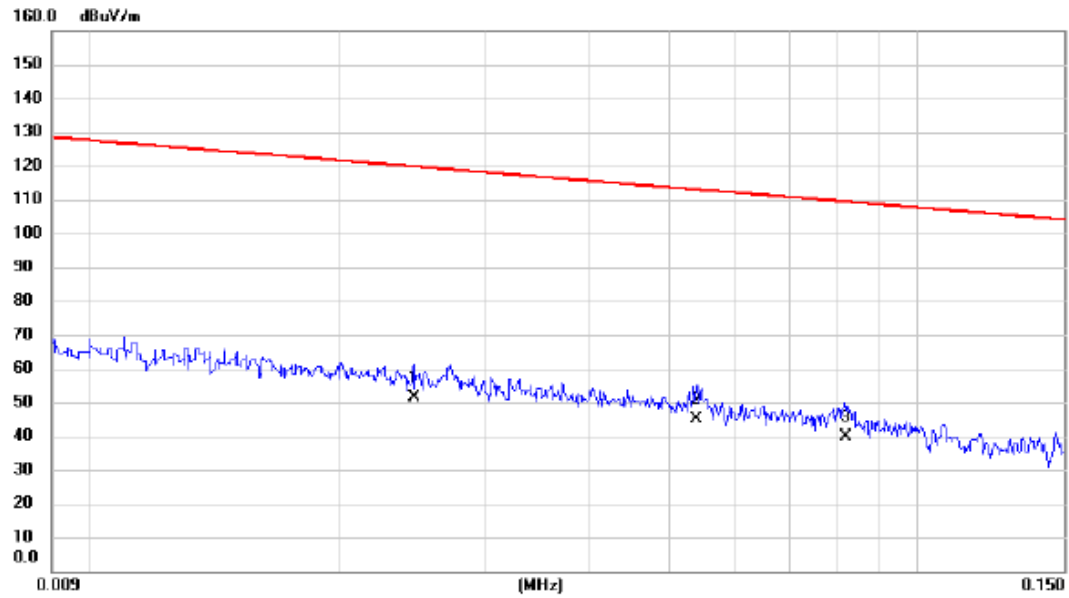

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.025	34.82	16.48	51.30	119.79	-68.49	AVG	
2	*	0.054	31.89	12.93	44.82	112.96	-68.14	AVG	
3		0.082	27.26	12.43	39.69	109.36	-69.67	AVG	

Test Mode: TX Mode_Adapter: BYD


Ant 0°

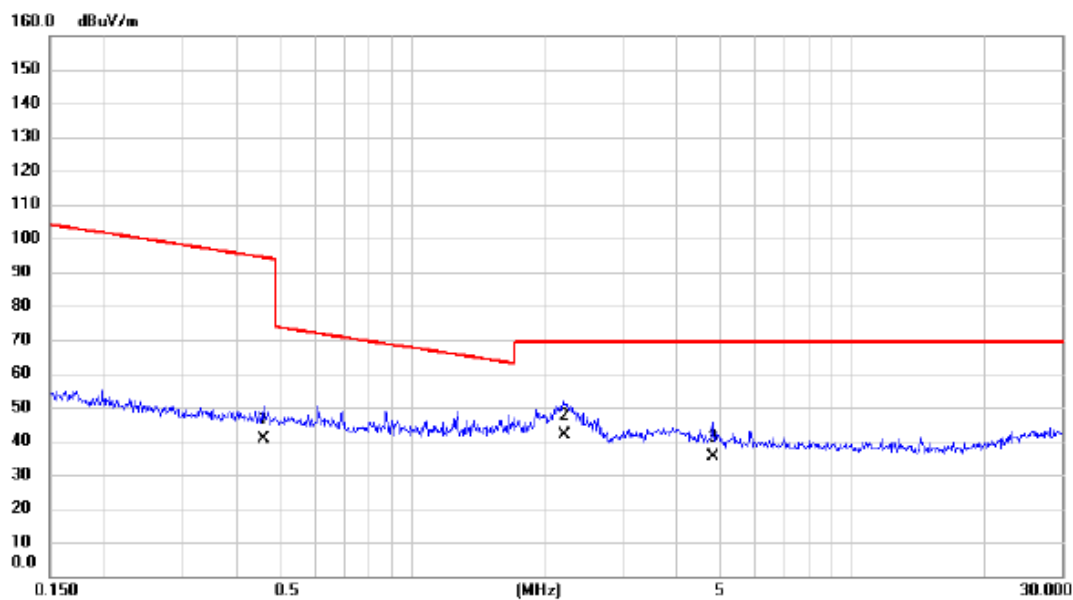

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.459	28.73	11.80	40.53	94.37	-53.84	AVG	
2	*	2.213	30.19	11.45	41.64	69.54	-27.90	QP	
3		4.822	23.96	11.37	35.33	69.54	-34.21	QP	

Test Mode: TX Mode _ Adapter: BYD


Ant 90°

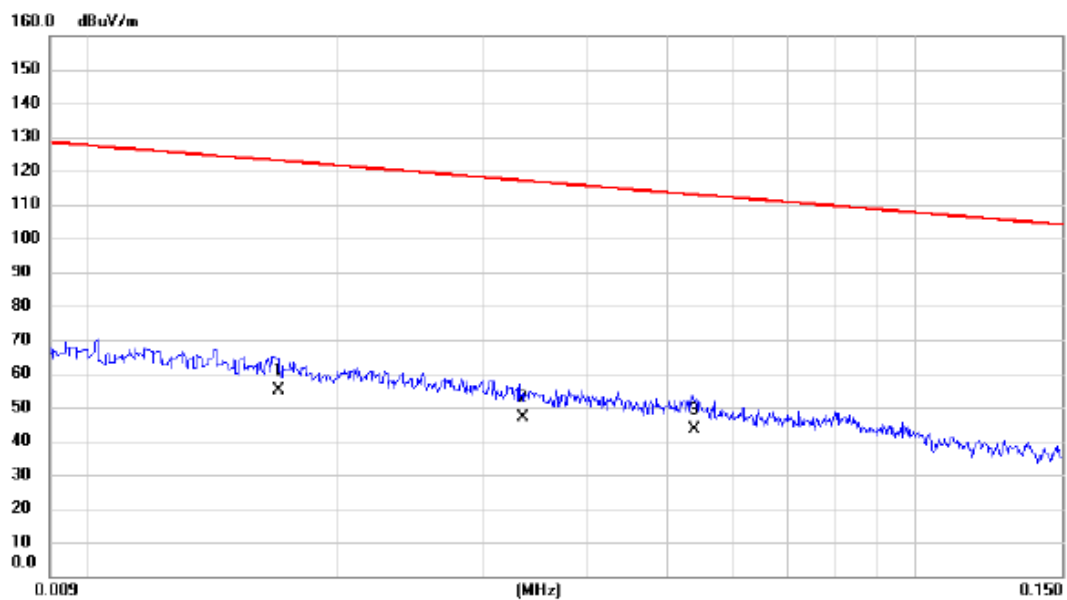

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.017	36.52	18.57	55.09	123.00	-67.91	AVG	
2		0.034	32.51	14.65	47.16	117.10	-69.94	AVG	
3		0.054	30.41	12.93	43.34	112.96	-69.62	AVG	

Test Mode: TX Mode_Adapter: BYD


Ant 90°

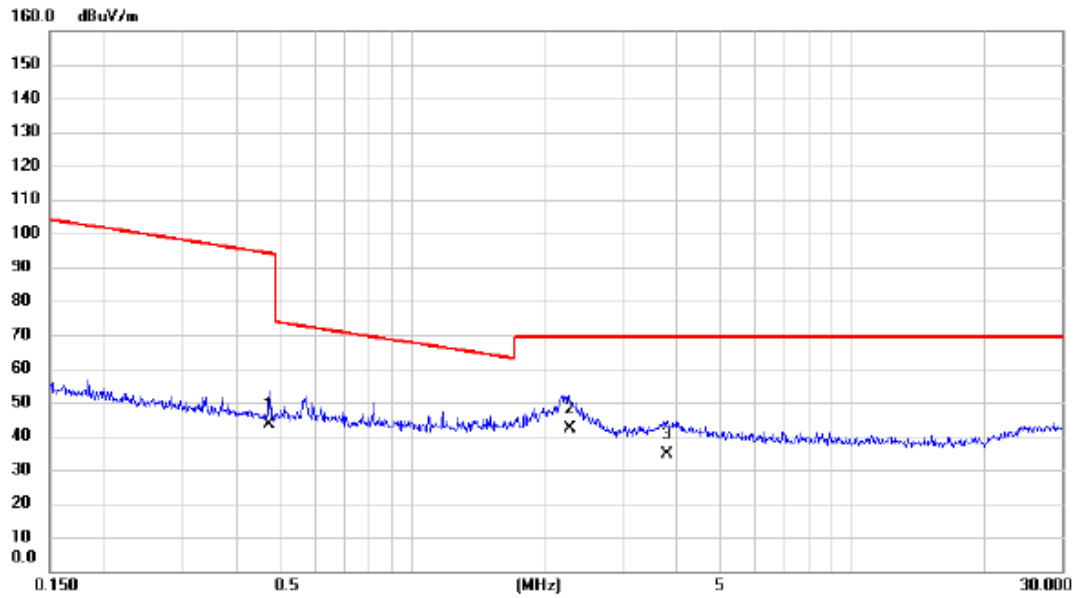

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.474	31.46	11.80	43.26	94.10	-50.84	AVG	
2	*	2.285	30.61	11.42	42.03	69.54	-27.51	QP	
3		3.799	23.36	11.22	34.58	69.54	-34.96	QP	

Test Mode: TX Mode _ Adapter: Salcomp


Ant 0°

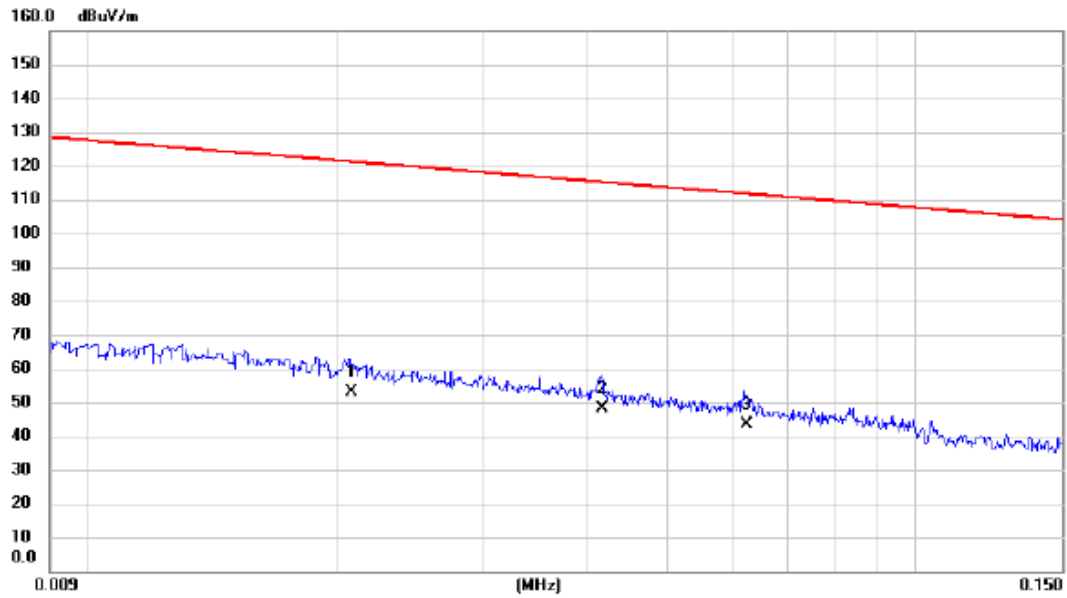

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.021	35.53	17.53	53.06	121.24	-68.18	AVG	
2	*	0.042	34.42	13.82	48.24	115.18	-66.94	AVG	
3		0.062	30.60	12.78	43.38	111.70	-68.32	AVG	

Test Mode: TX Mode _ Adapter: Salcomp


Ant 0°

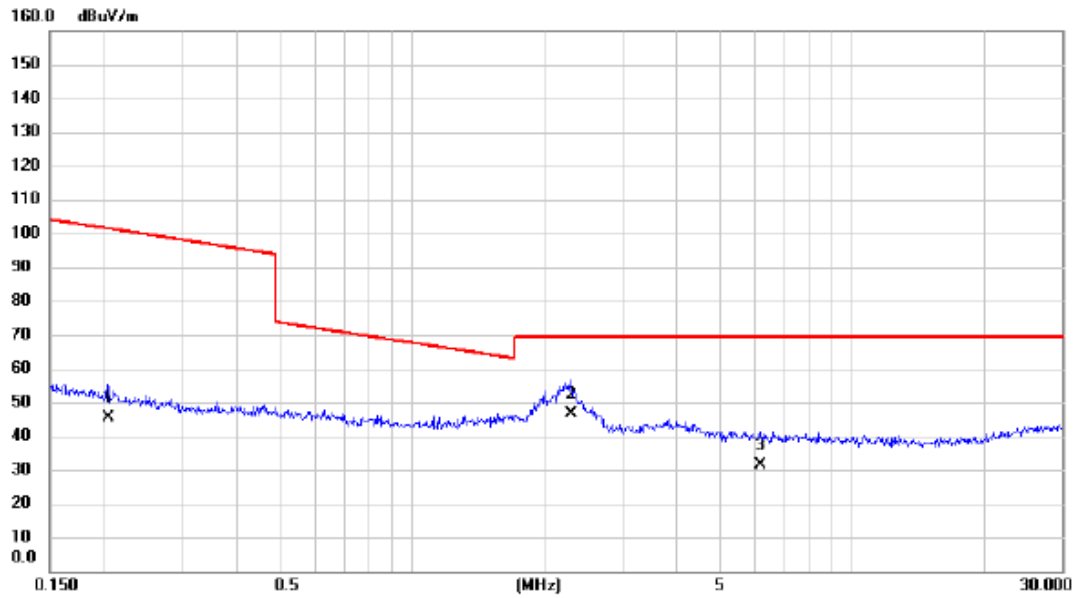

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.204	33.51	11.94	45.45	101.41	-55.96	AVG	
2	*	2.297	35.00	11.42	46.42	69.54	-23.12	QP	
3		6.186	20.20	11.38	31.58	69.54	-37.96	QP	

Test Mode: TX Mode _ Adapter: Salcomp


Ant 90°

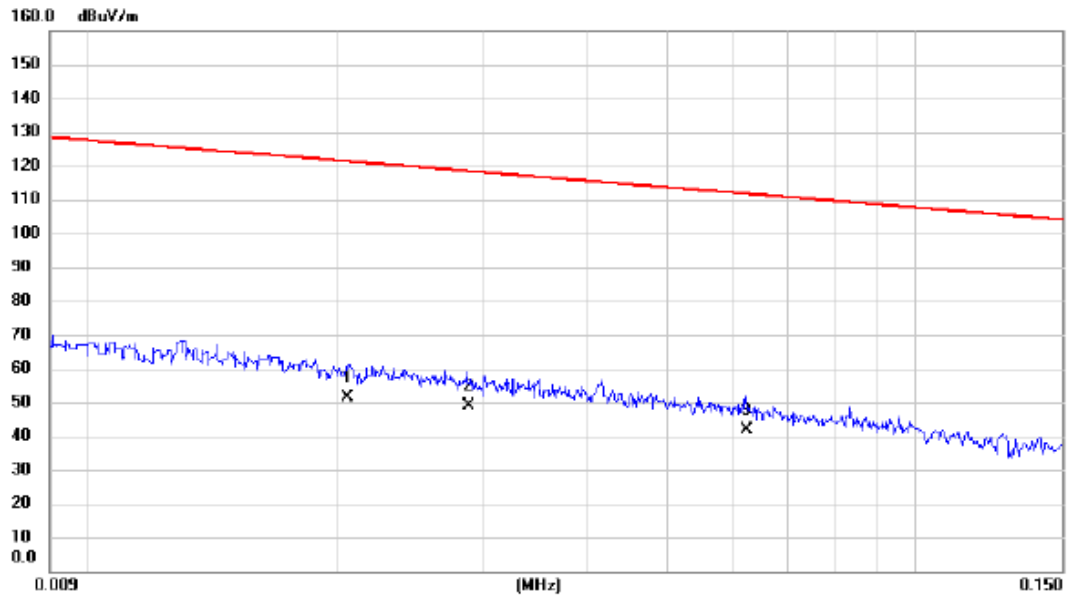

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.021	33.95	17.59	51.54	121.33	-69.79	AVG	
2	*	0.029	33.52	15.33	48.85	118.42	-69.57	AVG	
3		0.062	29.04	12.78	41.82	111.70	-69.88	AVG	

Test Mode: TX Mode _ Adapter: Salcomp


Ant 90°

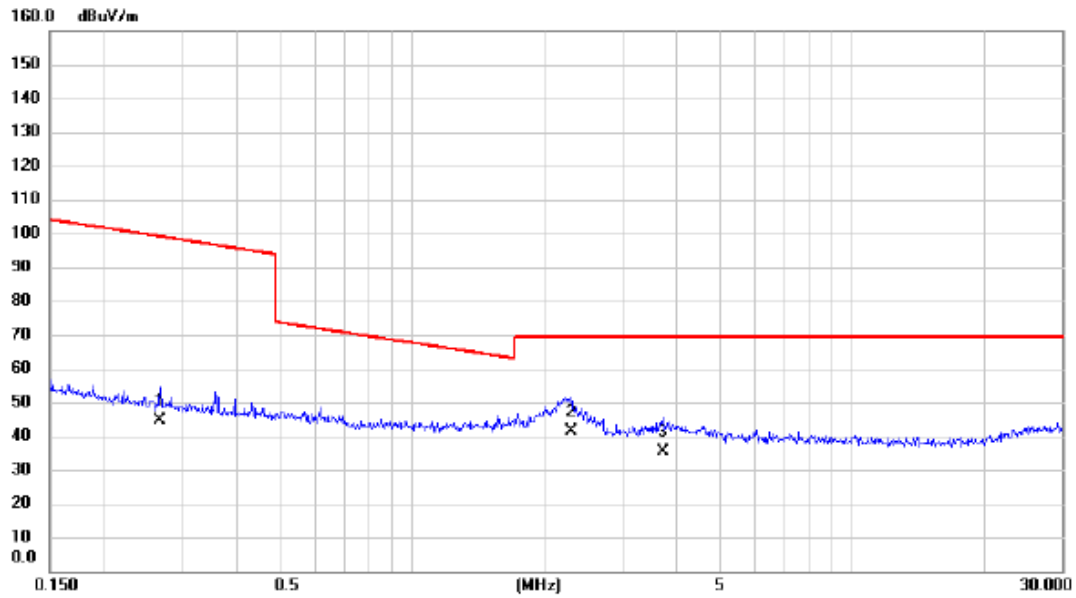

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.267	32.85	11.85	44.70	99.07	-54.37	AVG	
2	*	2.297	29.93	11.42	41.35	69.54	-28.19	QP	
3		3.720	24.01	11.21	35.22	69.54	-34.32	QP	

Test Mode: LTE Band 26_TX CH26740_1.4M


Vertical

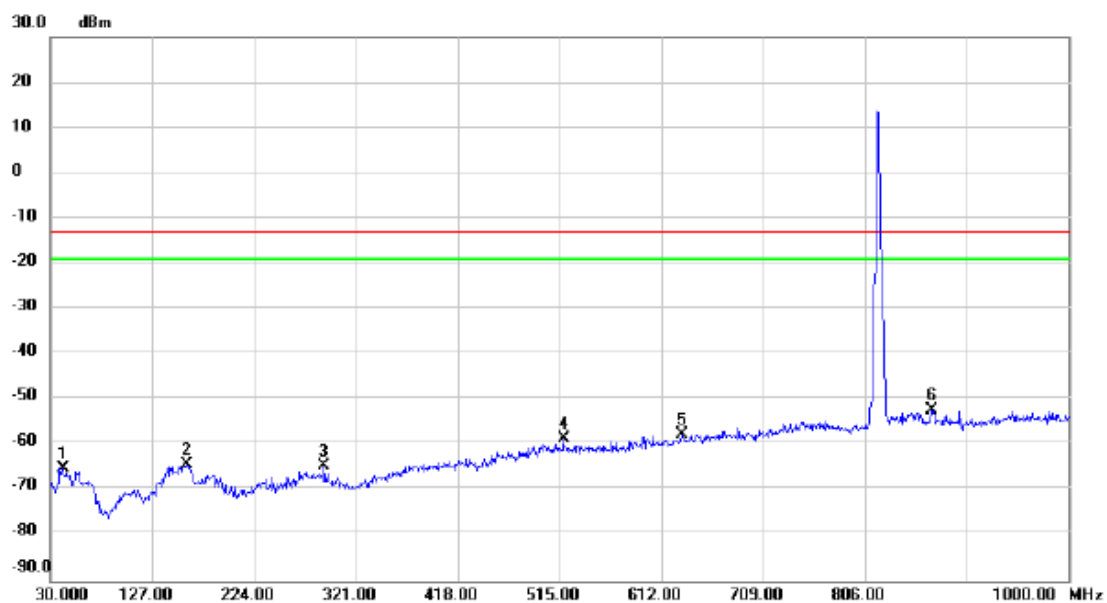

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	41.640	-56.52	-8.59	-65.11	-13.00	-52.11	peak	
2	159.980	-63.63	-0.76	-64.39	-13.00	-51.39	peak	
3	290.930	-63.36	-1.23	-64.59	-13.00	-51.59	peak	
4	518.880	-63.41	4.62	-58.79	-13.00	-45.79	peak	
5	631.400	-64.15	6.51	-57.64	-13.00	-44.64	peak	
6 *	870.020	-63.29	10.96	-52.33	-13.00	-39.33	peak	

Test Mode: LTE Band 26_TX CH26740_1.4M


Horizontal

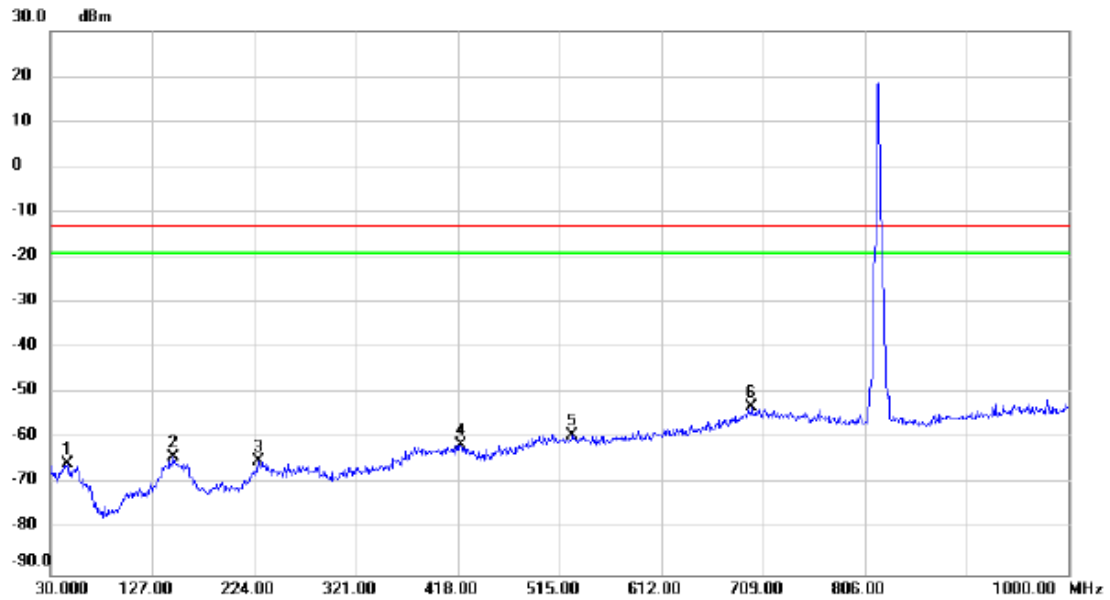

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		45.520	-58.39	-7.25	-65.64	-13.00	-52.64	peak	
2		147.370	-64.00	0.05	-63.95	-13.00	-50.95	peak	
3		227.880	-61.00	-4.06	-65.06	-13.00	-52.06	peak	
4		420.910	-64.86	3.61	-61.25	-13.00	-48.25	peak	
5		527.610	-63.99	4.67	-59.32	-13.00	-46.32	peak	
6	*	698.330	-60.30	7.41	-52.89	-13.00	-39.89	peak	

Test Mode: LTE Band 26_TX CH26740_1.4M


Vertical

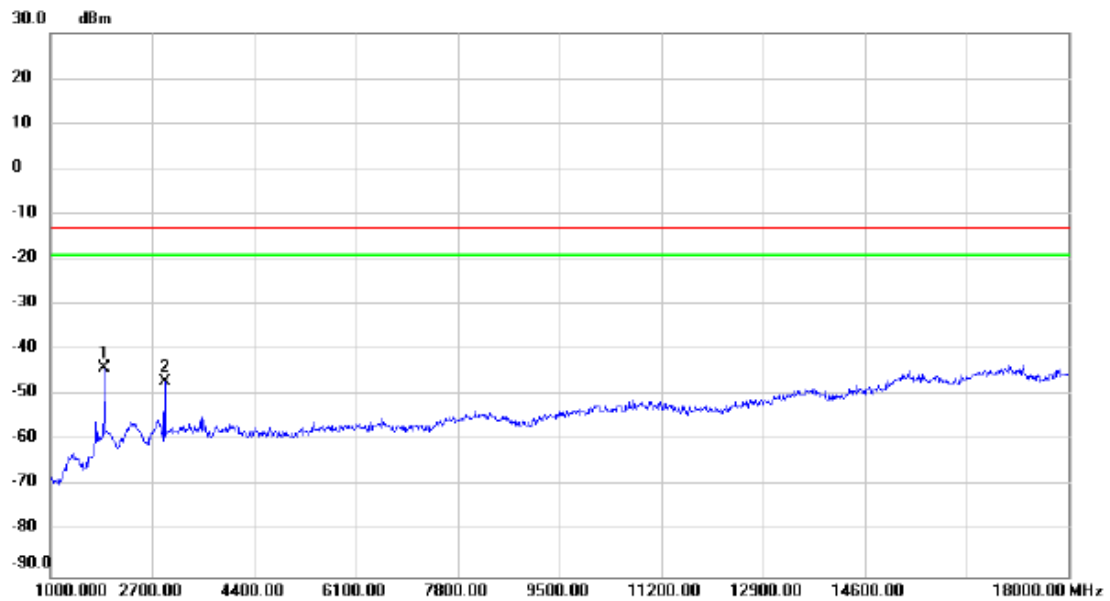

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	1901.000	-35.34	-8.75	-44.09	-13.00	-31.09	peak	
2		2904.000	-42.47	-4.61	-47.08	-13.00	-34.08	peak	

Test Mode: LTE Band 26_TX CH26740_1.4M

Horizontal

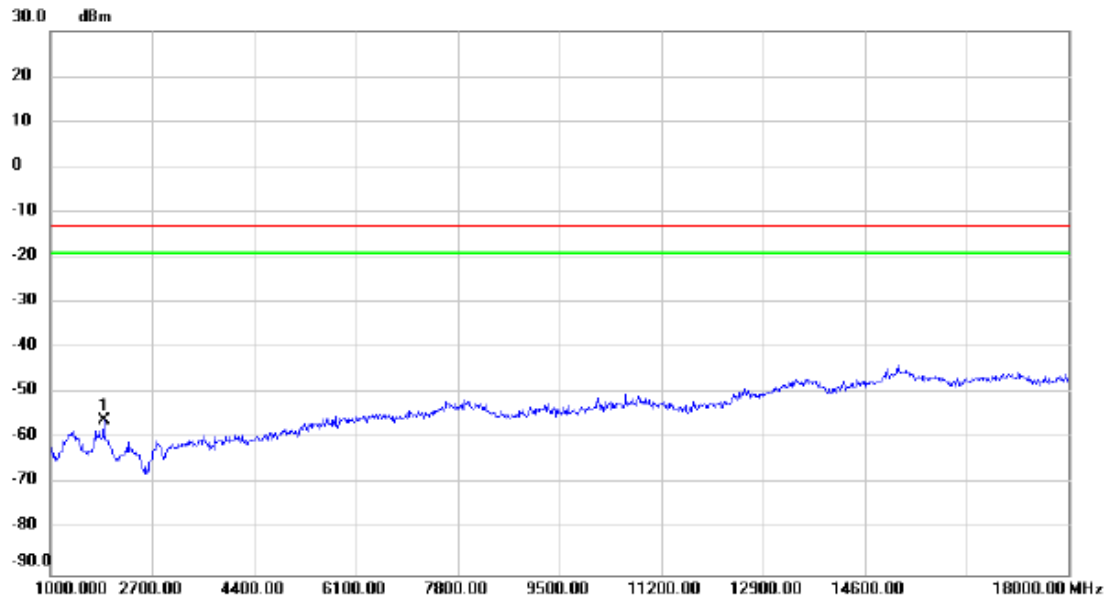

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	1884.000	-47.15	-8.77	-55.92	-13.00	-42.92	peak	

Test Mode: LTE Band 26_TX CH26740_10M

Vertical



No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	40.670	-55.73	-8.89	-64.62	-13.00	-51.62	peak	
2	158.040	-63.03	-0.61	-63.64	-13.00	-50.64	peak	
3	277.350	-64.08	-1.57	-65.65	-13.00	-52.65	peak	
4	499.480	-63.46	4.52	-58.94	-13.00	-45.94	peak	
5	750.710	-63.07	8.55	-54.52	-13.00	-41.52	peak	
6 *	920.460	-64.98	11.68	-53.30	-13.00	-40.30	peak	

Test Mode: LTE Band 26_TX CH26740_10M


Horizontal



No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		55.220	-60.13	-5.43	-65.56	-13.00	-52.56	peak	
2		145.430	-64.44	0.10	-64.34	-13.00	-51.34	peak	
3		229.820	-60.49	-3.92	-64.41	-13.00	-51.41	peak	
4		414.120	-64.47	3.53	-60.94	-13.00	-47.94	peak	
5		507.240	-64.02	4.57	-59.45	-13.00	-46.45	peak	
6	*	702.210	-60.05	7.48	-52.57	-13.00	-39.57	peak	

Test Mode: LTE Band 26_TX CH26740_10M


Vertical

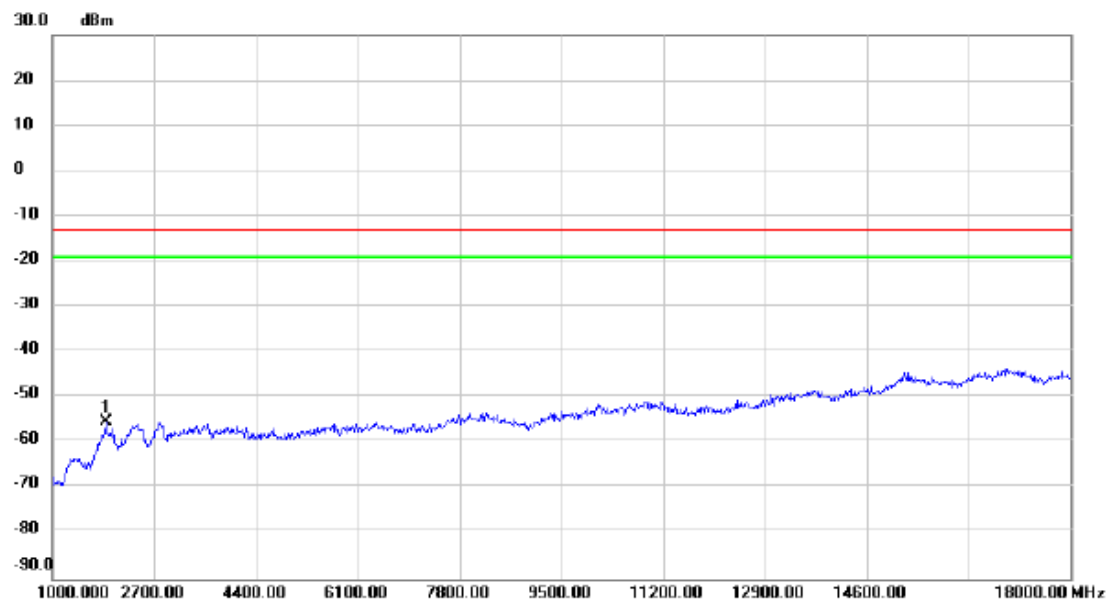

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	1884.000	-46.44	-8.77	-55.21	-13.00	-42.21	peak	

Test Mode: LTE Band 26_TX CH26740_10M

Horizontal

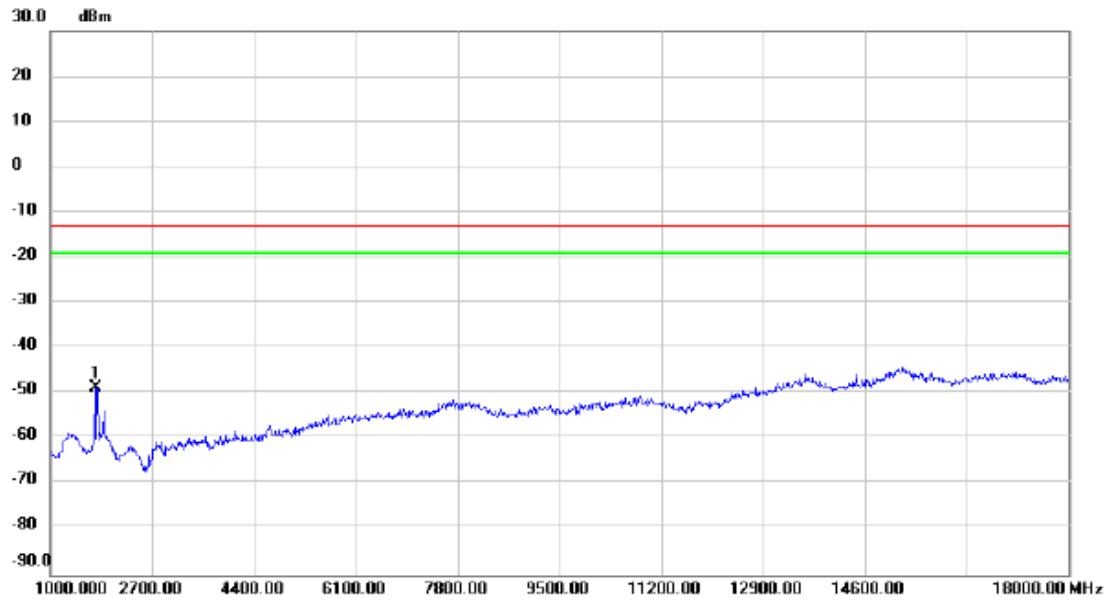


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	1748.000	-39.81	-8.94	-48.75	-13.00	-35.75	peak	

APPENDIX E - EMISSION MASK


LTE Band 26_1.4M


1RB0		1RB5	
Channel	26697	Channel	26783

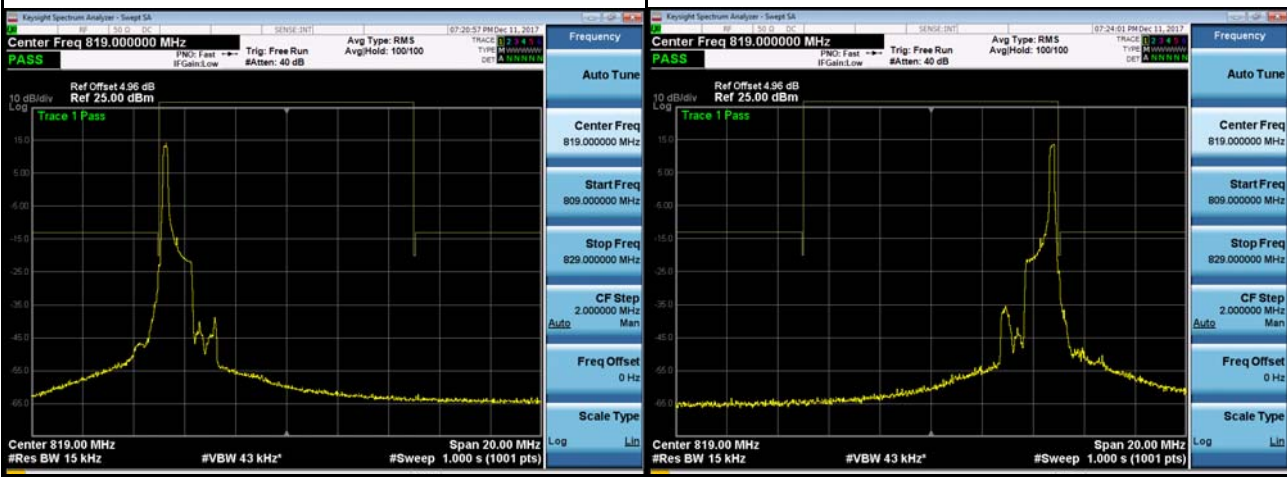


6RB0

Channel	26697	Channel	26783
---------	-------	---------	-------

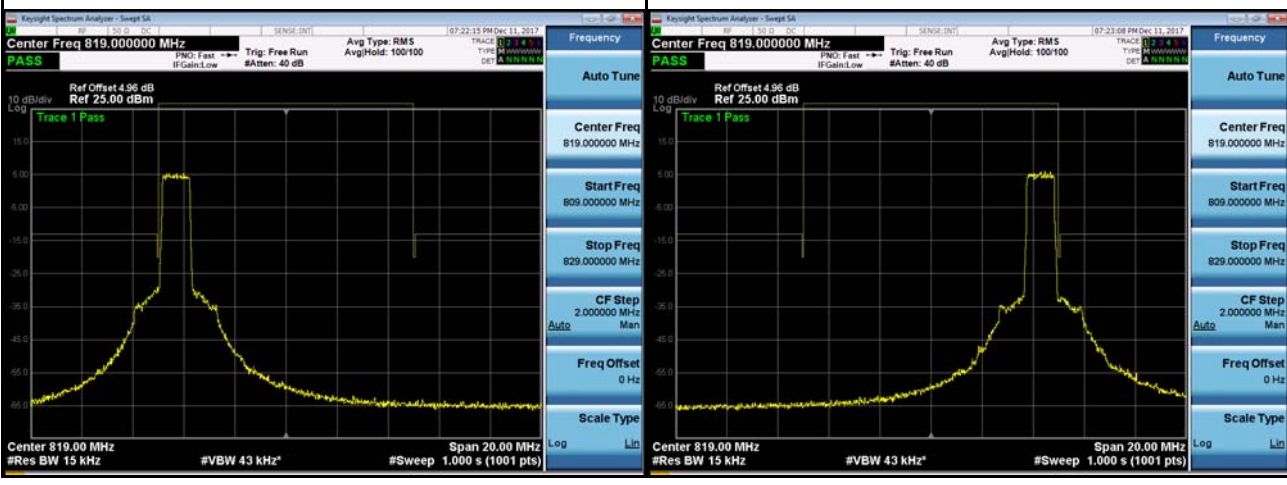

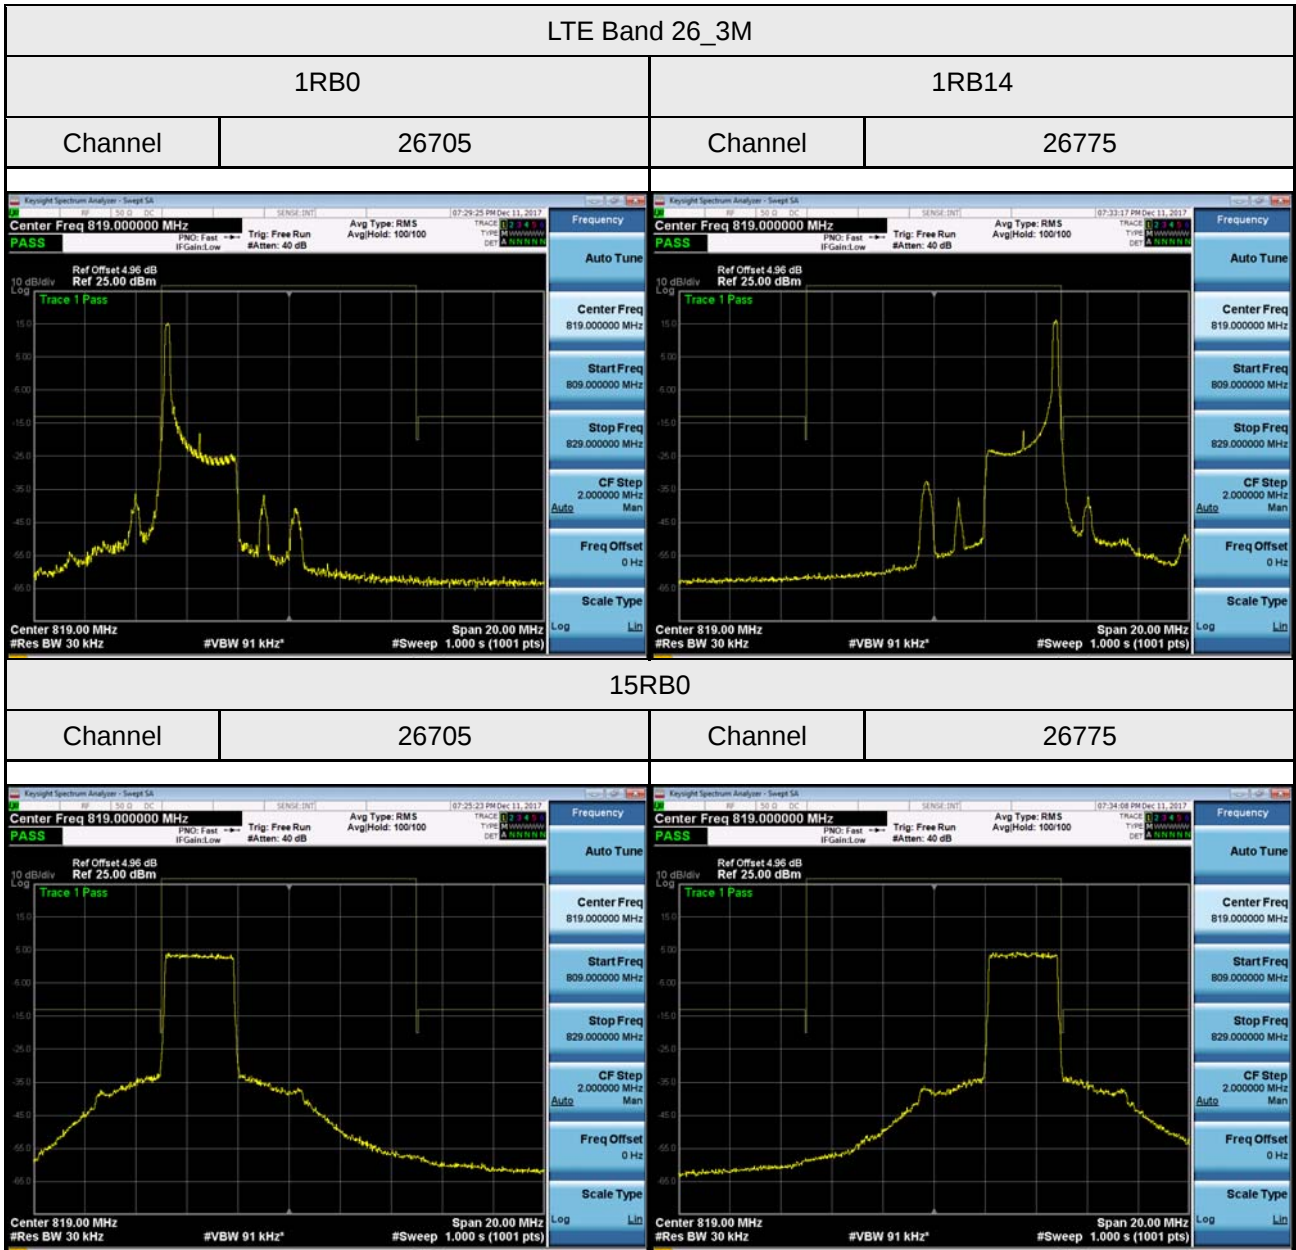

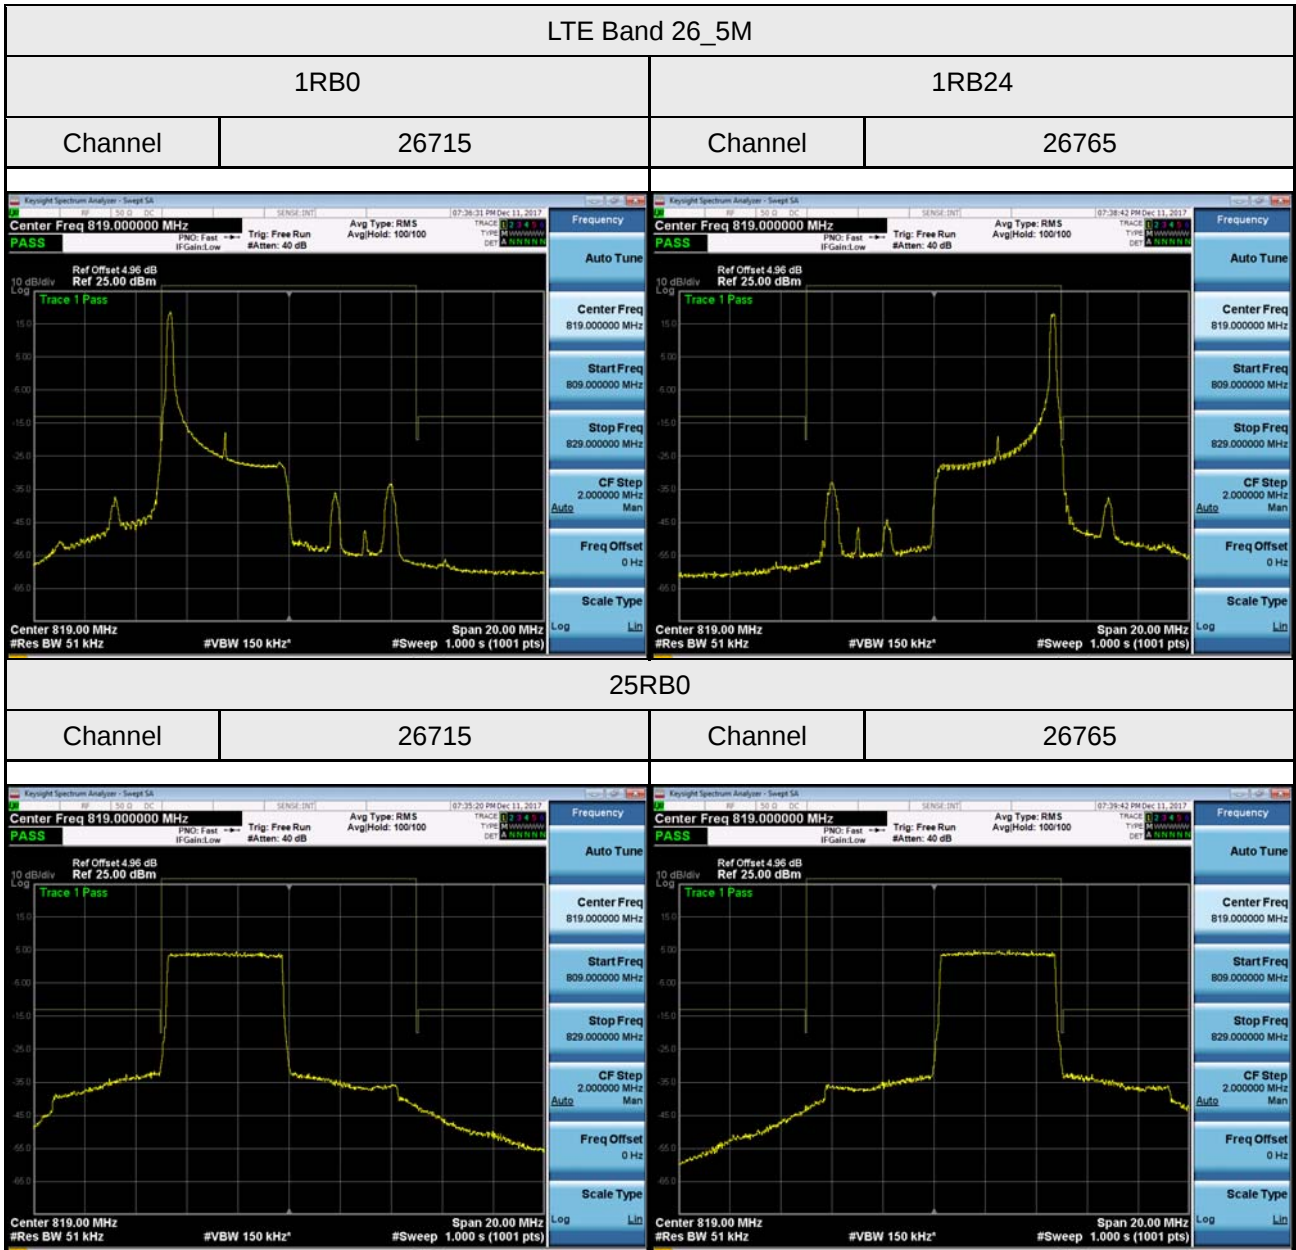

LTE Band 26_10M			
1RB0		1RB50	
Channel	26740	Channel	26740
50RB0		-	
Channel	26740	-	-

APPENDIX F - FREQUENCY STABILITY

Test Mode:	LTE Band 26_CH26740_1.4M
------------	--------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	6.13	0.007328153	2.5
-20	-5.24	0.006264196	2.5
-10	1.95	0.002331142	2.5
0	-2.67	0.003191871	2.5
10	-3.06	0.003658099	2.5
20	5.28	0.006312014	2.5
30	6.37	0.007615063	2.5
40	2.21	0.002641961	2.5
50	6.49	0.007758518	2.5
Max. Deviation (ppm)	6.49	0.007758518	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.50V	2.39	0.002857143	2.5
3.82V	-3.17	0.0037896	2.5
4.40V	-2.58	0.00308428	2.5
Max. Deviation (ppm)	3.17	0.0037896	2.5

Test Mode:	LTE Band 26_CH26740_3M
------------	------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	2.31	0.002761506	2.5
-20	-1.67	0.001996414	2.5
-10	5.29	0.006323969	2.5
0	6.87	0.008212791	2.5
10	-1.28	0.001530185	2.5
20	-5.13	0.006132696	2.5
30	-6.34	0.007579199	2.5
40	4.69	0.005606695	2.5
50	7.61	0.00909743	2.5
Max. Deviation (ppm)	7.61	0.00909743	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.50V	2.95	0.003526599	2.5
3.82V	-3.67	0.004387328	2.5
4.40V	3.72	0.004447101	2.5
Max. Deviation (ppm)	3.72	0.004447101	2.5

Test Mode:	LTE Band 26_CH26740_5M
------------	------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	7.35	0.008786611	2.5
-20	5.28	0.006312014	2.5
-10	-3.84	0.004590556	2.5
0	6.29	0.007519426	2.5
10	4.33	0.00517633	2.5
20	-5.06	0.006049014	2.5
30	7.19	0.008595338	2.5
40	-4.98	0.005953377	2.5
50	3.17	0.0037896	2.5
Max. Deviation (ppm)	7.35	0.008786611	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.50V	-2.61	0.003120143	2.5
3.82V	3.87	0.00462642	2.5
4.40V	-1.21	0.001446503	2.5
Max. Deviation (ppm)	3.87	0.00462642	2.5

Test Mode:	LTE Band 26_CH26740_10M
------------	-------------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-30	3.68	0.004396892	2.5
-20	-5.31	0.006347878	2.5
-10	6.69	0.007997609	2.5
0	4.17	0.004985057	2.5
10	-5.29	0.006323969	2.5
20	-3.35	0.004004782	2.5
30	5.61	0.006706515	2.5
40	1.88	0.00224746	2.5
50	2.91	0.003478781	2.5
Max. Deviation (ppm)	6.69	0.007997609	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
3.50V	3.08	0.003682008	2.5
3.82V	-1.34	0.001601913	2.5
4.40V	-3.69	0.004411237	2.5
Max. Deviation (ppm)	3.69	0.004411237	2.5