

P19 NR N41_DFT-QPSK100M_Left Cheek_Ch528000_1RB_OS1_Ant2

Communication System: NR; Frequency: 2640 MHz; Duty Cycle: 1:1

Medium: HSL2550_0610 Medium parameters used: $f = 2640$ MHz; $\sigma = 2.014$ S/m; $\epsilon_r = 39.137$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.52, 7.57, 7.43) @ 2640 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.473 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.028 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.614 W/kg

SAR(1 g) = 0.385 W/kg; SAR(10 g) = 0.193 W/kg

Smallest distance from peaks to all points 3 dB below = 11.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 0.468 W/kg

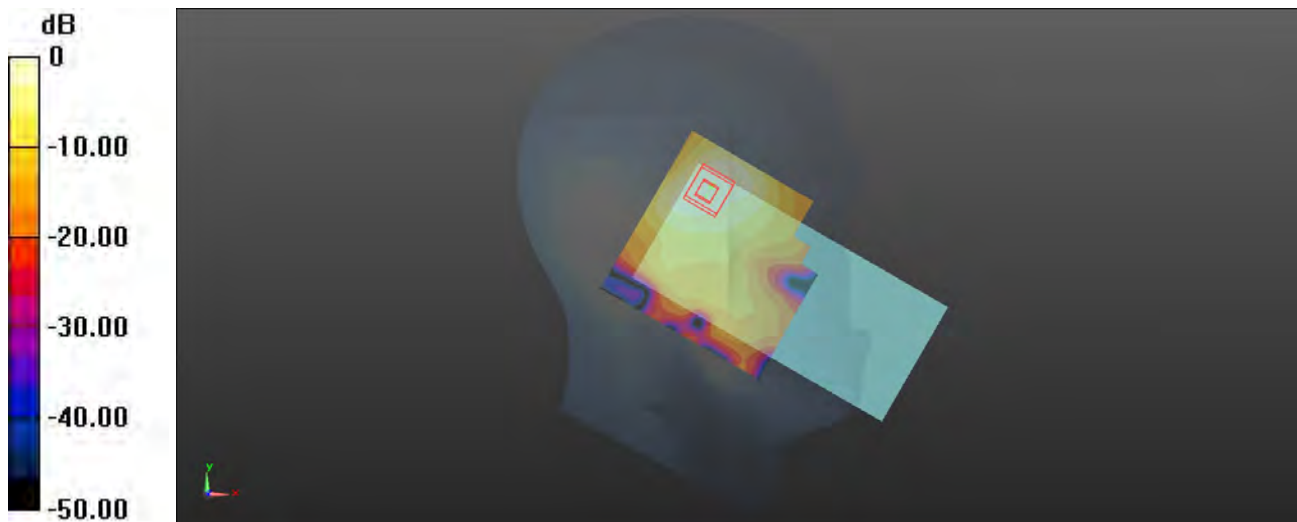

0 dB = 0.468 W/kg

P20 NR N48_DFT-QPSK10M_Left Cheek_Ch646332_12RB_OS6_Ant5

Communication System: NR; Frequency: 3694.98 MHz; Duty Cycle: 1:1

Medium: HSL3700_0611 Medium parameters used: $f = 3694.98$ MHz; $\sigma = 3.006$ S/m; $\epsilon_r = 39.366$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(6.61, 6.52, 6.63) @ 3694.98 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (101x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.325 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 0.2360 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.704 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.093 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 66%

Maximum value of SAR (measured) = 0.405 W/kg

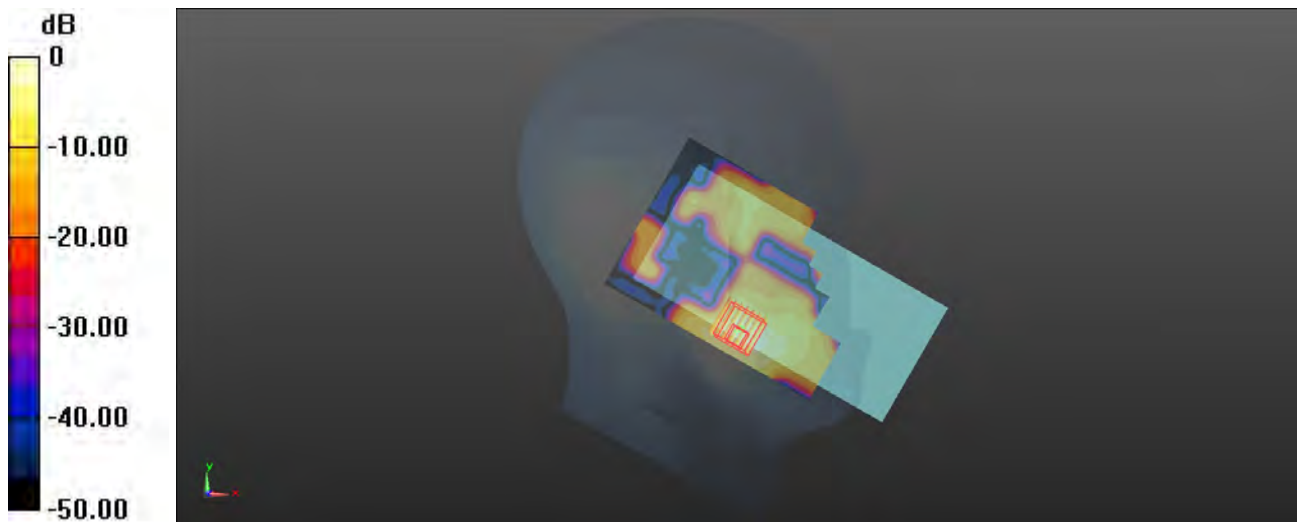

0 dB = 0.405 W/kg

P21 NR N66_DFT-QPSK20M_Left Cheek_Ch349000_1RB_OS1_Ant2

Communication System: NR; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750_0603 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.135$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.12, 8.17, 8.10) @ 1745 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.618 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 8.804 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.267 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.2%

Maximum value of SAR (measured) = 0.628 W/kg

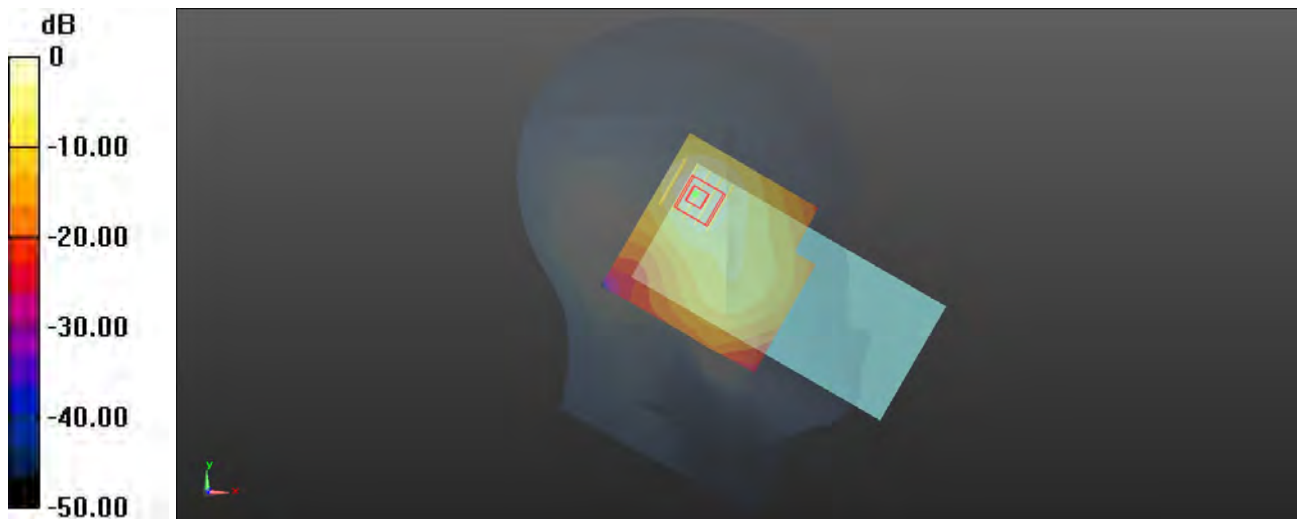

0 dB = 0.628 W/kg

P22 NR N71_DFT-QPSK20M_Left Cheek_Ch134600_50RB_OS28_Ant2

Communication System: NR; Frequency: 652 MHz; Duty Cycle: 1:1

Medium: HSL750_0309 Medium parameters used: $f = 652$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 43.128$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.34, 8.97, 9.88) @ 652 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (71x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.148 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.256 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.201 W/kg

SAR(1 g) = 0.211 W/kg; SAR(10 g) = 0.096 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.152 W/kg

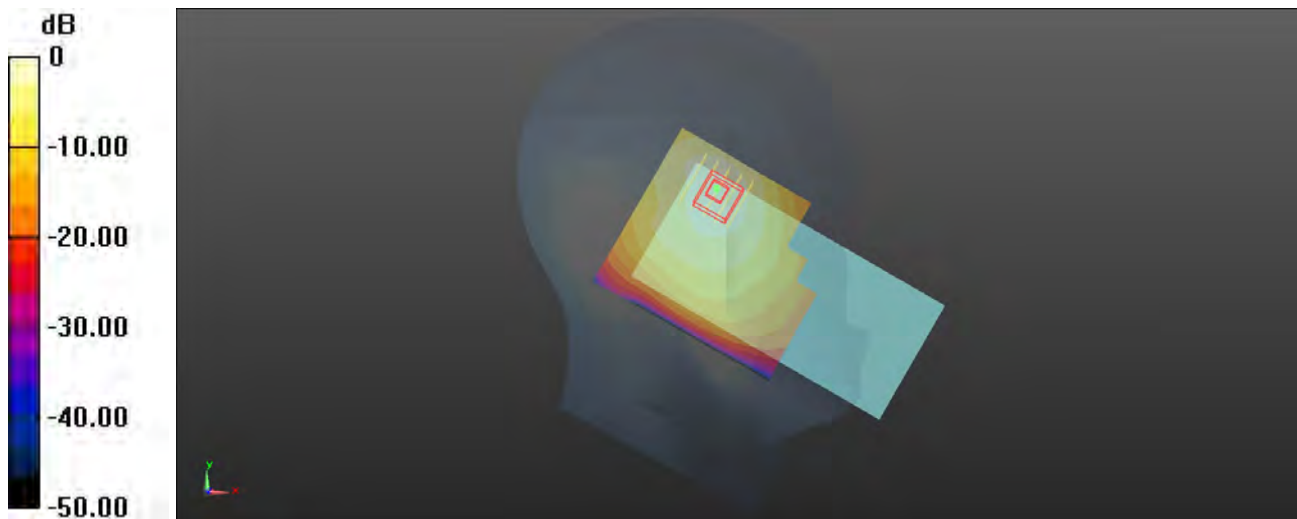

0 dB = 0.152 W/kg

P23 NR N77_CP-QPSK100M_Left Cheek_Ch650000_137RB_OS0_Ant5+3

Communication System: NR; Frequency: 3750 MHz; Duty Cycle: 1:1

Medium: HSL3700_0615 Medium parameters used: $f = 3750$ MHz; $\sigma = 3.06$ S/m; $\epsilon_r = 39.256$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(6.61, 6.52, 6.63) @ 3750 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (101x111x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.685 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 6.195 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 10.6 mm

Ratio of SAR at M2 to SAR at M1 = 76%

Maximum value of SAR (measured) = 0.712 W/kg

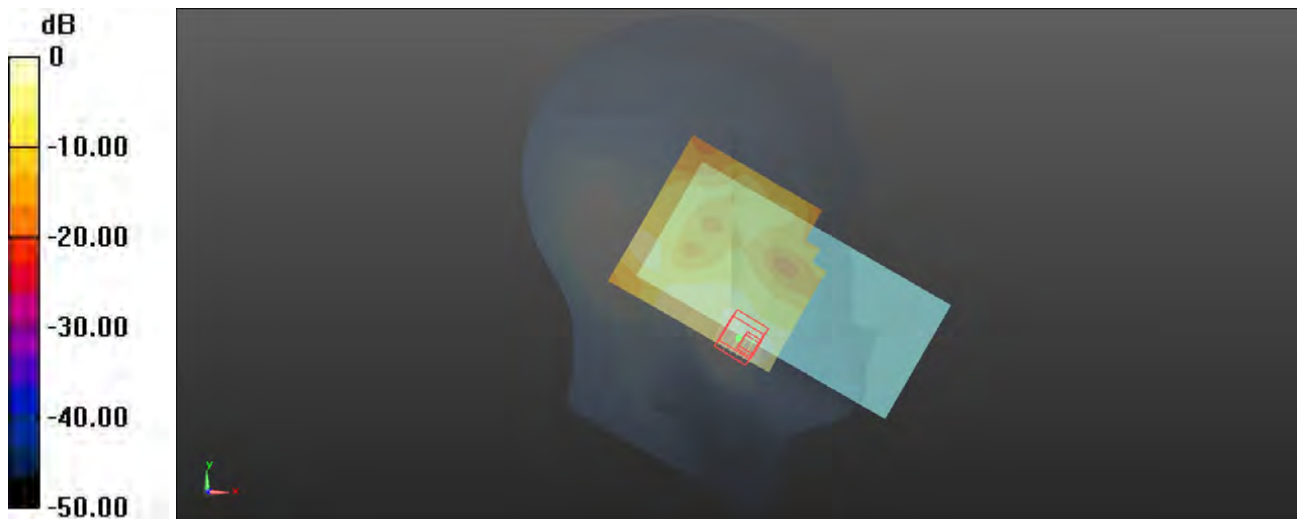

0 dB = 0.712 W/kg

P24 NR N78_CP-QPSK100M_Left Cheek_Ch633334_137RB_OS0_Ant5+3

Communication System: NR; Frequency: 3500.01 MHz; Duty Cycle: 1:1

Medium: HSL3500_0612 Medium parameters used: $f = 3500.01$ MHz; $\sigma = 2.821$ S/m; $\epsilon_r = 39.674$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.8°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(6.7, 6.61, 6.72) @ 3500.01 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (111x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.853 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 2.771 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.222 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.5%

Maximum value of SAR (measured) = 1.03 W/kg

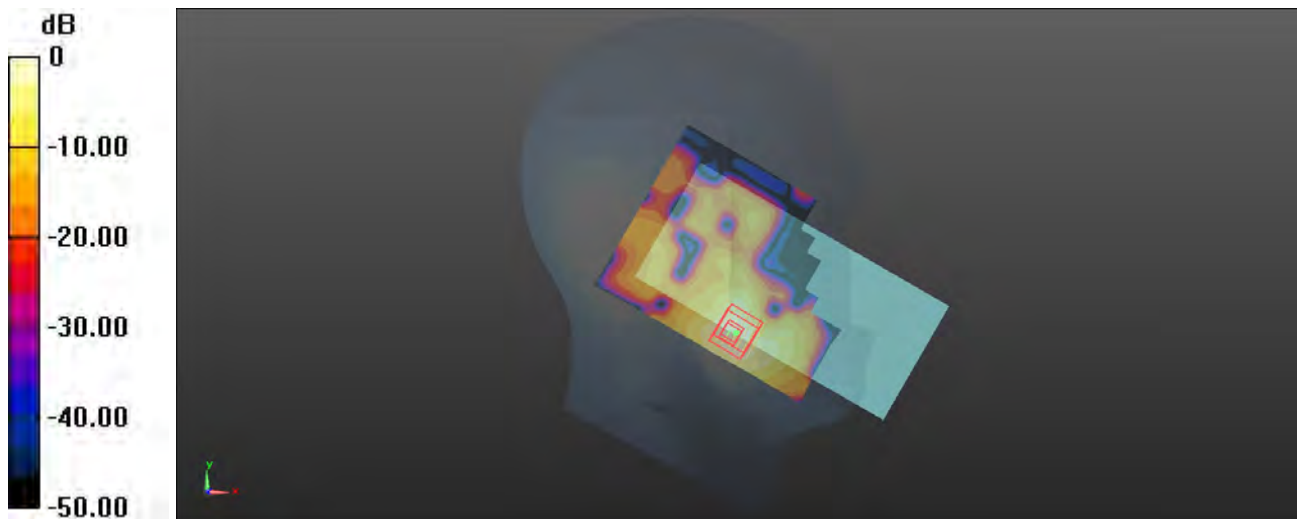

0 dB = 1.03 W/kg

P25 WLAN2.4G_802.11b_Right Tilted_Ch1_Ant5+6

Communication System: 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL2450_0607 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 39.276$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.62, 7.65, 7.52) @ 2412 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (101x121x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.374 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 9.487 V/m; Power Drift = 0.11 dB


Peak SAR (extrapolated) = 0.460 W/kg

SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 57.6%

Maximum value of SAR (measured) = 0.358 W/kg

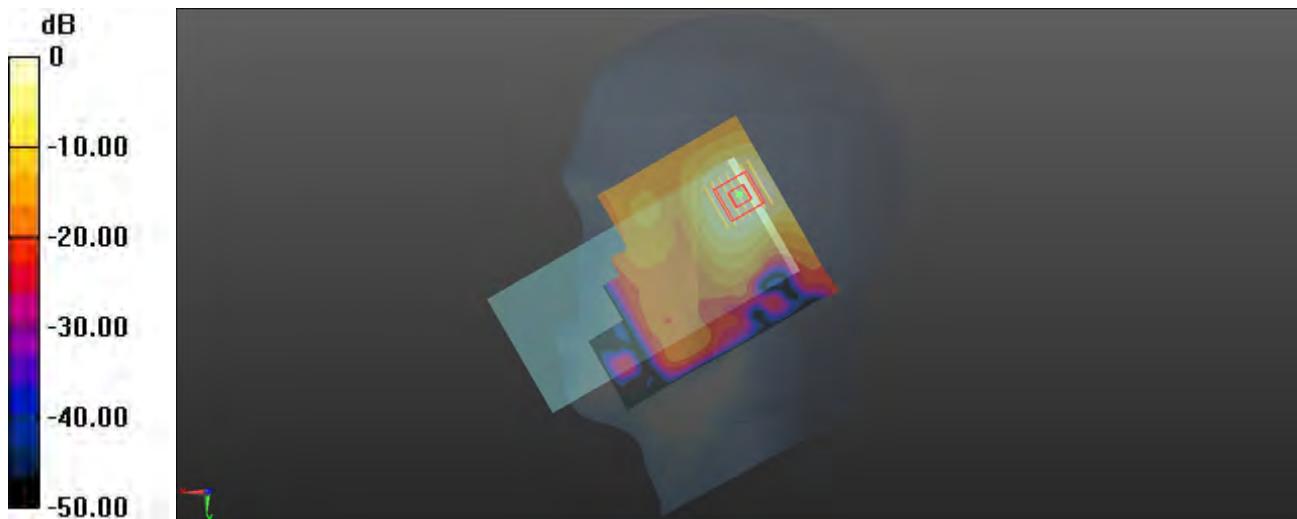

0 dB = 0.358 W/kg

P26 WLAN5G_802.11a_Right Cheek_Ch52_Ant5+6

Communication System: 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1.007

Medium: HSL5G_0619 Medium parameters used: $f = 5260$ MHz; $\sigma = 4.645$ S/m; $\epsilon_r = 36.183$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7°C; Liquid Temperature : 22.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(5.05, 4.95, 5.04) @ 5260 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (111x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.776 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.675 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.123 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 59.7%

Maximum value of SAR (measured) = 0.805 W/kg

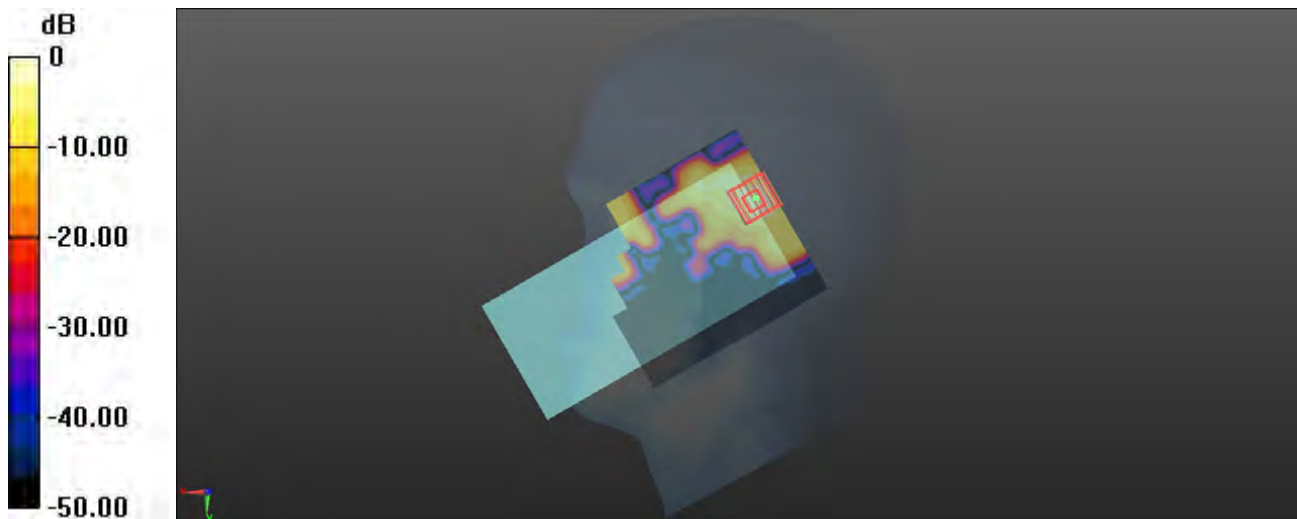

0 dB = 0.805 W/kg

P27 WLAN5G_802.11a_Left Cheek_Ch140_Ant5+6

Communication System: 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1.007

Medium: HSL5G_0621 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.104$ S/m; $\epsilon_r = 35.447$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.9°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.65, 4.62, 4.65) @ 5700 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (111x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.610 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 4.850 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.994 W/kg

SAR(1 g) = 0.328 W/kg; SAR(10 g) = 0.144 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.4%

Maximum value of SAR (measured) = 0.574 W/kg

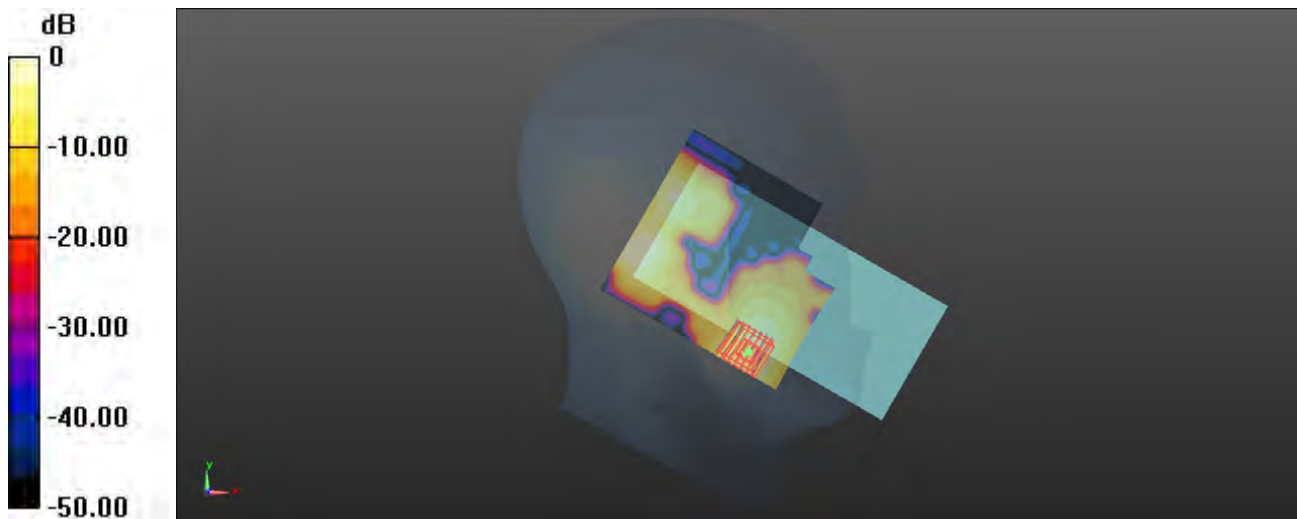

0 dB = 0.574 W/kg

P28 WLAN5G_802.11a_Right Tilted_Ch165_Ant5+6

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.005

Medium: HSL5G_0619 Medium parameters used: $f = 5825$ MHz; $\sigma = 5.227$ S/m; $\epsilon_r = 35.151$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2°C; Liquid Temperature : 22.4°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(4.59, 4.56, 4.63) @ 5825 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (111x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.837 W/kg

-Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 7.367 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.435 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 53%

Maximum value of SAR (measured) = 0.851 W/kg

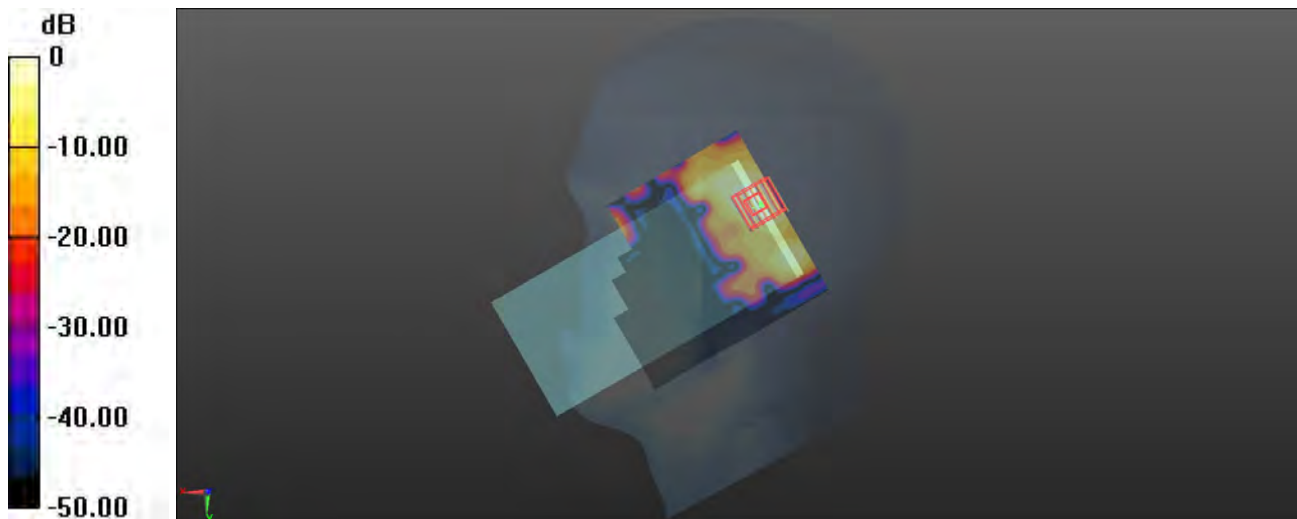

0 dB = 0.851 W/kg

P29 BT_GFSK_Left Cheek_Ch78_Ant5

Communication System: BT; Frequency: 2480 MHz; Duty Cycle: 1:2.175

Medium: HSL2450_0607 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 39.169$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.8°C; Liquid Temperature : 22.6°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.62, 7.65, 7.52) @ 2480 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (91x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.104 W/kg

-Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.872 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below = 9.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.6%

Maximum value of SAR (measured) = 0.116 W/kg

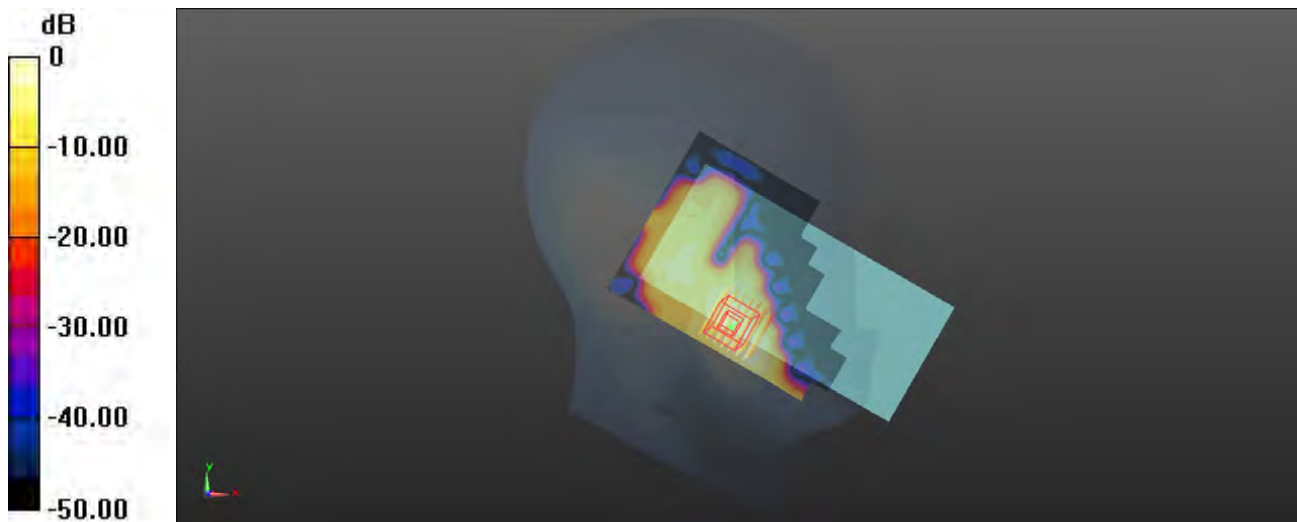

0 dB = 0.116 W/kg

P30 GSM850_GPRS 2Tx Slot_Rear Face_1cm_Ch189_Ant0

Communication System: GPRS 2Tx Slot; Frequency: 836.4 MHz; Duty Cycle: 1:4.15

Medium: HSL835_0310 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 42.958$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.94, 9.14, 8.98) @ 836.4 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.342 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.164 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.465 W/kg

SAR(1 g) = 0.269 W/kg; SAR(10 g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.4%

Maximum value of SAR (measured) = 0.367 W/kg

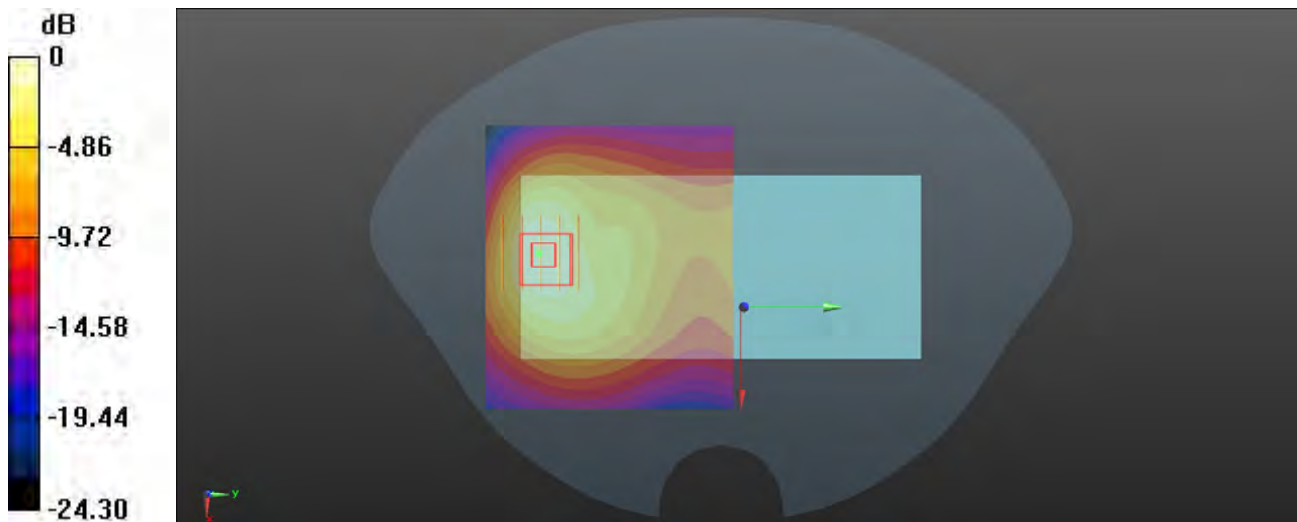

0 dB = 0.367 W/kg

P31 GSM1900_GPRS 4Tx Slot_Rear Face_1cm_Ch512_Ant0


Communication System: GPRS 4Tx Slot; Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: HSL1950_0605 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 39.21$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6°C; Liquid Temperature : 22.3°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.76, 7.82, 7.71) @ 1850.2 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 0.530 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 8.630 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 0.445 W/kg
SAR(1 g) = 0.275 W/kg; SAR(10 g) = 0.175 W/kg
Smallest distance from peaks to all points 3 dB below = 16.5 mm
Ratio of SAR at M2 to SAR at M1 = 61.8%
Maximum value of SAR (measured) = 0.368 W/kg

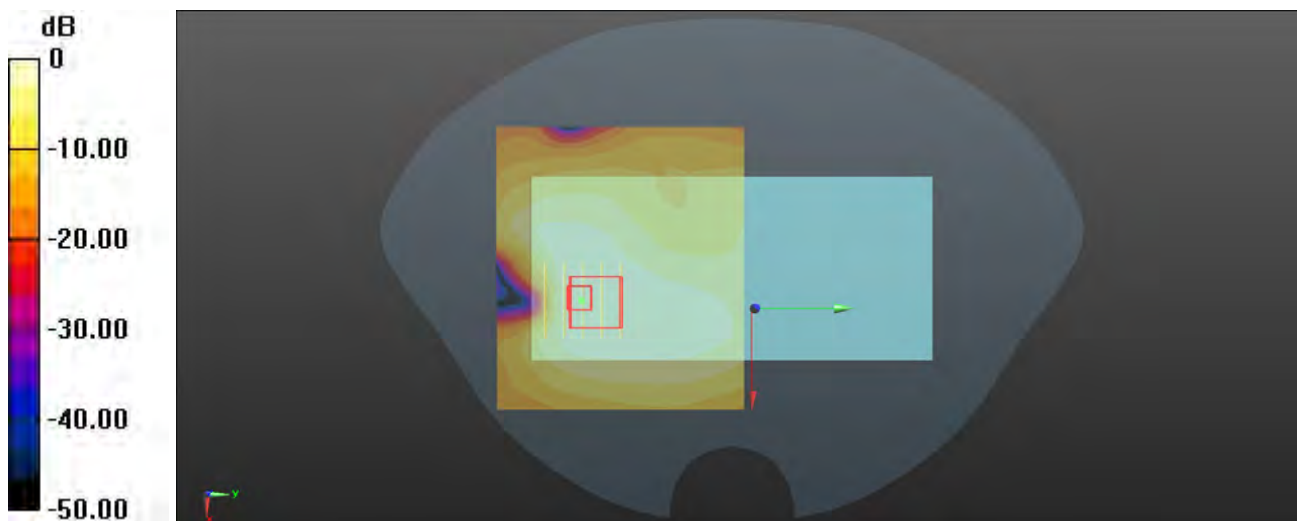

0 dB = 0.368 W/kg

P32 WCDMA II_RMC12.2K_Rear Face_1cm_Ch9538_Ant0

Communication System: WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: HSL1950_0606 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.447$ S/m; $\epsilon_r = 39.335$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.76, 7.82, 7.71) @ 1907.6 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.595 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.07 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.805 W/kg

SAR(1 g) = 0.496 W/kg; SAR(10 g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 18.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.2%

Maximum value of SAR (measured) = 0.593 W/kg

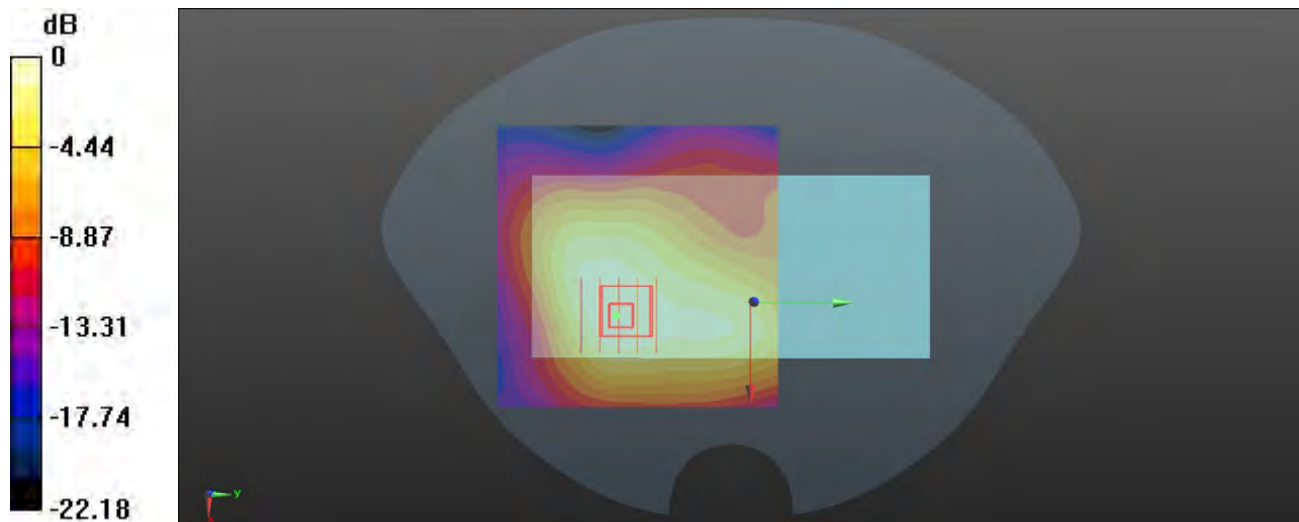

0 dB = 0.593 W/kg

P33 WCDMA IV_RMC12.2K_Rear Face_1cm_Ch1513_Ant0

Communication System: WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL1750_0604 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 40.131$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4°C; Liquid Temperature : 22.2°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(8.12, 8.17, 8.10) @ 1752.6 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.599 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.55 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 0.574 W/kg

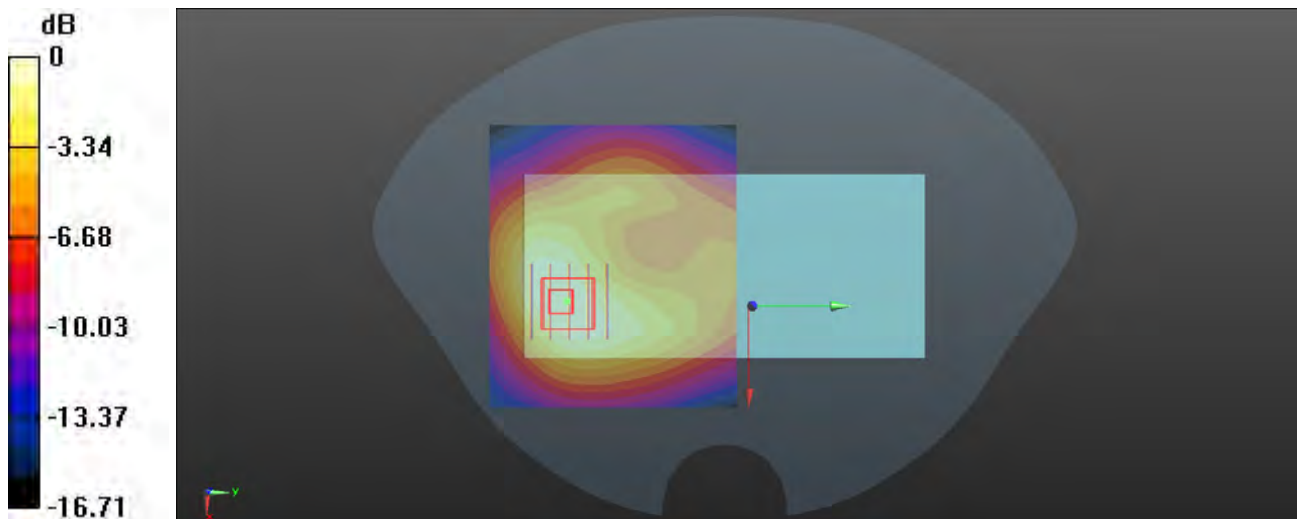

0 dB = 0.574 W/kg

P34 WCDMA V_RMC12.2K_Rear Face_1cm_Ch4233_Ant0

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: HSL835_0310 Medium parameters used: $f = 847$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 42.93$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6°C; Liquid Temperature : 22.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(9.94, 9.14, 8.98) @ 846.6 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.404 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.447 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.354 W/kg; SAR(10 g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 12.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.4%

Maximum value of SAR (measured) = 0.430 W/kg

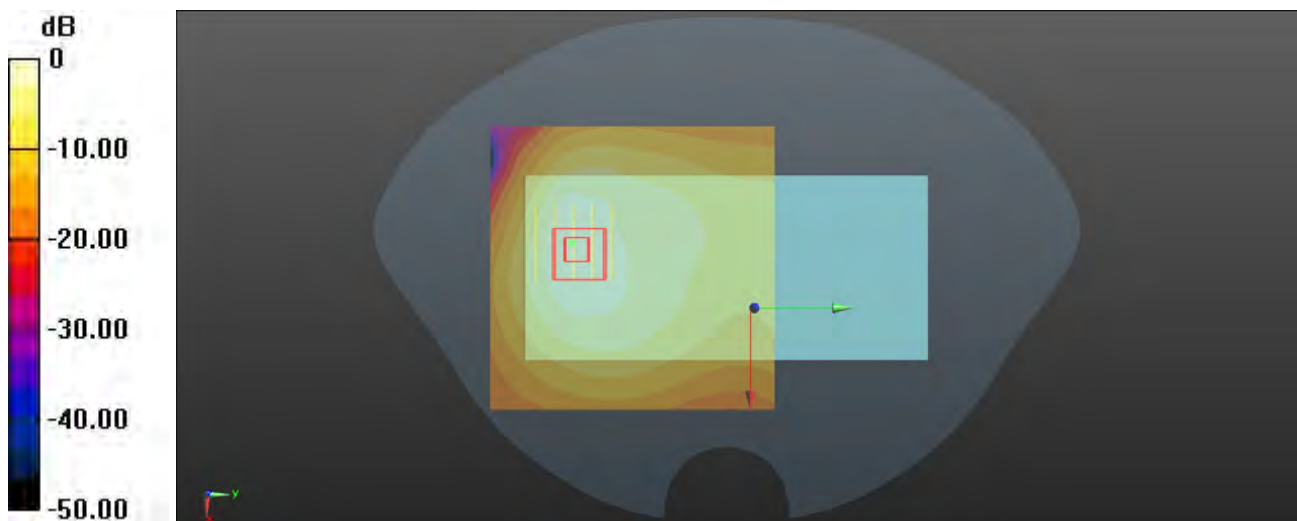

0 dB = 0.430 W/kg

P35 LTE 2_QPSK20M_Rear Face_1cm_Ch18700_50RB_OS50_Ant0

Communication System: LTE_FDD; Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL1950_0606 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.414$ S/m; $\epsilon_r = 39.391$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3°C; Liquid Temperature : 22.1°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3873; ConvF(7.76, 7.82, 7.71) @ 1860 MHz; Calibrated: 2023/08/23
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1389; Calibrated: 2023/11/03
- Phantom: SAM Right ; Type: QD000P40CD; Serial: TP:1611
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

-Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.307 W/kg

-Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.918 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 0.414 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 18.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.5%

Maximum value of SAR (measured) = 0.307 W/kg

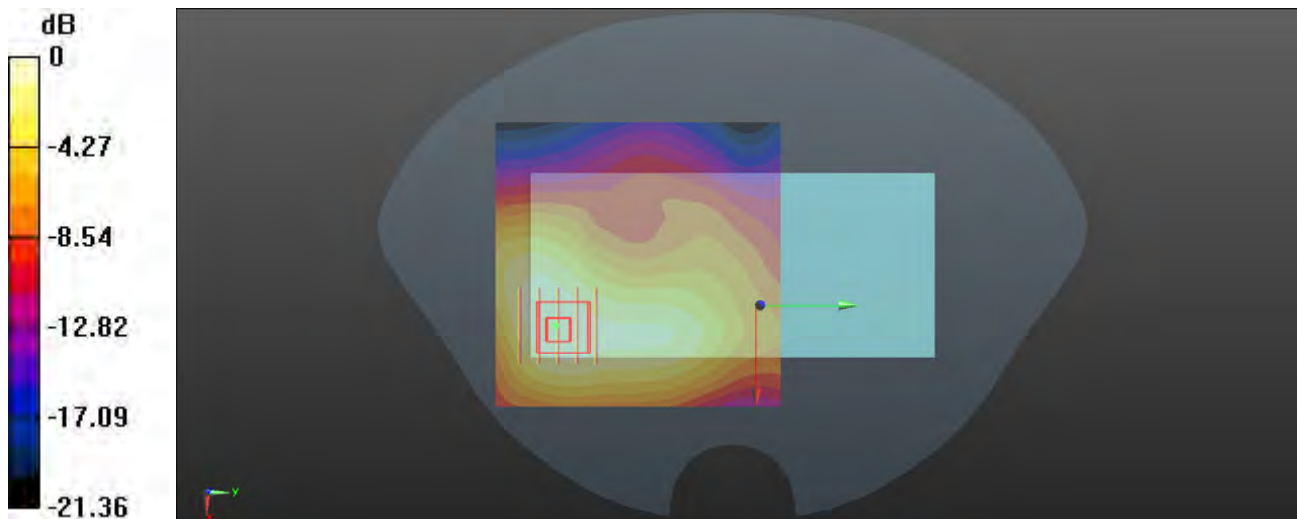

0 dB = 0.307 W/kg