



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

AIRGO 3000 SERIES USB ADAPTER 2X2

MODEL NUMBER: AGN3022UB-11

FCC ID: SA3-AGN3022UB1100

REPORT NUMBER: 05U3719-1C

ISSUE DATE: JANUARY 23, 2006

Prepared for
**AIRGO NETWORKS
900 ARASTRADERO ROAD
PALO ALTO, CA 94304
U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
A	<u>1/17/06</u>	Initial Issue	DG
B	<u>1/20/06</u>	Update BW tables with correct channels, add power bonding calculation formula to peak power and PSD procedure.	DG
C	<u>1/23/06</u>	Added MIMO/SIMO software functionality statement and updated max power table.	DG

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. MEASUREMENT UNCERTAINTY.....	5
4.3. DESCRIPTION OF EUT	6
4.4. MAXIMUM OUTPUT POWER	6
4.5. DESCRIPTION OF AVAILABLE ANTENNAS.....	<i>Error! Bookmark not defined.</i>
4.6. SOFTWARE AND FIRMWARE	<i>Error! Bookmark not defined.</i>
4.7. WORST-CASE CONFIGURATION AND MODE.....	7
4.8. DESCRIPTION OF TEST SETUP	7
5. TEST AND MEASUREMENT EQUIPMENT	9
6. LIMITS AND RESULTS	10
6.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND	10
6.1.1. 6 dB BANDWIDTH	10
6.1.2. 99% BANDWIDTH.....	33
6.1.3. PEAK OUTPUT POWER	56
6.1.4. MAXIMUM PERMISSIBLE EXPOSURE.....	78
6.1.5. AVERAGE POWER.....	81
6.1.6. PEAK POWER SPECTRAL DENSITY	83
6.1.7. CONDUCTED SPURIOUS EMISSIONS.....	105
6.2. RADIATED EMISSIONS.....	126
6.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	126
6.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND	129
6.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	149
6.3. POWERLINE CONDUCTED EMISSIONS	153
7. SETUP PHOTOS.....	157

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: AIRGO NETWORKS
900 ARASTRADERO ROAD
PALO ALTO, CA 94304
U.S.A.

EUT DESCRIPTION: AIRGO 3000 SERIES USB ADAPTER 2X2

MODEL: AGN3022UB-11

SERIAL NUMBER: 1320

DATE TESTED: OCTOBER 7, 2005 – JANUARY 19, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



DAVID GARCIA
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



FRANK IBRAHIM
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

4.3. DESCRIPTION OF EUT

The EUT is an 802.11b/g MIMO wireless LAN module.

The radio module is manufactured by Airgo Networks, Inc.

All data in this report is applicable to the model number documented in Section 1 above.

4.4. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	22.40	173.78
2412 - 2462	802.11g	27.86	610.94
2422 - 2452	802.11 MIMO	26.13	410.20
2422 - 2452	802.11 SIMO	25.64	366.44

4.5. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes two omni monopole antennas for diversity, each with a maximum gain of 2 dBi.

4.6. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was USBDebug PTT, rev. 2.0.5.153

The test utility software used during testing was AirgoPTT, rev. 2.0.5.168. The test software is capable of operating both chains simultaneously for MIMO and SIMO operation.

All MIMO and SIMO mode antenna port conducted tests were done on each chain individually. Radiated emissions testing for MIMO and SIMO modes were done with both chains operating simultaneously.

4.7. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2437 MHz.

The worst-case data rate for this channel is determined to be 6 Mb/s, based on preliminary testing.

Thus radiated emissions below 1 GHz and Power Line Conducted Emissions tests were made in the 802.11g mode, 2437 MHz, 6 Mb/s.

4.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Sony	PCG-6B1L	3202419	DoC
AC/DC Adapter	Sony	PCGA-AC16V6	147774951 0930098	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	2m	N/A
2	DC	1	DC	Unshielded	2m	N/A
3	USB	1	USB	Unshielded	1m	N/A

TEST SETUP

The EUT is connected to a host laptop via a USB cable; special software was used to control the channel and output power.

SETUP DIAGRAM FOR TESTS

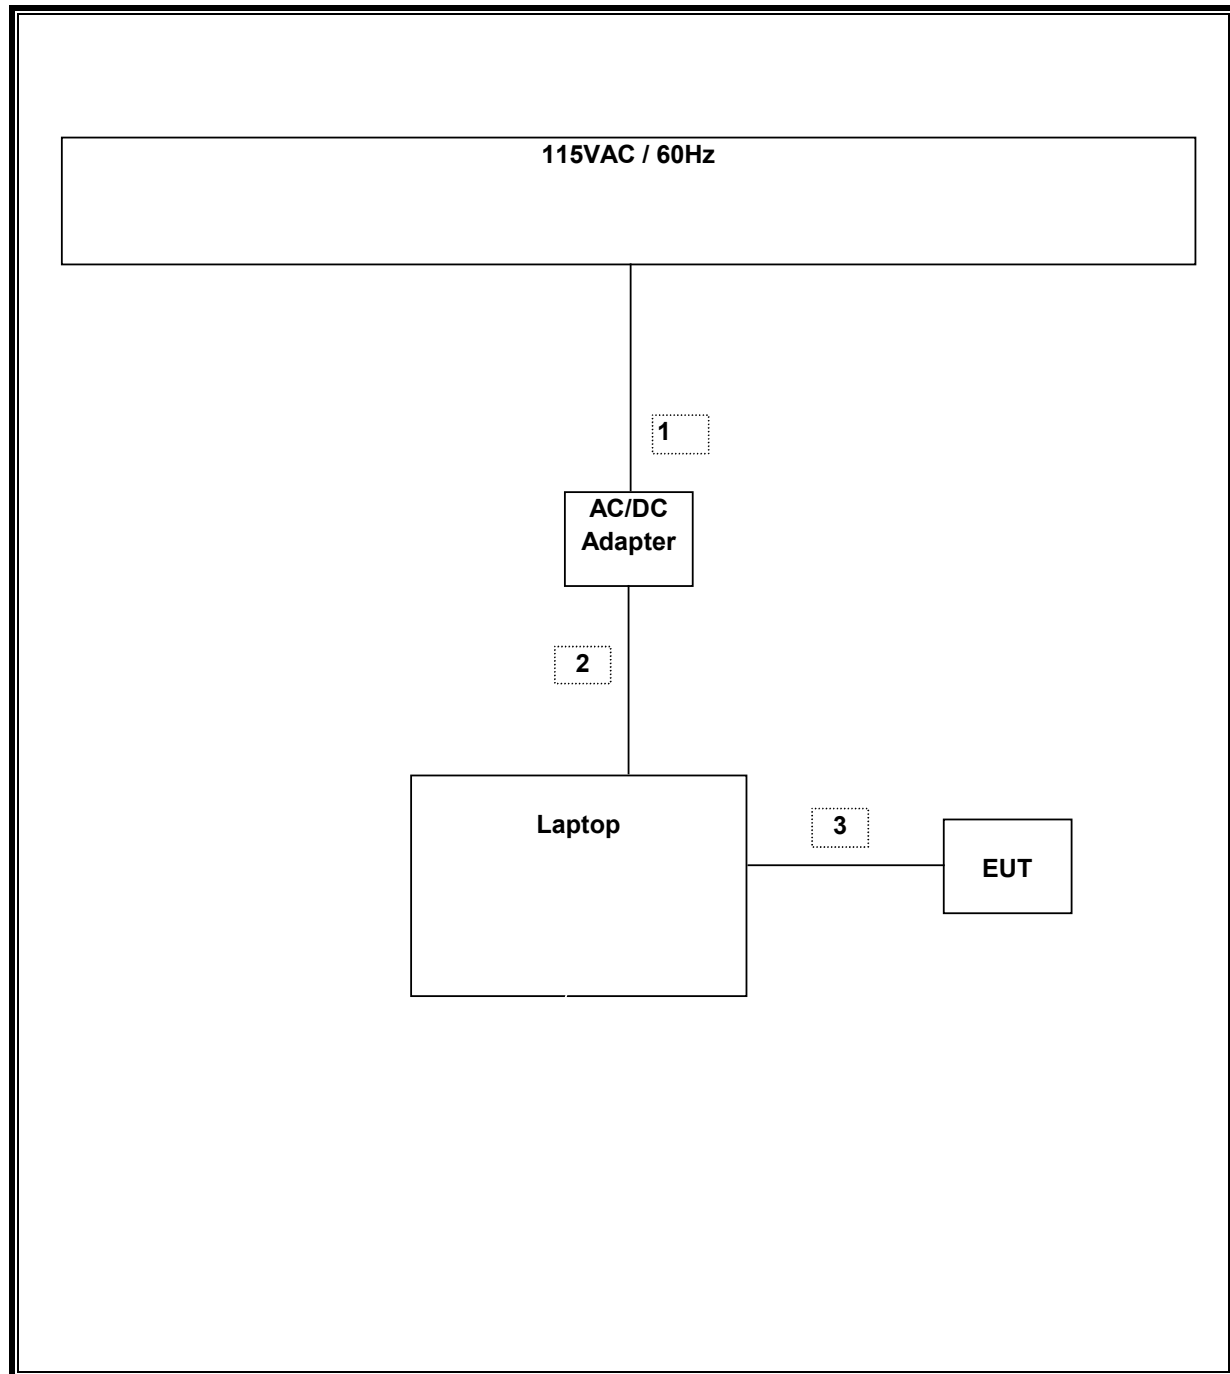

5. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	03/29/06
RF Filter Section	HP	85420E	3705A00256	03/29/06
Antenna, Bilog 30MHz ~ 2GHz	Sunol Sciences	JB1	A121003	03/03/06
Antenna, Horn 1 ~ 18 GHz	ETS	3117	29310	04/22/06
Preamplifier 1-26.5 GHz	HP	8449B	3008A00931	06/24/06
EMI Test Receiver	R & S	ESIB40	100192	05/09/06
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	08/30/06
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	08/30/06
Line Filter	Lindgren	LMF-3489	497	CNR
EMI Test Receiver	R & S	ESHS 20	827129/006	06/03/06
Peak Power Meter	Agilent	E4416A	GB41291160	02/09/06
Peak / Average Power Sensor	Agilent	E9327A	US40440755	02/10/06
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	MY43360112	03/28/06
Antenna, Horn, 18 ~ 26 GHz	ARA	MWH-1826/B	1013	09/12/06

6. LIMITS AND RESULTS

6.1. CHANNEL TESTS FOR THE 2400 TO 2483.5 MHz BAND

6.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:

CHAIN 0:

802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	11083.333	500	10583
Middle	2437	11083.333	500	10583
High	2462	12000	500	11500

802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	15750	500	15250
Middle	2437	15416.667	500	14917
High	2462	15750	500	15250

802.11 SIMO CB Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2422	30166.667	500	29667
High	2452	30250	500	29750

802.11 MIMO CB Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2422	30250	500	29750
High	2452	30170	500	29670

CHAIN 1:

802.11b Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	12000	500	11500
Middle	2437	12000	500	11500
High	2462	12000	500	11500

802.11g Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16333.333	500	15833
Middle	2437	16000	500	15500
High	2462	15750	500	15250

802.11 SIMO CB Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2422	30250	500	29750
High	2452	30920	500	30420


802.11 MIMO CB Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2422	30330	500	29830
High	2452	30330	500	29830

CHAIN 0:


6 DB BANDWIDTH (802.11b MODE)

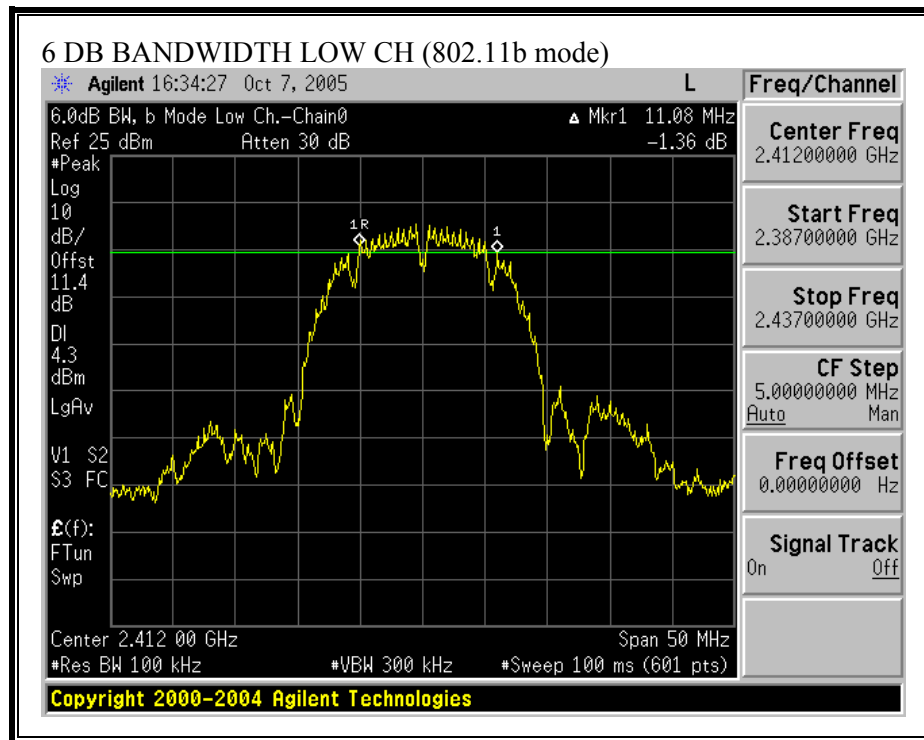


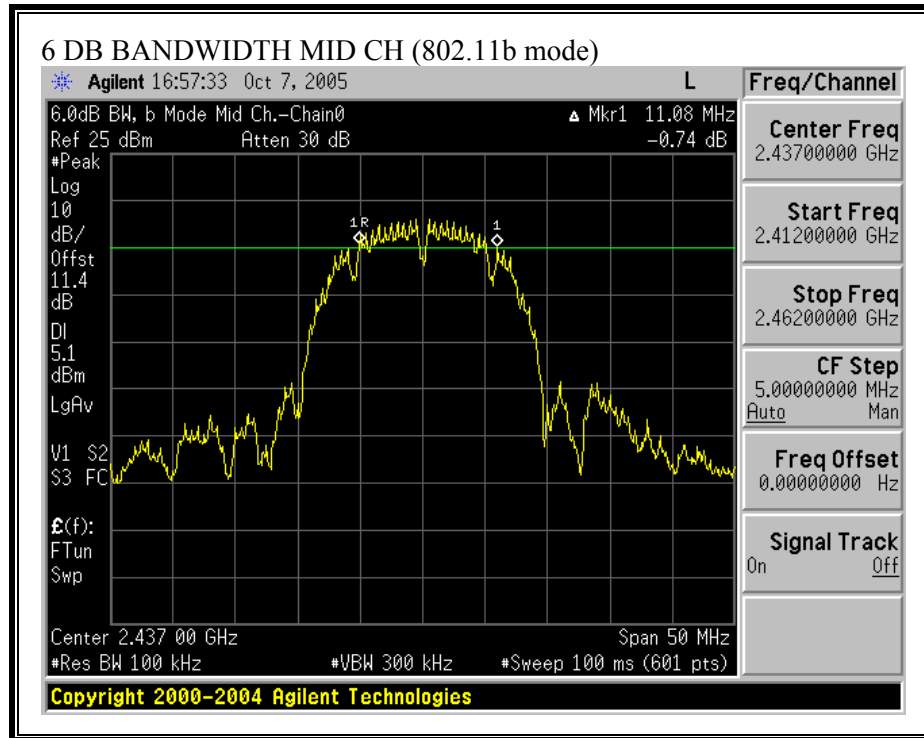


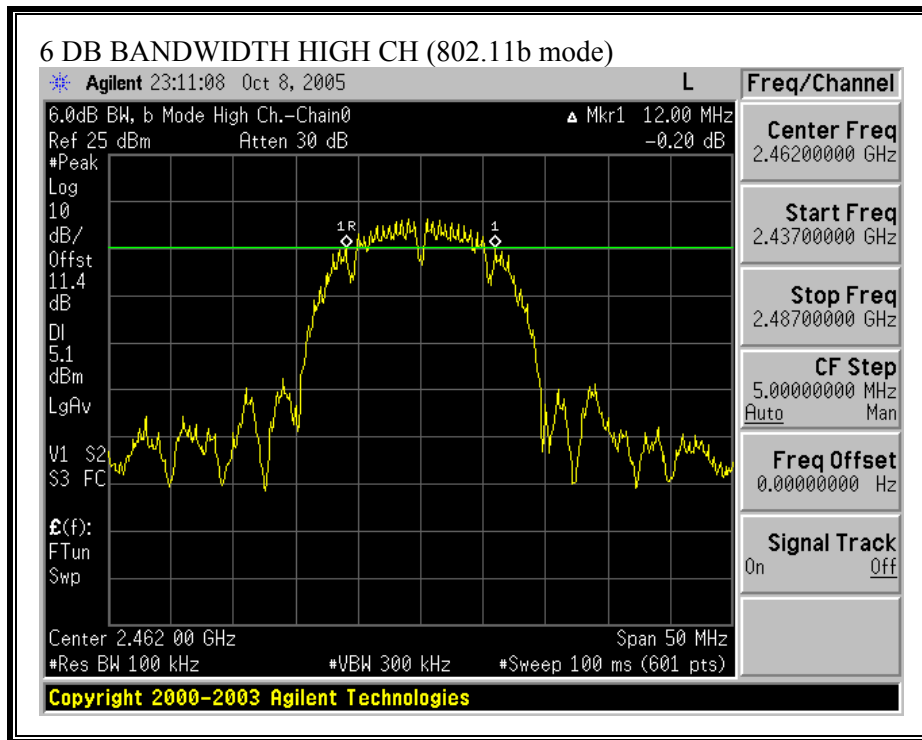


6 DB BANDWIDTH (802.11g MODE)

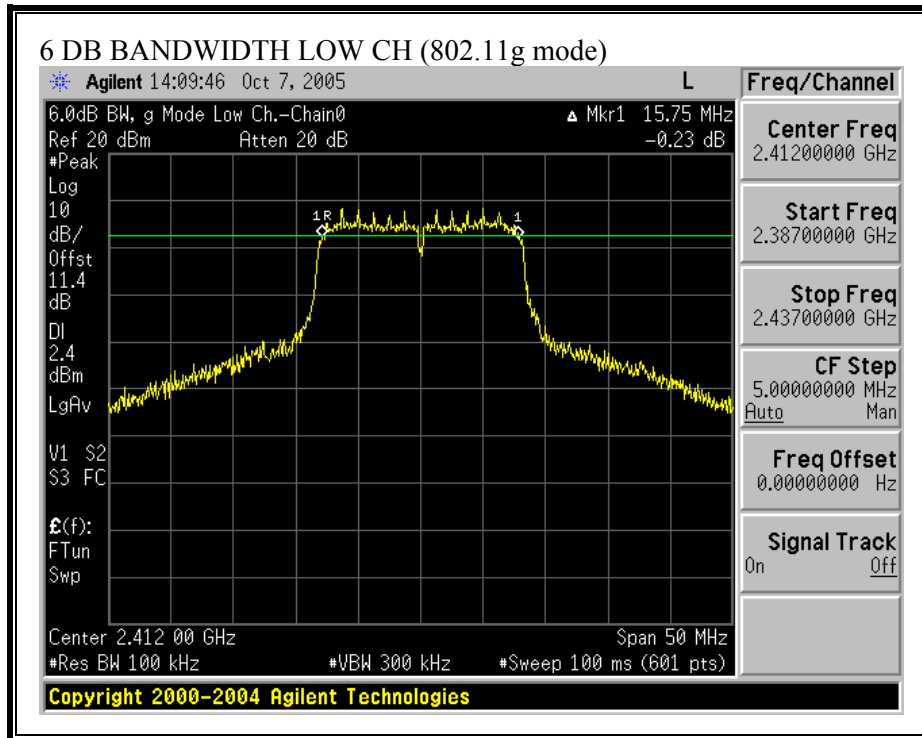


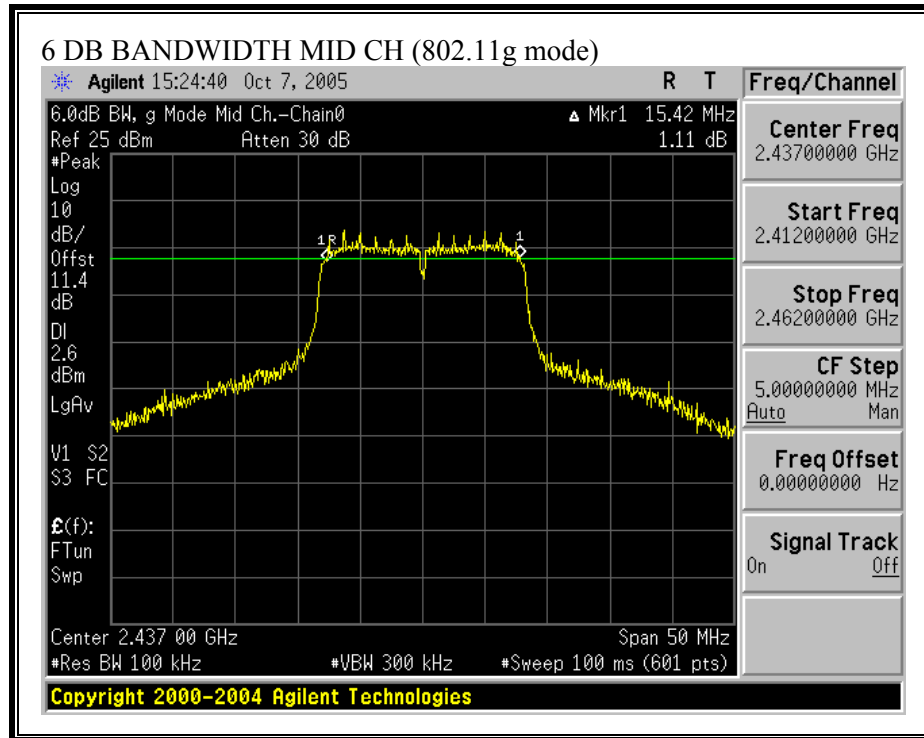

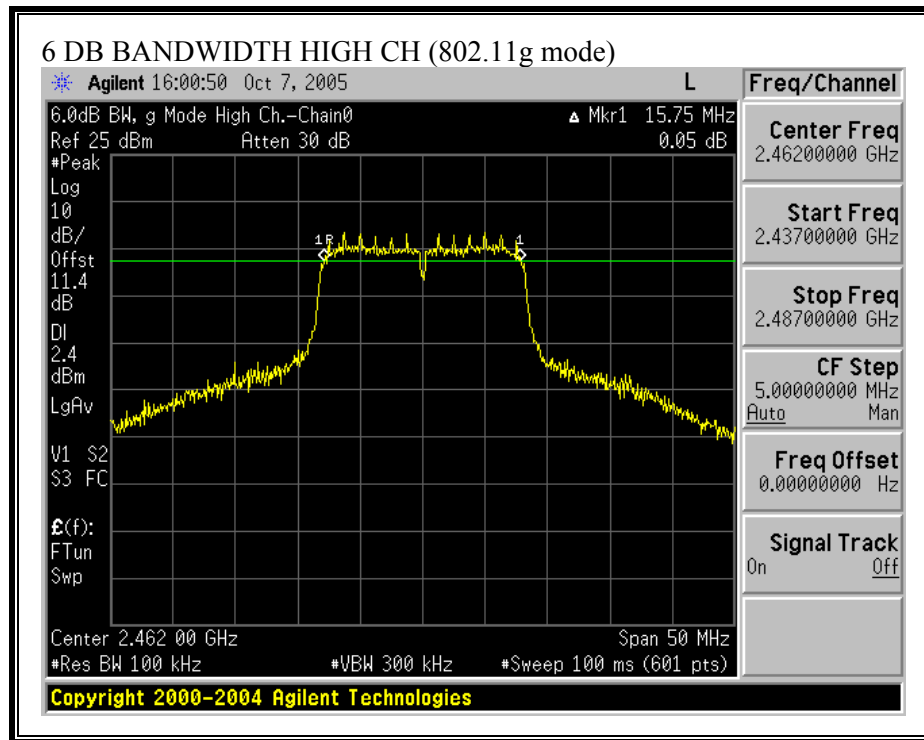



6 DB BANDWIDTH (802.11 MIMO CB MODE)

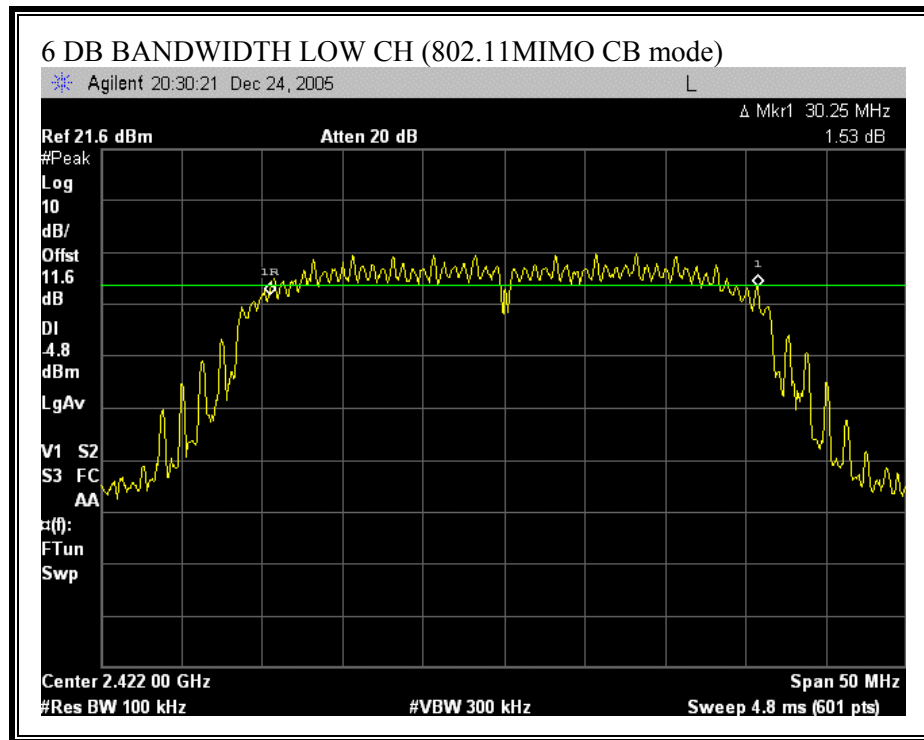

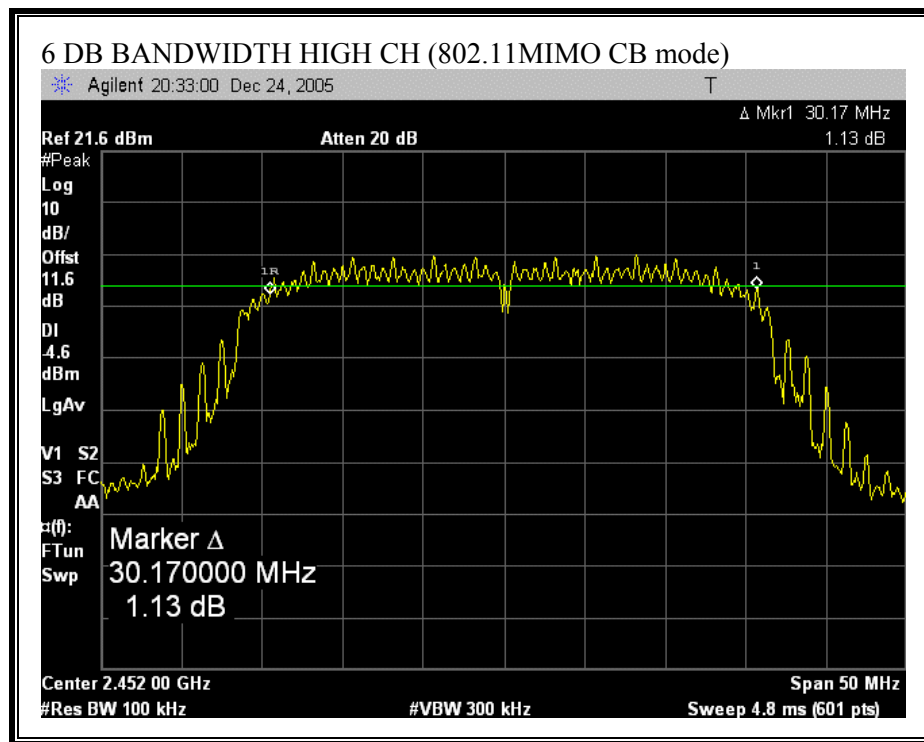


6 DB BANDWIDTH (802.11 SIMO CB MODE)

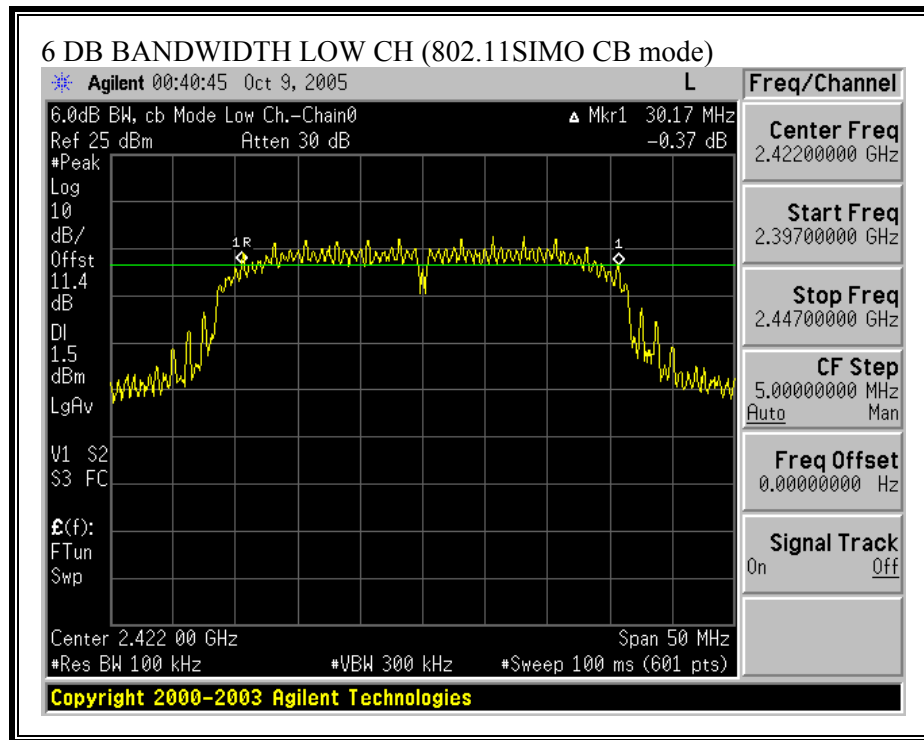


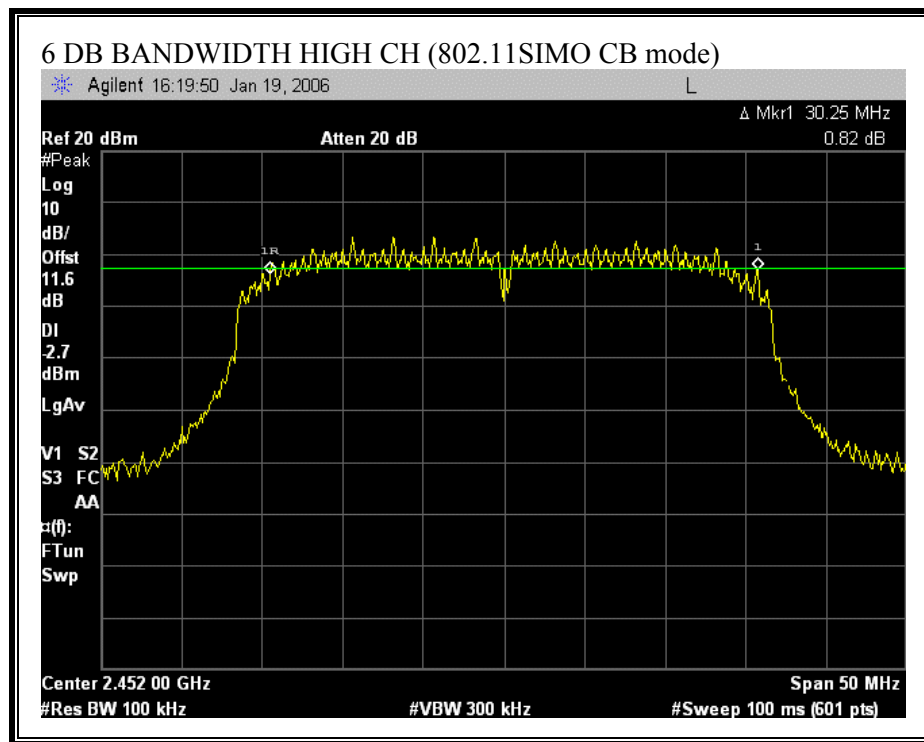


CHAIN 1:


6 DB BANDWIDTH (802.11b MODE)

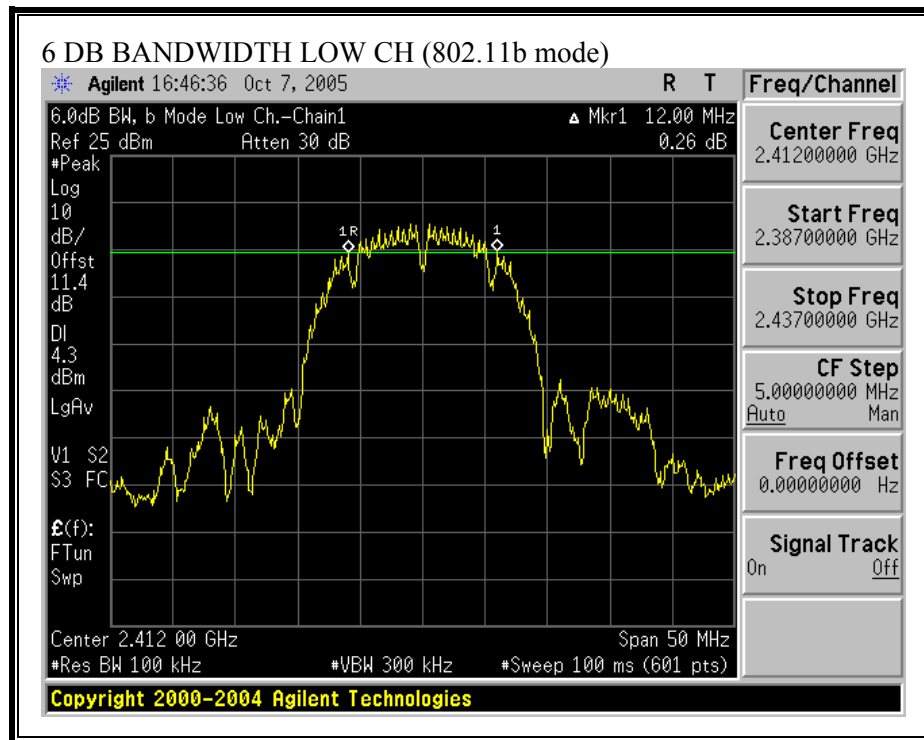


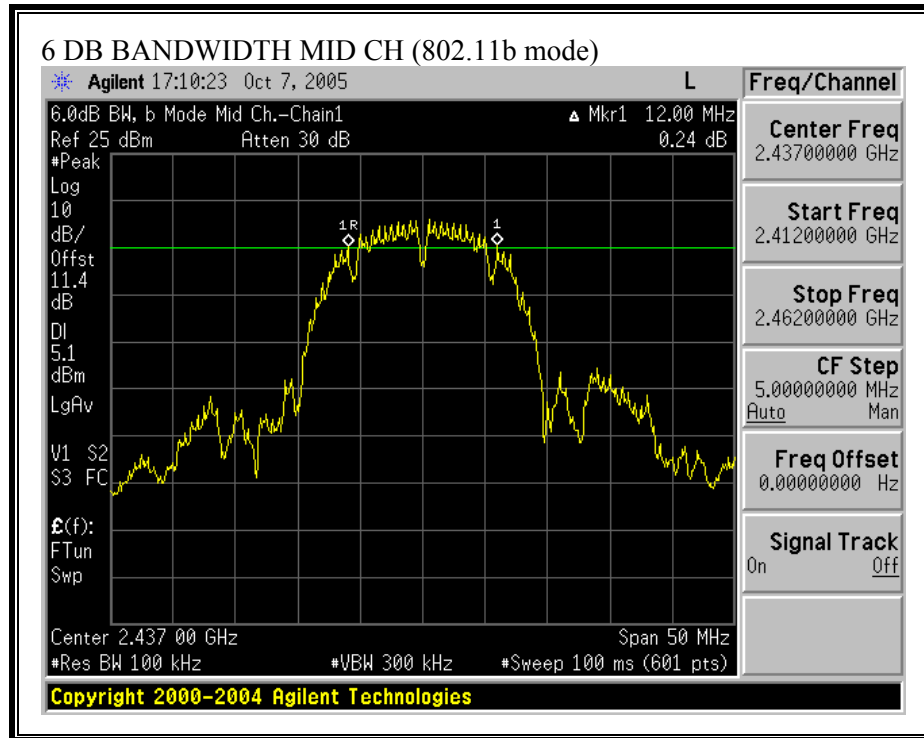


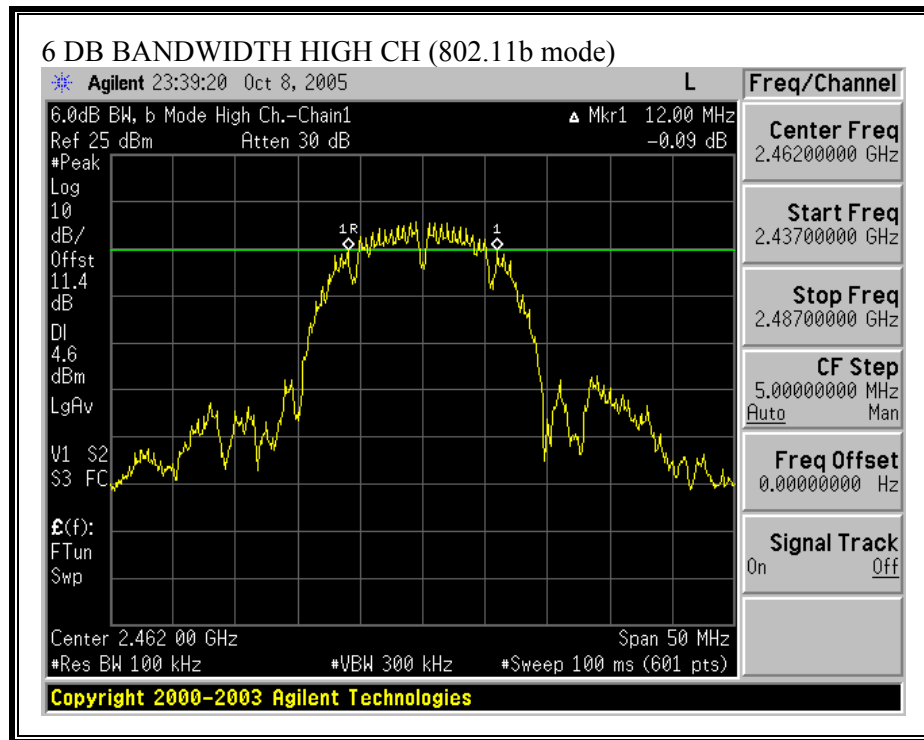


6 DB BANDWIDTH (802.11g MODE)

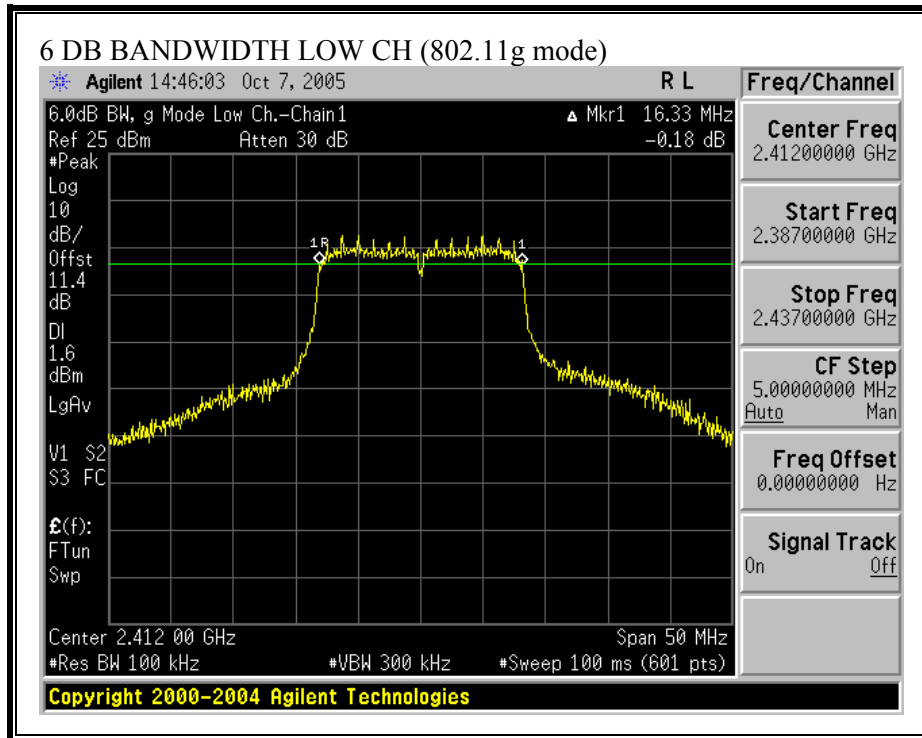


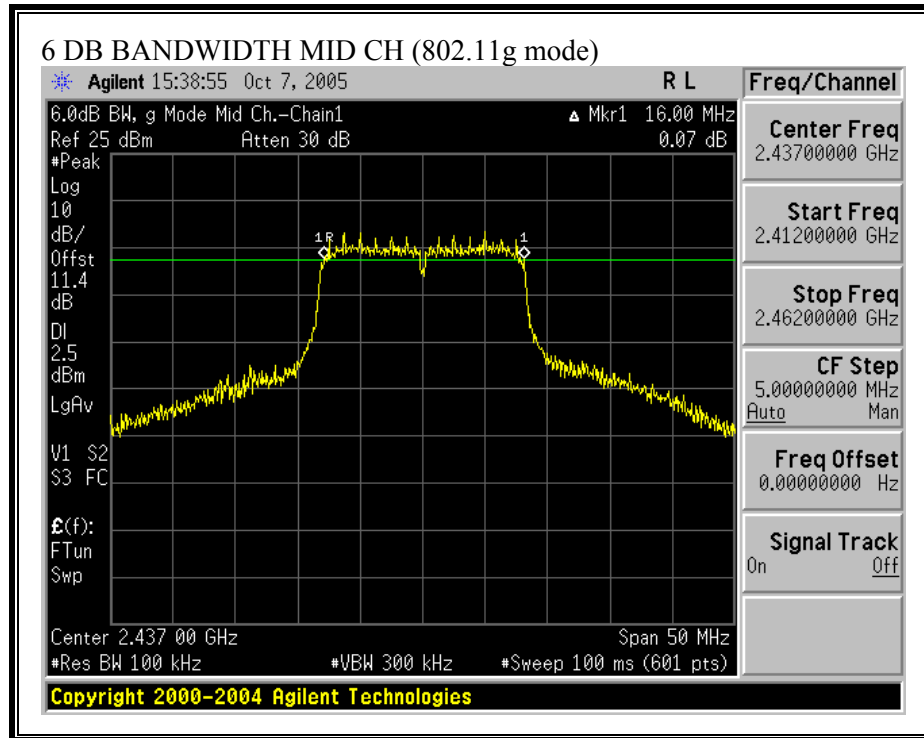

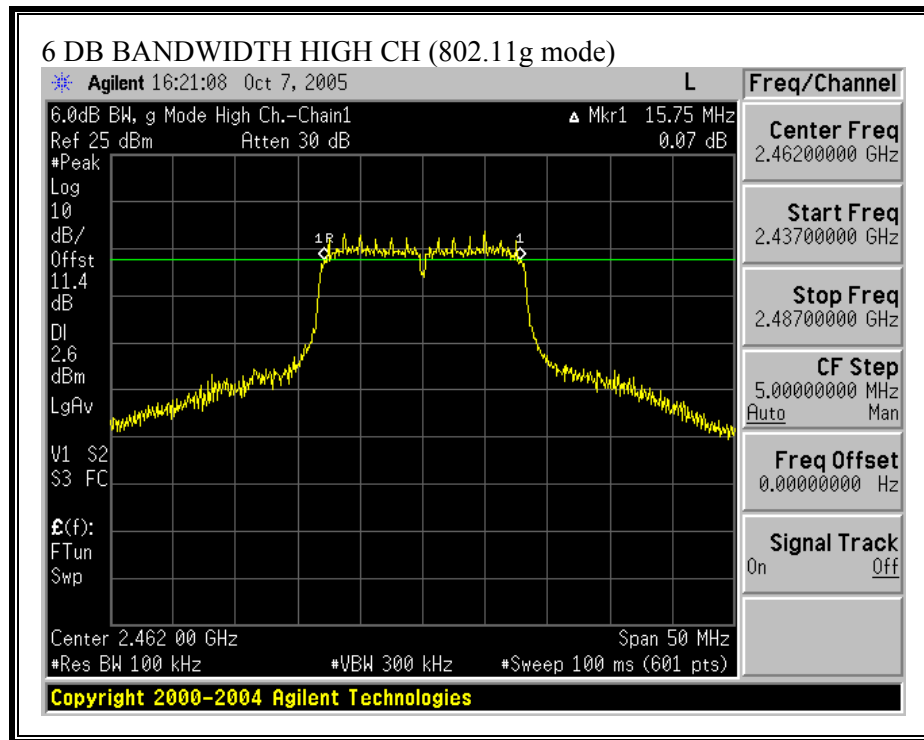



6 DB BANDWIDTH (802.11 MIMO CB MODE)

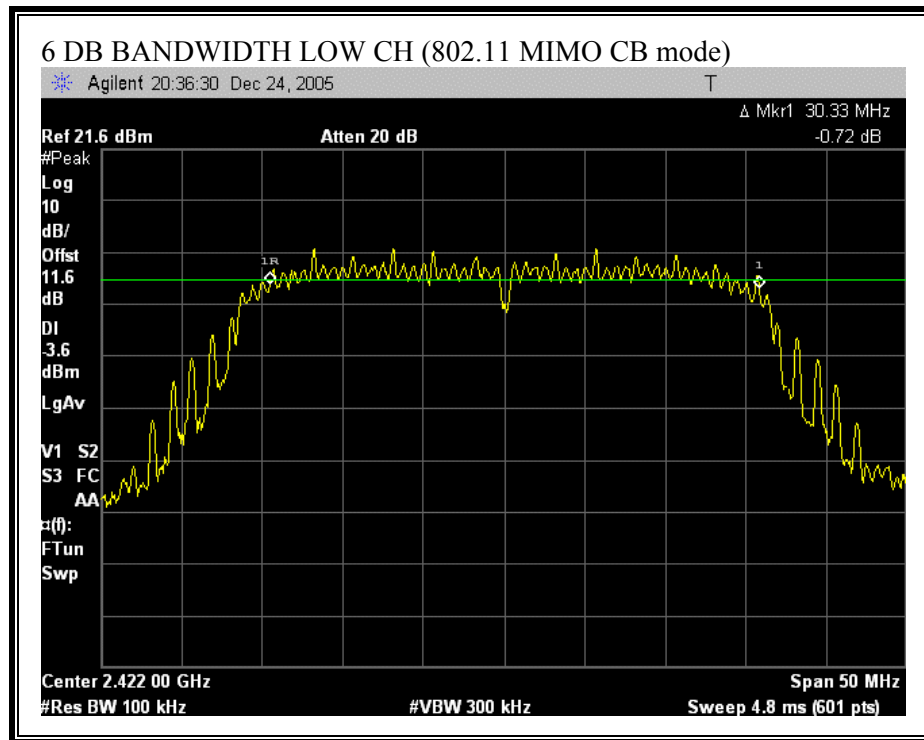

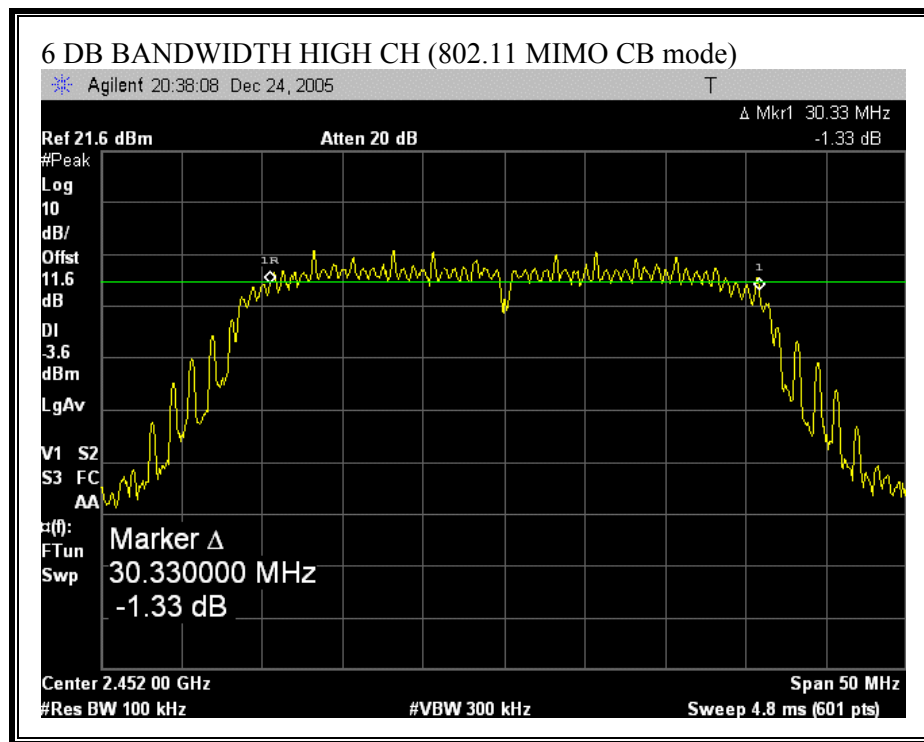

6 DB BANDWIDTH (802.11SIMO CB MODE)

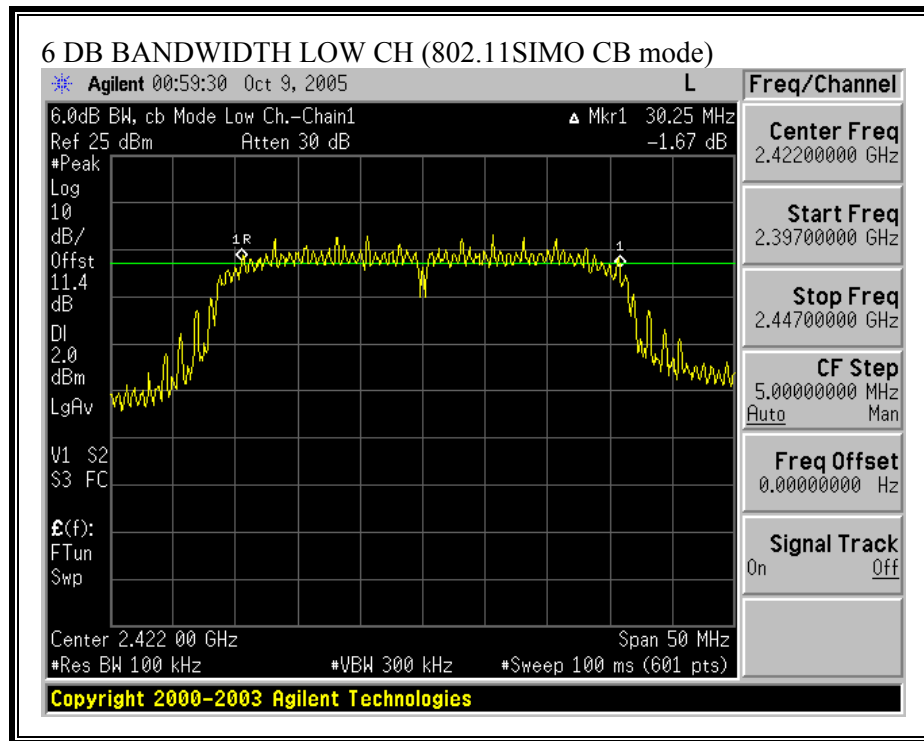

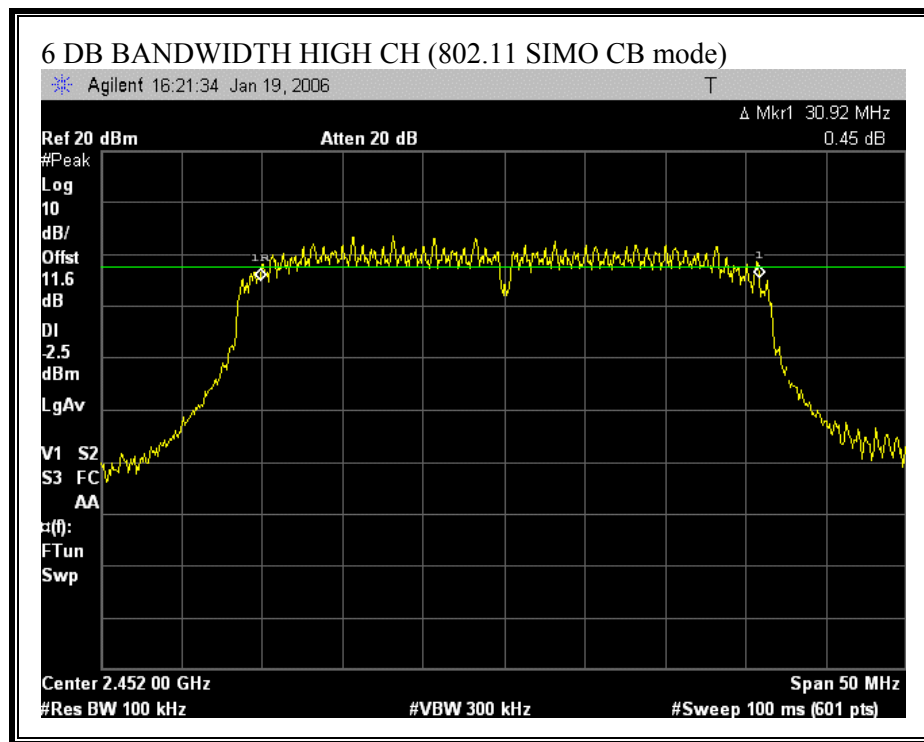

6.1.2. 99% BANDWIDTH

LIMIT

None: for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

No non-compliance noted:

CHAIN 0:

802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	14.965
Middle	2437	14.927
High	2462	15.013

802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.356
Middle	2437	16.365
High	2462	16.339

802.11 MIMO CB Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2422	31.82
High	2452	31.7994

802.11 SIMO CB Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2422	32.187
High	2452	31.4643

CHAIN 1:

802.11b Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	15.025
Middle	2437	15.085
High	2462	15.065

802.11g Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.386
Middle	2437	16.421
High	2462	16.388

802.11 MIMO CB Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2422	31.82
High	2452	31.7994


802.11 SIMO CB Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2422	33.226
High	2452	31.9734

CHAIN 0:


99% BANDWIDTH (802.11b MODE)

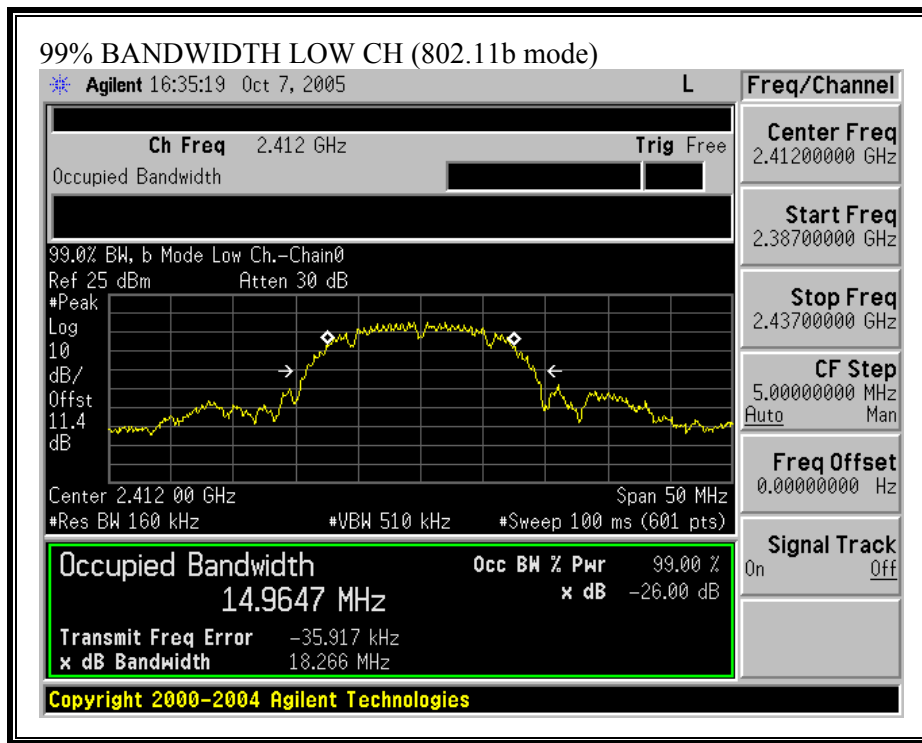


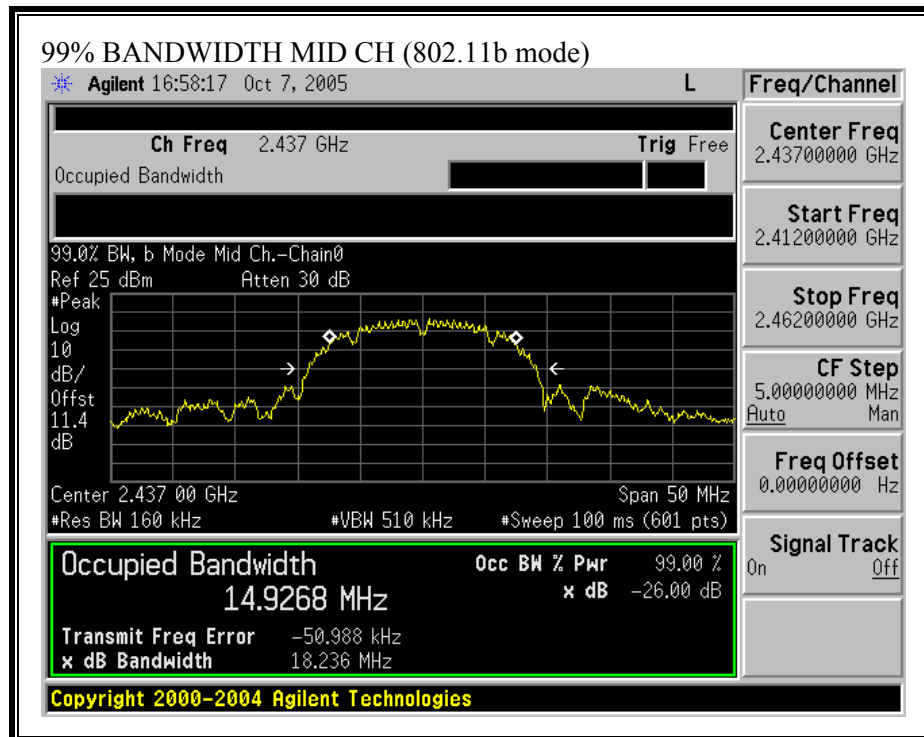


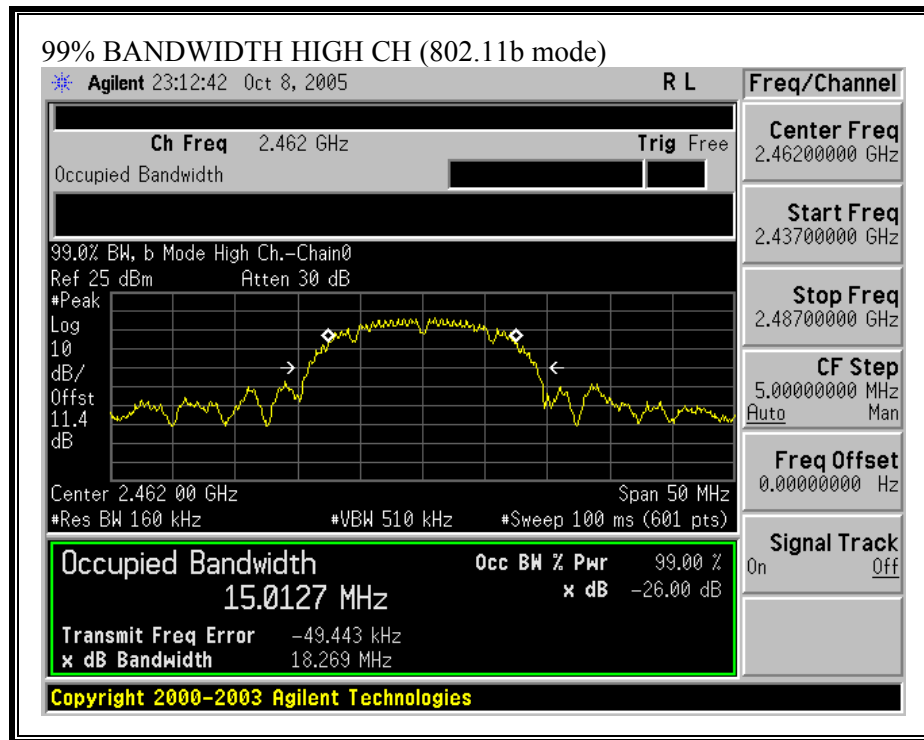


99% BANDWIDTH (802.11g MODE)

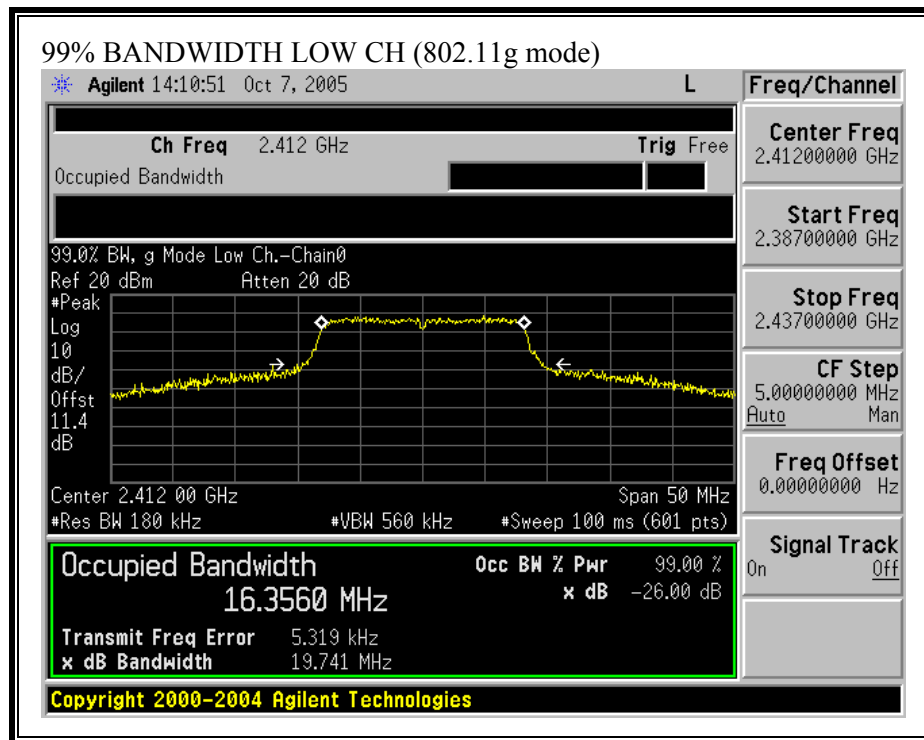


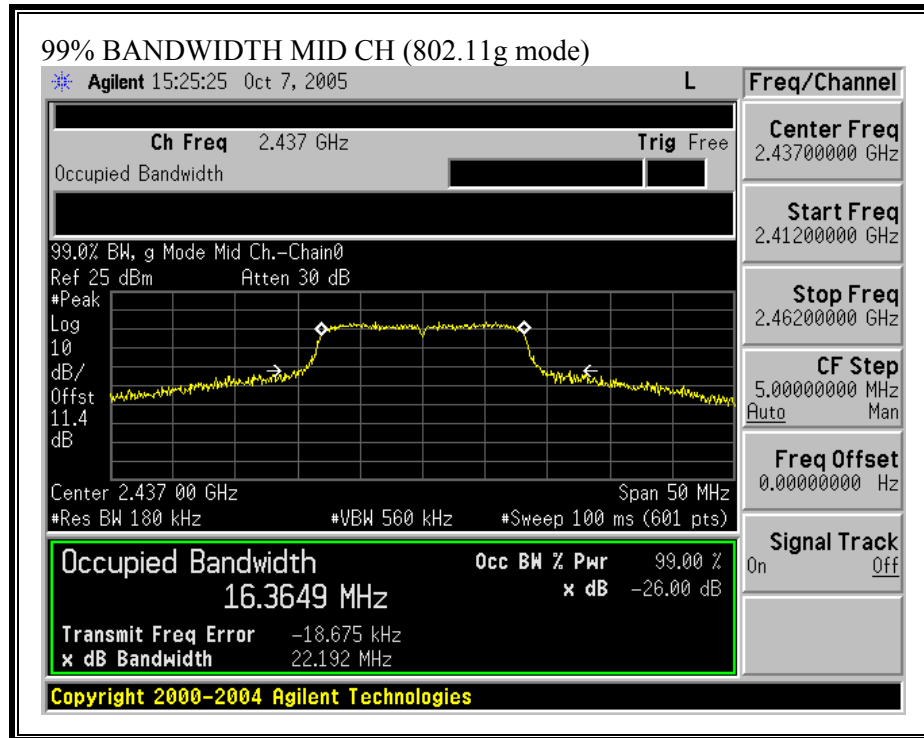

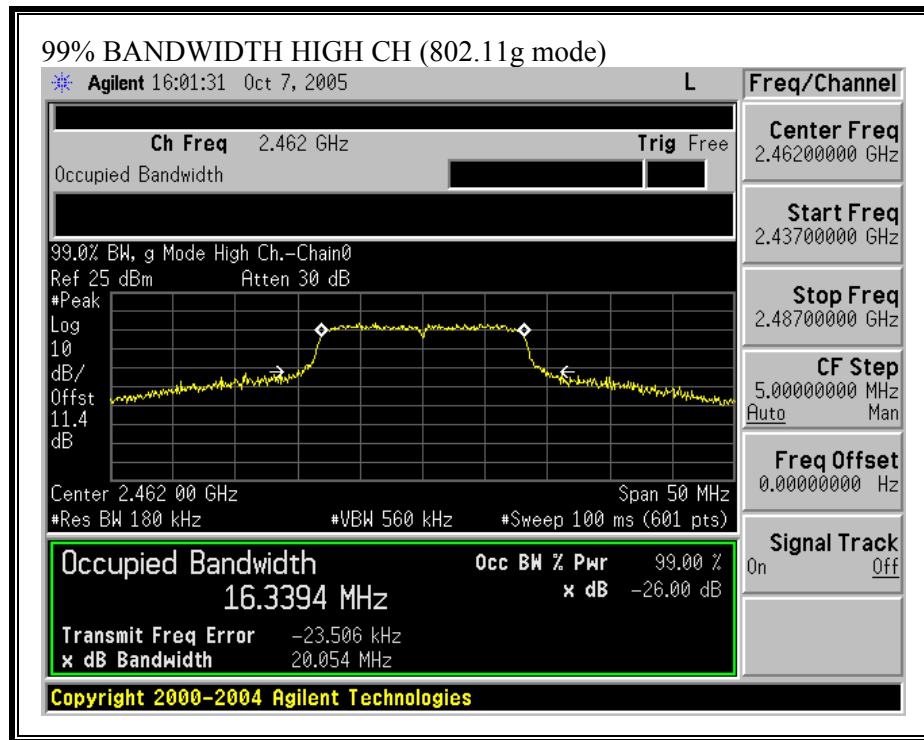



99% BANDWIDTH (802.11 MIMO CB MODE)

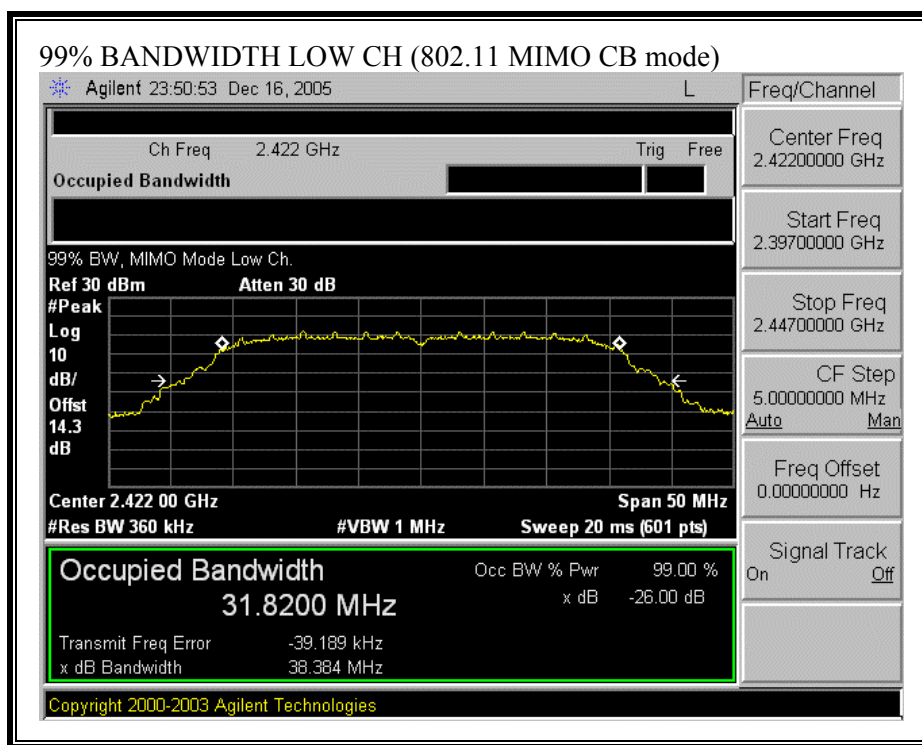

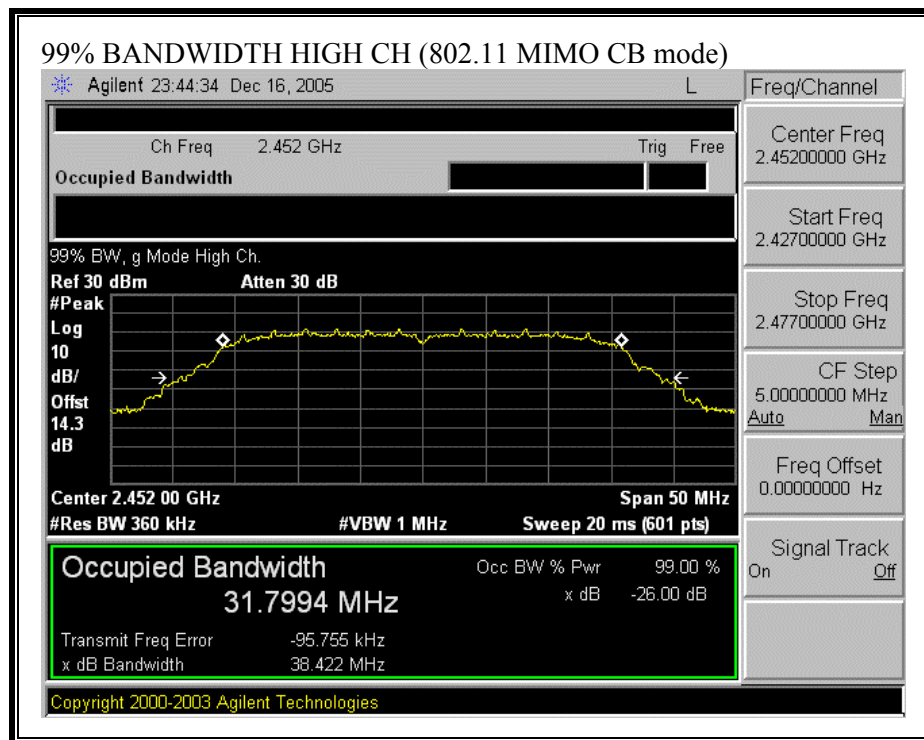


99% BANDWIDTH (802.11 SIMO CB MODE)

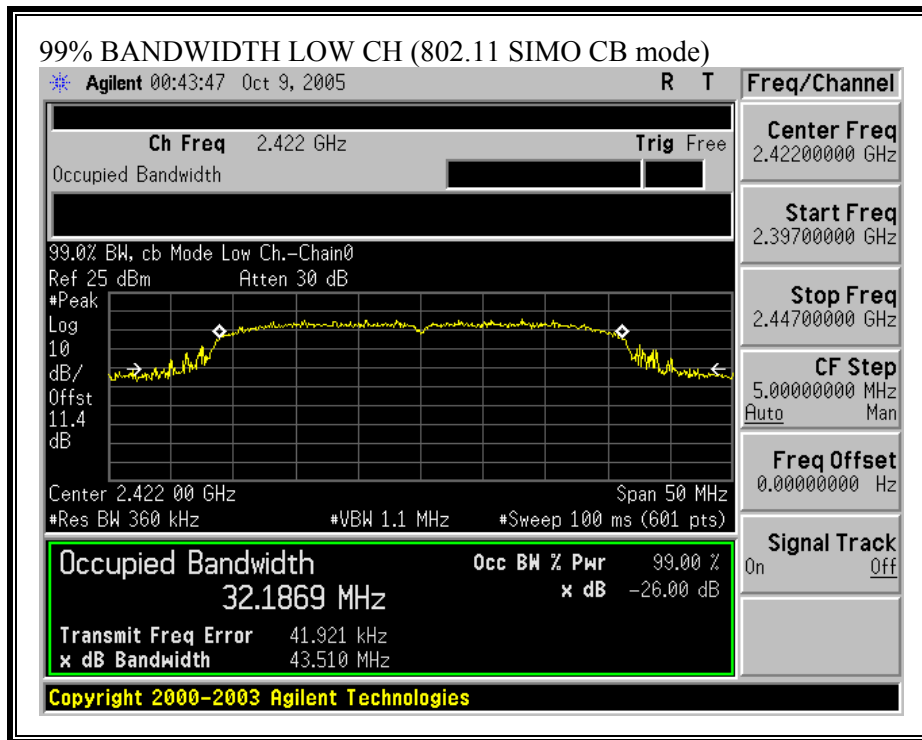


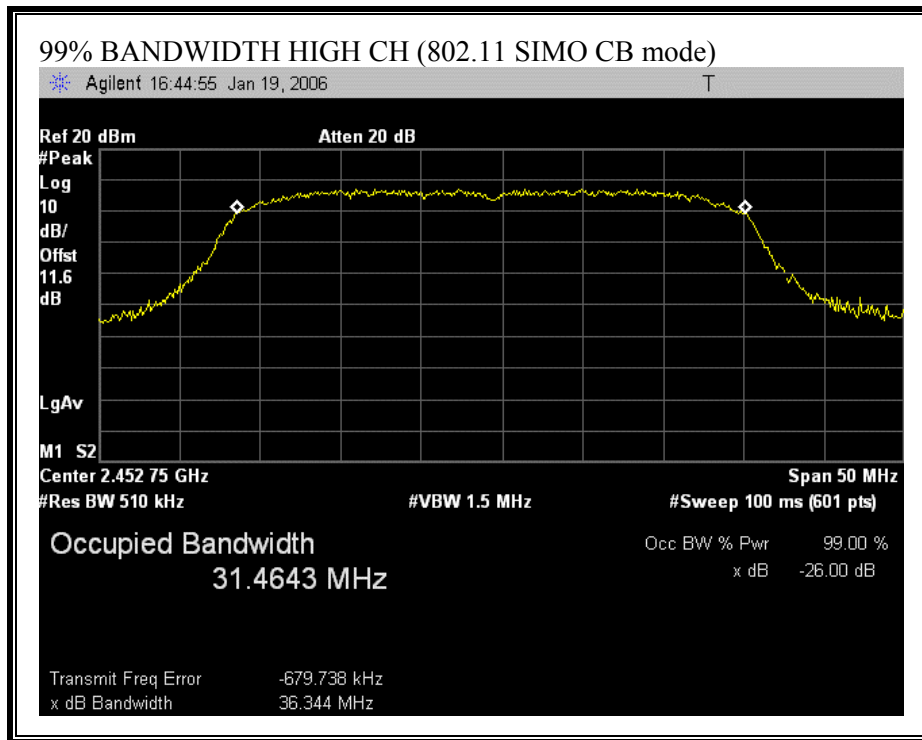


CHAIN 1:


99% BANDWIDTH (802.11b MODE)

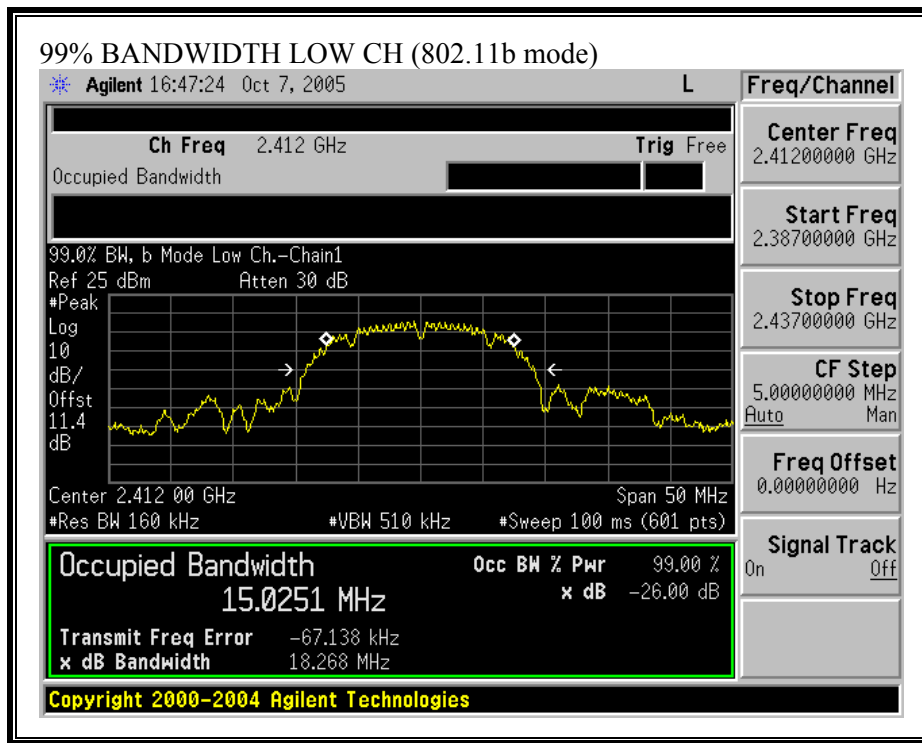


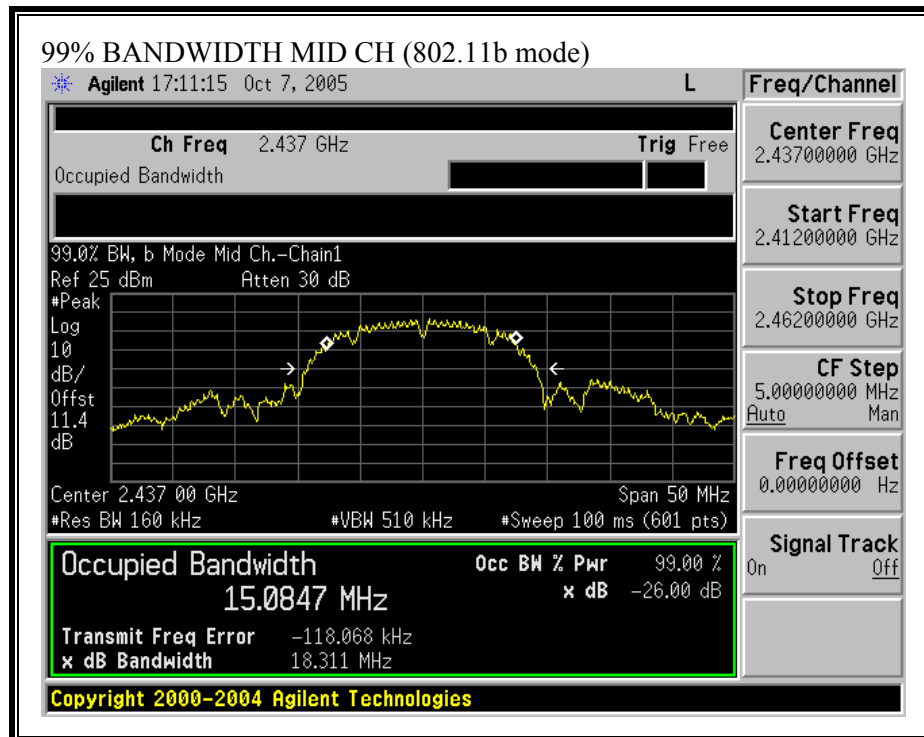


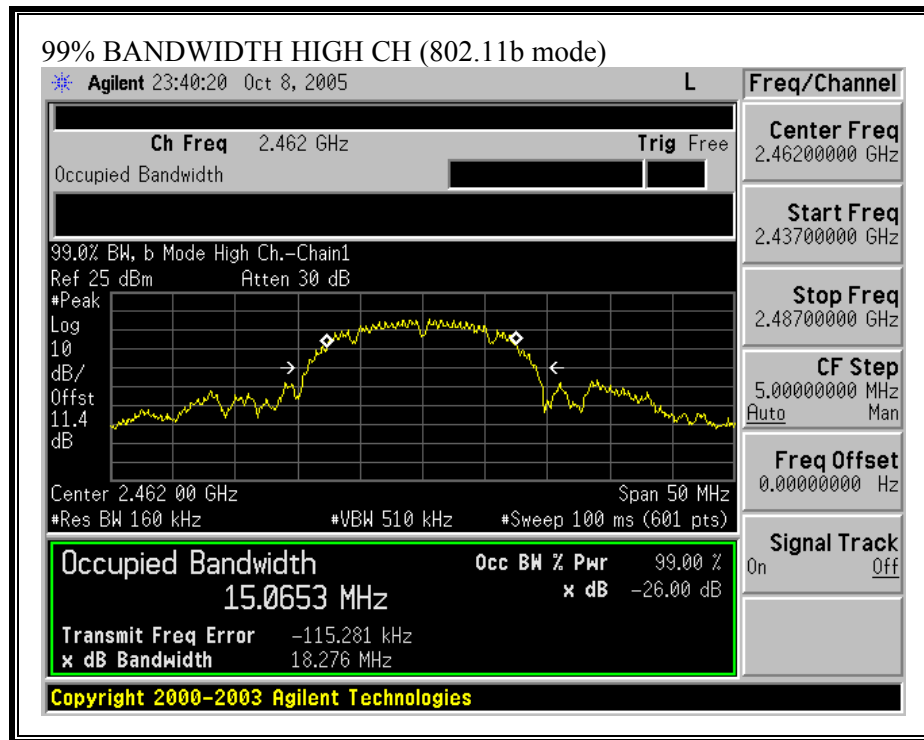


99% BANDWIDTH (802.11g MODE)

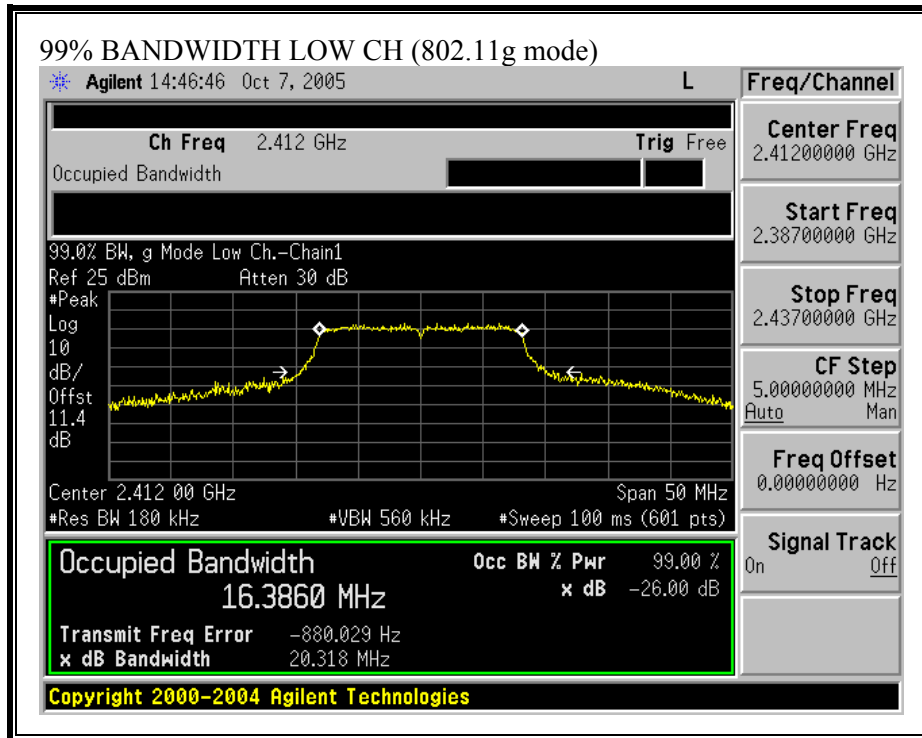


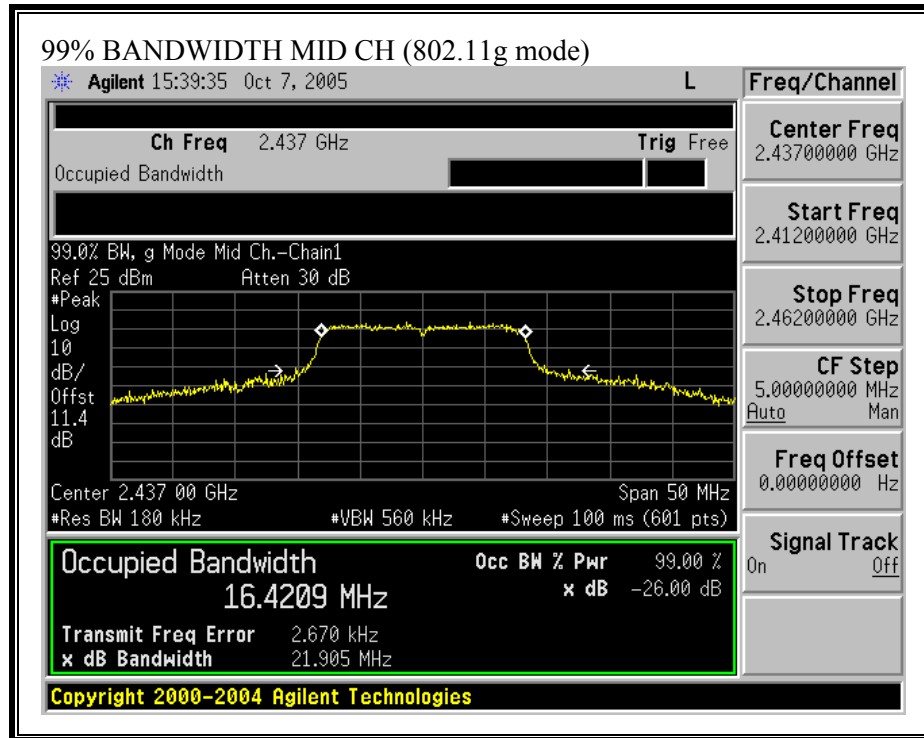

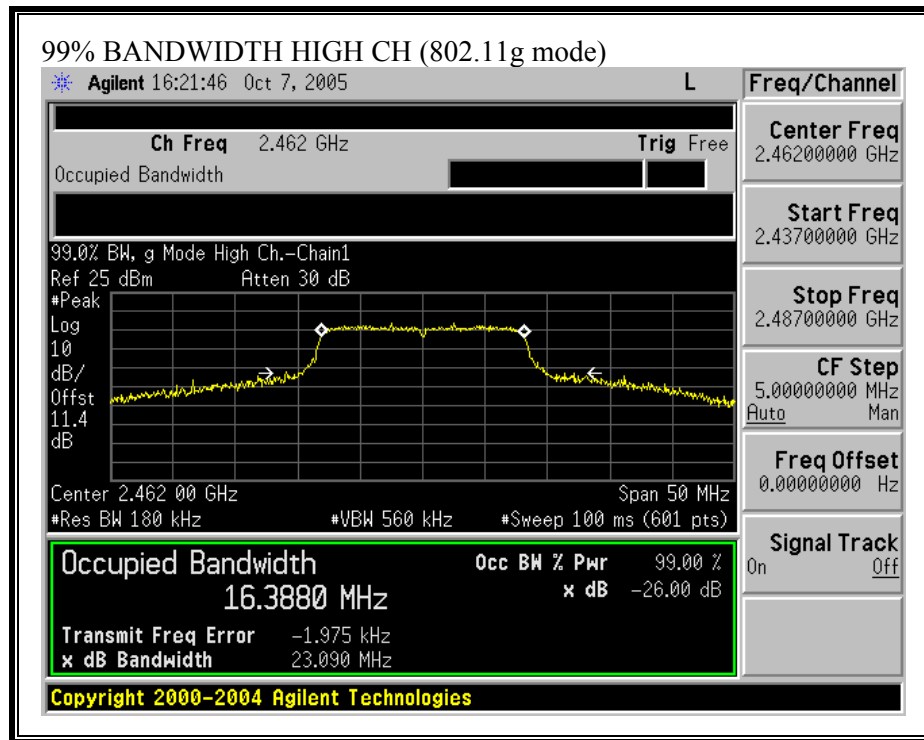



99% BANDWIDTH (802.11 MIMO CB MODE)

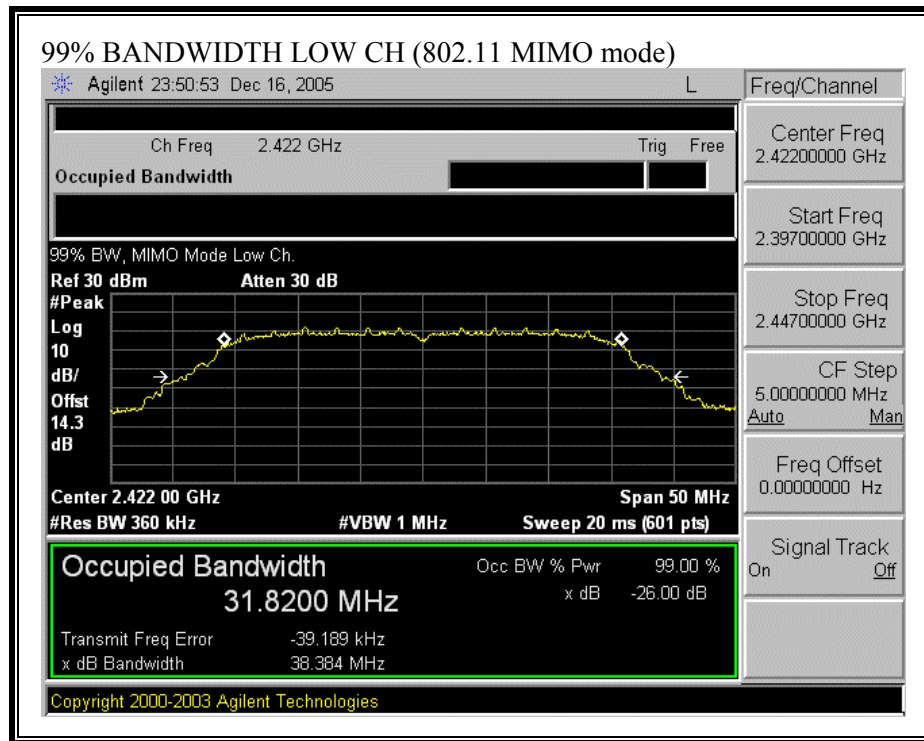

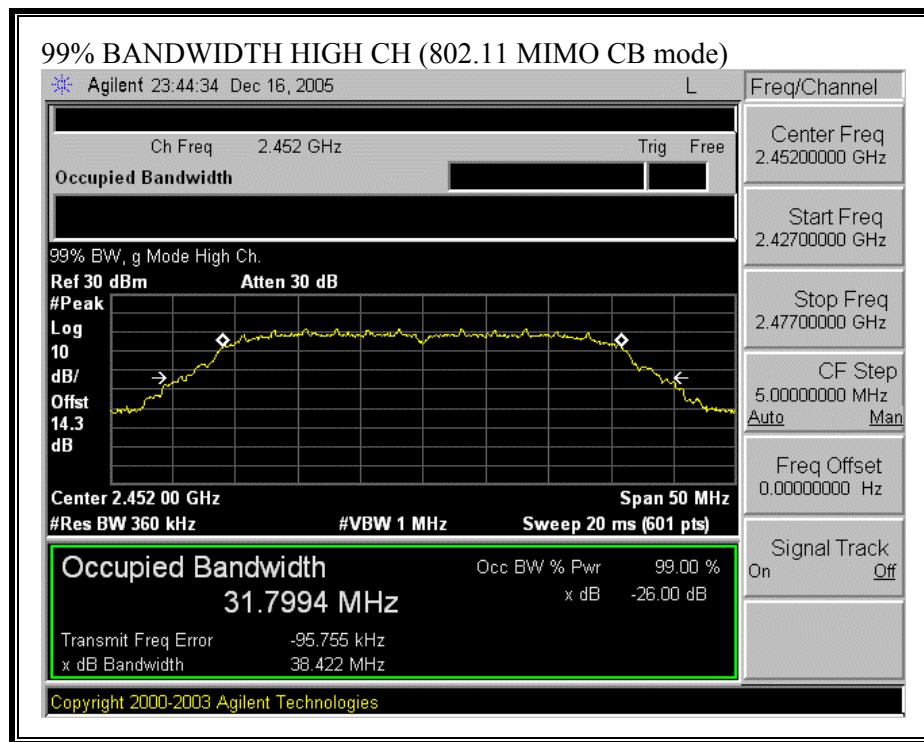

99% BANDWIDTH (802.11 SIMO CB MODE)

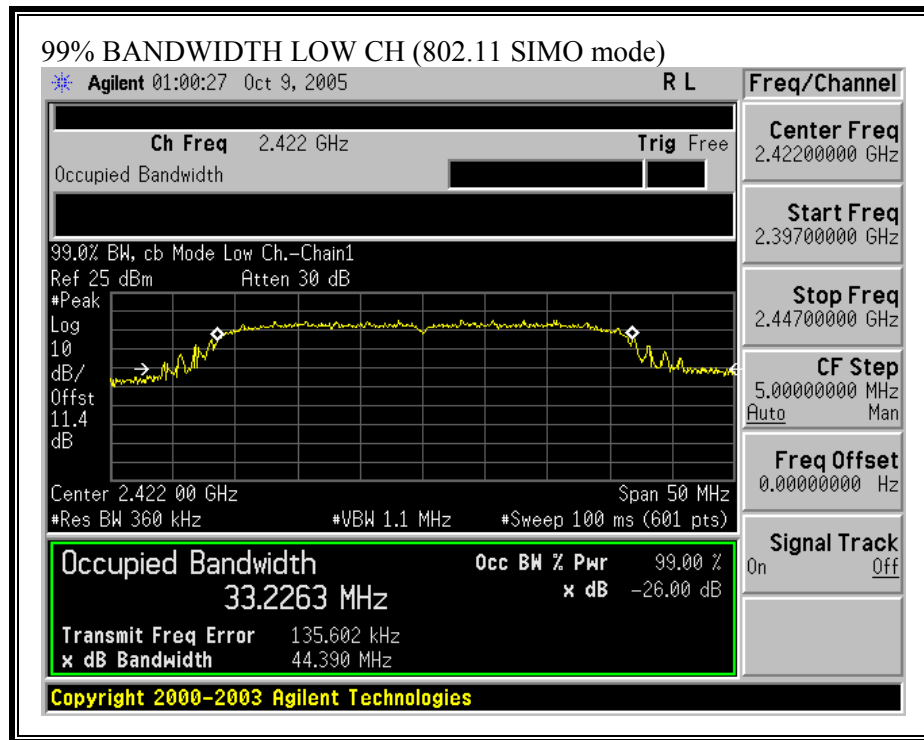

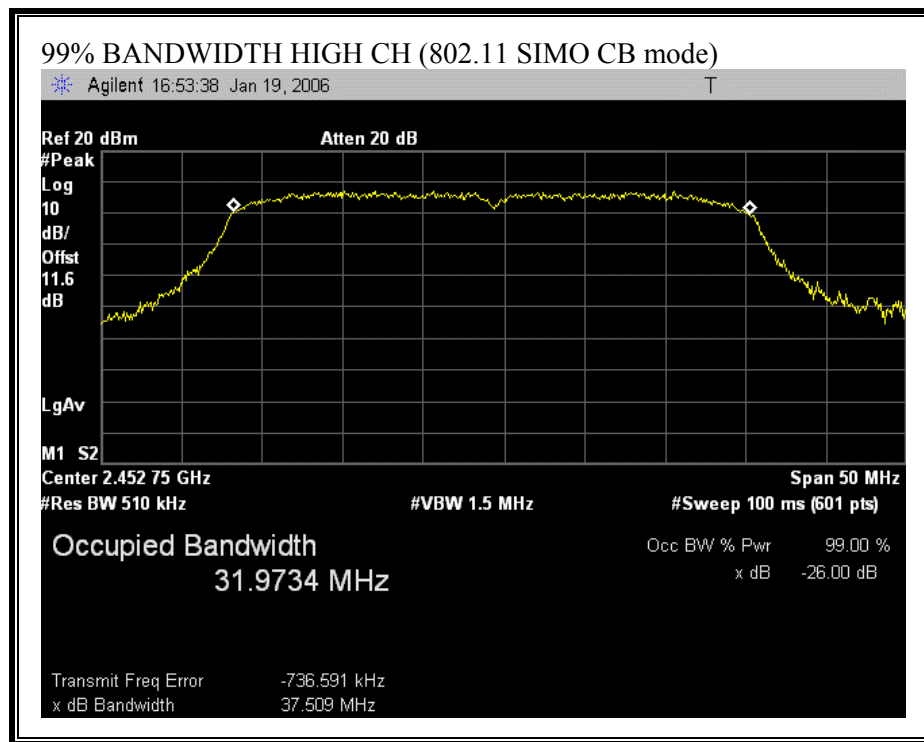

6.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

The test is performed in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005. The transmitter operates continuously therefore Power Output Option 2, Method # 1 is used.

RESULTS

The maximum antenna gain is 2 dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

Total peak power calculation formula: $10 \log (10^{(Pch0 / 10)} + 10^{(Pch1 / 10)})$

Note: Pch0 and Pch1 are in dBm

No non-compliance noted:

802.11b MODE

Frequency (MHz)	Peak Power Chain 0 (dBm)	Peak Power Chain 1 (dBm)	Peak Power Total (dBm)	Limit (dBm)	Margin (dB)
2412	19.47	19.30	22.40	30	-7.60
2437	19.39	19.18	22.30	30	-7.70
2462	19.34	19.11	22.24	30	-7.76

802.11g MODE

Frequency (MHz)	Peak Power Chain 0 (dBm)	Peak Power Chain 1 (dBm)	Peak Power Total (dBm)	Limit (dBm)	Margin (dB)
2412	23.70	24.91	27.36	30	-2.64
2437	24.25	25.38	27.86	30	-2.14
2462	23.49	24.56	27.07	30	-2.93

802.11g MIMO CHANNEL BOND MODE


Frequency (MHz)	Peak Power Chain 0 (dBm)	Peak Power Chain 1 (dBm)	Peak Power Total (dBm)	Limit (dBm)	Margin (dB)
2422	23.16	23.08	26.13	30	-3.87
2452	22.97	22.89	25.94	30	-4.06


802.11g SIMO CHANNEL BOND MODE


Frequency (MHz)	Peak Power Chain 0 (dBm)	Peak Power Chain 1 (dBm)	Peak Power Total (dBm)	Limit (dBm)	Margin (dB)
2422	22.30	22.93	25.64	30	-4.36
2452	22.09	22.81	25.48	30	-4.52

CAHIN 0:


OUTPUT POWER (802.11b MODE)

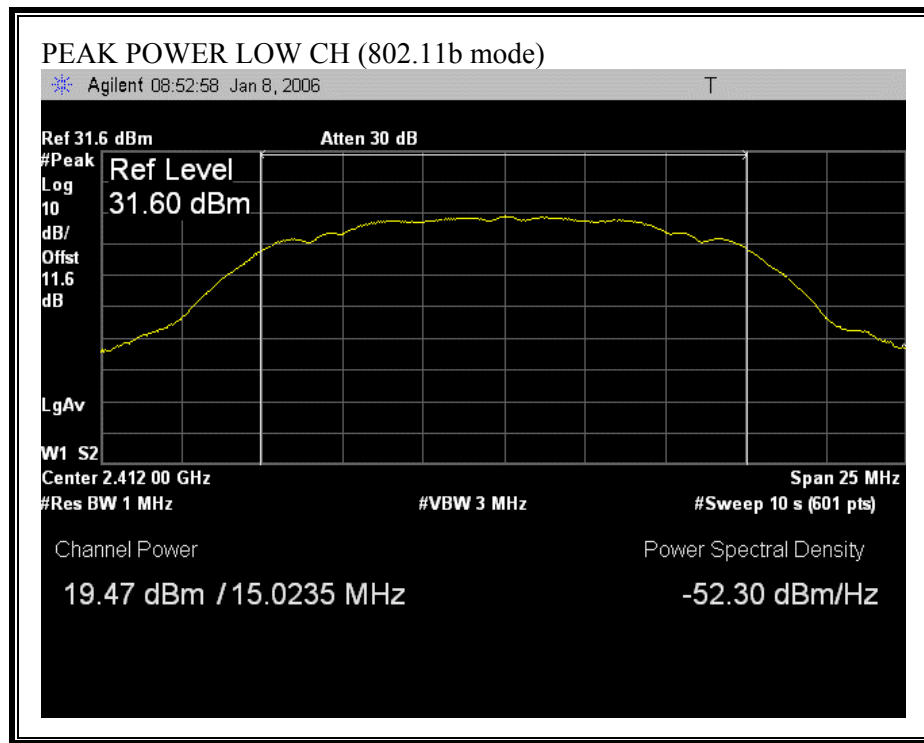


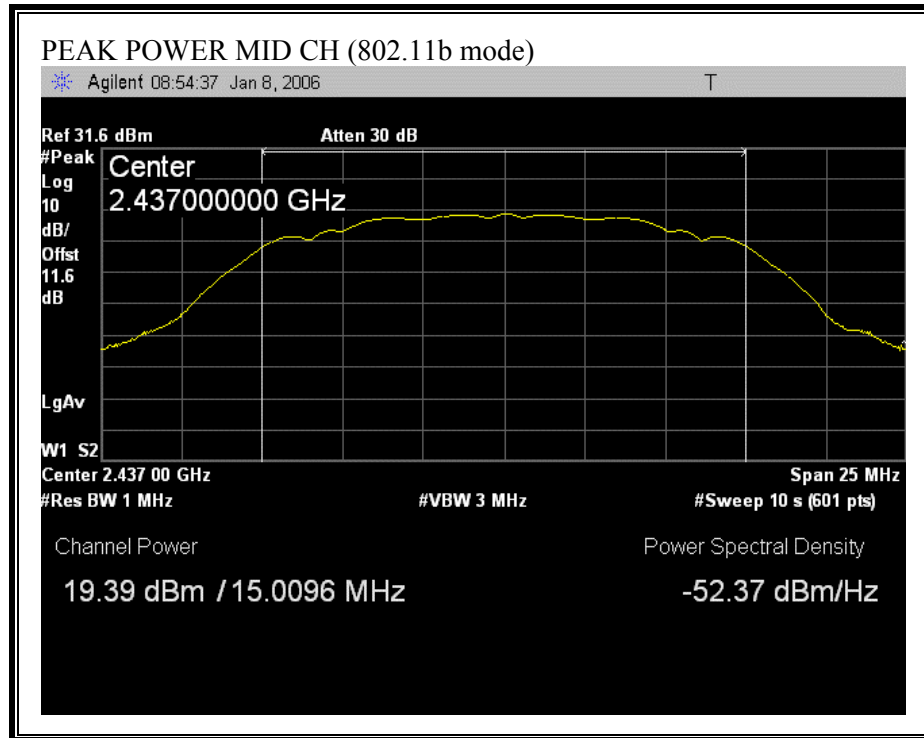


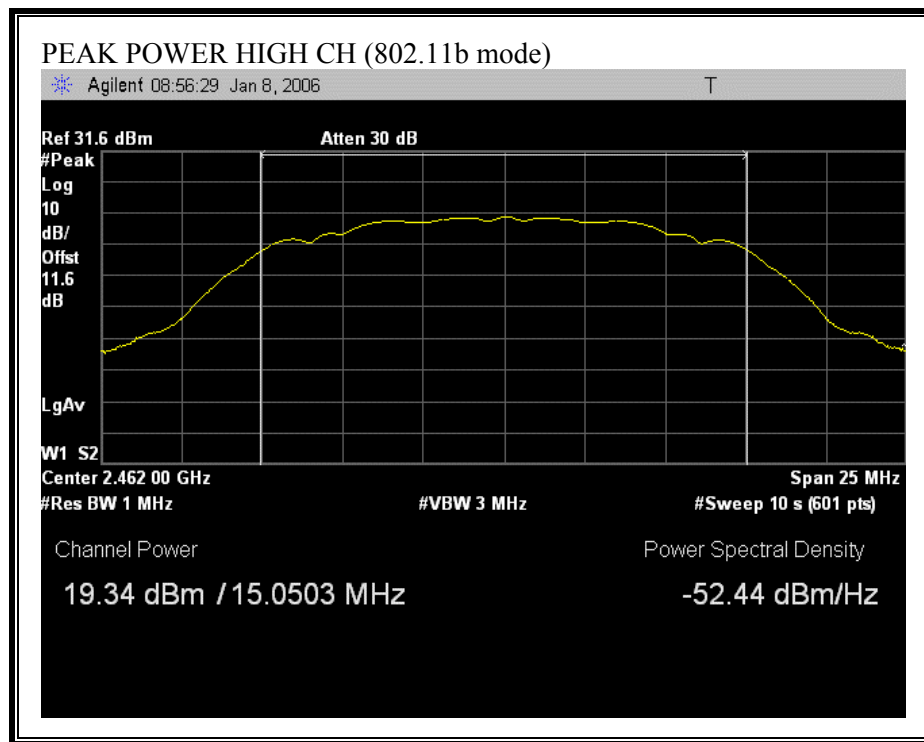


OUTPUT POWER (802.11g MODE)

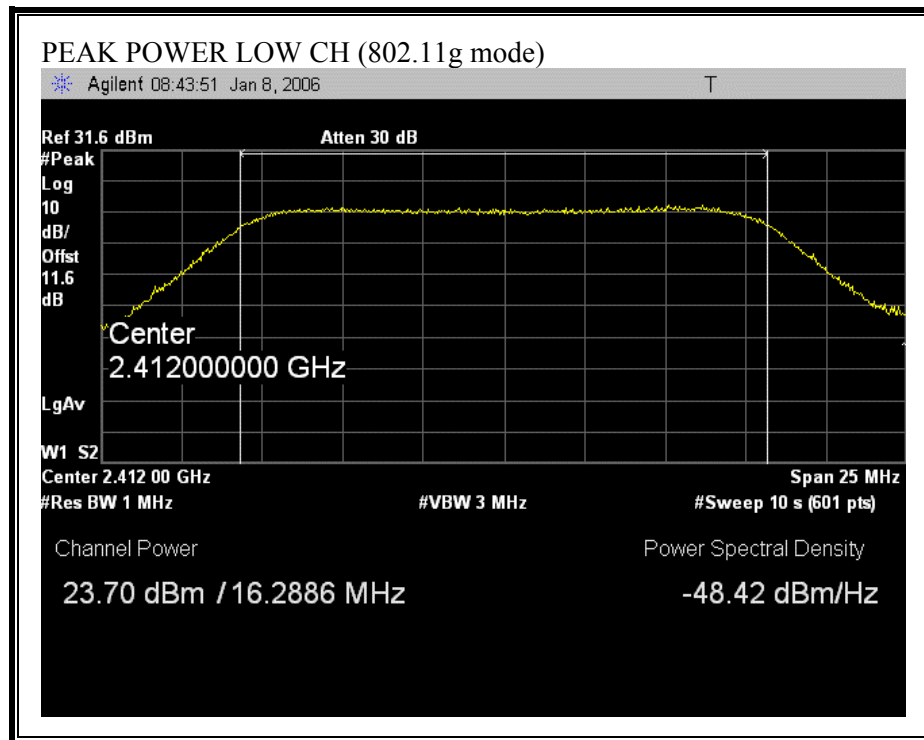


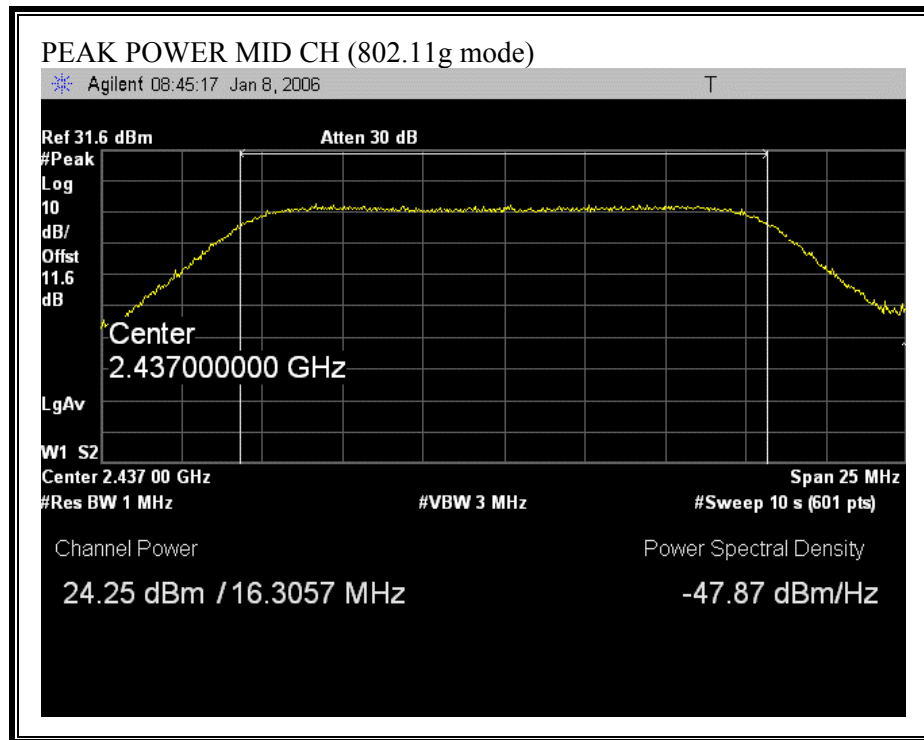

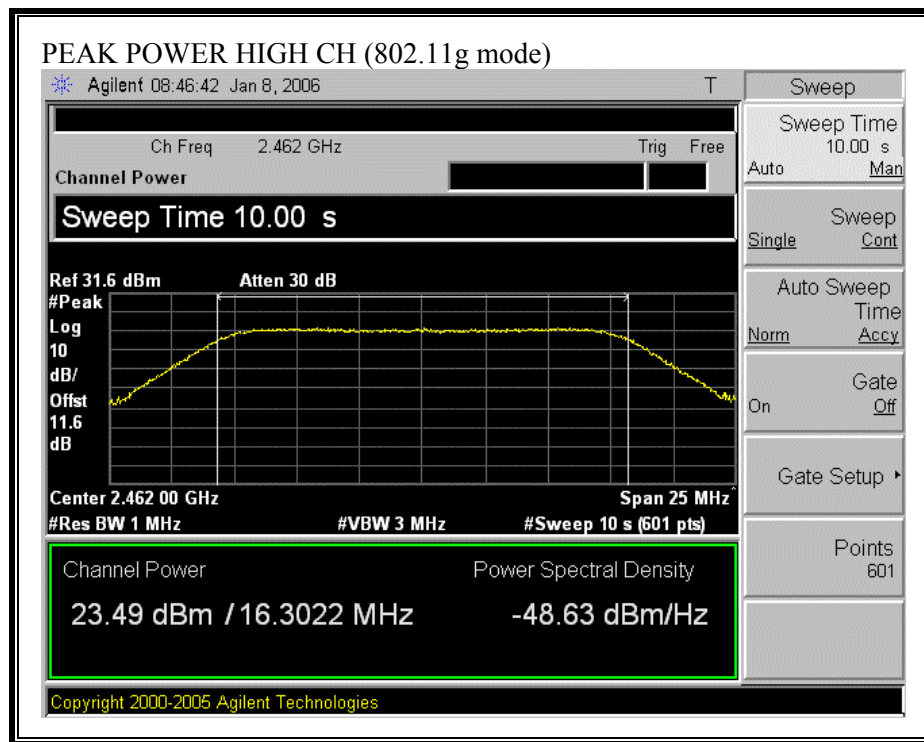



OUTPUT POWER (802.11 MIMO CB MODE)

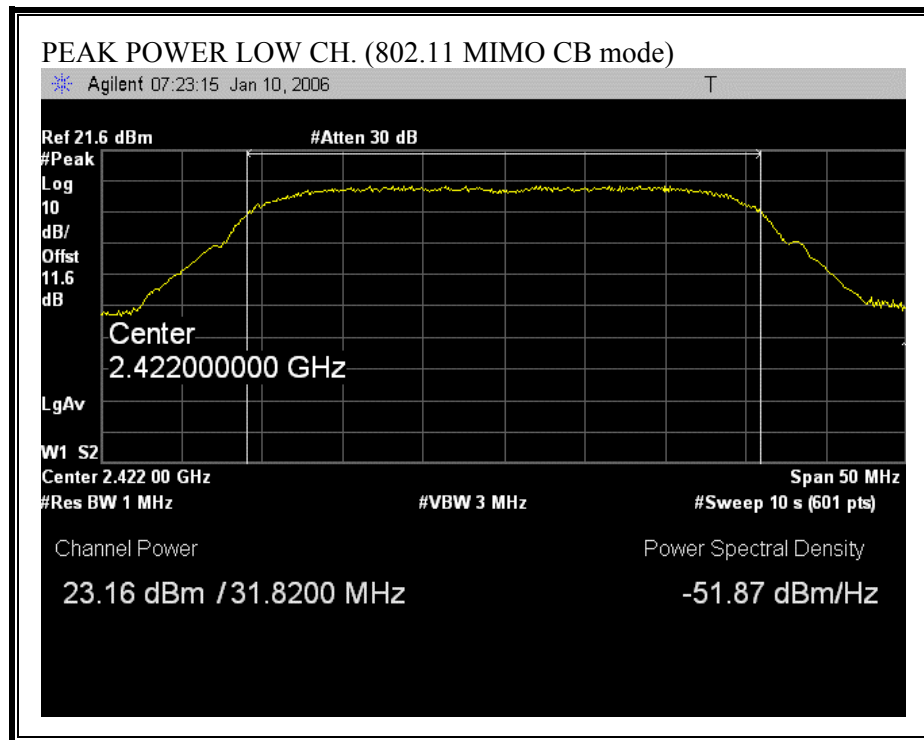

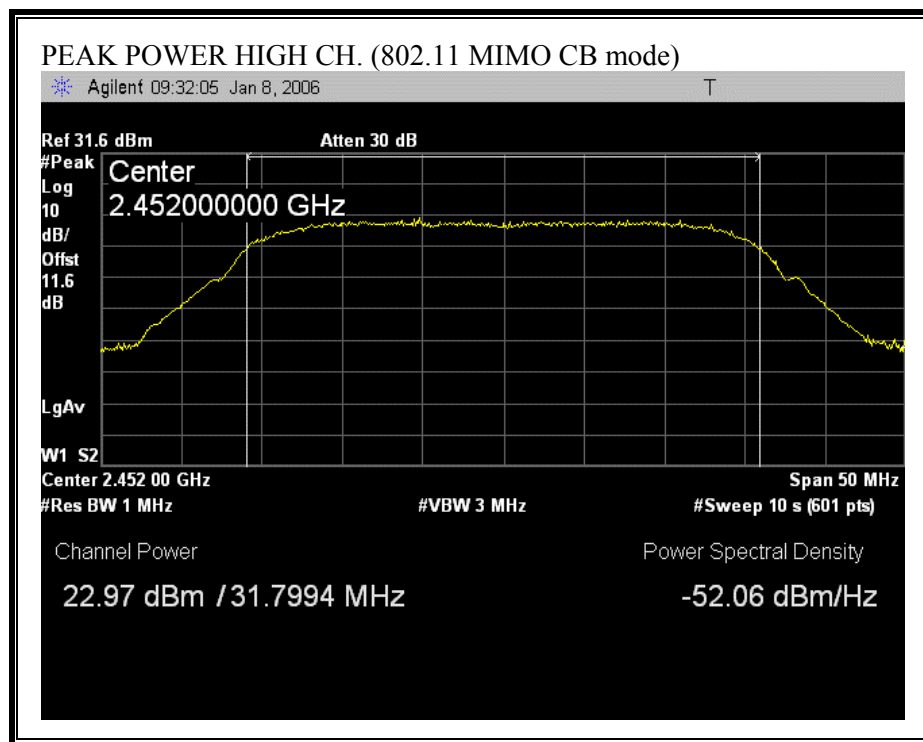


OUTPUT POWER (802.11 SIMO CB MODE)

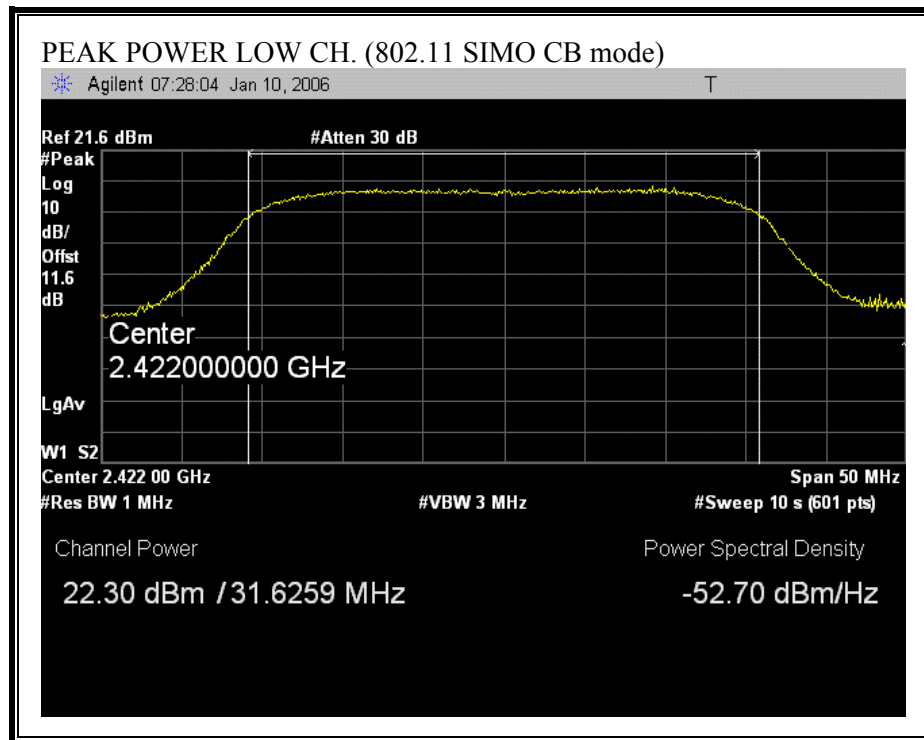


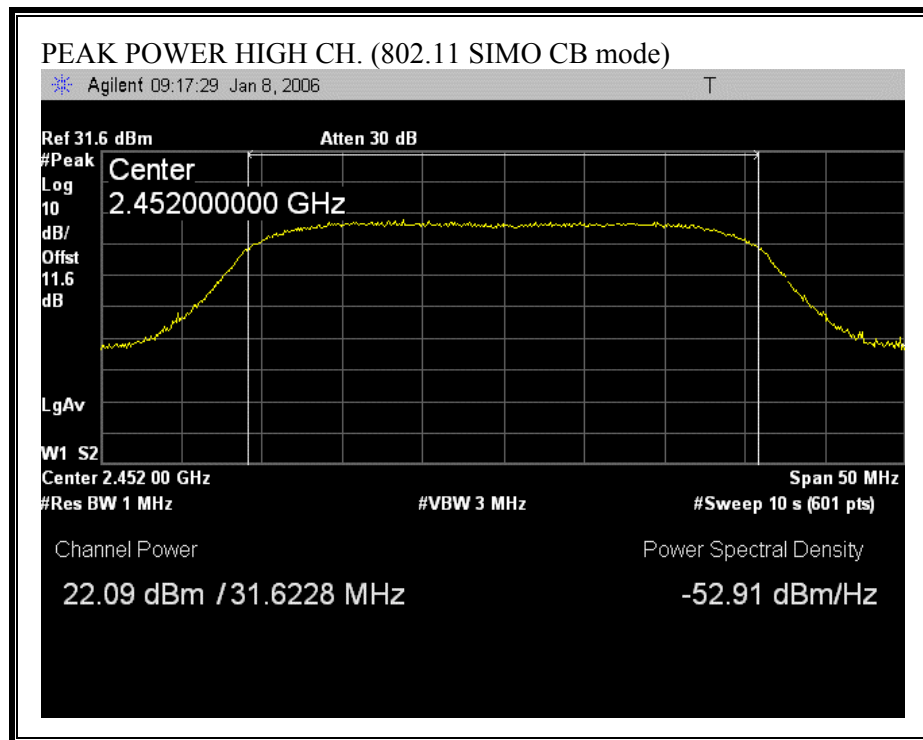


CAHIN 1:


OUTPUT POWER (802.11b MODE)

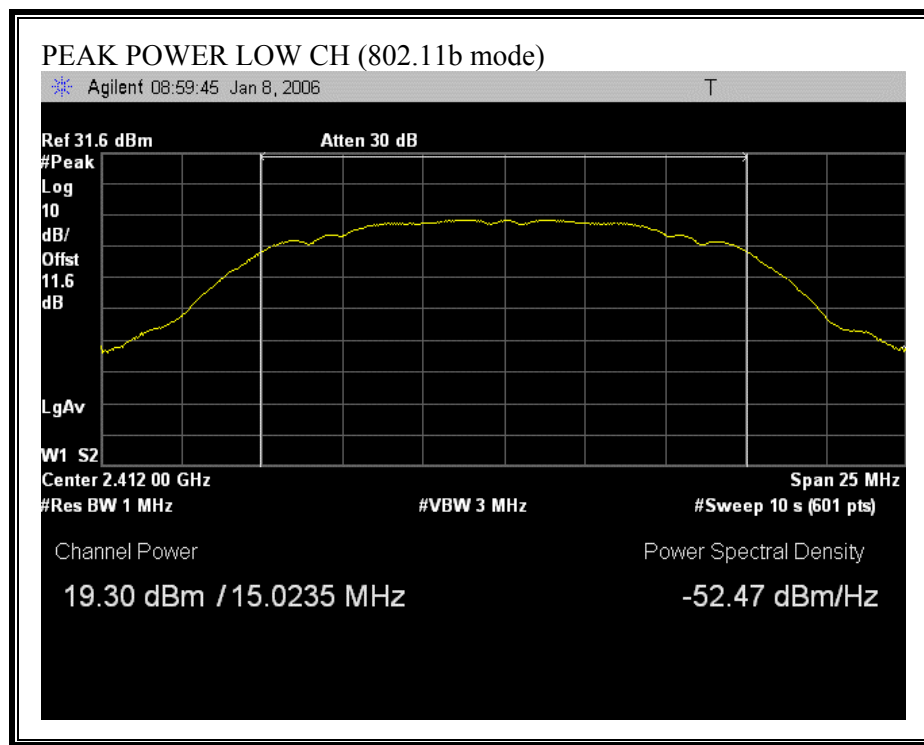


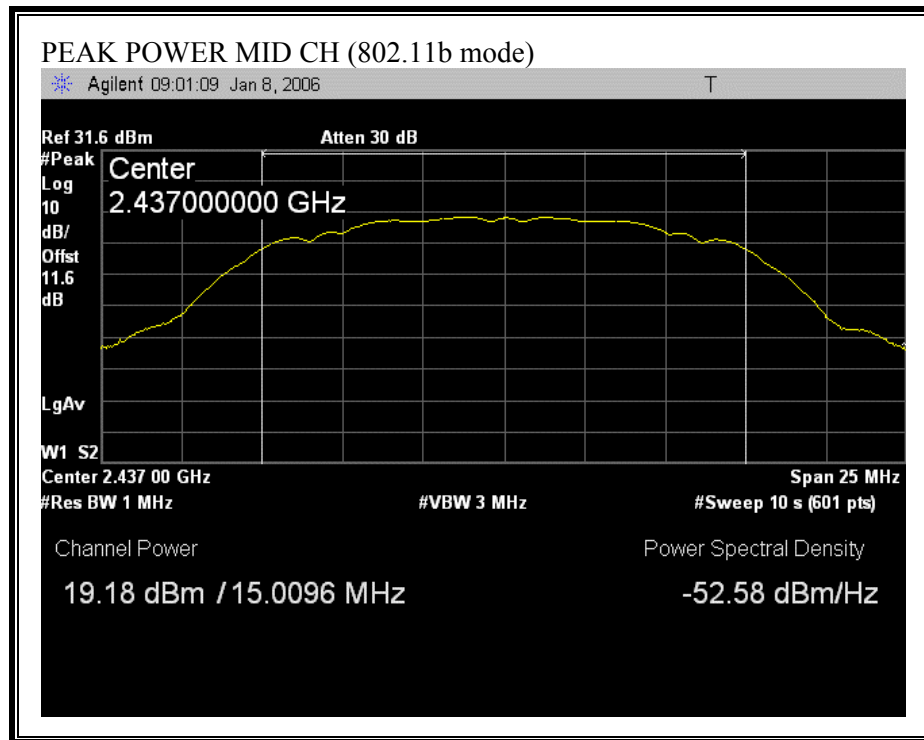


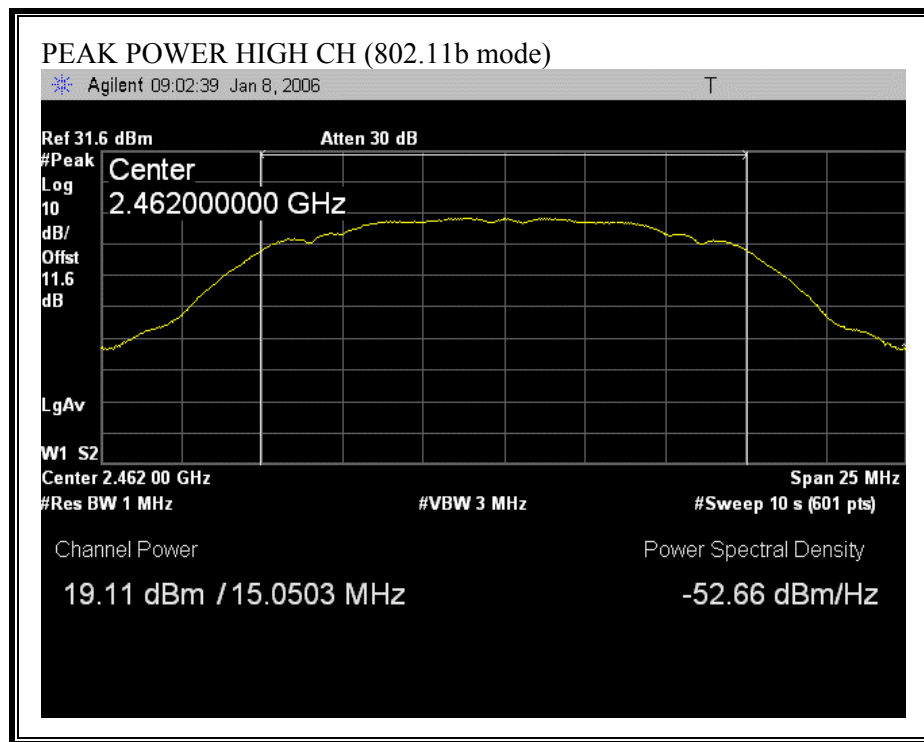


OUTPUT POWER (802.11g MODE)

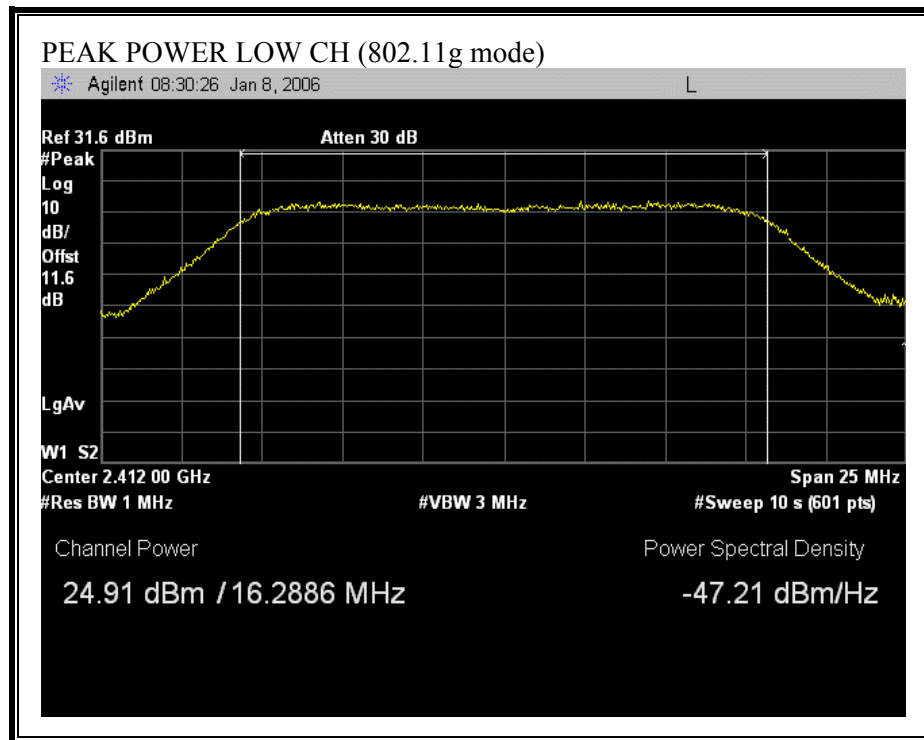


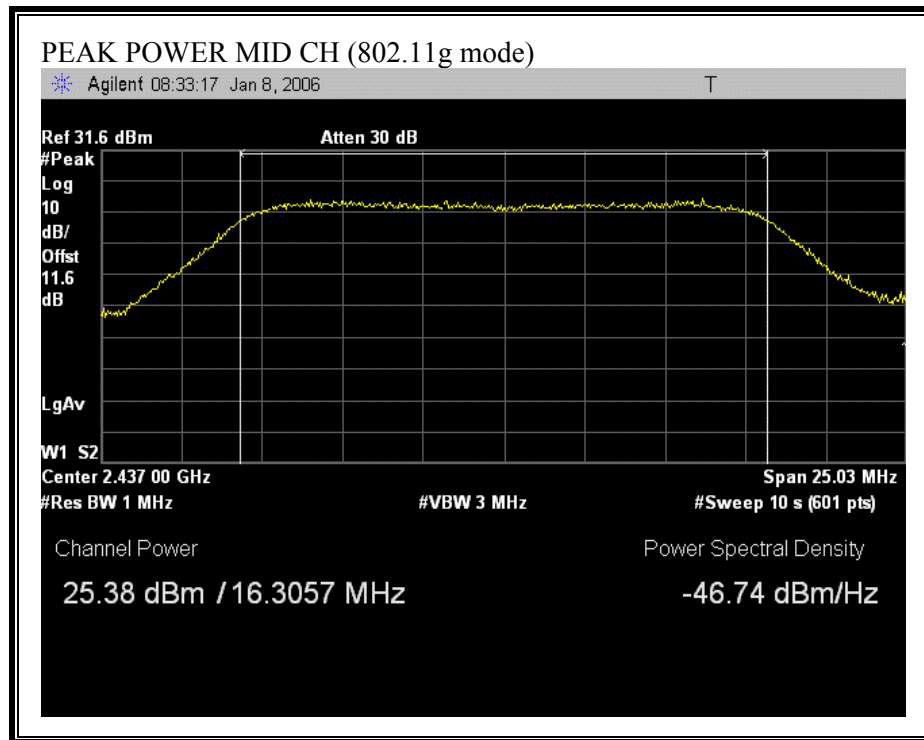

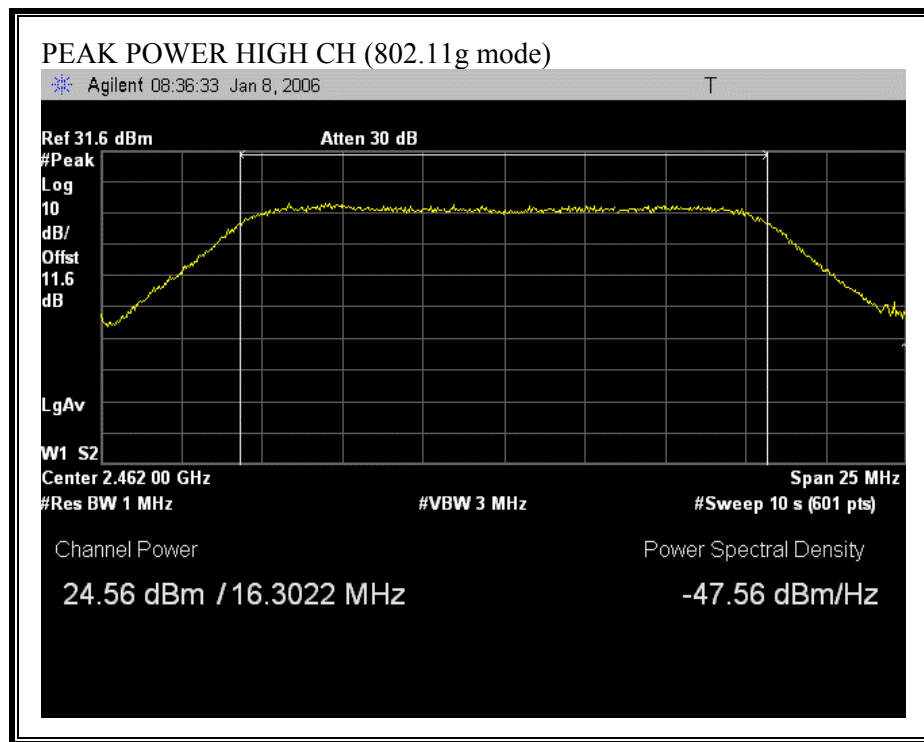



OUTPUT POWER (802.11 MIMO CB MODE)

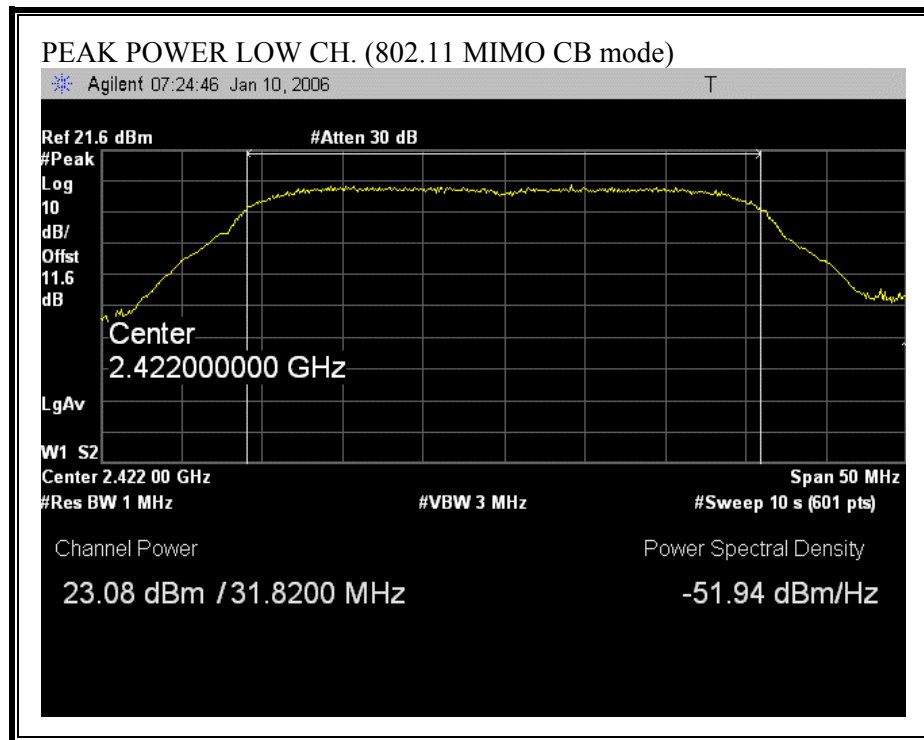

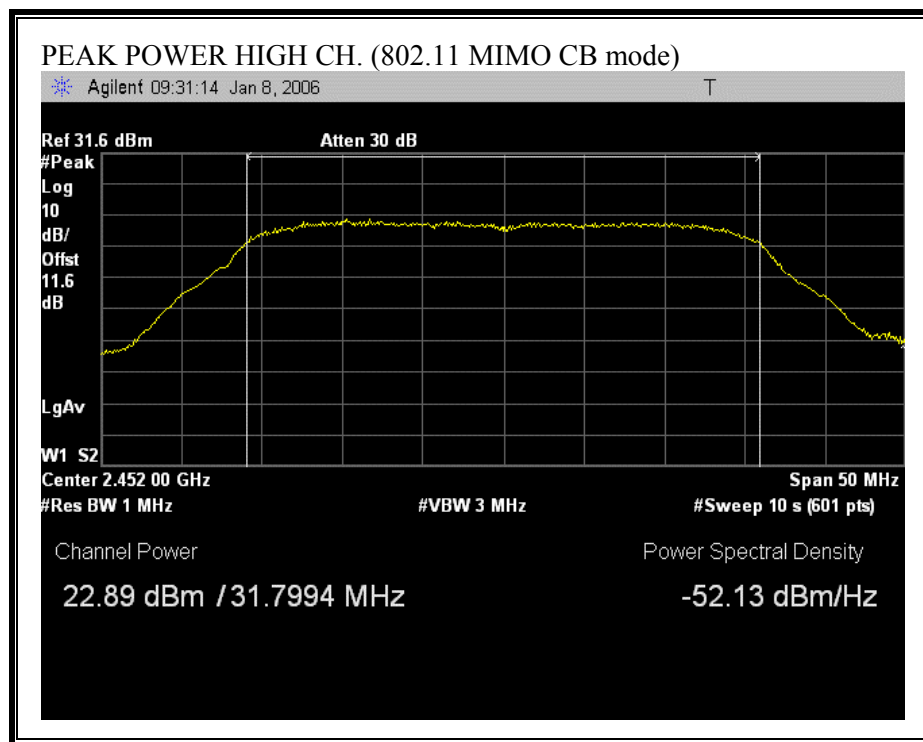

OUTPUT POWER (802.11 SIMO CB MODE)

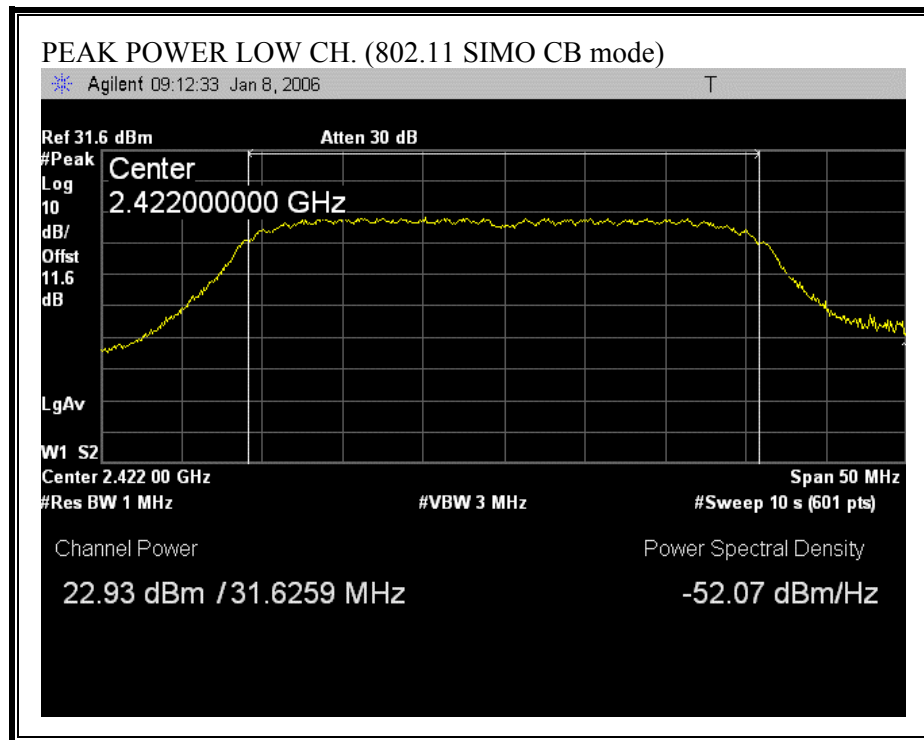

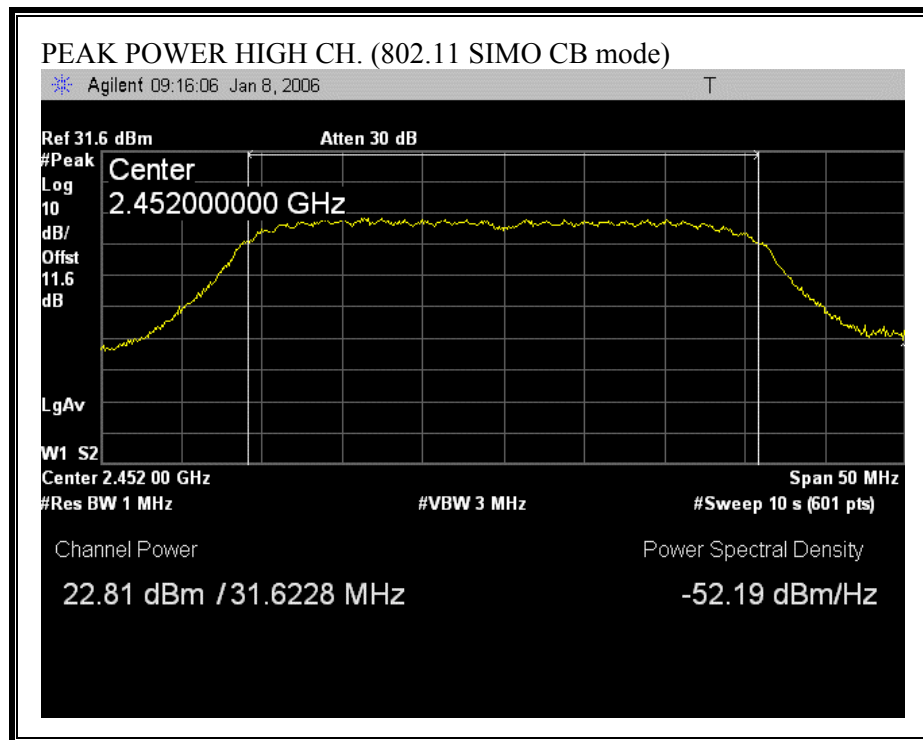

6.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10^{(P \text{ (dBm)} / 10)} \text{ and}$$

$$G \text{ (numeric)} = 10^{(G \text{ (dBi)} / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

RESULTS

No non-compliance noted: (MPE distance equals 20 cm)

Mode	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm^2)
802.11b	20.0	22.40	2.00	0.05
802.11g	20.0	27.86	2.00	0.19
802.11 MIMO CB	20.0	26.13	2.00	0.13
802.11 SIMO CB	20.0	25.64	2.00	0.12

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

6.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None: for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10 dB (including 10 dB pad and 1.6 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode			
Channel	Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	2412	15.90	16.00
Middle	2437	15.90	16.00
High	2462	15.80	15.90

802.11g Mode			
Channel	Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	2412	15.20	15.20
Middle	2437	15.60	15.80
High	2462	14.90	15.10

802.11 SIMO CB Mode			
Channel	Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	2422	14.10	14.20
High	2452	14.00	14.10

802.11 MIMO CB Mode			
Channel	Frequency (MHz)	Average Power Chain 0 (dBm)	Average Power Chain 1 (dBm)
Low	2422	13.7	13.80
High	2452	13.6	13.80

6.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

Total peak power spectral density calculation formula: $10 \log (10^{(Pch0 / 10)} + 10^{(Pch1 / 10)})$

Note: Pch0 and Pch1 are in dBm

RESULTS

No non-compliance noted:

802.11b Mode

Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Margin (dB)
2412	-5.58	-5.84	-2.70	8	-10.70
2437	-5.86	-5.34	-2.58	8	-10.58
2462	-6.00	-6.21	-3.09	8	-11.09

802.11g Mode

Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Margin (dB)
2412	-5.58	-5.84	-2.70	8	-10.70
2437	-5.86	-5.34	-2.58	8	-10.58
2462	-6.00	-6.21	-3.09	8	-11.09

802.11g MIMO CHANNEL BOND Mode


Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Margin (dB)
2422	-9.73	-12.04	-7.72	8	-15.72
2452	-9.30	-12.34	-7.55	8	-15.55


802.11g SIMO CHANNEL BOND Mode


Frequency (MHz)	PPSD Chain 0 (dBm)	PPSD Chain 1 (dBm)	PPSD Total (dBm)	Limit (dBm)	Margin (dB)
2422	-8.06	-12.18	-6.64	8	-14.64
2452	-8.85	-12.89	-7.41	8	-15.41

CHAIN 0:


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

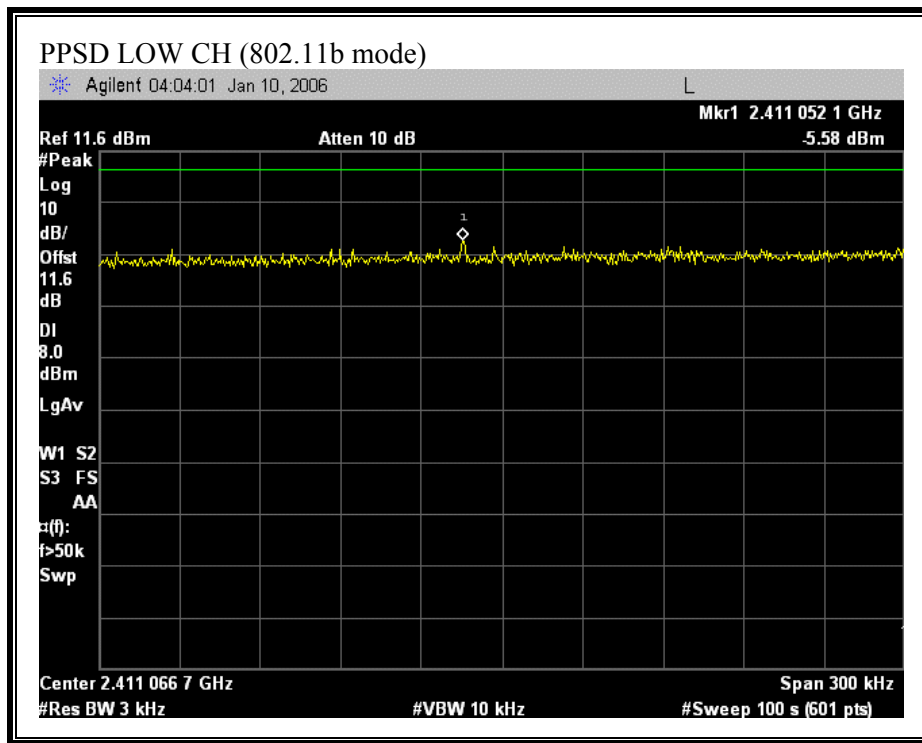


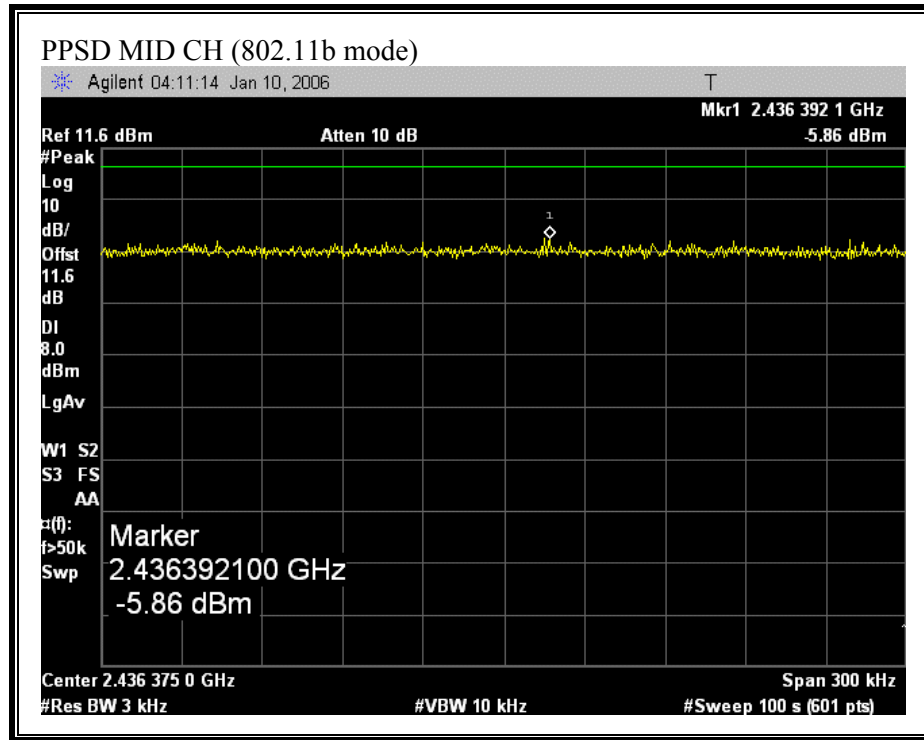


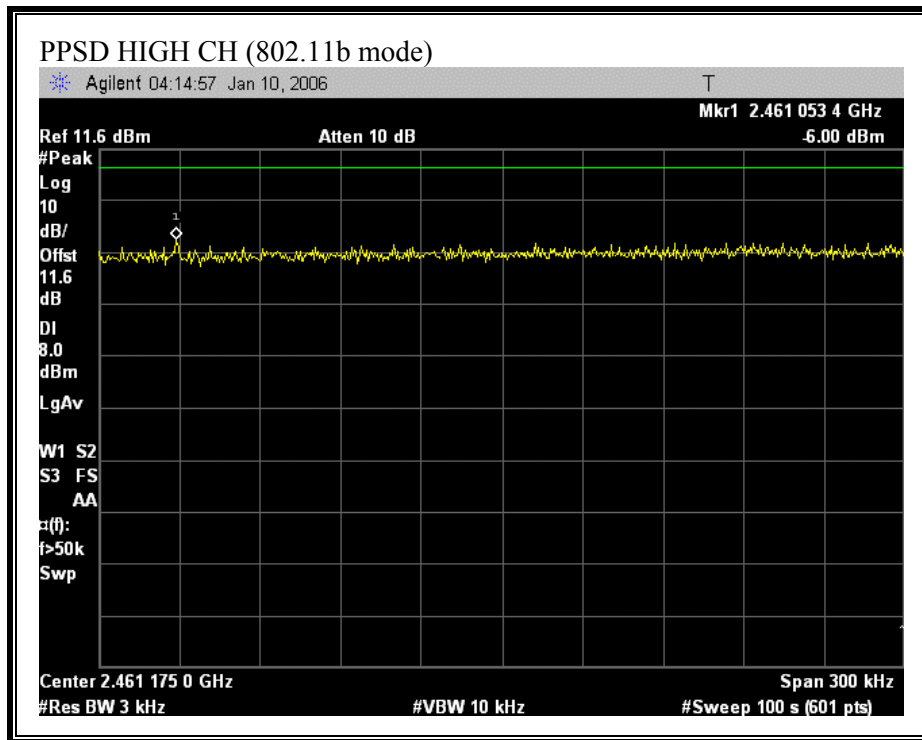


PEAK POWER SPECTRAL DENSITY (802.11g MODE)

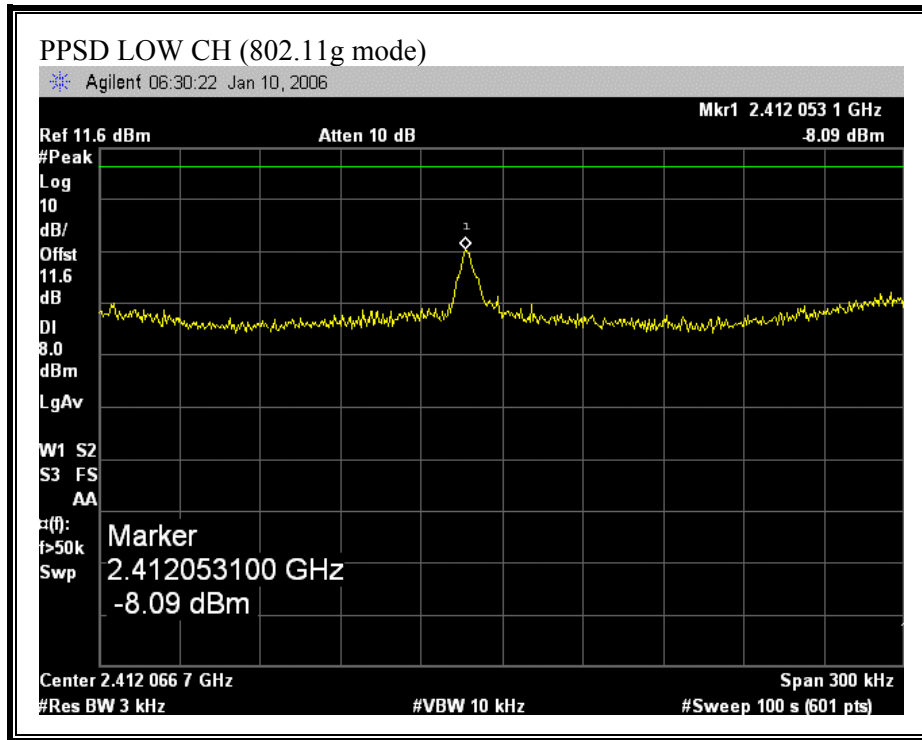


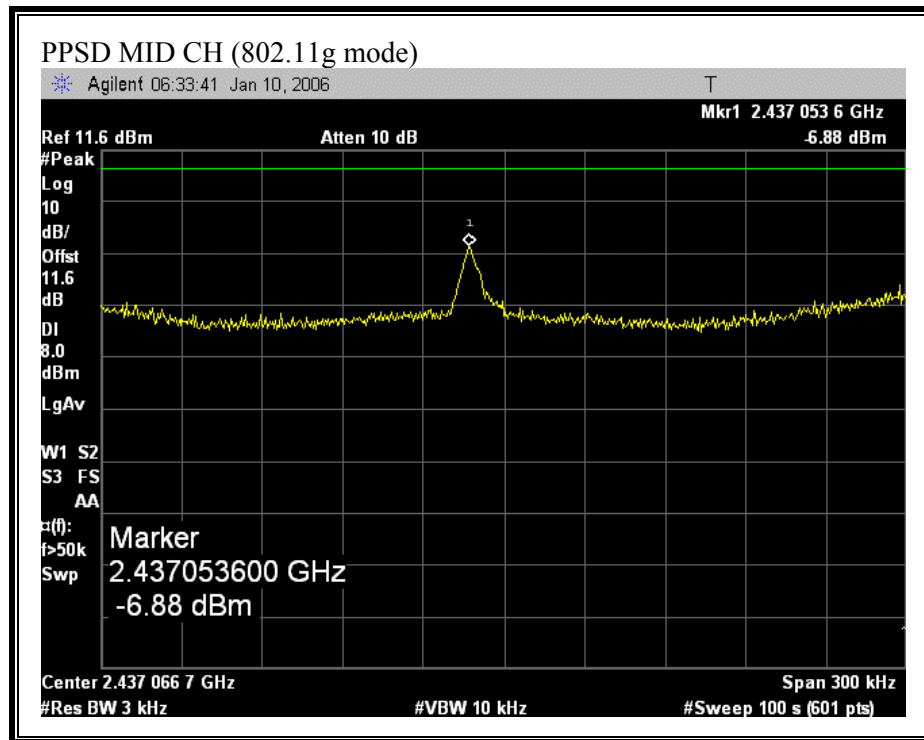

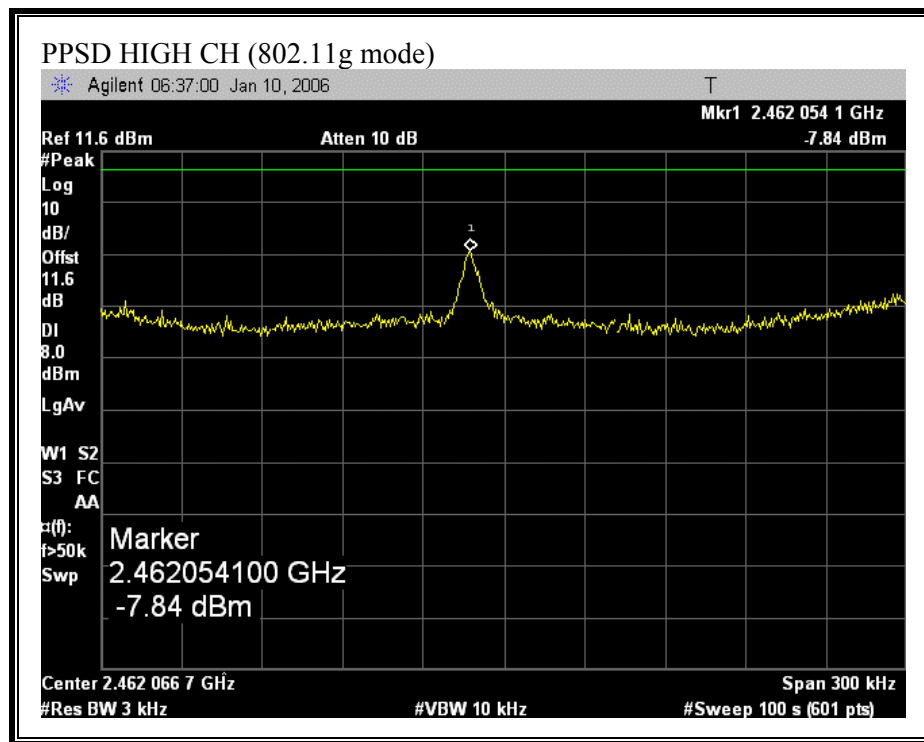



PEAK POWER SPECTRAL DENSITY (802.11 MIMO CB Mode)

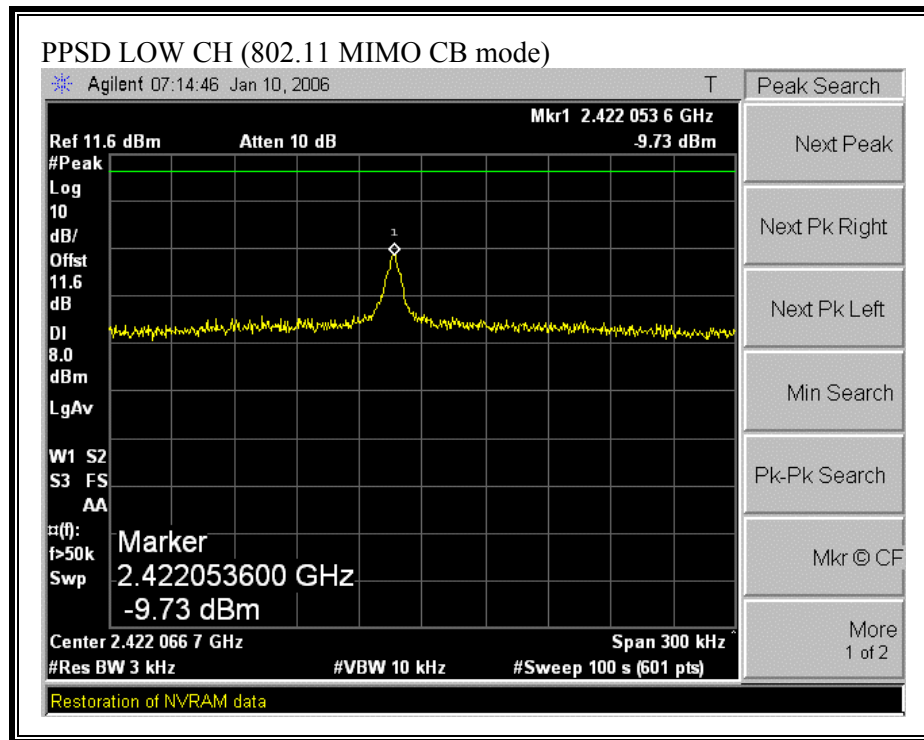

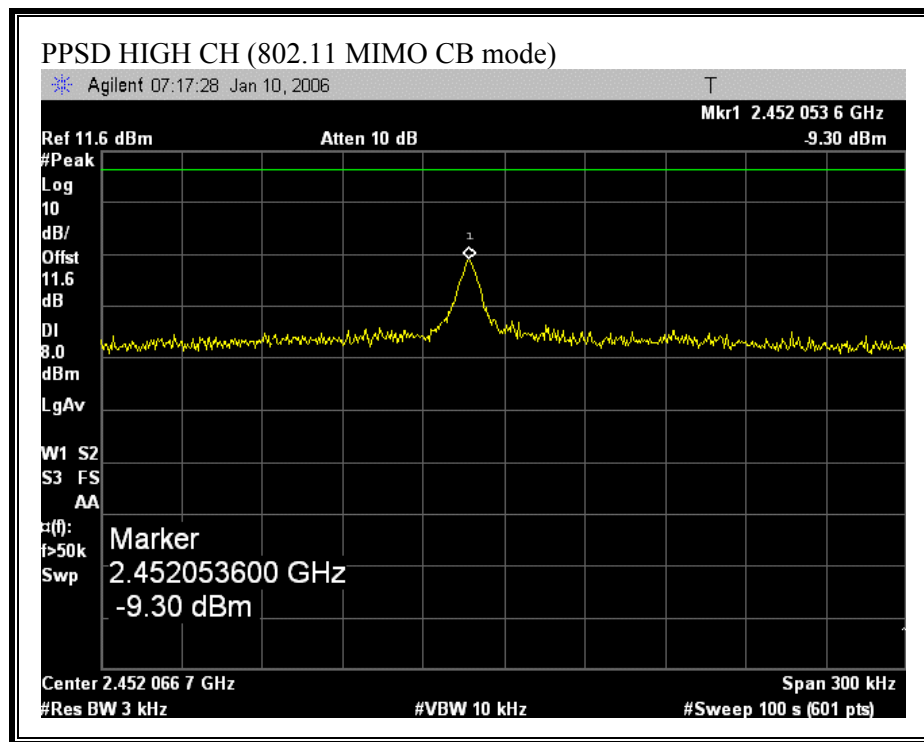


PEAK POWER SPECTRAL DENSITY (802.11 SIMO CB Mode)

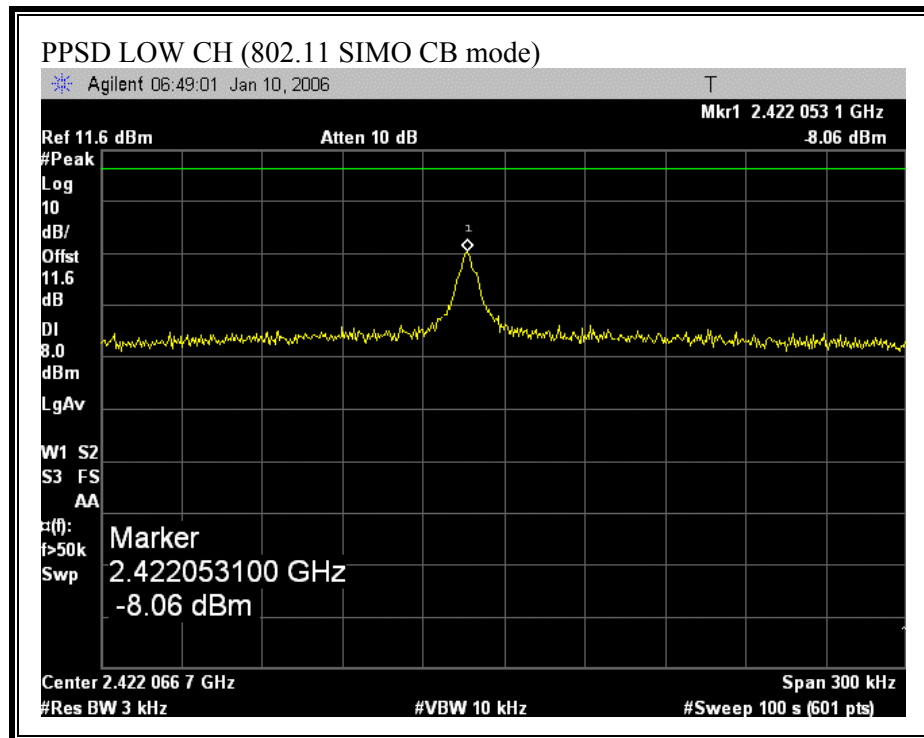


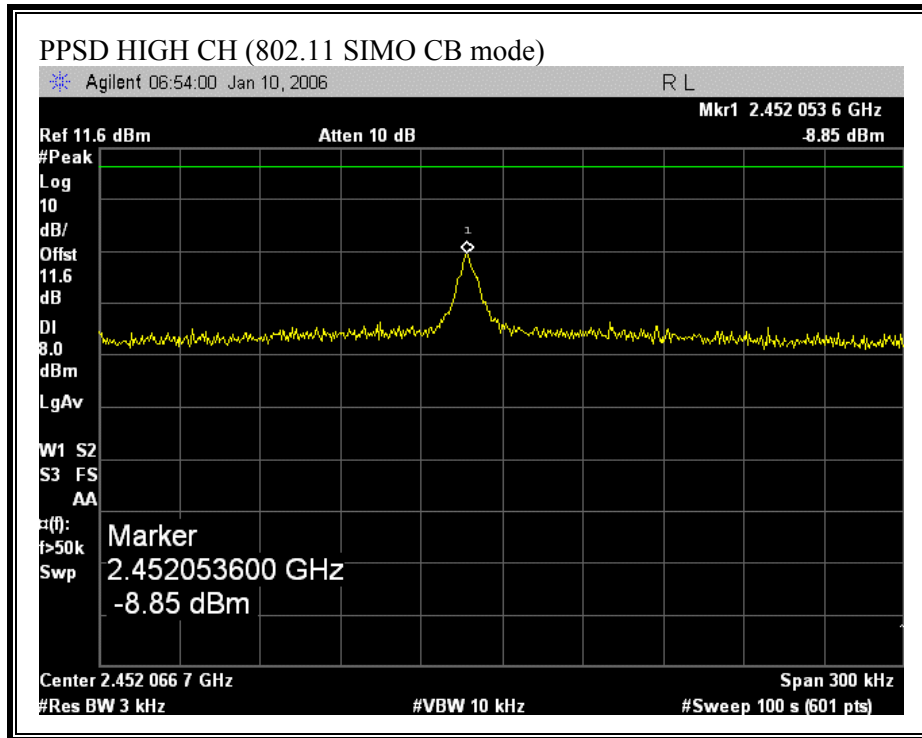


CHAIN 1:


PEAK POWER SPECTRAL DENSITY (802.11b MODE)

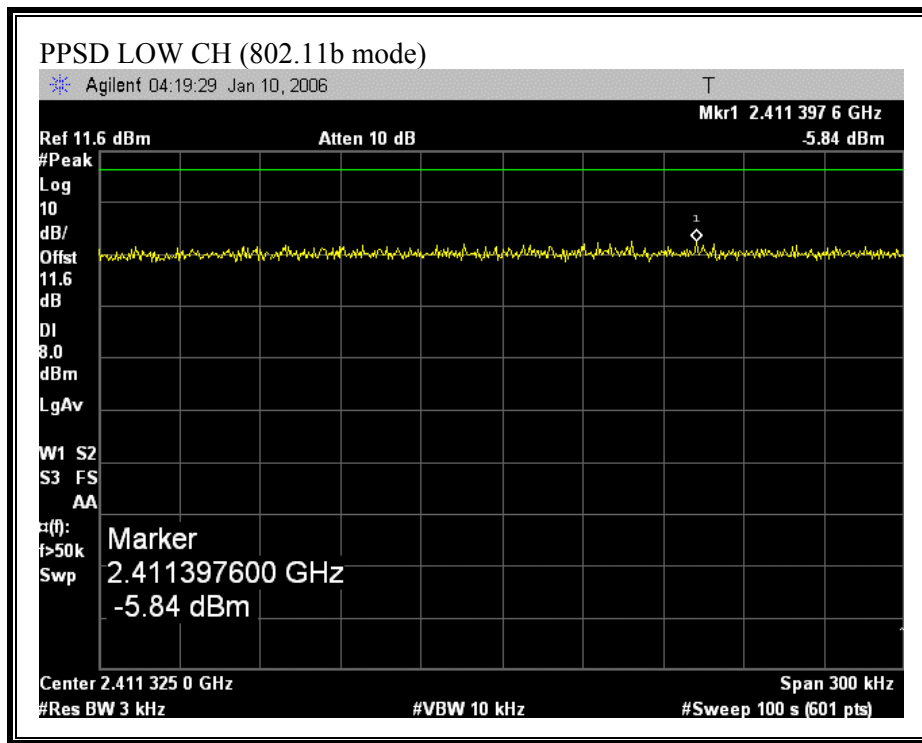


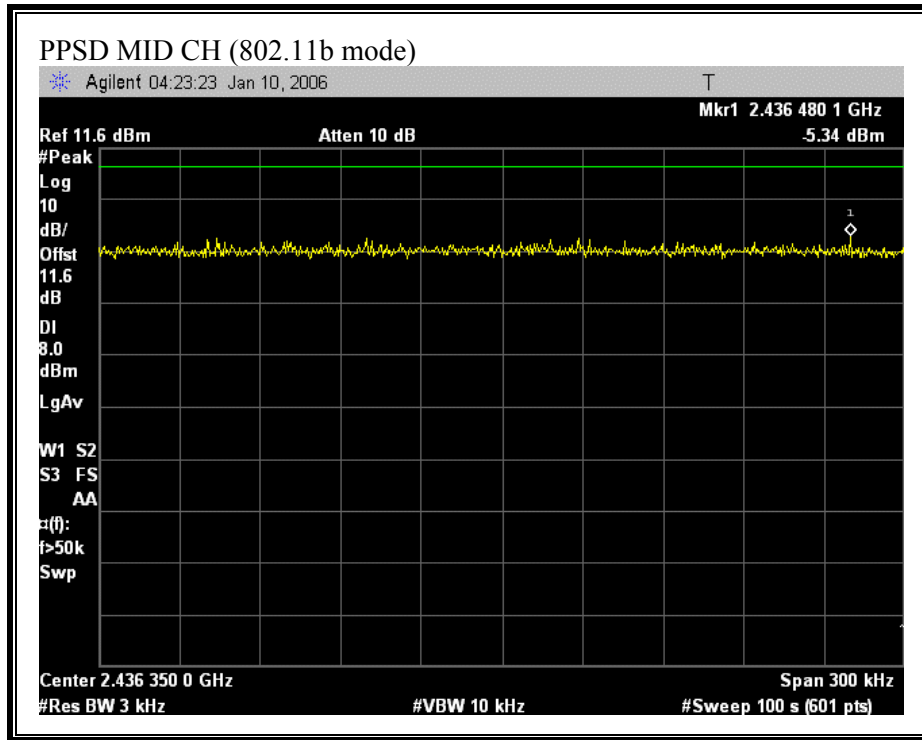


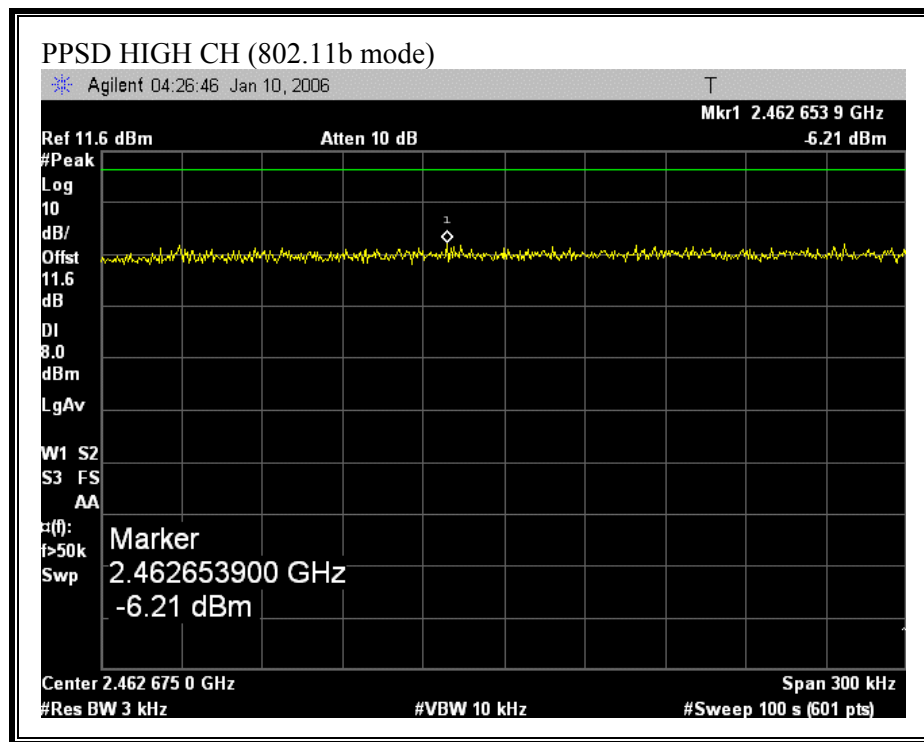


PEAK POWER SPECTRAL DENSITY (802.11g MODE)

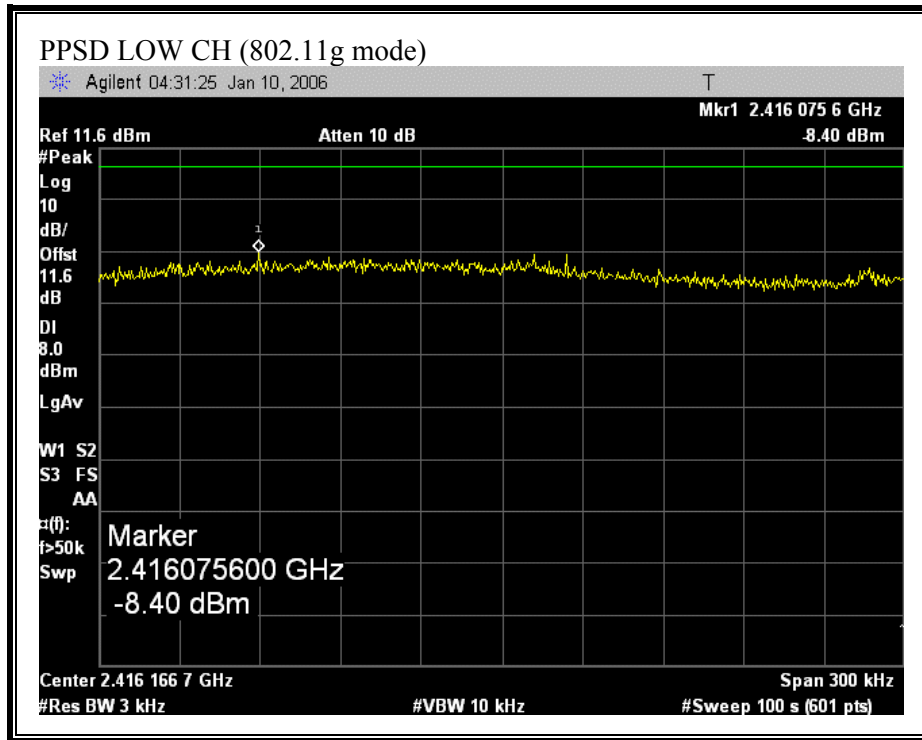


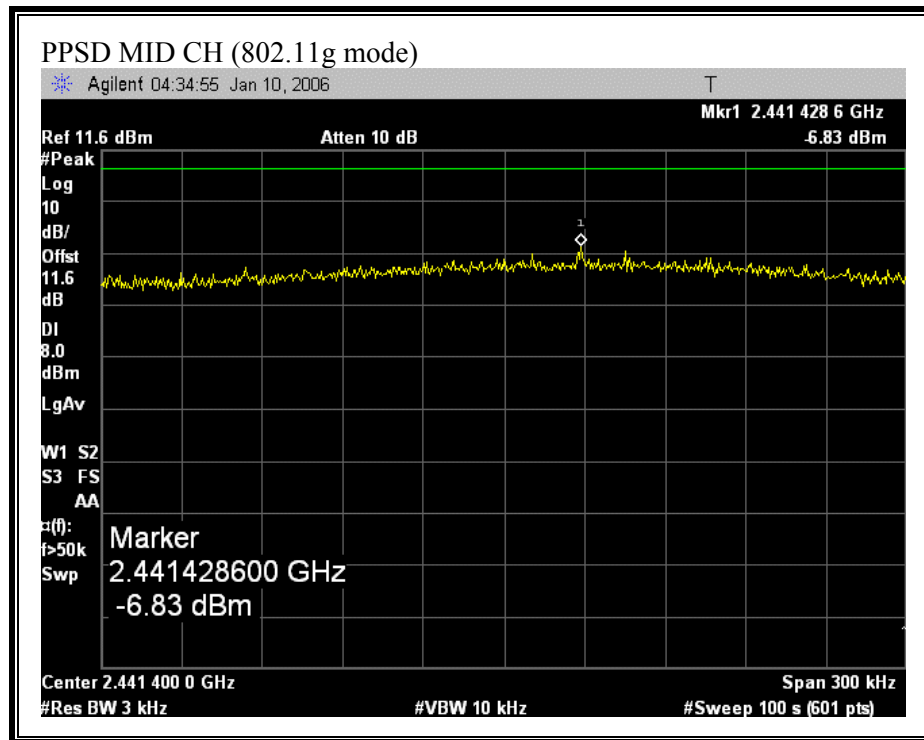

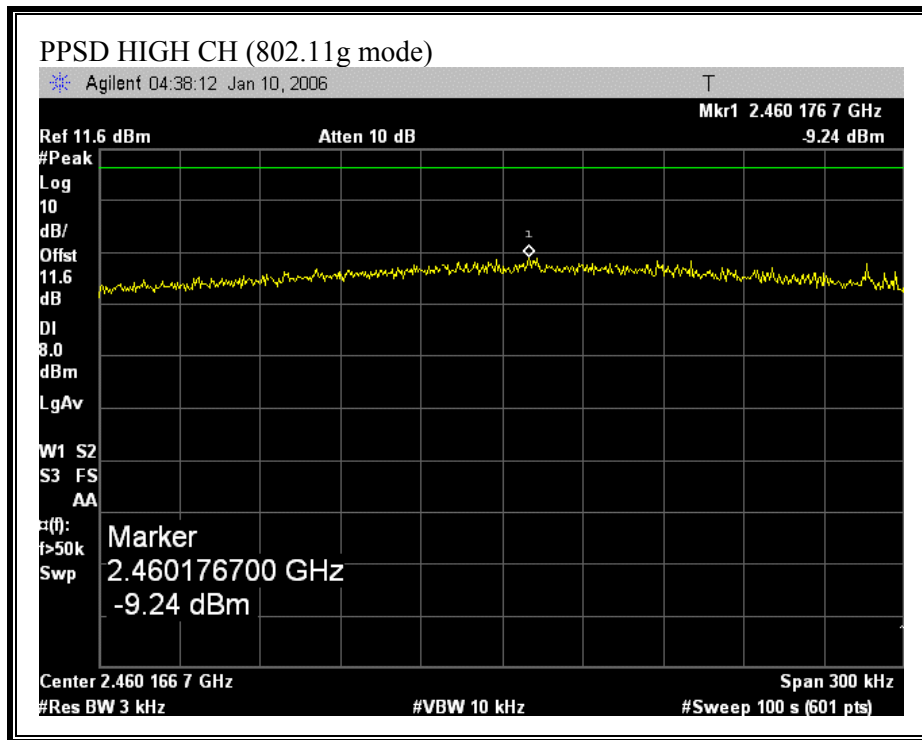



PEAK POWER SPECTRAL DENSITY (802.11 MIMO CB Mode)

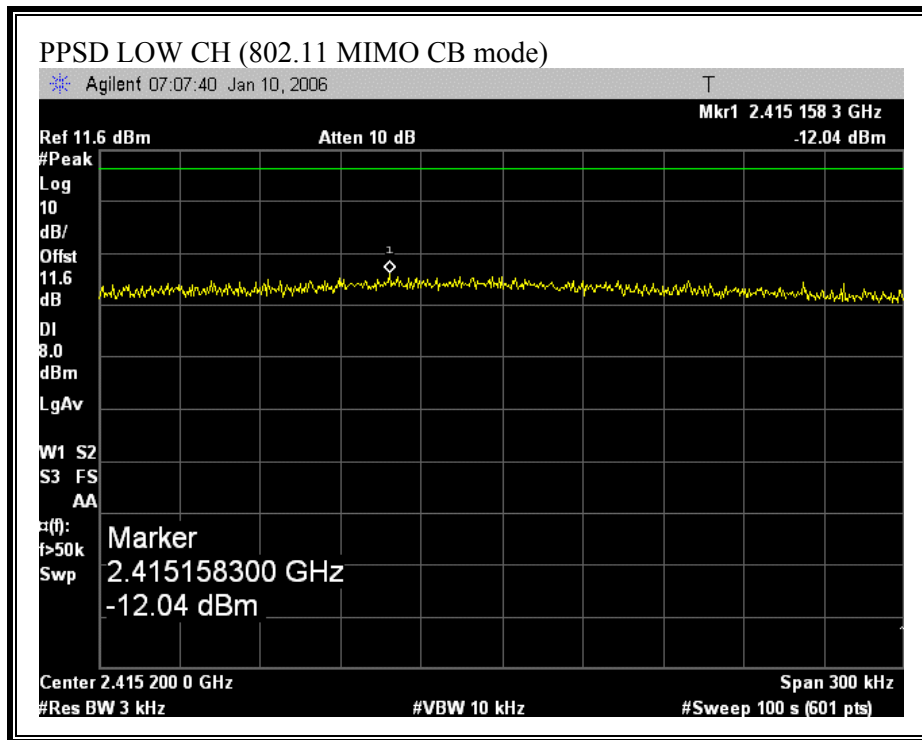

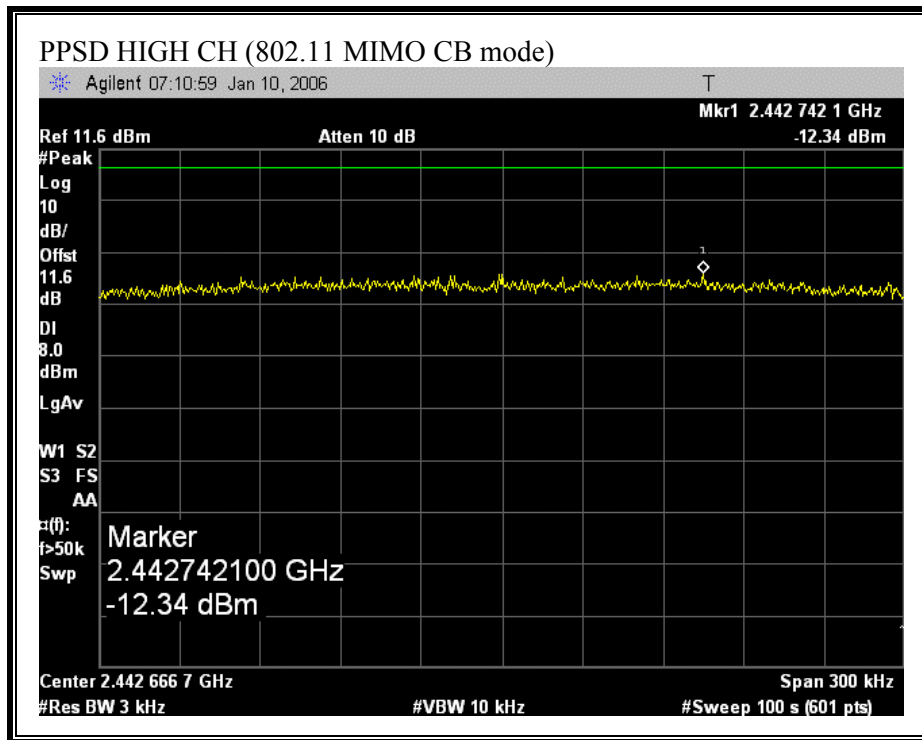

PEAK POWER SPECTRAL DENSITY (802.11 SIMO CB Mode)

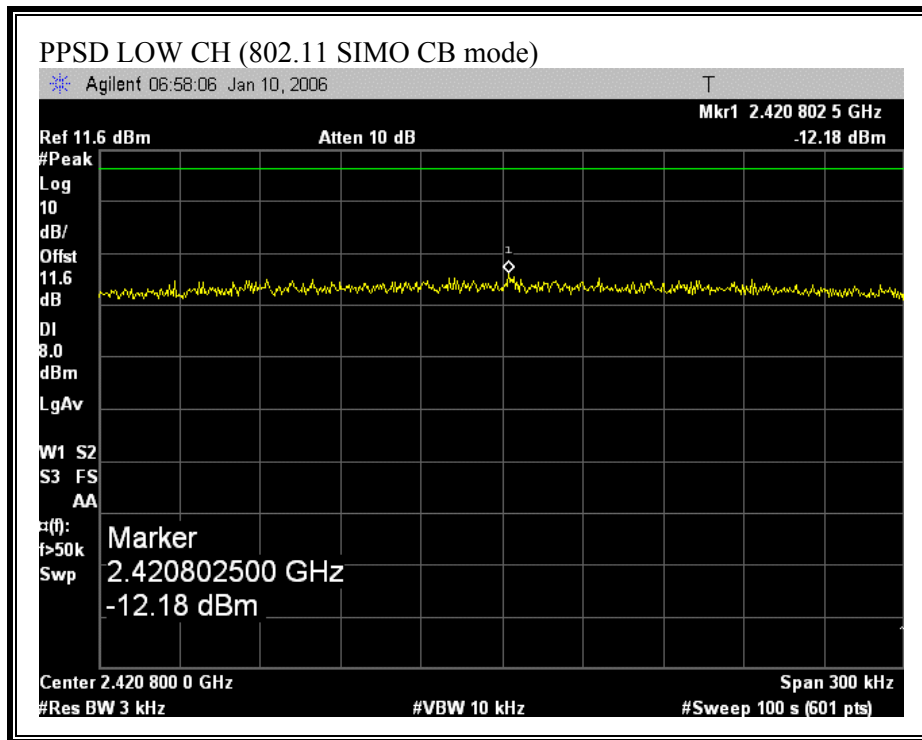

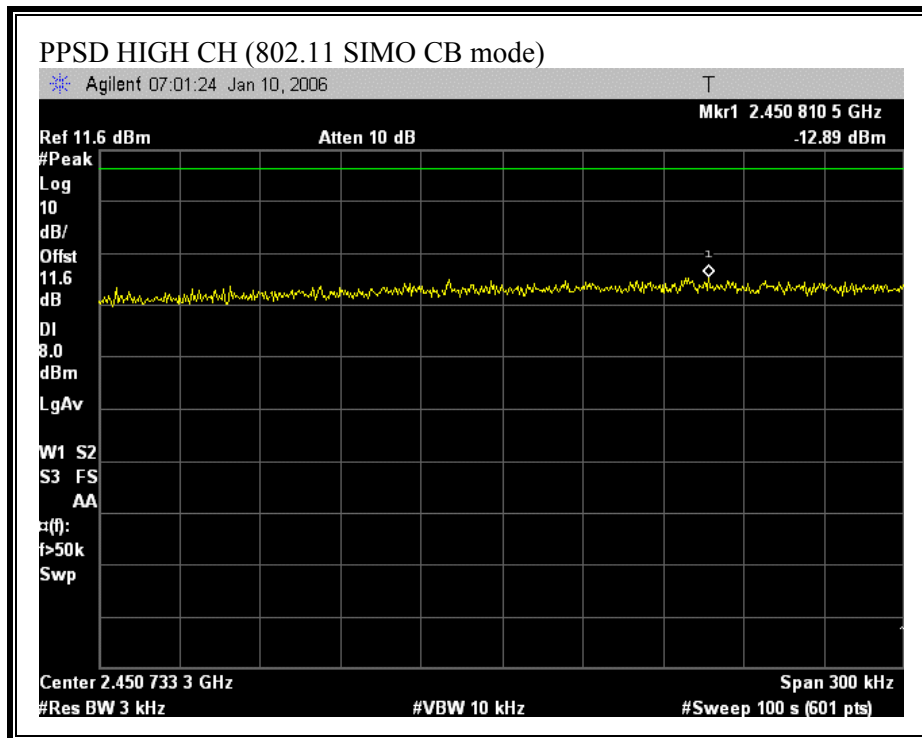

6.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Conducted power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS

No non-compliance noted:


CHAIN 0:


SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

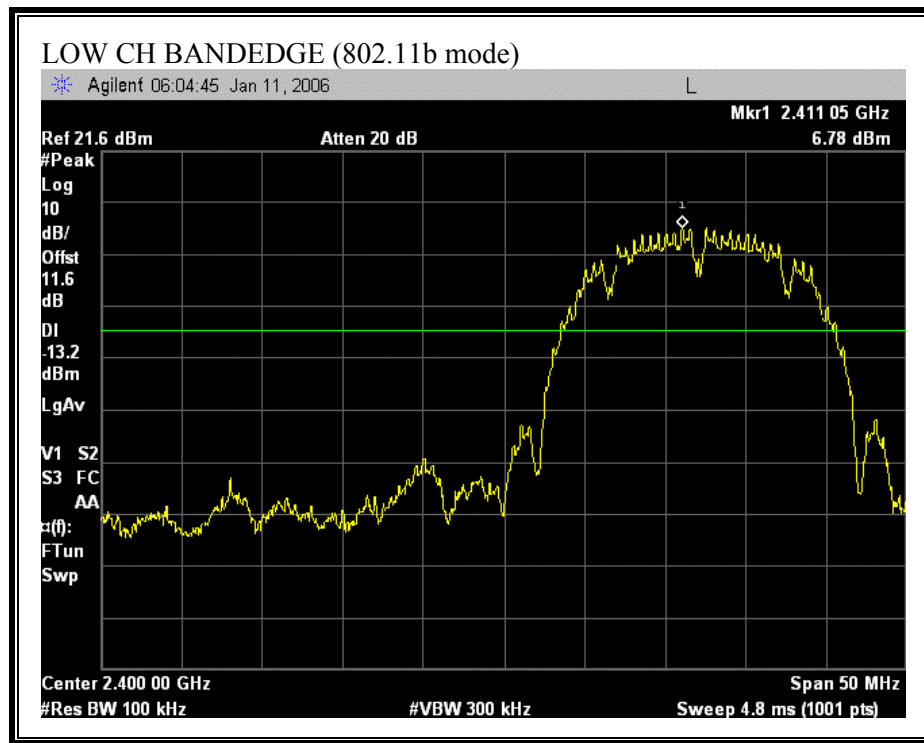

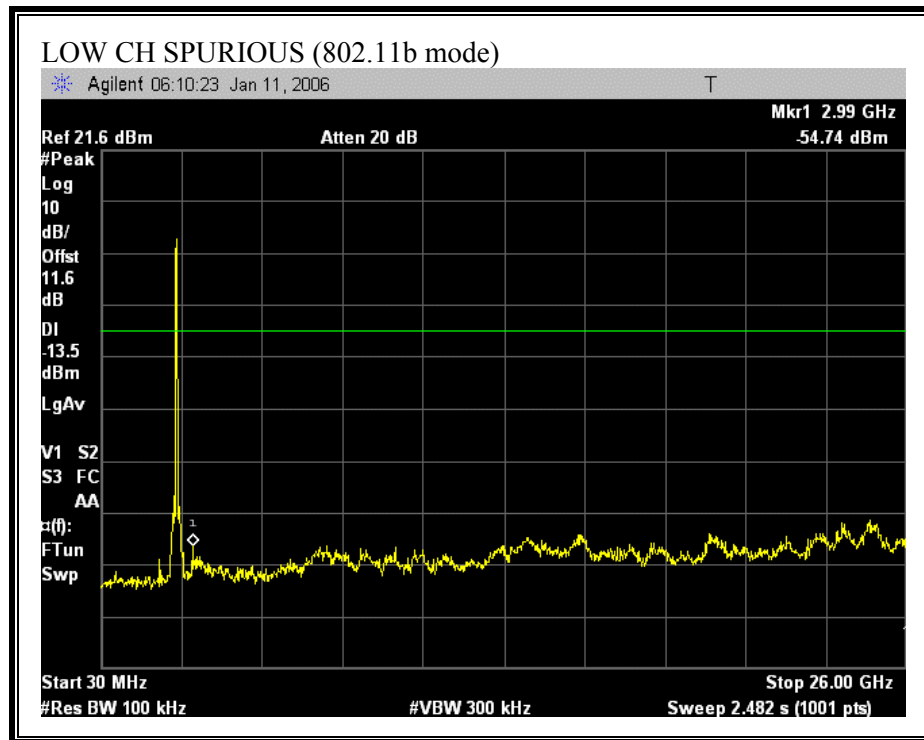



SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

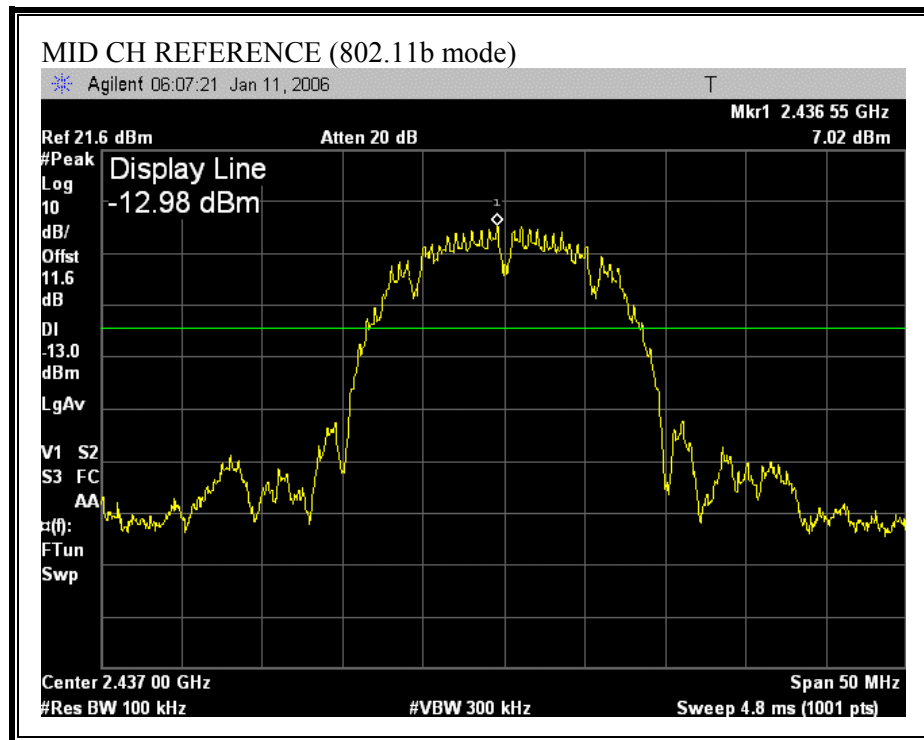

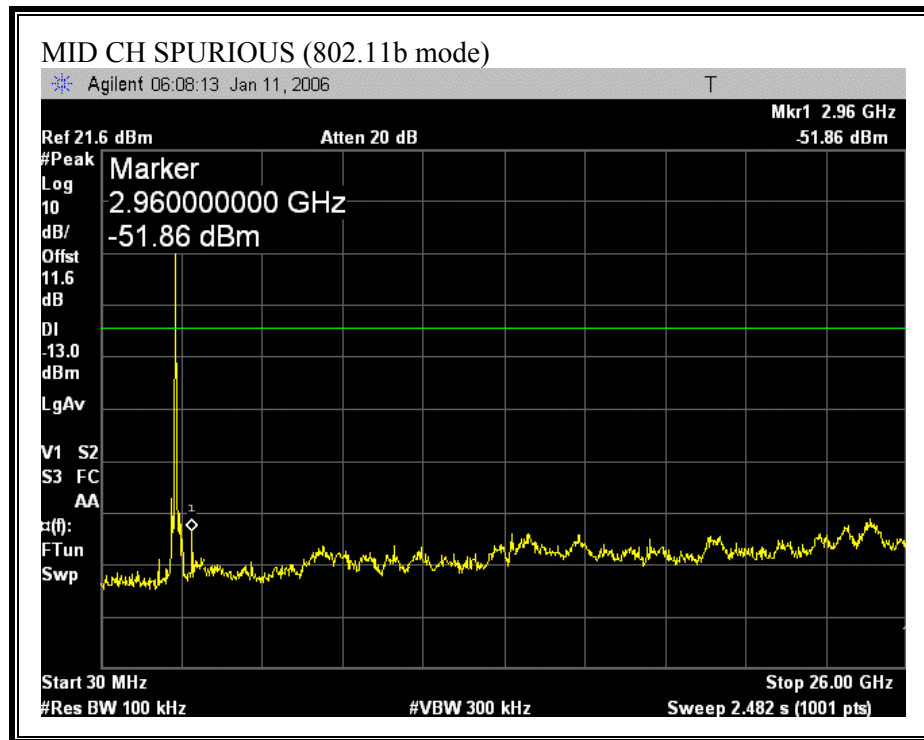



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

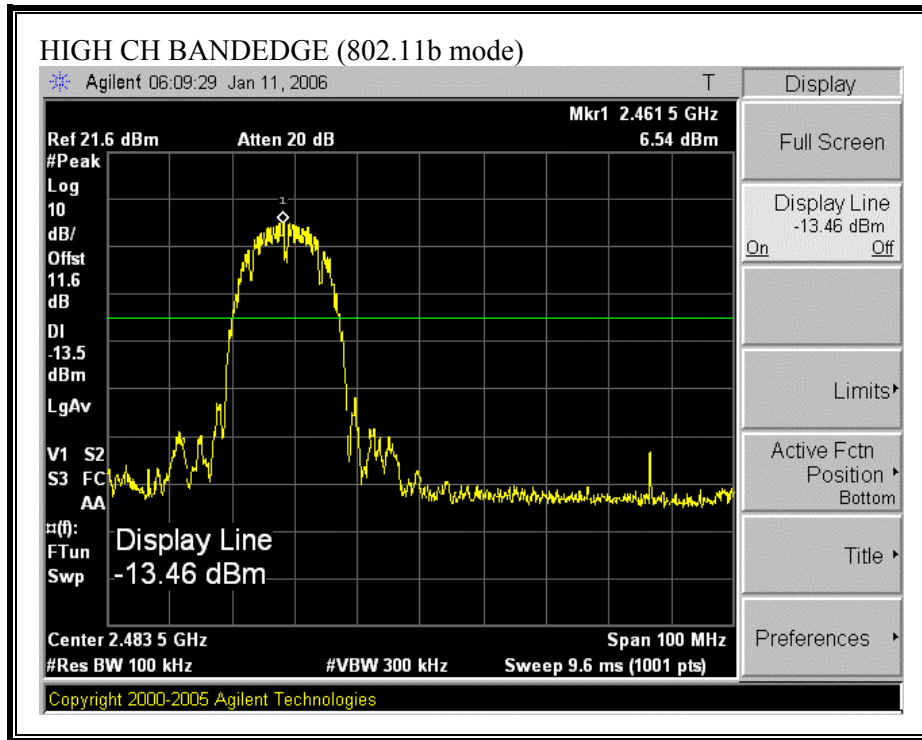

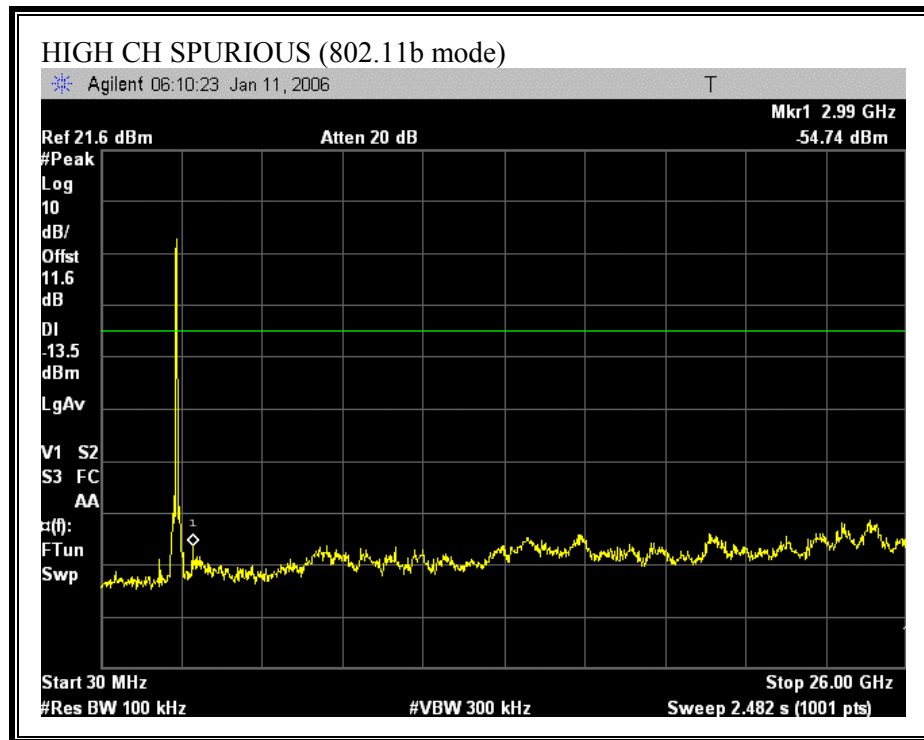



SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

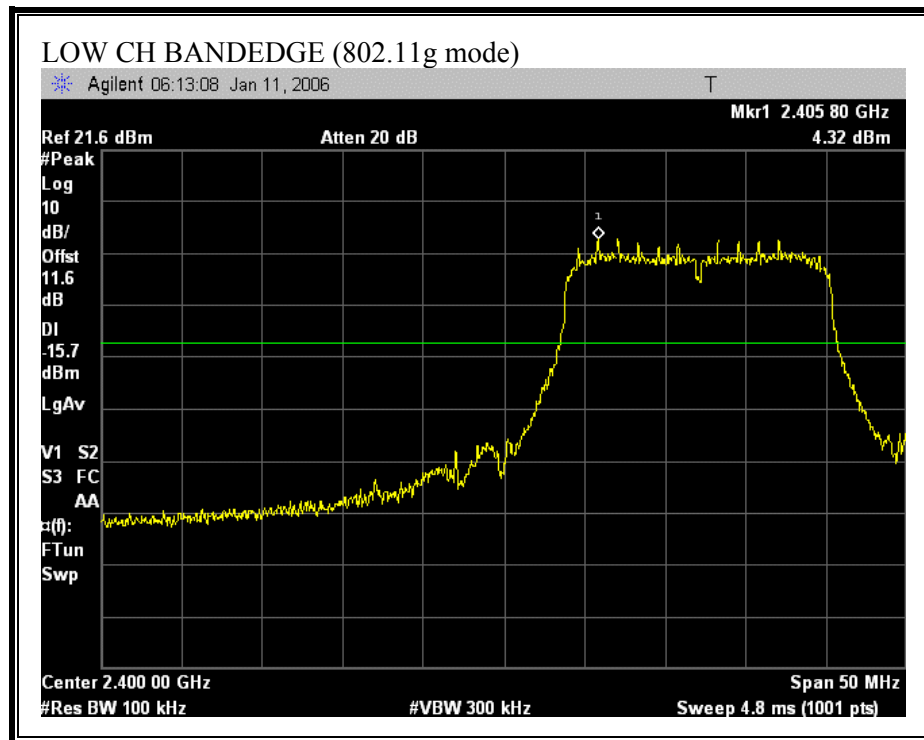

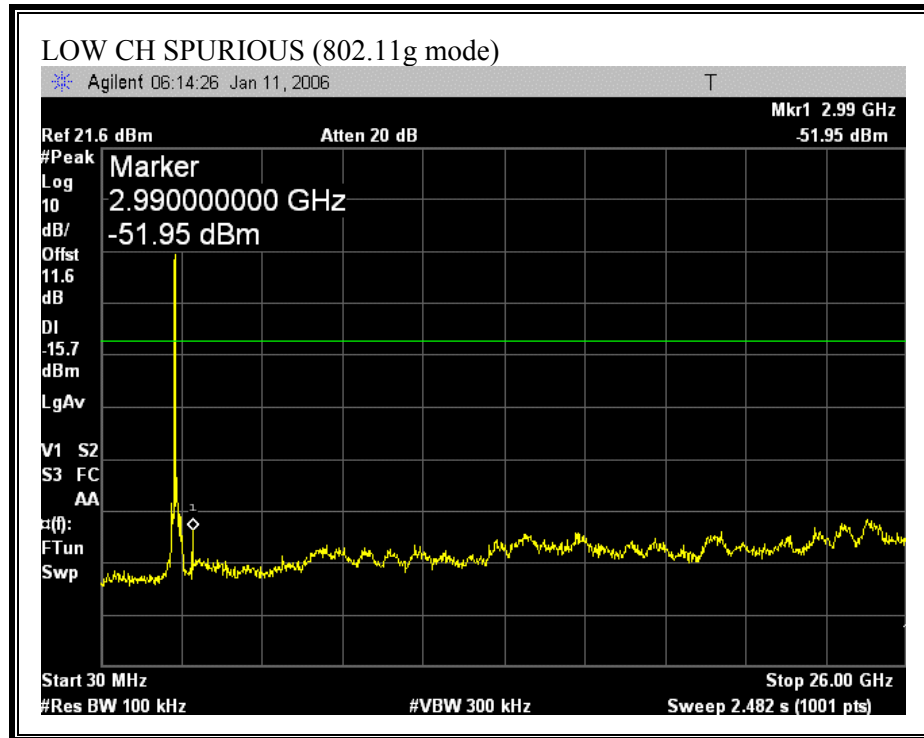



SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

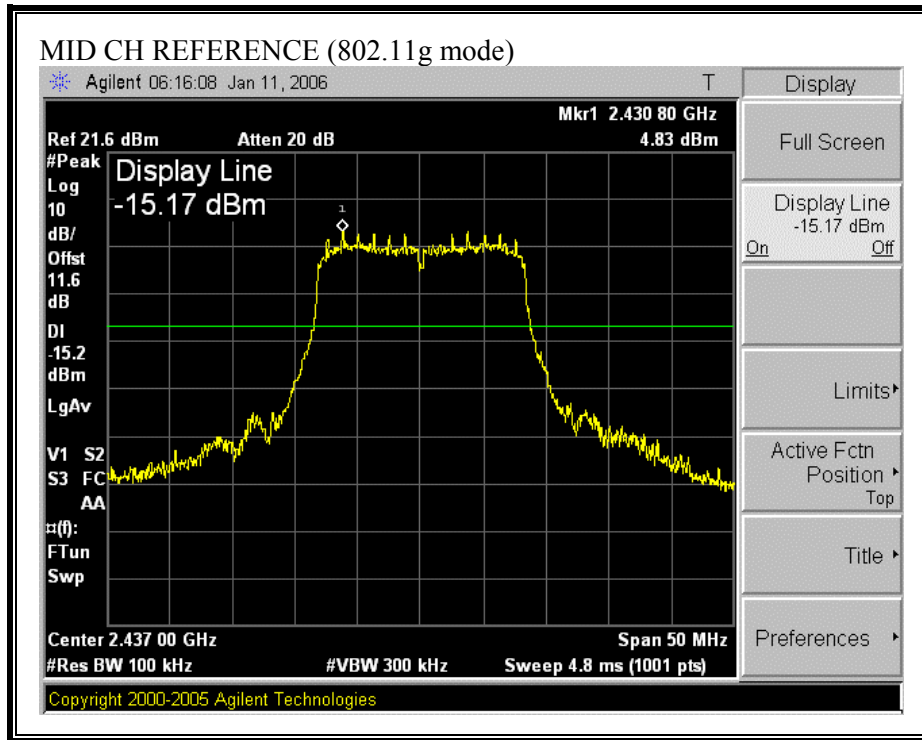

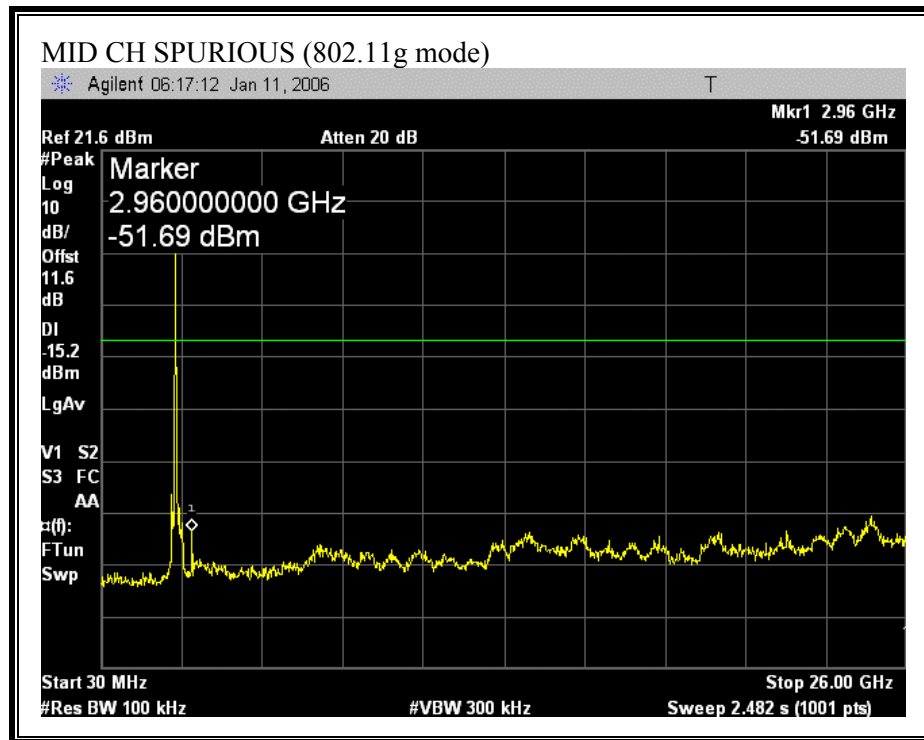



SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

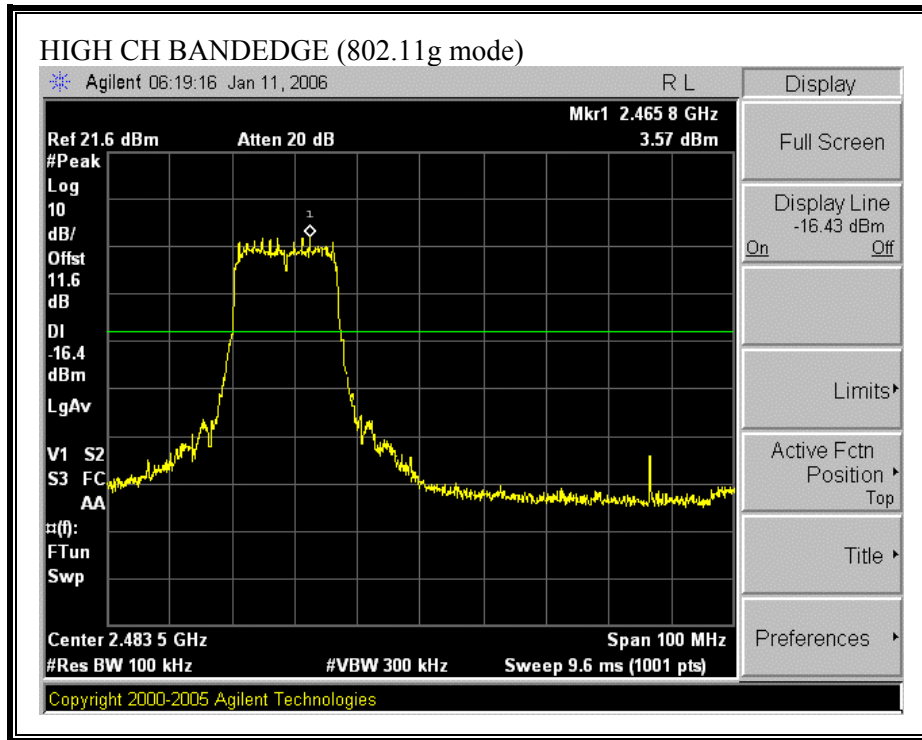


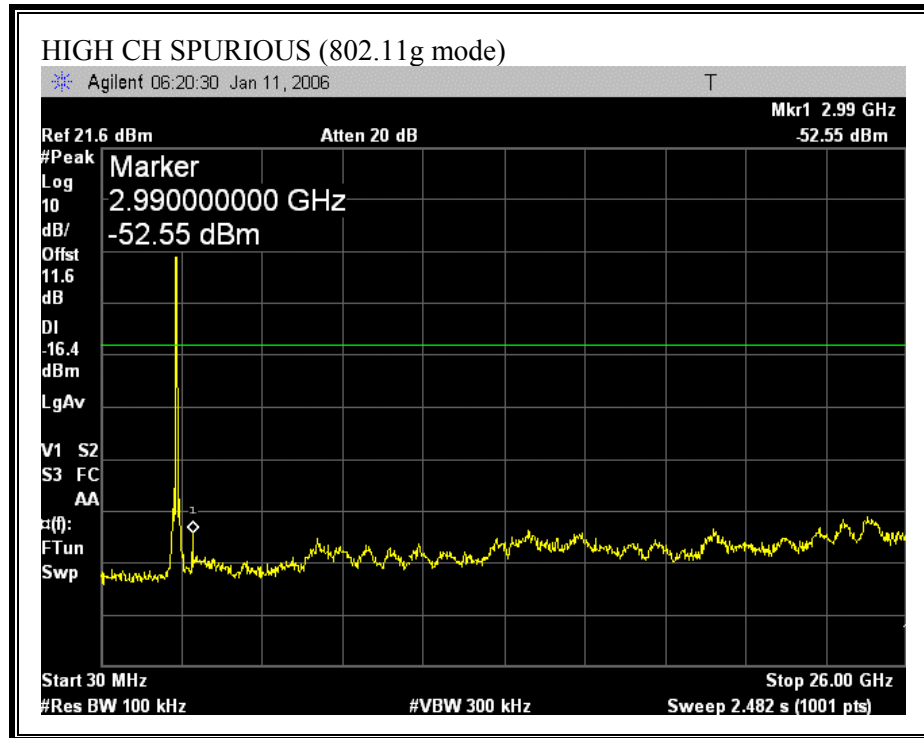


SPURIOUS EMISSIONS (802.11 MIMO CB MODE)

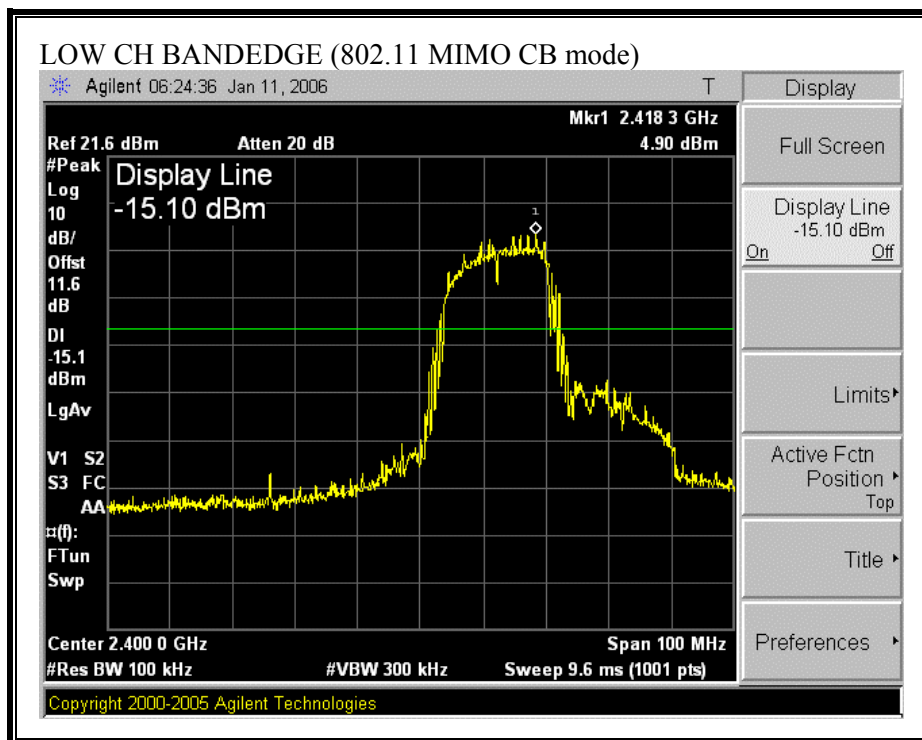


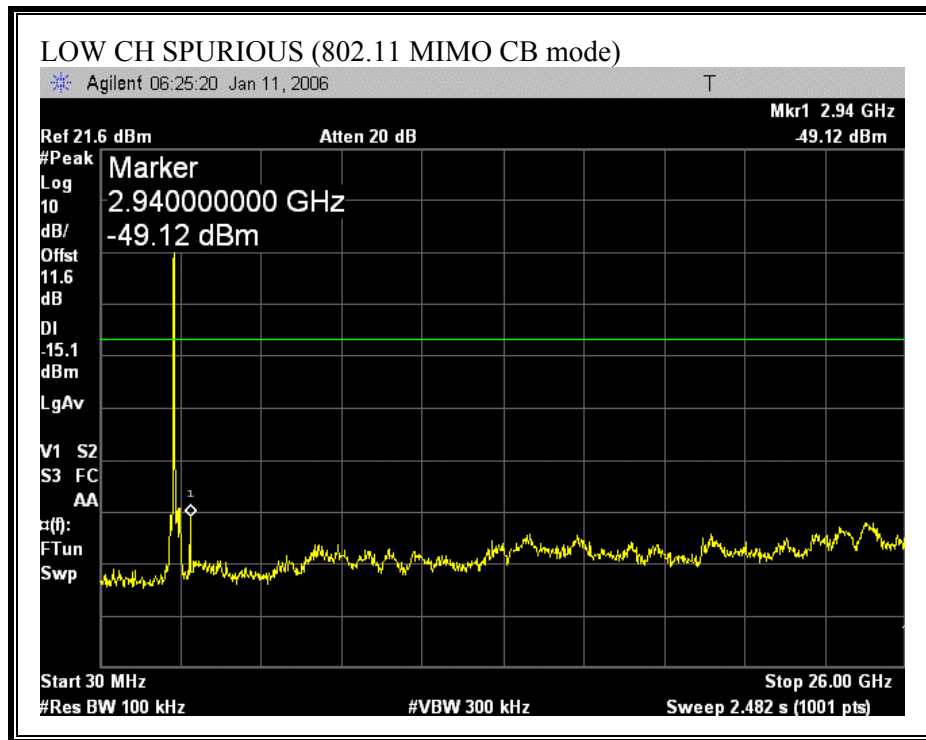


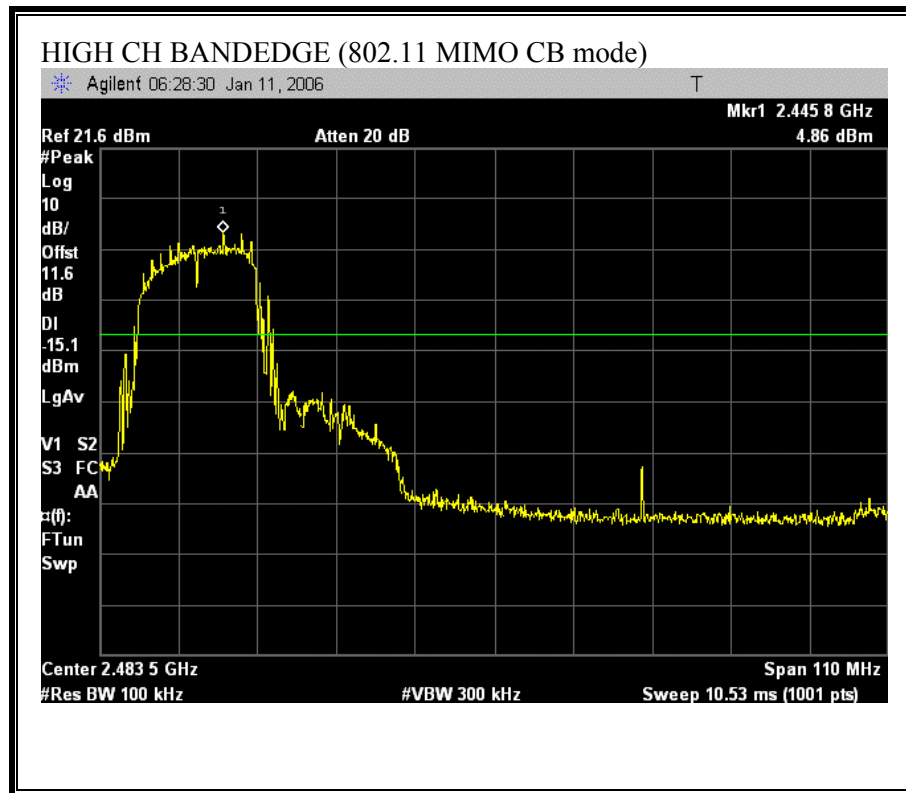


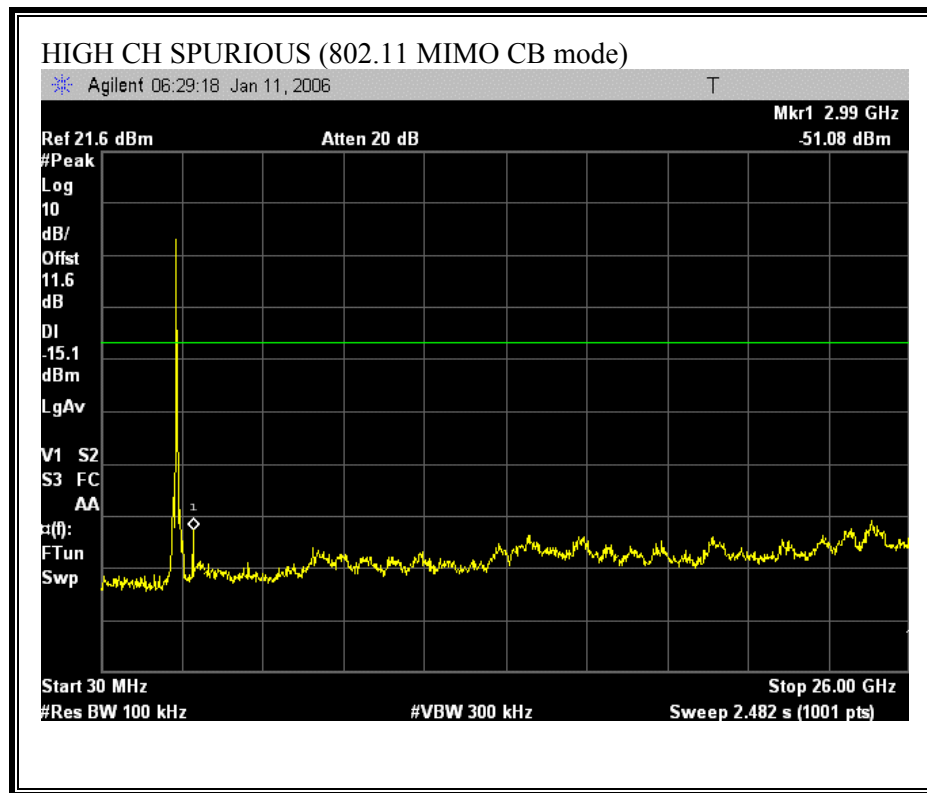


SPURIOUS EMISSIONS (802.11 SIMO CB MODE)

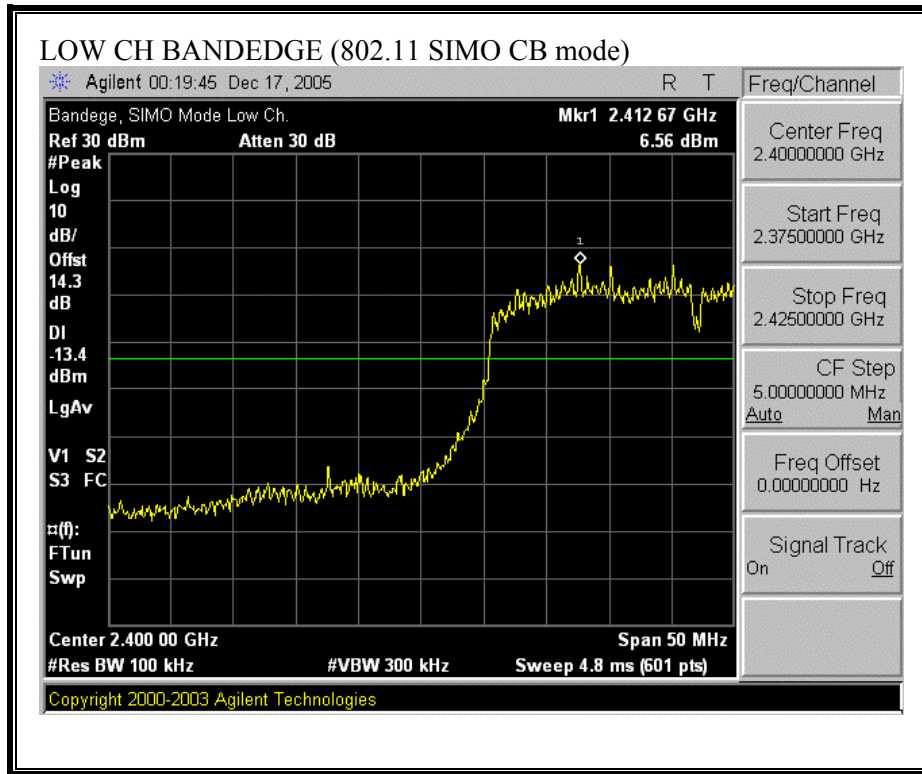

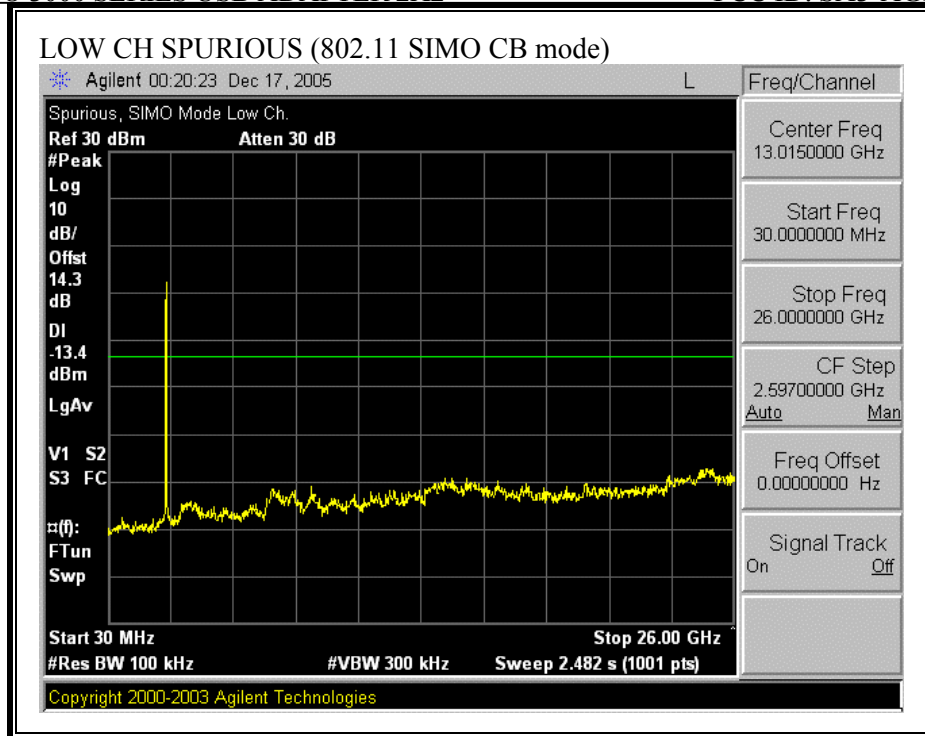

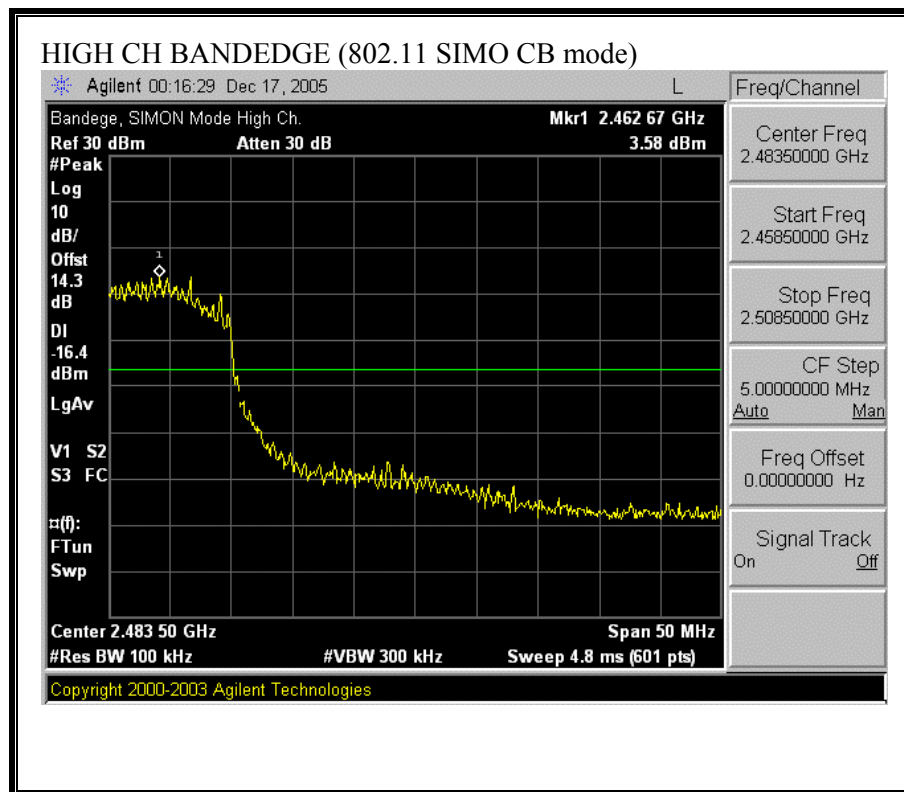

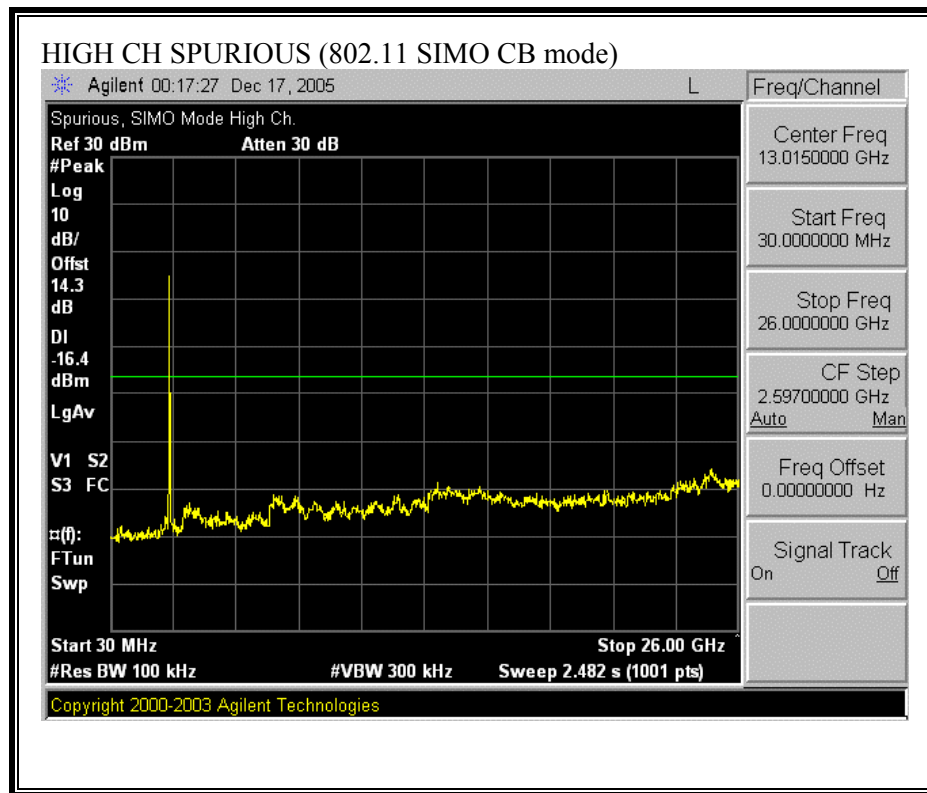

6.2. RADIATED EMISSIONS

6.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


6.2.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

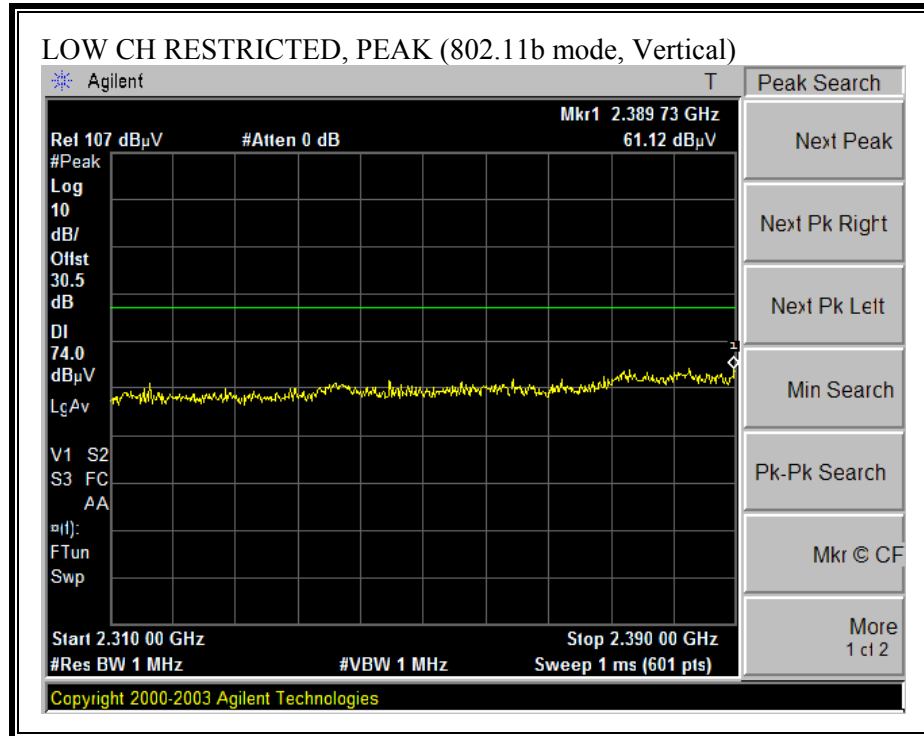

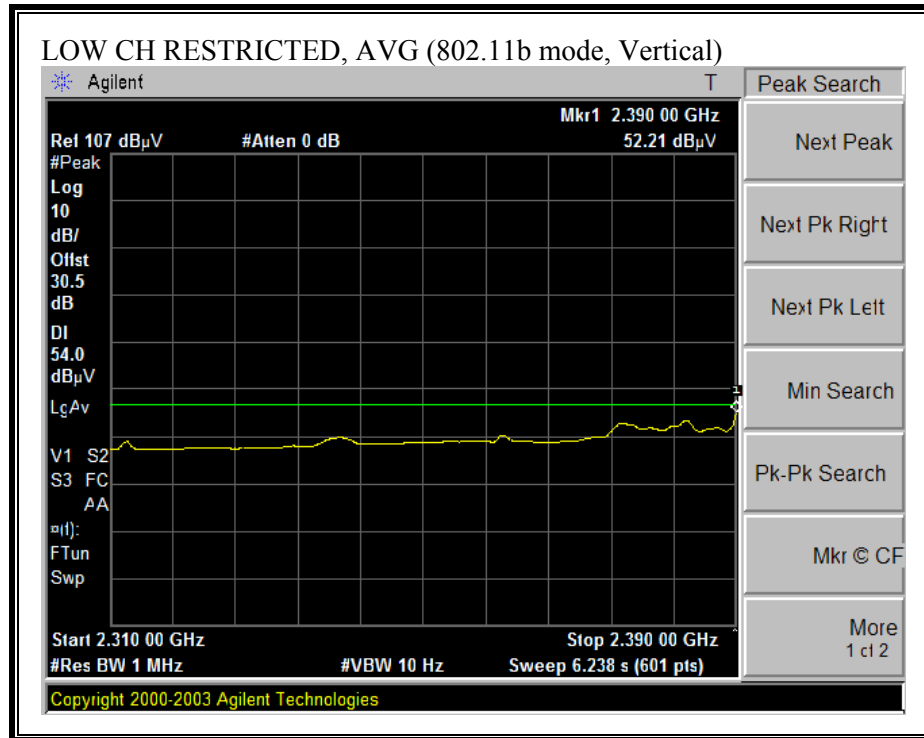

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

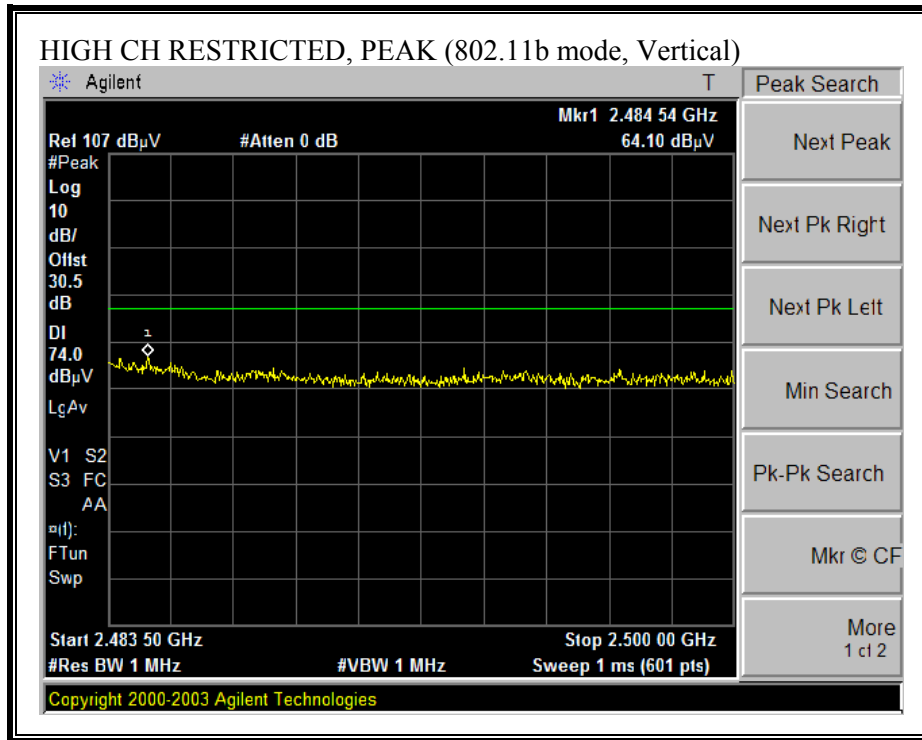

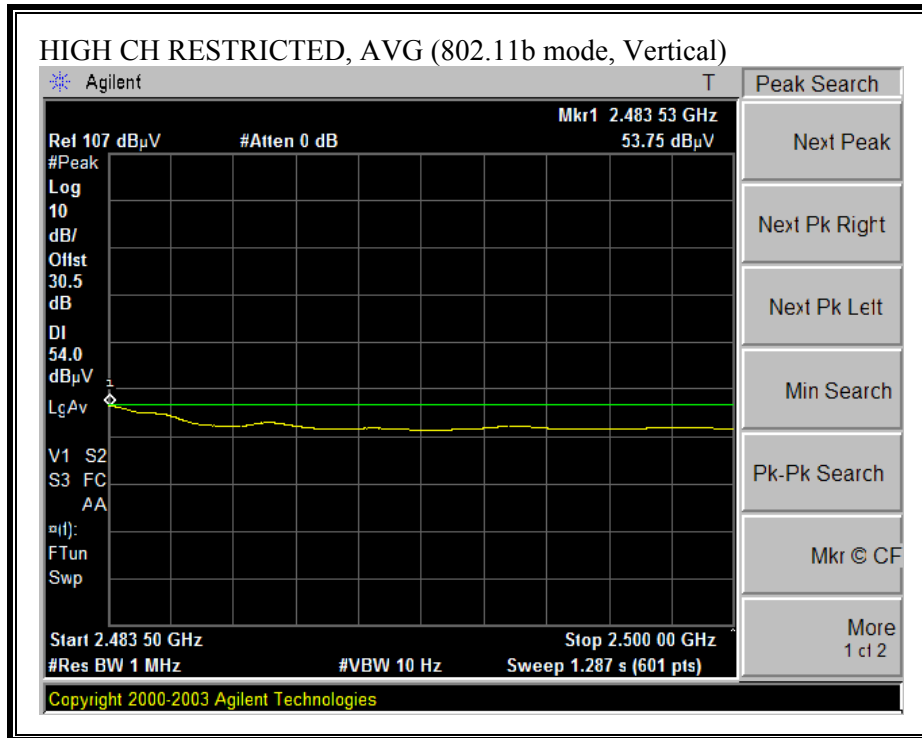



HARMONICS AND SPURIOUS EMISSIONS (b MODE)

12/06/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																
Test Engr:		Frank Ibrahim														
Project #:		05U3719														
Company:		Airgo														
EUT Descrip.:		Airgo 3000 Series USB Adapter for 2.4 GHz Client Applications														
EUT M/N:		AGN3022UB-11														
Test Target:		FCC 15.247														
Configuration:		Stand-alone														
Mode Oper:		TX ON, 11b mode, 1 Mbps														
Power Settings:		18 dBm														
Test Equipment:																
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				
T73; S/N: 6717 @3m				T145 Agilent 3008A0056												
Hi Frequency Cables																
2 foot cable				3 foot cable				12 foot cable				HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz
				Frank 177080001				Frank 187209001				HPF_4.0GHz				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
Low Channel (2412 MHz)																
4.824	3.0	46.0	37.8	33.7	4.0	-34.8	0.0	0.6	49.5	41.2	74	54	-24.5	-12.8	V	
12.060	3.0	40.9	28.0	38.5	5.3	-32.4	0.0	0.9	53.2	40.3	74	54	-20.8	-13.7	V	
4.824	3.0	40.5	32.7	33.7	4.0	-34.8	0.0	0.6	43.9	36.1	74	54	-30.1	-17.9	H	
12.060	3.0	41.2	29.6	38.5	5.3	-32.4	0.0	0.9	53.5	41.9	74	54	-20.5	-12.1	H	
Mid Channel (2437 MHz)																
4.874	3.0	46.6	38.4	33.8	4.0	-34.9	0.0	0.6	50.1	41.9	74	54	-23.9	-12.1	V	
7.311	3.0	52.4	46.5	35.5	4.6	-34.7	0.0	0.6	58.5	52.6	74	54	-15.5	-1.4	V	
12.185	3.0	41.5	30.2	38.5	5.4	-32.4	0.0	0.9	53.9	42.6	74	54	-20.1	-11.4	V	
4.874	3.0	46.0	37.9	33.8	4.0	-34.9	0.0	0.6	49.5	41.4	74	54	-24.5	-12.6	H	
7.311	3.0	52.6	46.6	35.5	4.6	-34.7	0.0	0.6	58.7	52.7	74	54	-15.3	-1.3	H	
12.185	3.0	44.5	33.2	38.5	5.4	-32.4	0.0	0.9	56.9	45.6	74	54	-17.1	-8.4	H	
High Channel (2462 MHz)																
4.924	3.0	46.5	38.2	33.8	4.0	-34.9	0.0	0.6	50.1	41.8	74	54	-23.9	-12.2	V	
7.386	3.0	50.3	43.6	35.6	4.6	-34.6	0.0	0.6	56.5	49.8	74	54	-17.5	-4.2	V	
12.310	3.0	44.1	33.6	38.5	5.4	-32.4	0.0	0.9	56.5	46.0	74	54	-17.5	-8.0	V	
4.924	3.0	44.3	36.5	33.8	4.0	-34.9	0.0	0.6	47.9	40.1	74	54	-26.1	-13.9	H	
7.386	3.0	51.1	44.4	35.6	4.6	-34.6	0.0	0.6	57.3	50.7	74	54	-16.7	-3.3	H	
12.310	3.0	44.6	34.6	38.5	5.4	-32.4	0.0	0.9	57.1	47.0	74	54	-16.9	-7.0	H	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									


EUT was scanned from 1 GHz to 25 GHz, no other signals were found above noise floor.


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

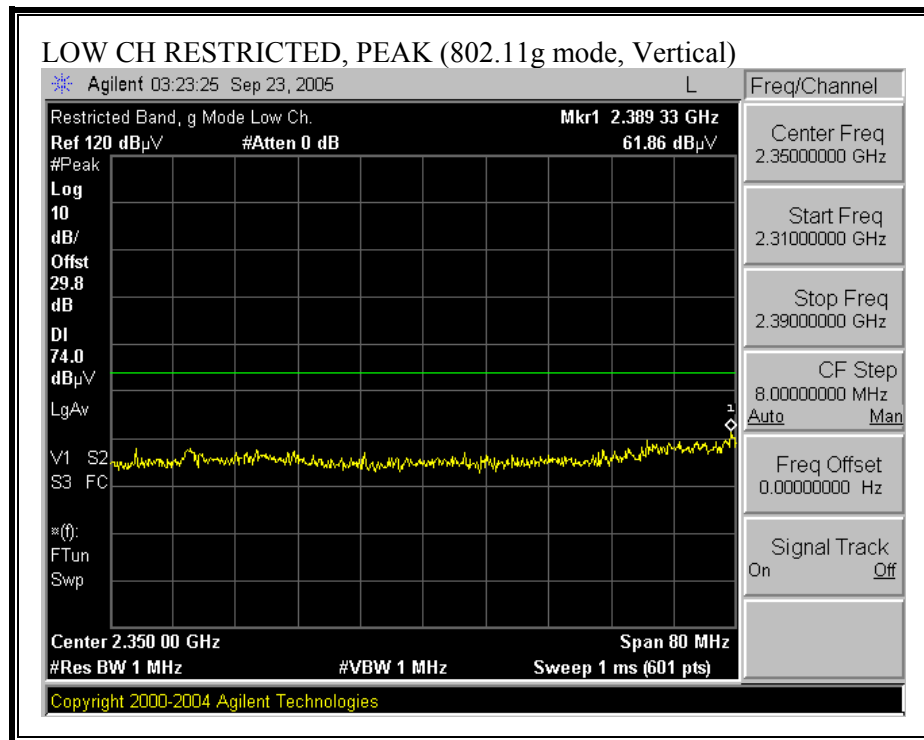

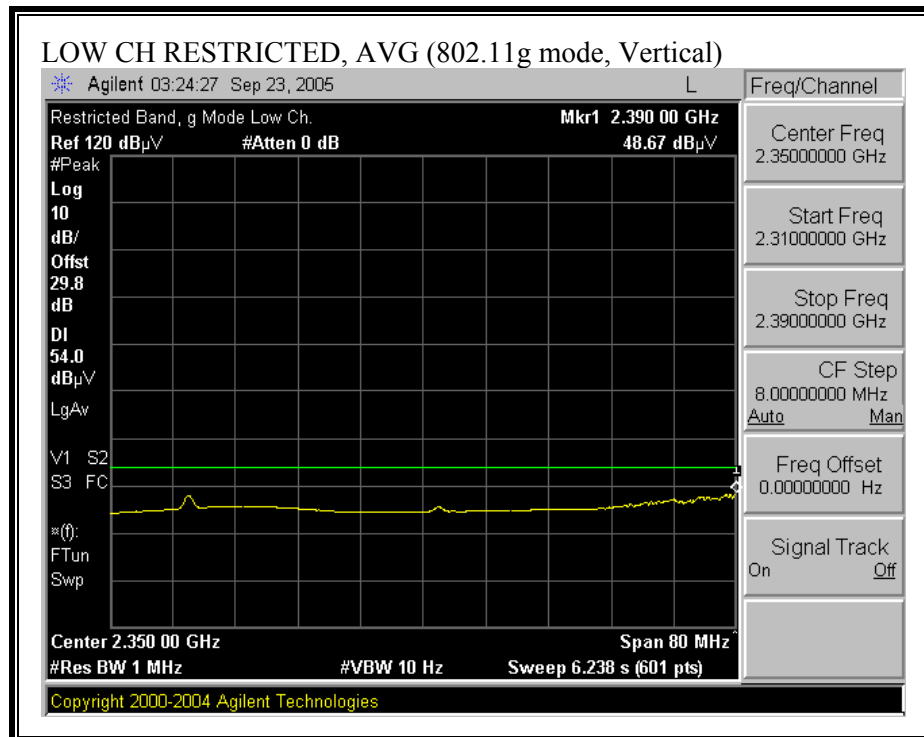

RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

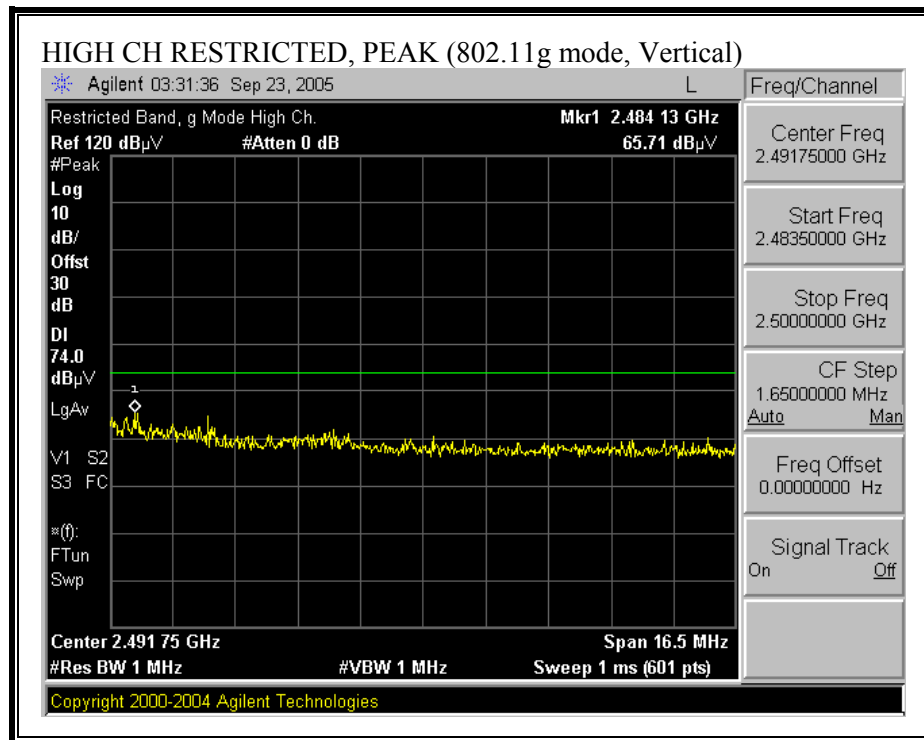


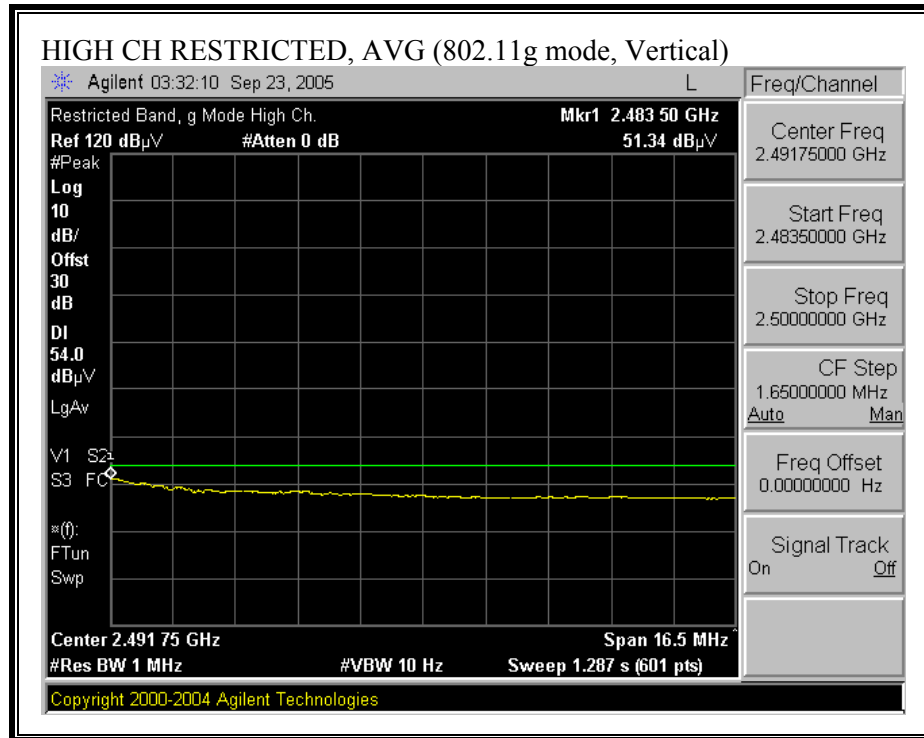


HARMONICS AND SPURIOUS EMISSIONS (g MODE)


12/06/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																			
Test Engr:		Frank Ibrahim																	
Project #:		05U3719																	
Company:		Airgo																	
EUT Descrip.:		Airgo 3000 Series USB Adapter for 2.4 GHz Client Applications																	
EUT M/N:		AGN3022UB-11																	
Test Target:		FCC 15.247																	
Configuration:		Stand-alone																	
Mode Oper:		TX ON, 11g mode, 6 Mbps																	
Power Settings:		17 dBm																	
Test Equipment:																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz							
T73; S/N: 6717 @3m				T145 Agilent 3008A0056															
Hi Frequency Cables																			
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter			
				Frank 177080001				Frank 187209001				HPF_4.0GHz							
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
Low Channel (2412 MHz)																			
4.824	3.0	45.2	36.3	33.7	4.0	-34.8	0.0	0.6	48.6	39.7	74	54	-25.4	-14.3	V				
12.060	3.0	43.0	31.3	38.5	5.3	-32.4	0.0	0.9	55.3	43.6	74	54	-18.7	-10.4	V				
4.824	3.0	45.0	32.0	33.7	4.0	-34.8	0.0	0.6	48.5	35.4	74	54	-25.5	-18.6	H				
12.060	3.0	44.2	32.1	38.5	5.3	-32.4	0.0	0.9	56.5	44.4	74	54	-17.5	-9.6	H				
Mid Channel (2437 MHz)																			
4.874	3.0	44.8	32.4	33.8	4.0	-34.9	0.0	0.6	48.3	35.9	74	54	-25.7	-18.1	V				
7.311	3.0	51.4	38.0	35.5	4.6	-34.7	0.0	0.6	57.5	44.1	74	54	-16.5	-9.9	V				
12.185	3.0	44.3	32.0	38.5	5.4	-32.4	0.0	0.9	56.7	44.3	74	54	-17.3	-9.7	V				
4.874	3.0	44.8	33.2	33.8	4.0	-34.9	0.0	0.6	48.3	36.7	74	54	-25.7	-17.3	H				
7.311	3.0	52.3	39.2	35.5	4.6	-34.7	0.0	0.6	58.4	45.3	74	54	-15.6	-8.7	H				
12.185	3.0	44.2	32.5	38.5	5.4	-32.4	0.0	0.9	56.6	44.9	74	54	-17.4	-9.1	H				
High Channel (2462 MHz)																			
4.924	3.0	44.7	31.6	33.8	4.0	-34.9	0.0	0.6	48.3	35.2	74	54	-25.7	-18.8	V				
7.386	3.0	51.5	38.3	35.6	4.6	-34.6	0.0	0.6	57.8	44.5	74	54	-16.2	-9.5	V				
12.310	3.0	43.7	33.2	38.5	5.4	-32.4	0.0	0.9	56.1	45.6	74	54	-17.9	-8.4	V				
4.924	3.0	44.4	34.3	33.8	4.0	-34.9	0.0	0.6	48.1	37.9	74	54	-25.9	-16.1	H				
7.386	3.0	51.1	37.7	35.6	4.6	-34.6	0.0	0.6	57.3	43.9	74	54	-16.7	-10.1	H				
12.310	3.0	44.3	33.7	38.5	5.4	-32.4	0.0	0.9	56.7	46.1	74	54	-17.3	-7.9	H				
f Measurement Frequency Amp Preamp Gain Avg Lim Average Field Strength Limit Dist Distance to Antenna D Corr Distance Correct to 3 meters Pk Lim Peak Field Strength Limit Read Analyzer Reading Avg Average Field Strength @ 3 m Avg Mar Margin vs. Average Limit AF Antenna Factor Peak Calculated Peak Field Strength Pk Mar Margin vs. Peak Limit CL Cable Loss HPF High Pass Filter																			
EUT was scanned from 1 GHz to 25 GHz, no other signals were found above noise floor.																			


RESTRICTED BANDEDGE (MIMO MODE, LOW CHANNEL, VERTICAL)

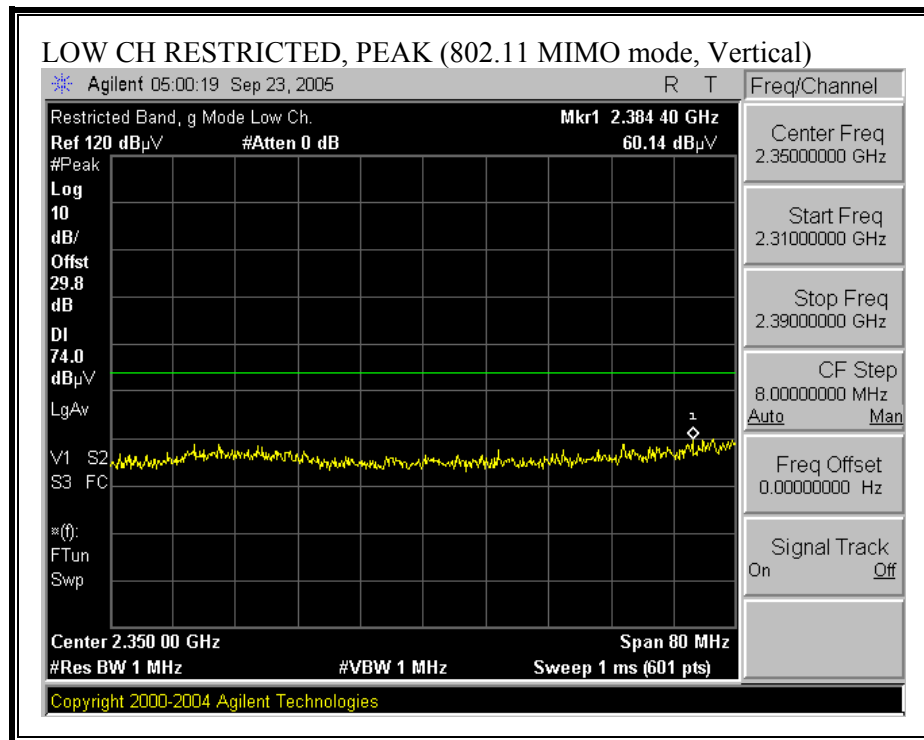

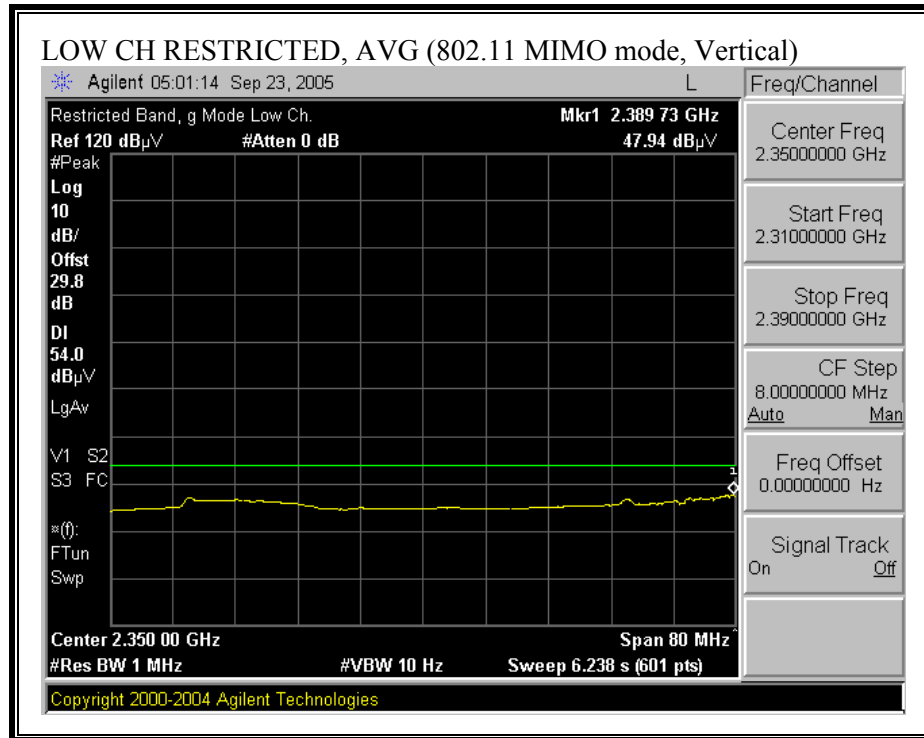

RESTRICTED BANDEDGE (MIMO MODE, HIGH CHANNEL, VERTICAL)

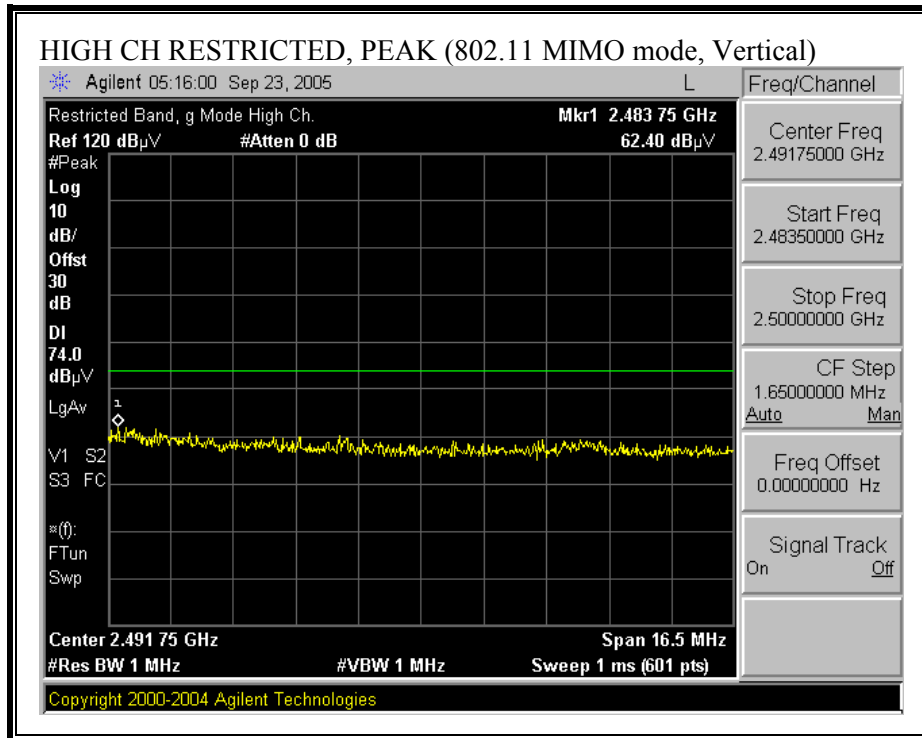

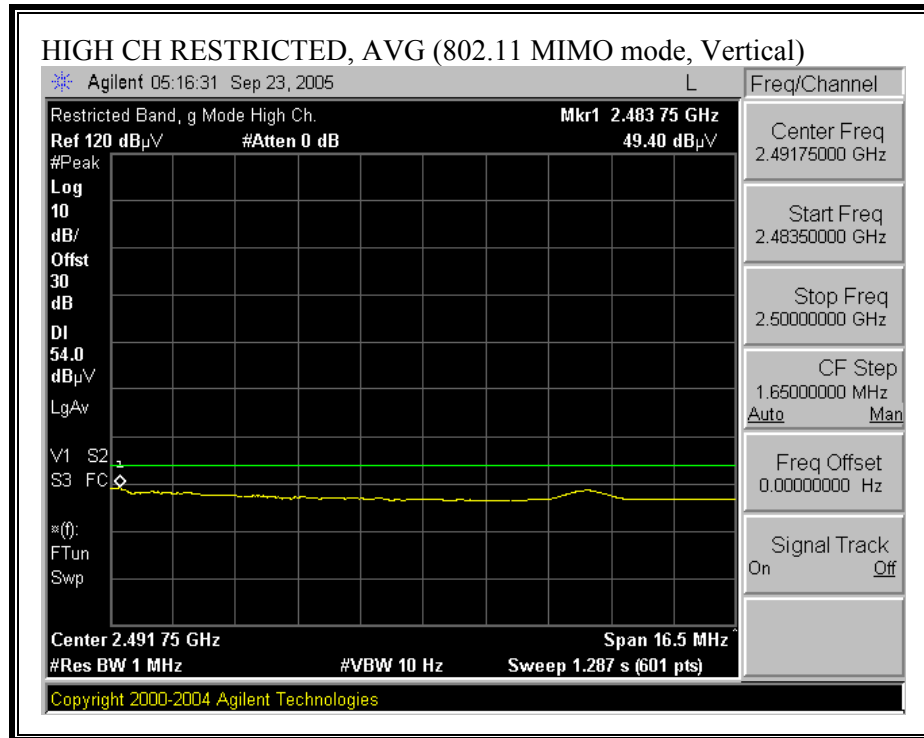



HARMONICS AND SPURIOUS EMISSIONS (MIMO MODE)

12/06/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																			
Test Engr:		Frank Ibrahim																	
Project #:		05U3719																	
Company:		Airgo																	
EUT Descrip.:		Airgo 3000 Series USB Adapter for 2.4 GHz Client Applications																	
EUT M/N:		AGN3022UB-11																	
Test Target:		FCC 15.247																	
Configuration:		Stand-alone																	
Mode Oper:		TX ON, 11g MIMO CB mode, 48 Mbps																	
Power Settings:		15 dBm																	
Test Equipment:																			
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz							
T73; S/N: 6717 @3m				T145 Agilent 3008A0056															
Hi Frequency Cables																			
2 foot cable				3 foot cable				12 foot cable				HPF				Reject Filter			
				Frank 177080001				Frank 187209001				HPF_4.0GHz							
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)				
Low Channel (2412 MHz)																			
4.824	3.0	44.5	33.2	33.7	4.0	-34.8	0.0	0.6	47.9	36.6	74	54	-26.1	-17.4	V				
12.060	3.0	44.3	32.5	38.5	5.3	-32.4	0.0	0.9	56.6	44.8	74	54	-17.4	-9.2	V				
4.824	3.0	44.8	32.6	33.7	4.0	-34.8	0.0	0.6	48.2	36.0	74	54	-25.8	-18.0	H				
12.060	3.0	43.9	32.0	38.5	5.3	-32.4	0.0	0.9	56.2	44.3	74	54	-17.8	-9.7	H				
High Channel (2432 MHz)																			
4.864	3.0	44.4	32.8	33.8	4.0	-34.9	0.0	0.6	47.9	36.3	74	54	-26.1	-17.7	V				
7.296	3.0	49.9	37.9	35.5	4.6	-34.7	0.0	0.6	56.0	44.0	74	54	-18.0	-10.0	V				
12.160	3.0	44.5	32.8	38.5	5.4	-32.4	0.0	0.9	56.8	45.2	74	54	-17.2	-8.8	V				
4.864	3.0	44.9	32.6	33.8	4.0	-34.9	0.0	0.6	48.4	36.1	74	54	-25.6	-17.9	H				
7.296	3.0	51.4	38.4	35.5	4.6	-34.7	0.0	0.6	57.5	44.4	74	54	-16.5	-9.6	H				
12.160	3.0	44.3	32.3	38.5	5.4	-32.4	0.0	0.9	56.7	44.7	74	54	-17.3	-9.3	H				
f Measurement Frequency Amp Preamp Gain Avg Lim Average Field Strength Limit Dist Distance to Antenna D Corr Distance Correct to 3 meters Pk Lim Peak Field Strength Limit Read Analyzer Reading Avg Average Field Strength @ 3 m Avg Mar Margin vs. Average Limit AF Antenna Factor Peak Calculated Peak Field Strength Pk Mar Margin vs. Peak Limit CL Cable Loss HPF High Pass Filter																			


EUT was scanned from 1 GHz to 25 GHz, no other signals were found above noise floor.


RESTRICTED BANDEDGE (SIMO MODE, LOW CHANNEL, VERTICAL)

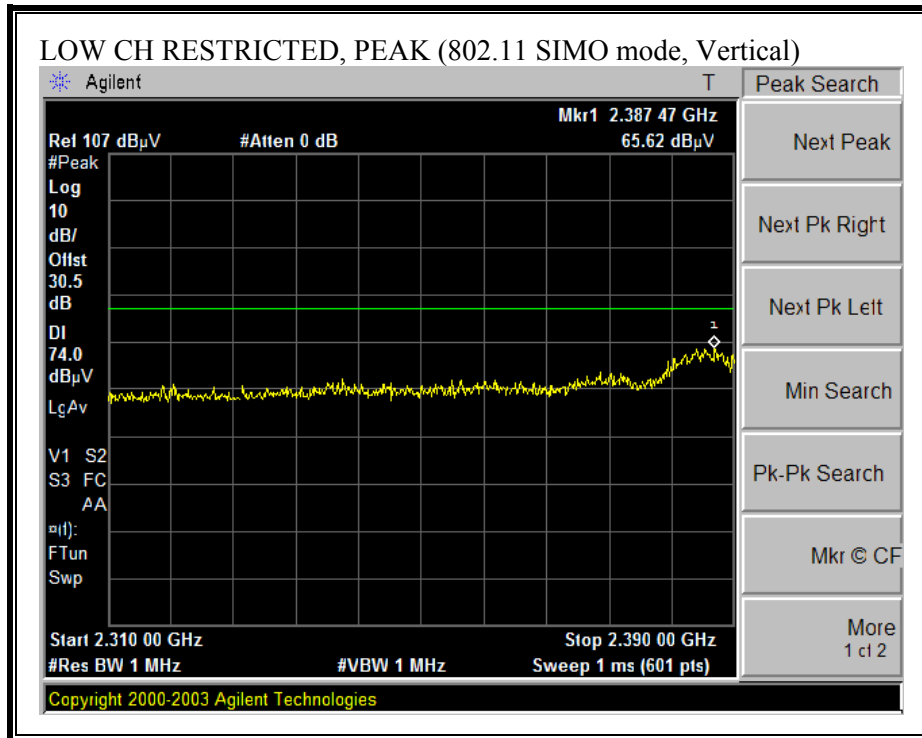

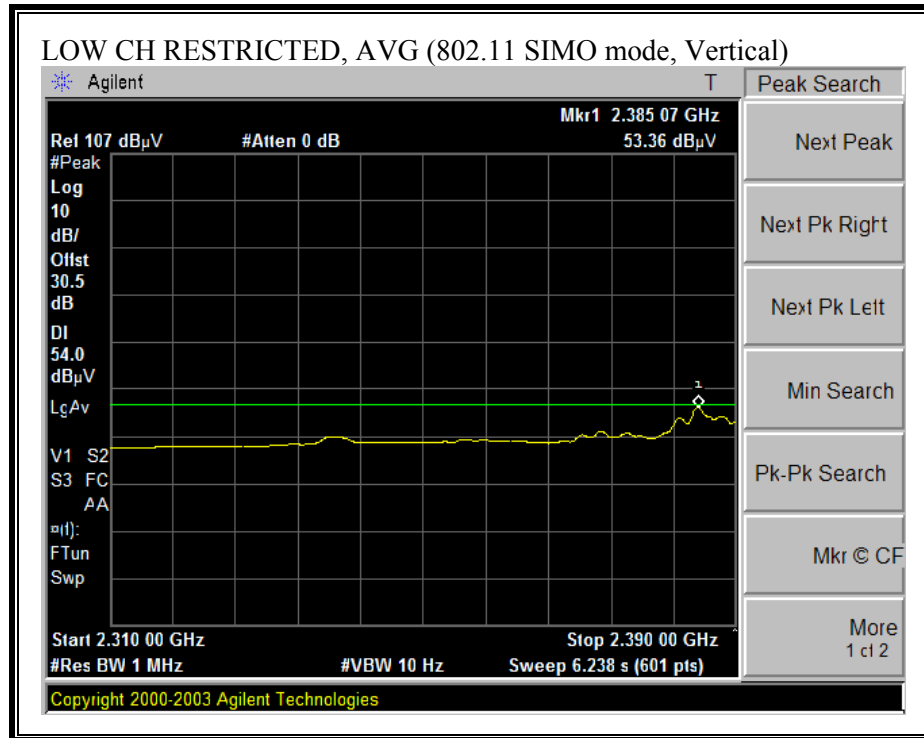

RESTRICTED BANDEDGE (SIMO MODE, HIGH CHANNEL, VERTICAL)

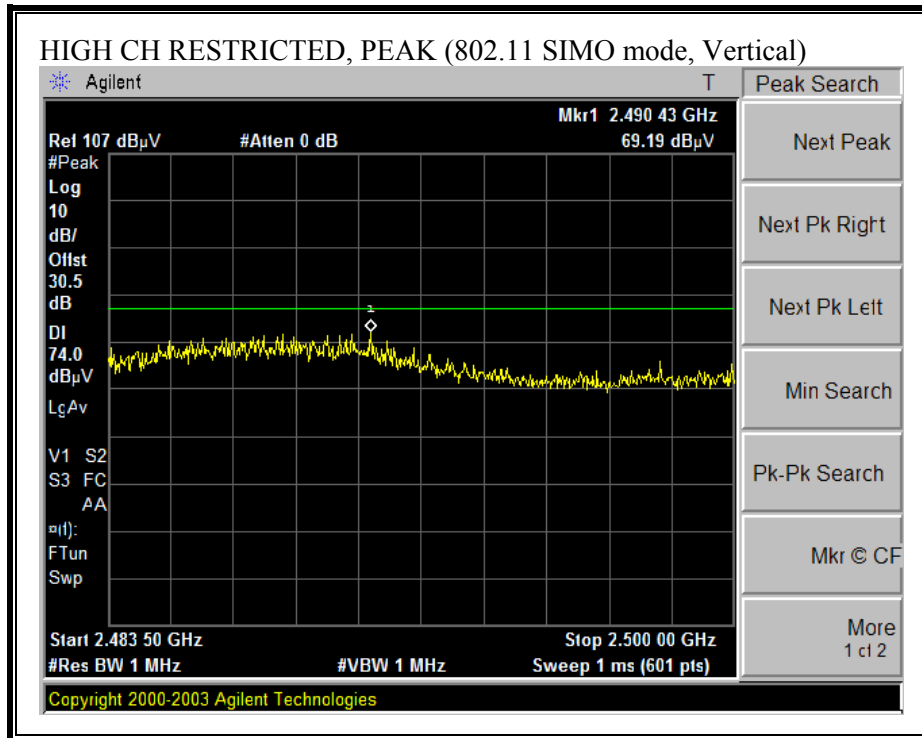

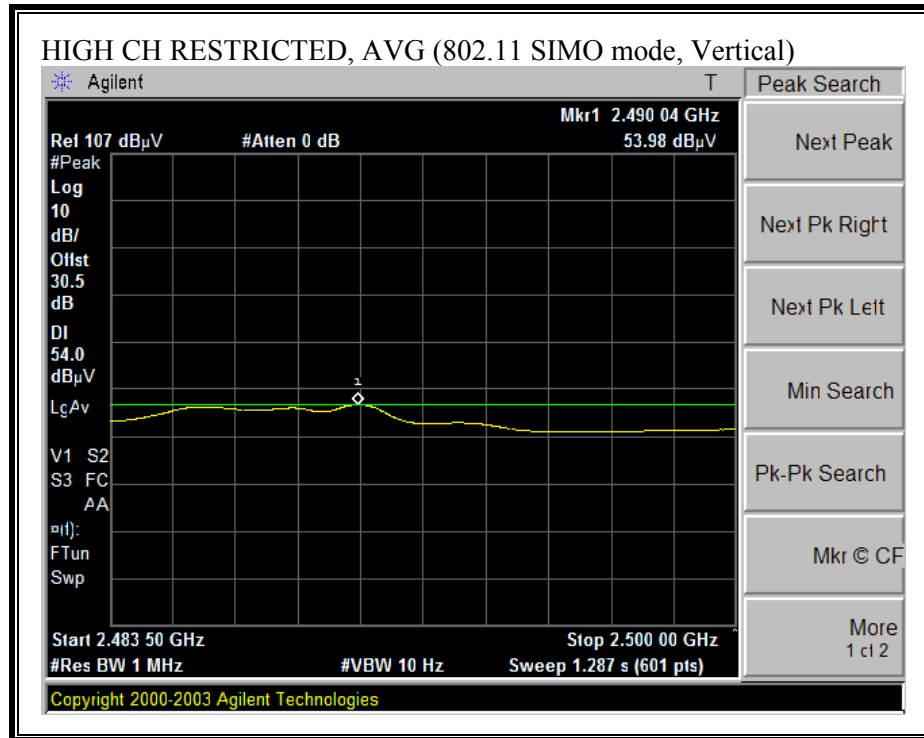

HARMONICS AND SPURIOUS EMISSIONS (SIMO MODE)

12/06/05 **High Frequency Measurement**
Compliance Certification Services, Morgan Hill Open Field Site

Test Engr: Frank Ibrahim
Project #: 05U3719
Company: Airgo
EUT Descrip.: Airgo 3000 Series USB Adapter for 2.4 GHz Client Applications
EUT M/N: AGN3022UB-11
Test Target: FCC 15.247
Configuration: Stand-alone
Mode Oper: TX ON, 11g SIMO mode, 12 Mbps
Power Settings: 15 dBm

Test Equipment:

Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz		
T73; S/N: 6717 @3m	T145 Agilent 3008A0056				
Hi Frequency Cables					
2 foot cable	3 foot cable	12 foot cable	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz
	Frank 177080001	Frank 187209001	HPF_4.0GHz		Average Measurements RBW=1MHz ; VBW=10Hz

f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
Low Channel (2412 MHz)															
4.824	3.0	44.9	33.6	33.7	4.0	-34.8	0.0	0.6	48.3	37.0	74	54	-25.7	-17.0	V
12.060	3.0	44.3	32.6	38.5	5.3	-32.4	0.0	0.9	56.6	44.9	74	54	-17.4	-9.1	V
4.824	3.0	44.2	32.7	33.7	4.0	-34.8	0.0	0.6	47.7	36.1	74	54	-26.3	-17.9	H
12.060	3.0	44.1	32.4	38.5	5.3	-32.4	0.0	0.9	56.4	44.7	74	54	-17.6	-9.3	H
High Channel (2432 MHz)															
4.864	3.0	44.4	32.4	33.8	4.0	-34.9	0.0	0.6	47.9	35.9	74	54	-26.1	-18.1	V
7.296	3.0	46.4	32.9	35.5	4.6	-34.7	0.0	0.6	52.4	39.0	74	54	-21.6	-15.0	V
12.160	3.0	44.4	33.9	38.5	5.4	-32.4	0.0	0.9	56.8	46.3	74	54	-17.2	-7.7	V
4.864	3.0	44.4	33.1	33.8	4.0	-34.9	0.0	0.6	47.9	36.6	74	54	-26.1	-17.4	H
7.296	3.0	49.2	37.0	35.5	4.6	-34.7	0.0	0.6	55.3	43.1	74	54	-18.7	-10.9	H
12.160	3.0	44.8	32.5	38.5	5.4	-32.4	0.0	0.9	57.1	44.9	74	54	-16.9	-9.1	H

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

EUT was scanned from 1 GHz to 25 GHz, no other signals were found above noise floor.

6.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 10 File#: EMI.EMI Date: 10-07-2005 Time: 10:43:44

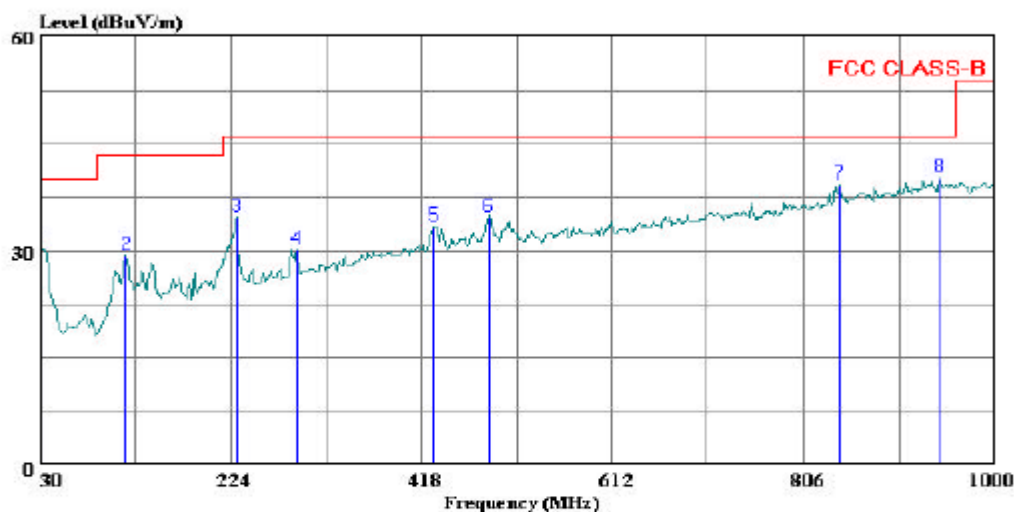

(Auxiliary ATC)

Trace: 9

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : William Zhuang
Project #: : 05U3719
Company: : AIRGO
EUT: : USB
Model No.: : UB322
Configuration : EUT plug onto the extender, Laptop
Target of Test : FCC Class B
Mode of Operation: Tx _11b Mode Worst Case

HORIZONTAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	30.970	9.77	20.45	30.22	40.00	-9.78	Peak
2	117.300	14.39	14.84	29.23	43.50	-14.27	Peak
3	230.790	21.58	13.08	34.66	46.00	-11.34	Peak
4	290.930	14.83	15.33	30.16	46.00	-15.84	Peak
5	430.610	14.59	18.75	33.34	46.00	-12.66	Peak
6	486.870	14.77	19.97	34.74	46.00	-11.26	Peak
7	841.890	14.17	25.11	39.28	46.00	-6.72	Peak
8	943.740	13.76	26.43	40.19	46.00	-5.81	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 12 File#: EMI.EMI Date: 10-07-2005 Time: 10:48:55

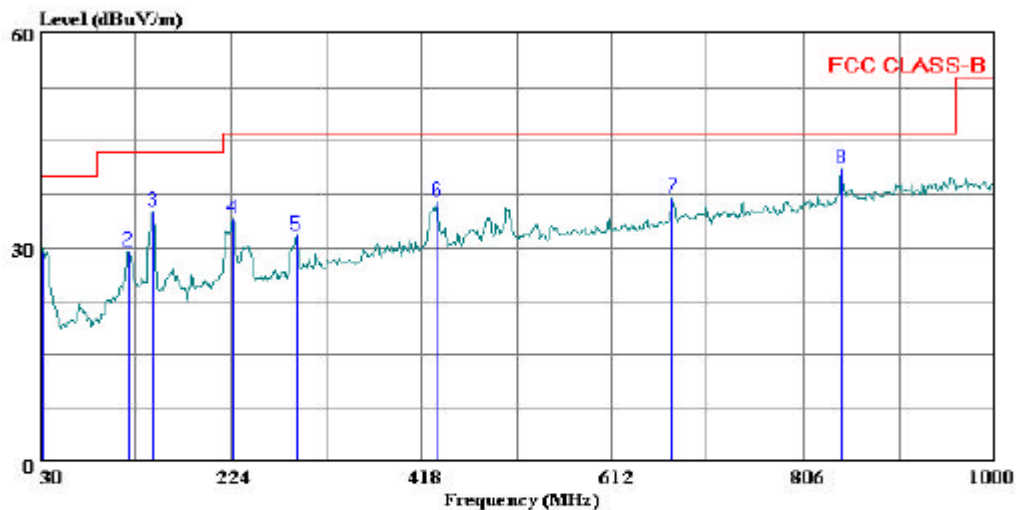

(Audix ATC)

Trace: 11

Ref Trace:

Condition: FCC CLASS-B VERTICAL
Test Operator: : William Zhuang
Project #: : 05U3719
Company: : AIRGO
EUT: : USB
Model No.: : UB322
Configuration : EUT plug onto the extender, Laptop
Target of Test : FCC Class B
Mode of Operation: Tx _11b Mode Worst Case

VERTICAL DATA

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	32.910	9.60	19.94	29.54	40.00	-10.46	Peak
2	120.210	14.36	15.13	29.48	43.50	-14.02	Peak
3	145.430	20.51	14.54	35.05	43.50	-8.46	Peak
4	225.940	21.18	12.91	34.09	46.00	-11.91	Peak
5	290.930	16.49	15.33	31.82	46.00	-14.18	Peak
6	434.490	17.61	18.84	36.45	46.00	-9.55	Peak
7	674.080	14.27	22.71	36.98	46.00	-9.02	Peak
8	843.830	15.88	25.15	41.03	46.00	-4.97	Peak

6.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	FCC_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.16	47.73	--	39.14	0.00	65.36	55.36	-17.63	-16.22	L1
0.56	33.46	--	31.65	0.00	56.00	46.00	-22.54	-14.35	L1
2.49	33.90	--	31.96	0.00	56.00	46.00	-22.10	-14.04	L1
0.16	48.20	--	39.85	0.00	65.31	55.31	-17.11	-15.46	L2
0.48	38.82	--	36.73	0.00	56.27	46.27	-17.45	-9.54	L2
2.08	6.10	--	33.64	0.00	56.00	46.00	-49.90	-12.36	L2
6 Worst Data									

LINE 1 RESULTS

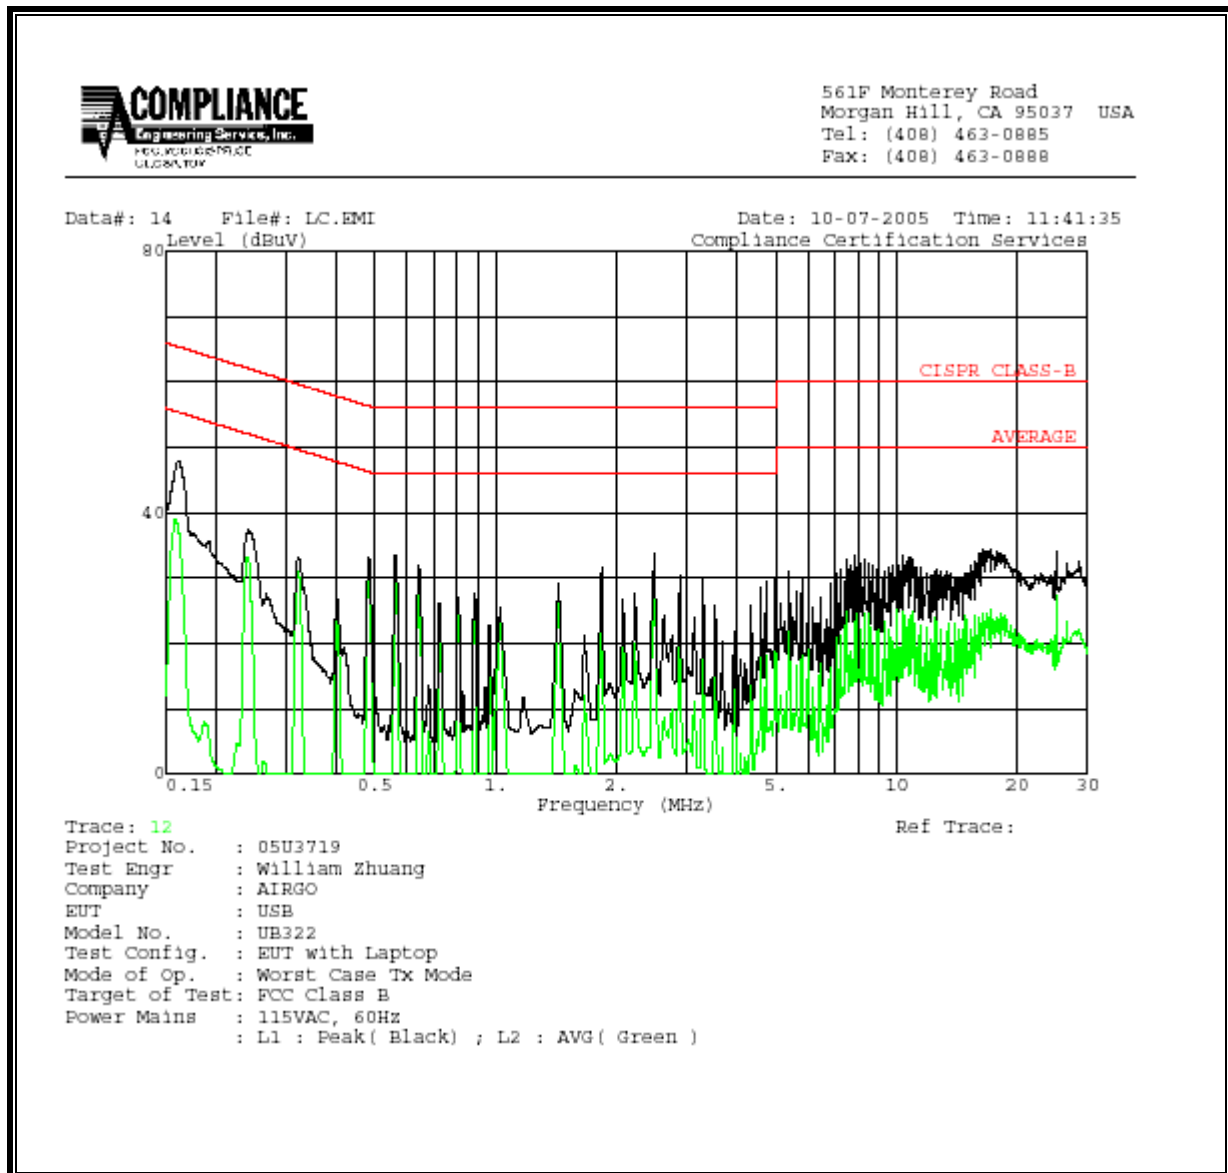


LINE 2 RESULTS

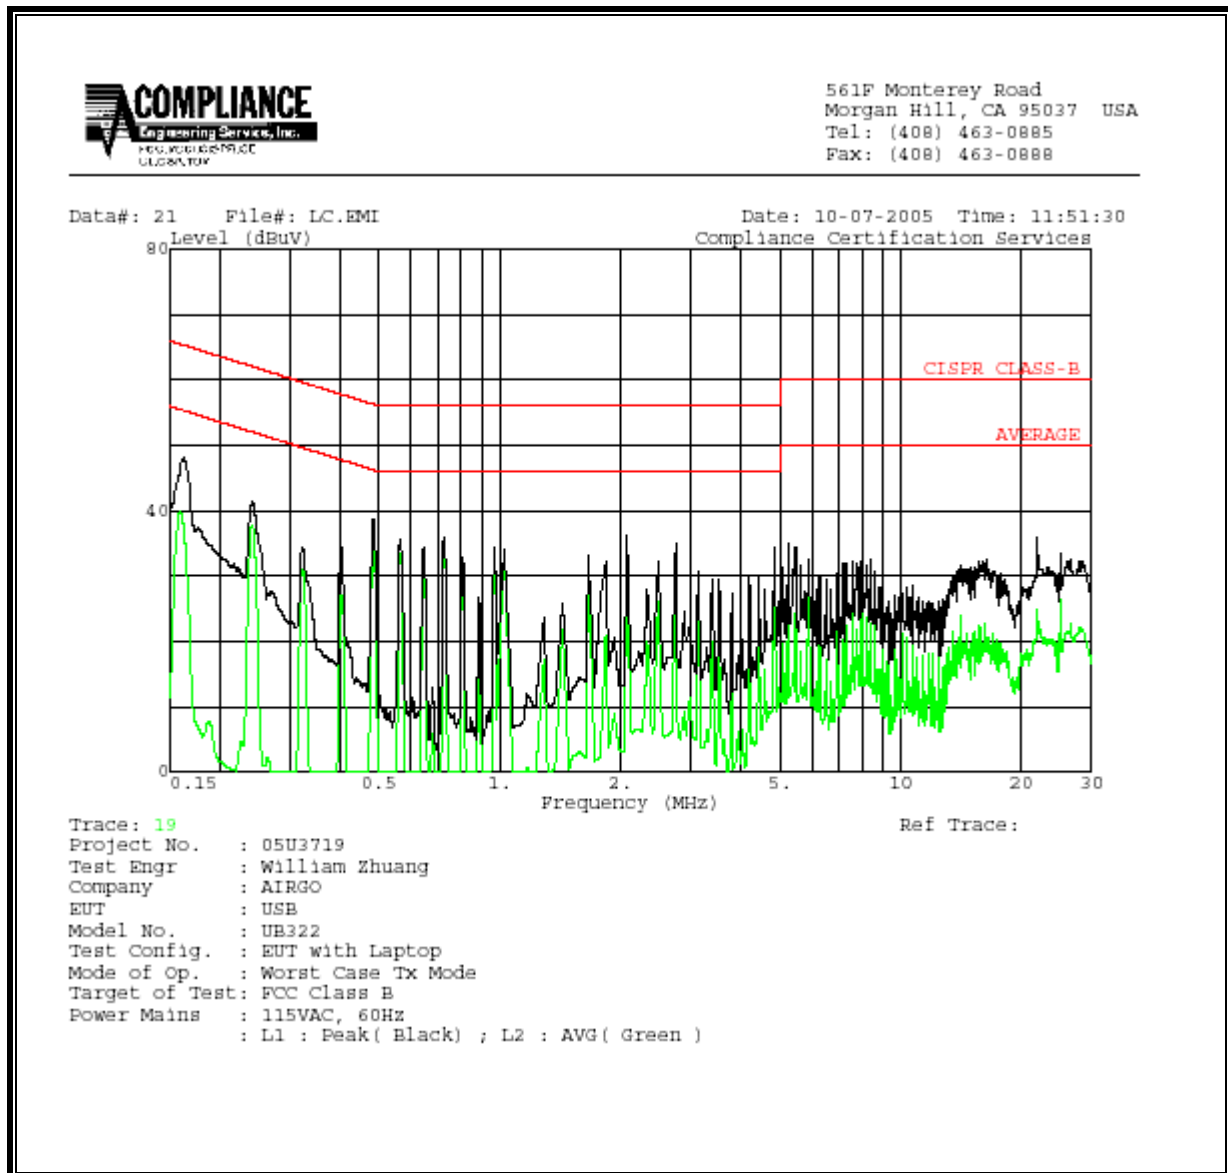

7. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

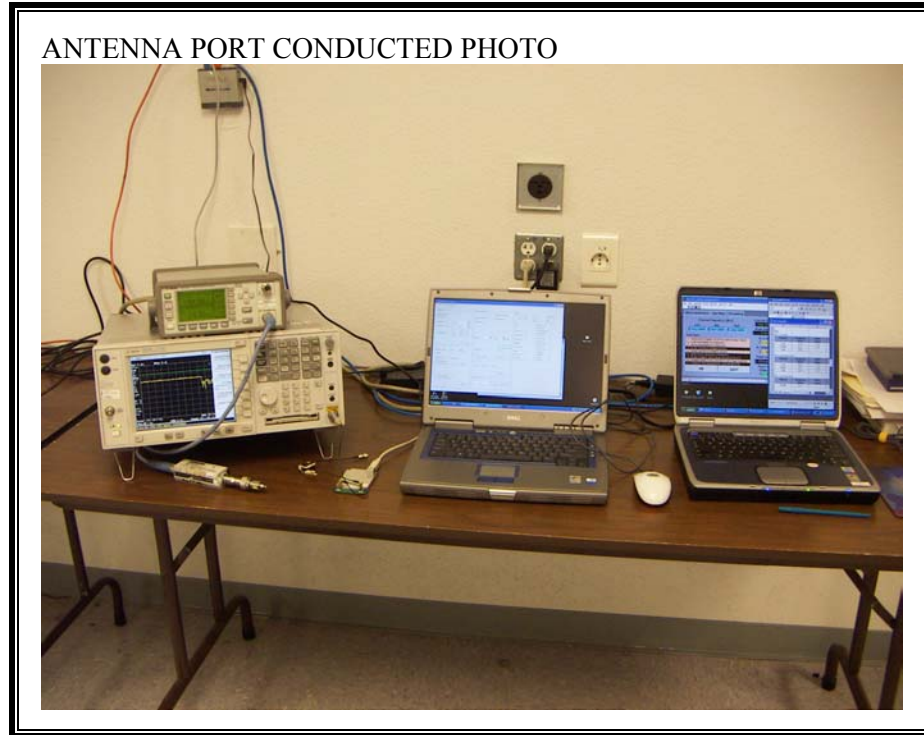


RADIATED RF MEASUREMENT SETUP



RADIATED BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

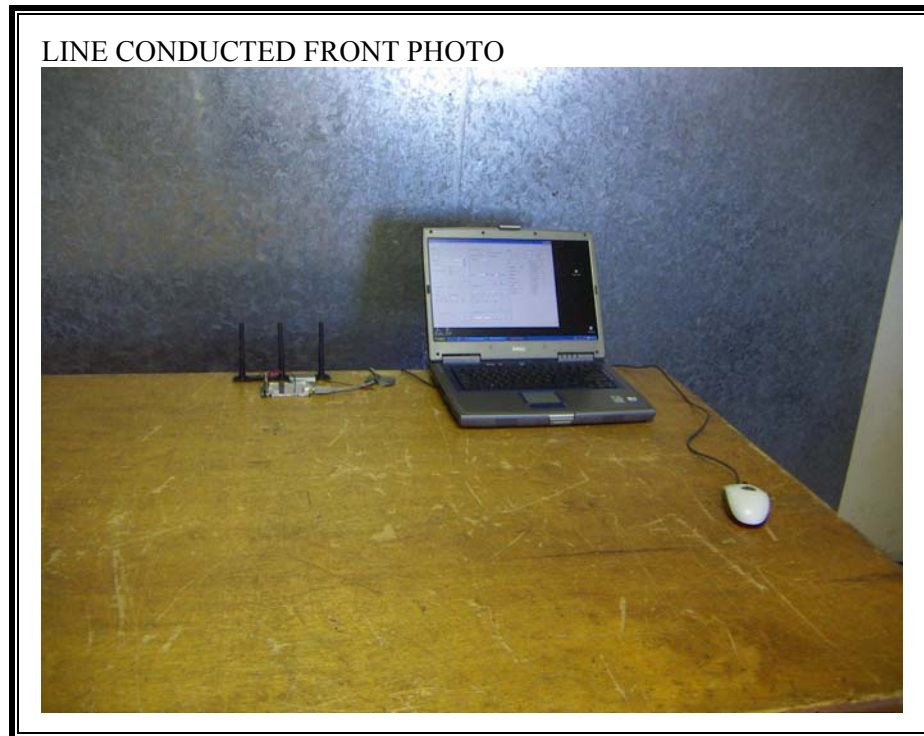

LINE CONDUCTED BACK PHOTO



END OF REPORT