

RF Test Report

Applicant : Meter Inc
Product Type : Meter wireless access point
Trade Name : Meter
Model Number : MW03
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Received Date : May 13, 2020
Test Period : May 22, 2020
Issued Date : Aug. 03, 2020

Issued by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
Frequency Range : 9 kHz to 40 GHz
Test Firm MRA designation number: TW0010

Note:

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.



Revision History

Rev.	Issued Date	Revisions	Revised By
00	Jul. 08, 2020	Initial Issue	Nina Lin
01	Aug. 03, 2020	Update report for Class II Permissive Change required.	Tobey Cheng

Verification of Compliance

Applicant : Meter Inc
Product Type : Meter wireless access point
Trade Name : Meter
Model Number : MW03
FCC ID : 2AVVV-MW03
EUT Rated Voltage : DC 12 V, 2 A
Test Voltage : 120 Vac / 60 Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C
ANSI C63.10:2013
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Fly Lu
(Manager) (Fly Lu)

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result.....	5
1.2.	Measurement Uncertainty.....	6
2	EUT Description	7
3	Test Methodology	9
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step	10
3.3.	Configuration of Test System Details	11
3.4.	Test Instruments	13
3.5.	Test Site Environment.....	13
4	Measurement Procedure	14
4.1.	AC Power Line Conducted Emission Measurement.....	14
4.2.	Radiated Emission Measurement	16
5	Test Results.....	20
	Annex A. Conducted Emission	20
	Annex B. Radiated Emission Measurement	24

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.207	AC Power Conducted Emission	PASS	Note
15.247(d)	Transmitter Radiated Emissions	PASS	Note
15.247(b)(3)	Max. Output Power	N/A	N/A
15.247(a)(2)	6 dB RF Bandwidth	N/A	N/A
15.247(e)	Maximum Power Spectral Density	N/A	N/A
15.247(d)	Out of Band Conducted Spurious Emission	N/A	N/A
15.203	Antenna Requirement	N/A	N/A

Note : Transmitter Radiated Emissions is larger than the original report but not out of 3 dBm. After evaluation above, C2PC is applicable.

After the evaluation, AC Power Conducted and Transmitter Radiated Emissions (Below 1 GHz) need to be re-evaluated.

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart C	Intentional Radiators
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB 558074 D01 15.247 Meas Guidance v05r02	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	150 kHz ~ 30 MHz	2.68
Radiated Emission	9 kHz ~ 30 MHz	2.14
	30 MHz ~ 1000 MHz	4.99
	1000 MHz ~ 18000 MHz	4.99
	18000 MHz ~ 26500 MHz	4.23
	26500 MHz ~ 40000 MHz	4.39



2 EUT Description

Applicant	Meter Inc 148 Townsend Street, San Francisco, California 94107, United States			
Manufacturer	Meter Inc 148 Townsend Street, San Francisco, California 94107, United States			
Product Type	Meter wireless access point			
Trade Name	Meter			
Model Number	MW03			
FCC ID	2AVVV-MW03			
Class II Permissive Change	1. Change Applicant name, Applicant address, Manufacturer name, Manufacturer address, Product Type, Trade Name, Model Number, appearance. 2. Add 256 MB NAND, watchdog IC, LED. 3. Removed USB Port.			
Operate Freq. Band	Frequency Range (MHz)	Modulation	Channel Bandwidth	Data Rate 400 / 800 GI (ns)
IEEE 802.11b	2412 ~ 2462	DSSS	20 MHz	Up to 11 Mbps
IEEE 802.11g	2412 ~ 2462	OFDM	20 MHz	Up to 54 Mbps
IEEE 802.11n 2.4 GHz 20 MHz	2412 ~ 2462	OFDM (64QAM/256QAM)	20 MHz	Up to 346.8 Mbps
IEEE 802.11n 2.4 GHz 40 MHz	2422 ~ 2452	OFDM (64QAM/256QAM)	40 MHz	Up to 800 Mbps
Antenna information	ANT	Model Number	Type	Max. Gain (dBi)
	ANT-0	5718A0346300	Metal PIFA Antenna	2.86
	ANT-1	5718A0347300	Metal PIFA Antenna	3.12
	ANT-2	5718A0348300	Metal PIFA Antenna	3.14
	ANT-3	5718A0349300	Metal PIFA Antenna	3.29
Antenna Delivery	See section 3.1			
Operate Temp. Range	0 ~ +50 °C			



Frequency Band	Max. RF Output Power (W)
IEEE 802.11b	0.243
IEEE 802.11g	0.163
IEEE 802.11n 2.4 GHz 20 MHz (64QAM)	0.151
IEEE 802.11n 2.4 GHz 40 MHz (64QAM)	0.173
IEEE 802.11n 2.4 GHz 20 MHz (256QAM)	0.159
IEEE 802.11n 2.4 GHz 40 MHz (256QAM)	0.182

Beamforming on

Frequency Band	Max. RF Output Power (W)
IEEE 802.11n 2.4 GHz 20 MHz (256QAM)	0.036
IEEE 802.11n 2.4 GHz 40 MHz (256QAM)	0.041

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11b Continuous TX mode
Mode 3: IEEE 802.11g Continuous TX mode
Mode 4: IEEE 802.11n 2.4 GHz 20 MHz (64QAM) Continuous TX mode
Mode 5: IEEE 802.11n 2.4 GHz 40 MHz (64QAM) Continuous TX mode
Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode
Mode 7: IEEE 802.11n 2.4 GHz 40 MHz (256QAM) Continuous TX mode

Final Mode
Mode 1: Transmit mode
Mode 2: IEEE 802.11b Continuous TX mode
Mode 6: IEEE 802.11n 2.4 GHz 20 MHz (256QAM) Continuous TX mode

Software used to control the EUT for staying in continuous transmitting mode was programmed.

After verification, all tests were carried out with the worst case test modes.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note: Investigation has been done on all the possible configurations for searching the worst cases (256QAM covers 64QAM). The table is a list of the test modes show in this test report.

Test Mode	ANT-0	ANT-1	ANT-2	ANT-3	ANT-0+1+2+3
Mode 2	V	V	V	V	V
Mode 3	V	V	V	V	V
Mode 4	V	V	V	V	V
Mode 5	V	V	V	V	V
Mode 6	V	V	V	V	V
Mode 7	V	V	V	V	V

Test Mode	Antenna Delivery	Data Rate (Mbps)	Test Channel
Mode 2	4TX / 4RX (CDD)	1	1, 6, 11
Mode 3	4TX / 4RX (CDD)	6	1, 6, 11
Mode 4	4TX / 4RX (STBC)	26	1, 6, 11
Mode 5	4TX / 4RX (STBC)	54	3, 6, 9
Mode 6	4TX / 4RX (STBC/Beamforming on)	26	1, 6, 11
Mode 7	4TX / 4RX (STBC/Beamforming on)	54	3, 6, 9


3.2. EUT Test Step

1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	Turn on TX function.
4.	EUT run test program.


Measurement Software			
No.	Description	Software	Version
1	Conducted Emission	EZ EMC	1.1.4.3
2	Radiated Emission	EZ EMC	1.1.4.4

3.3. Configuration of Test System Details


Conducted Emissions_AC Adapter

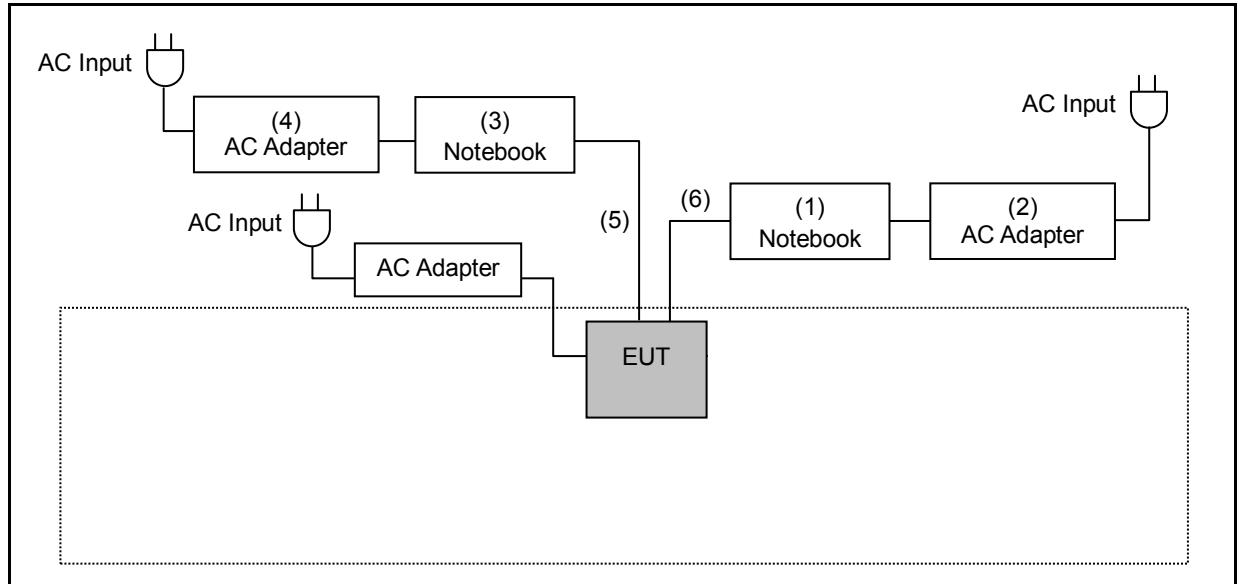

Conducted Emissions_PoE Adapter

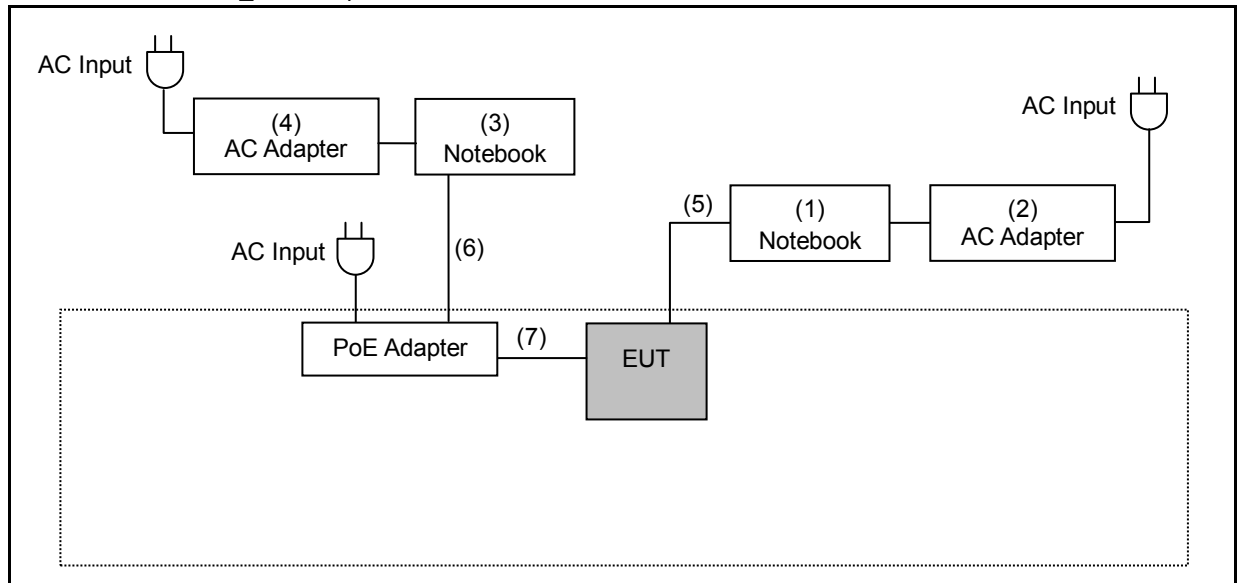

Radiated Emission

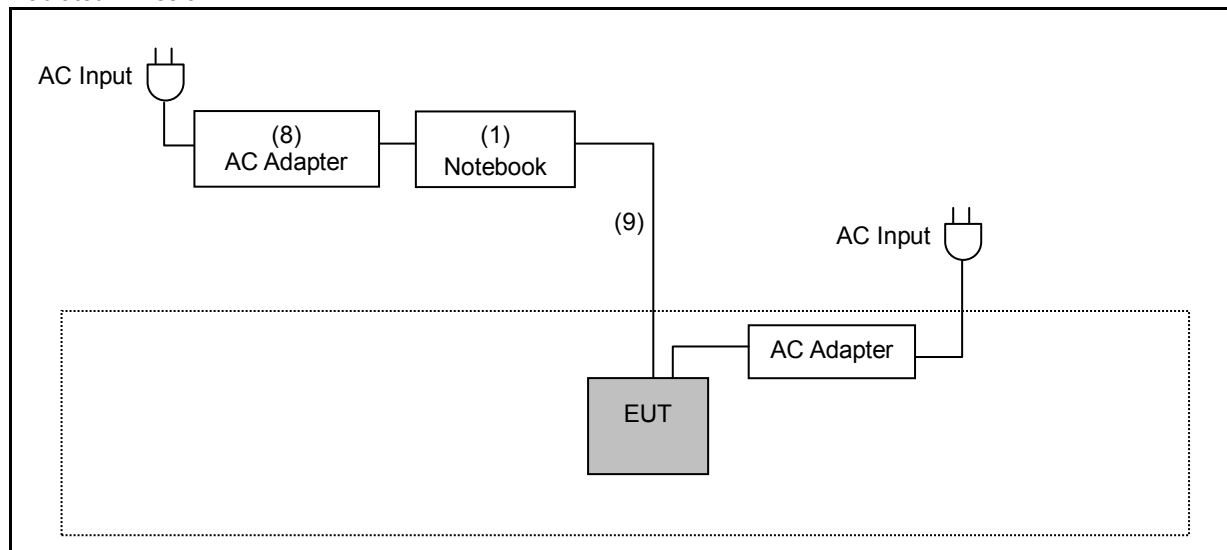

Devices Description					
	Product	Manufacturer	Model Number	Serial Number	Power Cord
(1)	Notebook	DELL	LATITUDE E6440	5HZBD72	---
(2)	AC Adapter	DELL	HA65NM130	---	Non-Shielded, 1.7 m
(3)	Notebook	DELL	LATITUDE E6440	48GBD72	---
(4)	AC Adapter	DELL	HA65NM130	---	Non-Shielded, 1.7 m
(5)	RJ45 Cable	HUAWEI	UL2464	---	---
(6)	RJ45 Cable	HUAWEI	UL2464	---	---
(7)	RJ45 Cable	HUAWEI	UL2464	---	---
(8)	AC Adapter	DELL	HA65NM130	---	Non-Shielded, 0.8 m
(9)	LAN Cable	TATUNG	CAT5E	---	---

3.4. Test Instruments

For Conducted Emission

Test Period: May 22, 2020

Testing Engineer: Paul Chiu

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/23/2019	1 year
LISN	R&S	ENV216	101040	03/23/2020	1 year
LISN	R&S	ENV216	101041	04/06/2020	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/23/2019	1 year

For Radiated Emissions

Test Period: May 22, 2020

Testing Engineer: Ricky Liu

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/13/2020	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/15/2020	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/23/2019	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/27/2020	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2020	1 year
Microwave Cable	EMCI	EMC104-SM- SM-13000	170814	10/29/2019	1 year
Microwave Cable	EMCI	EMC102-KM- KM-14000	151001	02/20/2020	1 year

Note: N.C.R. = No Calibration Request.

3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75


4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

■ Test Setup

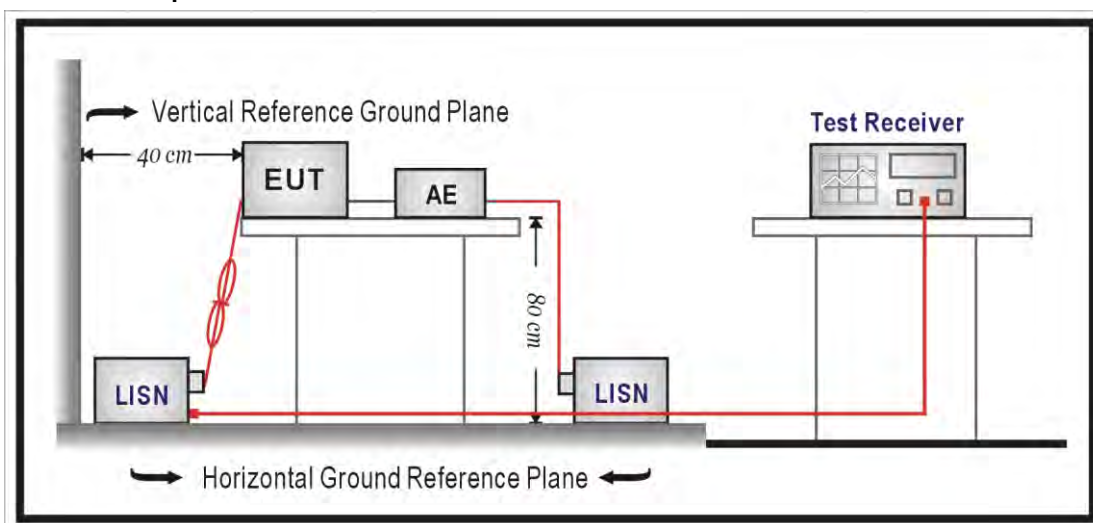

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a $50\ \Omega // 50\ \mu\text{H}$ coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All $50\ \Omega$ ports of the LISN shall be resistively terminated into $50\ \Omega$ loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored.

4.2. Radiated Emission Measurement

■ Limit


According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	$2400 / F$ (kHz)	300
0.490 – 1.705	$24000 / F$ (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3


** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

■ Setup


9 kHz ~ 30 MHz

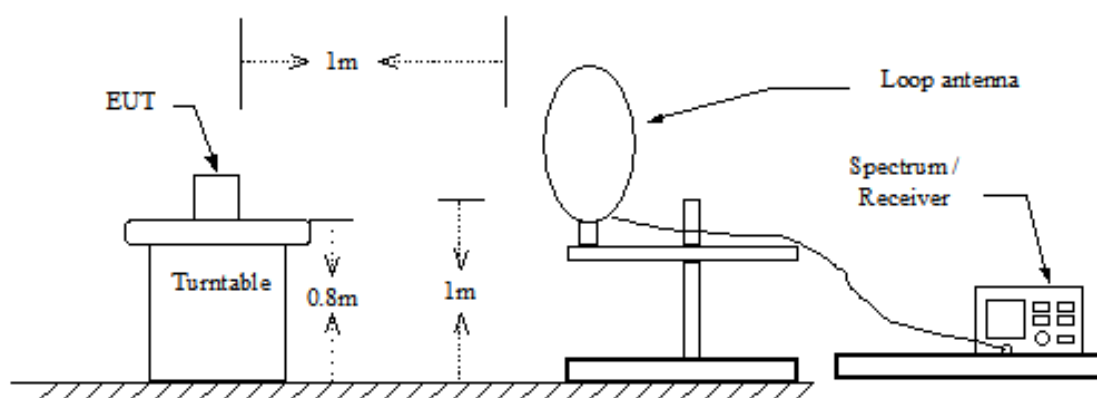

Below 1 GHz

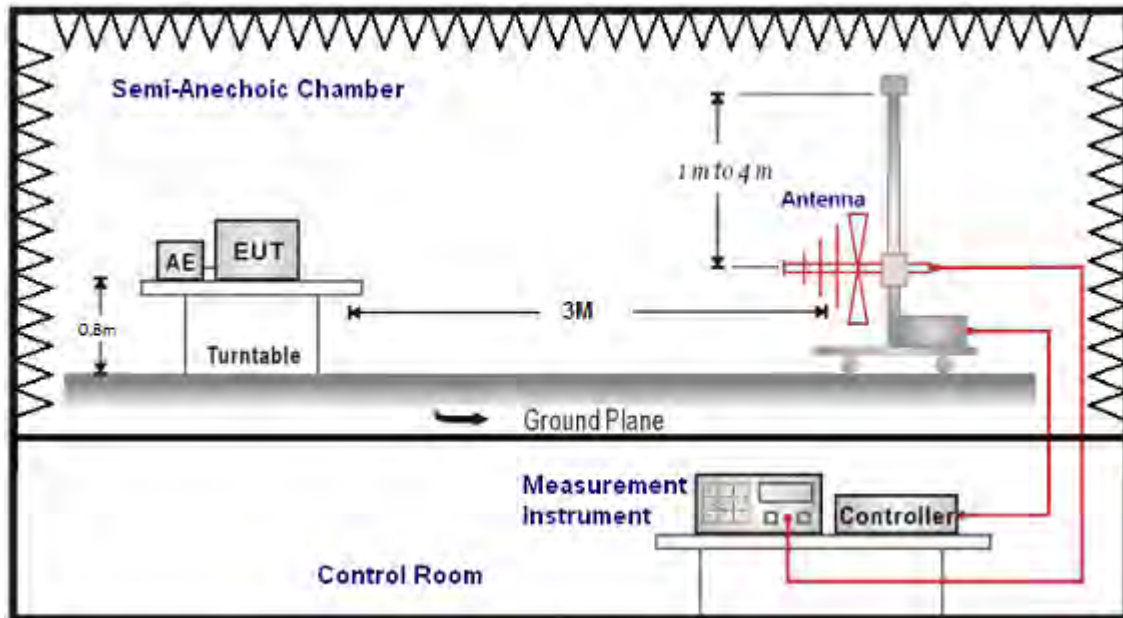

Above 1 GHz

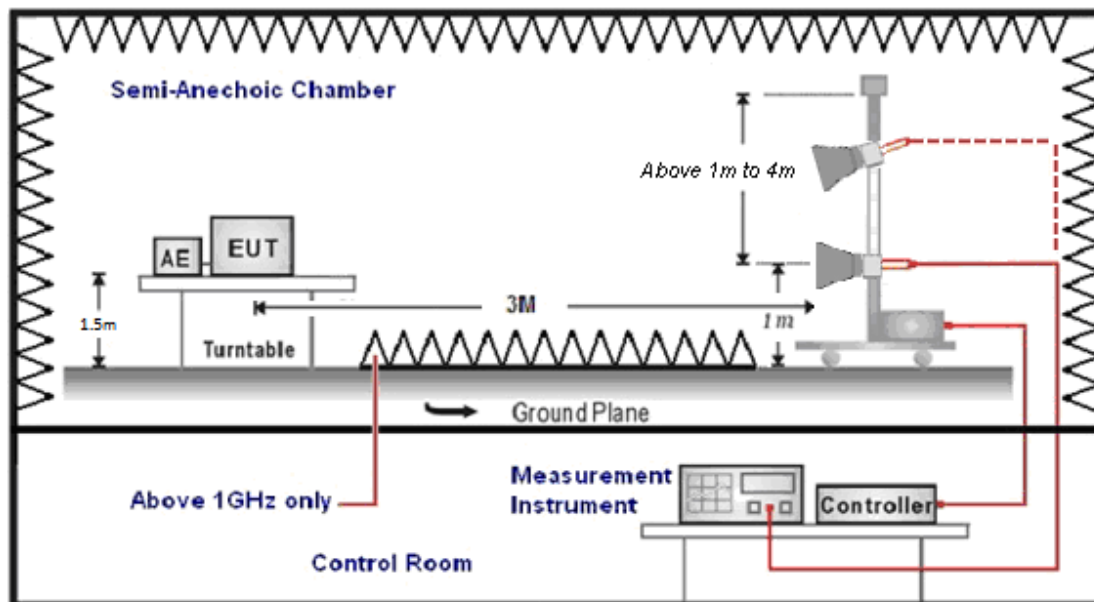

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements when Duty cycle >0.98 / $1/T$ for average measurements when Duty cycle <0.98 . A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 –26.5 GHz at a distance of 3 meter. The antenna at an angle toward the source of the emission. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30 dBm


(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

5 Test Results

Annex A. Conducted Emission

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	AC Adapter		

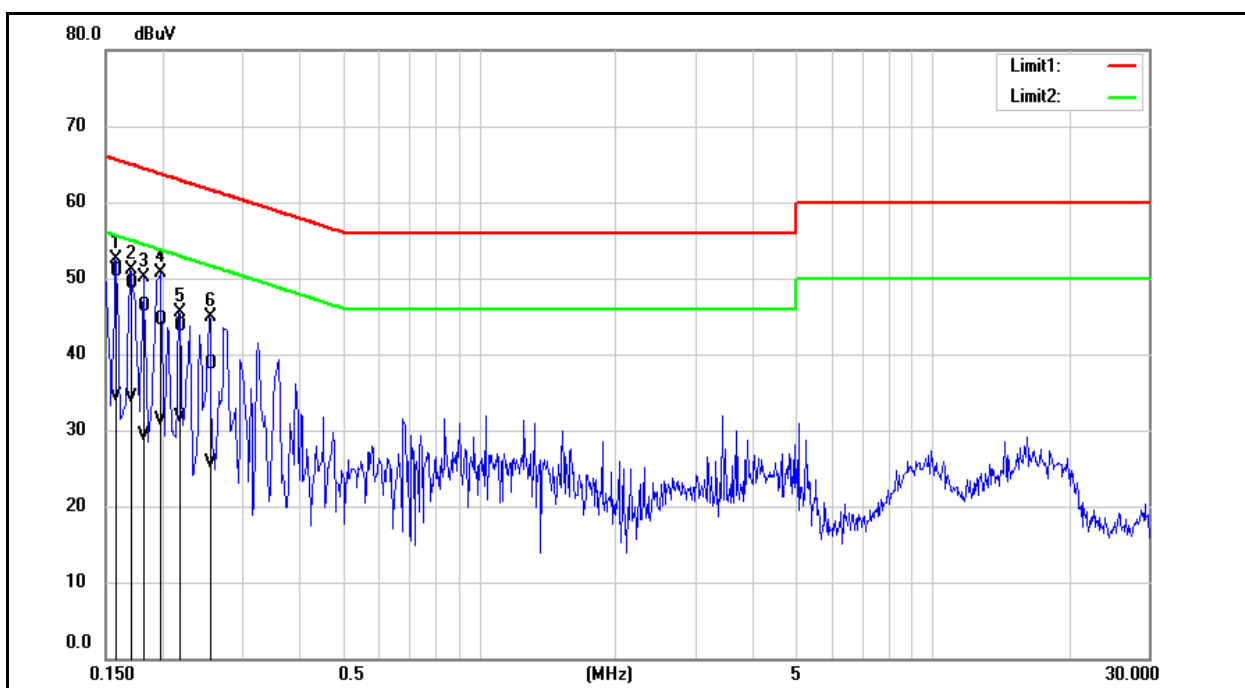


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1580	41.17	24.92	9.65	50.82	34.57	65.57	55.57	-14.75	-21.00	Pass
2	0.1700	39.57	24.69	9.65	49.22	34.34	64.96	54.96	-15.74	-20.62	Pass
3	0.1820	36.59	19.76	9.64	46.23	29.40	64.39	54.39	-18.16	-24.99	Pass
4	0.1980	34.92	21.62	9.64	44.56	31.26	63.69	53.69	-19.13	-22.43	Pass
5	0.2180	34.07	22.03	9.64	43.71	31.67	62.89	52.89	-19.18	-21.22	Pass
6	0.2540	29.07	16.16	9.64	38.71	25.80	61.63	51.63	-22.92	-25.83	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).


Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	AC Adapter		

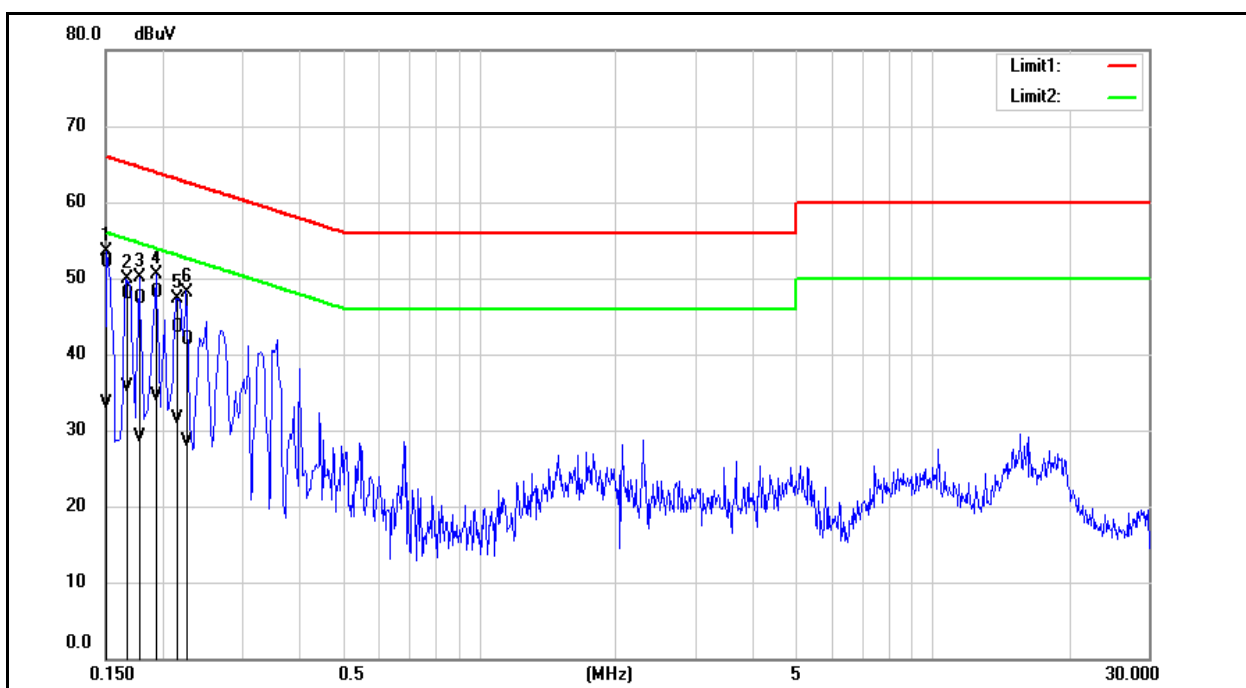

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1508	42.42	23.90	9.68	52.10	33.58	65.96	55.96	-13.86	-22.38	Pass
2	0.1660	38.31	25.95	9.68	47.99	35.63	65.16	55.16	-17.17	-19.53	Pass
3	0.1780	37.71	19.50	9.67	47.38	29.17	64.58	54.58	-17.20	-25.41	Pass
4	0.1940	38.40	24.85	9.67	48.07	34.52	63.86	53.86	-15.79	-19.34	Pass
5	0.2140	33.77	21.74	9.67	43.44	31.41	63.05	53.05	-19.61	-21.64	Pass
6	0.2260	32.24	18.84	9.67	41.91	28.51	62.60	52.60	-20.69	-24.09	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	L1
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	PoE Adapter		

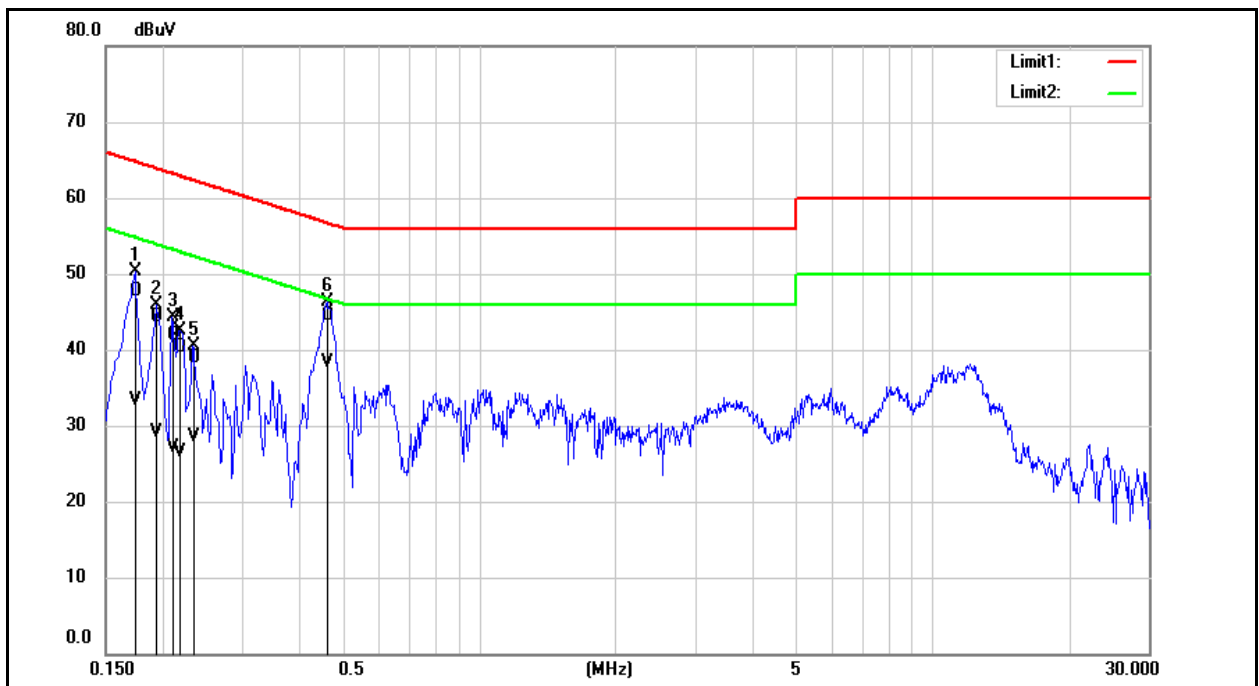


No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1740	38.12	23.71	9.65	47.77	33.36	64.77	54.77	-17.00	-21.41	Pass
2	0.1940	34.66	19.42	9.64	44.30	29.06	63.86	53.86	-19.56	-24.80	Pass
3	0.2100	32.27	17.49	9.64	41.91	27.13	63.21	53.21	-21.30	-26.08	Pass
4	0.2180	30.59	16.90	9.64	40.23	26.54	62.89	52.89	-22.66	-26.35	Pass
5	0.2340	29.19	18.90	9.64	38.83	28.54	62.31	52.31	-23.48	-23.77	Pass
6	0.4620	34.90	28.60	9.66	44.56	38.26	56.66	46.66	-12.10	-8.40	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).

2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Standard:	FCC Part 15.247	Line:	N
Test item:	Conducted Emission	Power:	AC 120 V/60 Hz
Mode:	Mode 1	Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH
Description:	PoE Adapter		

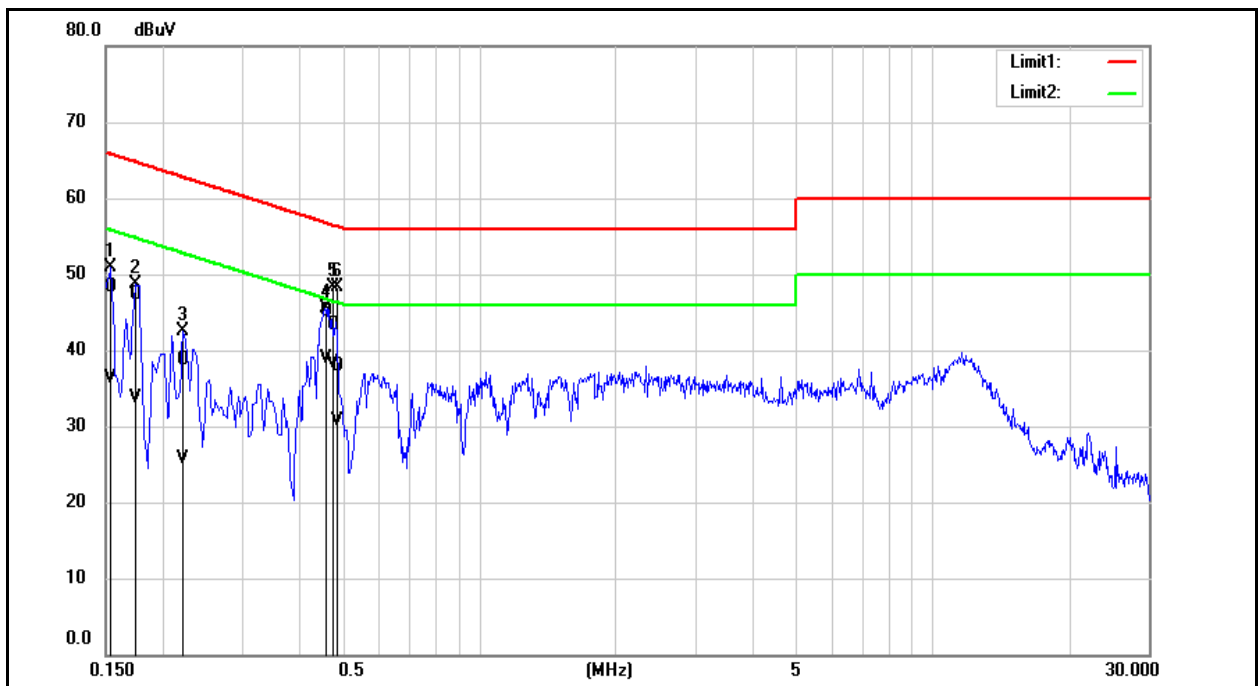

No.	Frequency (MHz)	QP reading (dBuV)	AVG reading (dBuV)	Correction factor (dB)	QP result (dBuV)	AVG result (dBuV)	QP limit (dBuV)	AVG limit (dBuV)	QP margin (dB)	AVG margin (dB)	Remark
1	0.1540	38.65	26.63	9.68	48.33	36.31	65.78	55.78	-17.45	-19.47	Pass
2	0.1740	37.69	24.02	9.68	47.37	33.70	64.77	54.77	-17.40	-21.07	Pass
3	0.2220	29.09	15.94	9.67	38.76	25.61	62.74	52.74	-23.98	-27.13	Pass
4	0.4580	35.36	29.27	9.69	45.05	38.96	56.73	46.73	-11.68	-7.77	Pass
5	0.4740	33.55	28.56	9.69	43.24	38.25	56.44	46.44	-13.20	-8.19	Pass
6	0.4860	28.29	21.02	9.69	37.98	30.71	56.24	46.24	-18.26	-15.53	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).
2. Correction factor (dB) = Cable loss (dB) + L.I.S.N. factor (dB).

Annex B. Radiated Emission Measurement

Below 1 GHz

Standard:	FCC Part 15.247			Test Distance:	3 m		
Test item:	Radiated Emission			Power:	AC 120 V/60 Hz		
Frequency:	2412 MHz			Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH		
Mode:	Mode 2						
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
137.6700	40.99	-6.50	34.49	43.50	-9.01	QP	H
327.7900	38.71	-3.76	34.95	46.00	-11.05	QP	H
489.7800	33.98	-0.25	33.73	46.00	-12.27	QP	H
624.6100	30.42	2.70	33.12	46.00	-12.88	QP	H
691.5400	29.62	3.76	33.38	46.00	-12.62	QP	H
838.9800	28.71	6.47	35.18	46.00	-10.82	QP	H
118.2700	43.68	-8.59	35.09	43.50	-8.41	QP	V
165.8000	39.63	-5.65	33.98	43.50	-9.52	QP	V
288.0200	33.30	-4.50	28.80	46.00	-17.20	QP	V
458.7400	33.53	-0.61	32.92	46.00	-13.08	QP	V
604.2400	30.37	2.53	32.90	46.00	-13.10	QP	V
812.7900	28.69	6.02	34.71	46.00	-11.29	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 34.49=-6.50+40.99.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Beamforming on

Standard:	FCC Part 15.247			Test Distance:	3 m		
Test item:	Harmonic			Power:	AC 120 V/60 Hz		
Frequency:	2462 MHz			Temp.(°C)/Hum.(%RH):	26(°C)/60 %RH		
Mode:	Mode 6						
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
138.6400	39.46	-6.39	33.07	43.50	-10.43	QP	H
174.5300	39.11	-6.16	32.95	43.50	-10.55	QP	H
327.7900	38.34	-3.76	34.58	46.00	-11.42	QP	H
521.7900	33.70	0.37	34.07	46.00	-11.93	QP	H
661.4700	30.21	3.15	33.36	46.00	-12.64	QP	H
812.7900	29.25	6.02	35.27	46.00	-10.73	QP	H
136.7000	40.41	-6.61	33.80	43.50	-9.70	QP	V
183.2600	41.10	-6.90	34.20	43.50	-9.30	QP	V
330.7000	32.56	-3.71	28.85	46.00	-17.15	QP	V
468.4400	30.63	-0.49	30.14	46.00	-15.86	QP	V
696.3900	29.28	3.85	33.13	46.00	-12.87	QP	V
827.3400	30.32	6.28	36.60	46.00	-9.40	QP	V

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

---END---