



TEST REPORT

Report No. : **CTC2024234907**

FCC ID..... : **2AASG-CS2290**

Applicant : **Shenzhen MinDe Electronics Technology Ltd.**

Address..... : 5th Floor, Section 1, 25th Block, No.5, Kezhi Xi Road, Keji Yuan,
Nanshan District, Shenzhen, P.R. China

Manufacturer..... : Shenzhen MinDe Electronics Technology Ltd.

Address..... : 5th Floor, Section 1, 25th Block, No.5, Kezhi Xi Road, Keji Yuan,
Nanshan District, Shenzhen, P.R. China

Product Name : **Cordless Image Scanner**

Trade Mark : **MINDEO**

Model/Type reference..... : CS2290-HD(BT)

Listed Model(s) : CS2XXX-XX, CS2XXX-XX(BT), CS2XXXS-XX,
CS2XXXS-XX(BT) (X Stand for 0-9, A-Z)

Standard : **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Test Report Form No : CTC-TR-059_A1

Master TRF : Dated 2024-09-20

Date of receipt of test sample..... : Aug. 26, 2024

Date of testing..... : Aug. 26, 2024 to Oct. 30, 2024

Date of issue..... : Dec. 25, 2024

Result..... : **PASS**

Compiled by:

(Printed name+signature)

Jim Jiang

Jim Jiang

Supervised by:

(Printed name+signature)

Eric Zhang

Eric Zhang

Approved by:

(Printed name+signature)

Totti Zhao

Totti Zhao

This test report may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CTC. The Test Result in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CTC within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.

**Table of Contents****Page**

1. TEST SUMMARY	3
1.1. TEST STANDARDS.....	3
1.2. REPORT VERSION	3
1.3. TEST DESCRIPTION.....	3
1.4. TEST FACILITY	4
1.5. MEASUREMENT UNCERTAINTY	5
1.6. ENVIRONMENTAL CONDITIONS.....	5
2. GENERAL INFORMATION	6
2.1. CLIENT INFORMATION	6
2.2. GENERAL DESCRIPTION OF EUT	6
2.3. ACCESSORY EQUIPMENT INFORMATION	7
2.4. OPERATION STATE	8
2.5. MEASUREMENT INSTRUMENTS LIST	9
4. TEST ITEM AND RESULTS	10
4.1. CONDUCTED EMISSION.....	10
4.2. RADIATED EMISSION.....	13
4.3. BAND EDGE EMISSIONS (RADIATED)	27
4.4. BAND EDGE AND SPURIOUS EMISSIONS (CONDUCTED)	40
4.5. 20dB BANDWIDTH.....	50
4.6. CHANNEL SEPARATION.....	55
4.7. NUMBER OF HOPPING CHANNEL.....	57
4.8. DWELL TIME	59
4.9. PEAK OUTPUT POWER	64
4.10. DUTY CYCLE	65
4.11. ANTENNA REQUIREMENT.....	69



1. TEST SUMMARY

1.1. Test Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Operation within the bands 902–928MHz, 2400–2483.5MHz, and 5725–5850MHz.

[ANSI C63.10-2013](#): American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.2. Report Version

Revised No.	Report No.	Date of issue	Description
01	CTC2024234907	Dec. 25, 2024	Original

1.3. Test Description

FCC Part 15 Subpart C (15.247)/ RSS-247 Issue 3				
Test Item	Standard Section		Result	Test Engineer
	FCC	ISED		
Antenna Requirement	15.203	RSS-Gen 6.8	Pass	Jim Jiang
Conducted Emission	15.207	RSS-Gen 8.8	Pass	Jim Jiang
Restricted Bands	15.205	RSS-Gen 8.10	Pass	Jim Jiang
Hopping Channel Separation	15.247(a)(1)	RSS-247 5.1 (b)	Pass	Jim Jiang
Dwell Time	15.247(a)(iii)	RSS-247 5.1 (d)	Pass	Jim Jiang
Peak Output Power	15.247(b)(1)	RSS-247 5.4 (b)	Pass	Jim Jiang
Number of Hopping Frequency	15.247(a)(iii)	RSS-247 5.1 (d)	Pass	Jim Jiang
Conducted Band Edge and Spurious Emissions	15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Band Edge and Spurious Emissions	15.205&15.209&15.247(d)	RSS-247 5.5	Pass	Jim Jiang
Radiated Spurious Emission	15.247(d)&15.209	RSS-247 5.5&RSS-Gen 8.9	Pass	Jim Jiang
20dB Bandwidth	15.247(a)	RSS-247 5.1 (b)	Pass	Jim Jiang

Note:

1. The measurement uncertainty is not included in the test result.
2. N/A: means this test item is not applicable for this device according to the technology characteristic of device.



1.4. Test Facility

Address of the report laboratory

CTC Laboratories, Inc.

Add: Room 101 of Building B, Room 107, 108, 207, 208 of Building A, No. 7, Lanqing 1st Road, Luh Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

A2LA-Lab Cert. No.: 4340.01

CTC Laboratories, Inc. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

Industry Canada (Registration No.: 9783A, CAB Identifier: CN0029)

CTC Laboratories, Inc. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration NO.: 9783A on Jan, 2016.

FCC (Registration No.: 951311, Designation Number CN1208)

CTC Laboratories, Inc. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 951311, Aug 26, 2017.



1.5. Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the CTC Laboratories, Inc. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Below is the best measurement capability for CTC Laboratories, Inc.

Test Items	Measurement Uncertainty	Notes
20dB Emission Bandwidth	$\pm 0.0196\%$	(1)
Carrier Frequency Separation	$\pm 1.9\%$	(1)
Number of Hopping Channel	$\pm 1.9\%$	(1)
Time of Occupancy	$\pm 0.028\%$	(1)
Max Peak Conducted Output Power	± 0.743 dB	(1)
Band-edge Spurious Emission	± 1.328 dB	(1)
Conducted RF Spurious Emission	9kHz-1GHz: ± 0.746 dB 1GHz-26GHz: ± 1.328 dB	(1)
Conducted Emissions 9kHz~30MHz	± 3.08 dB	(1)
Radiated Emissions 9kHz~30MHz	± 4.26 dB	(1)
Radiated Emissions 30~1000MHz	± 4.51 dB	(1)
Radiated Emissions 1~18GHz	± 5.84 dB	(1)
Radiated Emissions 18~40GHz	± 6.12 dB	(1)

Note (1): This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

1.6. Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15 °C to 35 °C
Relative Humidity:	20 % to 75 %
Air Pressure:	101 kPa



2. GENERAL INFORMATION

2.1. Client Information

Applicant:	Shenzhen MinDe Electronics Technology Ltd.
Address:	5th Floor, Section 1, 25th Block, No.5, Kezhi Xi Road, Keji Yuan, Nanshan District, Shenzhen, P.R. China
Manufacturer:	Shenzhen MinDe Electronics Technology Ltd.
Address:	5th Floor, Section 1, 25th Block, No.5, Kezhi Xi Road, Keji Yuan, Nanshan District, Shenzhen, P.R. China

2.2. General Description of EUT

Product Name:	Cordless Image Scanner
Trade Mark:	MINDEO
Model/Type reference:	CS2290-HD(BT)
Listed Model(s):	CS2XXX-XX, CS2XXX-XX(BT), CS2XXXS-XX, CS2XXXS-XX(BT) (X Stand for 0-9, A-Z)
Model Difference:	All these models are identical in the same PCB, layout, electrical circuit and enclosure. The difference is the model name.
Sample ID:	CTC240926-006-S002, CTC240926-006-S003
Power Supply:	5V \Rightarrow 0.5A from Cradle 3.7V 2600mAh from lithium battery
Hardware Version:	/
Software Version:	/
Bluetooth 4.2 / BR+EDR	
Modulation:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Operation Frequency:	2402MHz~2480MHz
Channel Number:	79
Channel Separation:	1MHz
Antenna Type:	Multilayer Ceramic Antenna
Antenna Gain:	2.66dBi



2.3. Accessory Equipment Information

Equipment Information			
Name	Model	S/N	Manufacturer
Notebook	ThinkBook 14 G3 ACL	MP246QDR	Lenovo
Notebook	X220	4291GM8	Lenovo
Cradle	CS2X19-BT	/	MINDEO
Cable Information			
Name	Shielded Type	Ferrite Core	Length
USB Cable	Unshielded	NO	100cm
USB Cable	Unshielded	NO	200cm
Test Software Information			
Name	Version	/	/
RTLBTAPP	5.2.3.54	/	/



2.4. Operation State

Operation Frequency List: The EUT has been tested under typical operating condition. The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing. BT EDR, 79 channels are provided to the EUT. Channels 00/39/78 were selected for testing.

Operation Frequency List:

Channel	Frequency (MHz)
00	2402
01	2403
:	:
38	2440
39	2441
40	2442
:	:
77	2479
78	2480

Note: The display in grey were the channel selected for testing.

Test Mode:

For RF test items:
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT charges through the Cradle.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.



2.5. Measurement Instruments List

3. RF Test System - SRD					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	MXA Signal Analyzer	Keysight	N9020A	MY52091402	Aug. 21, 2025
2	MXG Vector Signal Generator	Agilent	N5182A	MY47420864	Dec. 12, 2024
3	PSG Analog Signal Generator	Agilent	E8257D	MY46521908	Dec. 12, 2024
4	USB Wideband Power Sensor	Keysight	U2021XA	MY55130004	Mar. 21, 2025
5	USB Wideband Power Sensor	Keysight	U2021XA	MY55130006	Mar. 21, 2025
6	Wideband Radio Communication Tester	R&S	CMW500	102414	Dec. 12, 2024
7	RF Control Unit	Tonscend	JS0806-2	/	Aug. 21, 2025
8	Test Software	Tonscend	JS1120-3	V3.3.38	/
9	High and low temperature test chamber	ESPEC	MT3035	/	Mar. 21, 2025

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9163	01026	Dec. 18, 2024
2	Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-647	Sep. 25, 2025
3	Test Receiver	Keysight	N9038A	MY56400071	Dec. 12, 2024
4	Broadband Amplifier	SCHWARZBECK	BBV9743B	259	Dec. 12, 2024
5	Mirowave Broadband Amplifier	SCHWARZBECK	BBV9718C	111	Dec. 12, 2024
6	3m chamber 3	YIHENG	EE106	/	Aug. 28, 2026
7	Test Software	FARA	EZ-EMC	FA-03A2	/

Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Calibrated Until
1	LISN	R&S	ENV216	101112	Dec. 12, 2024
2	LISN	R&S	ENV216	101113	Dec. 12, 2024
3	EMI Test Receiver	R&S	ESCS30	100353	Dec. 12, 2024
4	ISN CAT6	Schwarzbeck	NTFM 8158	CAT6-8158-0046	Dec. 12, 2024
5	ISN CAT5	Schwarzbeck	NTFM 8158	CAT5-8158-0046	Dec. 12, 2024
6	Test Software	R&S	EMC32	6.10.10	/

Note: 1. The Cal. Interval was one year.

2. The Cal. Interval was three years of the antenna.

3. The cable loss has been calculated in test result which connection between each test instruments.

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhu Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn

4. TEST ITEM AND RESULTS

4.1. Conducted Emission


Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

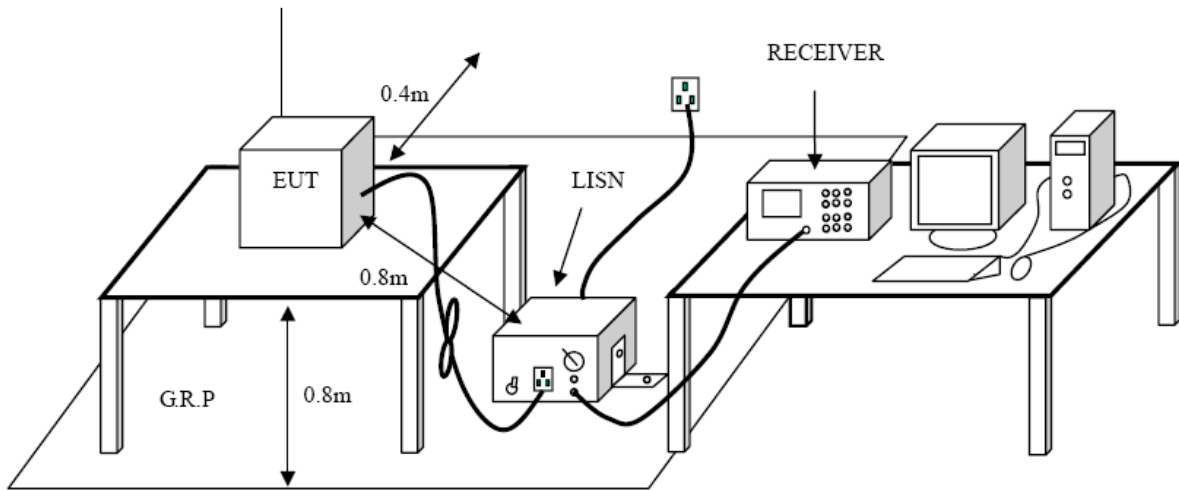

Test Procedure


1. The EUT was setup according to ANSI C63.10:2013 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm / 50 μH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.

Test Mode

Please refer to the clause 2.4.

**Test Result**

Test Voltage:	AC 120V/60Hz
Terminal:	Line
Remark:	Only worse case is reported.

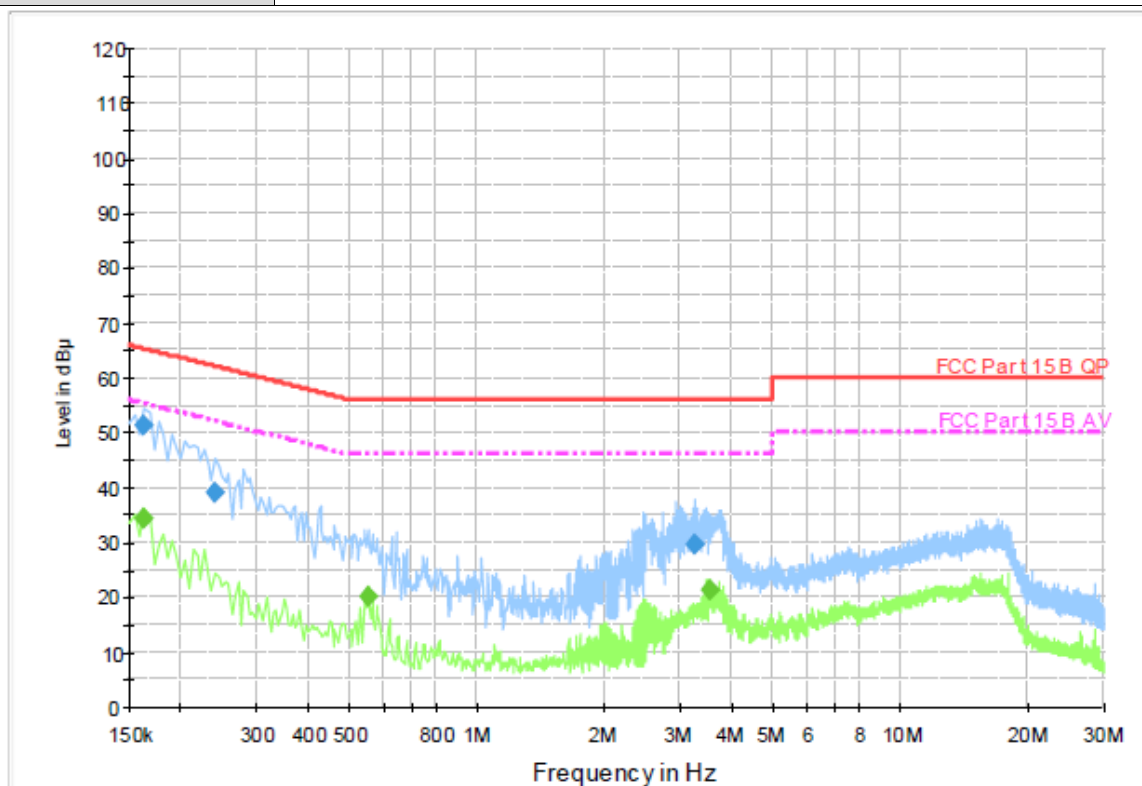**Final Measurement Detector 1**

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.163500	51.2	1000.00	9.000	On	L1	9.5	14.1	65.3	
0.240000	39.2	1000.00	9.000	On	L1	9.5	22.9	62.1	
3.241500	29.6	1000.00	9.000	On	L1	9.5	26.4	56.0	


Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.163500	34.5	1000.00	9.000	On	L1	9.5	20.8	55.3	
0.550500	20.3	1000.00	9.000	On	L1	9.5	25.7	46.0	
3.538500	21.4	1000.00	9.000	On	L1	9.5	24.6	46.0	

Emission Level = Read Level + Correct Factor



Test Voltage:	AC 120V/60Hz
Terminal:	Neutral
Remark:	Only worse case is reported.

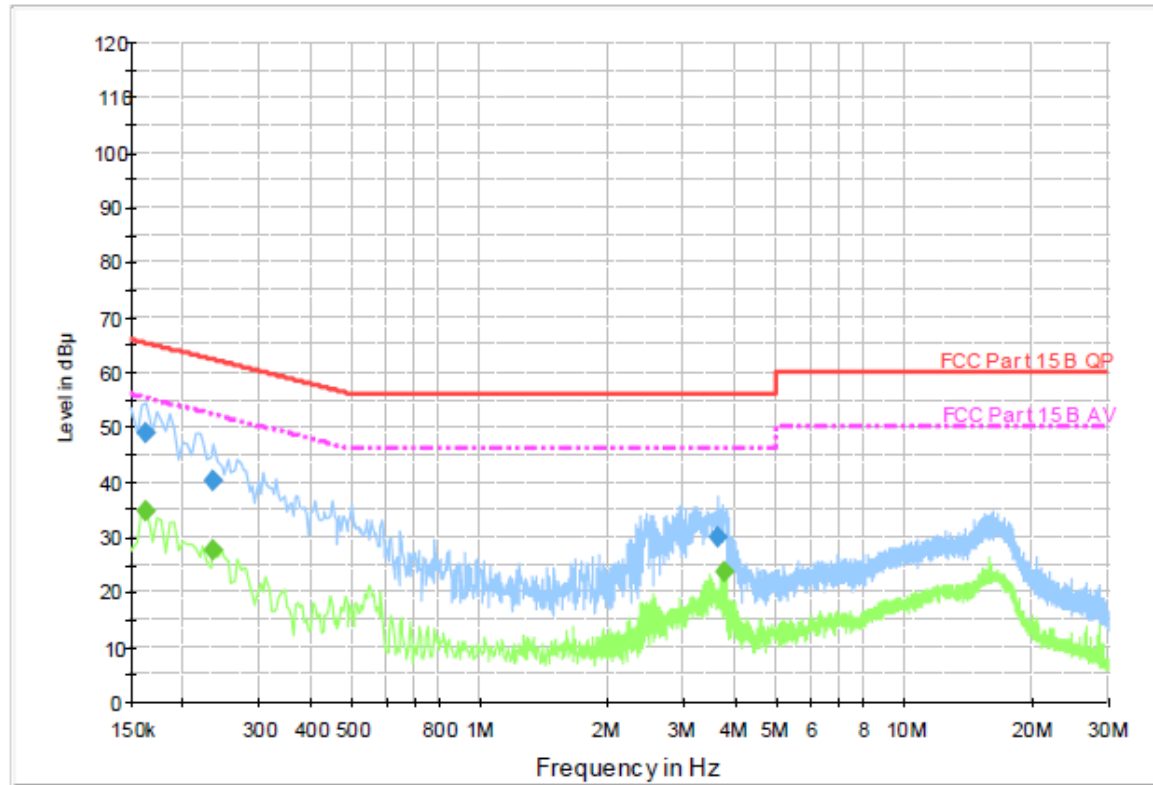

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.163500	49.1	1000.00	9.000	On	N	9.5	16.2	65.3	
0.235500	40.2	1000.00	9.000	On	N	9.4	22.1	62.3	
3.624000	29.8	1000.00	9.000	On	N	9.4	26.2	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dBμ V)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμ V)	Comment
0.163500	34.7	1000.00	9.000	On	N	9.5	20.6	55.3	
0.235500	27.8	1000.00	9.000	On	N	9.4	24.5	52.3	
3.745500	23.6	1000.00	9.000	On	N	9.4	22.4	46.0	

Emission Level = Read Level + Correct Factor

4.2. Radiated Emission

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F (kHz)	300
0.490~1.705	24000/F (kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Frequency Range (MHz)	dBμV/m (at 3 meters)	
	Peak	Average
Above 1000	74	54


Note:

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBμV/m)=20log Emission Level (μV/m).


Test Configuration

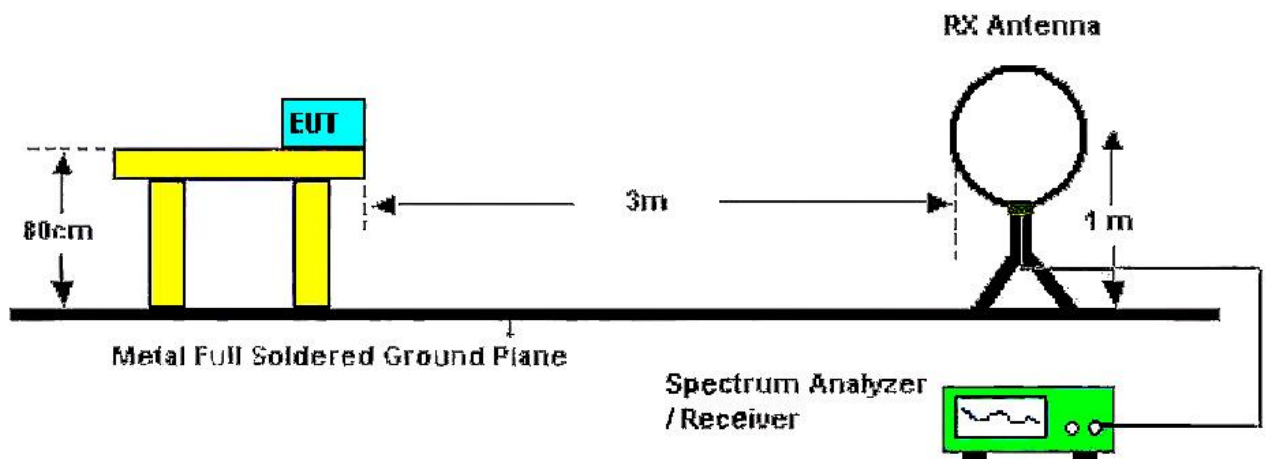

Below 30MHz Test Setup

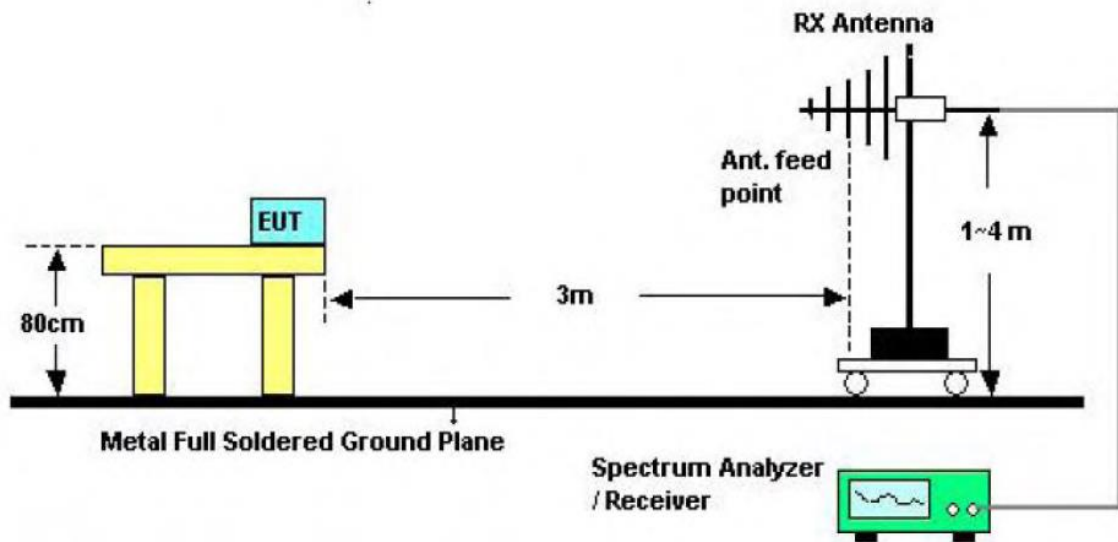

30-1000MHz Test Setup

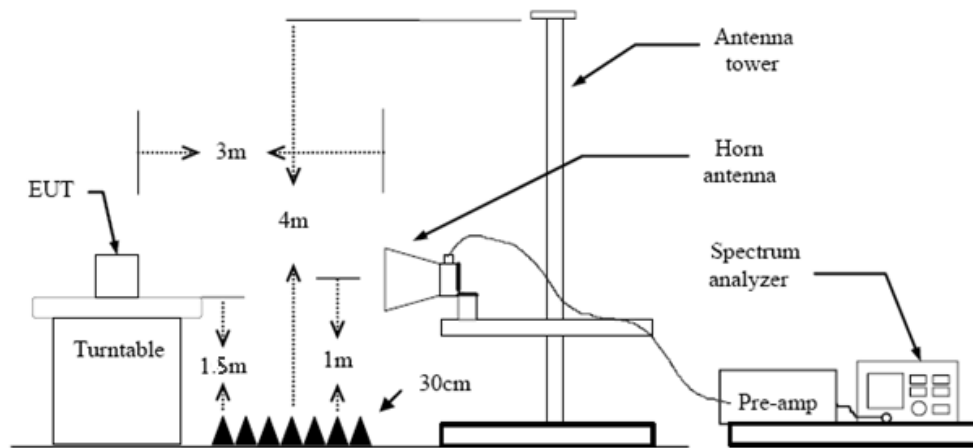

Above 1GHz Test Setup

Test Procedure

1. The EUT was setup and tested according to ANSI C63.10:2013.
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) 9k – 150kHz:
RBW=300 Hz, VBW=1 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (3) 0.15M – 30MHz:
RBW=10 kHz, VBW=30 kHz, Sweep=auto, Detector function=peak, Trace=max hold
 - (4) 30M - 1 GHz:
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold



If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

(5) From 1 GHz to 10th harmonic:

RBW=1MHz, VBW=3MHz Peak detector for Peak value.

RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.

Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.

Test Mode

Please refer to the clause 2.4.


Test Result

9 kHz~30 MHz

From 9 kHz to 30 MHz: The conclusion is PASS.

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2402MHz
Remark:	Only worse case is reported.

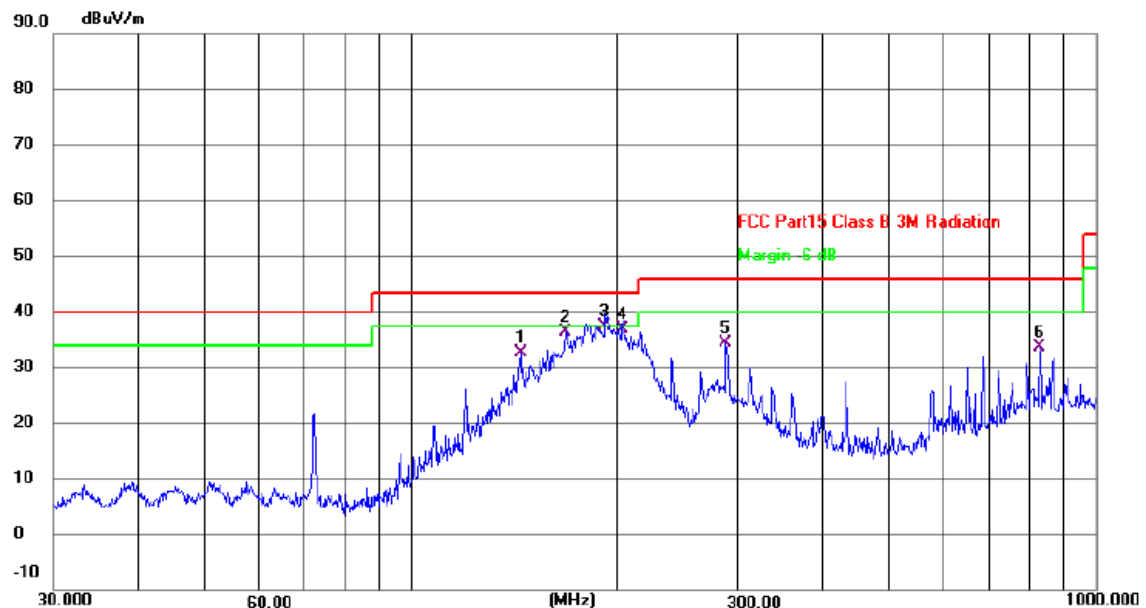


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	144.3345	51.28	-18.60	32.68	43.50	-10.82	QP
2	167.8241	55.57	-19.14	36.43	43.50	-7.07	QP
3 *	191.7450	58.09	-20.69	37.40	43.50	-6.10	QP
4	203.5227	57.89	-21.09	36.80	43.50	-6.70	QP
5	287.9904	52.25	-17.94	34.31	46.00	-11.69	QP
6	827.4934	39.29	-5.62	33.67	46.00	-12.33	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
2. Margin value = Level -Limit value



Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2402MHz
Remark:	Only worse case is reported.

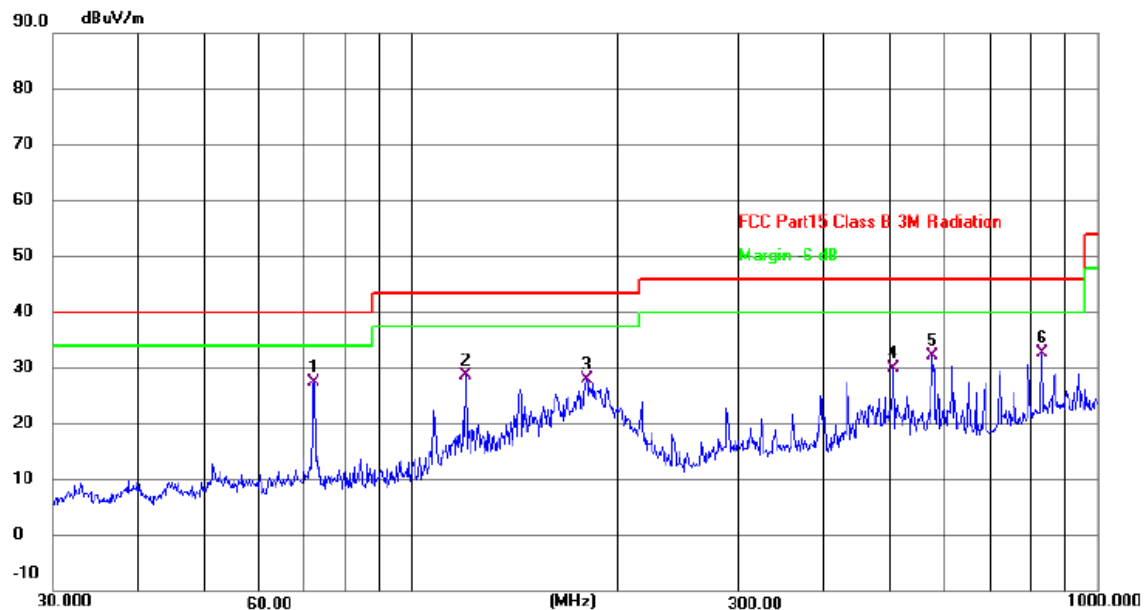

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 *	72.0843	48.03	-20.77	27.26	40.00	-12.74	QP
2	119.8556	49.29	-20.63	28.66	43.50	-14.84	QP
3	180.0165	47.91	-19.93	27.98	43.50	-15.52	QP
4	504.7062	41.98	-12.03	29.95	46.00	-16.05	QP
5	574.6258	42.37	-10.17	32.20	46.00	-13.80	QP
6	830.4002	38.20	-5.60	32.60	46.00	-13.40	QP

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) - Pre-amplifier Factor

2. Margin value = Level - Limit value



Above 1GHz

Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2296.417	42.74	-3.48	39.26	74.00	-34.74	peak
2	3984.500	42.57	0.47	43.04	74.00	-30.96	peak
3	6726.167	37.83	7.88	45.71	74.00	-28.29	peak
4	8006.917	38.40	10.85	49.25	74.00	-24.75	peak
5	9624.500	38.97	12.66	51.63	74.00	-22.37	peak
6 *	11199.000	38.42	14.88	53.30	74.00	-20.70	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	46.86	-7.61	39.25	74.00	-34.75	peak
2	4807.000	41.40	2.08	43.48	74.00	-30.52	peak
3	7411.583	37.67	10.22	47.89	74.00	-26.11	peak
4	9181.917	38.16	12.24	50.40	74.00	-23.60	peak
5	10204.167	38.33	13.69	52.02	74.00	-21.98	peak
6 *	12123.333	37.06	15.80	52.86	74.00	-21.14	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1438.667	45.59	-6.85	38.74	74.00	-35.26	peak
2	6628.250	37.91	7.68	45.59	74.00	-28.41	peak
3	8003.000	38.85	10.86	49.71	74.00	-24.29	peak
4	9738.083	37.50	12.89	50.39	74.00	-23.61	peak
5	11128.500	38.02	14.85	52.87	74.00	-21.13	peak
6 *	12436.667	37.28	15.71	52.99	74.00	-21.01	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	50.44	-7.59	42.85	74.00	-31.15	peak
2	5692.167	39.21	4.38	43.59	74.00	-30.41	peak
3	7983.417	37.62	10.84	48.46	74.00	-25.54	peak
4	10129.750	37.43	13.55	50.98	74.00	-23.02	peak
5 *	11140.250	38.57	14.84	53.41	74.00	-20.59	peak
6	12460.167	36.99	15.77	52.76	74.00	-21.24	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX GFSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4391.833	40.13	1.14	41.27	74.00	-32.73	peak
2	6432.417	39.42	7.11	46.53	74.00	-27.47	peak
3	7999.083	37.72	10.87	48.59	74.00	-25.41	peak
4	9142.750	37.97	12.11	50.08	74.00	-23.92	peak
5	10787.750	37.76	14.53	52.29	74.00	-21.71	peak
6 *	12338.750	37.05	15.70	52.75	74.00	-21.25	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX GFSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	48.70	-7.61	41.09	74.00	-32.91	peak
2	4807.000	40.15	2.08	42.23	74.00	-31.77	peak
3	6444.167	38.72	7.16	45.88	74.00	-28.12	peak
4	8014.750	38.31	10.83	49.14	74.00	-24.86	peak
5	10873.917	37.61	14.63	52.24	74.00	-21.76	peak
6 *	12722.583	36.10	16.43	52.53	74.00	-21.47	peak

Remarks:

1. Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2. Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3945.333	41.34	0.32	41.66	74.00	-32.34	peak
2	6397.167	39.07	7.01	46.08	74.00	-27.92	peak
3	8077.417	38.22	10.67	48.89	74.00	-25.11	peak
4	9209.333	38.60	12.31	50.91	74.00	-23.09	peak
5	10909.167	37.80	14.67	52.47	74.00	-21.53	peak
6 *	12385.750	36.91	15.64	52.55	74.00	-21.45	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	48.49	-7.59	40.90	74.00	-33.10	peak
2	4807.000	39.99	2.08	42.07	74.00	-31.93	peak
3	7341.083	40.00	10.20	50.20	74.00	-23.80	peak
4	9671.500	37.91	12.75	50.66	74.00	-23.34	peak
5 *	10772.083	38.48	14.50	52.98	74.00	-21.02	peak
6	12197.750	37.02	15.88	52.90	74.00	-21.10	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3937.500	40.09	0.29	40.38	74.00	-33.62	peak
2	5762.667	39.19	4.65	43.84	74.00	-30.16	peak
3	7638.750	38.03	10.20	48.23	74.00	-25.77	peak
4	8809.833	38.25	11.33	49.58	74.00	-24.42	peak
5	10509.667	38.44	14.04	52.48	74.00	-21.52	peak
6 *	12045.000	37.08	15.70	52.78	74.00	-21.22	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1199.750	48.48	-7.59	40.89	74.00	-33.11	peak
2	4807.000	40.00	2.08	42.08	74.00	-31.92	peak
3	6514.667	38.09	7.37	45.46	74.00	-28.54	peak
4	8030.417	39.63	10.78	50.41	74.00	-23.59	peak
5	10826.917	37.53	14.59	52.12	74.00	-21.88	peak
6 *	12334.833	36.67	15.69	52.36	74.00	-21.64	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4752.167	40.15	1.97	42.12	74.00	-31.88	peak
2	6455.917	37.67	7.19	44.86	74.00	-29.14	peak
3	7889.417	37.98	10.64	48.62	74.00	-25.38	peak
4	10024.000	37.13	13.33	50.46	74.00	-23.54	peak
5 *	11159.833	38.05	14.86	52.91	74.00	-21.09	peak
6	12710.833	36.20	16.40	52.60	74.00	-21.40	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX $\pi/4$ -DQPSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1195.833	47.44	-7.61	39.83	74.00	-34.17	peak
2	4807.000	41.71	2.08	43.79	74.00	-30.21	peak
3	7012.083	37.70	9.21	46.91	74.00	-27.09	peak
4	9189.750	38.95	12.27	51.22	74.00	-22.78	peak
5 *	10548.833	38.42	14.09	52.51	74.00	-21.49	peak
6	12346.583	36.54	15.68	52.22	74.00	-21.78	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1148.833	51.57	-7.74	43.83	74.00	-30.17	peak
2	5237.833	38.81	3.00	41.81	74.00	-32.19	peak
3	7262.750	37.46	10.19	47.65	74.00	-26.35	peak
4	8731.500	38.64	11.20	49.84	74.00	-24.16	peak
5 *	10881.750	38.45	14.65	53.10	74.00	-20.90	peak
6	12468.000	36.87	15.80	52.67	74.00	-21.33	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2402MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1638.417	47.84	-6.91	40.93	74.00	-33.07	peak
2	3608.500	41.20	-0.84	40.36	74.00	-33.64	peak
3	7160.917	37.99	9.98	47.97	74.00	-26.03	peak
4	9150.583	39.11	12.13	51.24	74.00	-22.76	peak
5	10795.583	37.35	14.55	51.90	74.00	-22.10	peak
6 *	12518.917	36.97	15.93	52.90	74.00	-21.10	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1438.667	45.95	-6.85	39.10	74.00	-34.90	peak
2	5124.250	39.90	2.70	42.60	74.00	-31.40	peak
3	7149.167	38.58	9.92	48.50	74.00	-25.50	peak
4	9201.500	38.05	12.31	50.36	74.00	-23.64	peak
5 *	11246.000	38.44	14.91	53.35	74.00	-20.65	peak
6	12432.750	37.28	15.70	52.98	74.00	-21.02	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2441MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1039.167	48.12	-8.06	40.06	74.00	-33.94	peak
2	4807.000	40.32	2.08	42.40	74.00	-31.60	peak
3	6361.917	38.63	6.86	45.49	74.00	-28.51	peak
4	8151.833	38.30	10.47	48.77	74.00	-25.23	peak
5	10619.333	38.47	14.18	52.65	74.00	-21.35	peak
6 *	11747.333	37.79	15.28	53.07	74.00	-20.93	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value



Ant. Pol.	Horizontal
Test Mode:	TX 8-DPSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2292.500	44.14	-3.49	40.65	74.00	-33.35	peak
2	5750.917	38.91	4.61	43.52	74.00	-30.48	peak
3	7732.750	38.83	10.36	49.19	74.00	-24.81	peak
4	9930.000	38.50	13.18	51.68	74.00	-22.32	peak
5 *	11199.000	38.04	14.88	52.92	74.00	-21.08	peak
6	12667.750	36.14	16.31	52.45	74.00	-21.55	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value

Ant. Pol.	Vertical
Test Mode:	TX 8-DPSK Mode 2480MHz
Remark:	No report for the emission which more than 20 dB below the prescribed limit.

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1497.417	50.87	-6.88	43.99	74.00	-30.01	peak
2	4787.417	40.35	2.04	42.39	74.00	-31.61	peak
3	7290.167	38.31	10.19	48.50	74.00	-25.50	peak
4	9174.083	38.52	12.21	50.73	74.00	-23.27	peak
5	10819.083	38.08	14.57	52.65	74.00	-21.35	peak
6 *	12585.500	36.80	16.12	52.92	74.00	-21.08	peak

Remarks:

1.Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor

2.Margin value = Level -Limit value


4.3. Band Edge Emissions (Radiated)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)

Restricted Frequency Band (MHz)	(dBμV/m) (at 3m)	
	Peak	Average
2310 ~ 2390	74	54
2483.5 ~ 2500	74	54

Test Configuration

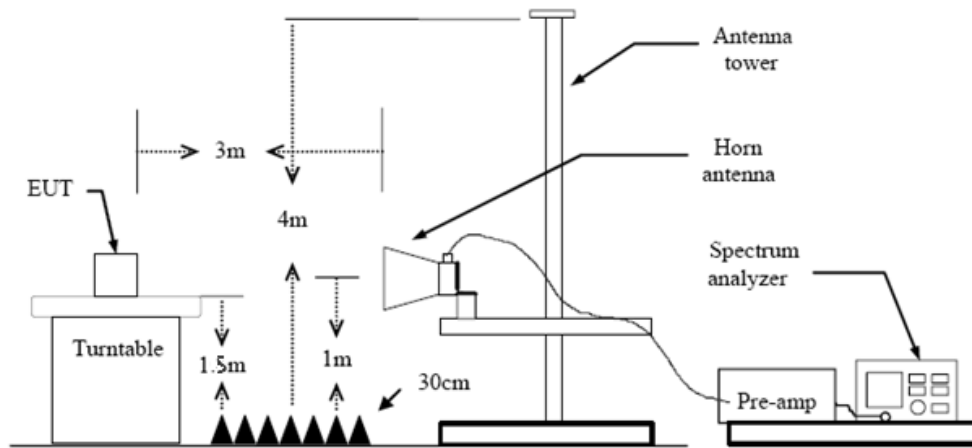


Test Procedure


1. The EUT was setup and tested according to ANSI C63.10:2013 requirements.
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
5. The receiver set as follow:
RBW=1MHz, VBW=3MHz Peak detector for Peak value.
RBW=1MHz, VBW see note 1 with Peak Detector for Average Value.


Note 1: For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 3.10 Duty Cycle.


Test Mode


Please refer to the clause 2.4.

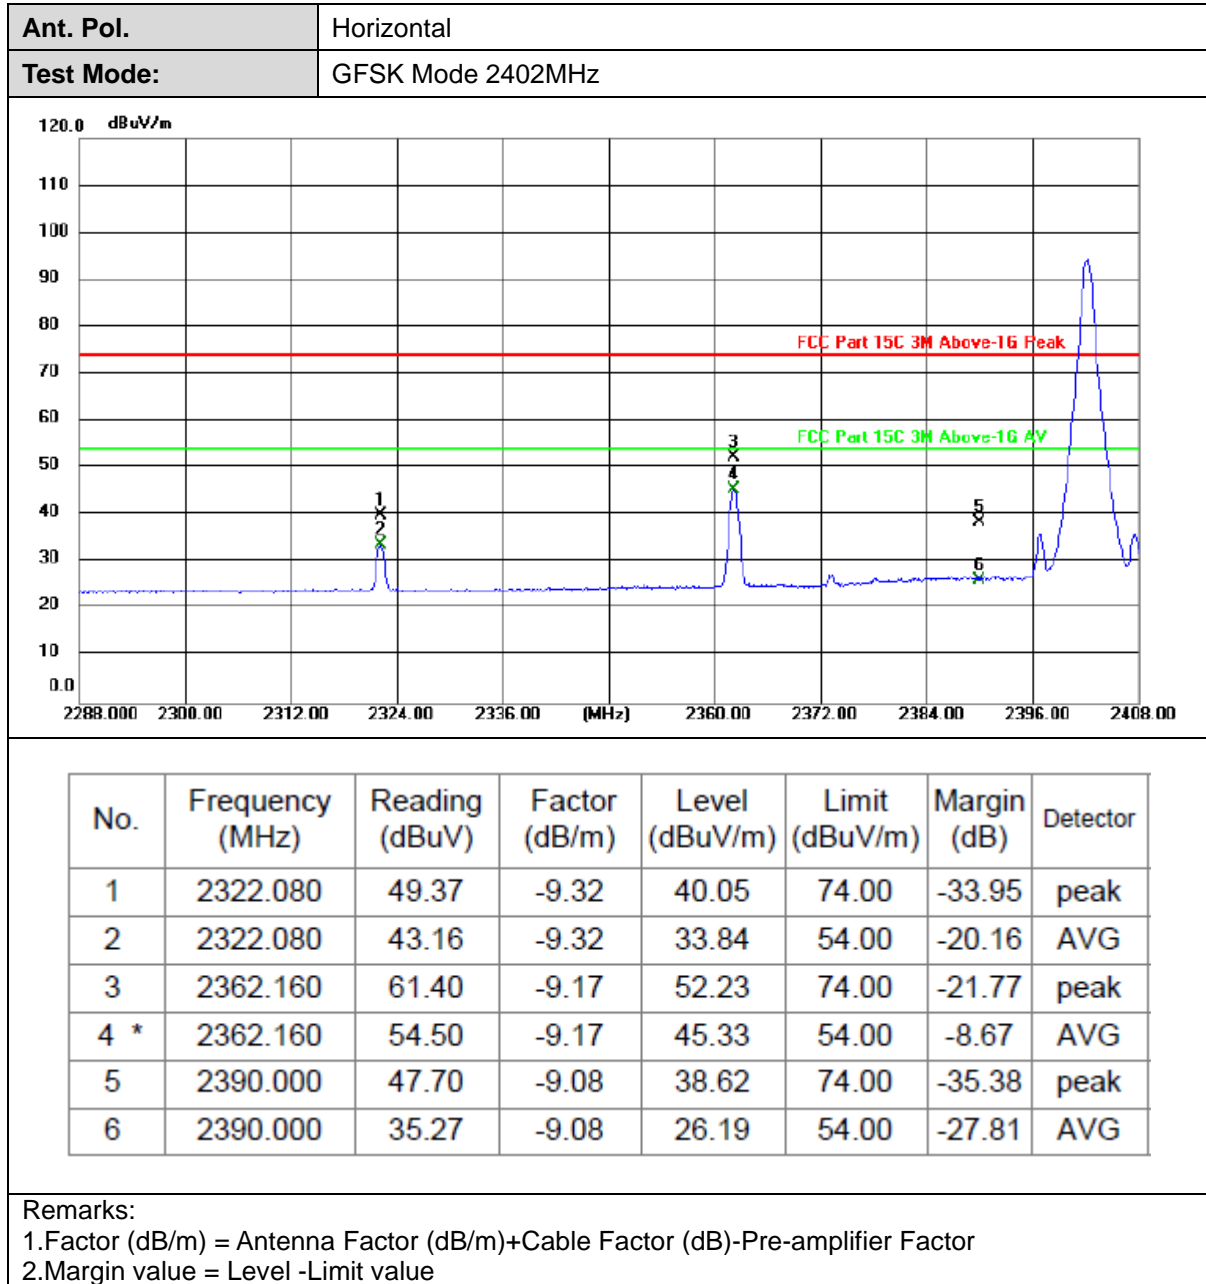
**Test Result**

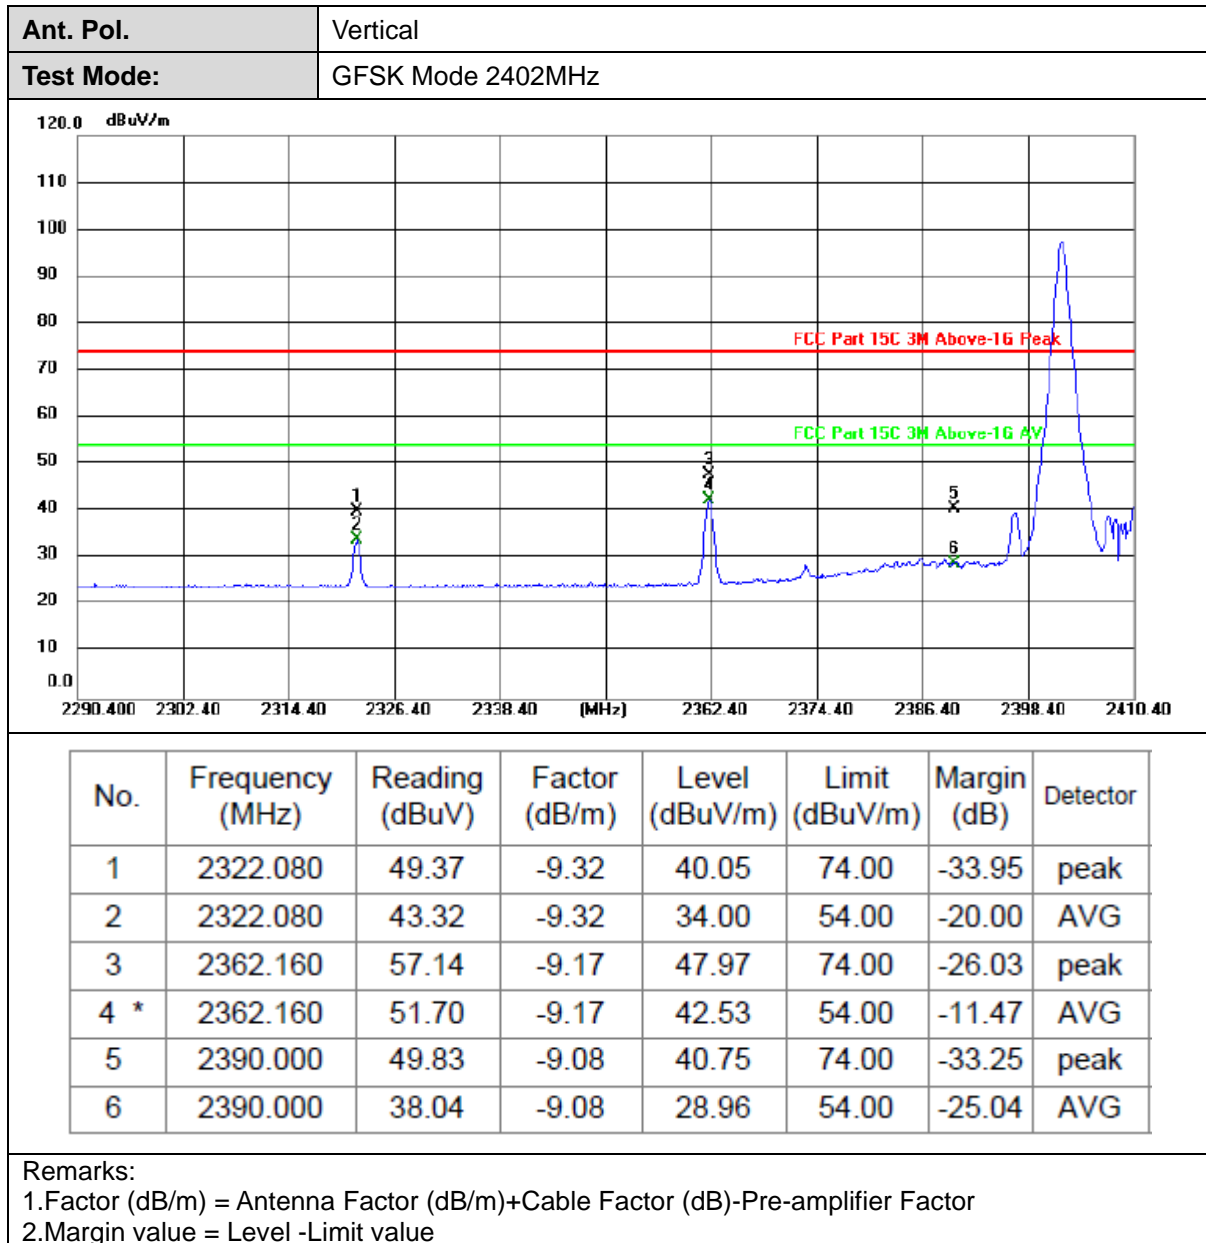


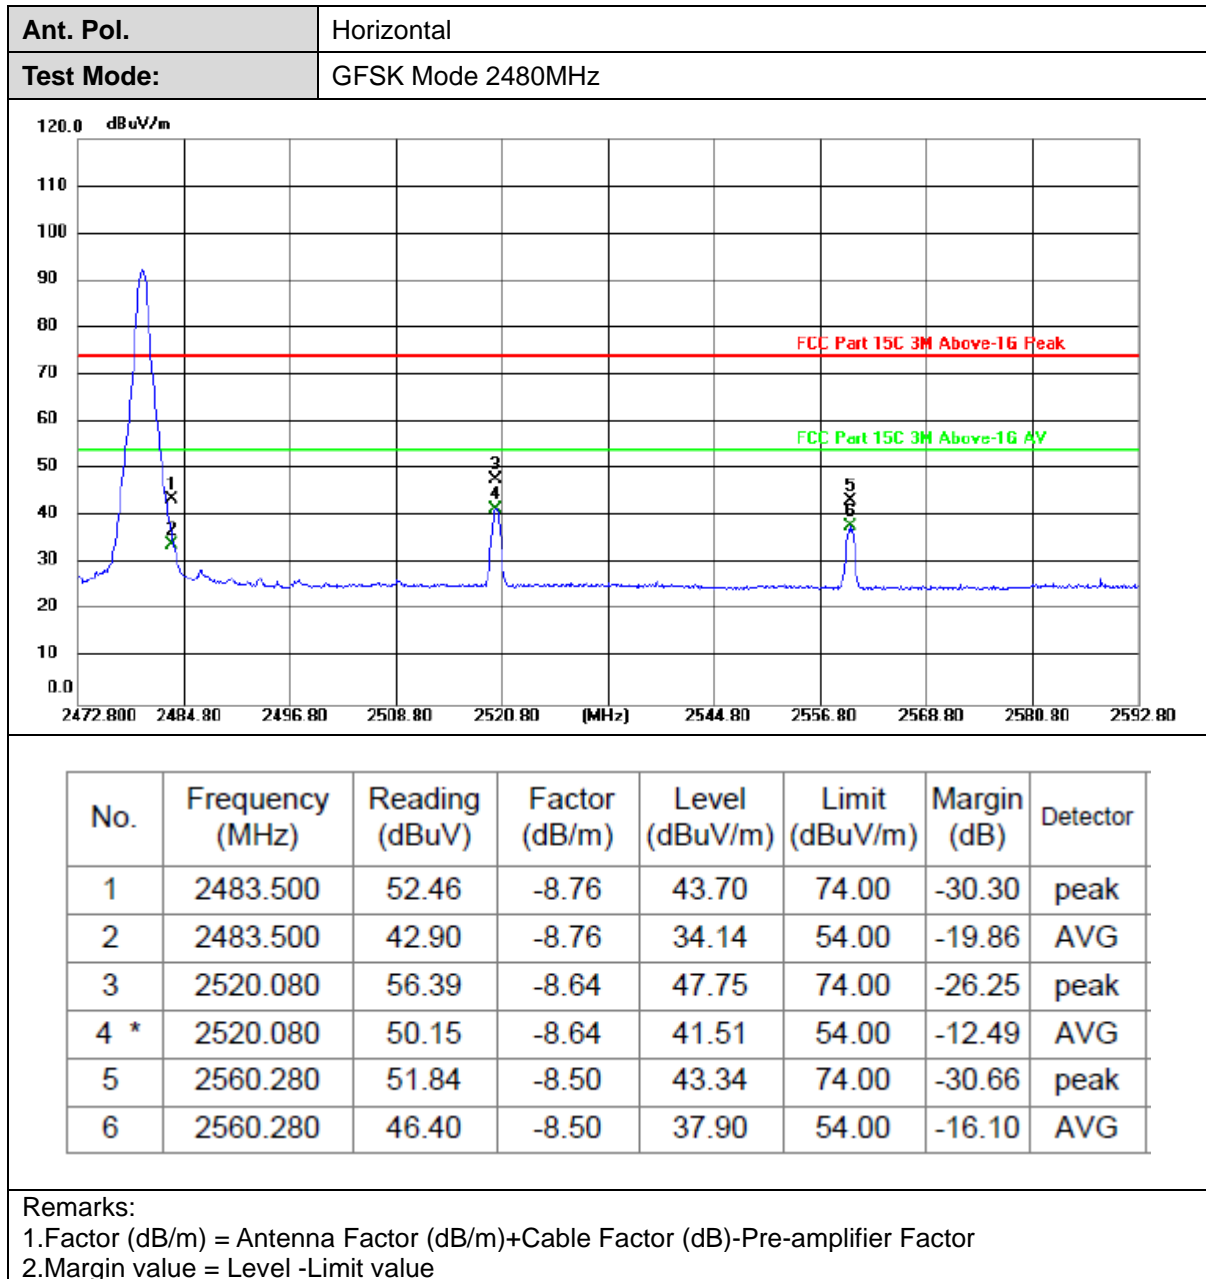


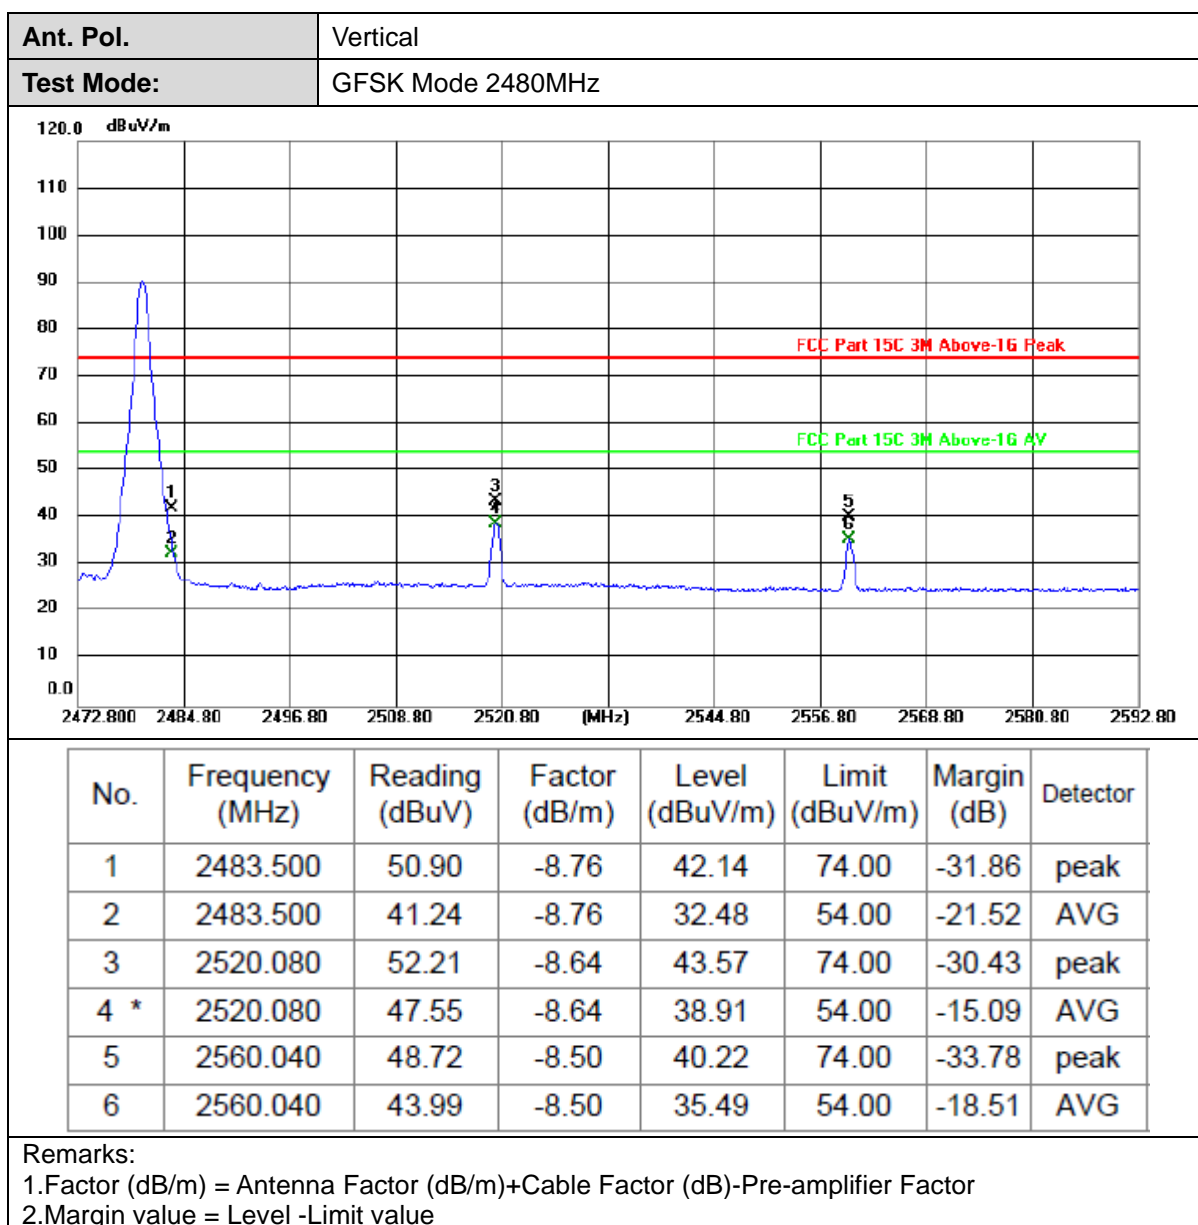


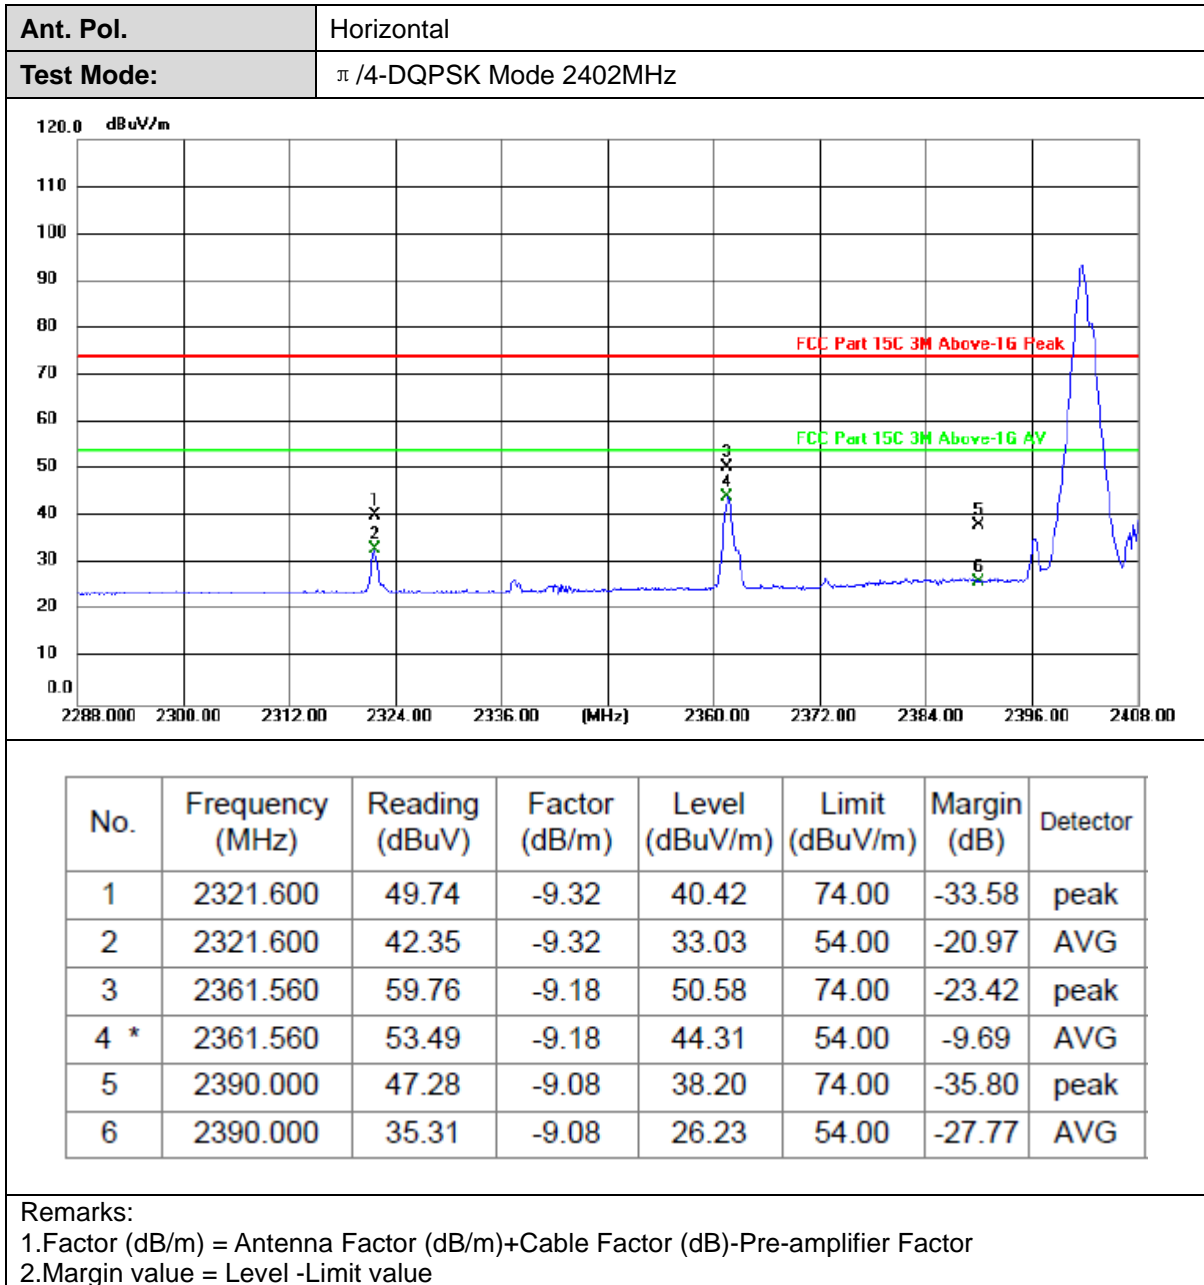


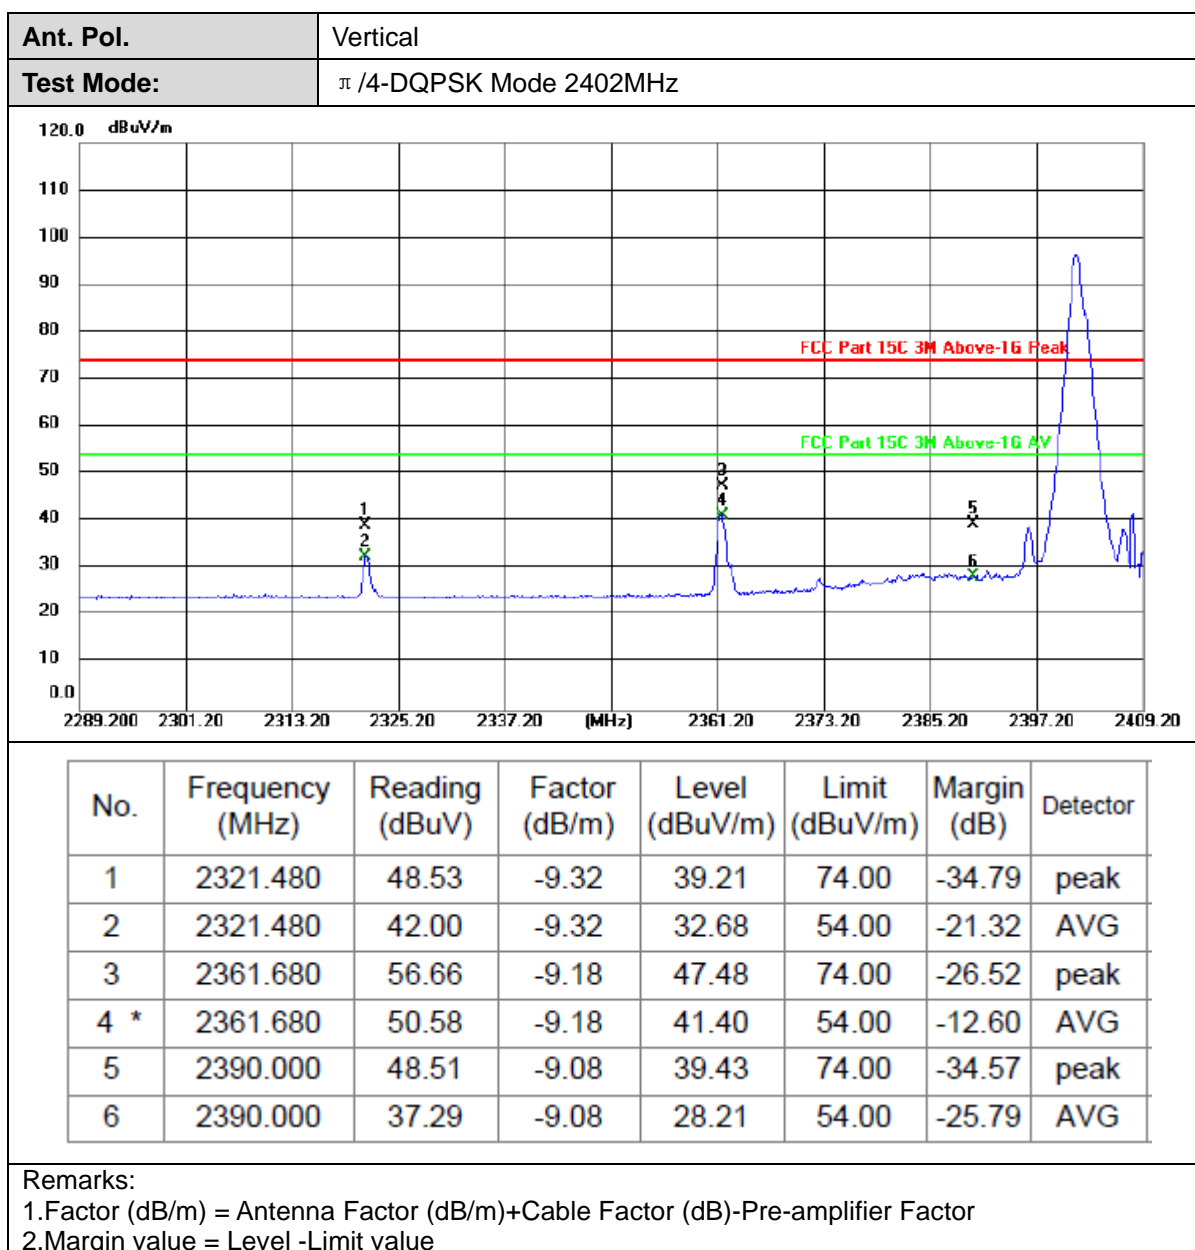


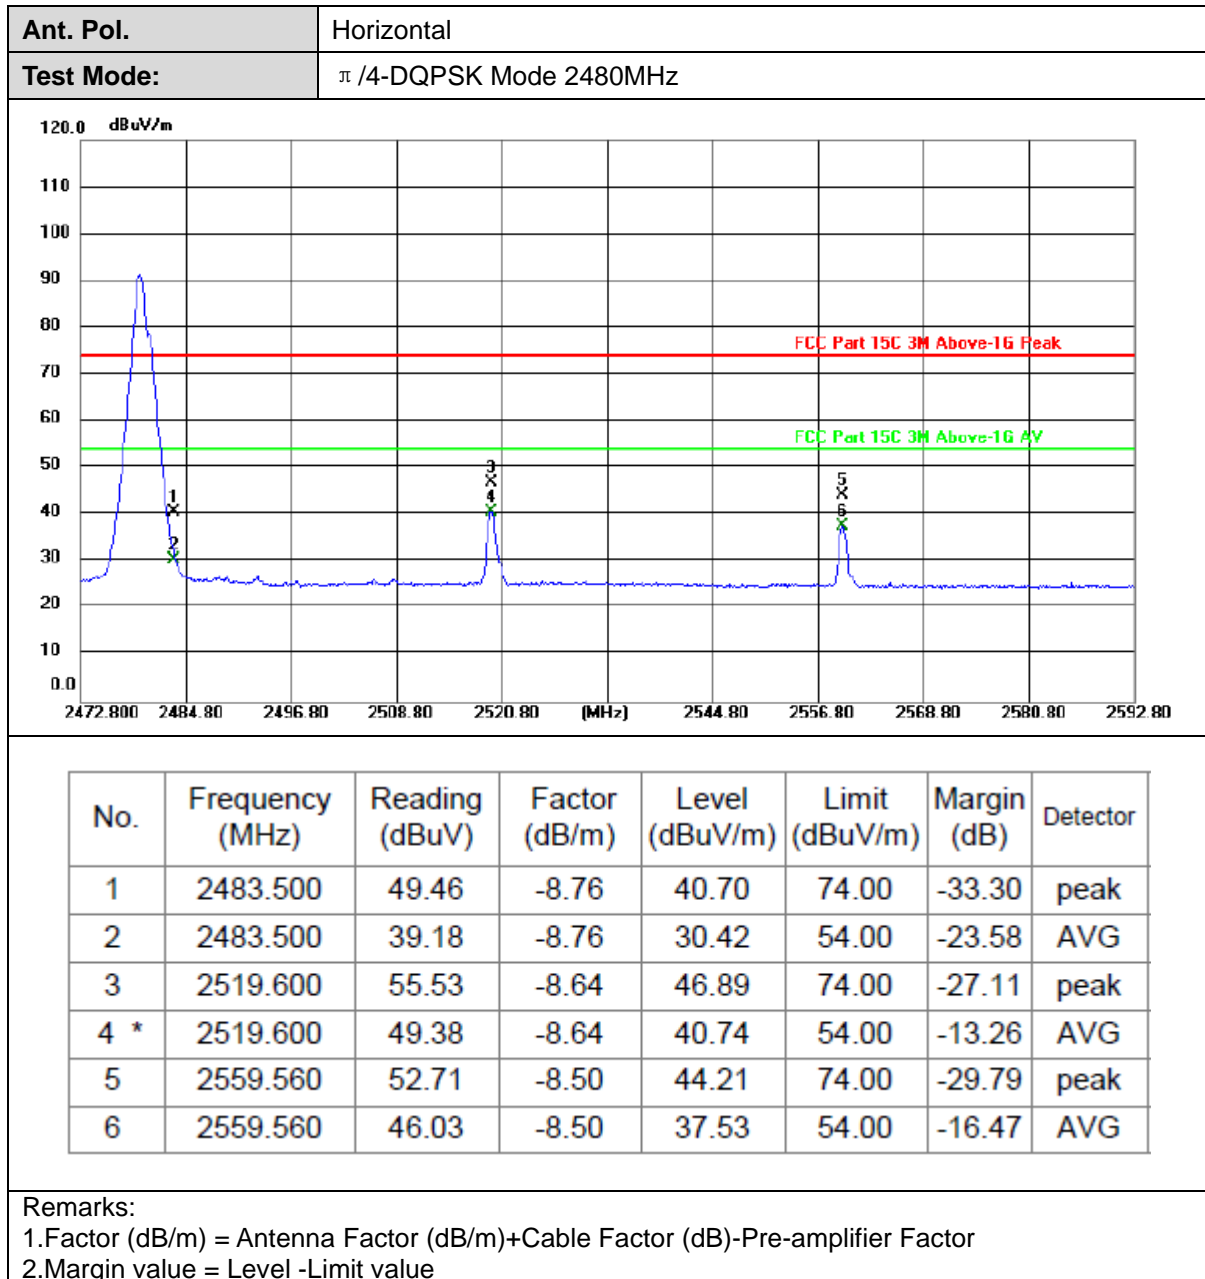


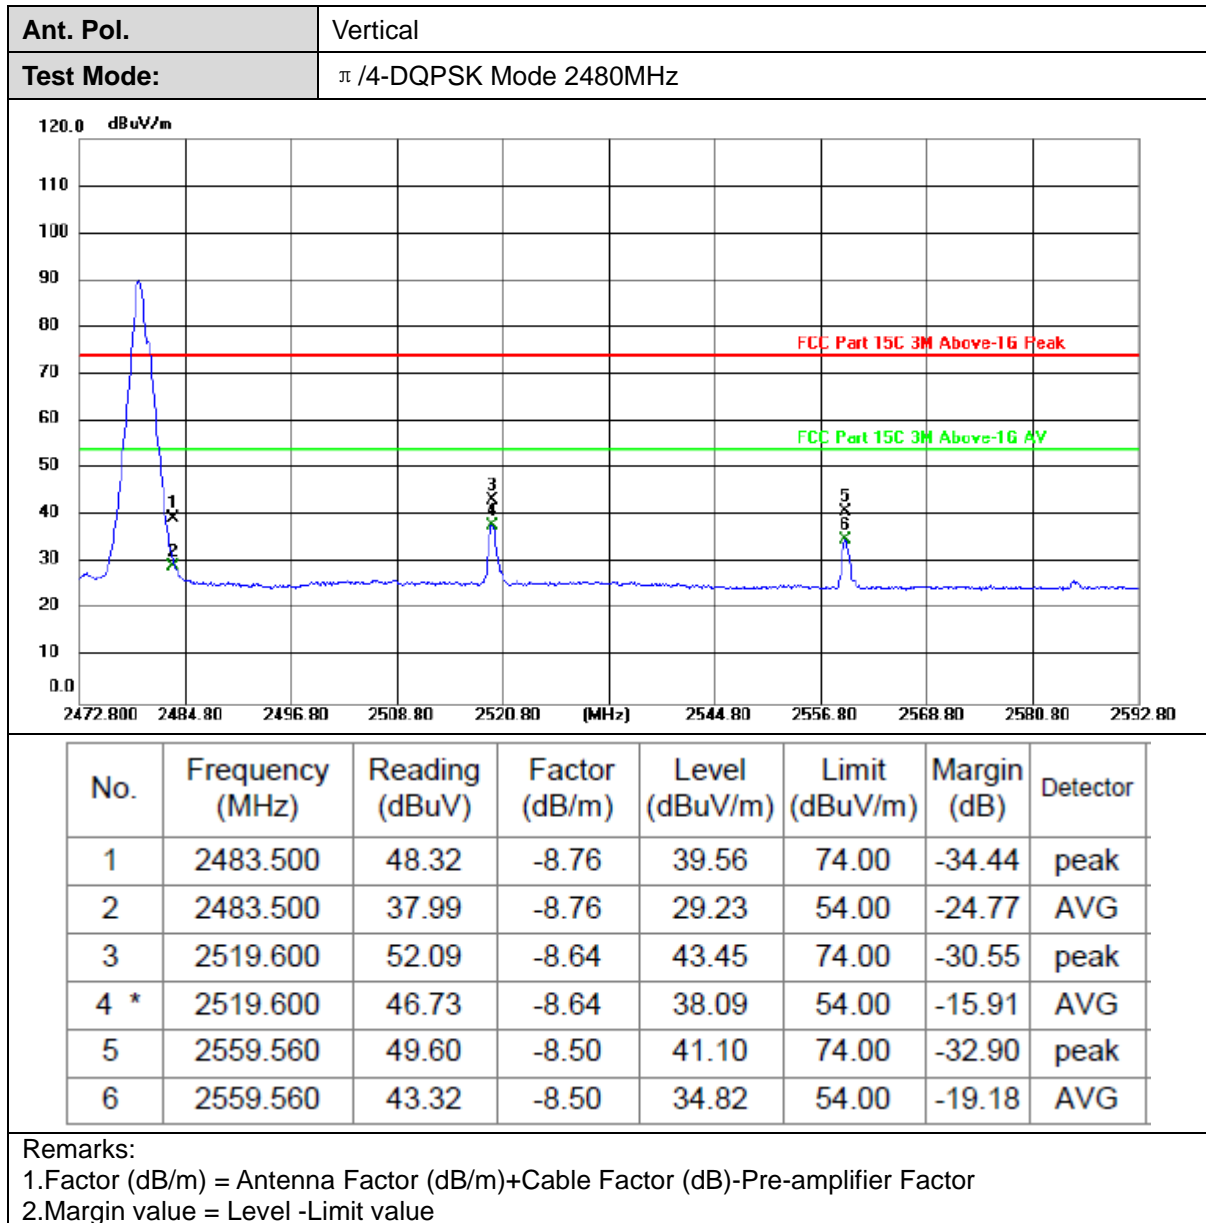

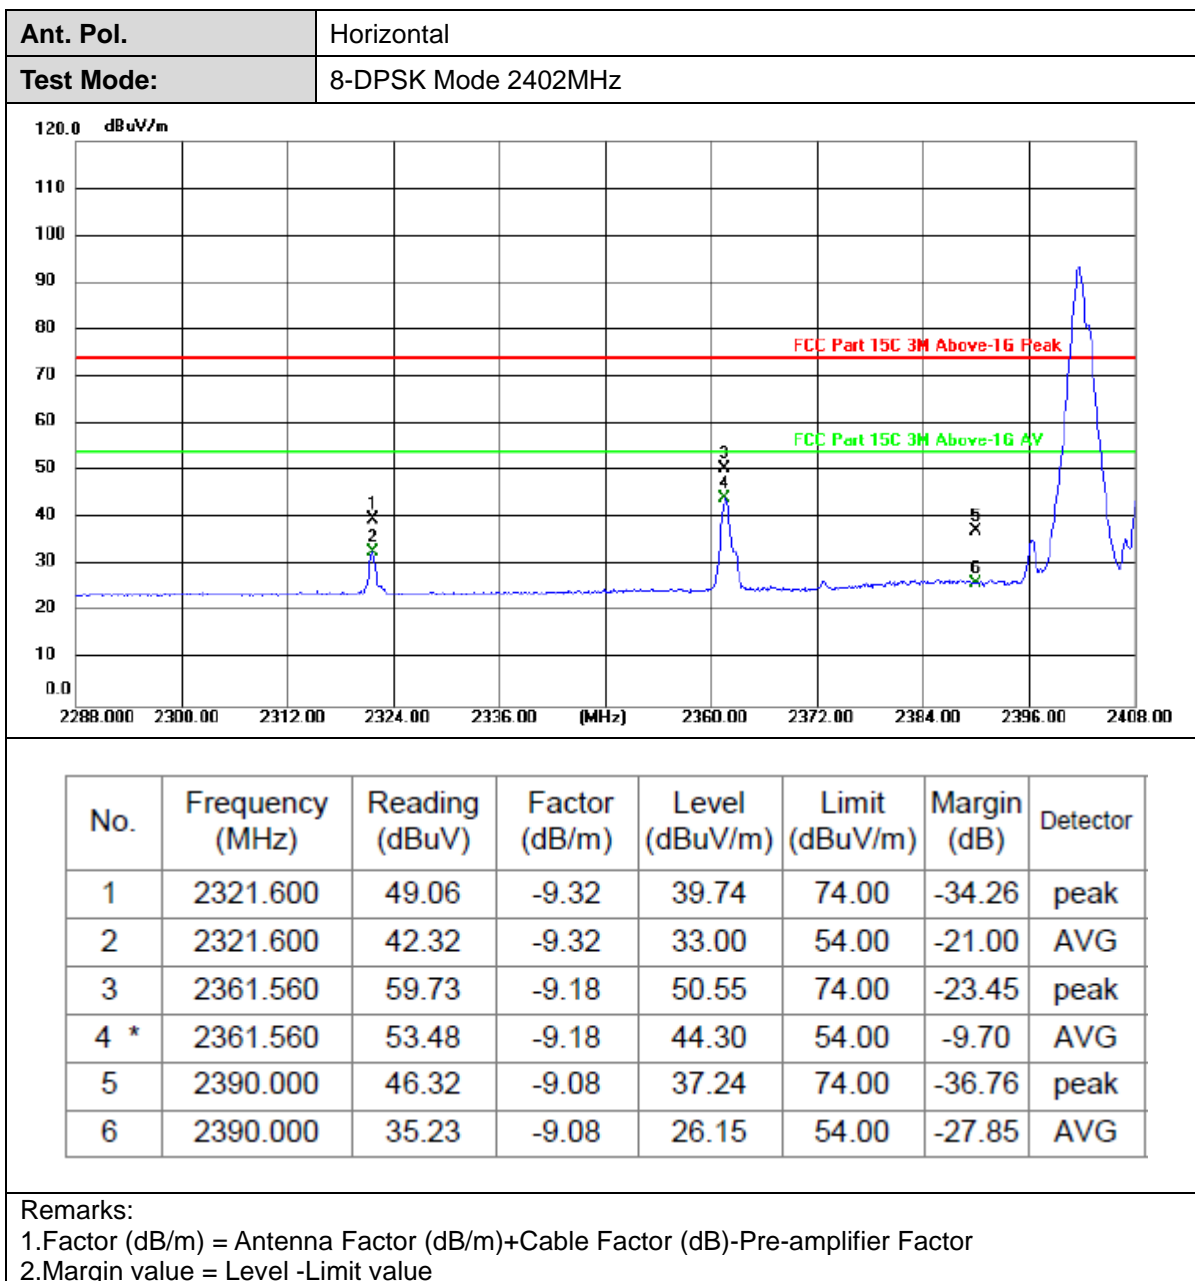

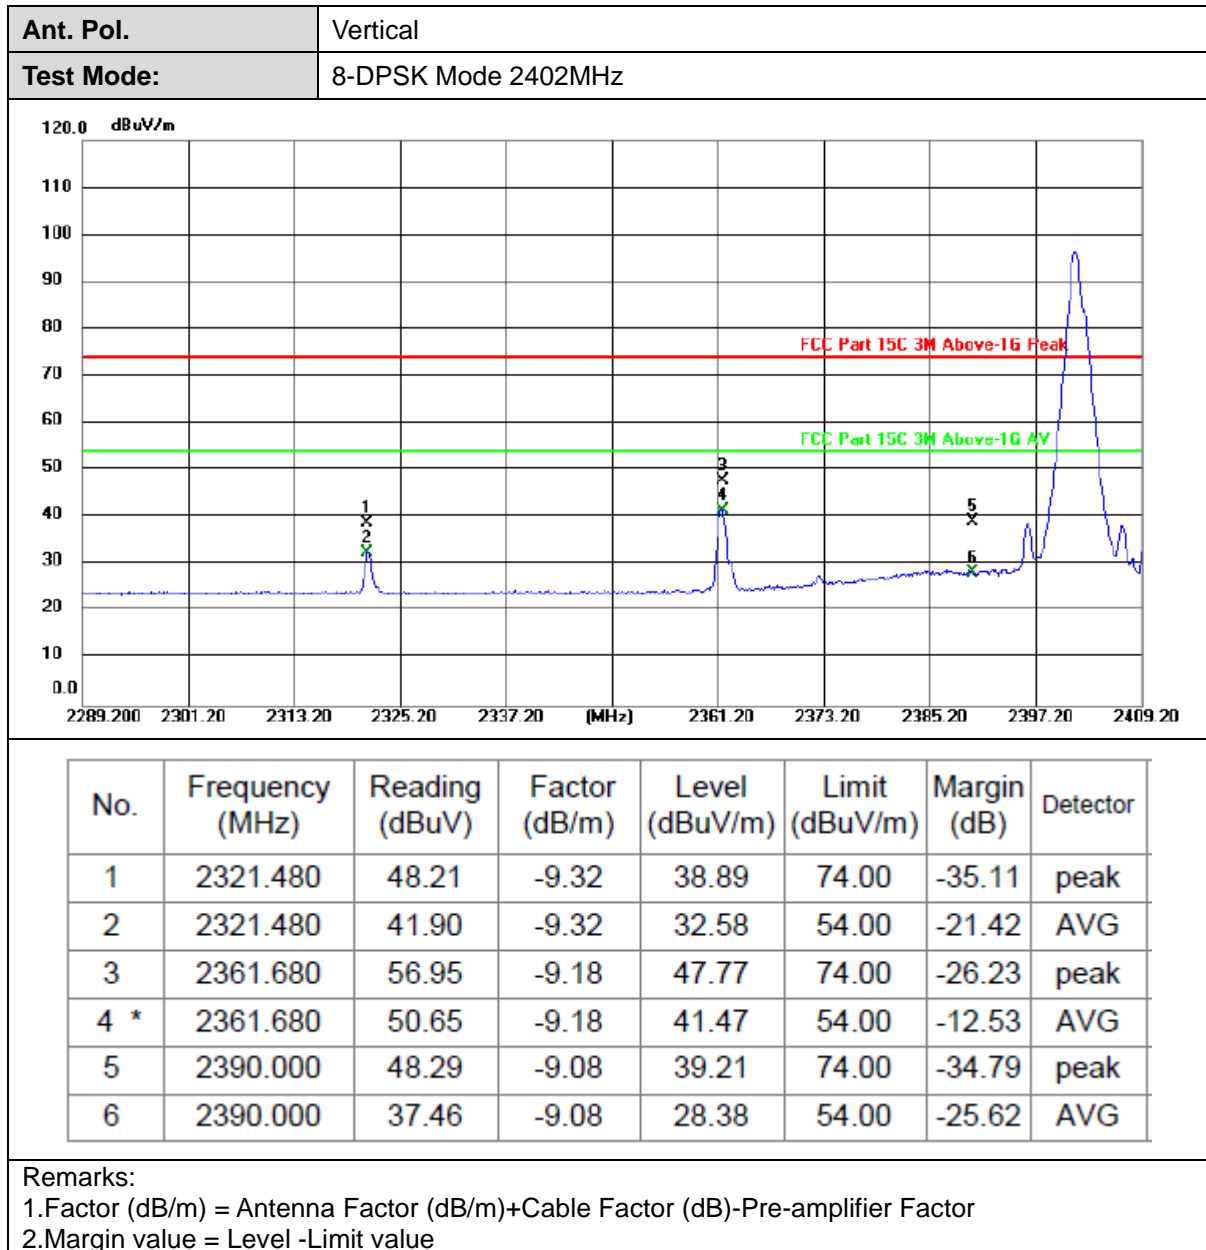

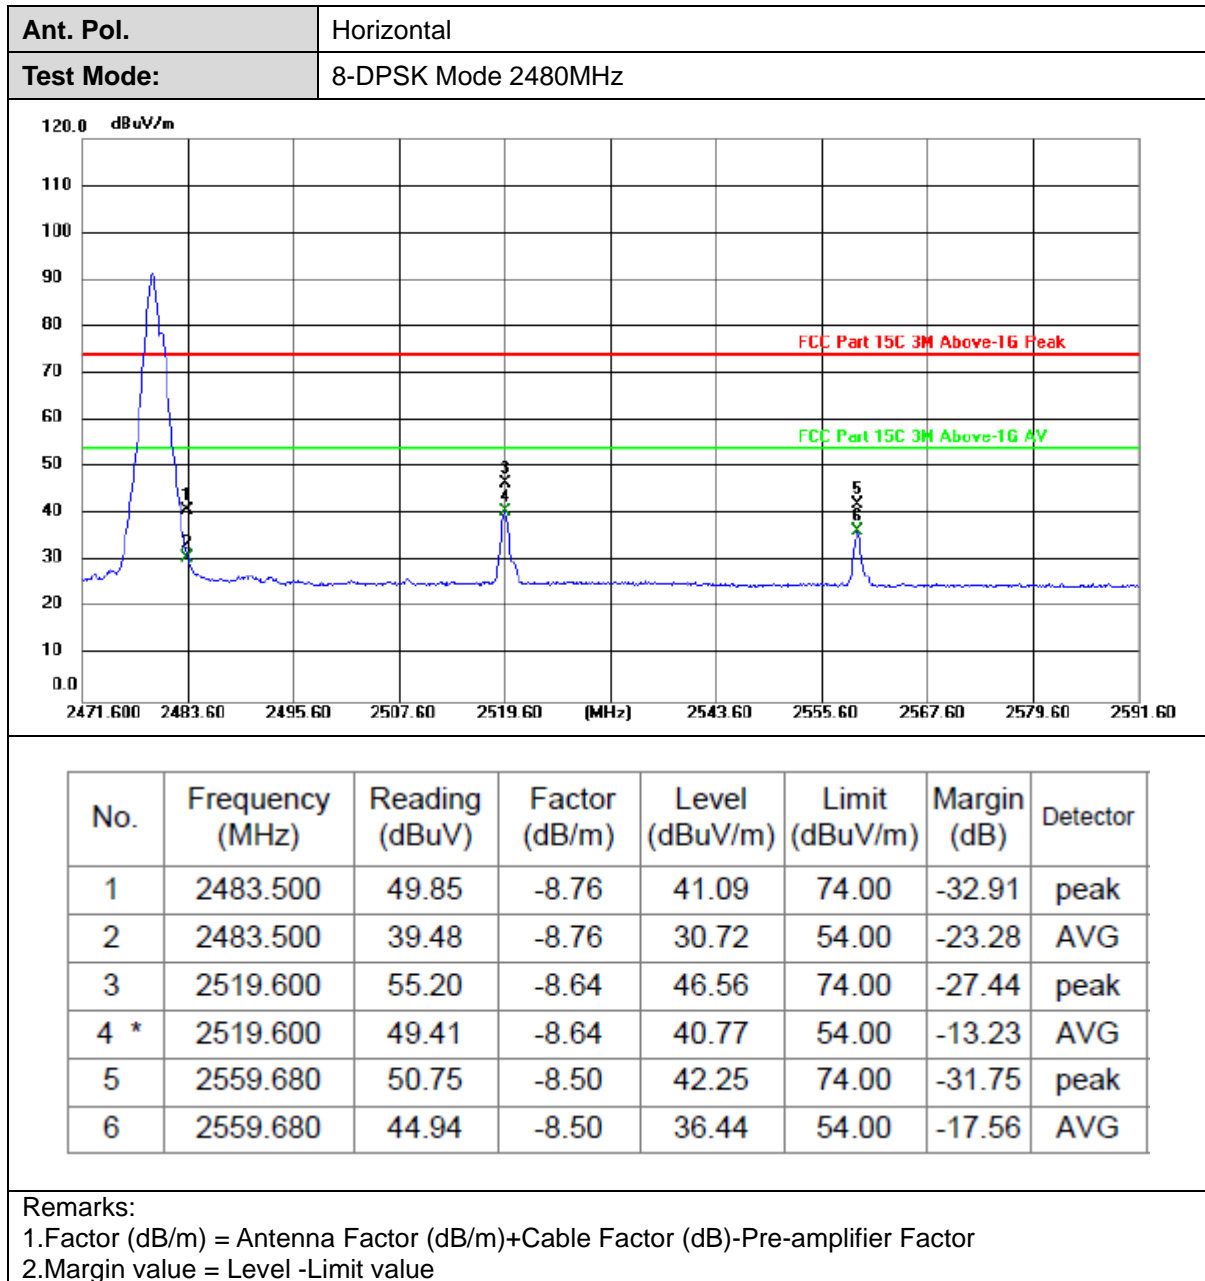

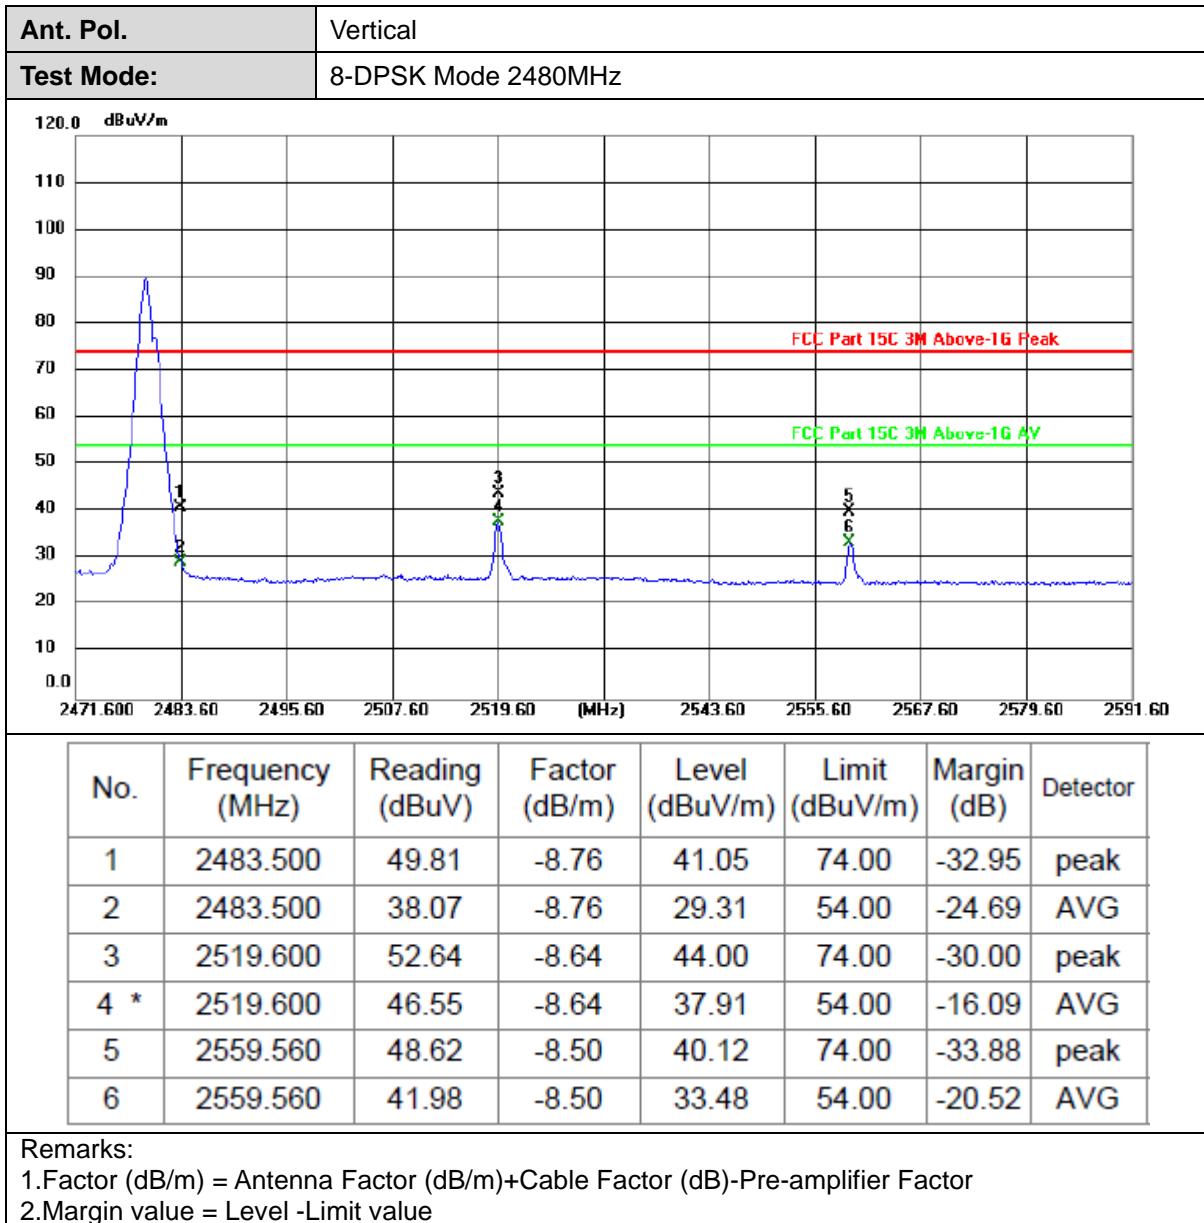




4.4. Band Edge and Spurious Emissions (Conducted)

Limit

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

Test Configuration



Test Procedure

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
RBW = 100 kHz, VBW ≥ RBW, scan up through 10th harmonic.
Sweep = auto, Detector function = peak, Trace = max hold.
4. Measure and record the results in the test report.

Test Mode

Please refer to the clause 2.4.

Test Result

Non-Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	0	2400.00	-49.244	-15.87	-33.374	PASS
			4803.76	-43.715	-15.87	-27.845	PASS
		39	4881.79	-43.276	-16.23	-27.046	PASS
		78	2483.50	-53.063	-16.1	-36.963	PASS
			4959.83	-42.826	-16.1	-26.726	PASS
$\pi/4$ DQPSK	2-DH5	0	2400.00	-52.939	-16.09	-36.849	PASS
			4804.38	-46.819	-16.09	-30.729	PASS

CTC Laboratories, Inc.

Room 101 Building B, No. 7, Lanqing 1st Road, Luhua Community, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China
Tel.: (86)755-27521059 Fax: (86)755-27521011 Http://www.sz-ctc.org.cn

TRF No: CTC-TR-059_A1

For anti-fake verification, please visit the official website of China Inspection And Testing Society : yz.cnca.cn



		39	4881.79	-49.067	-16.21	-32.857	PASS
		78	2483.50	-55.854	-16.25	-39.604	PASS
			4959.83	-41.745	-16.25	-25.495	PASS
8DPSK	3-DH5	0	2400.00	-51.995	-15.84	-36.155	PASS
			4803.76	-48.164	-15.84	-32.324	PASS
		39	4881.79	-43.056	-16.05	-27.006	PASS
		78	2483.50	-55.488	-16.02	-39.468	PASS
			4959.83	-47.053	-16.02	-31.033	PASS

Hopping

Modulation	Packet	Channel	OOB Emission Frequency (MHz)	OOB Emission Level (dBm)	Limit (dBm)	Over Limit (dB)	Result
GFSK	DH5	Hopping	2400.00	-49.704	-16.14	-33.564	PASS
			2483.50	-53.561	-16.09	-37.471	PASS
			2400.00	-49.904	-16.24	-33.664	PASS
			2483.50	-54.401	-16.12	-38.281	PASS
			2400.00	-49.686	-16.16	-33.526	PASS
			2483.50	-53.785	-16.12	-37.665	PASS
$\pi/4$ DQPSK	2-DH5		2400.00	-51.903	-16.23	-35.673	PASS
			2483.50	-55.511	-16.48	-39.031	PASS
			2398.91	-52.057	-16.15	-35.907	PASS
			2400.00	-52.106	-16.15	-35.956	PASS
			2483.50	-57.977	-16.24	-41.737	PASS
			2400.00	-52.876	-16.12	-36.756	PASS
			2483.50	-56.925	-16.26	-40.665	PASS
8DPSK	3-DH5		2400.00	-52.768	-16.34	-36.428	PASS
			2483.50	-56.142	-16.33	-39.812	PASS
			2400.00	-53.410	-16.28	-37.130	PASS
			2483.50	-57.068	-16.39	-40.678	PASS
			2400.00	-51.611	-16.48	-35.131	PASS
		2483.50	-57.676	-16.41	-41.266	PASS	




Non-Hopping Test Graphs:




In-Band Reference Level
GFSK_DH5_Channel 0




In-Band Reference Level
 $\pi/4$ DQPSK_2-DH5_Channel 0

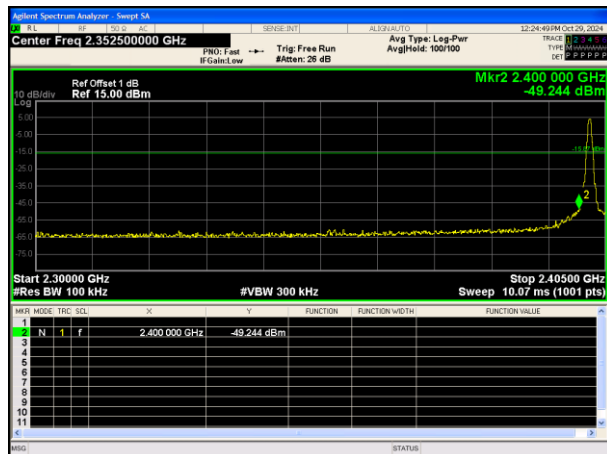


Out Of Band Emission
GFSK_DH5_Channel 0

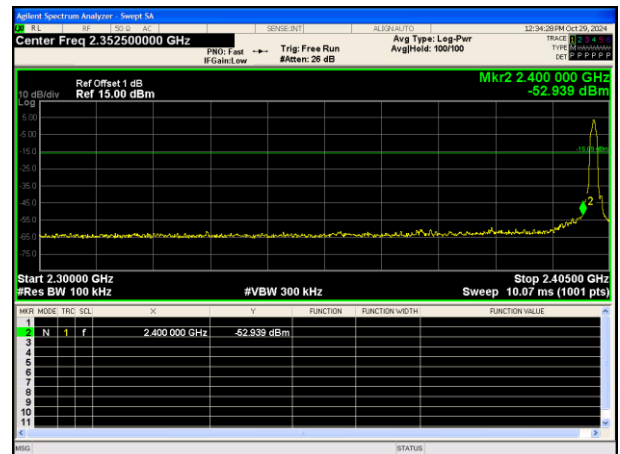

Out Of Band Emission
 $\pi/4$ DQPSK_2-DH5_Channel 0

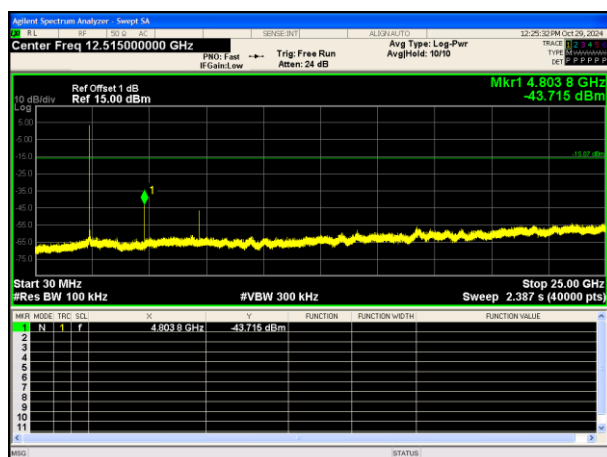

30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 0

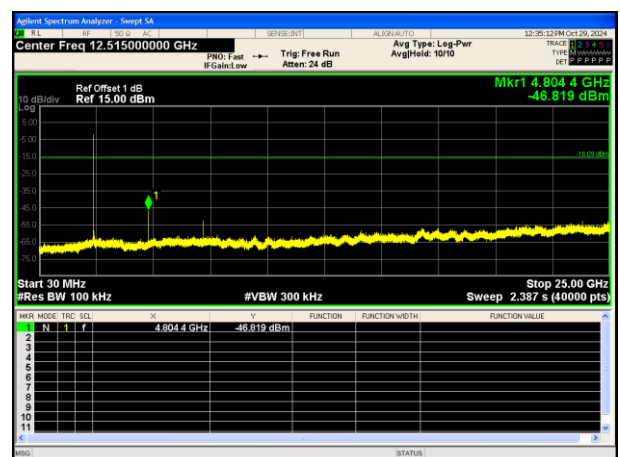


30.0 MHz - 25000.0 MHz
 $\pi/4$ DQPSK_2-DH5_Channel 0




In-Band Reference Level
GFSK_DH5_Channel 39




In-Band Reference Level
 $\pi/4$ DQPSK_2-DH5_Channel 39

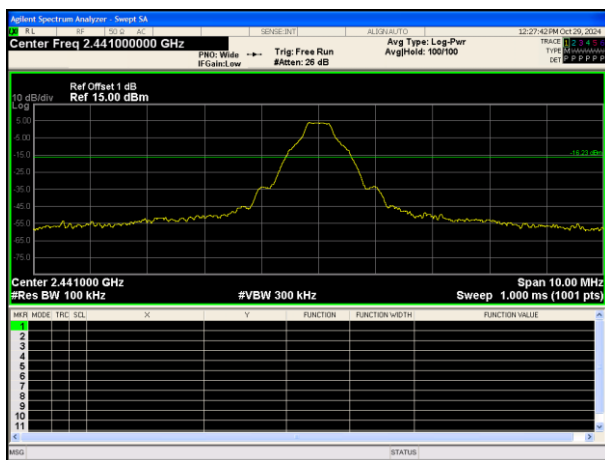


Out Of Band Emission
GFSK_DH5_Channel 39

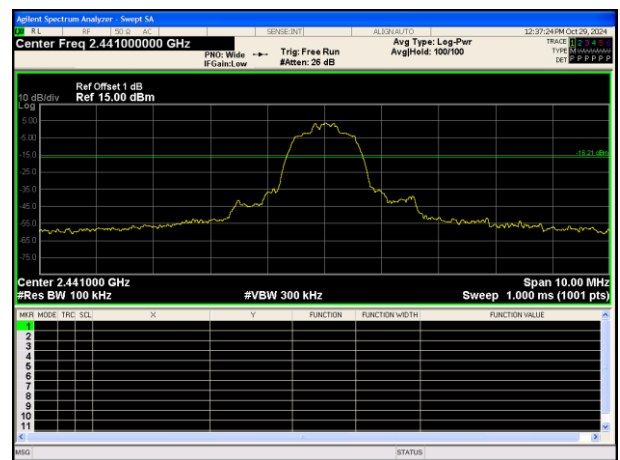

Out Of Band Emission
 $\pi/4$ DQPSK_2-DH5_Channel 39

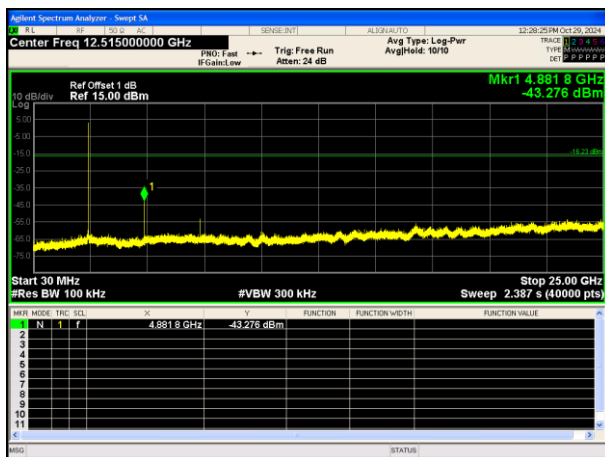

30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 39

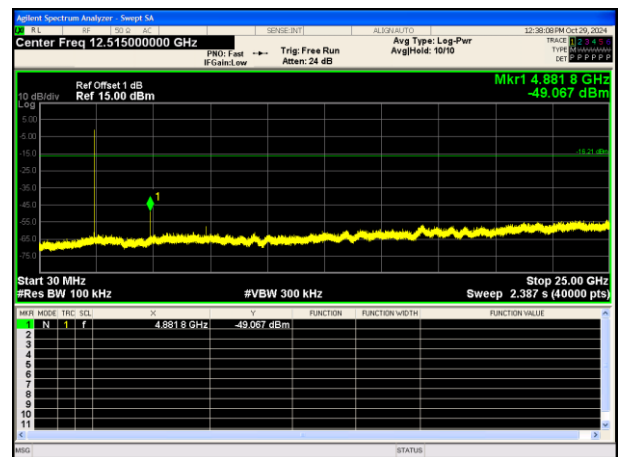


30.0 MHz - 25000.0 MHz
 $\pi/4$ DQPSK_2-DH5_Channel 39




In-Band Reference Level
GFSK_DH5_Channel 78




In-Band Reference Level
 $\pi/4$ DQPSK_2-DH5_Channel 78

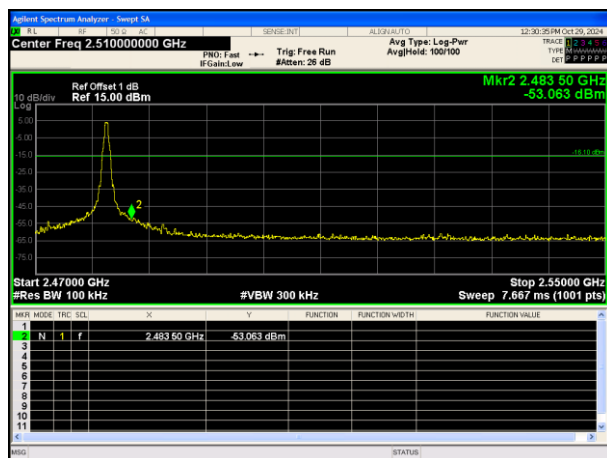


Out Of Band Emission
GFSK_DH5_Channel 78

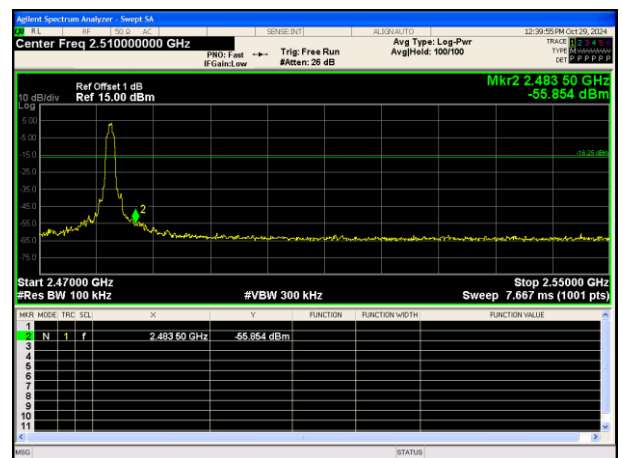

Out Of Band Emission
 $\pi/4$ DQPSK_2-DH5_Channel 78

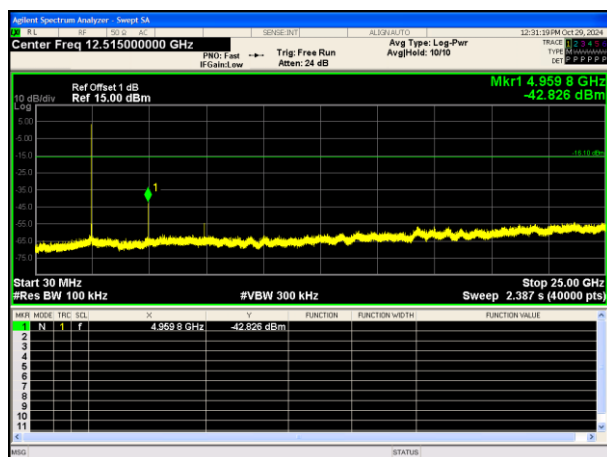


30.0 MHz - 25000.0 MHz
GFSK_DH5_Channel 78

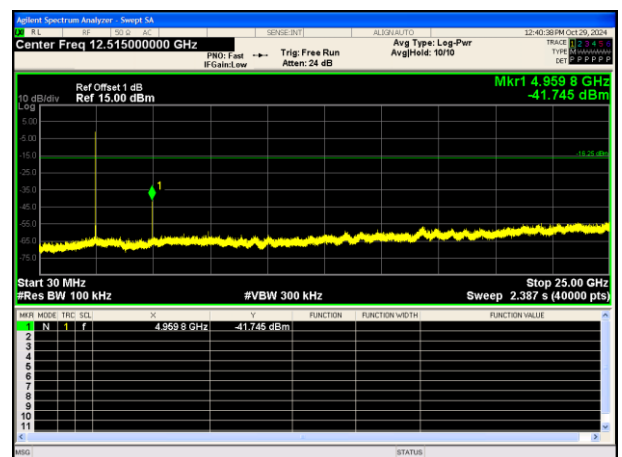


30.0 MHz - 25000.0 MHz
 $\pi/4$ DQPSK_2-DH5_Channel 78




In-Band Reference Level
8DPSK_3-DH5_Channel 0

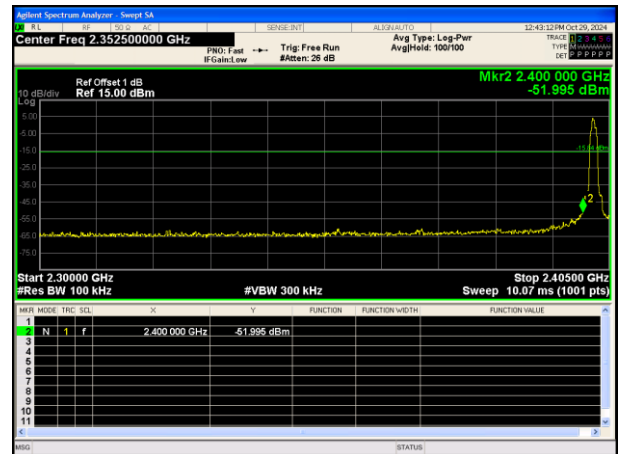


Out Of Band Emission
8DPSK_3-DH5_Channel 0

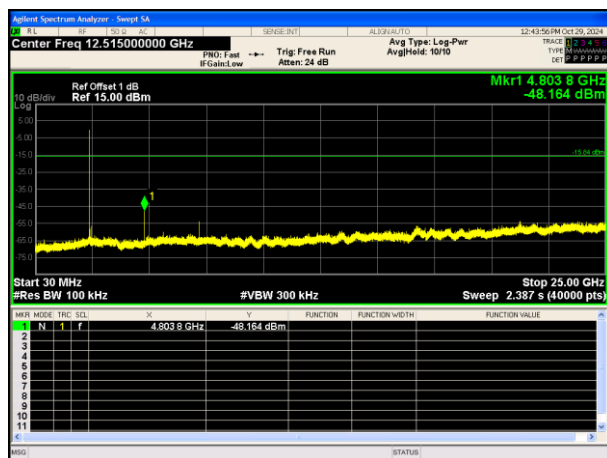


30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 0

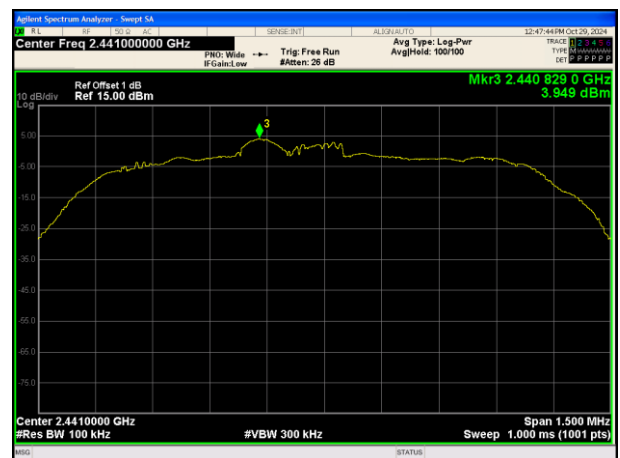

In-Band Reference Level
8DPSK_3-DH5_Channel 39

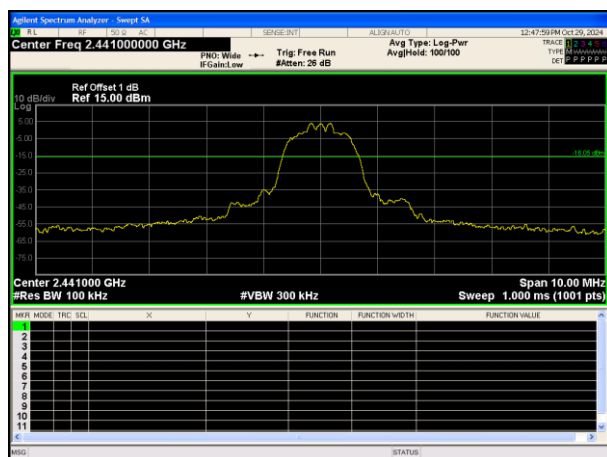


Out Of Band Emission
8DPSK_3-DH5_Channel 39

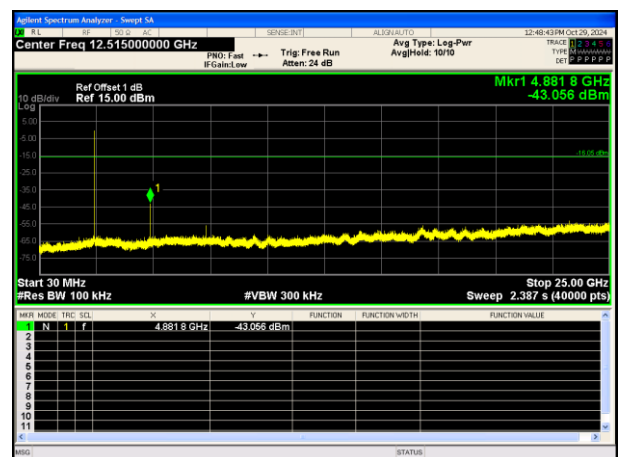


30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 39



In-Band Reference Level
8DPSK_3-DH5_Channel 78

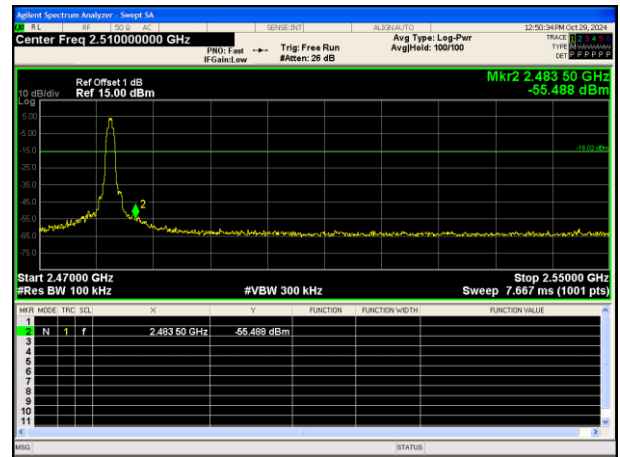


Out Of Band Emission
8DPSK_3-DH5_Channel 78

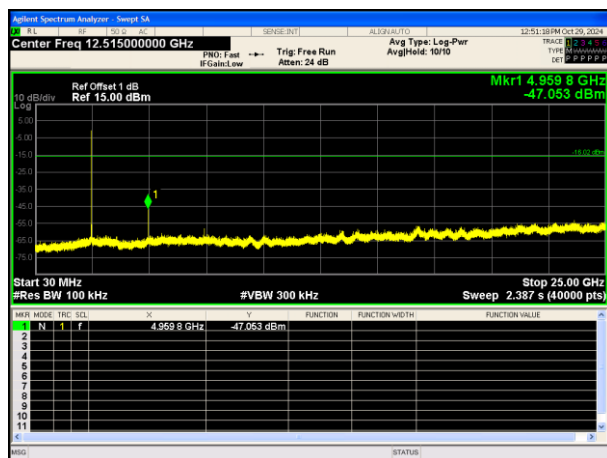


30.0 MHz - 25000.0 MHz
8DPSK_3-DH5_Channel 78




Hopping Test Graphs:

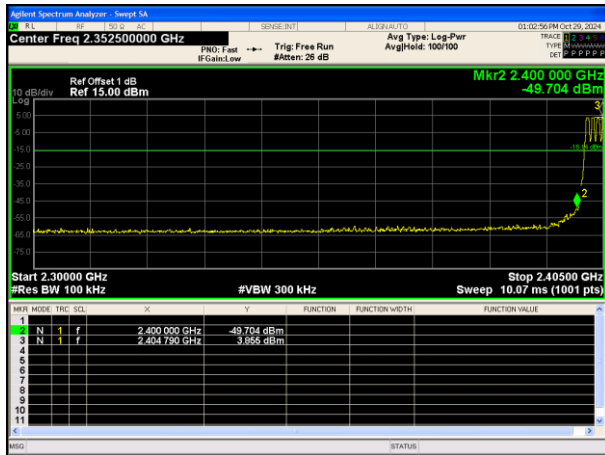


Out Of Band Emission(Left)
GFSK_DH5_Channel Hopping

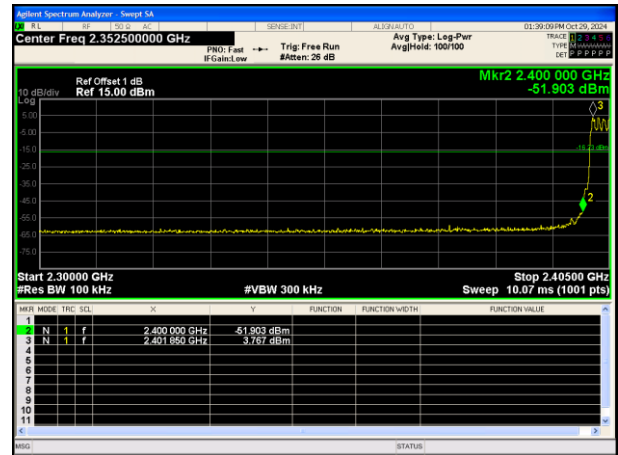


Out Of Band Emission(Left)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping

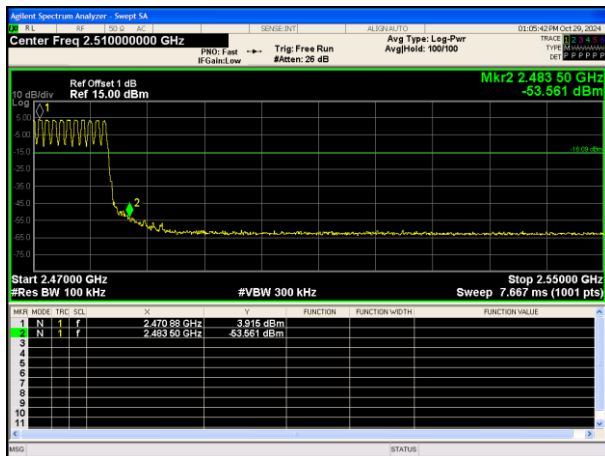


Out Of Band Emission(Right)
GFSK_DH5_Channel Hopping

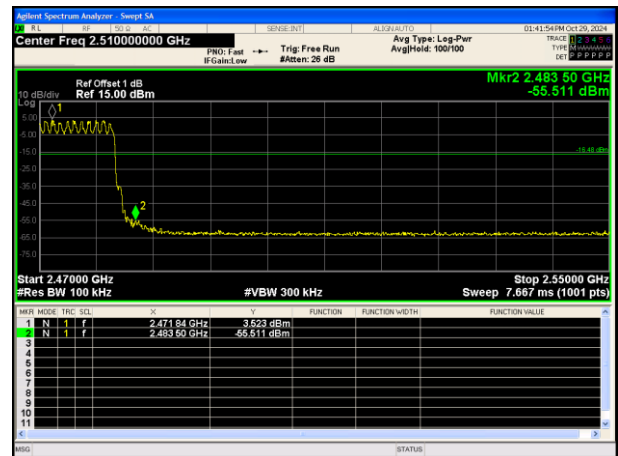


Out Of Band Emission(Right)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping

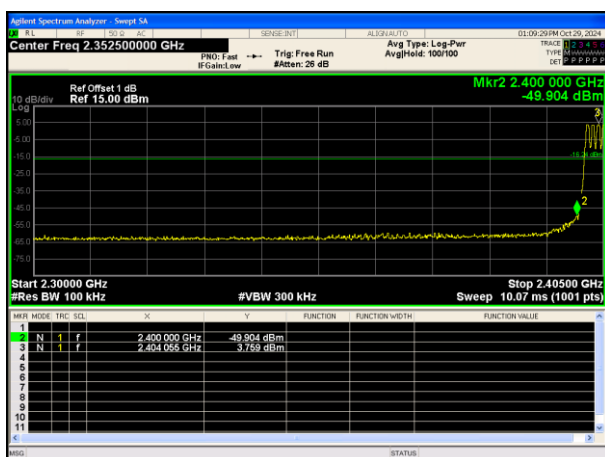


Out Of Band Emission(Left)
GFSK_DH5_Channel Hopping

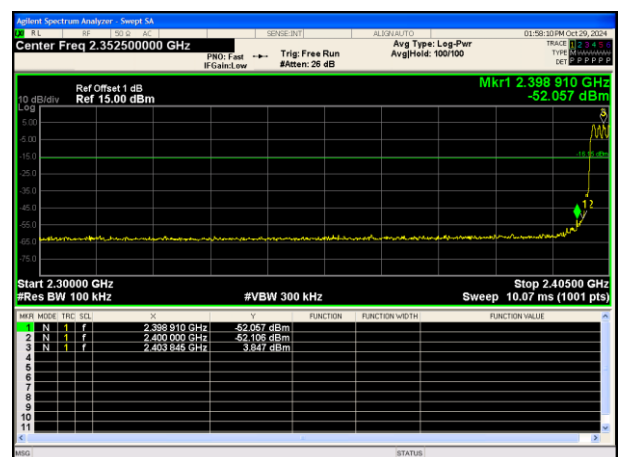


Out Of Band Emission(Left)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping

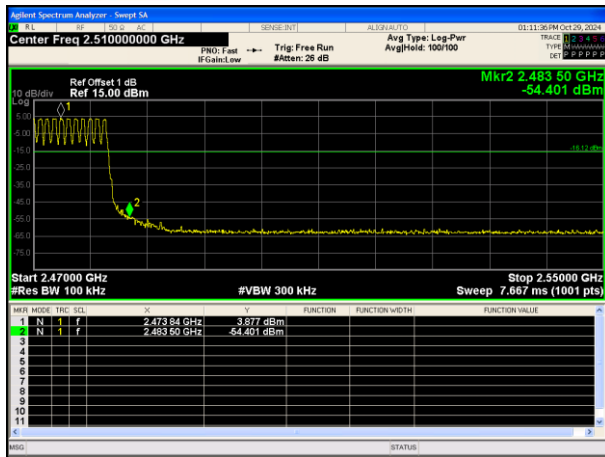


Out Of Band Emission(Right)
GFSK_DH5_Channel Hopping

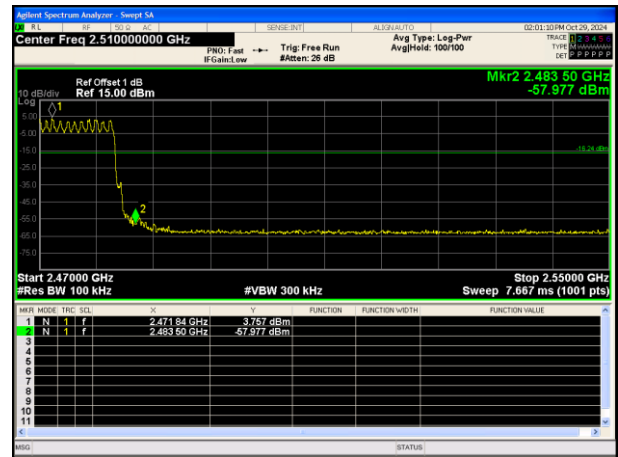


Out Of Band Emission(Right)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping

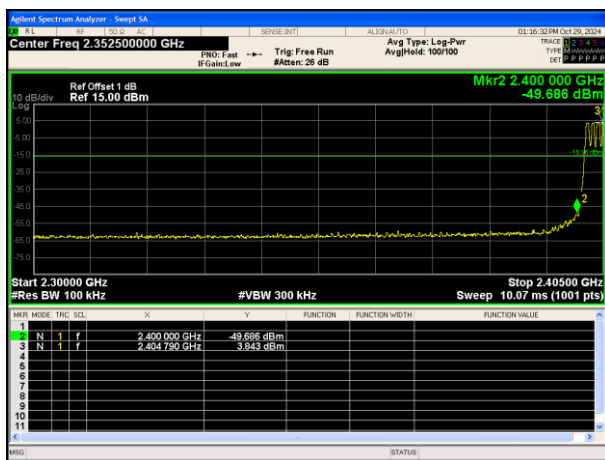


Out Of Band Emission(Left)
GFSK_DH5_Channel Hopping

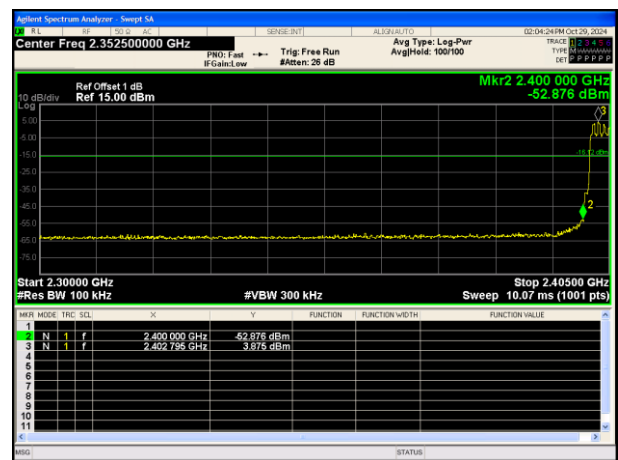


Out Of Band Emission(Left)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping

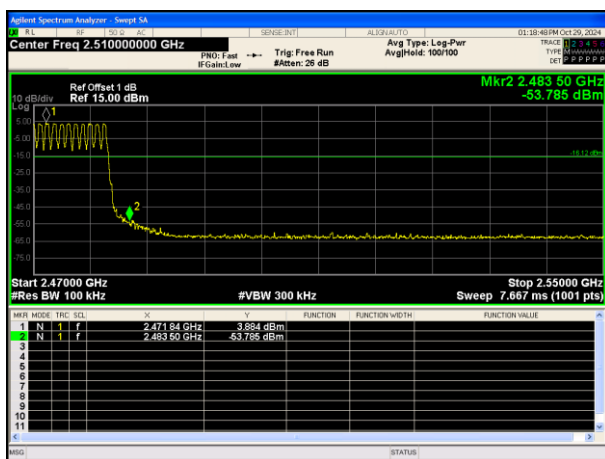


Out Of Band Emission(Right)
GFSK_DH5_Channel Hopping

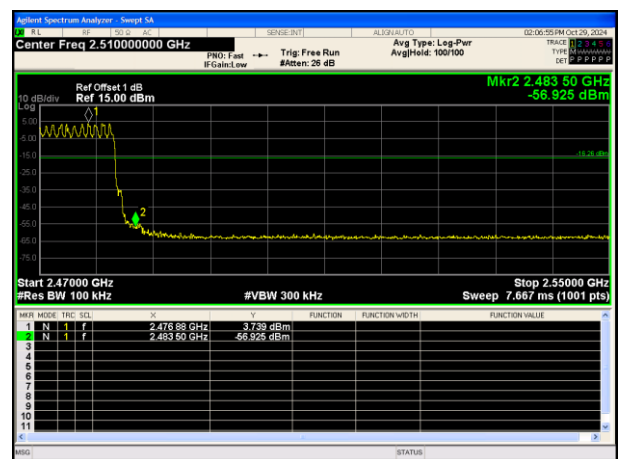


Out Of Band Emission(Right)
 $\pi/4$ DQPSK_2-DH5_Channel Hopping

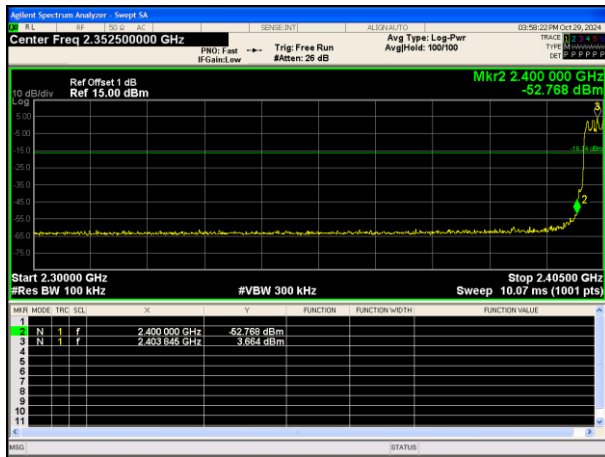


Out Of Band Emission(Left)
8DPSK_3-DH5_Channel Hopping

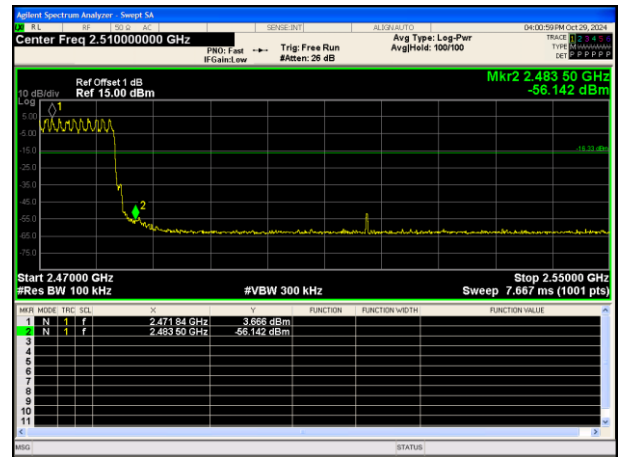


Out Of Band Emission(Right)
8DPSK_3-DH5_Channel Hopping

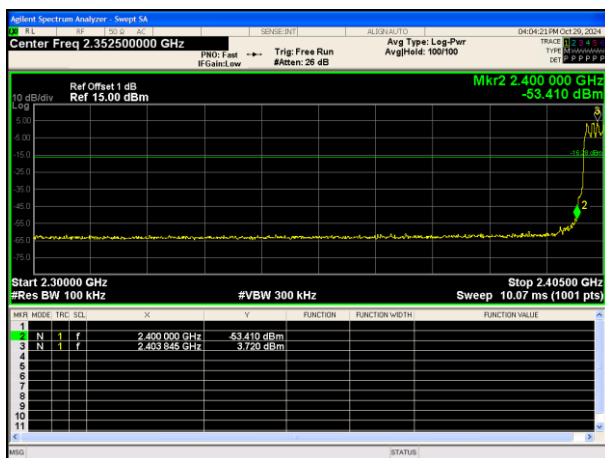


Out Of Band Emission(Left)
8DPSK_3-DH5_Channel Hopping

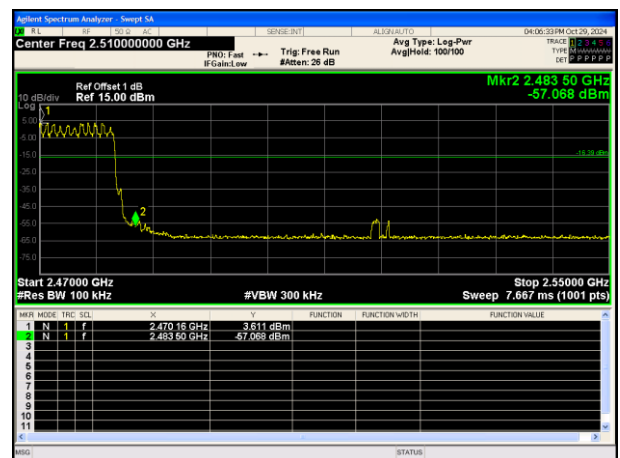

Out Of Band Emission(Right)
8DPSK_3-DH5_Channel Hopping

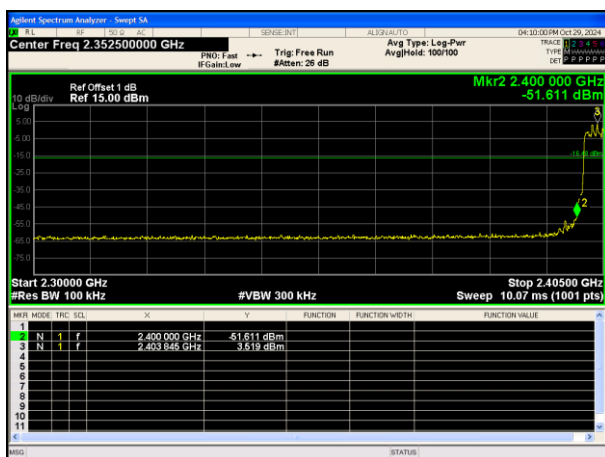

Out Of Band Emission(Left)
8DPSK_3-DH5_Channel Hopping

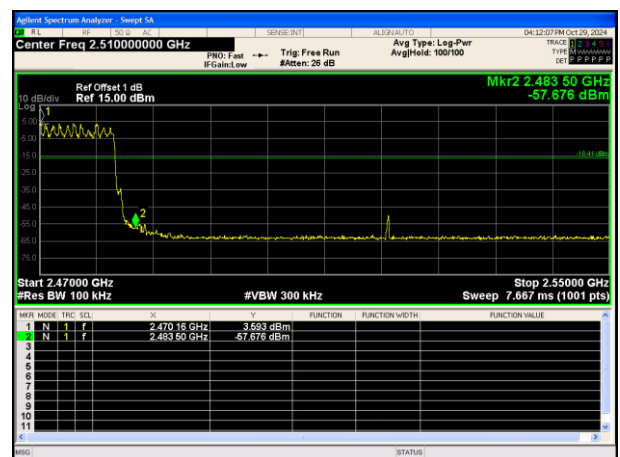

Out Of Band Emission(Right)
8DPSK_3-DH5_Channel Hopping