

TEST REPORT

Applicant: Shenzhen Jimi IoT Co., Ltd.
Address: 3-4/F, Block A, Building #7, Shenzhen International
Innovation Valley, Dashi 1st Road, Nanshan District,
Shenzhen, Guangdong, China
Equipment Type: LTE CAT1 ASSET GNSS TRACKER
Model Name: LL302
Brand Name: JIMI
FCC ID: 2AMLF-LL302
Test Standard: 47 CFR Part 15 Subpart B
Test Date: Aug. 17, 2022
Date of Issue: Sep. 01, 2022

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Zhang Guoxi

Checked by: Xia Long

Approved by: Liao Jianming
(Technical Director)

Zhang Guoxi

Xia Long

Liao Jianming

Revision History

Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Sep. 01, 2022</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	Factory Information	5
2.4	General Description for Equipment under Test (EUT)	5
2.5	Ancillary Equipment	6
2.6	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards	7
3.2	Verdict	7
3.3	Test Uncertainty	7
4	GENERAL TEST CONFIGURATIONS	8
4.1	Test Environments, Test Date and Test Engineer	8
4.2	Test Equipment List	8
4.3	Test Enclosure list	9
4.4	Test Configurations	10
4.5	Test Setups	11
4.6	Test Conditions	13
5	TEST ITEMS	14
5.1	Emission Tests	14
ANNEX A	TEST RESULTS	18

A.1	Radiated Emission	18
A.2	Conducted Emission	22
ANNEX B	TEST SETUP PHOTOS	23
ANNEX C	EUT EXTERNAL PHOTOS	23
ANNEX D	EUT INTERNAL PHOTOS	23

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	☒ Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	☐ 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Shenzhen Jimi IoT Co., Ltd.
Address	3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China

2.2 Manufacturer Information

Manufacturer	Shenzhen Jimi IoT Co., Ltd.
Address	3-4/F, Block A, Building #7, Shenzhen International Innovation Valley, Dashi 1st Road, Nanshan District, Shenzhen, Guangdong, China

2.3 Factory Information

Factory	N/A
Address	N/A

2.4 General Description for Equipment under Test (EUT)

EUT Name	LTE CAT1 ASSET GNSS TRACKER
Model Name Under Test	LL302
Series Model Name	N/A
Description of Model name differentiation	N/A
Hardware Version	TT72_MB_V1.4
Software Version	TT72_LL302E_WAAP_YY_V4.28_cta_test_220527.1836
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.5 Ancillary Equipment

Ancillary Equipment 1	Li-Polymer Battery 1	
	Brand Name	N/A
	Model No.	M145174
	Serial No.	N/A
	Capacity	6000mAh
	Rated Voltage	3.70 V
	Limit Charge Voltage	N/A
Ancillary Equipment 2	USB Cable	
	Model No.	N/A
	Length (Approx.)	1.0 m

2.6 Technical Information

Network and Wireless connectivity	2G Network GSM/GPRS 850/1900 MHz 4G Network FDD LTE Band 2/4/5/7 WIFI, GPS
-----------------------------------	--

The requirement for the following technical information of the EUT was tested in this report:

The Highest Speed of Processor	N/A
--------------------------------	-----

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

3.2 Verdict

No.	Description	FCC Rule	Test Verdict	Result
1	Radiated Emission	15.109	Pass	Annex A .1
2	Conducted Emission, AC Ports	15.107	N/A	Annex A .2
Note: The EUT is used in vehicle environment. So the Conducted Emission, AC Ports test is not applicable.				

3.3 Test Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Value
Conducted emissions (9 kHz-30 MHz)	3.22 dB
Radiated emissions (30 MHz-1 GHz)-10m	4.80 dB
Radiated emissions (30 MHz-1 GHz)-3m	4.76 dB
Radiated emissions (1 GHz-18 GHz)-3m	4.88 dB

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments, Test Date and Test Engineer

Test items	Voltage	Temperature	Relative Humidity	Ambient Pressure	Test Date	Test Engineer
Radiated Emission	DC 12V	25.0℃	46%	101kPa	Aug. 17, 2022	Tian Hengzhao

4.2 Test Equipment List

Radiated Emission Test For Frequency Below 1 GHz (3m)						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	KEYSIGHT	N9038A	MY55330120	2021.10.20	2022.10.19	☒
Amplifier (30-1GHz)	COM-MV	ZT30-1000M	B2017119081	2021.10.20	2022.10.19	☒
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-0867	2022.04.12	2025.04.11	☒
Anechoic Chamber	YIHENG	9m*6m*6m	N/A	2021.08.19	2024.08.18	☒
Description	Manufacturer	Name		Version		Use
Test Software	BALUN	BL410-E		V19.918		☒

Radiated Emission Test For Frequency Above 1 GHz (3m)						
Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due	Use
EMI Receiver	Agilent	N9038A	MY55330120	2021.10.20	2022.10.19	☒
Spectrum Analyzer	ROHDE & SCHWARZ	FSV40	101544	2022.01.04	2023.01.03	☒
Amplifier (1-12GHz)	Advanced Microwave	WLA652A	1740103	2021.10.20	2022.10.19	☒
Amplifier (0.8-21GHz)	Mini-Circuits	ZVA-213-S+	225321316	2021.10.20	2022.10.19	☒
Amplifier (18-40GHz)	COM-MV	KA_LNA18-40G-01	18050001	2021.10.20	2022.10.19	☒
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	1917	2022.06.09	2025.06.08	☒
Test Antenna-Horn	A-INFOMW	LB-180400KF	J211060273	2021.07.02	2024.07.01	☒
Anechoic Chamber	YIHENG	9m*6m*6m	N/A	2021.08.19	2024.08.18	☒
Description	Manufacturer	Name		Version		Use
Test Software	BALUN	BL410-E		V19.918		☒

4.3 Test Enclosure list


Description	Manufacturer	Model	Serial No.	Length	Description	Use
Wireless Communications Test Set	R&S	CMW500	127801	N/A	Cal. Due 2023.01.03	☒
Vehicle battery	N/A	N/A	N/A	N/A	N/A	☒
Car charger	N/A	N/A	N/A	N/A	N/A	☒

4.4 Test Configurations

Test Configurations (TC) No.	Description
TC01	<u>The GSM 850 MHz RX Test Mode</u> EUT + DC Power Supply + Car charger + USB Cable + GSM 850 RX
TC02	<u>The FDD LTE Band 5 RX Test Mode</u> EUT + DC Power Supply + Car charger + USB Cable + LTE B5 RX


4.5 Test Setups

Test Setup 1

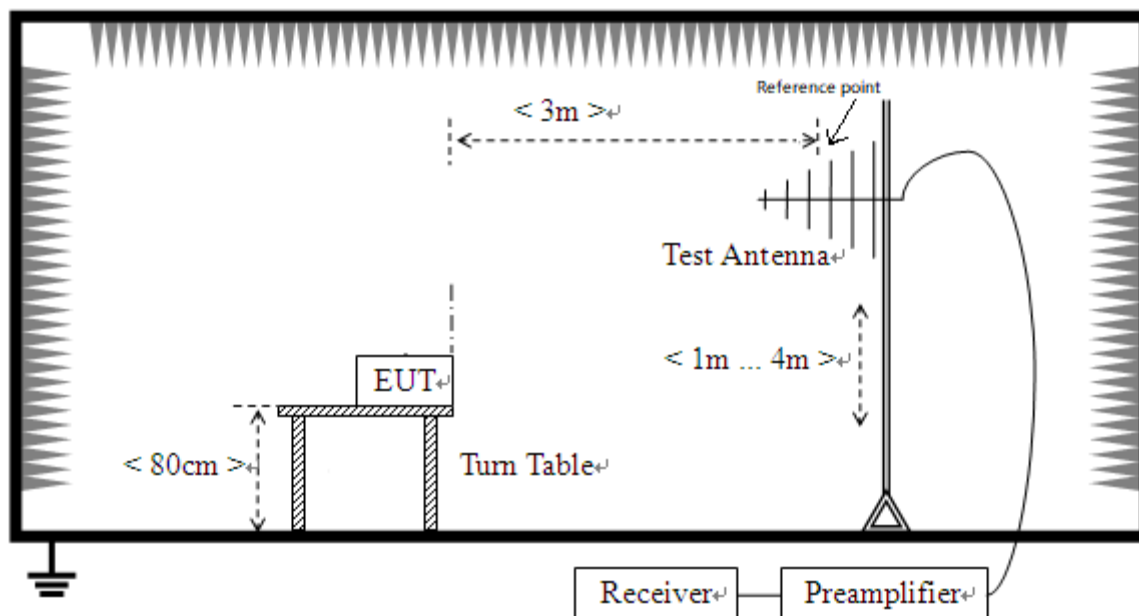


(For Radiated Emission Test (30 MHz-1 GHz))

Test Setup 2

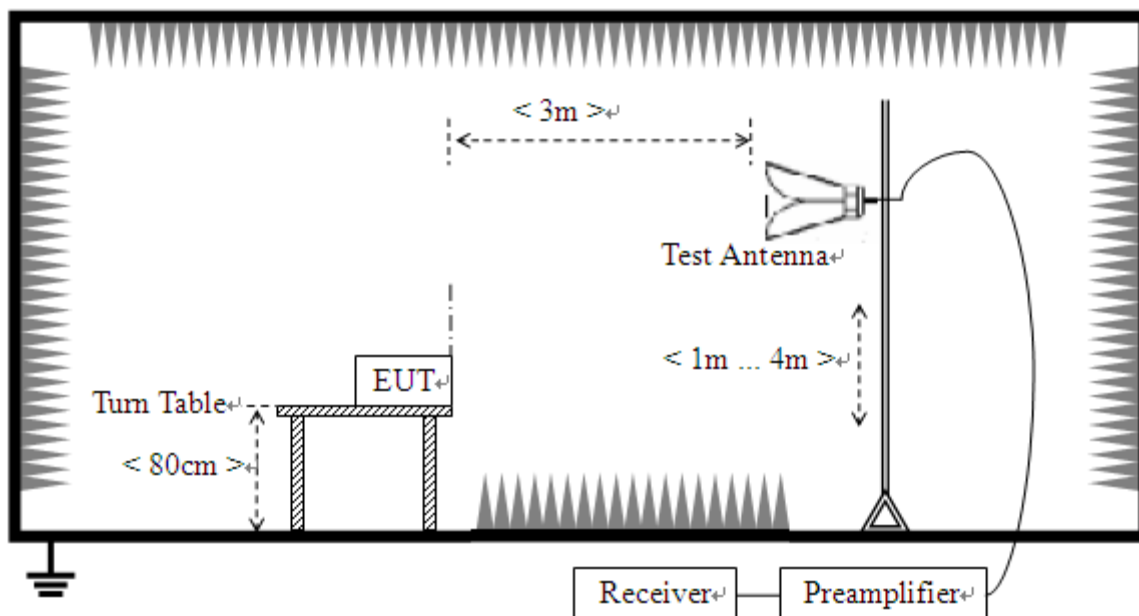

(For Radiated Emission Test (above 1 GHz))

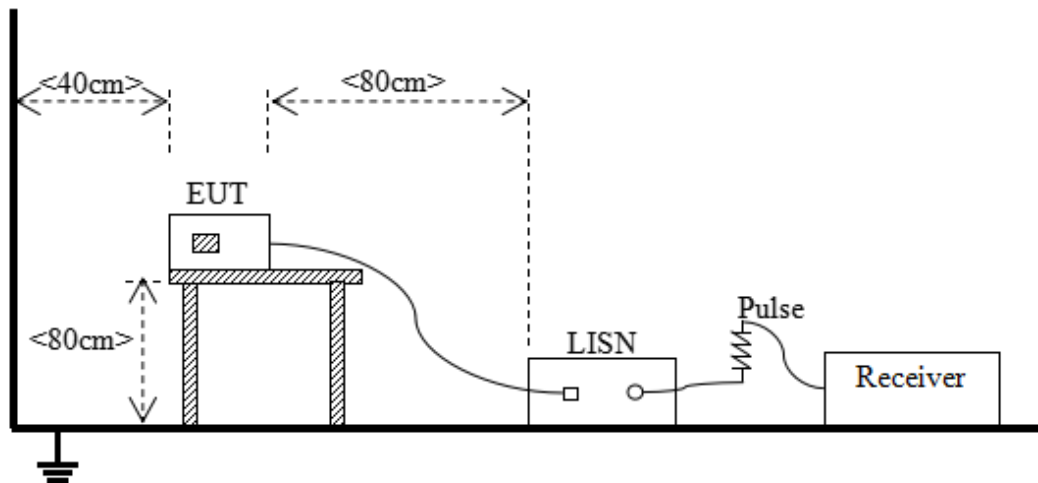Test Setup 3

(For Conducted Emission, AC Ports Test)

4.6 Test Conditions

Test Case	Test Conditions	
Radiated Emission	Test Setup	Test Setup 1&2
	Test Configuration	TC01~TC02 ^{Note}
Note: Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report. The GSM 850 MHz RX Test Mode is the worst mode in this report.		

5 TEST ITEMS

5.1 Emission Tests

5.1.1 Radiated Emission

5.1.1.1 Limit

Frequency range (MHz)	Class B (at 3 m)		Class B (at 10 m)	Class A (at 10 m)	
	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)
30 - 88	100	40	30	90	39
88 - 216	150	43.5	33.5	150	43.5
216 - 960	200	46	36	210	46.4
Above 960	500	54	44	300	49.5

NOTE:

- 1) Field Strength (dB $\mu\text{V/m}$) = $20 \cdot \log [\text{Field Strength } (\mu\text{V/m})]$.
- 2) In the emission tables above, the tighter limit applies at the band edges.

5.1.1.2 Test Setup

Refer to 4.5 section (test setup 1 to test setup 2) for radiated emission test, the photo of test setup please refer to ANNEX B.

5.1.1.3 Test Procedure

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

An initial pre-scan was performed in the chamber using the EMI Receiver in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bi-Log antenna with 2 orthogonal polarities.

The measurement frequency range is from 30 MHz to the 5th harmonic of the maximum frequency of the EUT internal source. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1 \text{ GHz}$, 100 kHz for $f < 1 \text{ GHz}$

VBW $\geq$ RBW

Sweep = auto

Detector function = peak for $f < 1 \text{ GHz}$, peak & RMS Average for $f \geq 1 \text{ GHz}$

Trace = max hold

5.1.1.4 Test Result

Please refer to ANNEX A.1.

NOTE:

1. Results (dB μ V/m) = Reading (dB μ V/m) + Factor (dB/m)

The reading level is calculated by software which is not shown in the sheet

2. Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain (dB)

3. Over limit = Results – Limit.

5.1.2 Conducted Emission

5.1.2.1 Test Limit

Frequency range (MHz)	Class A	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	79	66
0.50 - 30	73	60

Frequency range (MHz)	Class B	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- 1) The lower limit shall apply at the band edges.
- 2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50 MHz.

5.1.2.2 Test Setup

Refer to 4.5 section test (test setup 3) for conducted emission, the photo of test setup please refer to ANNEX B.

5.1.2.3 Test Procedure

The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The test frequency range is from 150 kHz to 30 MHz. The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels that are more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed.

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

Use the following spectrum analyzer settings:

RBW = 9 kHz

VBW $\geq$ RBW

Sweep = 10ms

Detector function = peak & Average

Trace = max hold

5.1.2.4 Test Result

Please refer to ANNEX A.2.

NOTE:

1. Results (dBμV) = Reading (dBμV) + Factor (dB)

The reading level is calculated by software which is not shown in the sheet

2. Factor = Insertion loss + Cable loss

3. Over limit = Results – Limit.

ANNEX A TEST RESULTS

A.1 Radiated Emission

Note 1: The symbol of "--" in the table which means not application.

Note 2: For the test data above 1 GHz, according the ANSI C63.4-2014, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.


Note 3: The Radiated Emission from 18G-40G is noise only, do not show on the report.

Note 4: All the configurations were pre tested, only the worst configuration has been reported in this report.

Test Data and Plots


The GSM 850 MHz RX Test Mode

A.1.1 Test Antenna Vertical, 30 MHz – 1 GHz

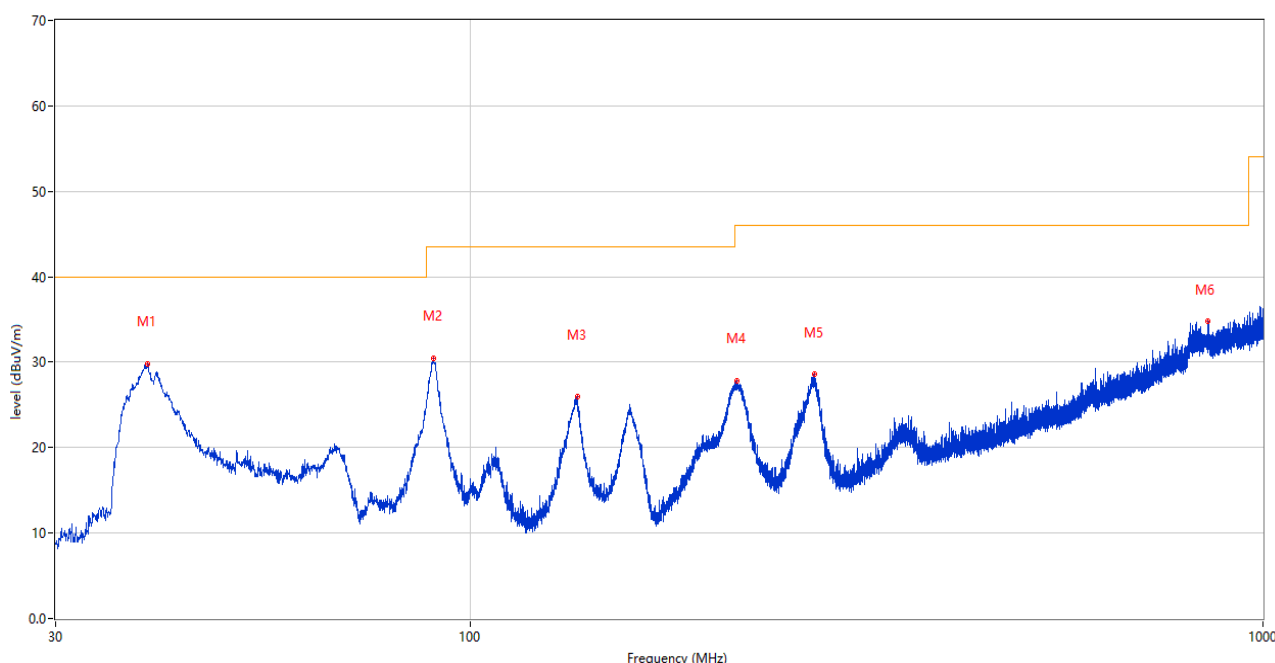


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.215	29.77	-25.85	40.0	-10.23	Peak	98.00	100	Vertical	Pass
2	89.994	30.43	-26.96	43.5	-13.07	Peak	73.00	100	Vertical	Pass
3	136.506	25.94	-28.27	43.5	-17.56	Peak	158.00	100	Vertical	Pass
4	216.725	27.79	-24.07	46.0	-18.21	Peak	360.00	200	Vertical	Pass
5	271.966	28.54	-21.71	46.0	-17.46	Peak	303.00	100	Vertical	Pass
6	852.609	34.87	-4.03	46.0	-11.13	Peak	50.00	100	Vertical	Pass

A.1.2 Test Antenna Horizontal, 30 MHz – 1 GHz

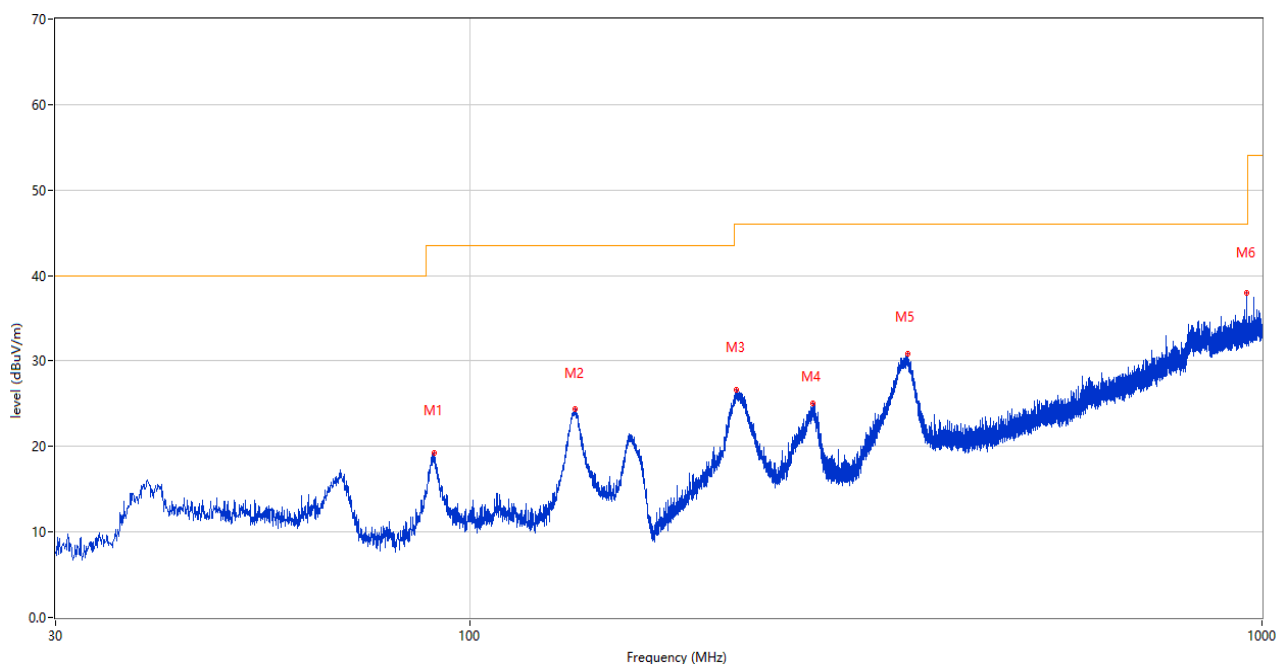


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	90.140	19.23	-26.93	43.5	-24.27	Peak	188.00	200	Horizontal	Pass
2	135.778	24.41	-28.28	43.5	-19.09	Peak	48.00	200	Horizontal	Pass
3	217.162	26.64	-24.05	46.0	-19.36	Peak	151.00	200	Horizontal	Pass
4	271.336	25.06	-21.64	46.0	-20.94	Peak	55.00	100	Horizontal	Pass
5	356.938	30.87	-18.68	46.0	-15.13	Peak	11.00	100	Horizontal	Pass
6	956.059	38.03	-3.55	46.0	-7.97	Peak	360.00	200	Horizontal	Pass

A.1.3 Test Antenna Vertical, 1 GHz – 18 GHz

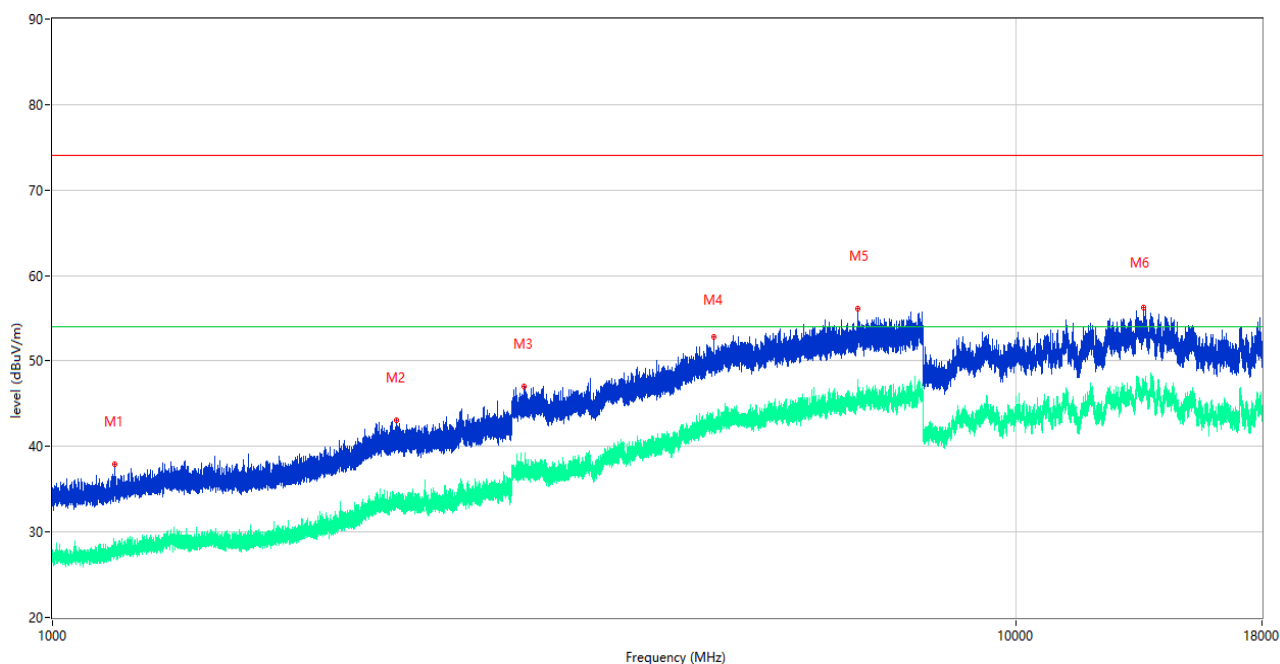

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1159.500	37.92	-17.36	74.0	-36.08	Peak	355.00	100	Vertical	Pass
1**	1159.500	27.31	-17.36	54.0	-26.69	AV	355.00	100	Vertical	Pass
2	2274.000	43.12	-11.87	74.0	-30.88	Peak	319.00	100	Vertical	Pass
2**	2274.000	33.57	-11.87	54.0	-20.43	AV	319.00	100	Vertical	Pass
3	3086.500	47.06	-5.55	74.0	-26.94	Peak	24.00	100	Vertical	Pass
3**	3086.500	37.36	-5.55	54.0	-16.64	AV	24.00	100	Vertical	Pass
4	4856.250	52.84	0.28	74.0	-21.16	Peak	254.00	100	Vertical	Pass
4**	4856.250	41.98	0.28	54.0	-12.02	AV	254.00	100	Vertical	Pass
5	6857.500	56.16	1.94	74.0	-17.84	Peak	254.00	100	Vertical	Pass
5**	6857.500	47.44	1.94	54.0	-6.56	AV	254.00	100	Vertical	Pass
6	13574.500	56.20	4.73	74.0	-17.80	Peak	189.00	100	Vertical	Pass
6**	13574.500	46.41	4.73	54.0	-7.59	AV	189.00	100	Vertical	Pass

A.1.4 Test Antenna Horizontal, 1 GHz – 18 GHz

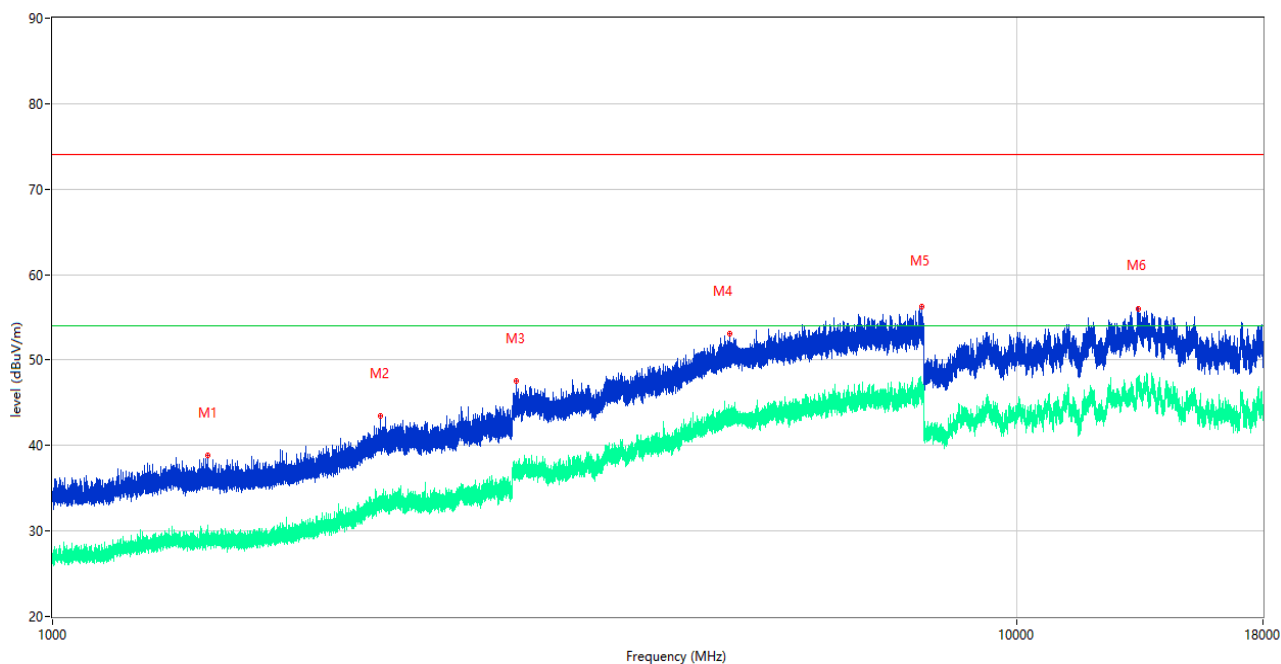

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Over Limit (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1449.700	38.87	-16.53	74.0	-35.13	Peak	208.00	100	Horizontal	Pass
1**	1449.700	29.18	-16.53	54.0	-24.82	AV	208.00	100	Horizontal	Pass
2	2186.800	43.45	-12.28	74.0	-30.55	Peak	1.00	100	Horizontal	Pass
2**	2186.800	33.11	-12.28	54.0	-20.89	AV	1.00	100	Horizontal	Pass
3	3029.500	47.61	-6.26	74.0	-26.39	Peak	360.00	100	Horizontal	Pass
3**	3029.500	36.70	-6.26	54.0	-17.30	AV	360.00	100	Horizontal	Pass
4	5043.250	53.05	0.08	74.0	-20.95	Peak	45.00	100	Horizontal	Pass
4**	5043.250	42.74	0.08	54.0	-11.26	AV	45.00	100	Horizontal	Pass
5	7971.000	56.27	2.14	74.0	-17.73	Peak	130.00	100	Horizontal	Pass
5**	7971.000	45.23	2.14	54.0	-8.77	AV	130.00	100	Horizontal	Pass
6	13362.000	55.93	5.15	74.0	-18.07	Peak	84.00	100	Horizontal	Pass
6**	13362.000	47.87	5.15	54.0	-6.13	AV	84.00	100	Horizontal	Pass

A.2 Conducted Emission

Note: Not applicable.

ANNEX B TEST SETUP PHOTOS

Please refer the document “BL-SZ2280124-AE.PDF”.

ANNEX C EUT EXTERNAL PHOTOS

Please refer the document “BL-SZ2280124-AW.PDF”.

ANNEX D EUT INTERNAL PHOTOS

Please refer the document “BL-SZ2280124-AI.PDF”.

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--