



Report No.: TW2107388-04E File Reference No.: 2021-09-06

Applicant: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Product: Commercial Kiosk Tablet

Model No.: EMT431

Trademark: Glory Star

Test Standards: FCC Part 15 Subpart E, Paragraph 15.407

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10,FCC Part 15 Subpart C, Paragraph 15.247 for the evaluation of electromagnetic

compatibility

Approved By

Jack Chung

Manager

Dated: September 06, 2021

Results appearing herein relate only to the sample tested

The technical reports is issued errors and emissions exempt

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

# SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2107388-04E Page 2 of 96

Date: 2021-09-06



# **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

# FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

# Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

# **A2LA (Certification Number:5013.01)**

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



# **Test Report Conclusion**

# Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Undesirable Emission and Restrict band.	12
7.0	Bandwidth Measurement.	31
8.0	Peak Transmit Power Measurement.	66
9.0	Peak Power Spectral Density Measurement	70
10.0	Frequency Stability	91
11.0	Antenna Requirement	93
12.0	IC Label	94
13.0	Photo of Test Setup and EUT View.	95

Date: 2021-09-06



### 1.0 General Details

### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

### 1.2 Applicant Details

Applicant: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: Bldg., 9, 4/F., ZongYuntai Technology Industrial Park, Songbai Road, Shiyan Street, Boan,

Shenzhen, China

Telephone: (755)-26001808-305 Fax: (755)-26002933

### 1.3 Description of EUT

Product: Commercial Kiosk Tablet

Manufacturer: GLORY STAR TECHNICS (SHENZHEN) CO., LTD.

Address: Bldg., 9, 4/F., Zong Yuntai Technology Industrial Park, Songbai Road, Shiyan Street,

Boan, Shenzhen, China

Trademark: Glory Star Additional Trademark: N/A

Model Number: EMT431

Additional Model Number: N/A

Type of Modulation IEEE 802.11a/n (HT20/HT40): OFDM (64QAM, 16QAM, QPSK, BPSK);

IEEE 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM

Frequency Band 1: 5180MHz-5240MHz

Channel Separation 802.11a/802.11n20:20MHz, 802.11n40:40MHz, 802.11ac: 80MHz

Air Data Rate IEEE 802.11a: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n/HT20: mcs0: 6.5Mbps, mcs1:13Mbps, mcs2:19.5Mbps, mcs3:26Mbps,

mcs4:39Mbps, mcs5:52Mbps, mcs6:58.5Mbps, mcs7:65Mbps

IEEE 802.11n/HT40: mcs0:15Mbps, mcs1:30Mbps, mcs2:45Mbps, mcs3:60Mbps,

mcs4:90Mbps, mcs5:120Mbps, mcs6:135Mbps, mcs7:150Mbps

IEEE 802.11ac: Up to 433.3Mbps

Antenna: Two Dipole antennas used.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2107388-04E Page 5 of 96

Date: 2021-09-06

Antenna Gain: 3.56dBi for each one. (Declared by the applicant)

Test Mode: During testing, EUT was set to 100% duty cycle. 6Mbps air data rate was the worst case

for 802.11a mode; mcs0 air data rate was the worst case for 802.11n mode; 23.9Mbps air

data rate was the worst case for 802.11ac mode.

Frequency Selection By software

Input Voltage: 100-240V, ~50/60Hz, 0.7A, 100W (max)

### Each Channel Operation Frequency

	Zuch Chamier Speranon Frequency					
	Band 1					
802.11a / 11n HT2	20 / 802.11ac VHT20	802.11n HT40 / 802.11acVHT40		802.11ac VHT80		
Channel	Frequency	Channel	Frequency	Channel	Frequency	
36	5180MHz	38	5190 MHz	42	5210 MHz	
40	5200 MHz	46	5230 MHz			
44	5220 MHz					
48	5240 MHz					

### The selected test channels as follows:

	Band 1					
802.11a / 11n HT20		802.11n HT40		802.11ac VHT80		
Channel Frequency Channel Freque		Frequency	Channel	Frequency		
36	5180MHz	38	5190 MHz	42	5210 MHz	
40	5200 MHz	46	5230 MHz			
48	5240 MHz					

Note: 802.11ac VHT20/VHT40 is similar with 802.11n HT20/HT40.

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2021-07-29 to 2021-09-06

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Date: 2021-09-06



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17
LISN	R&S	EZH3-Z5	100294	2021-06-18	2022-06-17
LISN	R&S	EZH3-Z5	100253	2021-06-18	2022-06-17
Ultra Broadband ANT	R&S	HL562	100157	2021-06-18	2022-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2021-06-18	2022-06-17
Loop Antenna	EMCO	6507	00078608	2021-06-18	2024-06-17
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2021-06-18	2023-06-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2022-07-01
Power meter	Anritsu	ML2487A	6K00003613	2021-08-22	2022-08-21
Power sensor	Anritsu	MA2491A	32263	2021-08-22	2022-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17
Spectrum	RS	FSP	1164.4391.38	2021-01-07	2022-01-06
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2021-06-18	2022-06-17
RF Cable	Zhengdi	7m		2021-06-18	2022-06-17
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17
LISN	SCHAFFNER	NNB42	00012	2021-01-07	2022-01-06

# 2.2 Automation Test Software

# For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

# For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 7 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### 3.0 **Technical Details**

#### 3.1 **Summary of test results**

The EUT has been tested ac	cording to the following speci	fications:	
Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.407	<b>Conducted Emission Test</b>	Pass	Complies
FCC Part 15 Subpart E Paragraph 15.407 (b1/4/5/6/7), Part 15.205 and Part 15.209	Undesirable Emission and Restrict band	Pass	Complies
FCC Part 15, Paragraph 15.407 (a1/2/3)	Peak Transmit Power	Pass	Complies
FCC Part 15, Paragraph 15.407 (a)(6)	Peak Power Excursion	Pass	Complies
FCC Part 15, Paragraph 15.407 (a/1/2/3)	Peak Power Spectral Density	Pass	Complies
FCC Part 15, Paragraph 15.407(g)	Frequency Stability	Pass	Complies

#### 3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247, ANSI C63.10:2013, ANSI C63.4:2014 789033 D02 General UNII Test Procedures New Rules v01r04

#### 4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 96


Report No.: TW2107388-04E

Date: 2021-09-06



### 5. Power Line Conducted Emission Test

### 5.1 Schematics of the test

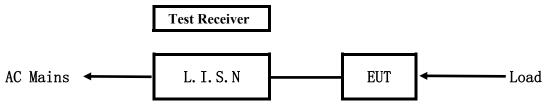


**EUT: Equipment Under Test** 

### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2009. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

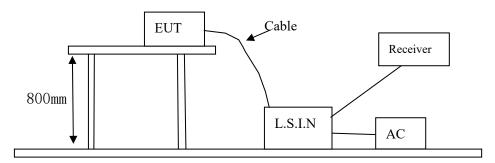

### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A.	EUT

Device	Manufacturer	Model	FCC ID
Commercial Kiosk Tablet	GLORY STAR TECHNICS	EMT431	2AACS-EMT431
Commercial Klosk Tablet	(SHENZHEN) CO., LTD.	EWI1431	ZAACS-EMI1431

Report No.: TW2107388-04E Page 9 of 96

Date: 2021-09-06



#### B. Internal Device

Device	Manufacturer	Model	Rating

# C. Peripherals

Device Manufacturer Model	Rating
---------------------------	--------

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

# 5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)		
(MHz)	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	56.0	46.0	
5.00 ~ 30.00	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2021-09-06



# A: Conducted Emission on Live Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keeping WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

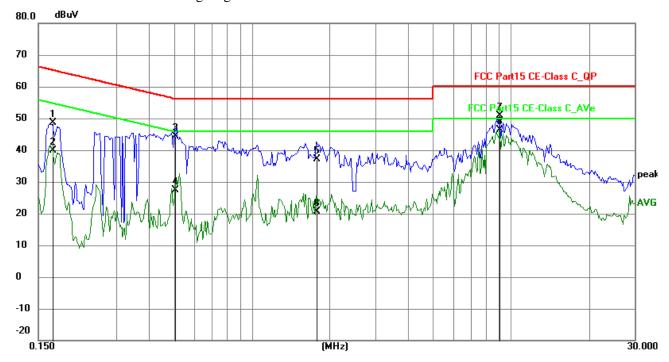

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1695	38.85	9.77	48.62	64.98	-16.36	QP	Р
2	0.1695	30.15	9.77	39.92	54.98	-15.06	AVG	Р
3	0.5049	34.50	9.77	44.27	56.00	-11.73	QP	П
4	0.5049	17.69	9.77	27.46	46.00	-18.54	AVG	П
5	1.7802	27.24	9.80	37.04	56.00	-18.96	QP	П
6	1.7802	10.86	9.80	20.66	46.00	-25.34	AVG	П
7	9.0450	40.87	10.11	50.98	60.00	-9.02	QP	Р
8	9.0450	36.38	10.11	46.49	50.00	-3.51	AVG	Р

Date: 2021-09-06



# B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


**EUT Operating Environment** 

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa

**EUT set Condition: Keeping WIFI Transmitting** 

**Results: Pass** 

Please refer to following diagram for individual

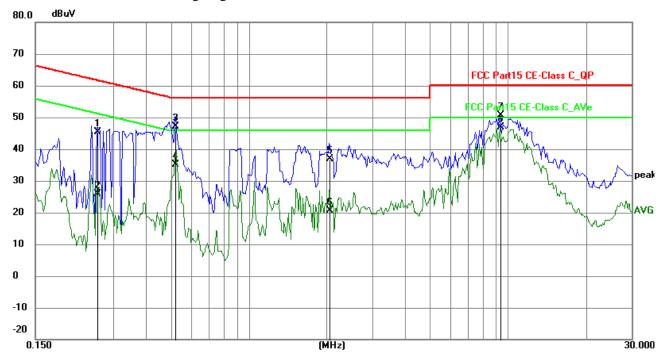

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.2592	35.56	9.75	45.31	61.46	-16.15	QP	Р
2	0.2592	16.23	9.75	25.98	51.46	-25.48	AVG	Р
3	0.5205	37.24	9.77	47.01	56.00	-8.99	QP	Р
4	0.5205	25.46	9.77	35.23	46.00	-10.77	AVG	Р
5	2.0531	27.13	9.80	36.93	56.00	-19.07	QP	Р
6	2.0531	10.94	9.80	20.74	46.00	-25.26	AVG	Р
7	9.3141	40.51	10.13	50.64	60.00	-9.36	QP	Р
8	9.3141	36.84	10.13	46.97	50.00	-3.03	AVG	Р

Page 12 of 96

Report No.: TW2107388-04E

Date: 2021-09-06




### 6 Undesirable Emission and Restrict band

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 40 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz, VBW=3MHz and PK detector.

  Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

### **Block diagram of Test setup**

For radiated emissions from 9kHz to 30MHz

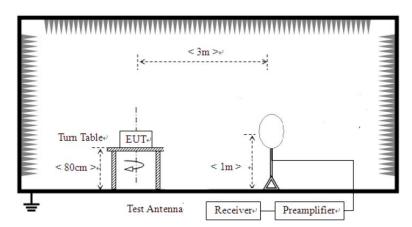


Page 13 of 96

Report No.: TW2107388-04E


Date: 2021-09-06



For radiated emissions from 30MHz to1GHz

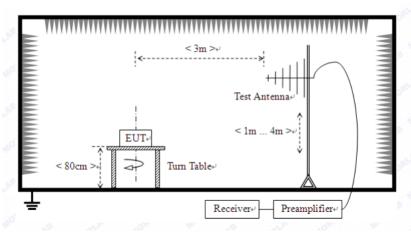

For radiated emissions above 1GHz

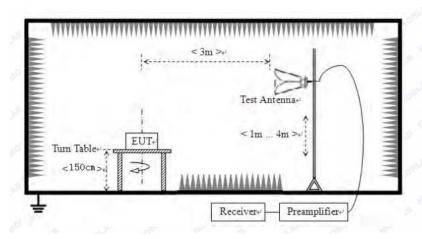

- 6.2 Configuration of The EUT
  Same as section 5.3 of this report
- 6.3 EUT Operating Condition

  Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2107388-04E Page 14 of 96

Date: 2021-09-06



### Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz
- (2) For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27dBm/MHz.

Note: 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)

- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Date: 2021-09-06



Page 15 of 96

Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

**EUT set Condition: Keeping WIFI Transmitting** 

**Results: Pass** 


Page 16 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



# Test Figure

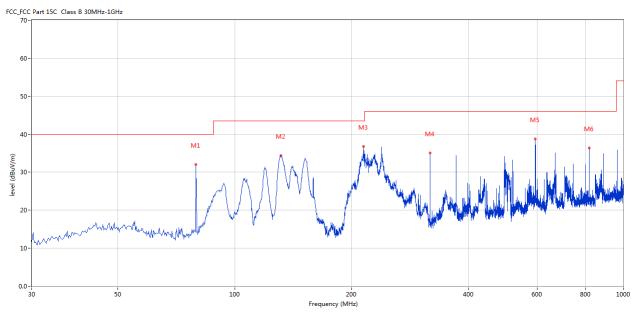

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	79.458	32.01	-17.46	40.0	-7.99	Peak	203.00	100	Horizontal	Pass
2	131.582	34.41	-16.93	43.5	-9.09	Peak	277.00	100	Horizontal	Pass
3	214.739	36.80	-13.58	43.5	-6.70	Peak	119.00	100	Horizontal	Pass
4	318.260	35.06	-10.70	46.0	-10.94	Peak	90.00	100	Horizontal	Pass
5	593.914	38.79	-5.25	46.0	-7.21	Peak	309.00	100	Horizontal	Pass
6	816.716	36.44	-2.92	46.0	-9.56	Peak	3.00	100	Horizontal	Pass


Page 17 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



# Test Figure

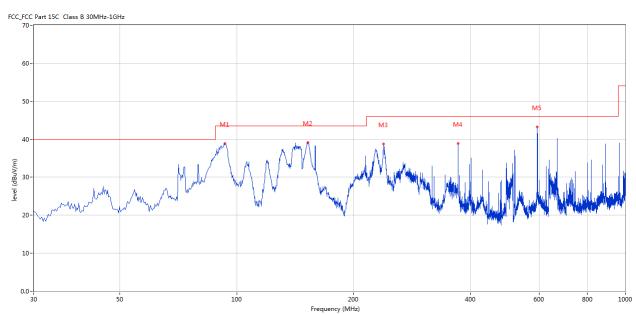

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	93.277	38.92	-14.43	43.5	-4.58	Peak	233.00	100	Vertical	Pass
2	152.674	39.18	-16.88	43.5	-4.32	Peak	189.00	100	Vertical	Pass
3	238.498	38.79	-12.46	46.0	-7.21	Peak	114.00	100	Vertical	Pass
4	371.112	38.88	-9.52	46.0	-7.12	Peak	330.00	100	Vertical	Pass
5	593.914	43.23	-5.25	46.0	-2.77	Peak	265.00	100	Vertical	Pass

Date: 2021-09-06



# Operation Mode: Keeping Transmitting under CH36 for 11g at 6Mbps

	1 0		1
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
5180.00	97.26 (PK)	Н	Fundamental Fraguency
5180.00	87.06 (PK)	V	Fundamental Frequency
10360	62.31 (PK) /49.79 (AV)	Н	74(Peak)/ 54(AV)
10360	52.12 (PK)	V	74(Peak)/ 54(AV)
15540		V	74(Peak)/ 54(AV)
20720		H/V	74(Peak)/ 54(AV)
25900		H/V	74( eak)/ 54(AV)
31080		H/V	74(Peak)/ 54(AV)
36260		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

### Operation Mode: Keeping Transmitting under CH40 for 11g at 6Mbps

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB µ V/m)
5200.00	99.21 (PK)	Н	Fundamental Fraguency
5200.00	89.43 (PK)	V	Fundamental Frequency
10400	62.49 (PK) / 50.12 (AV)	Н	74(Peak)/ 54(AV)
10400		V	74(Peak)/ 54(AV)
15600		V	74(Peak)/ 54(AV)
20800	-	H/V	74(Peak)/ 54(AV)
26000	-	H/V	74(Peak)/ 54(AV)
31200		H/V	74(Peak)/ 54(AV)
36400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

Page 19 of 96 Report No.: TW2107388-04E

Date: 2021-09-06



# Operation Mode: Keeping Transmitting under CH48 for 11g at 6Mbps

	1 0 0	U	•
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \( \mu \text{V/m} \)
5240.00	97.97 (PK)	Н	Eun domantal Engaganay
5240.00	87.18 (PK)	V	Fundamental Frequency
10480	62.65 (PK) / 50.52 (AV)	Н	74(Peak)/ 54(AV)
10480	-	V	74(Peak)/ 54(AV)
15720		H/V	74(Peak)/ 54(AV)
20960		H/V	74(Peak)/ 54(AV)
26200	-	H/V	74(Peak)/ 54(AV)
31440		H/V	74(Peak)/ 54(AV)
36680		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit


- 2. Remark "---" means that the emissions level is too low to be measured
- 3. For 802.11a mode 6Mbps

Date: 2021-09-06




Please refer to the following test plots for details:

# CH36 for 11a at 6Mbps: Horizontal

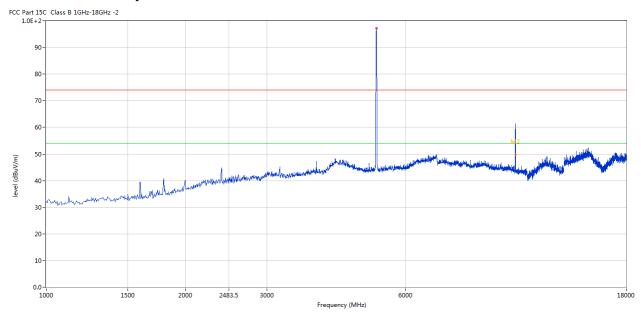

# CH36 for 11a at 6Mbps: Vertical

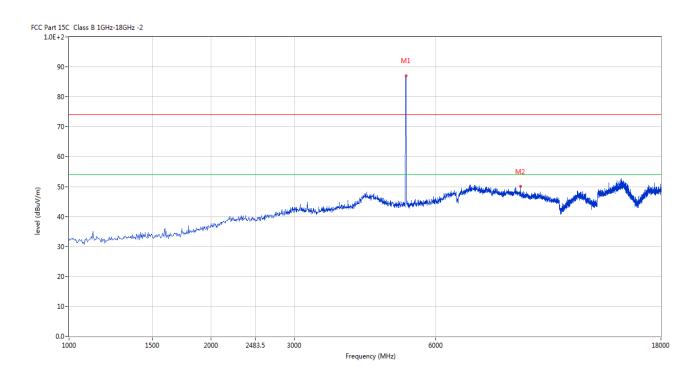

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.


discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Date: 2021-09-06



# CH40 for 11a at 6Mbps: Vertical

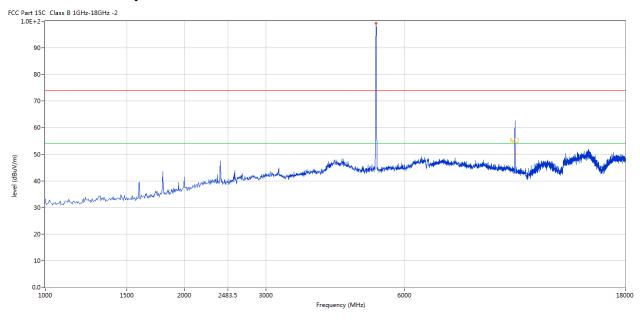

# CH40 for 11a at 6Mbps: Horizontal

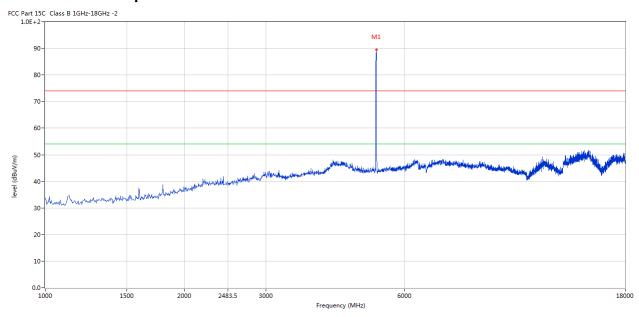


Page 22 of 96

Report No.: TW2107388-04E


Date: 2021-09-06



# CH48 for 11a at 6Mbps: Vertical

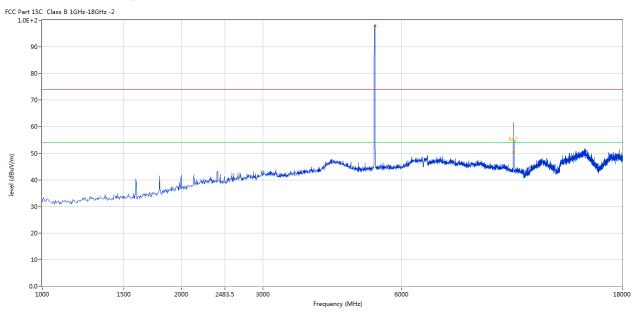

# CH48 for 11g at 6Mbps: Horizontal

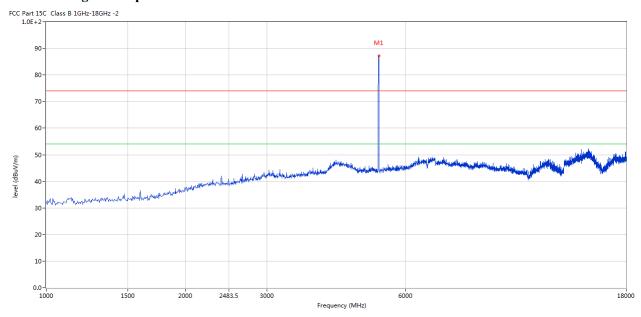

Note: 1.For radiated Emissions from 18-40GHz and below 30MHz, it is only the floor noise.

2. 802.11a is the worst case.

Date: 2021-09-06



Restricted band Measurement								
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 36 (5180MHz)-11a				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5150	PK (dBµV/m)	44.86 (PK)	T : '/	27 ID /MII				
EIRP (dBm) -50.34			Limit	-27dBm/MHz				
Polarity	Horizontal							

Remark: 1. According to KDB 789033 v01r03 section H) d) (iii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 44.86 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=44.86-95.2=-50.34dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement									
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 36 (5180MHz)-11a					
Mode	Keeping	g Transmitting	Input Voltage	120V~					
Temperature	24	deg. C,	Humidity	56% RH					
Test Result:		Pass	Detector	PK					
5150	PK (dBμV/m)	44.21 (PK)	T ' '/	27.10 /4.01					
	EIRP (dBm) -50.99		Limit	-27dBm/MHz					
Polarity	Vertical								

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 44.21 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 44.21 - 95.2 = -50.99dBm$ 

Page 24 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



Restricted band Measurement								
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 48 (5240MHz)-11a				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5250	PK (dBµV/m)	60.25 (PK)	T ' '/	27.10 // 41.1				
	EIRP (dBm)	-34.95	Limit	-27dBm/MHz				
Polarity	Но	orizontal						

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 60.25 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 60.25 - 95.2 = -34.95dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement								
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 48 (5240MHz)-11a				
Mode	Keeping	g Transmitting	Input Voltage	120V~				
Temperature	24	deg. C,	Humidity	56% RH				
Test Result:		Pass	Detector	PK				
5250	PK (dBµV/m)	45.55 (PK)	T ' ',	27.10 /4/11				
	EIRP (dBm) -49.65		Limit	-27dBm/MHz				
Polarity	Vertical							

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 45.55 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=45.55-95.2=-49.65dBm$ 

Date: 2021-09-06



Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 36	
				(5180MHz)-11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBμV/m)	45.92 (PK)	T ' '	27.15 2.41	
	EIRP (dBm) -49.28		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 45.92dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=45.92-95.2=-49.28dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 36	
				(5180MHz)-11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBµV/m)	48.33 (PK)	T,	27 10 / 101	
	EIRP (dBm) -46.87		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 48.33 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 48.33 - 95.2 = -46.87 dBm$ 

Date: 2021-09-06



Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 48 (5240MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	61.61(PK)	T : '4	27.10 /4/11	
	EIRP (dBm) -33.59		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 61.61 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=61.61-95.2=-33.59dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 48 (5240MHz)-	
				11n/HT20	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBμV/m) 48.12(PK)		T	27.15 /2.41	
	EIRP (dBm) -47.08		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 48.12dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 48.12 - 95.2 = -47.08 dBm$ 

Date: 2021-09-06



Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 38	
				(5190MHz)-11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBμV/m)	46.23 (PK)	T ' '	27.15 2.41	
	EIRP (dBm) -48.9		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 46.23 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=46.23-95.2=-48.97dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 38	
				(5190MHz)-11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBµV/m)	50.70 (PK)	T,	27.10 /4.11	
	EIRP (dBm) -44.50		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 50.70 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=50.70-95.2=-44.50dBm$ 

Date: 2021-09-06



Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 46 (5230MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	58.11(PK)	T ' '	27 ID /MII	
	EIRP (dBm) -37.09		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m]=58.11dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=58.11-95.2=-37.09dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 46 (5230MHz)-	
				11n/HT40	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	48.36(PK)	T ' '/	27 10 / 101	
	EIRP (dBm) -46.84		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 48.66 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 48.36 - 95.2 = -46.84dBm$ 

Date: 2021-09-06



Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 42	
				(5210MHz)-11ac/VHT80	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBμV/m) 50.75 (PK)		T : '/	27 10 / 101	
	EIRP (dBm) -44.45		Limit	-27dBm/MHz	
Polarity	Horizontal				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 50.75 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=50.75-95.2=-44.45dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 42 (5210MHz)-	
				11ac/VHT80	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5150	PK (dBµV/m)	49.18 (PK)	T : '4	27 10 / 101	
	EIRP (dBm) -46.02		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m]=49.18 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2 = 49.18 - 95.2 = -46.02dBm$ 

Date: 2021-09-06



Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 42	
				(5210MHz)-11ac/VHT80	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	56.32 (PK)	T : '/	27 ID /MII	
	EIRP (dBm) -38.88		Limit	-27dBm/MHz	
Polarity	Но	Horizontal			

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m] = 56.32 dB\mu V/m$ ,

 $EIRP[dBm] = E[dB\mu V/m] - 95.2=56.32-95.2=-38.88dBm$ 

2. RBW=1MHz, VBW=3MHz

Restricted band Measurement					
EUT	Commerc	ial Kiosk Tablet	Test Mode:	Channel 42 (5210MHz)-	
				11ac/VHT80	
Mode	Keeping Transmitting		Input Voltage	120V~	
Temperature	24 deg. C,		Humidity	56% RH	
Test Result:		Pass	Detector	PK	
5250	PK (dBµV/m)	46.29 (PK)	T ' '/	27.10 /4.11	
	EIRP (dBm) -48.91		Limit	-27dBm/MHz	
Polarity	Vertical				

Remark: 1. According to KDB 789033 D02 General UNII Test Procedures New Rules v01 section G) d) (ii), for measurement above 1000MHz@3m distance, the limit of EIRP is calculated as follows:

 $EIRP[dBm] = E[dB\mu V/m] - 95.2$ 

For Example, if  $E[dB\mu V/m]=46.29 dB\mu V/m$ ,


 $EIRP[dBm] = E[dB\mu V/m] - 95.2=46.29-95.2=-48.91dBm$ 

Date: 2021-09-06



### 7.0 Emission Bandwidth

# 7.1 Test Setup



# 7.3 Test Procedure for Emission Bandwidth

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set VBW> RBW
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 7.4 Test Procedure for Minimum Bandwidth for the Band 5725-5850MHz

- 1. Set RBW = 100 kHz.
- 2. Set VBW  $\geqslant$  3  $\times$  RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 7.5 Test Procedure for 99% Bandwidth

- 1. Set center frequency to the nominal EUT channel center frequency
- 2. Set span = 1.5 times to 5.0 times OBW
- 3. Set RBW= 1% TO 5% of the OBW
- 4. Set  $VBW \ge 3 \times RBW$
- 5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Other, peak detection and max mode (until trace stabilizes) shall be used.
- 6. Use the 99% power bandwidth function of the instrument

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 32 of 96 Report No.: TW2107388-04E

Date: 2021-09-06



### 7.6 Test Result

EUT		Commercial Kiosk Tablet			Model		EMT431	
Mode		802.11a			Input Voltage		120V~	
Temperature		24 deg. C,			Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)		width Hz)	Minimum Limit (MHz)		Pass/ Fail
26dB Bandwidth								
36	5180		6	22.67				Pass
40	5200		6	22.55				Pass
48	5240		6	22.48				Pass
99% Bandwidth								
36	5180		6	16.95				Pass
40		5200	6	16	.95			Pass
48		5240	6	16	.95			Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.


Date: 2021-09-06



Test Figure:

### 26dB Bandwidth

### Channel 36

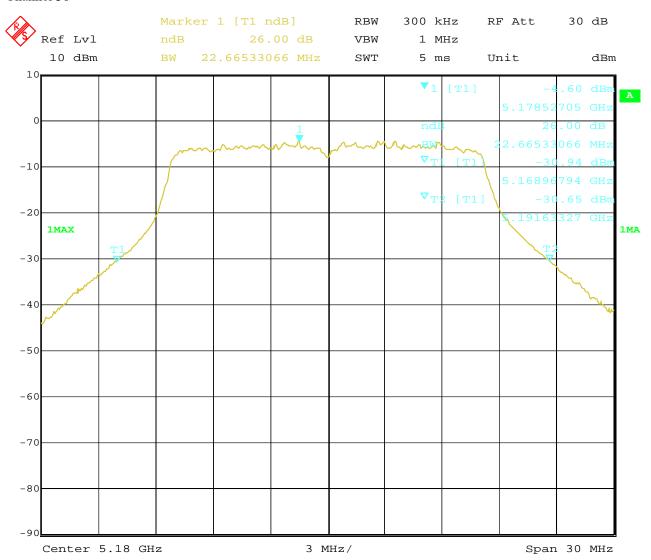

20.AUG.2021 14:33:16 Date:


Page 34 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



# Channel 40

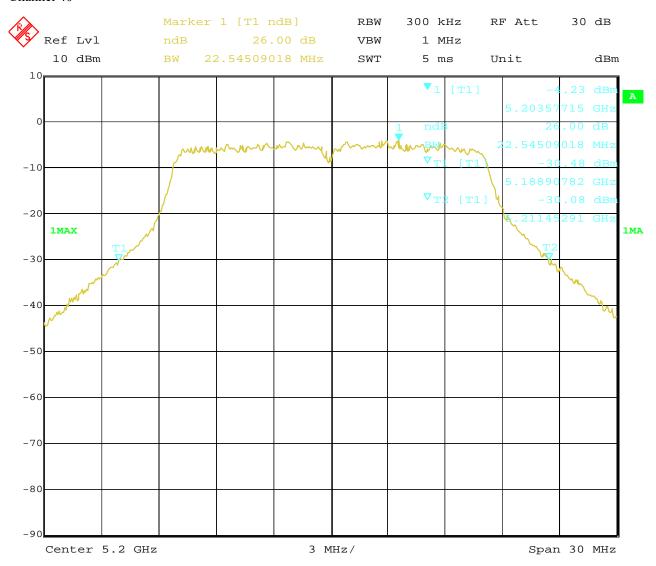

20.AUG.2021 14:31:40 Date:


Page 35 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### Channel 48

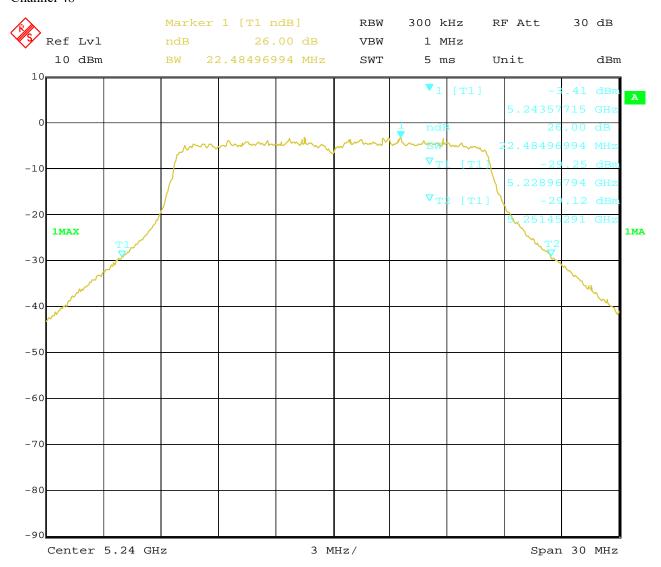

Date: 20.AUG.2021 14:31:04


Date: 2021-09-06



Test Figure:

### 99% Bandwidth

### Channel 36

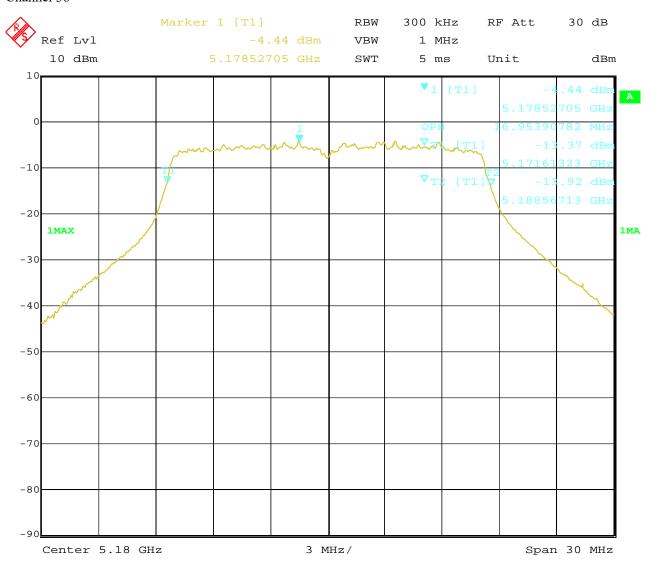

20.AUG.2021 13:45:39 Date:


Page 37 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



# Channel 40

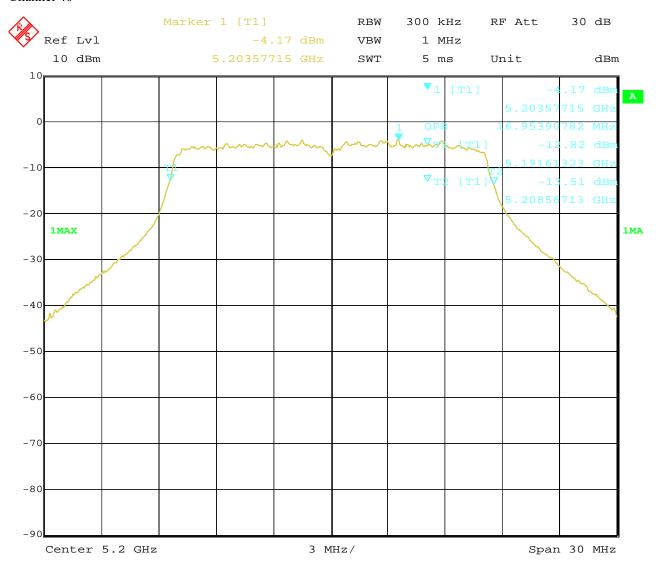

20.AUG.2021 13:56:19 Date:


Page 38 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



# Channel 48

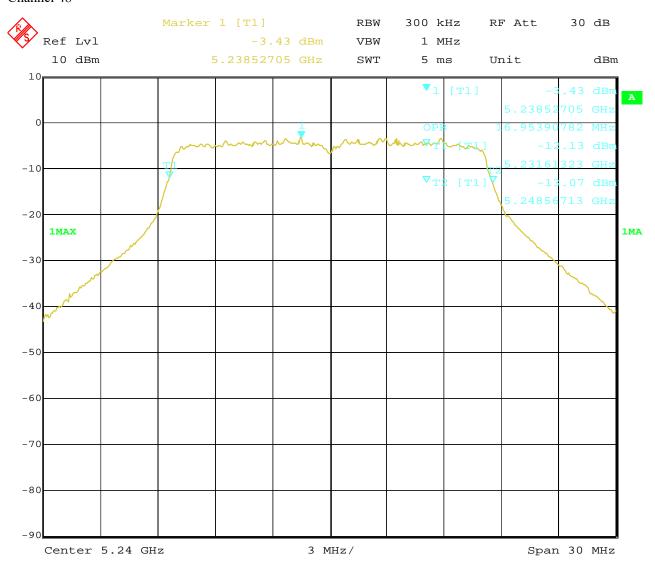

Date: 20.AUG.2021 14:03:35 Report No.: TW2107388-04E Page 39 of 96

Date: 2021-09-06



EUT		Commerc	ial Kiosk T	ablet	Model			EMT431
Mode		802	.11n HT20		Input Vol	tage		120V~
Temperati	ure	24	4 deg. C,		Humidity			56% RH
Channel		Channel Frequency (MHz)			width Hz)		num Limit MHz)	Pass/ Fail
26dB Bar	ndwidth							
36		5180	mcs0	23.33				Pass
40		5200	mcs0	23	.33			Pass
48		5240	mcs0	23	.33			Pass
99% Ban	dwidth							
36	_	5180		18	.04			Pass
40	5200		mcs0	18	.10			Pass
48	5240		mcs0	18	.04			Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.

Page 40 of 96

Report No.: TW2107388-04E


Date: 2021-09-06



Test Configure

#### 26dB Bandwidth

## Channel 36

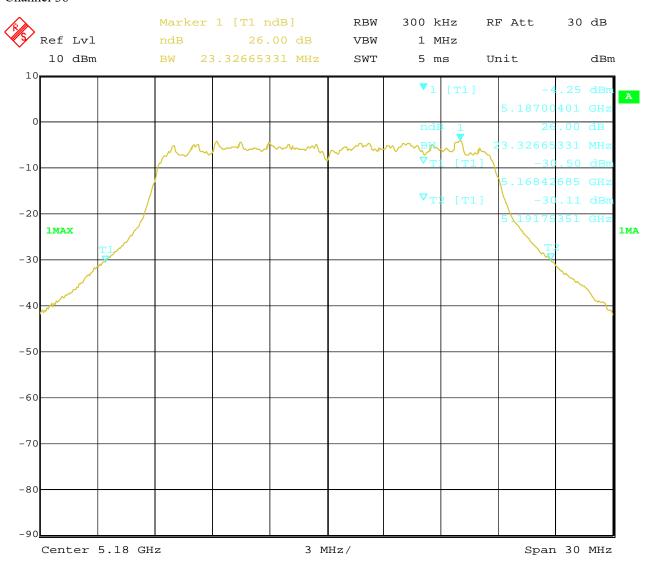

20.AUG.2021 14:53:57 Date:


Page 41 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



## Channel 40

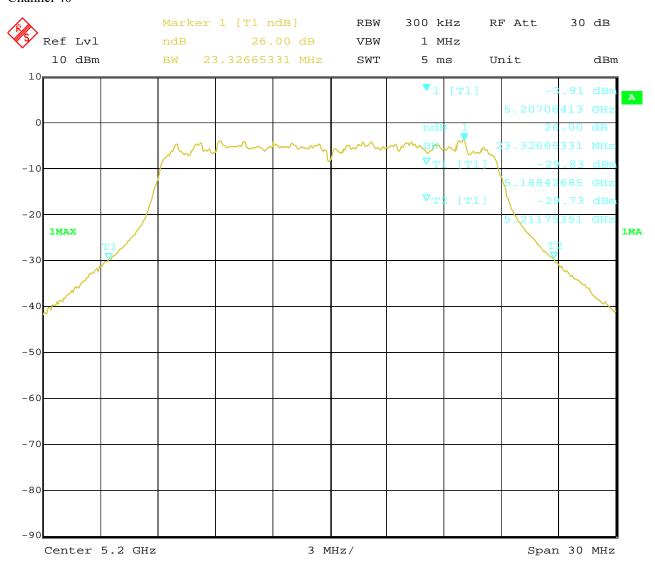

20.AUG.2021 14:45:57 Date:


Page 42 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### Channel 48

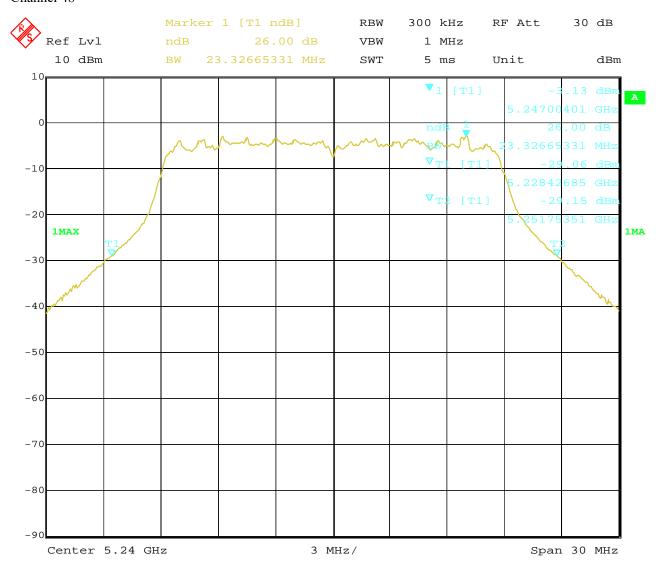

Date: 20.AUG.2021 14:35:08

Page 43 of 96

Report No.: TW2107388-04E


Date: 2021-09-06



Test Configure

## 99% Bandwidth

## Channel 36

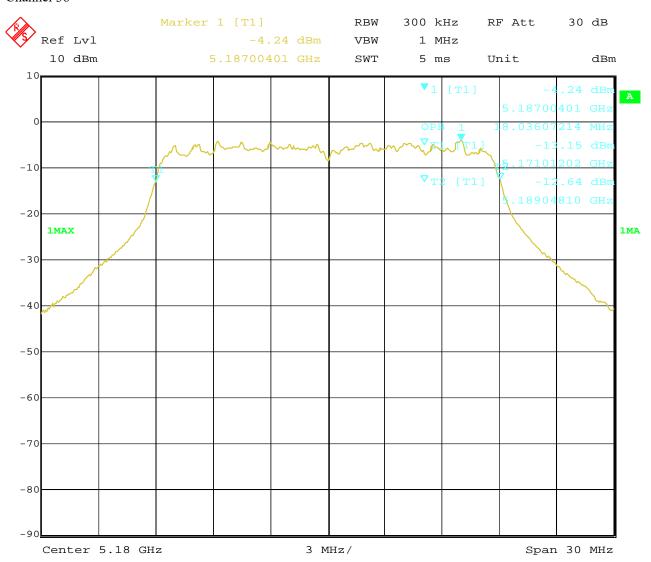

20.AUG.2021 14:54:13 Date:


Page 44 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### Channel 40

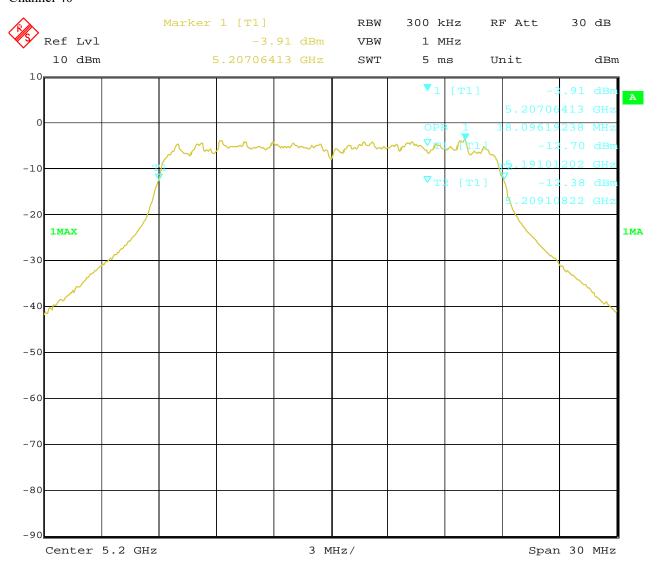

20.AUG.2021 14:46:42 Date:


Page 45 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### Channel 48

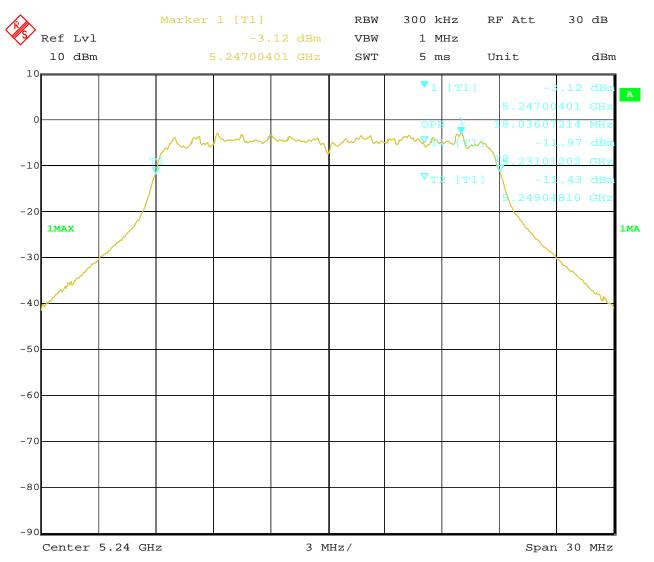

Date: 20.AUG.2021 14:35:29 Report No.: TW2107388-04E Page 46 of 96

Date: 2021-09-06



EUT		Commerc	ial Kiosk T	ablet	Model			EMT431
Mode		802	.11n HT40		Input Vol	tage		120V~
Temperate	ure	24	Humidity	ř		56% RH		
Channel		el Frequency (MHz)	Data Transfer Rate (Mbps)	Bandwidth (MHz)			num Limit MHz)	Pass/ Fail
26dB Bar	ıdwidth							
38		5190	mcs0	45	.57			Pass
46		5230	mcs0	mcs0 45				Pass
99% Ban	dwidth							
38		5190		37.27				Pass
46	5230		mcs0	37.20				Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.

Page 47 of 96

Report No.: TW2107388-04E


Date: 2021-09-06



Test Configure

#### 26dB Bandwidth

## Channel 38

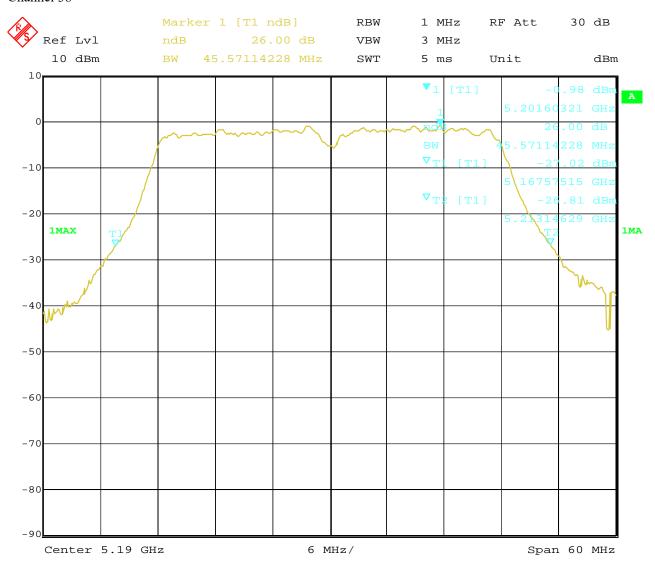

20.AUG.2021 15:33:48 Date:


Page 48 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### Channel 46

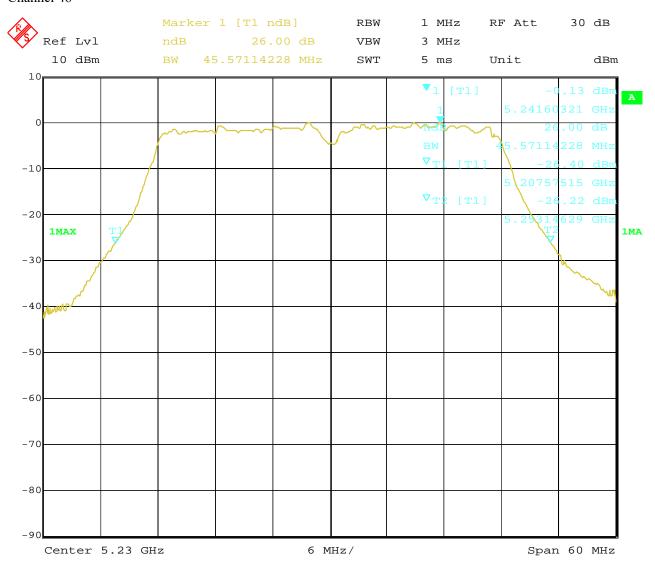

Date: 20.AUG.2021 15:41:11

Page 49 of 96

Report No.: TW2107388-04E


Date: 2021-09-06



## Test Configure

## 99% Bandwidth

## Channel 38

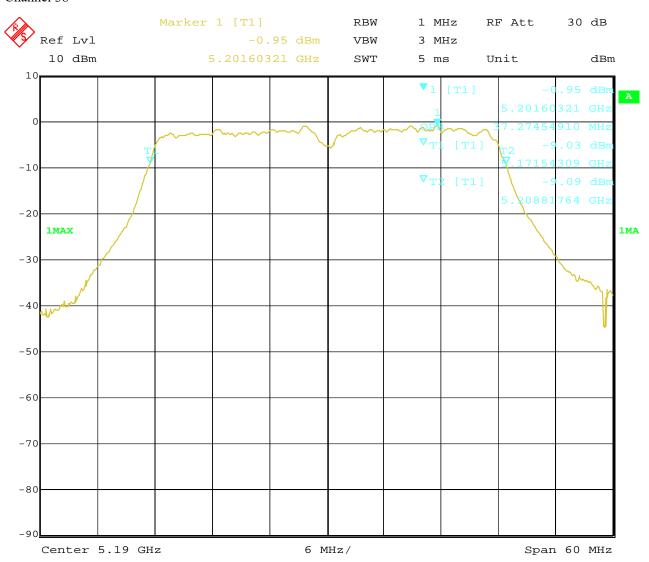

20.AUG.2021 15:34:24 Date:


Page 50 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### Channel 46

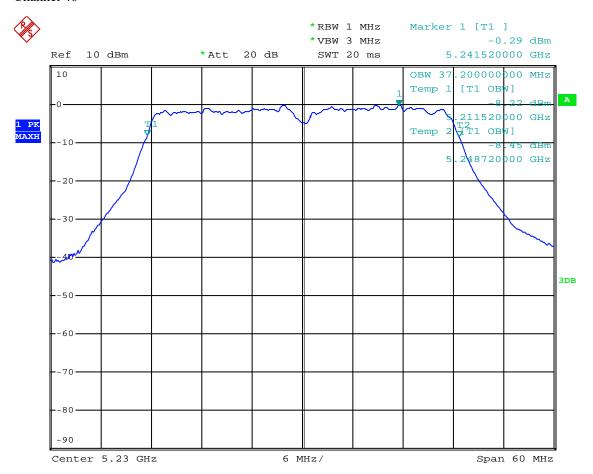

Date: 6.SEP.2021 17:39:10

Report No.: TW2107388-04E Page 51 of 96

Date: 2021-09-06



EUT		Commerc	ial Kiosk T	ablet	Model			EMT431
Mode		802.1	1ac VHT20	)	Input Vol	tage		120V~
Temperati	ure	24	4 deg. C,		Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
26dB Bar	ndwidth							
36		5180	mcs0	23.81				Pass
40		5200		23.87				Pass
48		5240	mcs0	23	.93			Pass
99% Ban	dwidth							
36		5180		18	.16			Pass
40	5200		mcs0	18.16				Pass
48	5240		mcs0	18.16				Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.

Report No.: TW2107388-04E


Date: 2021-09-06



Test Configure

#### 26dB Bandwidth

## Channel 36

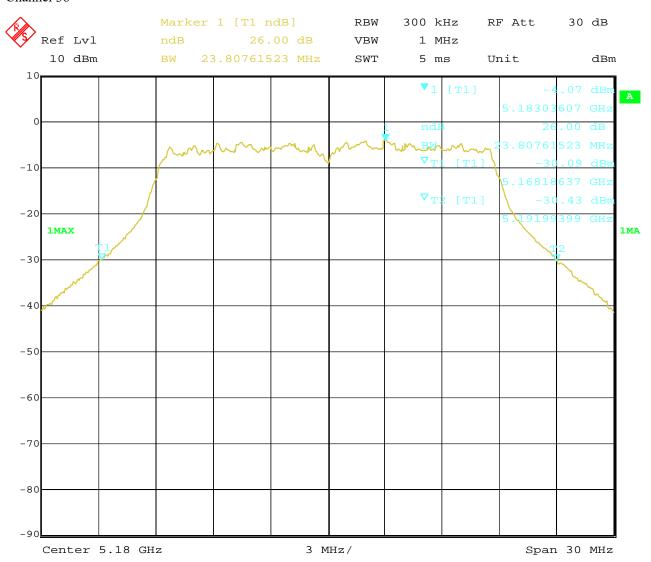

20.AUG.2021 14:59:58 Date:


Page 53 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### Channel 40

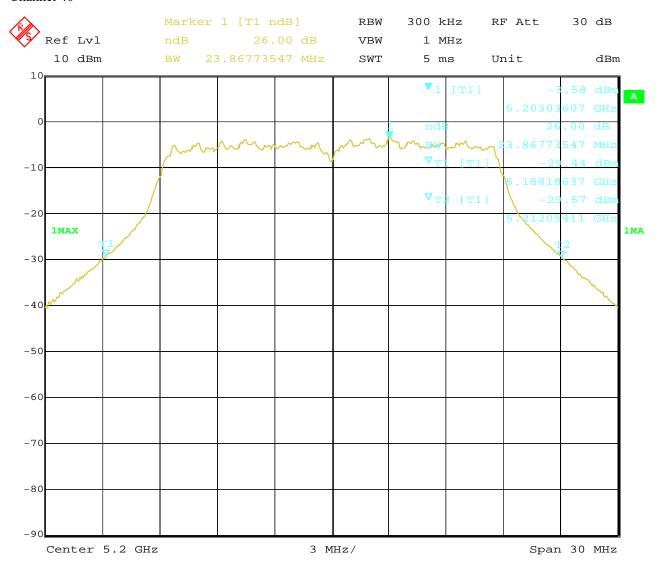

20.AUG.2021 15:07:28 Date:


Page 54 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### Channel 48

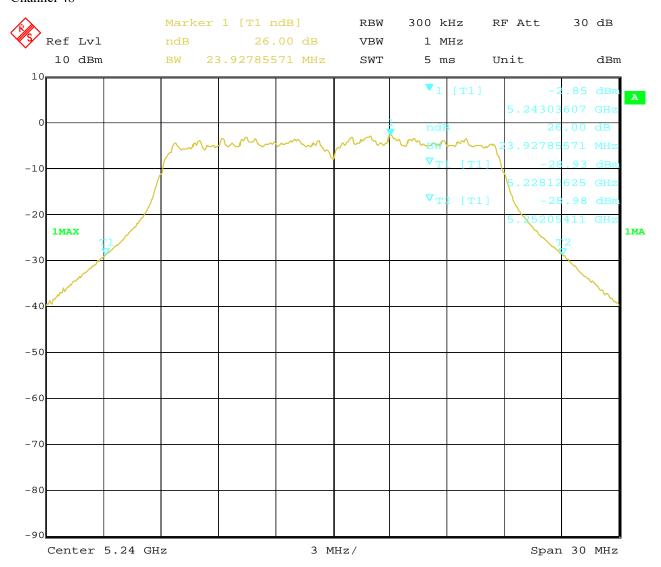

Date: 20.AUG.2021 15:13:56 Report No.: TW2107388-04E


Date: 2021-09-06



## Test Configure

## 99% Bandwidth

## Channel 36

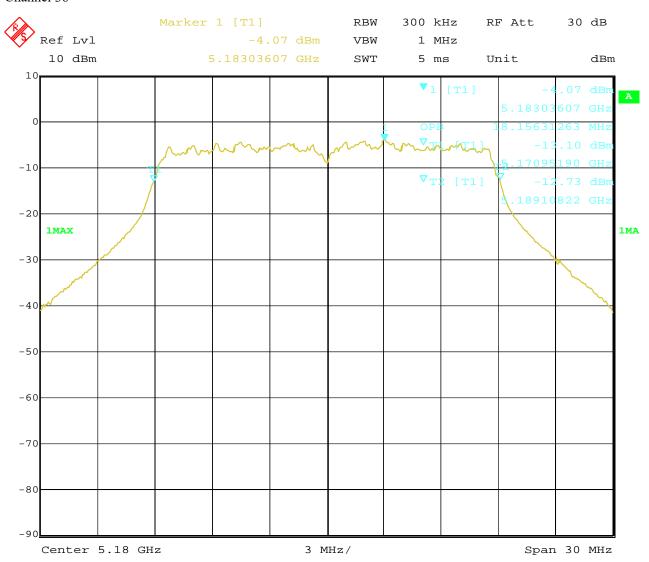

20.AUG.2021 15:00:31 Date:


Page 56 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



## Channel 40

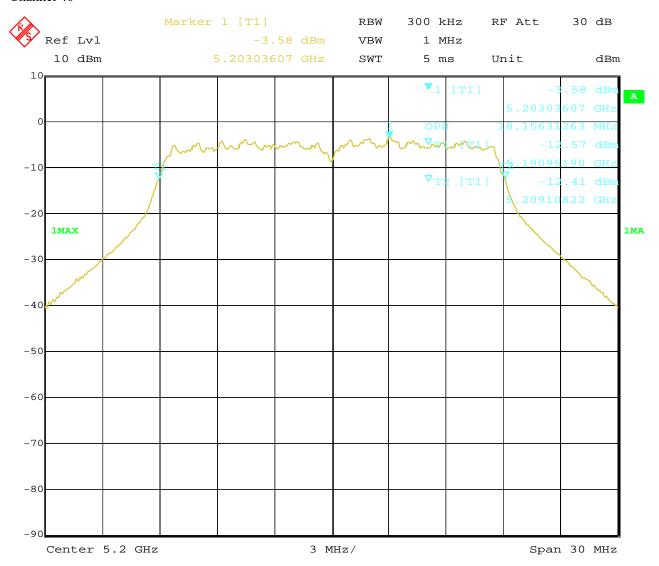

20.AUG.2021 15:07:43 Date:


Page 57 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### Channel 48

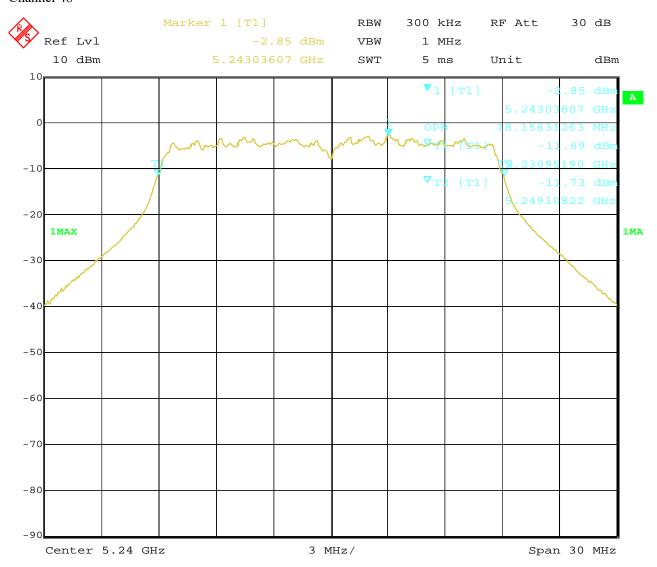

Date: 20.AUG.2021 15:14:10 Report No.: TW2107388-04E Page 58 of 96

Date: 2021-09-06



EUT		Commerc	ial Kiosk T	ablet	Model			EMT431
Mode		802.1	1ac VHT40 Input			ltage		120V~
Temperati	Temperature 2		4 deg. C,		Humidity			56% RH
Channel		Channel Frequency (MHz)					mum Limit MHz)	Pass/ Fail
26dB Bar	ndwidth							
38		5190	mcs0	45	.69			Pass
46		5230	mcs0	45	.57			Pass
99% Ban	dwidth							
38	5190		mcs0	37	.15			Pass
46	5230		mcs0	37.27				Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.

Page 59 of 96

Report No.: TW2107388-04E


Date: 2021-09-06



Test Configure

#### 26dB Bandwidth

## Channel 38

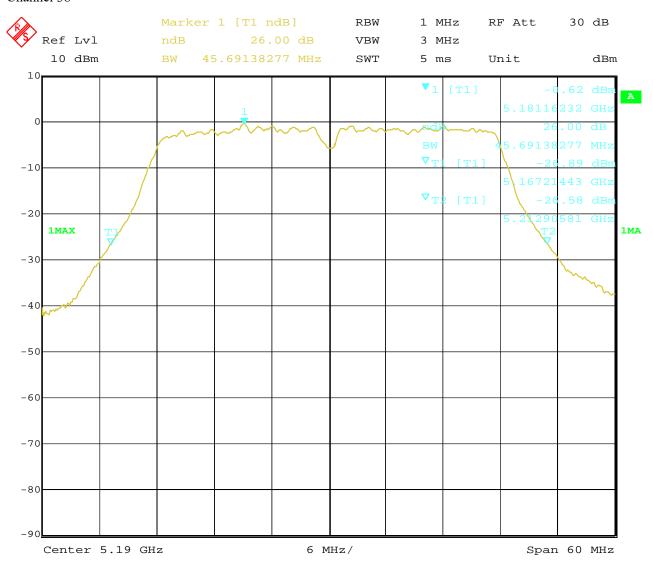

20.AUG.2021 15:57:09 Date:


Page 60 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



#### Channel 46

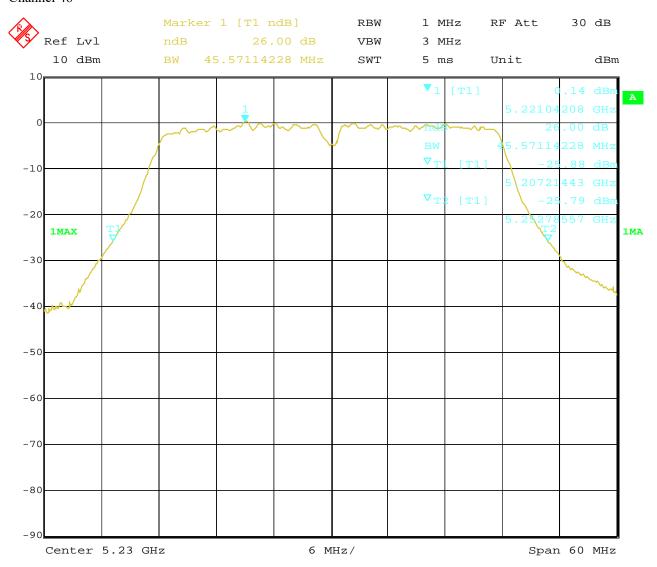

Date: 20.AUG.2021 15:48:42

Page 61 of 96

Report No.: TW2107388-04E


Date: 2021-09-06



Test Configure

## 99% Bandwidth

## Channel 38

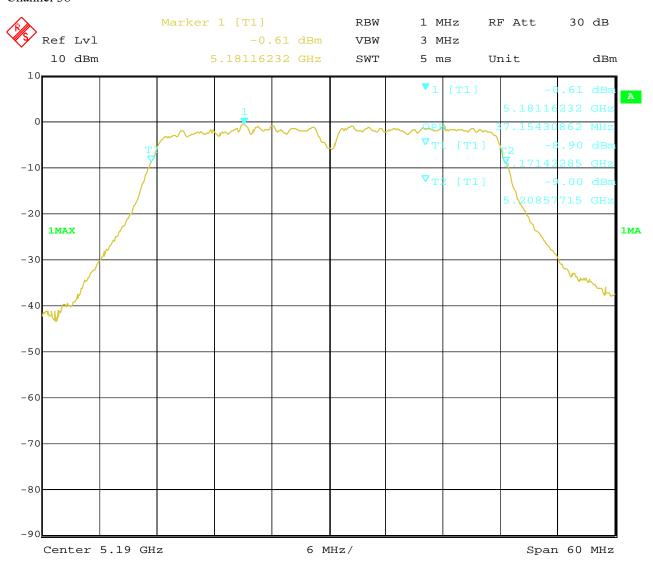

20.AUG.2021 15:59:12 Date:


Page 62 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



## Channel 46

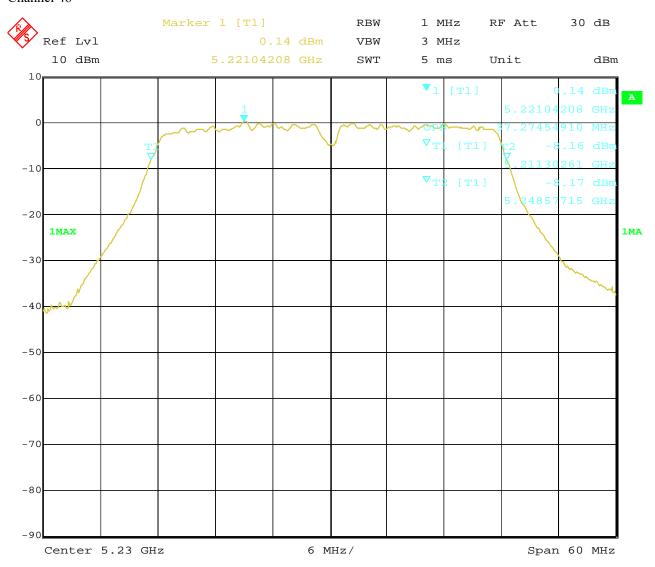

Date: 20.AUG.2021 15:49:05 Report No.: TW2107388-04E Page 63 of 96

Date: 2021-09-06



EUT		Commerc	ial Kiosk T	ablet	Model			EMT431			
Mode		802.1	Input Voltage		120V~						
Temperati	ure	24	Humidity			56% RH					
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	Bandwidth (MHz)			num Limit MHz)	Pass/ Fail			
26dB Bar	26dB Bandwidth										
42		5210	mcs0	85	.61			Pass			
99% Ban	99% Bandwidth										
42	5210		mcs0	75	.99			Pass			

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.

Report No.: TW2107388-04E


Date: 2021-09-06



Test Configure

#### 26dB Bandwidth

## Channel 42

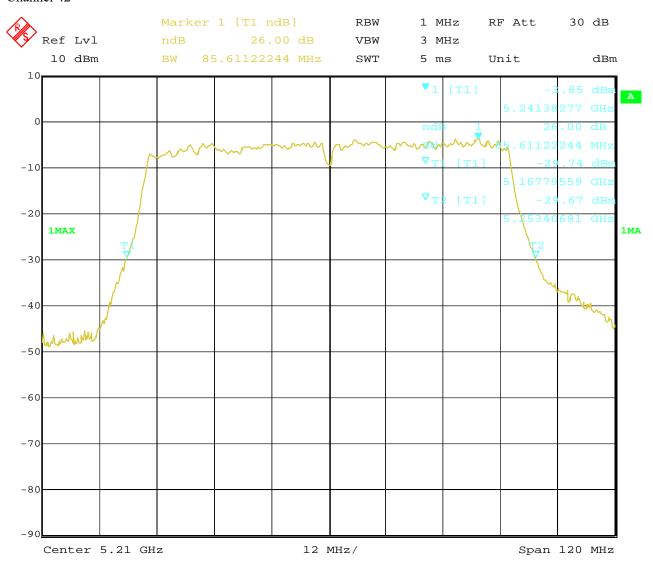

20.AUG.2021 16:06:55 Date:

Report No.: TW2107388-04E


Date: 2021-09-06



## Test Configure

## 99% Bandwidth

## Channel 42

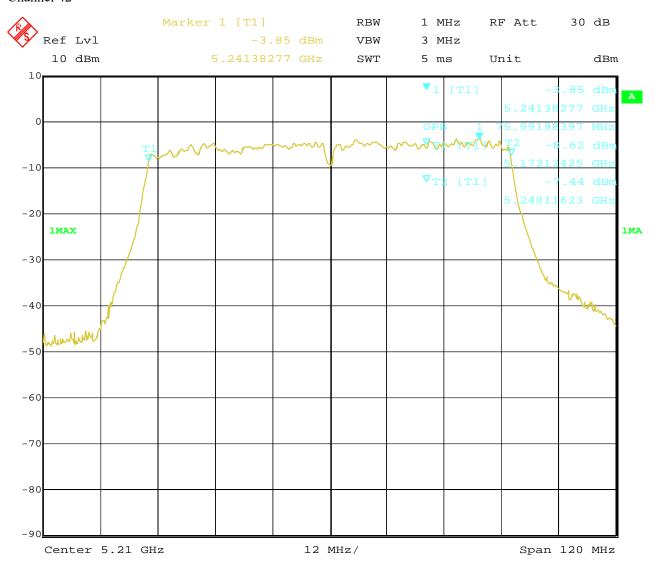

20.AUG.2021 16:07:11 Date:

Page 66 of 96


Report No.: TW2107388-04E

Date: 2021-09-06



### 8.0 Peak Transmit Power Measurement

# 8.1 Test Setup



## 8.2 Limits of Peak Transmit Power Measurement

For client devices in the 5.15-5.25 GHz band	250mW (24 dBm)

## **8.3 Test Procedure**

The average power output was measured with a Spectrum analyzer connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the average power was measured

Report No.: TW2107388-04E

Date: 2021-09-06



#### **8.4Test Results**

EU	T	Coı	mmercial K	iosk Tablet	Model		EMT431					
Mod	Mode 802.11a			la	Test Volta	ige	120V~					
Temper	rature		24 deg.	С,	Humidity 56% RH			6% RH				
Channel	nnel Frequency (MHz)		• •		Power Chain 3 Por		wer	Total Power	Limit	Pass/ Fail		
			dBm	mW	dBm	:	mW	(dBm)	(dBm)			
36	5180	5180 -		-0.80		0.83	-1.02		0.79	2.10	24	Pass
40	5200		-0.44	0.90	-0.65		0.86	2.47	24	Pass		
48	5240		-0.09	0.98	-0.21		0.95	2.86	24	Pass		

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH36, CH40 and CH48

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EU	T	Co	mmercial K	iosk Tablet	Model		EMT431				
Mod	de		802.11n I	Test Volta	Test Voltage		120V~				
Temper	rature		24 deg.	C,	Humidit	y		56% RH			
Channel	nnnel Frequency (MHz)		-		Chain	3 Po	wer	Total Power	Limit	Pass/ Fail	
			dBm	mW	dBm		mW	(dBm)	(dBm)		
36	5180	)	-1.28	0.74	-1.53		0.70	1.61	24	Pass	
40	5200		-0.85	0.82	-1.09		0.78	2.04	24	Pass	
48	5240		-0.09	0.98	-0.28	(	0.94	2.83	24	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 for CH36, CH40 and CH48

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 68 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



EU	T	Coı	mmercial K	iosk Tablet	Model		EMT431				
Mod	Mode		802.11n HT40		Test Volta	ige	120V~				
Temper	Temperature			C,	Humidity		56% RH				
Channel	Frequency (MHz)		-		Chain	3 Pov	wer	Total Power	Limit	Pass/ Fail	
	(1711)	Z)	dBm	mW	dBm	r	пW	(dBm)	(dBm)		
38	5190	0	-3.12	0.49	-3.36	(	).46	-0.23	24	Pass	
46	5230	)	-2.27	0.59	-2.51	(	).56	0.62	24	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 for CH38 and CH46

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EU	T	Con	mmercial K	iosk Tablet	Model		EMT431				
Mod	de		802.11ac V	Test Voltage		120V~					
Temper	Temperature			24 deg. C,				56% RH			
Channel	nel Frequency (MHz)		Chain	Chain 2 Power		3 Po	wer	Total Power	Limit	Pass/ Fail	
			dBm	mW	dBm	1	mW	(dBm)	(dBm)		
36	5180	5180		0.75	-1.53	(	0.70	1.61	24	Pass	
40	5200		-0.86	0.82	-1.03	(	0.79	2.07	24	Pass	
48	5240		-0.09	0.98	-0.35	(	0.92	2.79	24	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 for CH36, CH40 and CH48

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 69 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



EU	T	Co	mmercial K	iosk Tablet	Model		EMT431				
Mod	Mode 802		802.11ac VHT40		Test Voltage		120V~				
Temper	Temperature		24 deg.	Humidity		56% RH					
Channel	Frequency (MHz)		-		Chain	3 Pov	wer	Total Power	Limit	Pass/ Fail	
	(1711)	<i>L)</i>	dBm	mW	dBm	1	mW	(dBm)	(dBm)		
38	5190	0	-3.03	0.50	-3.26	(	0.47	-0.13	24	Pass	
46	5230	)	-2.21	0.60	-2.48	(	0.56	0.67	24	Pass	

Note: 1. At finial test to get the worst-case emission at mcs0 for CH38 and CH46

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EU'	Т	Commercial Kiosk Tablet			Model		EMT431					
Mod	de		802.11ac V	/HT80	Test Volta	ige	120V~					
Temper	ature		24 deg.	deg. C, Humidity				56	56% RH			
Channel	Freque (MH:	-	Chain	2 Power	Chain	3 Pov	wer	Total Power	Limit	Pass/ Fail		
	(MIII)	Z)	dBm	mW	dBm	mW		(dBm)	(dBm)			
42	5210	0	-5.29 0.30		-5.53	(	0.28	-2.40	24	Pass		

Note: 1. At finial test to get the worst-case emission at mcs0 s for CH42

2. The result basic equation calculation as follow:

Average Power Output = AV Power Reading + Cable loss + Attenuator

3. The worse case was recorded

Page 70 of 96


Report No.: TW2107388-04E

Date: 2021-09-06



## 9. Power Spectral Density Measurement

# 9.1 Test Setup



## 9.2 Limits of Power Spectral Density Measurement

Operation Band	Limit		
U-NII-1	11dBm/MHz		

#### 9.3 Test Procedure

- 1. The EUT was directly connected to the spectrum analyzer
- 2. Set the RBW = 1MHz.
- 3. Set the VBW = 3MHz.
- 4. Set the span to encompass the entire emissions bandwidth (EBW) of the signal
- 5. Detector = RMS
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.

Page 71 of 96 Report No.: TW2107388-04E

Date: 2021-09-06



## 9.4Test Result

EUT Cor		Con	nmercial Kiosk Tablet	Model		EMT431		
Mode	;		802.11a 6Mbps	Test Voltage		120V~		
Temperature			24 deg. C,	Humi	Humidity		56% RH	
Channel		quency ИНz)	Power Spectral Density(dBm/MHz)	Factor	-	pectral Density Bm/MHz)	Limit (dBm)	Pass/ Fail
36	5	180	-5.69	3.01		-2.68	11	Pass
40	5	200	-5.30	3.01		-2.29	11	Pass
48	5	240	-4.63	3.01		-1.62	11	Pass

Note: Two antennas were tested and only the worst cased was recorded in the test report. Ant 0 was the worst case.


Page 72 of 96 Report No.: TW2107388-04E

Date: 2021-09-06



## 9.5 Plots of Power Spectral Density Measurement

1.802.11a at 6Mbps of CH36

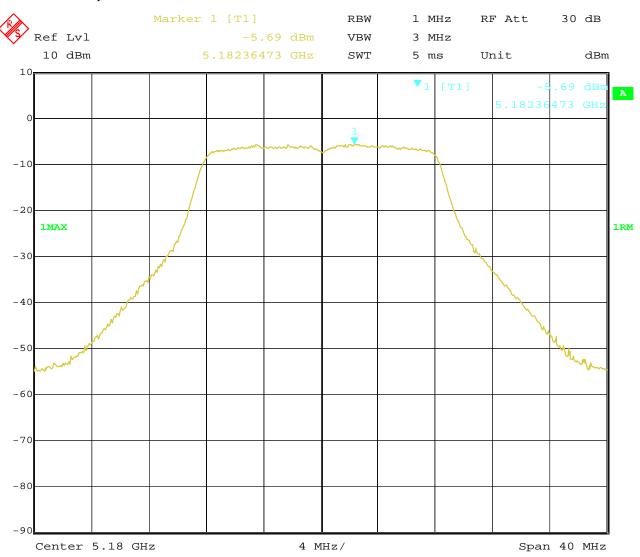

20.AUG.2021 13:51:18 Date:


Page 73 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



# 2.802.11a at 6Mbps of CH40

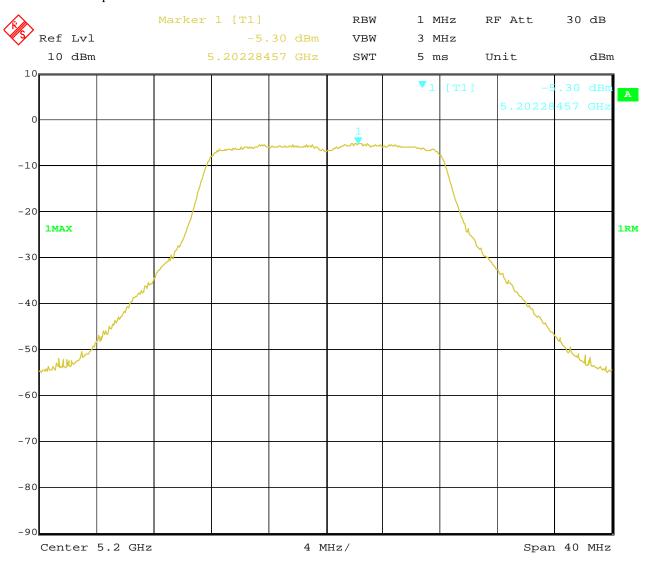

20.AUG.2021 13:53:40 Date:


Page 74 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



# 3.802.11a at 6Mbps of CH48

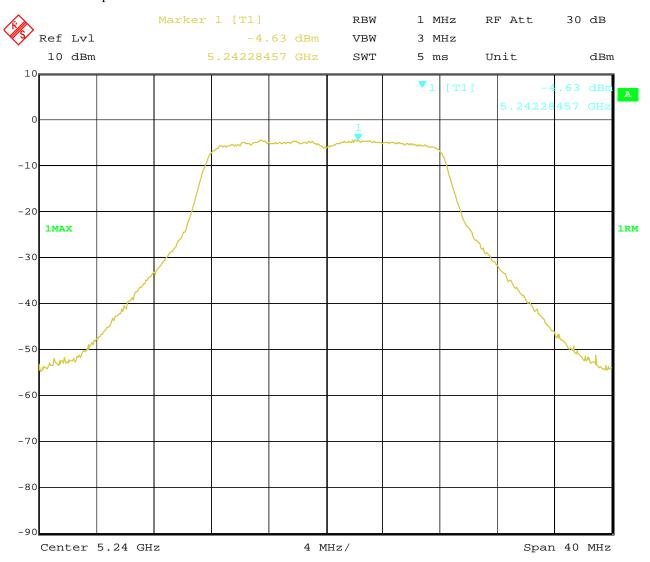

Date: 20.AUG.2021 14:01:53 Report No.: TW2107388-04E Page 75 of 96

Date: 2021-09-06



EUT		Commercial Kiosk Tablet		Mod	del	EMT431		
Mode		802.11n HT20 mcs0		Test Vo	oltage	120V~		
Tempera	Temperature 24 deg. C,		24 deg. C,	Humidity		56% RH		
Channel	Frequ (MI	-	Power Spectral Density(dBm/MHz)	Factor	Total Spectral Density (dBm/MHz)		Limit (dBm/MHz)	Pass/ Fail
36	518	80	-6.08	3.01		-3.07	11	Pass
40	520	00	-5.25	3.01		-2.24	11	Pass
48	524	40	-4.59	3.01		-1.58	11	Pass

Page 76 of 96


Report No.: TW2107388-04E

Date: 2021-09-06



## **Test Plots**

# 1.802.11n at mcs0 of CH36

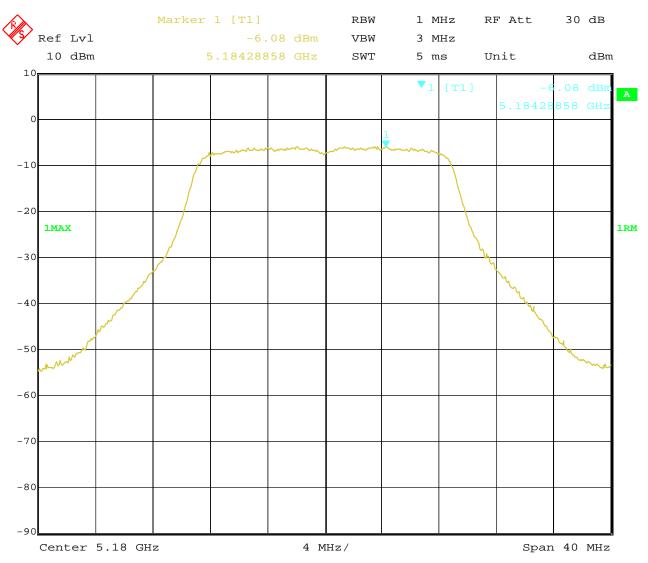

Date: 20.AUG.2021 14:52:08


Page 77 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



## 2.802.11n at mcs0 of CH40

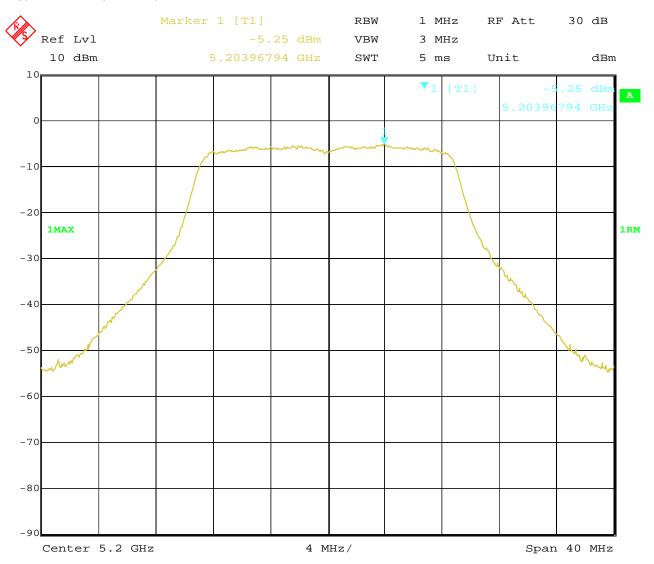

20.AUG.2021 14:43:46 Date:


Page 78 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



## 3.802.11n at mcs0 of CH48

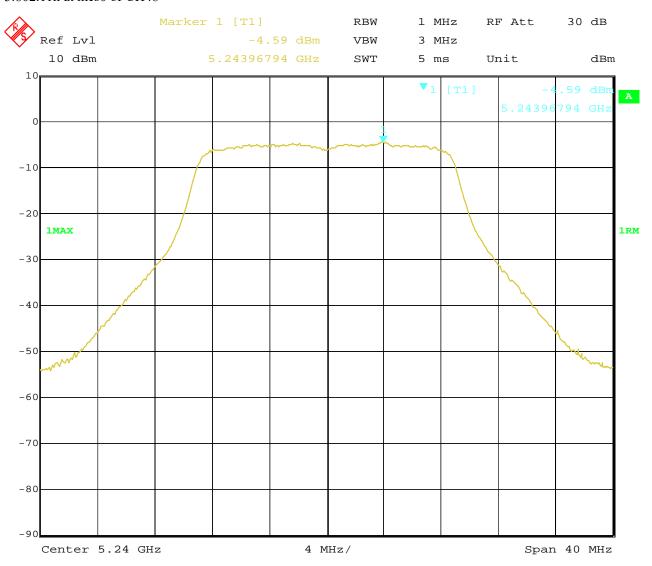

Date: 20.AUG.2021 14:29:03 Report No.: TW2107388-04E Page 79 of 96

Date: 2021-09-06



EUT		Commercial Kiosk Tablet		Mod	lel	EMT431		
Mode		802.11n HT40 mcs0		Test Vo	Test Voltage		120V~	
Temperature			24 deg. C,	Humidity		56% RH		
Channel	Frequency		Power Spectral	Factor	Total Spectral		Limit	Pass/
	(MHz)		Density(dBm/MHz)		]	Density	(dBm/MHz)	Fail
					(dl	Bm/MHz)		
38	519	90	-8.15	3.01		-5.14	11	Pass
46	523	30	-7.23	3.01		-4.22	11	Pass

Page 80 of 96


Report No.: TW2107388-04E

Date: 2021-09-06



## **Test Plots**

## 1.802.11n HT40 at mcs0 of CH38

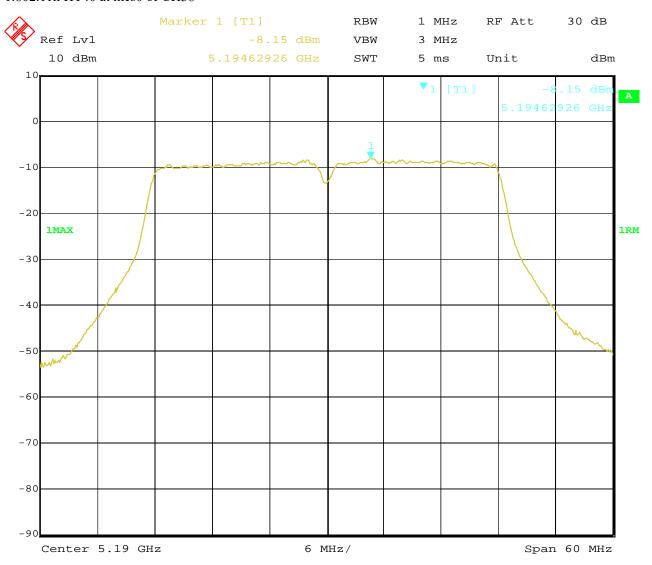

Date: 20.AUG.2021 15:32:02


Page 81 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



## 2.802.11n HT40 at mcs0 of CH46

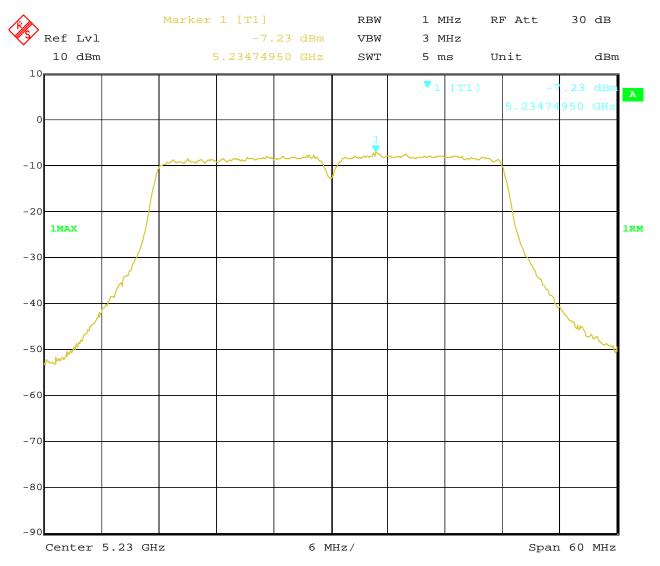

20.AUG.2021 15:39:38 Date:

Report No.: TW2107388-04E Page 82 of 96

Date: 2021-09-06



EUT		Commercial Kiosk Tablet		Model		EMT431		
Mode	:	802.11ac VHT20		Test Voltage		120V~		
Temperat	ture	24 deg. C,	Hu	Humidity		56% RH		
Channel	Frequenc (MHz)	y Power Spectral Density(dBm/MHz	Factor (2)	De	Spectral ensity n/MHz)	Limit (dBm/MHz)	Pass/ Fail	
36	5180	-5.77	3.01	-:	2.76	11	Pass	
40	5200	-5.42	3.01	-:	2.41	11	Pass	
48	5240	-4.63	3.01	-	1.62	11	Pass	

Page 83 of 96


Report No.: TW2107388-04E

Date: 2021-09-06



## **Test Plots**

1.802.11ac at mcs0 of CH36

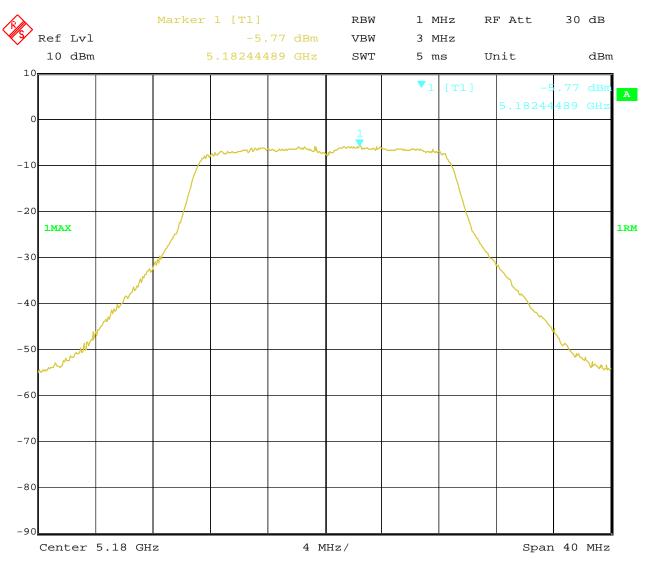

Date: 20.AUG.2021 14:57:27


Page 84 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



## 2.802.11ac at mcs0 of CH40

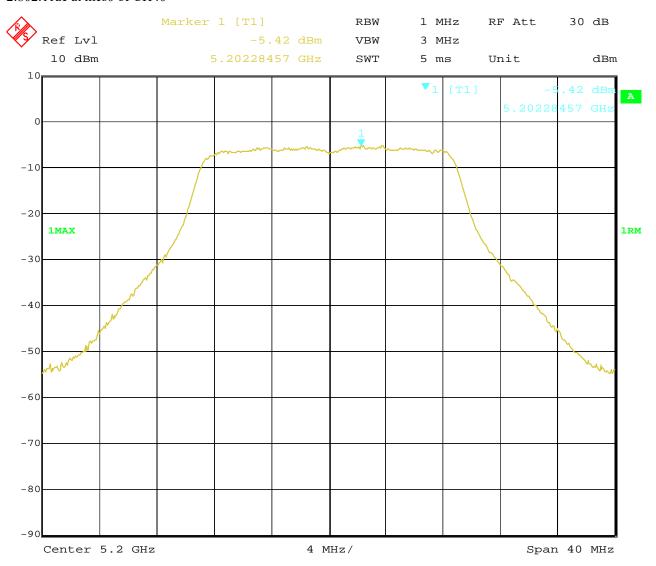

20.AUG.2021 15:04:57 Date:


Page 85 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



## 3.802.11ac at mcs0 of CH48

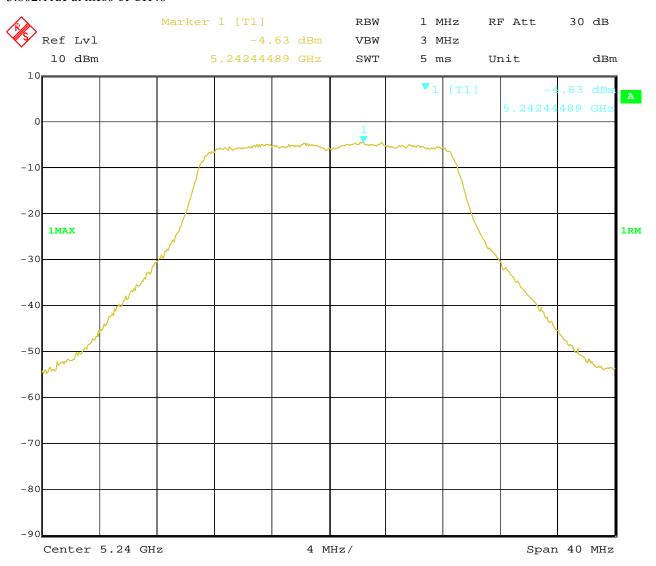

20.AUG.2021 15:11:15 Date:

Report No.: TW2107388-04E Page 86 of 96

Date: 2021-09-06



EUT		Commercial Kiosk Tablet		Mod	Model		EMT431	
Mode		802.11ac VHT40		Test Voltage		120V~		
Temperature			24 deg. C,	Humi	Humidity		56% RH	
Channel		quency MHz)			•	Limit (dBm/MHz)	Pass/ Fail	
					(dBn	n/MHz)		
38	5	190	-8.42	3.01	-5	5.41	11	Pass
46	5	230	-7.55	3.01	-4	1.54	11	Pass

Page 87 of 96


Report No.: TW2107388-04E

Date: 2021-09-06



## **Test Plots**

## 1.802.11ac at mcs0 of CH38

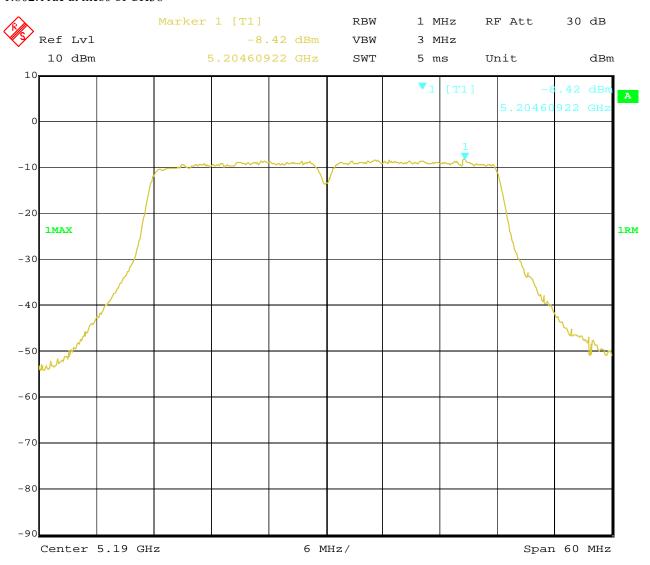

Date: 20.AUG.2021 15:54:20


Page 88 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



## 2.802.11ac at mcs0 of CH46

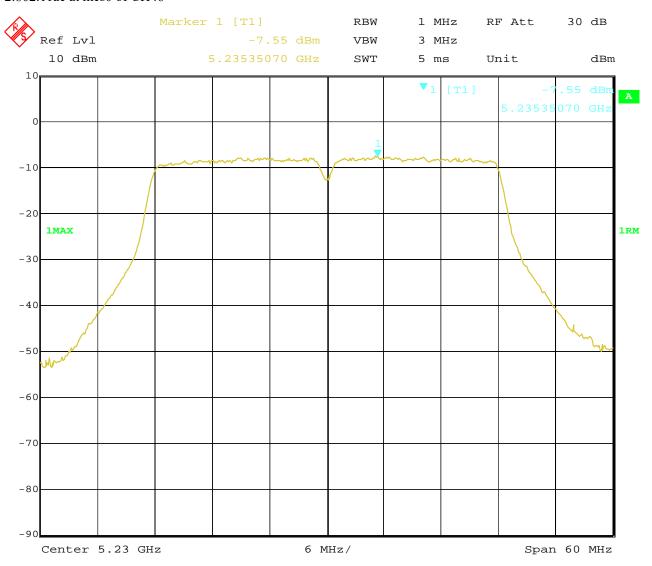

20.AUG.2021 15:46:02 Date:

Report No.: TW2107388-04E Page 89 of 96

Date: 2021-09-06



EUT Cor		Cor	nmercial Kiosk Tablet Model		lel	EMT431			
Mode 802		802.1	802.11ac VHT80 mcs0Mbps		Test Voltage		120V~		
Temperat	ture		24 deg. C,	Humi	Humidity		56% RH		
Channel		quency IHz)	Power Spectral Density(dBm/MHz)	Factor	I	al Spectral Density Bm/MHz)	Limit (dBm/MHz)	Pass/ Fail	
42	5	210	-11.16	3.01		-8.15	11	Pass	

Page 90 of 96


Report No.: TW2107388-04E

Date: 2021-09-06



## **Test Plots**

# 1.802.11ac at mcs0Mbps of CH42

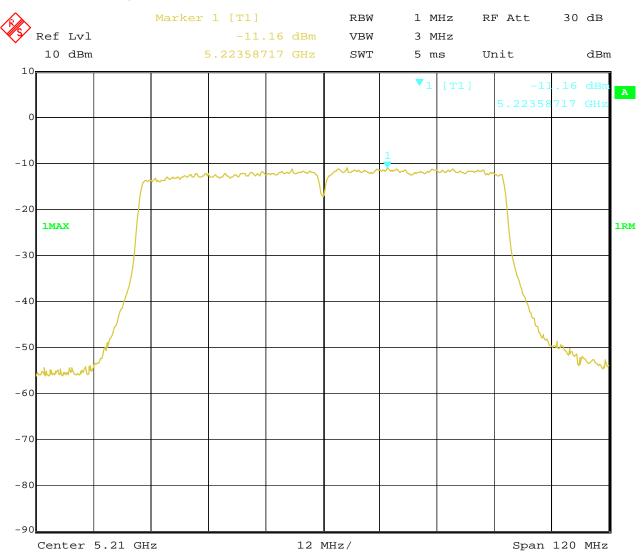

Date: 20.AUG.2021 16:05:18 Report No.: TW2107388-04E

Date: 2021-09-06



Page 91 of 96

# 10.0 Frequency Stability

## 10.1 Limits of Frequency Stability Measurement

The frequency tolerance of the carrier signal shall be maintained within  $\pm$ 0.02% of the operating frequency over a temperature variation of  $\pm$ 30 degrees to 50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees

## 10.2 Test Procedure

- 1. The EUT was placed inside the environmental test chamber and powered by nominal DC voltage.
- 2. Turn the EUT on and couple its output to a spectrum analyzer.
- 3. Turn the EUT off and set the chamber to the highest temperature specified.
- 4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
- 5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
- 6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

Page 92 of 96

Report No.: TW2107388-04E

Date: 2021-09-06



## 10.3 Test Result

# **Channel 36 (5180MHz)**

# Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
138V	5179.9852
120V	5179.9833
102V	5179.9840
Max. Deviation (MHz)	0.0167
Max. Deviation (ppm)	3.22

Rated working voltage: 120V~

# Temperature vs. Frequency Stability

Temperature (°C)	Measurement Frequency (MHz)
-30	5179.9825
-20	5179.9831
-10	5179.9838
0	5179.9849
10	5179.9846
20	5179.9820
30	5179.9827
40	5179.9838
50	5179.9853
Max. Deviation (MHz)	0.0180
Max. Deviation (ppm)	3.47

Report No.: TW2107388-04E

Date: 2021-09-06



Page 93 of 96

# 11.0 Antenna Requirement

# 11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

# 11.2 Antenna Connected construction

Two Dipole antenna used. The maximum Gain is 3.56dBi for each one.

Report No.: TW2107388-04E Page 94 of 96

Date: 2021-09-06




## 12.0 FCC Label

# FCC ID: 2AACS-EMT431

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

## **Mark Location:**

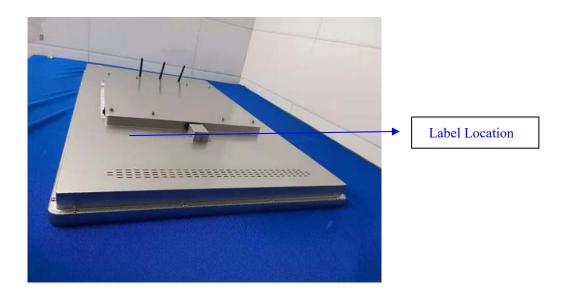

Page 95 of 96


Report No.: TW2107388-04E

Date: 2021-09-06



#### 13.0 **Photo of testing**

Conducted Emission Test Setup:

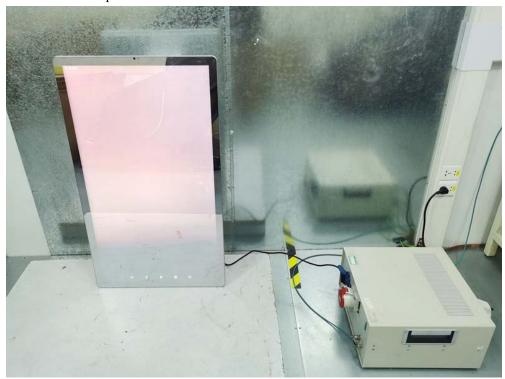

Report No.: TW2107388-04E

Date: 2021-09-06



Radiated Emission Test Setup:



## **Photos of EUT**

Please refer test report TW2107388-01E

# End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it. or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.