




Report No.: TMWK2201000111KR

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5320 MHz | Temp/Hum      | 21.4(°C)/ 60%RH |
| Test Item | Band Edge                     | Test Date     | March 28, 2022  |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

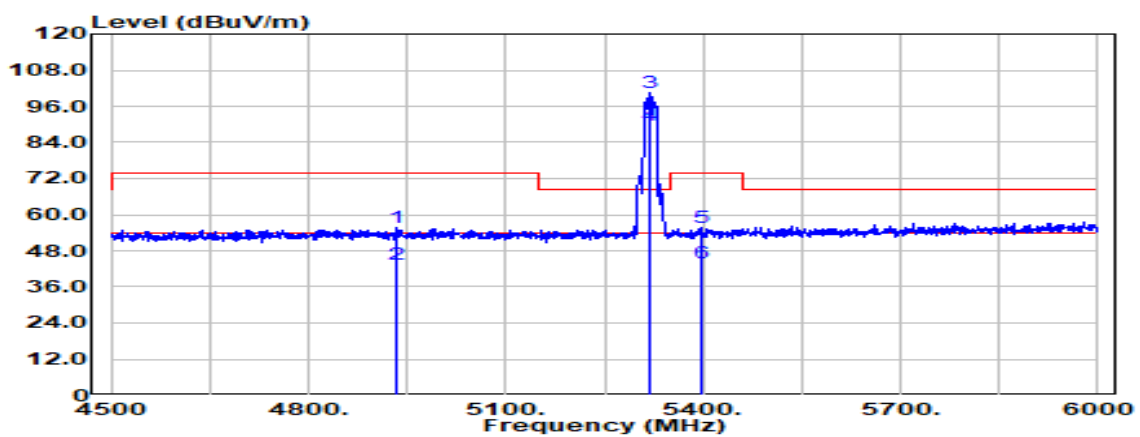

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4935.000       | Peak                           | 36.85                               | 18.65          | 55.50                    | 74.00                    | -18.50         |
| 4935.000       | Average                        | 24.77                               | 18.65          | 43.42                    | 54.00                    | -10.58         |
| 5320.000       | Peak                           | 80.92                               | 19.81          | 100.73                   | -                        | -              |
| 5320.000       | Average                        | 69.99                               | 19.81          | 89.80                    | -                        | -              |
| 5396.250       | Peak                           | 35.48                               | 20.04          | 55.53                    | 74.00                    | -18.47         |
| 5396.250       | Average                        | 23.84                               | 20.04          | 43.88                    | 54.00                    | -10.12         |




Report No.: TMWK2201000111KR

Page: 456 / 939

Rev.: 00

|           |                                    |               |                 |
|-----------|------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5320 MHz 26/8 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                          | Test Date     | May 4, 2022     |
| Polarize  | Vertical                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                     |               |                 |

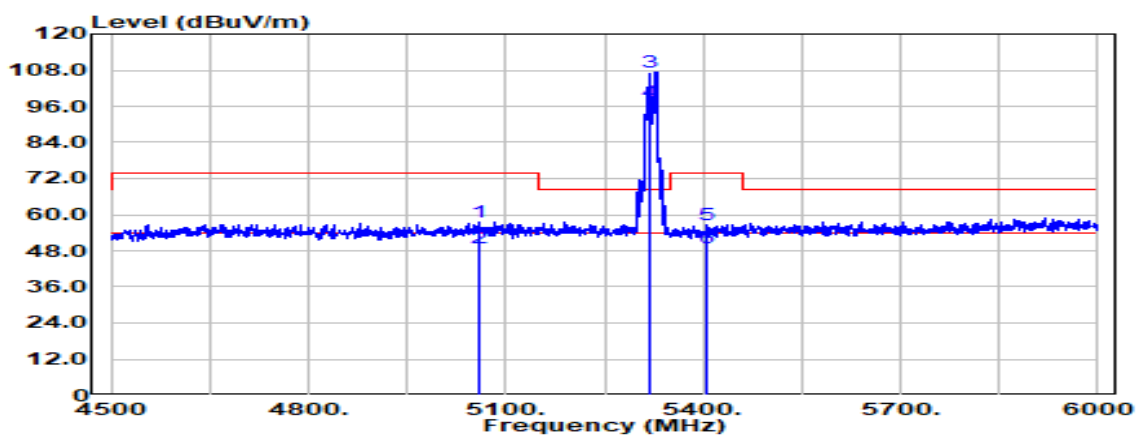


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5060.250       | Peak                           | 38.78                               | 18.89          | 57.67                    | 74.00                    | -16.33         |
| 5060.250       | Average                        | 30.15                               | 18.89          | 49.03                    | 54.00                    | -4.97          |
| 5320.000       | Peak                           | 87.61                               | 19.81          | 107.43                   | -                        | -              |
| 5320.000       | Average                        | 77.64                               | 19.81          | 97.46                    | -                        | -              |
| 5406.750       | Peak                           | 36.72                               | 20.06          | 56.78                    | 74.00                    | -17.22         |
| 5406.750       | Average                        | 29.00                               | 20.06          | 49.06                    | 54.00                    | -4.94          |



Report No.: TMWK2201000111KR

|           |                                    |               |                 |
|-----------|------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5320 MHz_26/8 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                          | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                         | Test Engineer | Ray Li          |
| Detector  | Peak & Average                     |               |                 |

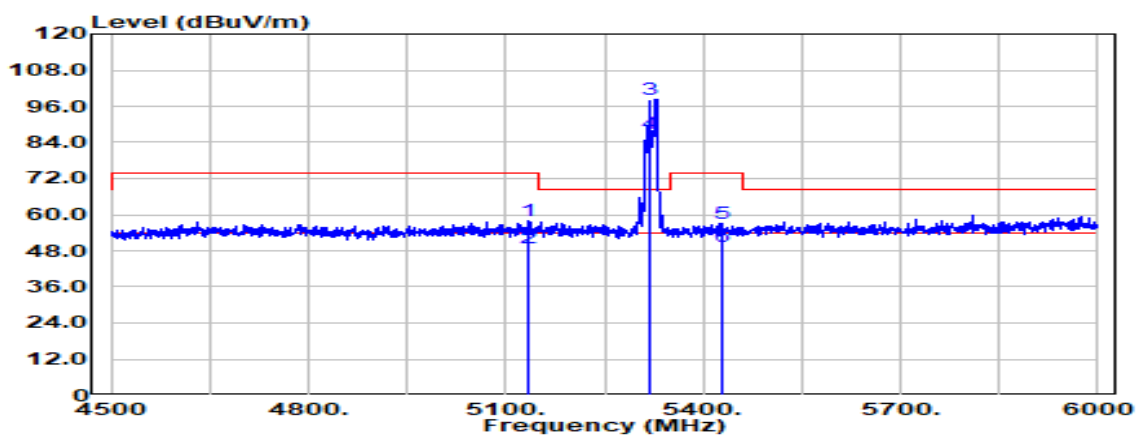

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5134.500       | Peak                           | 39.07                               | 18.95          | 58.02                    | 74.00                    | -15.98         |
| 5134.500       | Average                        | 29.92                               | 18.95          | 48.87                    | 54.00                    | -5.13          |
| 5320.000       | Peak                           | 78.57                               | 19.81          | 98.38                    | -                        | -              |
| 5320.000       | Average                        | 67.34                               | 19.81          | 87.15                    | -                        | -              |
| 5427.000       | Peak                           | 37.11                               | 20.07          | 57.18                    | 74.00                    | -16.82         |
| 5427.000       | Average                        | 29.07                               | 20.07          | 49.13                    | 54.00                    | -4.87          |




Report No.: TMWK2201000111KR

Page: 458 / 939


Rev.: 00

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5320 MHz 52/40 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                           | Test Date     | May 4, 2022     |
| Polarize  | Vertical                            | Test Engineer | Ray Li          |
| Detector  | Peak & Average                      |               |                 |

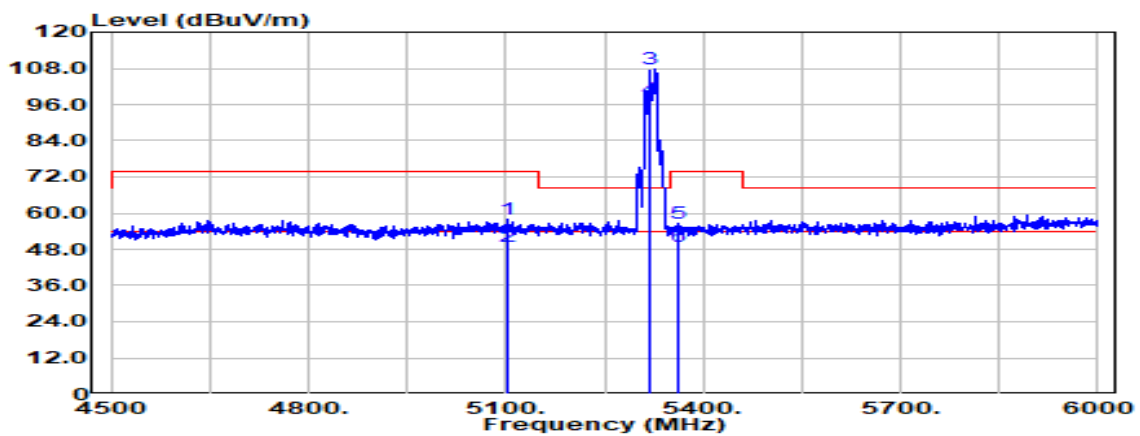


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5103.750       | Peak                           | 38.99                               | 18.85          | 57.84                    | 74.00                    | -16.16         |
| 5103.750       | Average                        | 30.18                               | 18.85          | 49.03                    | 54.00                    | -4.97          |
| 5320.000       | Peak                           | 87.92                               | 19.81          | 107.73                   | -                        | -              |
| 5320.000       | Average                        | 78.12                               | 19.81          | 97.94                    | -                        | -              |
| 5361.000       | Peak                           | 36.88                               | 19.87          | 56.75                    | 74.00                    | -17.25         |
| 5361.000       | Average                        | 29.19                               | 19.87          | 49.06                    | 54.00                    | -4.94          |

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5320 MHz_52/40 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                           | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                          | Test Engineer | Ray Li          |
| Detector  | Peak & Average                      |               |                 |

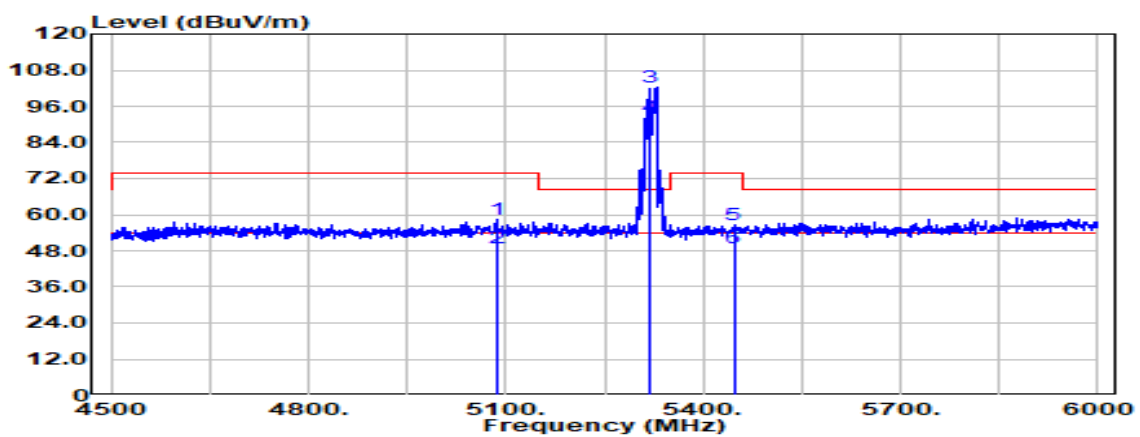

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5088.000       | Peak                           | 39.53                               | 18.85          | 58.39                    | 74.00                    | -15.61         |
| 5088.000       | Average                        | 30.22                               | 18.85          | 49.08                    | 54.00                    | -4.92          |
| 5320.000       | Peak                           | 82.61                               | 19.81          | 102.43                   | -                        | -              |
| 5320.000       | Average                        | 72.67                               | 19.81          | 92.48                    | -                        | -              |
| 5446.500       | Peak                           | 36.43                               | 20.07          | 56.50                    | 74.00                    | -17.50         |
| 5446.500       | Average                        | 29.05                               | 20.07          | 49.12                    | 54.00                    | -4.88          |

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5320 MHz 106/54 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Vertical                             | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

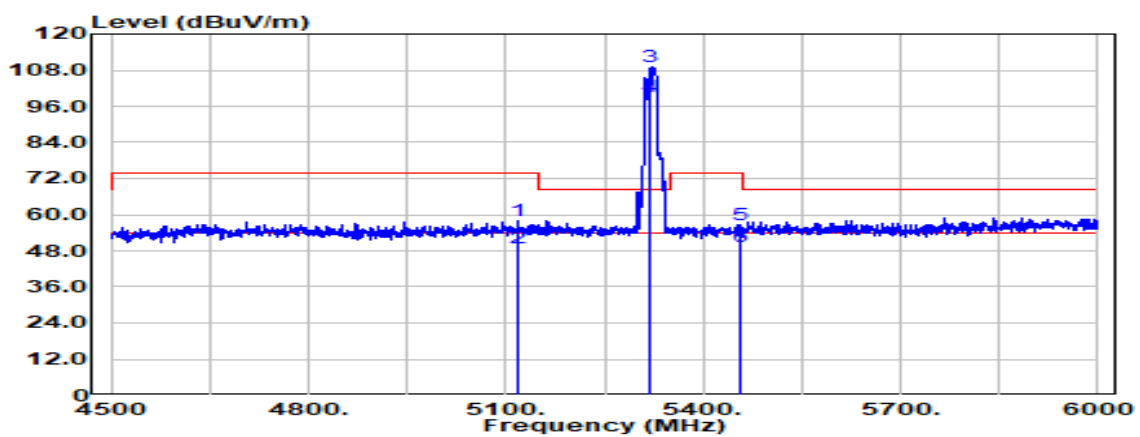

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5119.500       | Peak                           | 38.94                               | 18.90          | 57.84                    | 74.00                    | -16.16         |
| 5119.500       | Average                        | 30.07                               | 18.90          | 48.97                    | 54.00                    | -5.03          |
| 5320.000       | Peak                           | 89.31                               | 19.81          | 109.12                   | -                        | -              |
| 5320.000       | Average                        | 79.16                               | 19.81          | 98.98                    | -                        | -              |
| 5456.250       | Peak                           | 36.71                               | 20.06          | 56.77                    | 74.00                    | -17.23         |
| 5456.250       | Average                        | 29.12                               | 20.06          | 49.19                    | 54.00                    | -4.81          |




Report No.: TMWK2201000111KR

Page: 461 / 939


Rev.: 00

|           |                                         |               |                 |
|-----------|-----------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 /<br>5320 MHz 106/54 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                               | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                              | Test Engineer | Ray Li          |
| Detector  | Peak & Average                          |               |                 |

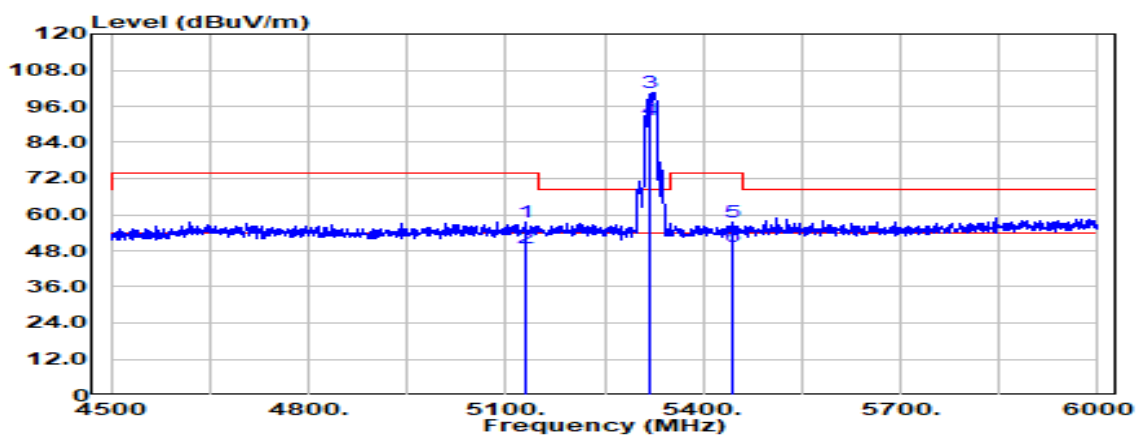

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5130.000       | Peak                           | 38.51                               | 18.94          | 57.44                    | 74.00                    | -16.56         |
| 5130.000       | Average                        | 30.13                               | 18.94          | 49.06                    | 54.00                    | -4.94          |
| 5320.000       | Peak                           | 80.60                               | 19.81          | 100.42                   | -                        | -              |
| 5320.000       | Average                        | 71.53                               | 19.81          | 91.34                    | -                        | -              |
| 5444.250       | Peak                           | 37.39                               | 20.07          | 57.46                    | 74.00                    | -16.54         |
| 5444.250       | Average                        | 29.12                               | 20.07          | 49.19                    | 54.00                    | -4.81          |


|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5310 MHz | Temp/Hum      | 21.8(°C) / 64%RH |
| Test Item | Band Edge                     | Test Date     | March 29, 2022   |
| Polarize  | Vertical                      | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                |               |                  |

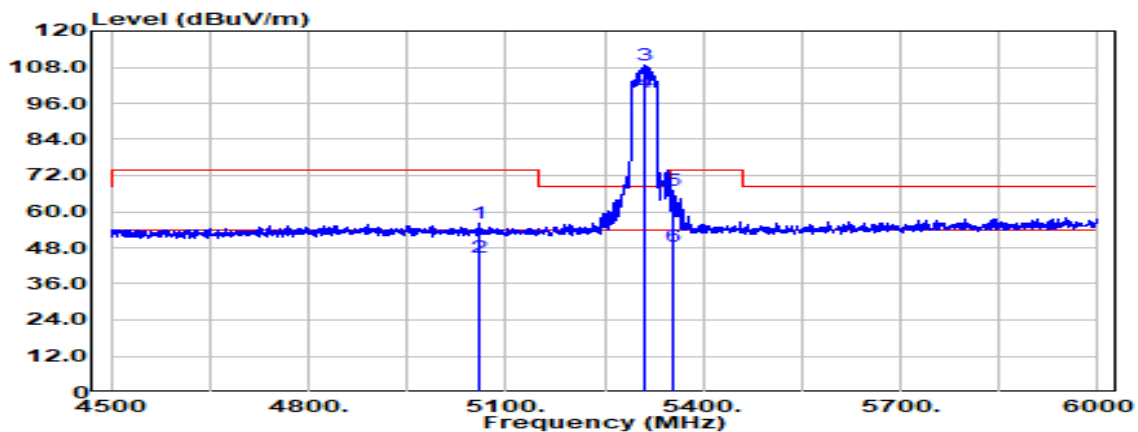

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5060.250       | Peak                           | 37.13                               | 18.89          | 56.02                    | 74.00                    | -17.98         |
| 5060.250       | Average                        | 25.73                               | 18.89          | 44.62                    | 54.00                    | -9.38          |
| 5310.000       | Peak                           | 88.95                               | 19.81          | 108.76                   | -                        | -              |
| 5310.000       | Average                        | 79.66                               | 19.81          | 99.47                    | -                        | -              |
| 5352.750       | Peak                           | 47.22                               | 19.83          | 67.06                    | 74.00                    | -6.94          |
| 5352.750       | Average                        | 28.44                               | 19.83          | 48.27                    | 54.00                    | -5.73          |



|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5310 MHz | Temp/Hum      | 21.8(°C)/ 64%RH |
| Test Item | Band Edge                     | Test Date     | March 29, 2022  |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

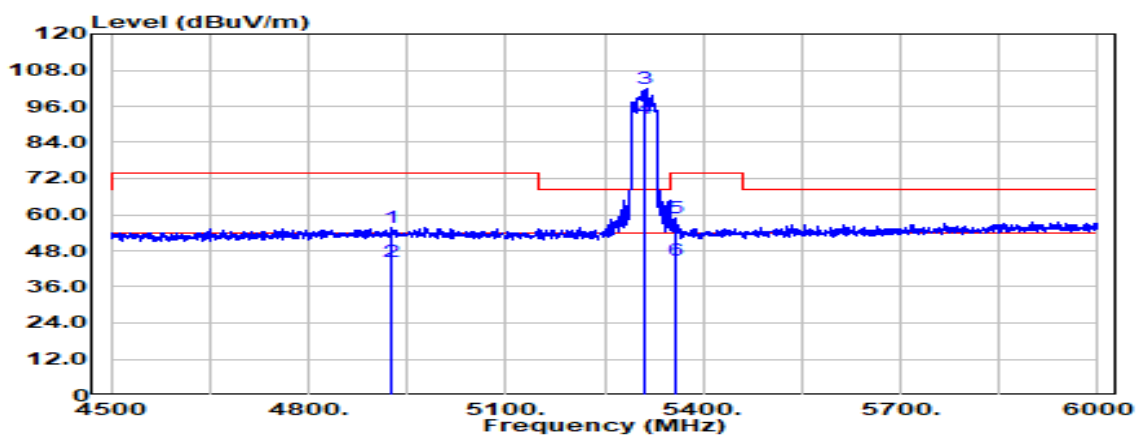


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4926.000       | Peak                           | 37.28                               | 18.63          | 55.91                    | 74.00                    | -18.09         |
| 4926.000       | Average                        | 25.90                               | 18.63          | 44.53                    | 54.00                    | -9.47          |
| 5310.000       | Peak                           | 81.97                               | 19.81          | 101.78                   | -                        | -              |
| 5310.000       | Average                        | 72.24                               | 19.81          | 92.05                    | -                        | -              |
| 5358.750       | Peak                           | 38.79                               | 19.86          | 58.65                    | 74.00                    | -15.35         |
| 5358.750       | Average                        | 24.98                               | 19.86          | 44.84                    | 54.00                    | -9.16          |




Report No.: TMWK2201000111KR

|           |                                         |               |                  |
|-----------|-----------------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 /<br>5310 MHz 242/62 | Temp/Hum      | 23.6(°C) / 62%RH |
| Test Item | Band Edge                               | Test Date     | May 4, 2022      |
| Polarize  | Vertical                                | Test Engineer | Ray Li           |
| Detector  | Peak & Average                          |               |                  |

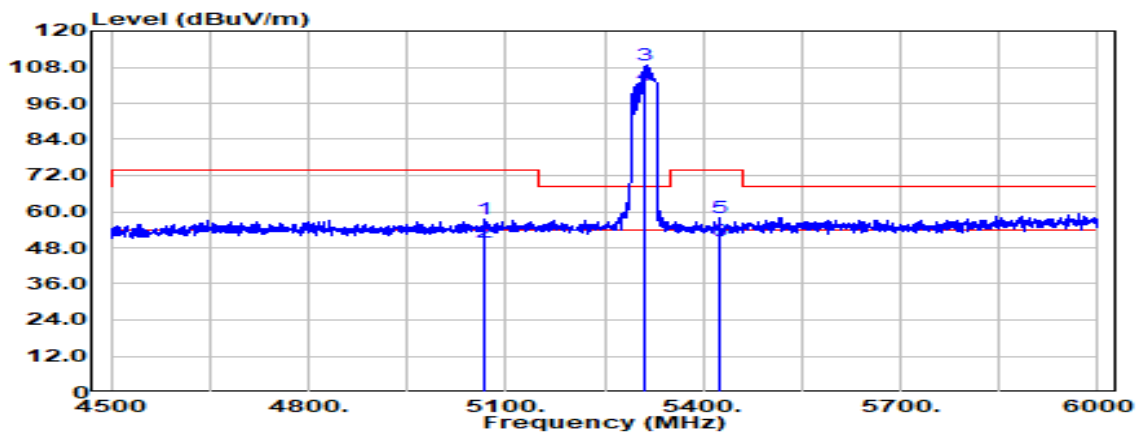

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5068.500       | Peak                           | 38.47                               | 18.88          | 57.35                    | 74.00                    | -16.65         |
| 5068.500       | Average                        | 31.14                               | 18.88          | 50.02                    | 54.00                    | -3.98          |
| 5310.000       | Peak                           | 88.69                               | 19.81          | 108.51                   | -                        | -              |
| 5310.000       | Average                        | 82.16                               | 19.81          | 101.97                   | -                        | -              |
| 5424.000       | Peak                           | 37.73                               | 20.06          | 57.80                    | 74.00                    | -16.20         |
| 5424.000       | Average                        | 30.25                               | 20.06          | 50.31                    | 54.00                    | -3.69          |

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5310 MHz 242/62 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

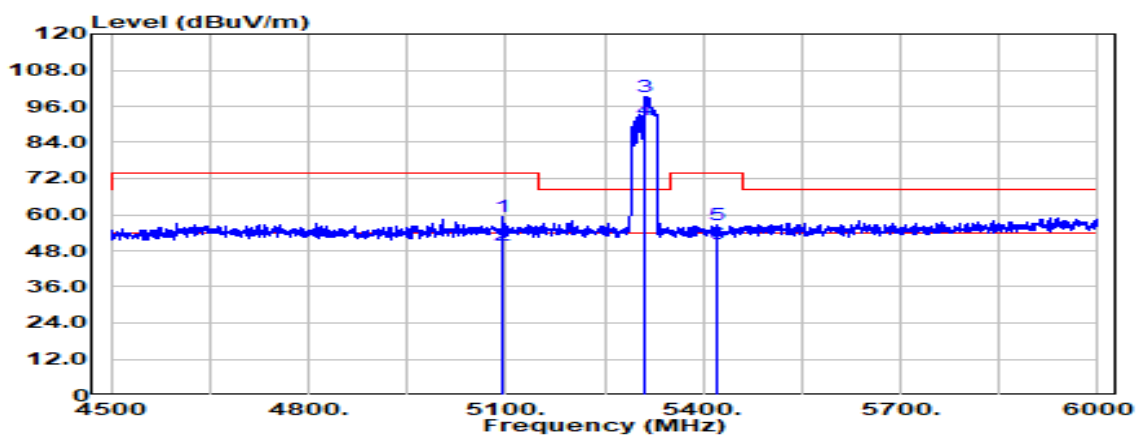


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 5095.500       | Peak                           | 40.66                                | 18.85          | 59.50                     | 74.00                     | -14.50         |
| 5095.500       | Average                        | 31.06                                | 18.85          | 49.90                     | 54.00                     | -4.10          |
| 5310.000       | Peak                           | 79.36                                | 19.81          | 99.17                     | -                         | -              |
| 5310.000       | Average                        | 71.78                                | 19.81          | 91.59                     | -                         | -              |
| 5422.500       | Peak                           | 36.58                                | 20.06          | 56.64                     | 74.00                     | -17.36         |
| 5422.500       | Average                        | 30.05                                | 20.06          | 50.11                     | 54.00                     | -3.89          |




Report No.: TMWK2201000111KR

|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE80 / 5290 MHz | Temp/Hum      | 20.9(°C) / 60%RH |
| Test Item | Band Edge                     | Test Date     | March 30, 2022   |
| Polarize  | Vertical                      | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                |               |                  |

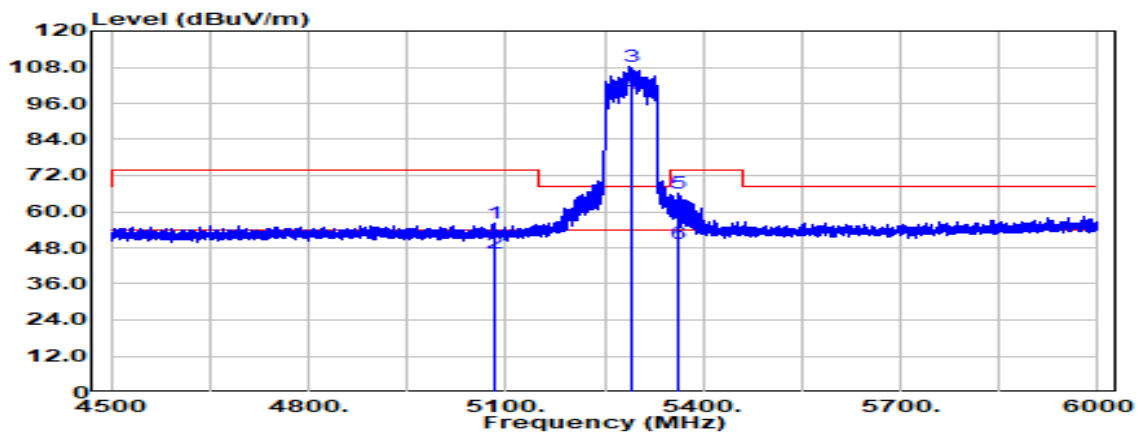


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5083.313       | Peak                           | 37.19                               | 18.86          | 56.05                    | 74.00                    | -17.95         |
| 5083.313       | Average                        | 27.11                               | 18.86          | 45.97                    | 54.00                    | -8.03          |
| 5290.000       | Peak                           | 88.49                               | 19.78          | 108.27                   | -                        | -              |
| 5290.000       | Average                        | 79.57                               | 19.78          | 99.35                    | -                        | -              |
| 5362.313       | Peak                           | 46.28                               | 19.88          | 66.16                    | 74.00                    | -7.84          |
| 5362.313       | Average                        | 29.59                               | 19.88          | 49.47                    | 54.00                    | -4.53          |

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5290 MHz | Temp/Hum      | 20.9(°C)/ 60%RH |
| Test Item | Band Edge                     | Test Date     | March 30, 2022  |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

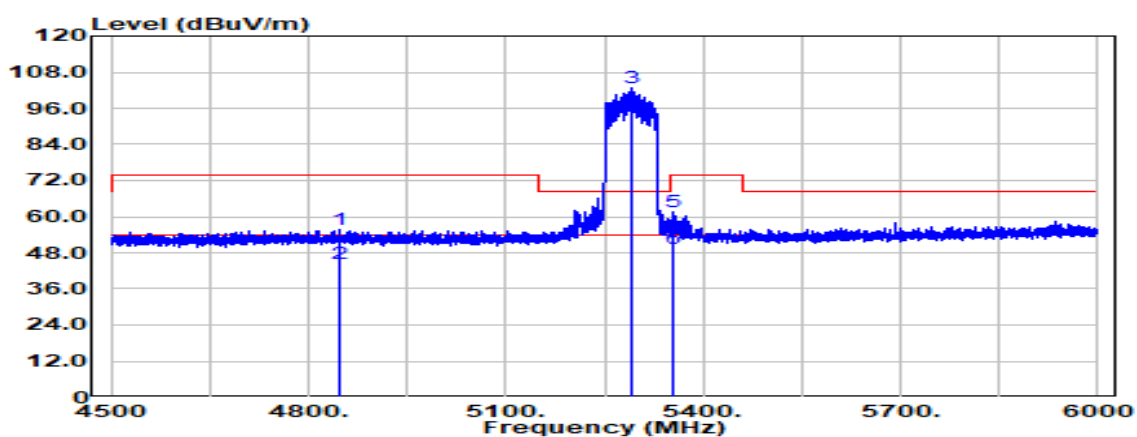

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4845.938       | Peak                           | 37.28                               | 18.60          | 55.88                    | 74.00                    | -18.12         |
| 4845.938       | Average                        | 25.88                               | 18.60          | 44.48                    | 54.00                    | -9.52          |
| 5290.000       | Peak                           | 83.02                               | 19.78          | 102.80                   | -                        | -              |
| 5290.000       | Average                        | 72.95                               | 19.78          | 92.73                    | -                        | -              |
| 5354.063       | Peak                           | 41.87                               | 19.84          | 61.71                    | 74.00                    | -12.29         |
| 5354.063       | Average                        | 29.44                               | 19.84          | 49.28                    | 54.00                    | -4.72          |

|           |                                      |               |                  |
|-----------|--------------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE80 / 5290 MHz 484/66 | Temp/Hum      | 23.6(°C) / 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022      |
| Polarize  | Vertical                             | Test Engineer | Ray Li           |
| Detector  | Peak & Average                       |               |                  |

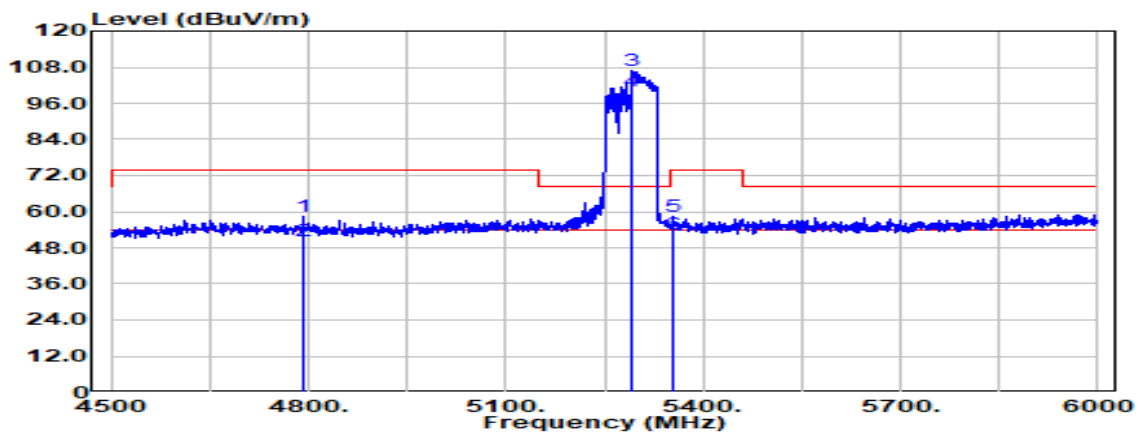

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 4792.500       | Peak                           | 39.79                                | 18.46          | 58.24                     | 74.00                     | -15.76         |
| 4792.500       | Average                        | 31.65                                | 18.46          | 50.10                     | 54.00                     | -3.90          |
| 5290.000       | Peak                           | 87.19                                | 19.78          | 106.97                    | -                         | -              |
| 5290.000       | Average                        | 80.39                                | 19.78          | 100.17                    | -                         | -              |
| 5354.250       | Peak                           | 38.75                                | 19.84          | 58.59                     | 74.00                     | -15.41         |
| 5354.250       | Average                        | 32.62                                | 19.84          | 52.46                     | 54.00                     | -1.54          |




Report No.: TMWK2201000111KR

Page: 469 / 939

Rev.: 00


|           |                                         |               |                 |
|-----------|-----------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 /<br>5290 MHz 484/66 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                               | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                              | Test Engineer | Ray Li          |
| Detector  | Peak & Average                          |               |                 |

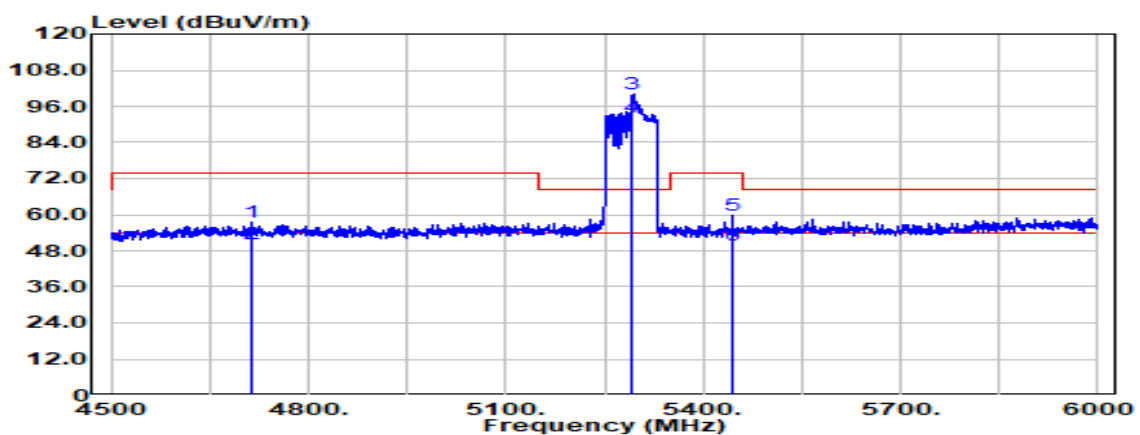

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 4714.500       | Peak                           | 39.17                               | 18.46          | 57.64                    | 74.00                    | -16.36         |
| 4714.500       | Average                        | 31.73                               | 18.46          | 50.19                    | 54.00                    | -3.81          |
| 5290.000       | Peak                           | 80.08                               | 19.78          | 99.86                    | -                        | -              |
| 5290.000       | Average                        | 72.41                               | 19.78          | 92.19                    | -                        | -              |
| 5445.000       | Peak                           | 39.72                               | 20.07          | 59.79                    | 74.00                    | -14.21         |
| 5445.000       | Average                        | 29.96                               | 20.07          | 50.03                    | 54.00                    | -3.97          |

### Test Data for UNII-2c


|           |                         |               |                 |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5500 MHz | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Band Edge               | Test Date     | March 27, 2022  |
| Polarize  | Vertical                | Test Engineer | Czerny Lin      |
| Detector  | Peak & Average          |               |                 |

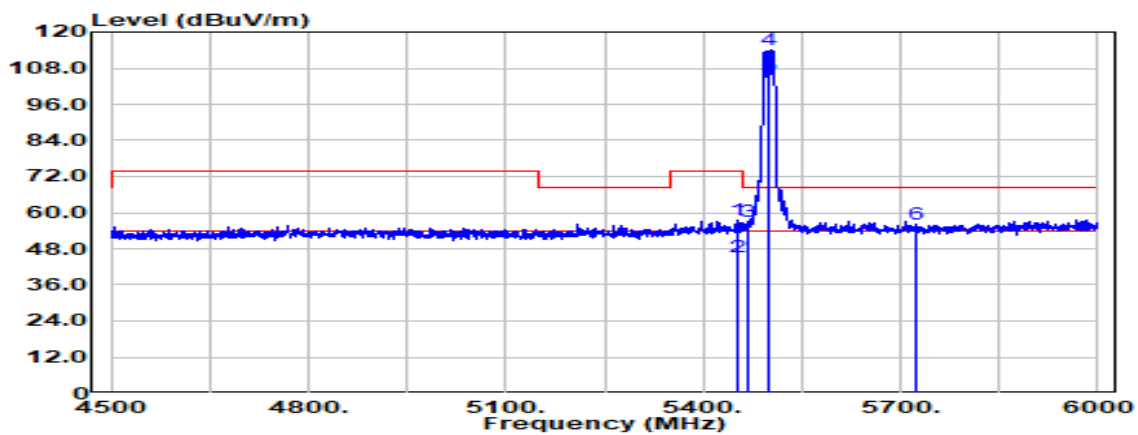

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5451.750       | Peak                           | 37.33                               | 20.07          | 57.39                    | 74.00                    | -16.61         |
| 5451.750       | Average                        | 25.18                               | 20.07          | 45.25                    | 54.00                    | -8.75          |
| 5468.250       | Peak                           | 36.90                               | 20.05          | 56.95                    | 68.20                    | -11.25         |
| 5500.000       | Peak                           | 94.16                               | 20.02          | 114.18                   | -                        | -              |
| 5500.000       | Average                        | 85.49                               | 20.02          | 105.51                   | -                        | -              |
| 5725.000       | Peak                           | 35.64                               | 20.32          | 55.96                    | 68.20                    | -12.24         |



|           |                         |               |                 |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5500 MHz | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Band Edge               | Test Date     | March 27, 2022  |
| Polarize  | Horizontal              | Test Engineer | Czerny Lin      |
| Detector  | Peak & Average          |               |                 |

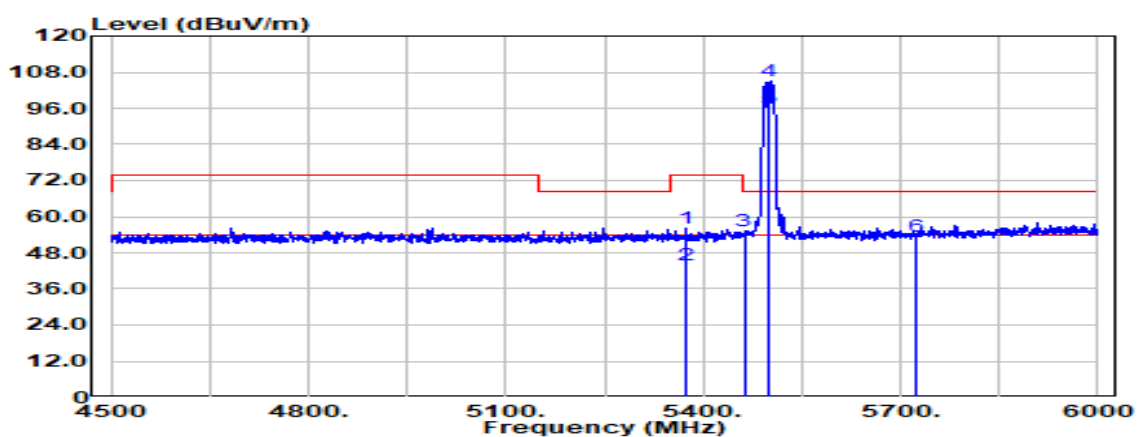

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5373.000       | Peak                           | 36.03                               | 19.93          | 55.97                    | 74.00                    | -18.03         |
| 5373.000       | Average                        | 24.02                               | 19.93          | 43.95                    | 54.00                    | -10.05         |
| 5462.250       | Peak                           | 35.39                               | 20.06          | 55.45                    | 68.20                    | -12.75         |
| 5500.000       | Peak                           | 85.03                               | 20.02          | 105.05                   | -                        | -              |
| 5500.000       | Average                        | 76.11                               | 20.02          | 96.13                    | -                        | -              |
| 5725.000       | Peak                           | 33.22                               | 20.32          | 53.54                    | 68.20                    | -14.66         |




Report No.: TMWK2201000111KR

Page: 472 / 939


Rev.: 00

|           |                         |               |                 |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5700 MHz | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Band Edge               | Test Date     | March 27, 2022  |
| Polarize  | Vertical                | Test Engineer | Czerny Lin      |
| Detector  | Peak & Average          |               |                 |

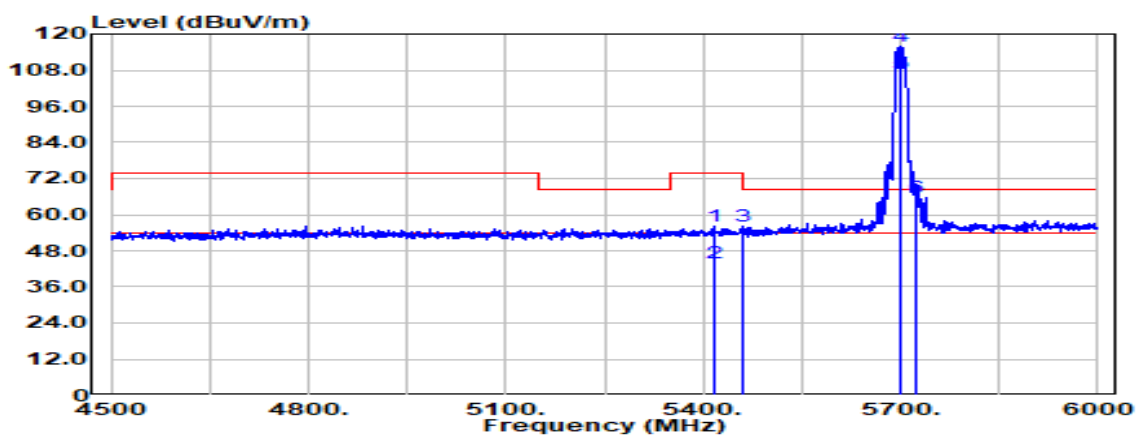

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5416.500       | Peak                           | 36.24                               | 20.06          | 56.30                    | 74.00                    | -17.70         |
| 5416.500       | Average                        | 23.95                               | 20.06          | 44.02                    | 54.00                    | -9.98          |
| 5461.500       | Peak                           | 36.21                               | 20.06          | 56.27                    | 68.20                    | -11.93         |
| 5700.000       | Peak                           | 95.76                               | 20.16          | 115.92                   | -                        | -              |
| 5700.000       | Average                        | 86.92                               | 20.16          | 107.08                   | -                        | -              |
| 5725.000       | Peak                           | 45.33                               | 20.32          | 65.65                    | 68.20                    | -2.55          |

|           |                         |               |                 |
|-----------|-------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11a / 5700 MHz | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Band Edge               | Test Date     | March 27, 2022  |
| Polarize  | Horizontal              | Test Engineer | Czerny Lin      |
| Detector  | Peak & Average          |               |                 |

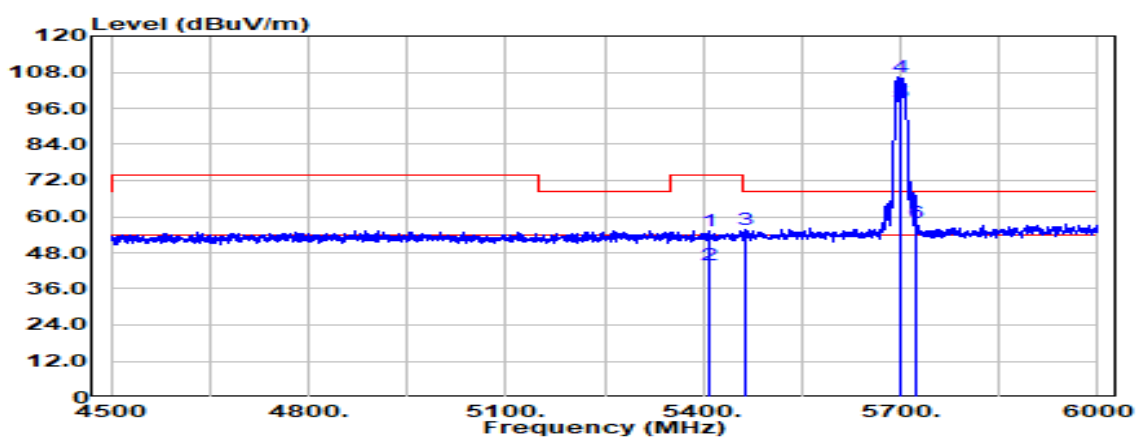

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5409.750       | Peak                           | 35.35                               | 20.06          | 55.41                    | 74.00                    | -18.59         |
| 5409.750       | Average                        | 23.72                               | 20.06          | 43.78                    | 54.00                    | -10.22         |
| 5464.500       | Peak                           | 35.59                               | 20.06          | 55.65                    | 68.20                    | -12.55         |
| 5700.000       | Peak                           | 86.16                               | 20.16          | 106.32                   | -                        | -              |
| 5700.000       | Average                        | 77.85                               | 20.16          | 98.01                    | -                        | -              |
| 5725.000       | Peak                           | 37.74                               | 20.32          | 58.06                    | 68.20                    | -10.14         |




Report No.: TMWK2201000111KR

Page: 474 / 939


Rev.: 00

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5500 MHz | Temp/Hum      | 22.5(°C) / 63%RH |
| Test Item | Band Edge                      | Test Date     | March 27, 2022   |
| Polarize  | Vertical                       | Test Engineer | Czerny Lin       |
| Detector  | Peak & Average                 |               |                  |

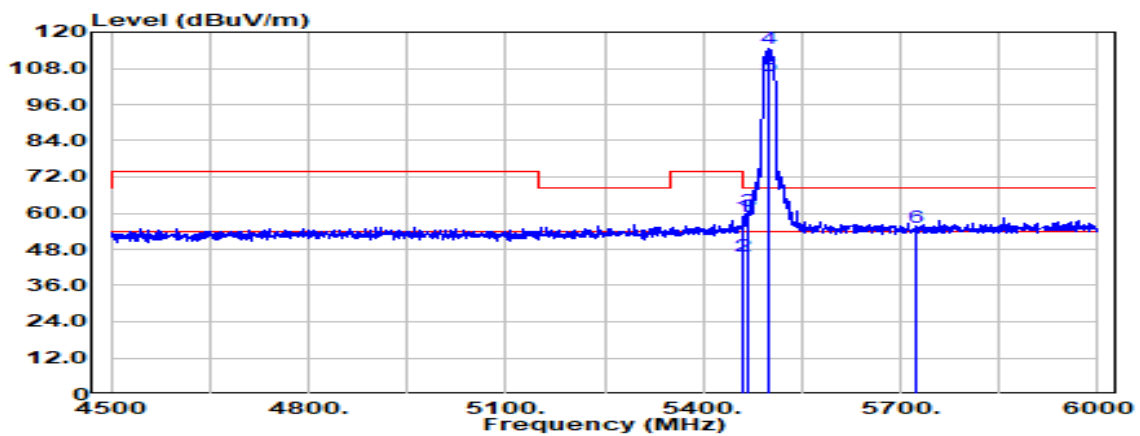

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 5459.250       | Peak                           | 38.72                                | 20.06          | 58.78                     | 74.00                     | -15.22         |
| 5459.250       | Average                        | 25.71                                | 20.06          | 45.77                     | 54.00                     | -8.23          |
| 5466.750       | Peak                           | 40.59                                | 20.05          | 60.64                     | 68.20                     | -7.56          |
| 5500.000       | Peak                           | 94.32                                | 20.02          | 114.34                    | -                         | -              |
| 5500.000       | Average                        | 85.55                                | 20.02          | 105.57                    | -                         | -              |
| 5725.000       | Peak                           | 35.04                                | 20.32          | 55.36                     | 68.20                     | -12.84         |

|           |                                |               |                 |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT20 / 5500 MHz | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Band Edge                      | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                     | Test Engineer | Czerny Lin      |
| Detector  | Peak & Average                 |               |                 |

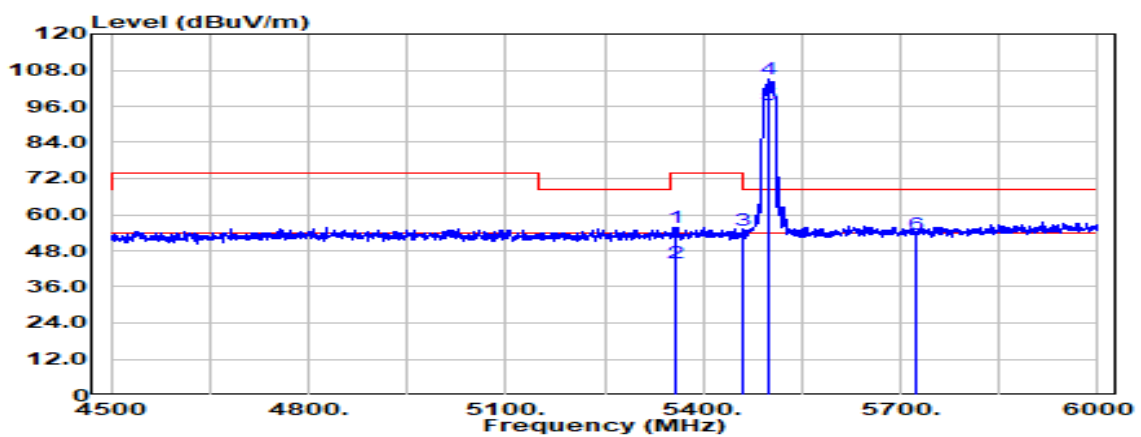

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5359.500       | Peak                           | 35.81                               | 19.87          | 55.68                    | 74.00                    | -18.32         |
| 5359.500       | Average                        | 24.09                               | 19.87          | 43.95                    | 54.00                    | -10.05         |
| 5460.750       | Peak                           | 34.93                               | 20.06          | 54.99                    | 68.20                    | -13.21         |
| 5500.000       | Peak                           | 84.82                               | 20.02          | 104.84                   | -                        | -              |
| 5500.000       | Average                        | 76.36                               | 20.02          | 96.38                    | -                        | -              |
| 5725.000       | Peak                           | 33.12                               | 20.32          | 53.44                    | 68.20                    | -14.76         |




Report No.: TMWK2201000111KR

Page: 476 / 939

Rev.: 00

|           |                                |               |                 |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT20 / 5700 MHz | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Band Edge                      | Test Date     | March 27, 2022  |
| Polarize  | Vertical                       | Test Engineer | Czerny Lin      |
| Detector  | Peak & Average                 |               |                 |

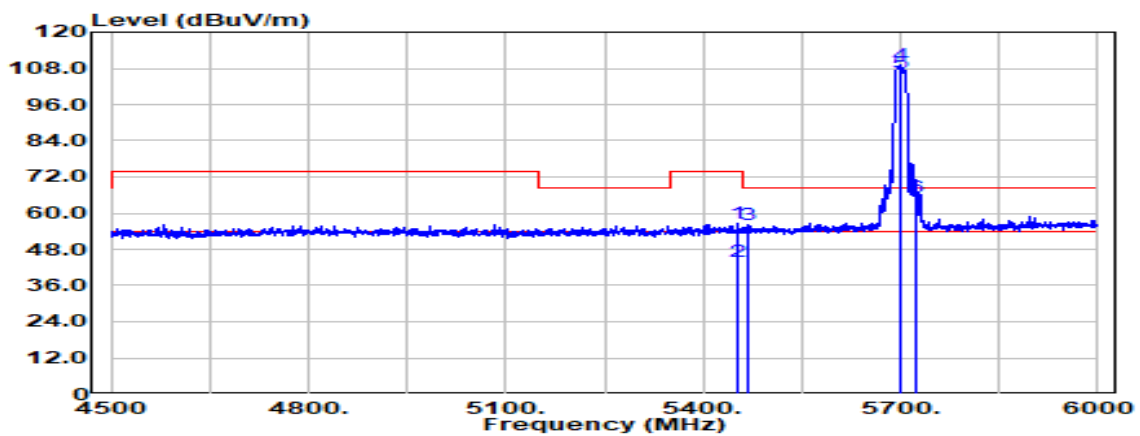

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 5451.750       | Peak                           | 36.35                                | 20.07          | 56.41                     | 74.00                     | -17.59         |
| 5451.750       | Average                        | 24.07                                | 20.07          | 44.14                     | 54.00                     | -9.86          |
| 5469.000       | Peak                           | 36.09                                | 20.05          | 56.14                     | 68.20                     | -12.06         |
| 5700.000       | Peak                           | 89.08                                | 20.16          | 109.24                    | -                         | -              |
| 5700.000       | Average                        | 86.41                                | 20.16          | 106.57                    | -                         | -              |
| 5725.000       | Peak                           | 45.03                                | 20.32          | 65.35                     | 68.20                     | -2.85          |




Report No.: TMWK2201000111KR

Page: 477 / 939


Rev.: 00

|           |                                |               |                 |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT20 / 5700 MHz | Temp/Hum      | 22.5(°C)/ 63%RH |
| Test Item | Band Edge                      | Test Date     | March 27, 2022  |
| Polarize  | Horizontal                     | Test Engineer | Czerny Lin      |
| Detector  | Peak & Average                 |               |                 |

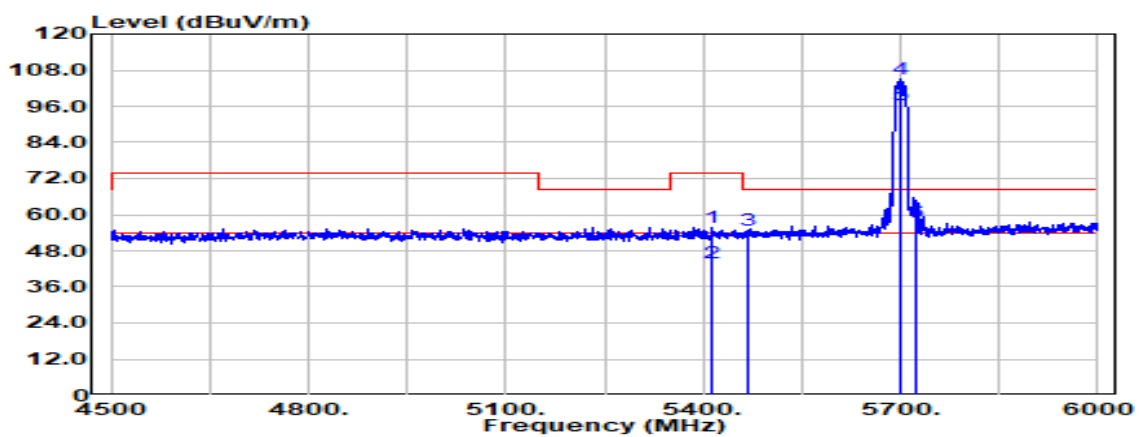

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5415.000       | Peak                           | 35.84                               | 20.06          | 55.90                    | 74.00                    | -18.10         |
| 5415.000       | Average                        | 23.70                               | 20.06          | 43.77                    | 54.00                    | -10.23         |
| 5469.000       | Peak                           | 34.57                               | 20.05          | 54.62                    | 68.20                    | -13.58         |
| 5700.000       | Peak                           | 84.74                               | 20.16          | 104.90                   | -                        | -              |
| 5700.000       | Average                        | 76.26                               | 20.16          | 96.42                    | -                        | -              |
| 5725.000       | Peak                           | 37.06                               | 20.32          | 57.38                    | 68.20                    | -10.82         |


|           |                                |               |                 |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT40 / 5510 MHz | Temp/Hum      | 21.4(°C)/ 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022  |
| Polarize  | Vertical                       | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                 |               |                 |

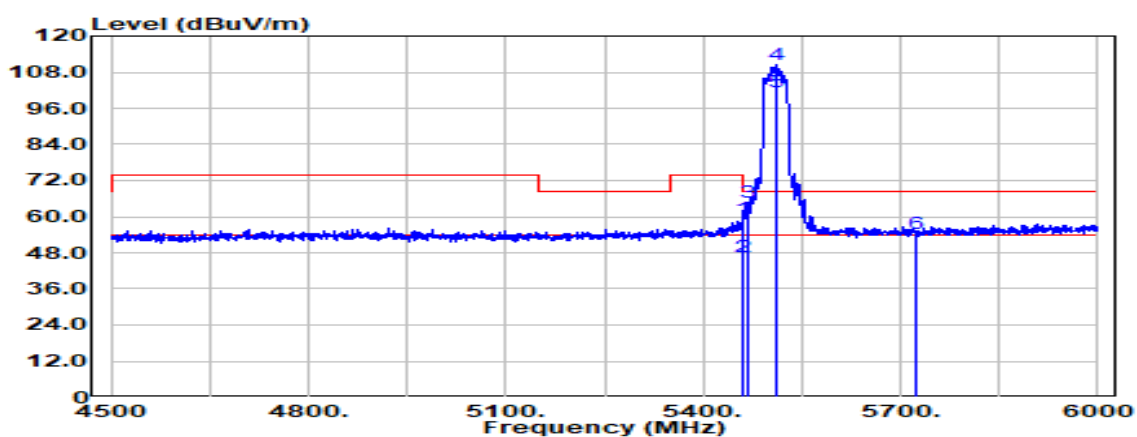

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5458.500       | Peak                           | 39.34                               | 20.06          | 59.40                    | 74.00                    | -14.60         |
| 5458.500       | Average                        | 26.76                               | 20.06          | 46.83                    | 54.00                    | -7.17          |
| 5468.250       | Peak                           | 44.49                               | 20.05          | 64.55                    | 68.20                    | -3.65          |
| 5510.000       | Peak                           | 90.57                               | 20.02          | 110.59                   | -                        | -              |
| 5510.000       | Average                        | 81.49                               | 20.02          | 101.51                   | -                        | -              |
| 5725.000       | Peak                           | 34.09                               | 20.32          | 54.41                    | 68.20                    | -13.79         |




|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5510 MHz | Temp/Hum      | 21.4(°C) / 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022   |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

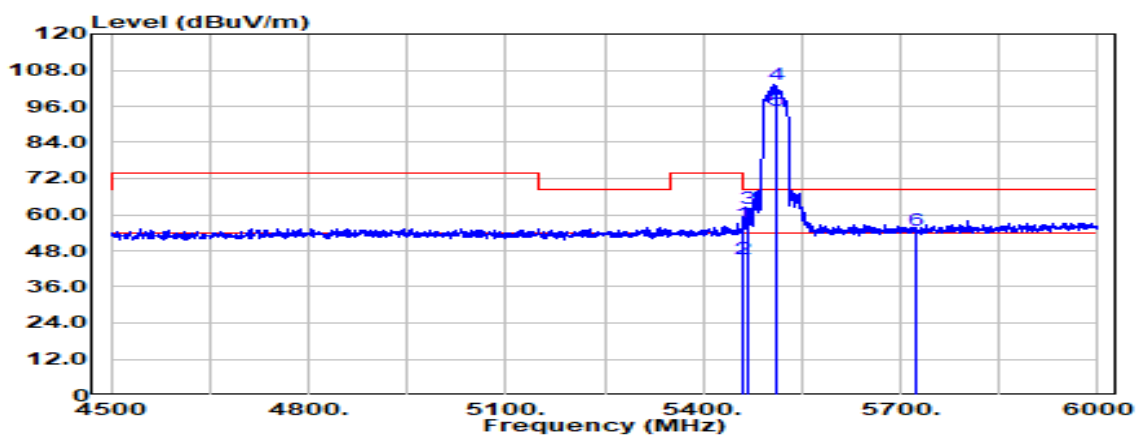

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5460.000       | Peak                           | 36.82                               | 20.06          | 56.88                    | 68.20                    | -11.32         |
| 5460.000       | Average                        | 25.17                               | 20.06          | 45.23                    | 54.00                    | -8.77          |
| 5469.750       | Peak                           | 42.07                               | 20.05          | 62.12                    | 68.20                    | -6.08          |
| 5510.000       | Peak                           | 83.10                               | 20.02          | 103.12                   | -                        | -              |
| 5510.000       | Average                        | 74.73                               | 20.02          | 94.75                    | -                        | -              |
| 5725.000       | Peak                           | 34.30                               | 20.32          | 54.62                    | 68.20                    | -13.58         |

|           |                                |               |                 |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT40 / 5670 MHz | Temp/Hum      | 21.4(°C)/ 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022  |
| Polarize  | Vertical                       | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                 |               |                 |

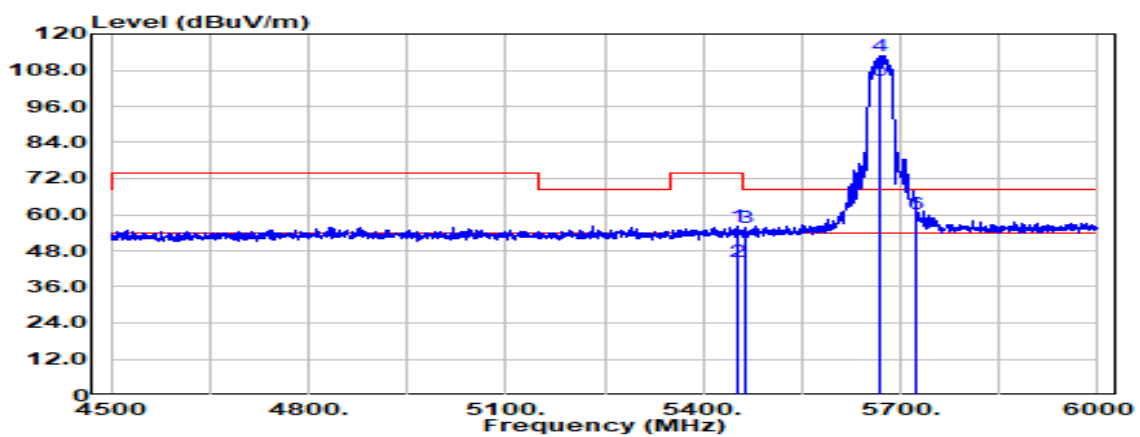

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 5451.000       | Peak                           | 35.93                                | 20.07          | 56.00                     | 74.00                     | -18.00         |
| 5451.000       | Average                        | 24.45                                | 20.07          | 44.52                     | 54.00                     | -9.48          |
| 5463.750       | Peak                           | 35.78                                | 20.06          | 55.84                     | 68.20                     | -12.36         |
| 5670.000       | Peak                           | 92.82                                | 20.15          | 112.97                    | -                         | -              |
| 5670.000       | Average                        | 84.61                                | 20.15          | 104.77                    | -                         | -              |
| 5725.000       | Peak                           | 40.12                                | 20.32          | 60.44                     | 68.20                     | -7.76          |




Report No.: TMWK2201000111KR

Page: 481 / 939


Rev.: 00

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5670 MHz | Temp/Hum      | 21.4(°C) / 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022   |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

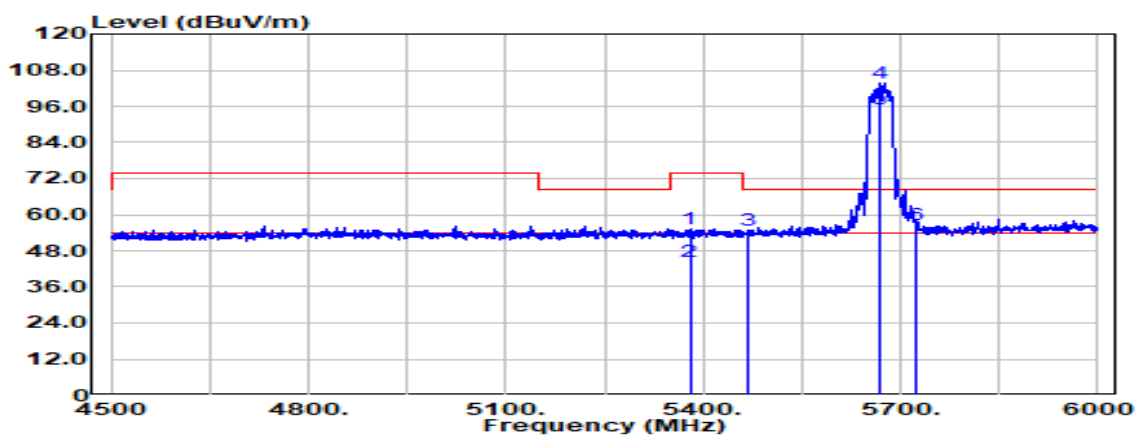


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5379.750       | Peak                           | 35.43                               | 19.96          | 55.39                    | 74.00                    | -18.61         |
| 5379.750       | Average                        | 24.31                               | 19.96          | 44.27                    | 54.00                    | -9.73          |
| 5467.500       | Peak                           | 34.74                               | 20.05          | 54.80                    | 68.20                    | -13.40         |
| 5670.000       | Peak                           | 83.48                               | 20.15          | 103.63                   | -                        | -              |
| 5670.000       | Average                        | 75.15                               | 20.15          | 95.31                    | -                        | -              |
| 5725.000       | Peak                           | 36.13                               | 20.32          | 56.45                    | 68.20                    | -11.75         |

|           |                                |               |                 |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5530 MHz | Temp/Hum      | 21.4(°C)/ 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022  |
| Polarize  | Vertical                       | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                 |               |                 |

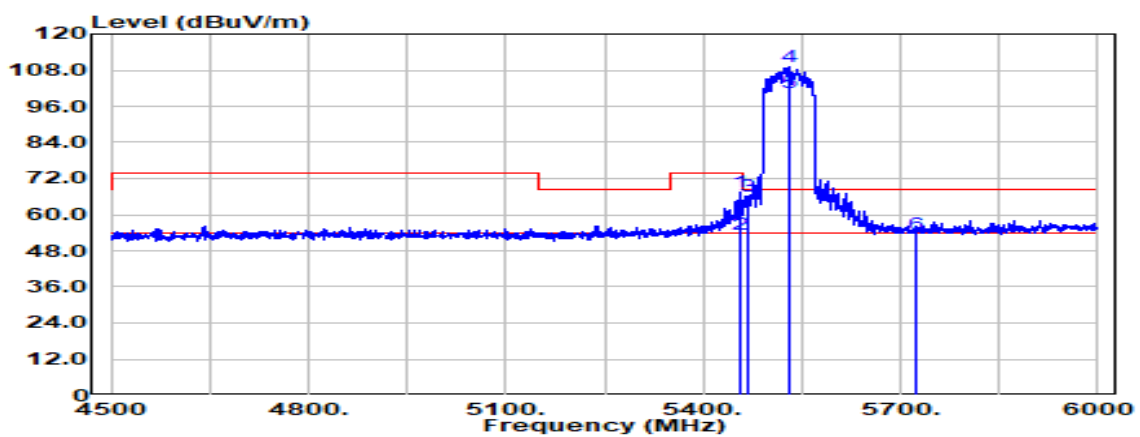

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5456.250       | Peak                           | 47.43                               | 20.06          | 67.49                    | 74.00                    | -6.51          |
| 5456.250       | Average                        | 33.34                               | 20.06          | 53.40                    | 54.00                    | -0.60          |
| 5468.250       | Peak                           | 46.01                               | 20.05          | 66.06                    | 68.20                    | -2.14          |
| 5530.000       | Peak                           | 88.95                               | 20.03          | 108.97                   | -                        | -              |
| 5530.000       | Average                        | 80.58                               | 20.03          | 100.61                   | -                        | -              |
| 5725.000       | Peak                           | 33.29                               | 20.32          | 53.61                    | 68.20                    | -14.59         |

|           |                                |               |                 |
|-----------|--------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ac VHT80 / 5530 MHz | Temp/Hum      | 21.4(°C)/ 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022  |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                 |               |                 |

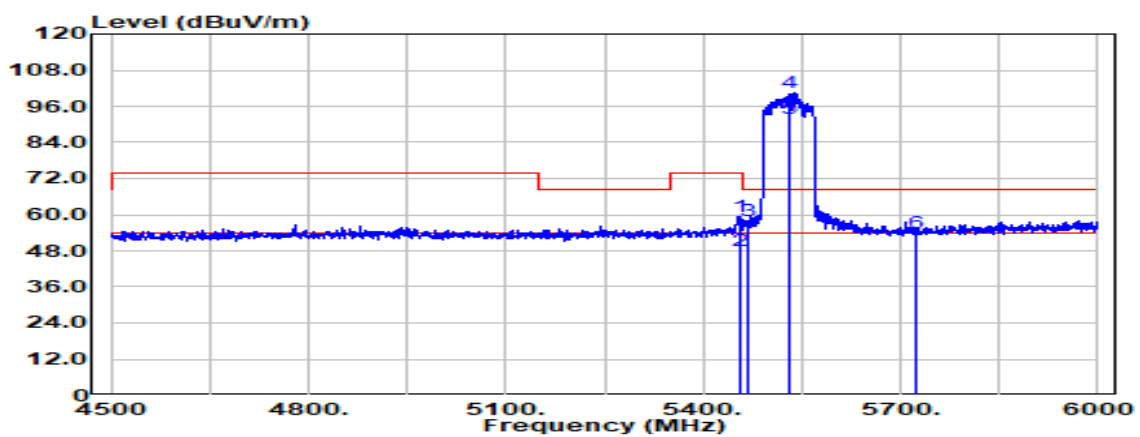

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5456.250       | Peak                           | 39.45                               | 20.06          | 59.51                    | 74.00                    | -14.49         |
| 5456.250       | Average                        | 28.12                               | 20.06          | 48.18                    | 54.00                    | -5.82          |
| 5468.250       | Peak                           | 38.10                               | 20.05          | 58.16                    | 68.20                    | -10.04         |
| 5530.000       | Peak                           | 80.30                               | 20.03          | 100.32                   | -                        | -              |
| 5530.000       | Average                        | 71.86                               | 20.03          | 91.89                    | -                        | -              |
| 5725.000       | Peak                           | 33.39                               | 20.32          | 53.71                    | 68.20                    | -14.49         |




Report No.: TMWK2201000111KR

Page: 484 / 939

Rev.: 00

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz | Temp/Hum      | 21.4(°C)/ 60%RH |
| Test Item | Band Edge                     | Test Date     | March 28, 2022  |
| Polarize  | Vertical                      | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

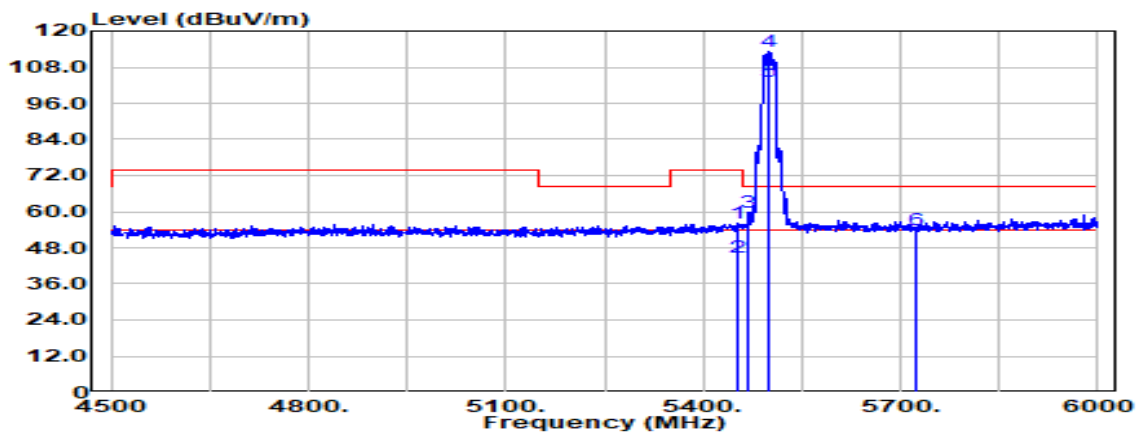

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5454.000       | Peak                           | 35.95                               | 20.07          | 56.02                    | 74.00                    | -17.98         |
| 5454.000       | Average                        | 24.98                               | 20.07          | 45.05                    | 54.00                    | -8.95          |
| 5469.750       | Peak                           | 39.60                               | 20.05          | 59.65                    | 68.20                    | -8.55          |
| 5500.000       | Peak                           | 92.99                               | 20.02          | 113.01                   | -                        | -              |
| 5500.000       | Average                        | 83.29                               | 20.02          | 103.31                   | -                        | -              |
| 5725.000       | Peak                           | 33.55                               | 20.32          | 53.87                    | 68.20                    | -14.33         |




Report No.: TMWK2201000111KR

Page: 485 / 939

Rev.: 00

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz | Temp/Hum      | 21.4(°C)/ 60%RH |
| Test Item | Band Edge                     | Test Date     | March 28, 2022  |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

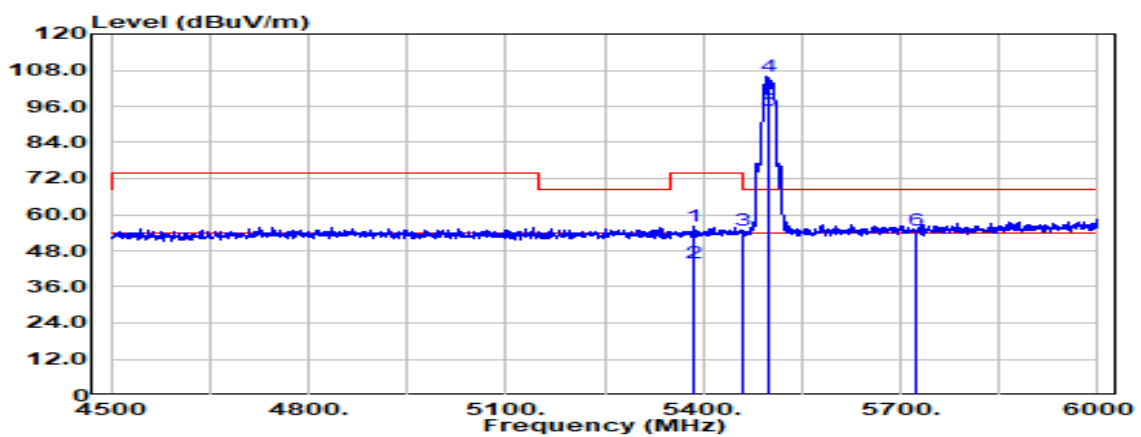

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5384.250       | Peak                           | 36.27                               | 19.98          | 56.25                    | 74.00                    | -17.75         |
| 5384.250       | Average                        | 23.93                               | 19.98          | 43.91                    | 54.00                    | -10.09         |
| 5461.500       | Peak                           | 34.71                               | 20.06          | 54.77                    | 68.20                    | -13.43         |
| 5500.000       | Peak                           | 85.75                               | 20.02          | 105.77                   | -                        | -              |
| 5500.000       | Average                        | 74.74                               | 20.02          | 94.76                    | -                        | -              |
| 5725.000       | Peak                           | 34.66                               | 20.32          | 54.98                    | 68.20                    | -13.22         |




Report No.: TMWK2201000111KR

Page: 486 / 939

Rev.: 00

|           |                                    |               |                 |
|-----------|------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz 26/0 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                          | Test Date     | May 4, 2022     |
| Polarize  | Vertical                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                     |               |                 |

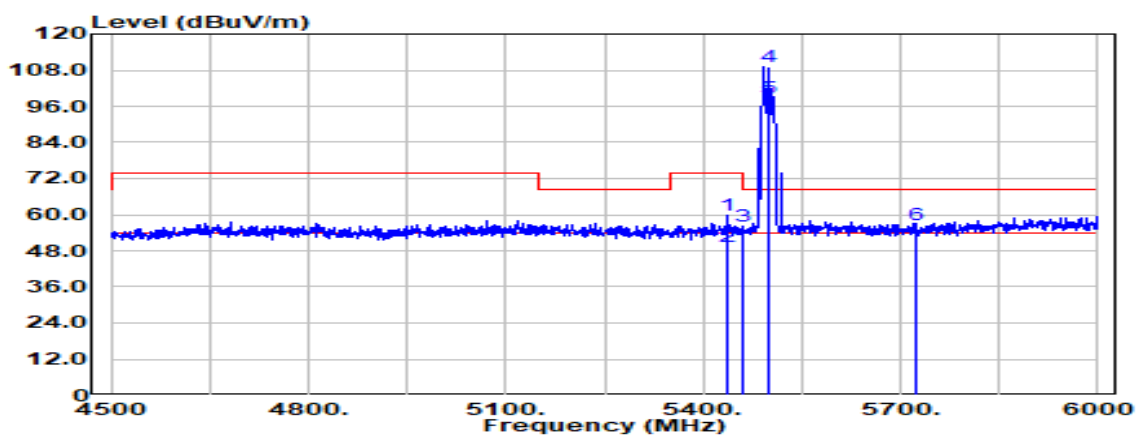

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5438.250       | Peak                           | 39.84                               | 20.07          | 59.91                    | 74.00                    | -14.09         |
| 5438.250       | Average                        | 29.07                               | 20.07          | 49.14                    | 54.00                    | -4.86          |
| 5461.500       | Peak                           | 35.98                               | 20.06          | 56.04                    | 68.20                    | -12.16         |
| 5500.000       | Peak                           | 89.07                               | 20.02          | 109.09                   | -                        | -              |
| 5500.000       | Average                        | 78.57                               | 20.02          | 98.59                    | -                        | -              |
| 5725.000       | Peak                           | 36.23                               | 20.32          | 56.55                    | 68.20                    | -11.65         |






Report No.: TMWK2201000111KR

Page: 487 / 939

Rev.: 00

|           |                                    |               |                 |
|-----------|------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz_26/0 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                          | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                         | Test Engineer | Ray Li          |
| Detector  | Peak & Average                     |               |                 |

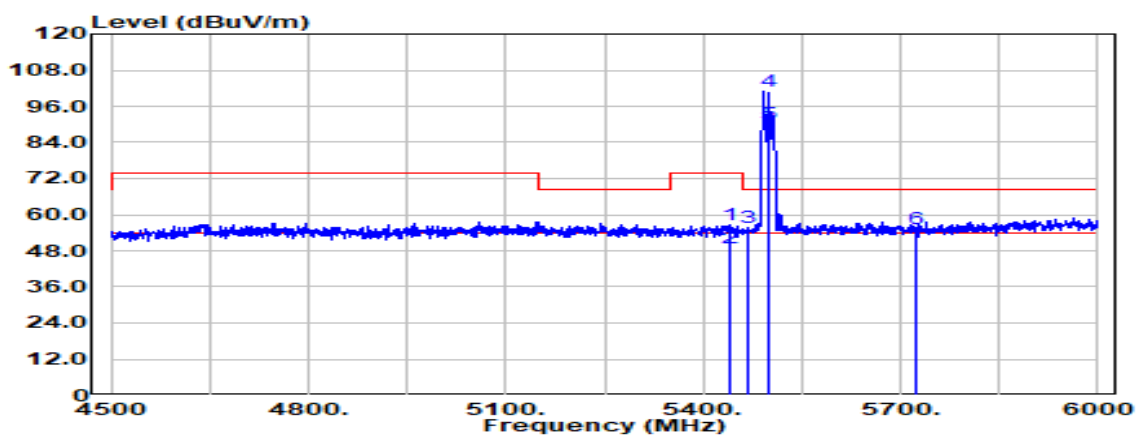

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5441.250       | Peak                           | 36.41                               | 20.07          | 56.48                    | 74.00                    | -17.52         |
| 5441.250       | Average                        | 29.04                               | 20.07          | 49.11                    | 54.00                    | -4.89          |
| 5469.750       | Peak                           | 35.82                               | 20.05          | 55.87                    | 68.20                    | -12.33         |
| 5500.000       | Peak                           | 81.11                               | 20.02          | 101.13                   | -                        | -              |
| 5500.000       | Average                        | 70.32                               | 20.02          | 90.34                    | -                        | -              |
| 5725.000       | Peak                           | 35.06                               | 20.32          | 55.38                    | 68.20                    | -12.82         |




Report No.: TMWK2201000111KR

Page: 488 / 939


Rev.: 00

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz 52/37 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                           | Test Date     | May 4, 2022     |
| Polarize  | Vertical                            | Test Engineer | Ray Li          |
| Detector  | Peak & Average                      |               |                 |

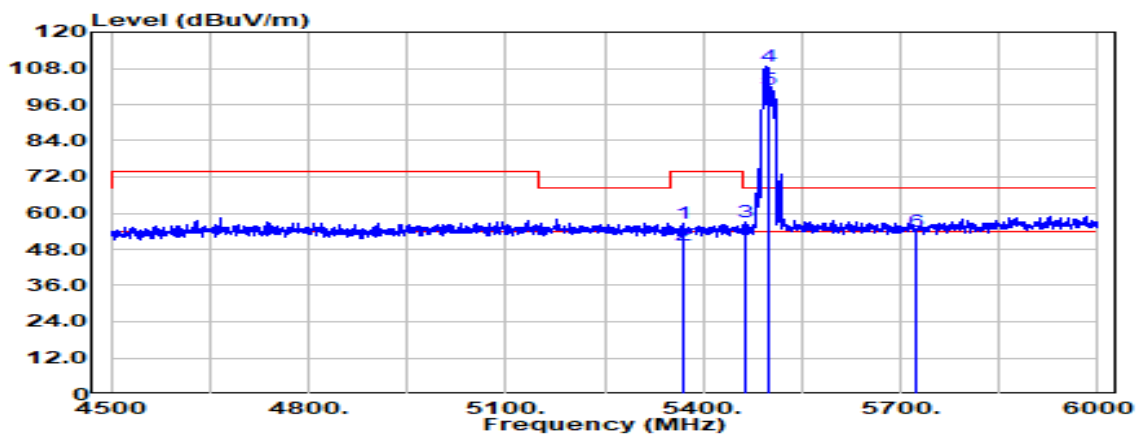


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5368.500       | Peak                           | 36.56                               | 19.91          | 56.47                    | 74.00                    | -17.53         |
| 5368.500       | Average                        | 29.24                               | 19.91          | 49.15                    | 54.00                    | -4.85          |
| 5463.750       | Peak                           | 37.12                               | 20.06          | 57.18                    | 68.20                    | -11.02         |
| 5500.000       | Peak                           | 88.47                               | 20.02          | 108.49                   | -                        | -              |
| 5500.000       | Average                        | 81.10                               | 20.02          | 101.12                   | -                        | -              |
| 5725.000       | Peak                           | 33.63                               | 20.32          | 53.95                    | 68.20                    | -14.25         |

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz 52/37 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                           | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                          | Test Engineer | Ray Li          |
| Detector  | Peak & Average                      |               |                 |

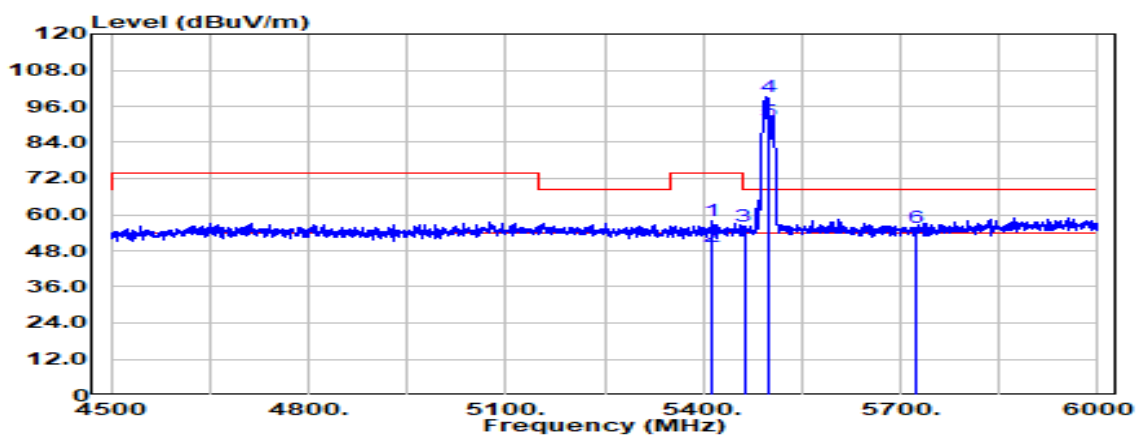

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBPμV) | Factor<br>(dB) | Actual<br>FS<br>(dBPμV/m) | Limit<br>@3m<br>(dBPμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|--------------------------------------|----------------|---------------------------|---------------------------|----------------|
| 5414.250       | Peak                           | 37.96                                | 20.06          | 58.02                     | 74.00                     | -15.98         |
| 5414.250       | Average                        | 29.15                                | 20.06          | 49.21                     | 54.00                     | -4.79          |
| 5462.250       | Peak                           | 36.17                                | 20.06          | 56.23                     | 68.20                     | -11.97         |
| 5500.000       | Peak                           | 78.97                                | 20.02          | 98.99                     | -                         | -              |
| 5500.000       | Average                        | 70.82                                | 20.02          | 90.84                     | -                         | -              |
| 5725.000       | Peak                           | 35.33                                | 20.32          | 55.65                     | 68.20                     | -12.55         |

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz 106/53 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Vertical                             | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

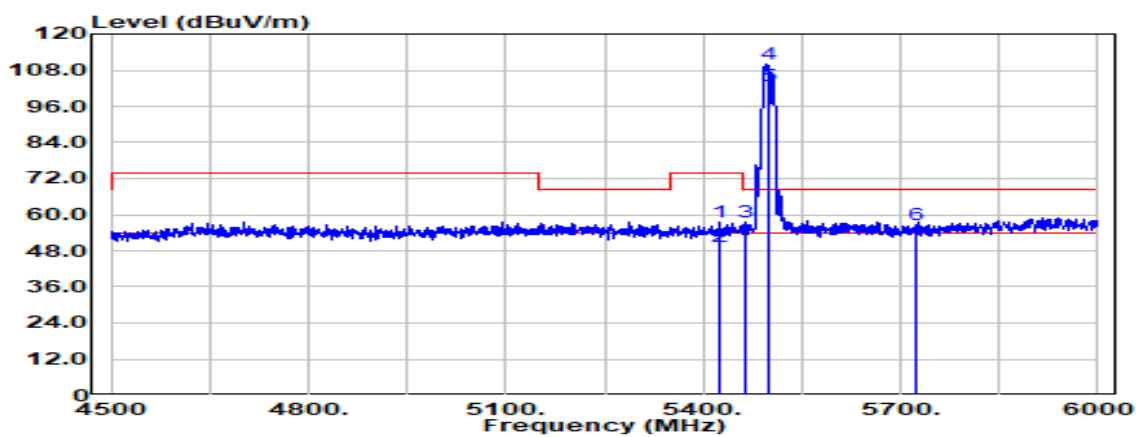

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5426.250       | Peak                           | 37.47                               | 20.07          | 57.54                    | 74.00                    | -16.46         |
| 5426.250       | Average                        | 29.17                               | 20.07          | 49.24                    | 54.00                    | -4.76          |
| 5466.000       | Peak                           | 37.41                               | 20.05          | 57.47                    | 68.20                    | -10.73         |
| 5500.000       | Peak                           | 90.19                               | 20.02          | 110.21                   | -                        | -              |
| 5500.000       | Average                        | 82.79                               | 20.02          | 102.81                   | -                        | -              |
| 5725.000       | Peak                           | 36.48                               | 20.32          | 56.80                    | 68.20                    | -11.40         |




Report No.: TMWK2201000111KR

Page: 491 / 939

Rev.: 00

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5500 MHz_106/53 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

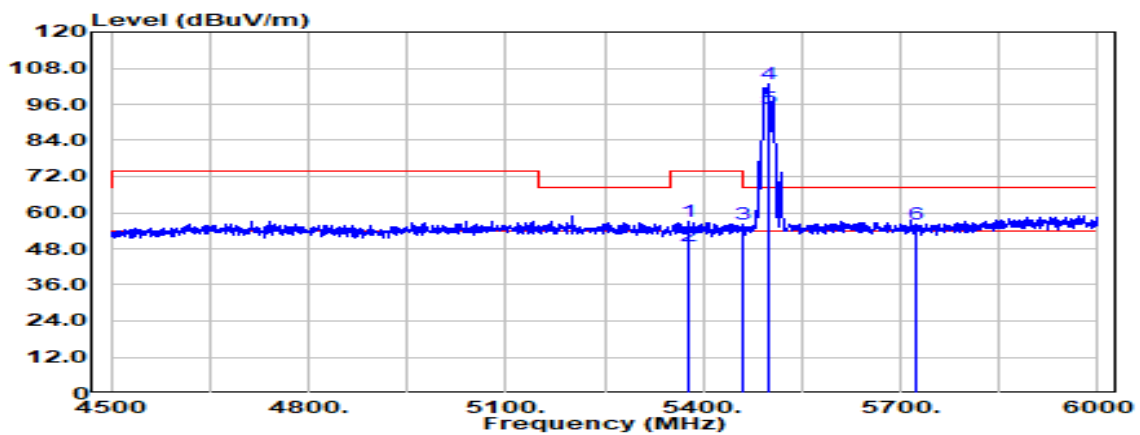


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5379.000       | Peak                           | 37.01                               | 19.96          | 56.97                    | 74.00                    | -17.03         |
| 5379.000       | Average                        | 29.14                               | 19.96          | 49.10                    | 54.00                    | -4.90          |
| 5461.500       | Peak                           | 36.04                               | 20.06          | 56.10                    | 68.20                    | -12.10         |
| 5500.000       | Peak                           | 82.67                               | 20.02          | 102.69                   | -                        | -              |
| 5500.000       | Average                        | 74.81                               | 20.02          | 94.83                    | -                        | -              |
| 5725.000       | Peak                           | 35.89                               | 20.32          | 56.21                    | 68.20                    | -11.99         |




Report No.: TMWK2201000111KR

|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz | Temp/Hum      | 21.4(°C) / 60%RH |
| Test Item | Band Edge                     | Test Date     | March 28, 2022   |
| Polarize  | Vertical                      | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                |               |                  |

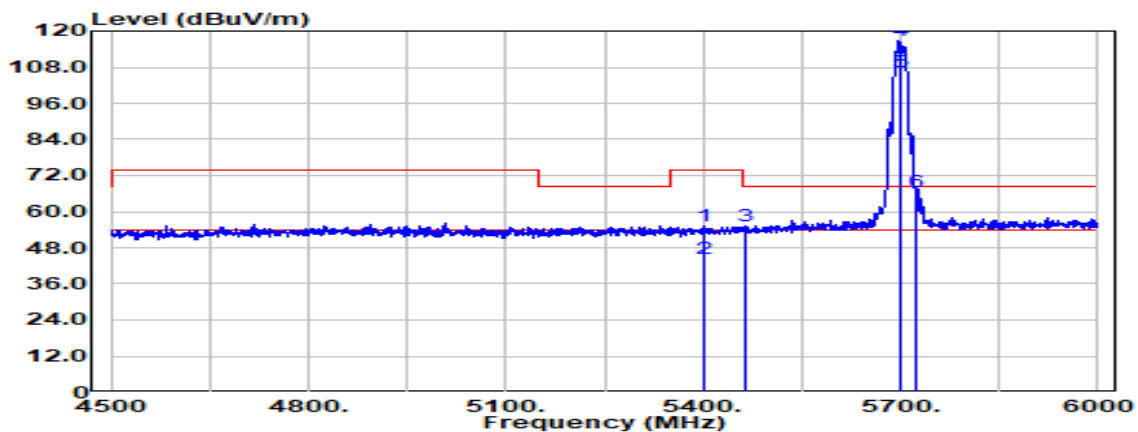

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5403.000       | Peak                           | 35.36                               | 20.06          | 55.42                    | 74.00                    | -18.58         |
| 5403.000       | Average                        | 24.14                               | 20.06          | 44.20                    | 54.00                    | -9.80          |
| 5465.250       | Peak                           | 35.09                               | 20.05          | 55.15                    | 68.20                    | -13.05         |
| 5700.000       | Peak                           | 96.88                               | 20.16          | 117.04                   | -                        | -              |
| 5700.000       | Average                        | 86.18                               | 20.16          | 106.34                   | -                        | -              |
| 5725.000       | Peak                           | 46.22                               | 20.32          | 66.54                    | 68.20                    | -1.66          |

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz | Temp/Hum      | 21.4(°C)/ 60%RH |
| Test Item | Band Edge                     | Test Date     | March 28, 2022  |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

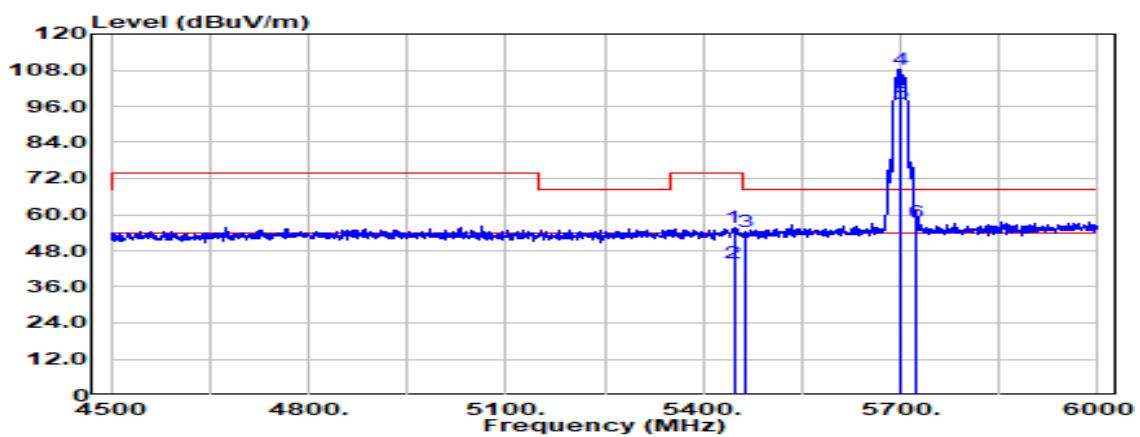

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5446.500       | Peak                           | 35.73                               | 20.07          | 55.80                    | 74.00                    | -18.20         |
| 5446.500       | Average                        | 23.78                               | 20.07          | 43.85                    | 54.00                    | -10.15         |
| 5465.250       | Peak                           | 34.13                               | 20.05          | 54.19                    | 68.20                    | -14.01         |
| 5700.000       | Peak                           | 87.88                               | 20.16          | 108.04                   | -                        | -              |
| 5700.000       | Average                        | 76.76                               | 20.16          | 96.92                    | -                        | -              |
| 5725.000       | Peak                           | 37.12                               | 20.32          | 57.44                    | 68.20                    | -10.76         |




Report No.: TMWK2201000111KR

Page: 494 / 939

Rev.: 00

|           |                                    |               |                 |
|-----------|------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz 26/8 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                          | Test Date     | May 4, 2022     |
| Polarize  | Vertical                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                     |               |                 |

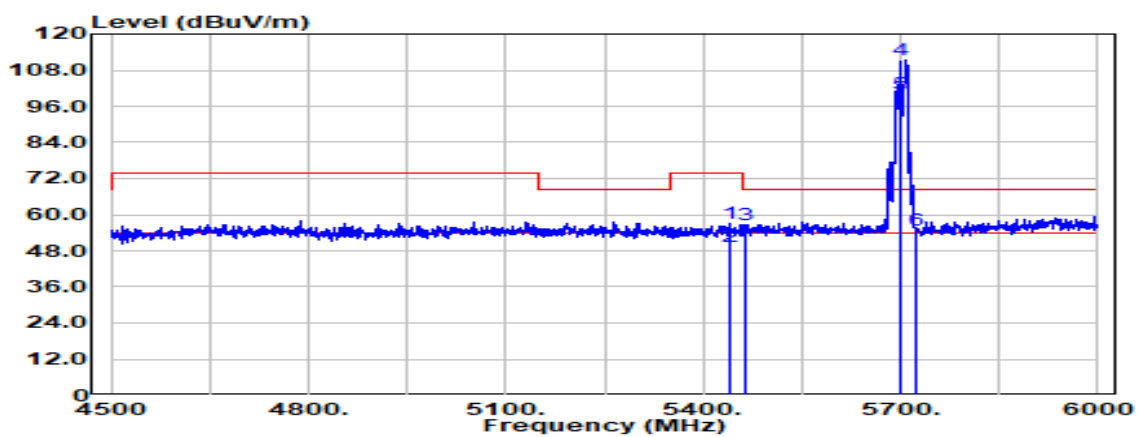

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5439.750       | Peak                           | 36.90                               | 20.07          | 56.97                    | 74.00                    | -17.03         |
| 5439.750       | Average                        | 29.14                               | 20.07          | 49.21                    | 54.00                    | -4.79          |
| 5466.000       | Peak                           | 36.74                               | 20.05          | 56.79                    | 68.20                    | -11.41         |
| 5700.000       | Peak                           | 91.38                               | 20.16          | 111.54                   | -                        | -              |
| 5700.000       | Average                        | 79.72                               | 20.16          | 99.88                    | -                        | -              |
| 5725.000       | Peak                           | 34.43                               | 20.32          | 54.75                    | 68.20                    | -13.45         |






Report No.: TMWK2201000111KR

Page: 495 / 939

Rev.: 00

|           |                                    |               |                 |
|-----------|------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz_26/8 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                          | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                         | Test Engineer | Ray Li          |
| Detector  | Peak & Average                     |               |                 |

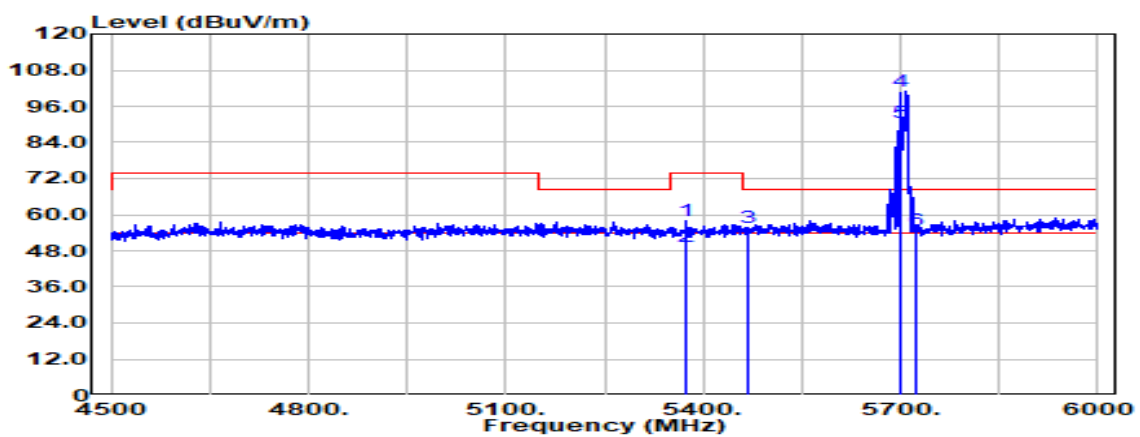

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5375.250       | Peak                           | 38.08                               | 19.94          | 58.02                    | 74.00                    | -15.98         |
| 5375.250       | Average                        | 29.23                               | 19.94          | 49.17                    | 54.00                    | -4.83          |
| 5469.000       | Peak                           | 35.66                               | 20.05          | 55.72                    | 68.20                    | -12.48         |
| 5700.000       | Peak                           | 80.92                               | 20.16          | 101.08                   | -                        | -              |
| 5700.000       | Average                        | 70.59                               | 20.16          | 90.75                    | -                        | -              |
| 5725.000       | Peak                           | 34.53                               | 20.32          | 54.85                    | 68.20                    | -13.35         |




Report No.: TMWK2201000111KR

Page: 496 / 939

Rev.: 00

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz_52/40 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                           | Test Date     | May 4, 2022     |
| Polarize  | Vertical                            | Test Engineer | Ray Li          |
| Detector  | Peak & Average                      |               |                 |

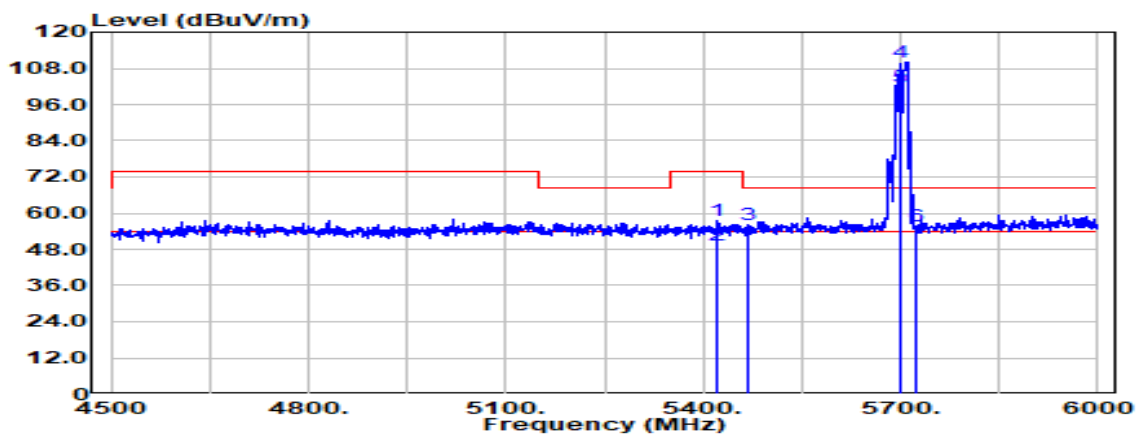

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5422.500       | Peak                           | 37.50                               | 20.06          | 57.56                    | 74.00                    | -16.44         |
| 5422.500       | Average                        | 29.09                               | 20.06          | 49.15                    | 54.00                    | -4.85          |
| 5469.750       | Peak                           | 36.07                               | 20.05          | 56.12                    | 68.20                    | -12.08         |
| 5700.000       | Peak                           | 89.97                               | 20.16          | 110.13                   | -                        | -              |
| 5700.000       | Average                        | 81.78                               | 20.16          | 101.94                   | -                        | -              |
| 5725.000       | Peak                           | 35.31                               | 20.32          | 55.63                    | 68.20                    | -12.57         |




Report No.: TMWK2201000111KR

Page: 497 / 939


Rev.: 00

|           |                                     |               |                 |
|-----------|-------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz_52/40 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                           | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                          | Test Engineer | Ray Li          |
| Detector  | Peak & Average                      |               |                 |

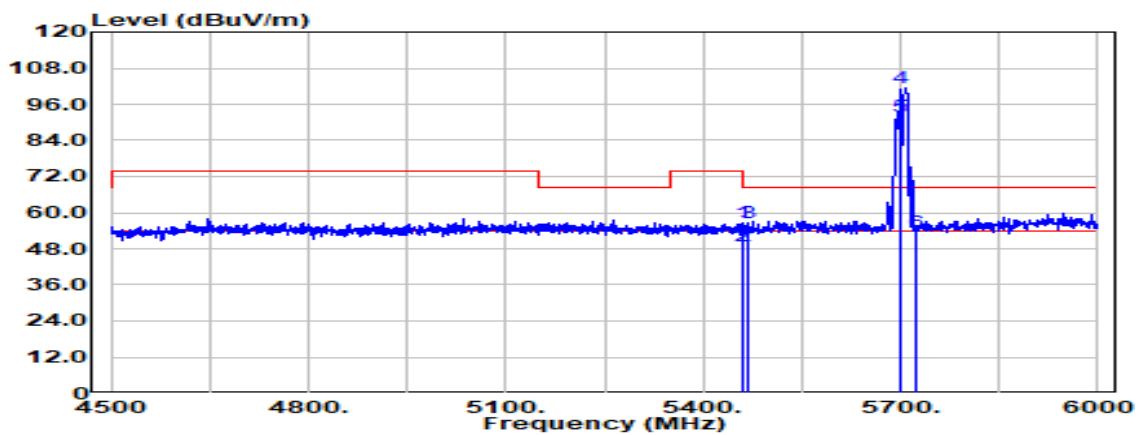

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5458.500       | Peak                           | 36.40                               | 20.06          | 56.46                    | 74.00                    | -17.54         |
| 5458.500       | Average                        | 28.98                               | 20.06          | 49.04                    | 54.00                    | -4.96          |
| 5468.250       | Peak                           | 36.46                               | 20.05          | 56.51                    | 68.20                    | -11.69         |
| 5700.000       | Peak                           | 81.16                               | 20.16          | 101.32                   | -                        | -              |
| 5700.000       | Average                        | 71.99                               | 20.16          | 92.15                    | -                        | -              |
| 5725.000       | Peak                           | 33.28                               | 20.32          | 53.60                    | 68.20                    | -14.60         |

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz 106/54 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Vertical                             | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

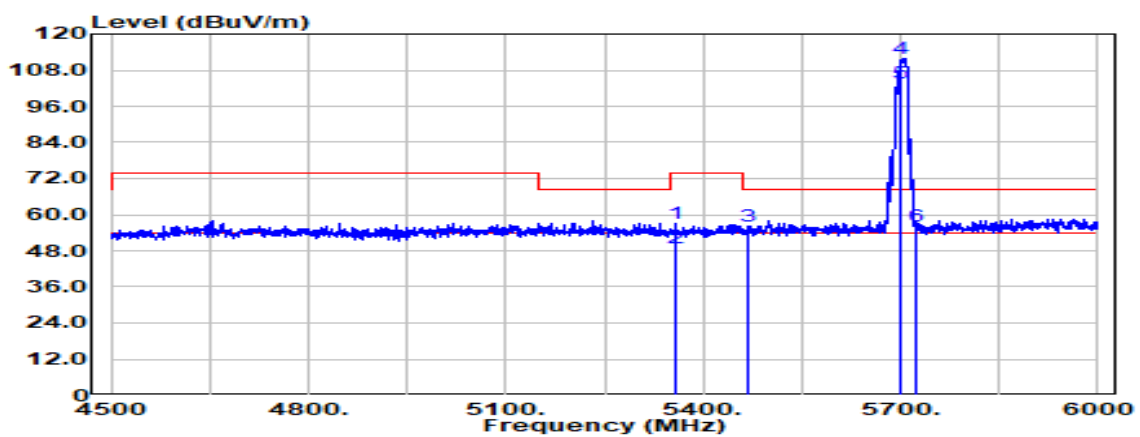


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5358.000       | Peak                           | 37.10                               | 19.86          | 56.96                    | 74.00                    | -17.04         |
| 5358.000       | Average                        | 29.22                               | 19.86          | 49.08                    | 54.00                    | -4.92          |
| 5469.750       | Peak                           | 36.09                               | 20.05          | 56.14                    | 68.20                    | -12.06         |
| 5700.000       | Peak                           | 91.79                               | 20.16          | 111.95                   | -                        | -              |
| 5700.000       | Average                        | 83.32                               | 20.16          | 103.48                   | -                        | -              |
| 5725.000       | Peak                           | 36.00                               | 20.32          | 56.32                    | 68.20                    | -11.88         |




Report No.: TMWK2201000111KR

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5700 MHz 106/54 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

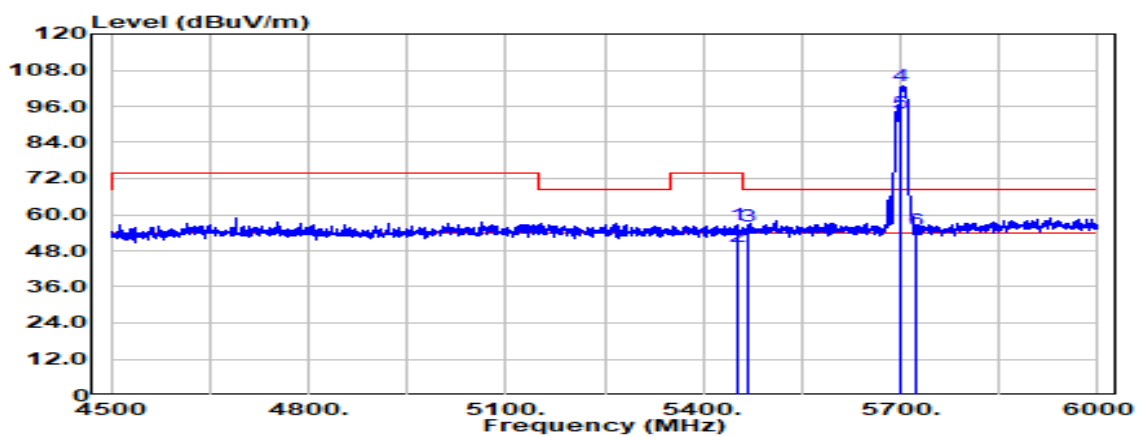

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5451.000       | Peak                           | 36.64                               | 20.07          | 56.70                    | 74.00                    | -17.30         |
| 5451.000       | Average                        | 29.13                               | 20.07          | 49.20                    | 54.00                    | -4.80          |
| 5469.750       | Peak                           | 36.19                               | 20.05          | 56.24                    | 68.20                    | -11.96         |
| 5700.000       | Peak                           | 82.55                               | 20.16          | 102.71                   | -                        | -              |
| 5700.000       | Average                        | 73.67                               | 20.16          | 93.83                    | -                        | -              |
| 5725.000       | Peak                           | 34.70                               | 20.32          | 55.02                    | 68.20                    | -13.18         |

|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5510 MHz | Temp/Hum      | 21.8(°C) / 64%RH |
| Test Item | Band Edge                     | Test Date     | March 29, 2022   |
| Polarize  | Vertical                      | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                |               |                  |

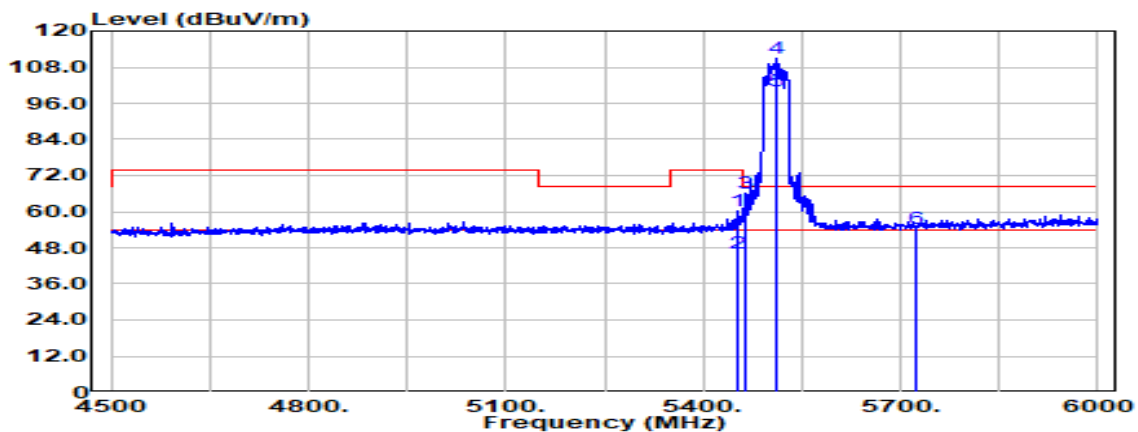

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5453.250       | Peak                           | 40.08                               | 20.07          | 60.14                    | 74.00                    | -13.86         |
| 5453.250       | Average                        | 25.90                               | 20.07          | 45.97                    | 54.00                    | -8.03          |
| 5465.250       | Peak                           | 46.17                               | 20.05          | 66.23                    | 68.20                    | -1.97          |
| 5510.000       | Peak                           | 90.88                               | 20.02          | 110.90                   | -                        | -              |
| 5510.000       | Average                        | 80.12                               | 20.02          | 100.14                   | -                        | -              |
| 5725.000       | Peak                           | 33.96                               | 20.32          | 54.28                    | 68.20                    | -13.92         |




Report No.: TMWK2201000111KR

Page: 501 / 939

Rev.: 00

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5510 MHz | Temp/Hum      | 21.8(°C)/ 64%RH |
| Test Item | Band Edge                     | Test Date     | March 29, 2022  |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

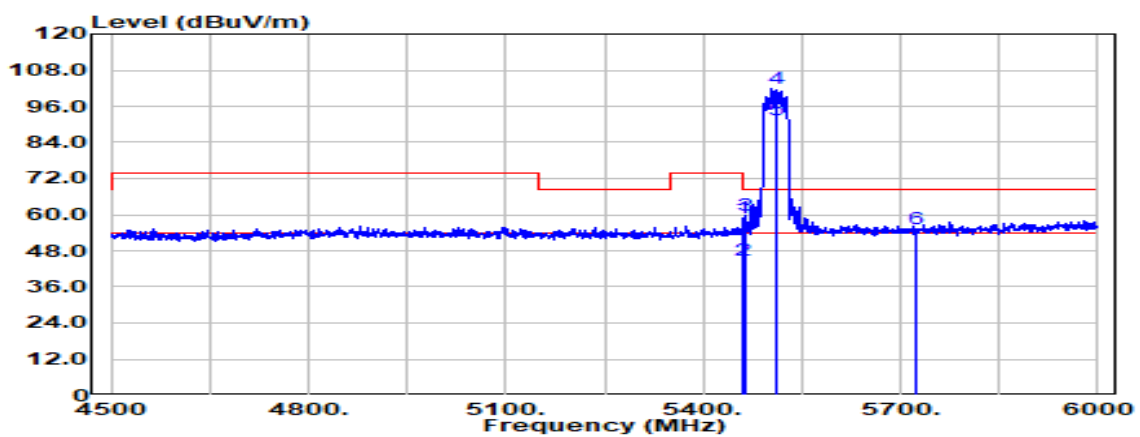


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5460.000       | Peak                           | 38.66                               | 20.06          | 58.72                    | 68.20                    | -9.48          |
| 5460.000       | Average                        | 24.89                               | 20.06          | 44.95                    | 54.00                    | -9.05          |
| 5465.250       | Peak                           | 39.89                               | 20.05          | 59.94                    | 68.20                    | -8.26          |
| 5510.000       | Peak                           | 82.06                               | 20.02          | 102.08                   | -                        | -              |
| 5510.000       | Average                        | 71.37                               | 20.02          | 91.40                    | -                        | -              |
| 5725.000       | Peak                           | 35.07                               | 20.32          | 55.39                    | 68.20                    | -12.81         |



Report No.: TMWK2201000111KR


|           |                                         |               |                 |
|-----------|-----------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 /<br>5510 MHz_242/61 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                               | Test Date     | May 4, 2022     |
| Polarize  | Vertical                                | Test Engineer | Ray Li          |
| Detector  | Peak & Average                          |               |                 |

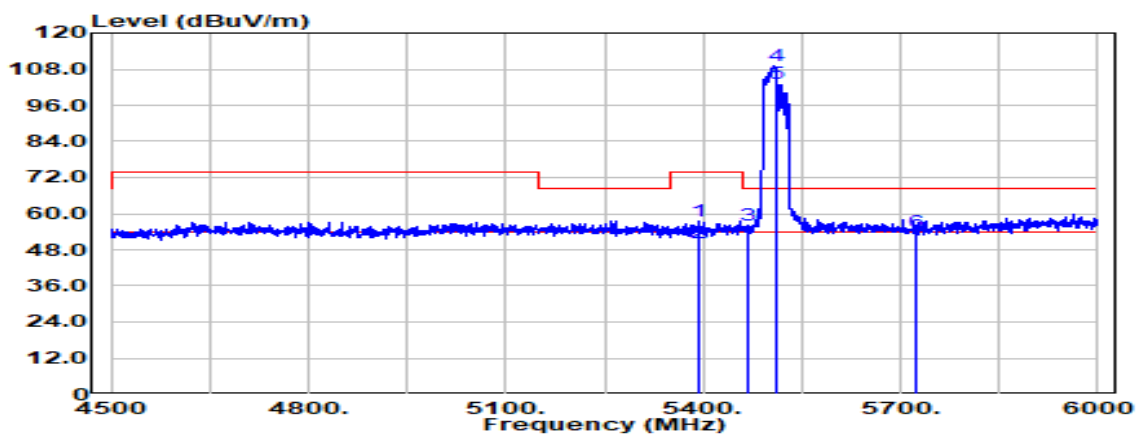

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5394.750       | Peak                           | 37.58                               | 20.03          | 57.62                    | 74.00                    | -16.38         |
| 5394.750       | Average                        | 30.39                               | 20.03          | 50.43                    | 54.00                    | -3.57          |
| 5469.000       | Peak                           | 36.20                               | 20.05          | 56.26                    | 68.20                    | -11.94         |
| 5510.000       | Peak                           | 89.20                               | 20.02          | 109.22                   | -                        | -              |
| 5510.000       | Average                        | 83.43                               | 20.02          | 103.45                   | -                        | -              |
| 5725.000       | Peak                           | 33.39                               | 20.32          | 53.71                    | 68.20                    | -14.49         |




|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5510 MHz 242/61 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

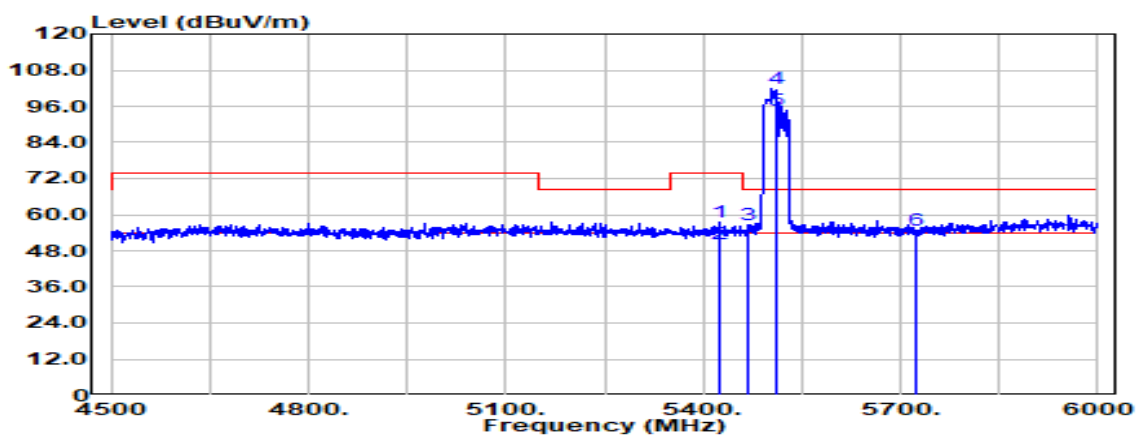

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5423.250       | Peak                           | 37.33                               | 20.06          | 57.39                    | 74.00                    | -16.61         |
| 5423.250       | Average                        | 30.10                               | 20.06          | 50.16                    | 54.00                    | -3.84          |
| 5469.000       | Peak                           | 36.70                               | 20.05          | 56.75                    | 68.20                    | -11.45         |
| 5510.000       | Peak                           | 82.07                               | 20.02          | 102.09                   | -                        | -              |
| 5510.000       | Average                        | 74.77                               | 20.02          | 94.80                    | -                        | -              |
| 5725.000       | Peak                           | 34.52                               | 20.32          | 54.84                    | 68.20                    | -13.36         |


Report No.: TMWK2201000111KR

|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5670 MHz | Temp/Hum      | 21.8(°C) / 64%RH |
| Test Item | Band Edge                     | Test Date     | March 29, 2022   |
| Polarize  | Vertical                      | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                |               |                  |

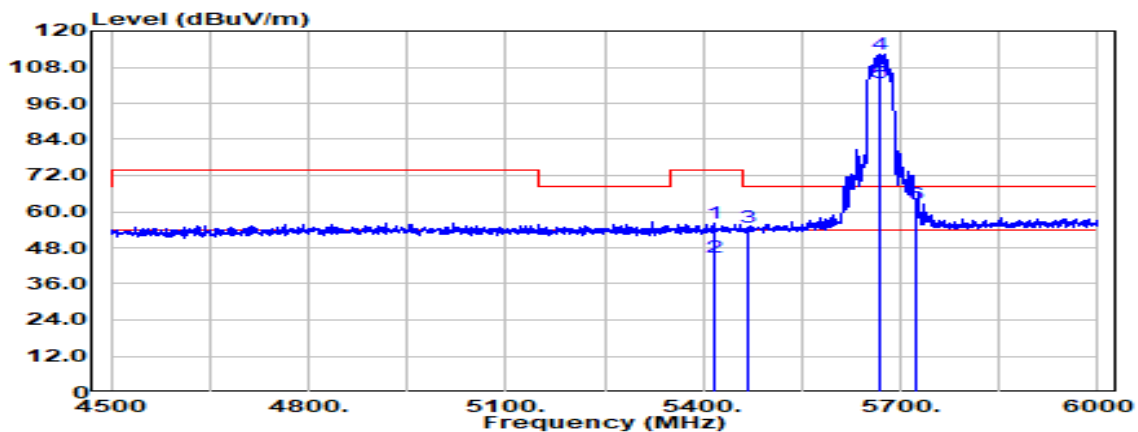


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5416.500       | Peak                           | 36.17                               | 20.06          | 56.23                    | 74.00                    | -17.77         |
| 5416.500       | Average                        | 24.78                               | 20.06          | 44.84                    | 54.00                    | -9.16          |
| 5466.750       | Peak                           | 34.83                               | 20.05          | 54.88                    | 68.20                    | -13.32         |
| 5670.000       | Peak                           | 92.26                               | 20.15          | 112.41                   | -                        | -              |
| 5670.000       | Average                        | 82.74                               | 20.15          | 102.90                   | -                        | -              |
| 5725.000       | Peak                           | 42.09                               | 20.32          | 62.41                    | 68.20                    | -5.79          |

|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE40 / 5670 MHz | Temp/Hum      | 21.8(°C) / 64%RH |
| Test Item | Band Edge                     | Test Date     | March 29, 2022   |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                |               |                  |

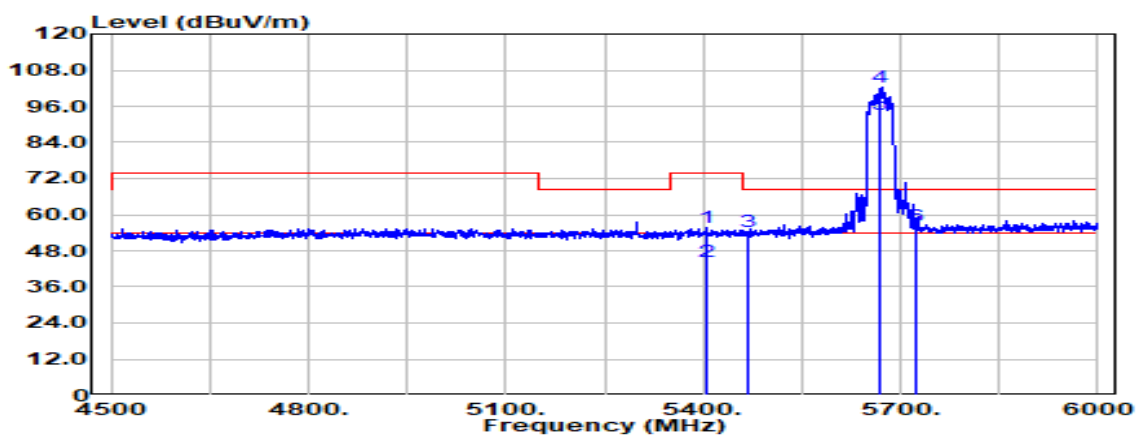

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5406.000       | Peak                           | 35.72                               | 20.06          | 55.78                    | 74.00                    | -18.22         |
| 5406.000       | Average                        | 24.41                               | 20.06          | 44.47                    | 54.00                    | -9.53          |
| 5468.250       | Peak                           | 34.28                               | 20.05          | 54.33                    | 68.20                    | -13.87         |
| 5670.000       | Peak                           | 82.05                               | 20.15          | 102.20                   | -                        | -              |
| 5670.000       | Average                        | 73.18                               | 20.15          | 93.33                    | -                        | -              |
| 5725.000       | Peak                           | 35.97                               | 20.32          | 56.29                    | 68.20                    | -11.91         |

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5670 MHz_242/62 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Vertical                             | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

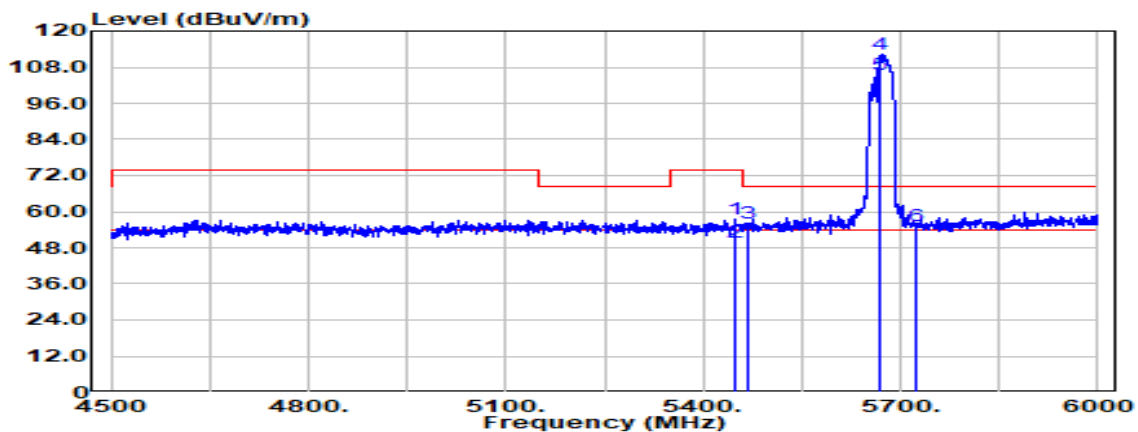

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5448.750       | Peak                           | 37.51                               | 20.07          | 57.58                    | 74.00                    | -16.42         |
| 5448.750       | Average                        | 29.96                               | 20.07          | 50.03                    | 54.00                    | -3.97          |
| 5466.750       | Peak                           | 36.11                               | 20.05          | 56.17                    | 68.20                    | -12.03         |
| 5670.000       | Peak                           | 92.26                               | 20.15          | 112.41                   | -                        | -              |
| 5670.000       | Average                        | 85.17                               | 20.15          | 105.33                   | -                        | -              |
| 5725.000       | Peak                           | 35.12                               | 20.32          | 55.44                    | 68.20                    | -12.76         |




Report No.: TMWK2201000111KR

Page: 507 / 939


Rev.: 00

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE40 / 5670 MHz 242/62 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

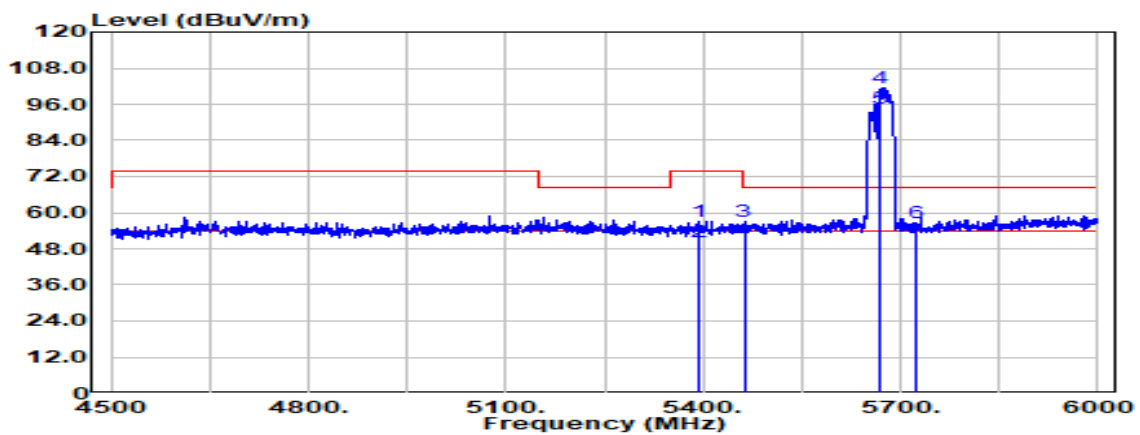


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5391.750       | Peak                           | 36.88                               | 20.02          | 56.90                    | 74.00                    | -17.10         |
| 5391.750       | Average                        | 30.22                               | 20.02          | 50.24                    | 54.00                    | -3.76          |
| 5462.250       | Peak                           | 37.18                               | 20.06          | 57.23                    | 68.20                    | -10.97         |
| 5670.000       | Peak                           | 81.42                               | 20.15          | 101.57                   | -                        | -              |
| 5670.000       | Average                        | 74.51                               | 20.15          | 94.66                    | -                        | -              |
| 5725.000       | Peak                           | 36.25                               | 20.32          | 56.57                    | 68.20                    | -11.63         |

|           |                               |               |                  |
|-----------|-------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE80 / 5530 MHz | Temp/Hum      | 20.9(°C) / 60%RH |
| Test Item | Band Edge                     | Test Date     | March 30, 2022   |
| Polarize  | Vertical                      | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                |               |                  |

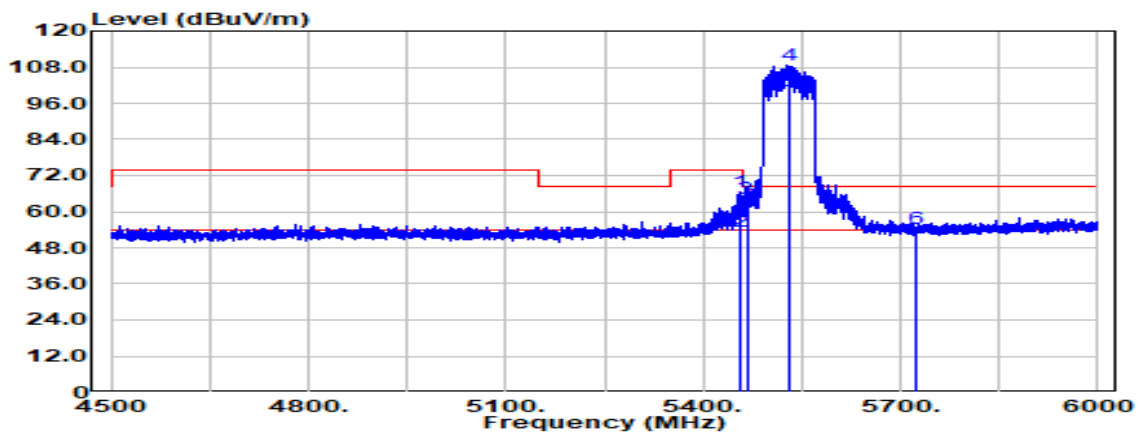


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5455.688       | Peak                           | 46.35                               | 20.06          | 66.42                    | 74.00                    | -7.58          |
| 5455.688       | Average                        | 33.41                               | 20.06          | 53.47                    | 54.00                    | -0.53          |
| 5466.188       | Peak                           | 44.11                               | 20.05          | 64.16                    | 68.20                    | -4.04          |
| 5530.000       | Peak                           | 88.52                               | 20.03          | 108.55                   | -                        | -              |
| 5530.000       | Average                        | 79.87                               | 20.03          | 99.90                    | -                        | -              |
| 5725.000       | Peak                           | 34.19                               | 20.32          | 54.51                    | 68.20                    | -13.69         |

|           |                               |               |                 |
|-----------|-------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5530 MHz | Temp/Hum      | 20.9(°C)/ 60%RH |
| Test Item | Band Edge                     | Test Date     | March 30, 2022  |
| Polarize  | Horizontal                    | Test Engineer | Tony Chao       |
| Detector  | Peak & Average                |               |                 |

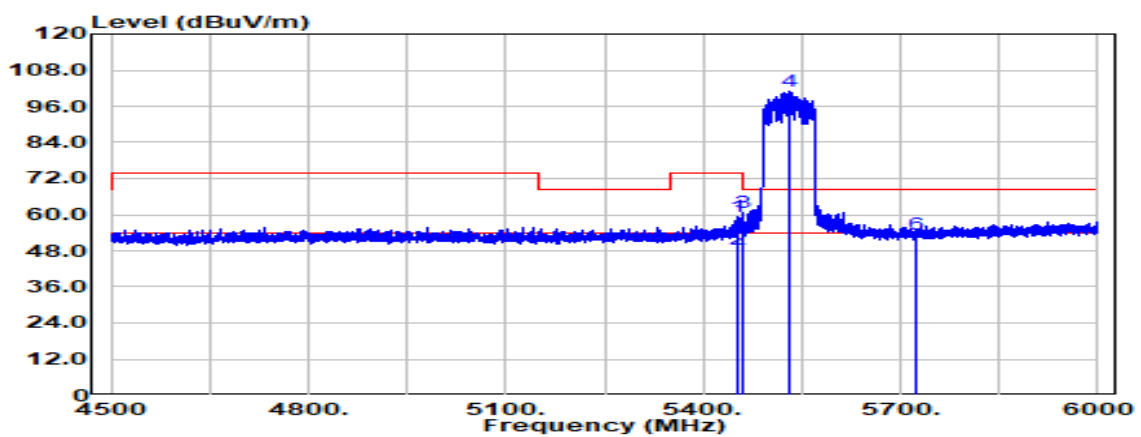

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5453.625       | Peak                           | 39.24                               | 20.07          | 59.31                    | 74.00                    | -14.69         |
| 5453.625       | Average                        | 28.55                               | 20.07          | 48.61                    | 54.00                    | -5.39          |
| 5460.938       | Peak                           | 40.47                               | 20.06          | 60.53                    | 68.20                    | -7.67          |
| 5530.000       | Peak                           | 80.80                               | 20.03          | 100.83                   | -                        | -              |
| 5530.000       | Average                        | 72.82                               | 20.03          | 92.85                    | -                        | -              |
| 5725.000       | Peak                           | 33.12                               | 20.32          | 53.44                    | 68.20                    | -14.76         |

|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5530 MHz_484/65 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Vertical                             | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

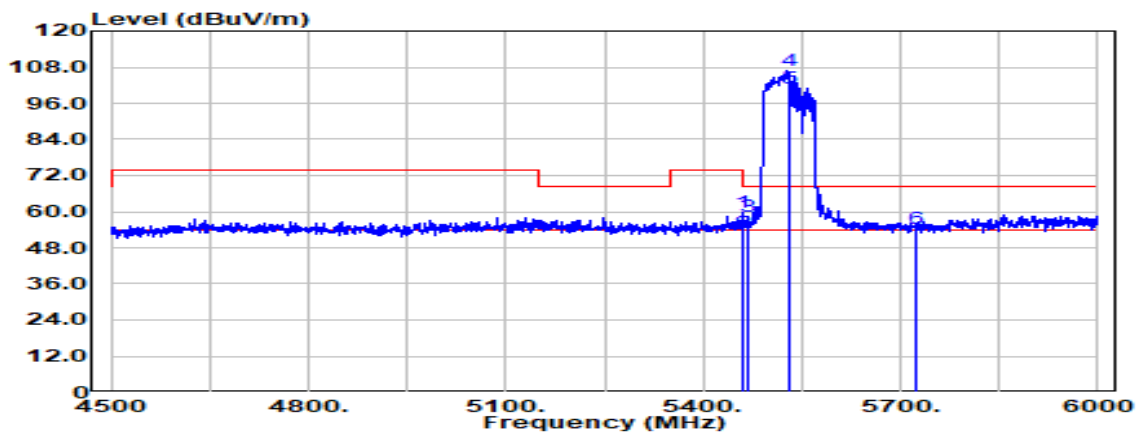

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5459.250       | Peak                           | 39.74                               | 20.06          | 59.80                    | 74.00                    | -14.20         |
| 5459.250       | Average                        | 32.78                               | 20.06          | 52.84                    | 54.00                    | -1.16          |
| 5469.000       | Peak                           | 38.44                               | 20.05          | 58.49                    | 68.20                    | -9.71          |
| 5530.000       | Peak                           | 87.00                               | 20.03          | 107.02                   | -                        | -              |
| 5530.000       | Average                        | 80.92                               | 20.03          | 100.95                   | -                        | -              |
| 5725.000       | Peak                           | 33.93                               | 20.32          | 54.25                    | 68.20                    | -13.95         |






Report No.: TMWK2201000111KR

Page: 511 / 939

Rev.: 00


|           |                                      |               |                 |
|-----------|--------------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE80 / 5530 MHz 484/65 | Temp/Hum      | 23.6(°C)/ 62%RH |
| Test Item | Band Edge                            | Test Date     | May 4, 2022     |
| Polarize  | Horizontal                           | Test Engineer | Ray Li          |
| Detector  | Peak & Average                       |               |                 |

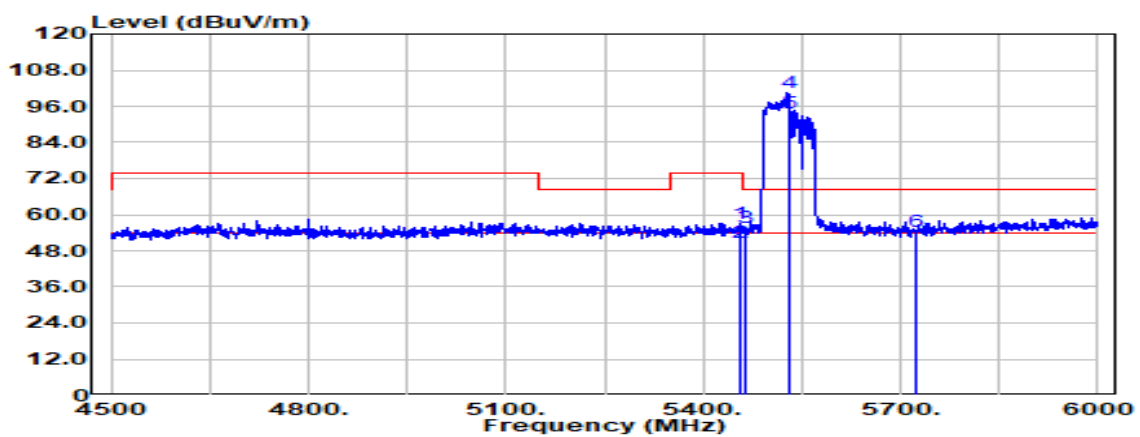

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5454.750       | Peak                           | 36.96                               | 20.07          | 57.03                    | 74.00                    | -16.97         |
| 5454.750       | Average                        | 30.59                               | 20.07          | 50.66                    | 54.00                    | -3.34          |
| 5465.250       | Peak                           | 35.70                               | 20.05          | 55.76                    | 68.20                    | -12.44         |
| 5530.000       | Peak                           | 80.51                               | 20.03          | 100.54                   | -                        | -              |
| 5530.000       | Average                        | 73.58                               | 20.03          | 93.60                    | -                        | -              |
| 5725.000       | Peak                           | 34.06                               | 20.32          | 54.38                    | 68.20                    | -13.82         |


### Test Data for UNII-3

|           |                         |               |                  |
|-----------|-------------------------|---------------|------------------|
| Test Mode | IEEE 802.11a / 5745 MHz | Temp/Hum      | 22.5(°C) / 63%RH |
| Test Item | Band Edge               | Test Date     | March 27, 2022   |
| Polarize  | Vertical                | Test Engineer | Czerny Lin       |
| Detector  | Peak & Average          |               |                  |

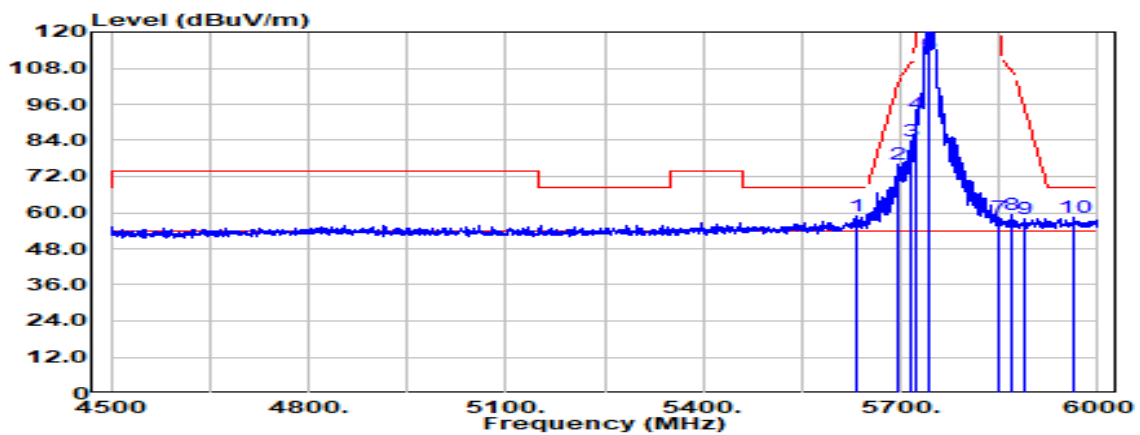


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5631.750       | Peak                           | 38.56                               | 20.12          | 58.68                    | 68.20                    | -9.52          |
| 5696.250       | Peak                           | 55.81                               | 20.16          | 75.97                    | 102.44                   | -26.47         |
| 5716.500       | Peak                           | 63.34                               | 20.27          | 83.60                    | 109.82                   | -26.22         |
| 5724.750       | Peak                           | 72.68                               | 20.32          | 92.99                    | 121.63                   | -28.64         |
| 5745.000       | Peak                           | 101.03                              | 20.45          | 121.48                   | -                        | -              |
| 5745.000       | Average                        | 92.24                               | 20.45          | 112.69                   | -                        | -              |
| 5850.750       | Peak                           | 37.54                               | 20.73          | 58.28                    | 120.49                   | -62.21         |
| 5870.250       | Peak                           | 38.39                               | 20.82          | 59.20                    | 106.53                   | -47.32         |
| 5887.500       | Peak                           | 37.10                               | 20.90          | 58.00                    | 95.92                    | -37.92         |
| 5962.500       | Peak                           | 37.18                               | 21.16          | 58.34                    | 68.20                    | -9.86          |

|           |                         |               |                  |
|-----------|-------------------------|---------------|------------------|
| Test Mode | IEEE 802.11a / 5745 MHz | Temp/Hum      | 22.5(°C) / 63%RH |
| Test Item | Band Edge               | Test Date     | March 27, 2022   |
| Polarize  | Horizontal              | Test Engineer | Czerny Lin       |
| Detector  | Peak & Average          |               |                  |

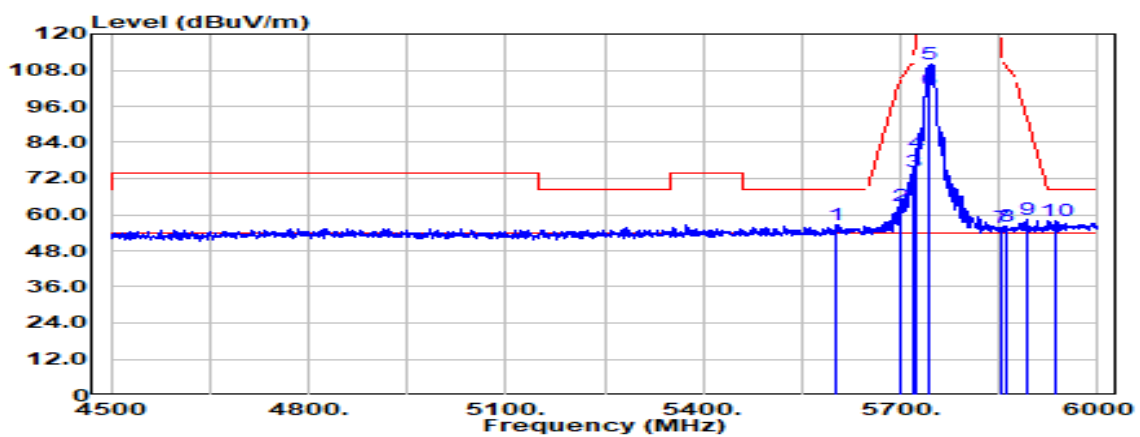


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5603.250       | Peak                           | 36.73                               | 20.08          | 56.81                    | 68.20                    | -11.39         |
| 5699.250       | Peak                           | 42.99                               | 20.16          | 63.15                    | 104.65                   | -41.49         |
| 5719.500       | Peak                           | 54.18                               | 20.28          | 74.46                    | 110.66                   | -36.20         |
| 5724.000       | Peak                           | 60.29                               | 20.31          | 80.60                    | 119.92                   | -39.32         |
| 5745.000       | Peak                           | 89.44                               | 20.45          | 109.89                   | -                        | -              |
| 5745.000       | Average                        | 80.95                               | 20.45          | 101.40                   | -                        | -              |
| 5854.500       | Peak                           | 34.97                               | 20.75          | 55.72                    | 111.94                   | -56.22         |
| 5862.750       | Peak                           | 35.51                               | 20.79          | 56.30                    | 108.63                   | -52.33         |
| 5892.750       | Peak                           | 37.34                               | 20.92          | 58.26                    | 92.03                    | -33.77         |
| 5934.750       | Peak                           | 36.72                               | 21.10          | 57.82                    | 68.20                    | -10.38         |

|           |                         |               |                  |
|-----------|-------------------------|---------------|------------------|
| Test Mode | IEEE 802.11a / 5825 MHz | Temp/Hum      | 22.5(°C) / 63%RH |
| Test Item | Band Edge               | Test Date     | March 27, 2022   |
| Polarize  | Vertical                | Test Engineer | Czerny Lin       |
| Detector  | Peak & Average          |               |                  |

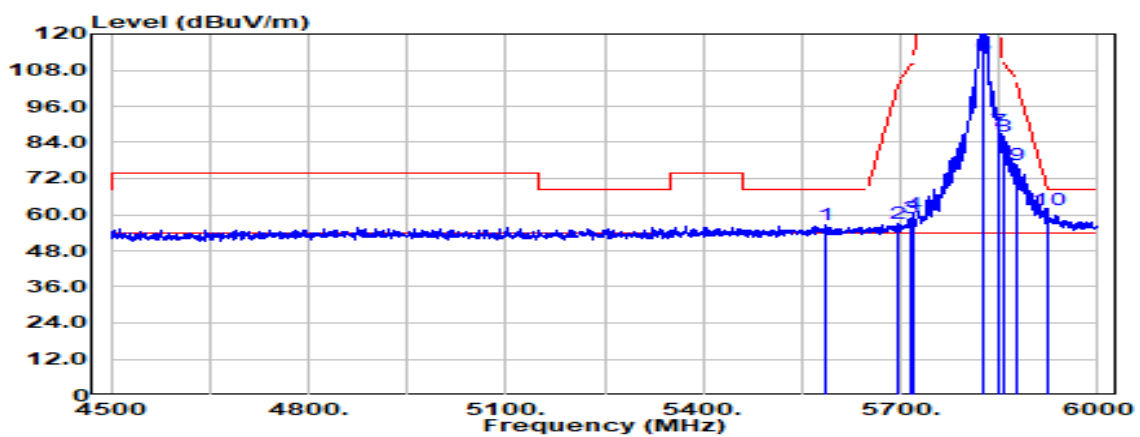


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5587.500       | Peak                           | 36.41                               | 20.06          | 56.47                    | 68.20                    | -11.73         |
| 5697.750       | Peak                           | 36.68                               | 20.16          | 56.84                    | 103.54                   | -46.70         |
| 5715.750       | Peak                           | 38.44                               | 20.26          | 58.70                    | 109.61                   | -50.91         |
| 5720.250       | Peak                           | 39.82                               | 20.29          | 60.11                    | 111.37                   | -51.26         |
| 5825.000       | Peak                           | 100.87                              | 20.64          | 121.50                   | -                        | -              |
| 5825.000       | Average                        | 92.16                               | 20.64          | 112.80                   | -                        | -              |
| 5850.750       | Peak                           | 67.10                               | 20.73          | 87.83                    | 120.49                   | -32.66         |
| 5856.000       | Peak                           | 65.44                               | 20.76          | 86.20                    | 110.52                   | -24.32         |
| 5875.500       | Peak                           | 55.91                               | 20.84          | 76.75                    | 104.83                   | -28.08         |
| 5925.000       | Peak                           | 40.41                               | 21.06          | 61.46                    | 68.20                    | -6.74          |

|           |                         |               |                  |
|-----------|-------------------------|---------------|------------------|
| Test Mode | IEEE 802.11a / 5825 MHz | Temp/Hum      | 22.5(°C) / 63%RH |
| Test Item | Band Edge               | Test Date     | March 27, 2022   |
| Polarize  | Horizontal              | Test Engineer | Czerny Lin       |
| Detector  | Peak & Average          |               |                  |

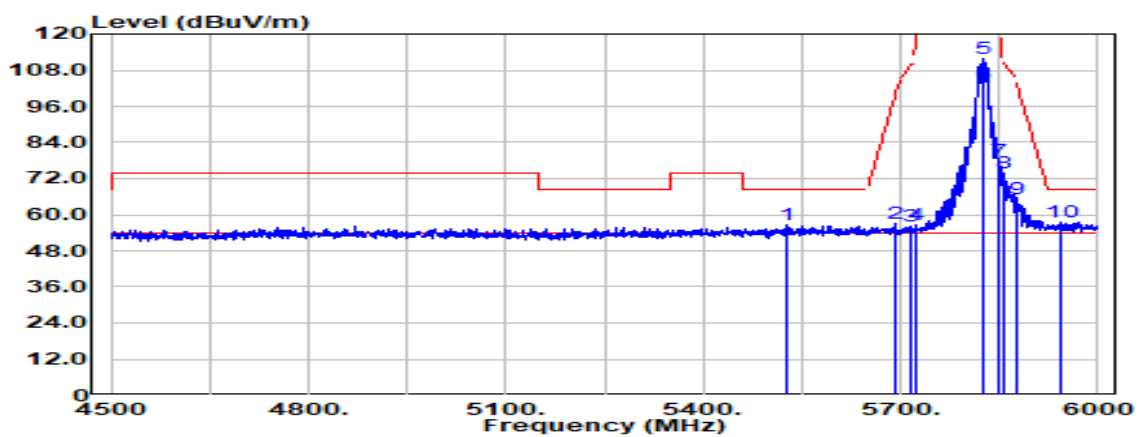

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5528.250       | Peak                           | 36.57                               | 20.03          | 56.59                    | 68.20                    | -11.61         |
| 5693.250       | Peak                           | 36.69                               | 20.16          | 56.85                    | 100.22                   | -43.38         |
| 5715.750       | Peak                           | 35.97                               | 20.26          | 56.23                    | 109.61                   | -53.38         |
| 5722.500       | Peak                           | 36.22                               | 20.30          | 56.53                    | 116.50                   | -59.97         |
| 5825.000       | Peak                           | 91.26                               | 20.64          | 111.90                   | -                        | -              |
| 5825.000       | Average                        | 82.52                               | 20.64          | 103.15                   | -                        | -              |
| 5850.000       | Peak                           | 57.10                               | 20.73          | 77.83                    | 122.20                   | -44.37         |
| 5856.000       | Peak                           | 53.03                               | 20.76          | 73.78                    | 110.52                   | -36.74         |
| 5875.500       | Peak                           | 44.20                               | 20.84          | 65.04                    | 104.83                   | -39.78         |
| 5942.250       | Peak                           | 36.18                               | 21.13          | 57.30                    | 68.20                    | -10.90         |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5745 MHz | Temp/Hum      | 22.5(°C) / 63%RH |
| Test Item | Band Edge                      | Test Date     | March 27, 2022   |
| Polarize  | Vertical                       | Test Engineer | Czerny Lin       |
| Detector  | Peak & Average                 |               |                  |

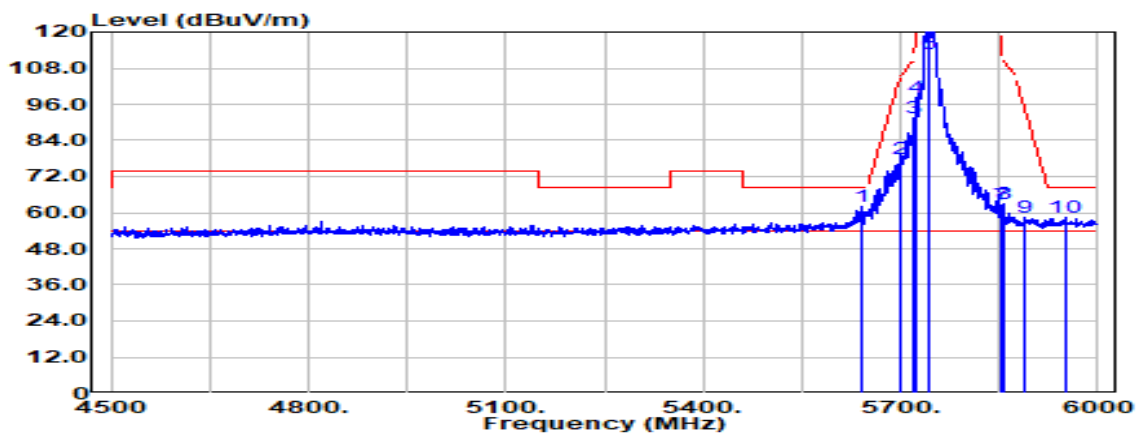

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5639.250       | Peak                           | 41.80                               | 20.13          | 61.93                    | 68.20                    | -6.27          |
| 5699.250       | Peak                           | 57.93                               | 20.16          | 78.09                    | 104.65                   | -26.56         |
| 5719.500       | Peak                           | 71.06                               | 20.28          | 91.34                    | 110.66                   | -19.32         |
| 5724.750       | Peak                           | 78.06                               | 20.32          | 98.37                    | 121.63                   | -23.26         |
| 5745.000       | Peak                           | 101.53                              | 20.45          | 121.97                   | -                        | -              |
| 5745.000       | Average                        | 92.09                               | 20.45          | 112.54                   | -                        | -              |
| 5853.750       | Peak                           | 41.52                               | 20.75          | 62.26                    | 113.65                   | -51.38         |
| 5856.750       | Peak                           | 42.08                               | 20.76          | 62.84                    | 110.31                   | -47.47         |
| 5889.000       | Peak                           | 37.43                               | 20.90          | 58.33                    | 94.81                    | -36.48         |
| 5949.750       | Peak                           | 37.21                               | 21.16          | 58.37                    | 68.20                    | -9.83          |




Report No.: TMWK2201000111KR

Page: 517 / 939

Rev.: 00

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5745 MHz | Temp/Hum      | 22.5(°C) / 63%RH |
| Test Item | Band Edge                      | Test Date     | March 27, 2022   |
| Polarize  | Horizontal                     | Test Engineer | Czerny Lin       |
| Detector  | Peak & Average                 |               |                  |

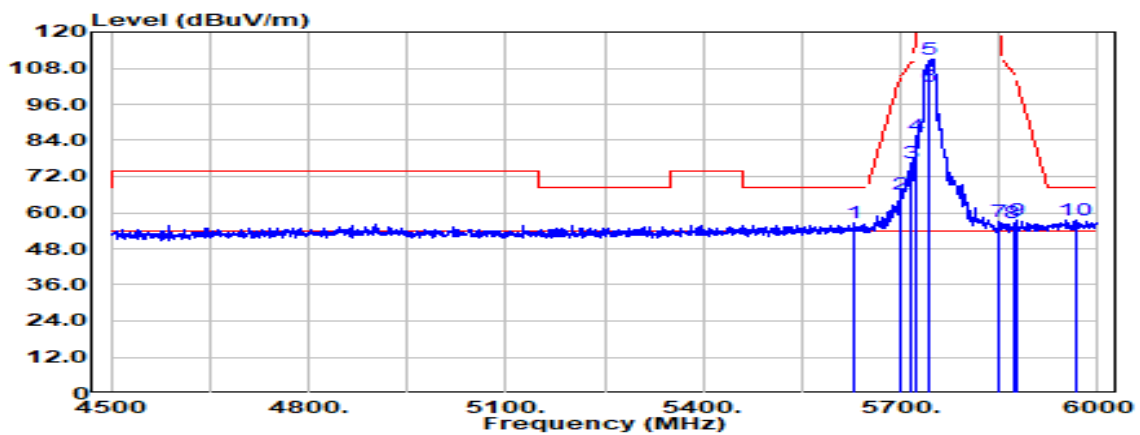

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5628.750       | Peak                           | 36.43                               | 20.12          | 56.55                    | 68.20                    | -11.65         |
| 5699.250       | Peak                           | 46.02                               | 20.16          | 66.18                    | 104.65                   | -38.47         |
| 5716.500       | Peak                           | 56.35                               | 20.27          | 76.61                    | 109.82                   | -33.21         |
| 5724.000       | Peak                           | 65.12                               | 20.31          | 85.43                    | 119.92                   | -34.49         |
| 5745.000       | Peak                           | 90.59                               | 20.45          | 111.03                   | -                        | -              |
| 5745.000       | Average                        | 81.26                               | 20.45          | 101.71                   | -                        | -              |
| 5850.000       | Peak                           | 36.34                               | 20.73          | 57.07                    | 122.20                   | -65.13         |
| 5871.000       | Peak                           | 35.67                               | 20.82          | 56.50                    | 106.32                   | -49.82         |
| 5875.500       | Peak                           | 36.59                               | 20.84          | 57.43                    | 104.83                   | -47.40         |
| 5965.500       | Peak                           | 36.39                               | 21.16          | 57.55                    | 68.20                    | -10.65         |




Report No.: TMWK2201000111KR

Page: 518 / 939

Rev.: 00


|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5825 MHz | Temp/Hum      | 22.5(°C) / 63%RH |
| Test Item | Band Edge                      | Test Date     | March 27, 2022   |
| Polarize  | Vertical                       | Test Engineer | Czerny Lin       |
| Detector  | Peak & Average                 |               |                  |

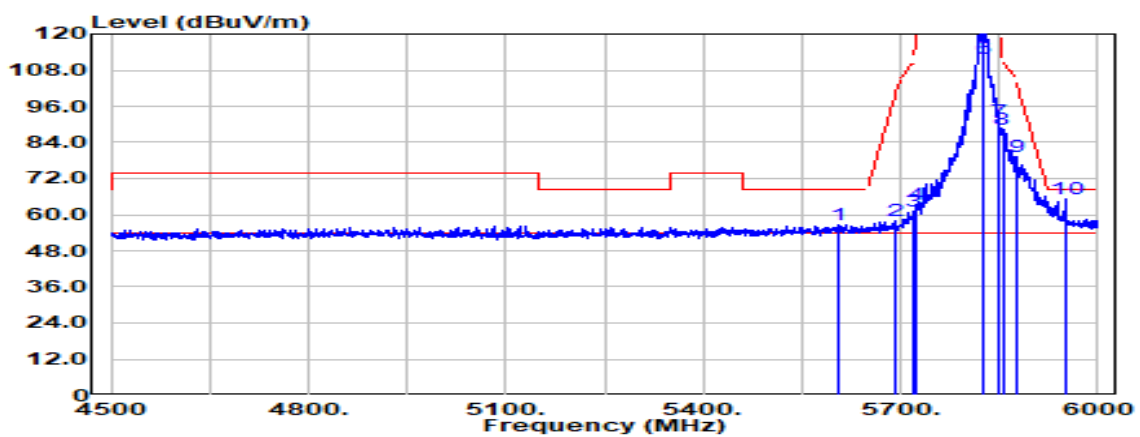

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5607.000       | Peak                           | 36.68                               | 20.08          | 56.76                    | 68.20                    | -11.44         |
| 5691.750       | Peak                           | 37.78                               | 20.16          | 57.94                    | 99.12                    | -41.18         |
| 5719.500       | Peak                           | 41.05                               | 20.28          | 61.33                    | 110.66                   | -49.33         |
| 5724.750       | Peak                           | 43.11                               | 20.32          | 63.43                    | 121.63                   | -58.20         |
| 5825.000       | Peak                           | 99.78                               | 20.64          | 120.41                   | -                        | -              |
| 5825.000       | Average                        | 91.00                               | 20.64          | 111.63                   | -                        | -              |
| 5850.000       | Peak                           | 70.47                               | 20.73          | 91.20                    | 122.20                   | -31.00         |
| 5855.250       | Peak                           | 67.43                               | 20.75          | 88.18                    | 110.73                   | -22.55         |
| 5878.500       | Peak                           | 58.19                               | 20.86          | 79.05                    | 102.60                   | -23.55         |
| 5950.500       | Peak                           | 44.05                               | 21.16          | 65.21                    | 68.20                    | -2.99          |




|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT20 / 5825 MHz | Temp/Hum      | 22.5(°C) / 63%RH |
| Test Item | Band Edge                      | Test Date     | March 27, 2022   |
| Polarize  | Horizontal                     | Test Engineer | Czerny Lin       |
| Detector  | Peak & Average                 |               |                  |

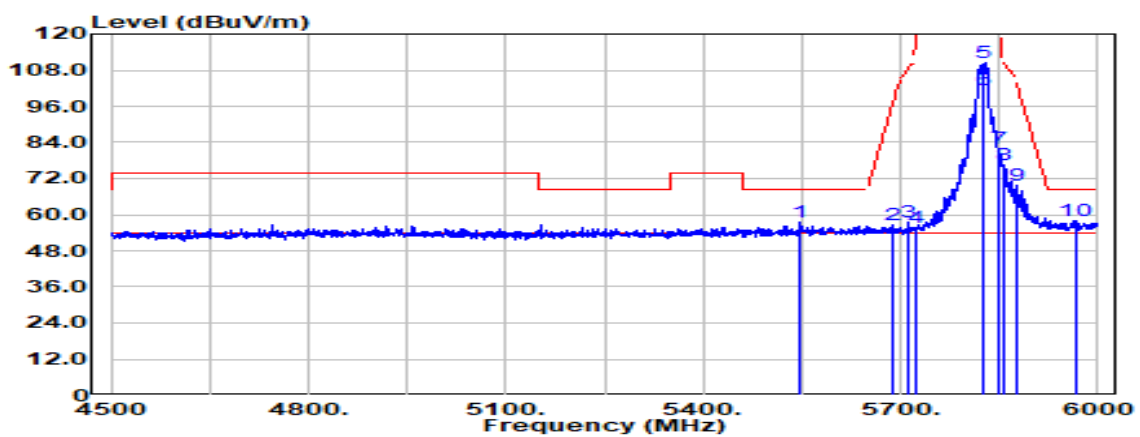


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5546.250       | Peak                           | 37.46                               | 20.03          | 57.49                    | 68.20                    | -10.71         |
| 5687.250       | Peak                           | 36.51                               | 20.16          | 56.67                    | 95.80                    | -39.13         |
| 5712.000       | Peak                           | 37.43                               | 20.24          | 57.66                    | 108.56                   | -50.90         |
| 5723.250       | Peak                           | 35.20                               | 20.31          | 55.51                    | 118.21                   | -62.70         |
| 5825.000       | Peak                           | 89.66                               | 20.64          | 110.30                   | -                        | -              |
| 5825.000       | Average                        | 80.85                               | 20.64          | 101.49                   | -                        | -              |
| 5850.750       | Peak                           | 61.29                               | 20.73          | 82.03                    | 120.49                   | -38.46         |
| 5857.500       | Peak                           | 55.85                               | 20.76          | 76.61                    | 110.10                   | -33.49         |
| 5877.750       | Peak                           | 48.90                               | 20.85          | 69.75                    | 103.16                   | -33.41         |
| 5965.500       | Peak                           | 36.82                               | 21.16          | 57.98                    | 68.20                    | -10.22         |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5755 MHz | Temp/Hum      | 21.4(°C) / 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022   |
| Polarize  | Vertical                       | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

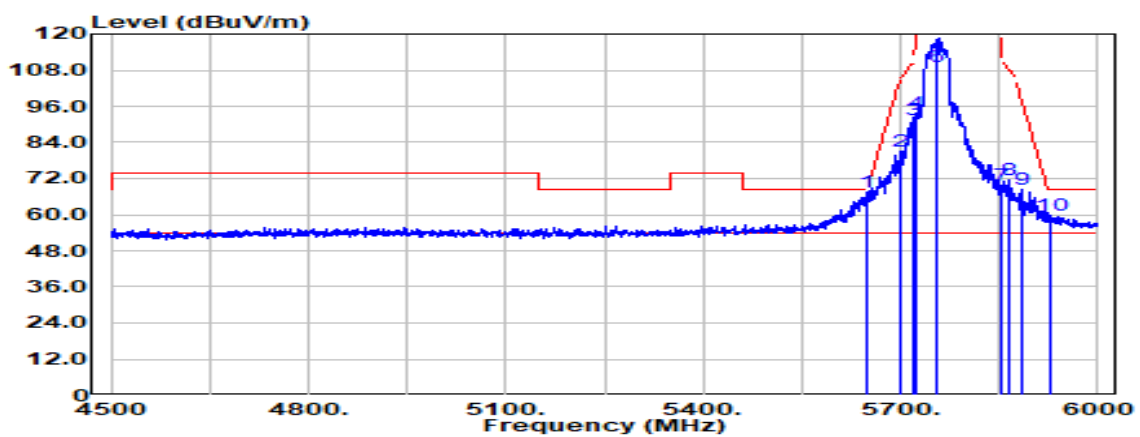


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5648.250       | Peak                           | 47.13                               | 20.15          | 67.28                    | 68.20                    | -0.92          |
| 5699.250       | Peak                           | 60.78                               | 20.16          | 80.94                    | 104.65                   | -23.71         |
| 5718.750       | Peak                           | 71.15                               | 20.28          | 91.43                    | 110.45                   | -19.02         |
| 5724.000       | Peak                           | 73.55                               | 20.31          | 93.86                    | 119.92                   | -26.06         |
| 5755.000       | Peak                           | 98.08                               | 20.49          | 118.57                   | -                        | -              |
| 5755.000       | Average                        | 88.54                               | 20.49          | 109.02                   | -                        | -              |
| 5851.500       | Peak                           | 48.84                               | 20.74          | 69.58                    | 118.78                   | -49.20         |
| 5864.250       | Peak                           | 50.74                               | 20.79          | 71.53                    | 108.21                   | -36.68         |
| 5883.000       | Peak                           | 47.37                               | 20.88          | 68.24                    | 99.26                    | -31.01         |
| 5928.750       | Peak                           | 38.57                               | 21.07          | 59.64                    | 68.20                    | -8.56          |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5755 MHz | Temp/Hum      | 21.4(°C) / 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022   |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

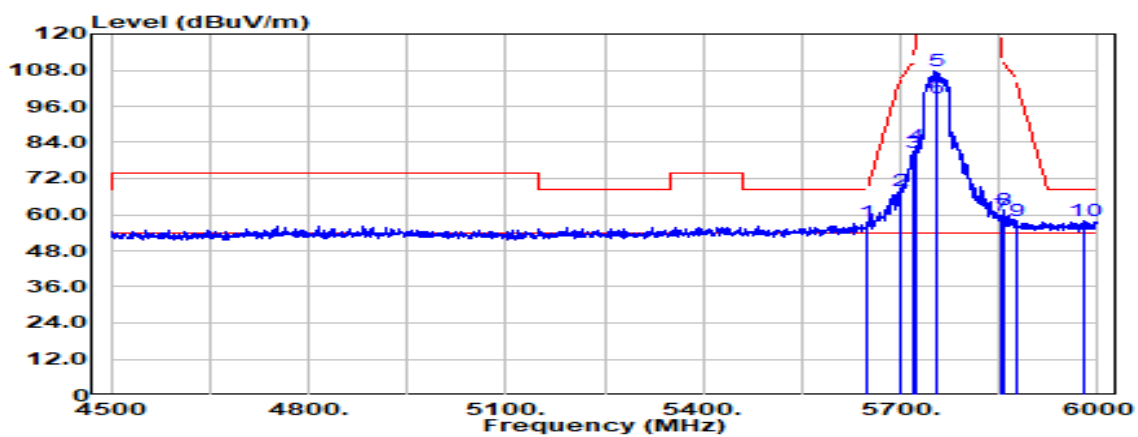


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5648.250       | Peak                           | 37.33                               | 20.15          | 57.48                    | 68.20                    | -10.72         |
| 5698.500       | Peak                           | 47.61                               | 20.16          | 67.77                    | 104.09                   | -36.33         |
| 5718.750       | Peak                           | 60.37                               | 20.28          | 80.65                    | 110.45                   | -29.80         |
| 5723.250       | Peak                           | 62.76                               | 20.31          | 83.07                    | 118.21                   | -35.14         |
| 5755.000       | Peak                           | 87.14                               | 20.49          | 107.62                   | -                        | -              |
| 5755.000       | Average                        | 78.03                               | 20.49          | 98.52                    | -                        | -              |
| 5852.250       | Peak                           | 38.90                               | 20.74          | 59.64                    | 117.07                   | -57.43         |
| 5859.000       | Peak                           | 40.68                               | 20.77          | 61.45                    | 109.68                   | -48.23         |
| 5876.250       | Peak                           | 37.15                               | 20.85          | 58.00                    | 104.27                   | -46.27         |
| 5979.000       | Peak                           | 36.92                               | 21.17          | 58.08                    | 68.20                    | -10.12         |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5795 MHz | Temp/Hum      | 21.4(°C) / 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022   |
| Polarize  | Vertical                       | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

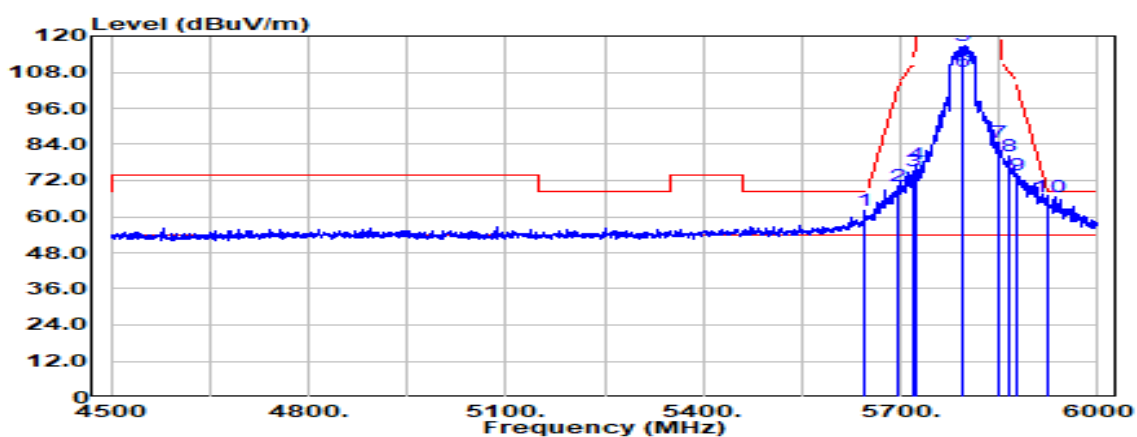


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5645.250       | Peak                           | 41.76                               | 20.14          | 61.91                    | 68.20                    | -6.29          |
| 5694.750       | Peak                           | 50.10                               | 20.16          | 70.26                    | 101.33                   | -31.07         |
| 5719.500       | Peak                           | 55.01                               | 20.28          | 75.30                    | 110.66                   | -35.36         |
| 5722.500       | Peak                           | 56.94                               | 20.30          | 77.24                    | 116.50                   | -39.26         |
| 5795.000       | Peak                           | 96.16                               | 20.53          | 116.70                   | -                        | -              |
| 5795.000       | Average                        | 87.58                               | 20.53          | 108.12                   | -                        | -              |
| 5850.750       | Peak                           | 63.81                               | 20.73          | 84.54                    | 120.49                   | -35.95         |
| 5865.000       | Peak                           | 59.50                               | 20.80          | 80.30                    | 108.00                   | -27.70         |
| 5877.750       | Peak                           | 53.14                               | 20.85          | 73.99                    | 103.16                   | -29.17         |
| 5925.000       | Peak                           | 45.67                               | 21.06          | 66.73                    | 68.20                    | -1.47          |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT40 / 5795 MHz | Temp/Hum      | 21.4(°C) / 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022   |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

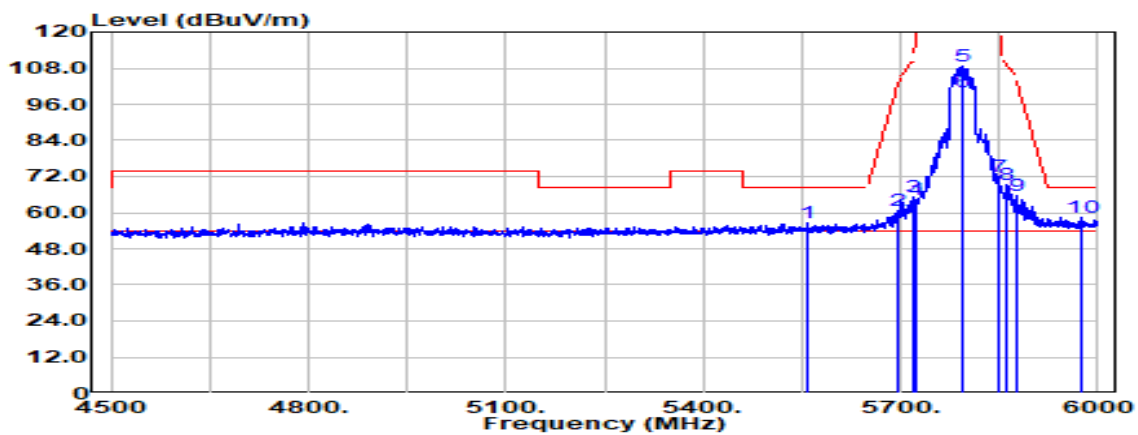


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5558.250       | Peak                           | 36.45                               | 20.04          | 56.49                    | 68.20                    | -11.71         |
| 5695.500       | Peak                           | 40.39                               | 20.16          | 60.55                    | 101.88                   | -41.33         |
| 5718.000       | Peak                           | 44.86                               | 20.28          | 65.13                    | 110.24                   | -45.11         |
| 5724.750       | Peak                           | 43.76                               | 20.32          | 64.08                    | 121.63                   | -57.55         |
| 5795.000       | Peak                           | 88.04                               | 20.53          | 108.57                   | -                        | -              |
| 5795.000       | Average                        | 79.76                               | 20.53          | 100.29                   | -                        | -              |
| 5850.000       | Peak                           | 51.41                               | 20.73          | 72.14                    | 122.20                   | -50.06         |
| 5860.500       | Peak                           | 48.60                               | 20.78          | 69.38                    | 109.26                   | -39.88         |
| 5875.500       | Peak                           | 44.95                               | 20.84          | 65.79                    | 104.83                   | -39.04         |
| 5973.750       | Peak                           | 37.34                               | 21.16          | 58.50                    | 68.20                    | -9.70          |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT80 / 5775 MHz | Temp/Hum      | 21.4(°C) / 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022   |
| Polarize  | Vertical                       | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

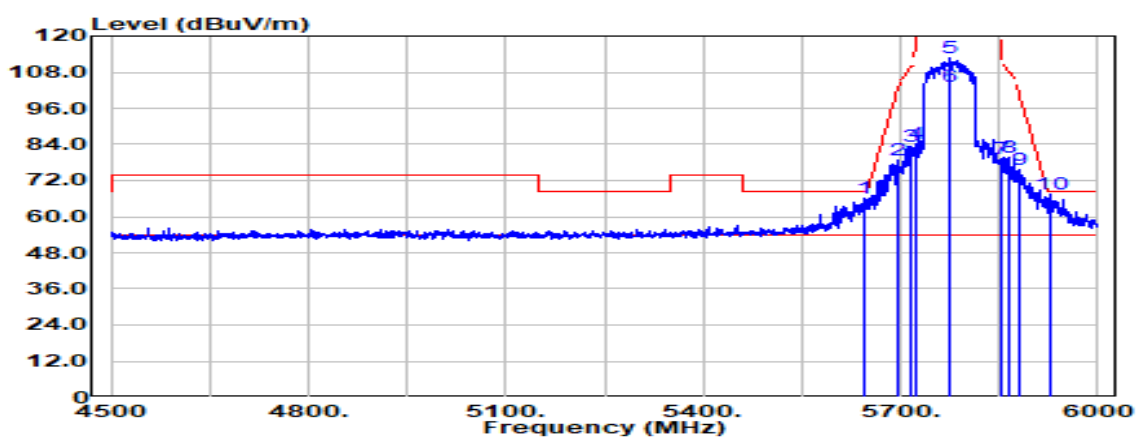

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBUV) | Factor<br>(dB) | Actual<br>FS<br>(dBUV/m) | Limit<br>@3m<br>(dBUV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5643.750       | Peak                           | 45.77                               | 20.14          | 65.91                    | 68.20                    | -2.29          |
| 5696.250       | Peak                           | 58.52                               | 20.16          | 78.68                    | 102.44                   | -23.76         |
| 5714.250       | Peak                           | 63.29                               | 20.25          | 83.54                    | 109.19                   | -25.65         |
| 5723.250       | Peak                           | 63.72                               | 20.31          | 84.03                    | 118.21                   | -34.18         |
| 5775.000       | Peak                           | 92.05                               | 20.51          | 112.56                   | -                        | -              |
| 5775.000       | Average                        | 82.76                               | 20.51          | 103.27                   | -                        | -              |
| 5851.500       | Peak                           | 58.70                               | 20.74          | 79.44                    | 118.78                   | -39.34         |
| 5863.500       | Peak                           | 58.96                               | 20.79          | 79.75                    | 108.42                   | -28.67         |
| 5879.250       | Peak                           | 54.65                               | 20.86          | 75.51                    | 102.04                   | -26.54         |
| 5926.500       | Peak                           | 46.41                               | 21.06          | 67.47                    | 68.20                    | -0.73          |

|           |                                |               |                  |
|-----------|--------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ac VHT80 / 5775 MHz | Temp/Hum      | 21.4(°C) / 60%RH |
| Test Item | Band Edge                      | Test Date     | March 28, 2022   |
| Polarize  | Horizontal                     | Test Engineer | Tony Chao        |
| Detector  | Peak & Average                 |               |                  |

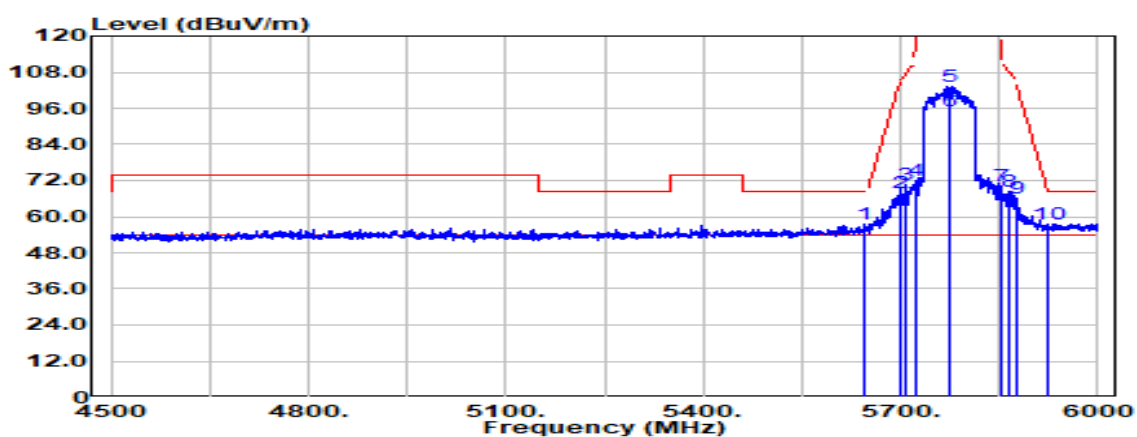


| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5643.750       | Peak                           | 37.40                               | 20.14          | 57.54                    | 68.20                    | -10.66         |
| 5698.500       | Peak                           | 47.64                               | 20.16          | 67.80                    | 104.09                   | -36.29         |
| 5706.000       | Peak                           | 50.37                               | 20.20          | 70.57                    | 106.88                   | -36.32         |
| 5724.000       | Peak                           | 51.64                               | 20.31          | 71.95                    | 119.92                   | -47.97         |
| 5775.000       | Peak                           | 82.95                               | 20.51          | 103.46                   | -                        | -              |
| 5775.000       | Average                        | 74.56                               | 20.51          | 95.07                    | -                        | -              |
| 5851.500       | Peak                           | 49.60                               | 20.74          | 70.33                    | 118.78                   | -48.45         |
| 5863.500       | Peak                           | 47.72                               | 20.79          | 68.51                    | 108.42                   | -39.91         |
| 5876.250       | Peak                           | 45.20                               | 20.85          | 66.04                    | 104.27                   | -38.23         |
| 5925.000       | Peak                           | 36.65                               | 21.06          | 57.71                    | 68.20                    | -10.49         |



Report No.: TMWK2201000111KR


|           |                              |               |                 |
|-----------|------------------------------|---------------|-----------------|
| Test Mode | IEEE 802.11ax HE20 / 5745MHz | Temp/Hum      | 21.8(°C)/ 64%RH |
| Test Item | Band Edge                    | Test Date     | March 29, 2022  |
| Polarize  | Vertical                     | Test Engineer | Tony Chao       |
| Detector  | Peak & Average               |               |                 |

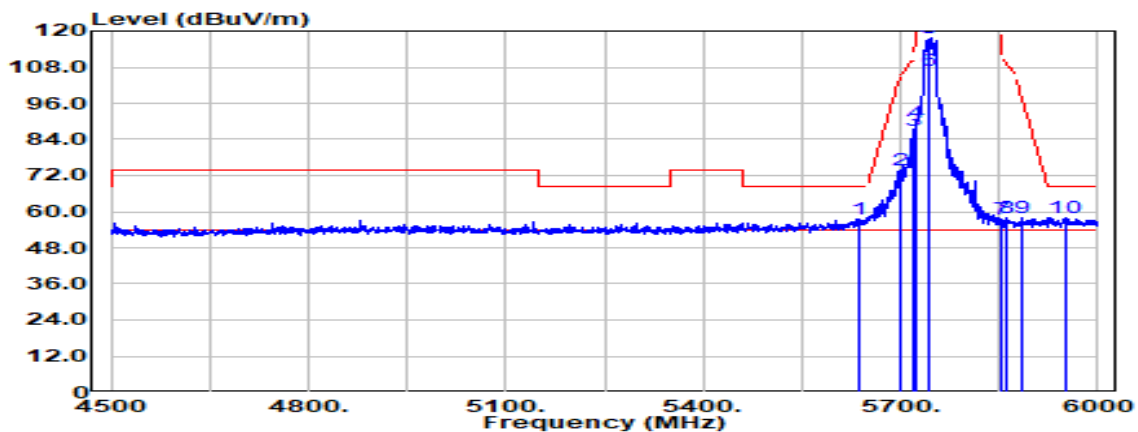

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5635.500       | Peak                           | 37.34                               | 20.13          | 57.47                    | 68.20                    | -10.73         |
| 5698.500       | Peak                           | 53.78                               | 20.16          | 73.94                    | 104.09                   | -30.16         |
| 5718.000       | Peak                           | 66.61                               | 20.28          | 86.88                    | 110.24                   | -23.36         |
| 5723.250       | Peak                           | 69.33                               | 20.31          | 89.63                    | 118.21                   | -28.58         |
| 5745.000       | Peak                           | 97.41                               | 20.45          | 117.85                   | -                        | -              |
| 5745.000       | Average                        | 86.23                               | 20.45          | 106.68                   | -                        | -              |
| 5853.000       | Peak                           | 36.84                               | 20.74          | 57.58                    | 115.36                   | -57.77         |
| 5860.500       | Peak                           | 37.04                               | 20.78          | 57.81                    | 109.26                   | -51.44         |
| 5883.000       | Peak                           | 36.99                               | 20.88          | 57.86                    | 99.26                    | -41.39         |
| 5949.750       | Peak                           | 36.98                               | 21.16          | 58.14                    | 68.20                    | -10.06         |



|           |                              |               |                  |
|-----------|------------------------------|---------------|------------------|
| Test Mode | IEEE 802.11ax HE20 / 5745MHz | Temp/Hum      | 21.8(°C) / 64%RH |
| Test Item | Band Edge                    | Test Date     | March 29, 2022   |
| Polarize  | Horizontal                   | Test Engineer | Tony Chao        |
| Detector  | Peak & Average               |               |                  |

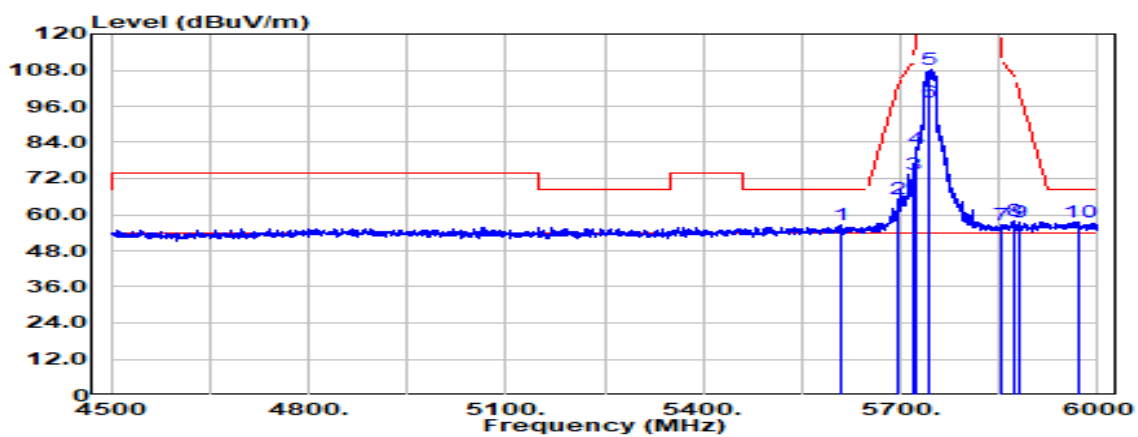

| Freq.<br>(MHz) | Detector<br>Mode<br>(PK/QP/AV) | Spectrum<br>Reading Level<br>(dBμV) | Factor<br>(dB) | Actual<br>FS<br>(dBμV/m) | Limit<br>@3m<br>(dBμV/m) | Margin<br>(dB) |
|----------------|--------------------------------|-------------------------------------|----------------|--------------------------|--------------------------|----------------|
| 5610.000       | Peak                           | 36.66                               | 20.09          | 56.75                    | 68.20                    | -11.45         |
| 5695.500       | Peak                           | 44.88                               | 20.16          | 65.04                    | 101.88                   | -36.84         |
| 5719.500       | Peak                           | 53.26                               | 20.28          | 73.55                    | 110.66                   | -37.11         |
| 5724.750       | Peak                           | 61.53                               | 20.32          | 81.85                    | 121.63                   | -39.78         |
| 5745.000       | Peak                           | 87.88                               | 20.45          | 108.33                   | -                        | -              |
| 5745.000       | Average                        | 76.94                               | 20.45          | 97.38                    | -                        | -              |
| 5853.000       | Peak                           | 35.75                               | 20.74          | 56.49                    | 115.36                   | -58.87         |
| 5871.750       | Peak                           | 37.34                               | 20.83          | 58.16                    | 106.11                   | -47.95         |
| 5882.250       | Peak                           | 36.85                               | 20.87          | 57.72                    | 99.82                    | -42.09         |
| 5973.000       | Peak                           | 36.46                               | 21.16          | 57.63                    | 68.20                    | -10.57         |