

FCC TEST REPORT

REPORT NO.: RF941111L04

MODEL NO.: 5453

RECEIVED: Nov. 11, 2005

TESTED: Nov. 24 ~ Dec. 05, 2005

ISSUED: Dec. 07, 2005

APPLICANT: CAMEO COMMUNICATIONS, INC.

ADDRESS: No.42, Min Chuan East Road, Section 6, Taipei,
Taiwan, 114

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou Hsiang
244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This test report consists of 83 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01

TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT	6
3.2	DESCRIPTION OF TEST MODES	7
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	7
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	8
3.2.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	10
3.2.4	DESCRIPTION OF SUPPORT UNITS	10
4.	TEST TYPES AND RESULTS	11
4.1	CONDUCTED EMISSION MEASUREMENT	11
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	11
4.1.2	TEST INSTRUMENTS	11
4.1.3	TEST PROCEDURES	12
4.1.4	DEVIATION FROM TEST STANDARD	12
4.1.5	TEST SETUP	13
4.1.6	EUT OPERATING CONDITIONS	13
4.1.7	TEST RESULTS	13
4.2	RADIATED EMISSION MEASUREMENT	20
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT	20
4.2.2	TEST INSTRUMENTS	21
4.2.3	TEST PROCEDURES	22
4.2.4	DEVIATION FROM TEST STANDARD	23
4.2.5	TEST SETUP	23
4.2.6	EUT OPERATING CONDITIONS	23
4.2.7	TEST RESULTS	24
4.3	6dB BANDWIDTH MEASUREMENT	42
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	42
4.3.2	TEST INSTRUMENTS	42
4.3.3	TEST PROCEDURE	43
4.3.4	DEVIATION FROM TEST STANDARD	43
4.3.5	TEST SETUP	43
4.3.6	EUT OPERATING CONDITIONS	43
4.3.7	TEST RESULTS	44
4.4	MAXIMUM PEAK OUTPUT POWER	52
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	52



4.4.2	INSTRUMENTS	52
4.4.3	TEST PROCEDURES	53
4.4.4	DEVIATION FROM TEST STANDARD	53
4.4.5	TEST SETUP	53
4.4.6	EUT OPERATING CONDITIONS	53
4.4.7	TEST RESULTS	54
4.5	POWER SPECTRAL DENSITY MEASUREMENT	56
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	56
4.5.2	TEST INSTRUMENTS	56
4.5.3	TEST PROCEDURE	57
4.5.4	DEVIATION FROM TEST STANDARD	57
4.5.5	TEST SETUP	57
4.5.6	EUT OPERATING CONDITION	57
4.5.7	TEST RESULTS	58
4.6	BAND EDGES MEASUREMENT	66
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	66
4.6.2	TEST INSTRUMENTS	66
4.6.3	TEST PROCEDURE	66
4.6.4	DEVIATION FROM TEST STANDARD	66
4.6.5	EUT OPERATING CONDITION	66
4.6.6	TEST RESULTS	67
4.7	ANTENNA REQUIREMENT	79
4.7.1	STANDARD APPLICABLE	79
4.7.2	ANTENNA CONNECTED CONSTRUCTION	79
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	80
6.	INFORMATION ON THE TESTING LABORATORIES	82
	APPENDIX	A-1



1. CERTIFICATION

PRODUCT: Professional Access Point
MODEL NO.: 5453
BRAND: U.S.Robotics
APPLICANT: CAMEO COMMUNICATIONS, INC.
TESTED: Nov. 24 ~ Dec. 05, 2005
TEST SAMPLE: ENGINEERING SAMPLE
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment have been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Rebecca Huang , **DATE:** Dec. 07, 2005
Rebecca Huang

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Dec. 07, 2005
Responsible for RF Gary Chang

APPROVED BY : Cody Chang , **DATE:** Dec. 07, 2005
Cody Chang / Deputy Manager

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.22dB at 1.590MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.54dB at 2378.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz ~ 30MHz	2.44 dB
Radiated emissions	30MHz ~ 200MHz	3.73 dB
	200MHz ~ 1000MHz	3.74 dB
	1GHz ~ 18GHz	2.20 dB
	18GHz ~ 40GHz	1.88 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Professional Access Point
MODEL NO.	5453
POWER SUPPLY	5Vdc from AC Adapter
MODULATION TYPE	CCK, QPSK, BPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
RADIO TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (turbo mode up to 108Mbps)
FREQUENCY RANGE	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	11 for 802.11b & 802.11g normal mode 1 for turbo mode
OUTPUT POWER	45.709mW
ANTENNA TYPE	Dipole antenna with 5dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT was tested with the following adapter:

BRAND:	FAIRWAY
MODEL:	WT10A-050
INPUT:	100-240Vac, 50-60Hz, 1.0A MAX
OUTPUT:	5Vdc, 2.0A
POWER LINE:	1.8m non-shielded cable without core


2. The EUT, operates in the 2.4GHz frequency range, lets you connect IEEE 802.11g or IEEE 802.11b devices to the network. With its high-speed data transmissions of up to 54Mbps.
3. This EUT is capable of providing data rates of up to 108Mbps in Turbo mode depending upon reception quality.
4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided to this EUT.

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

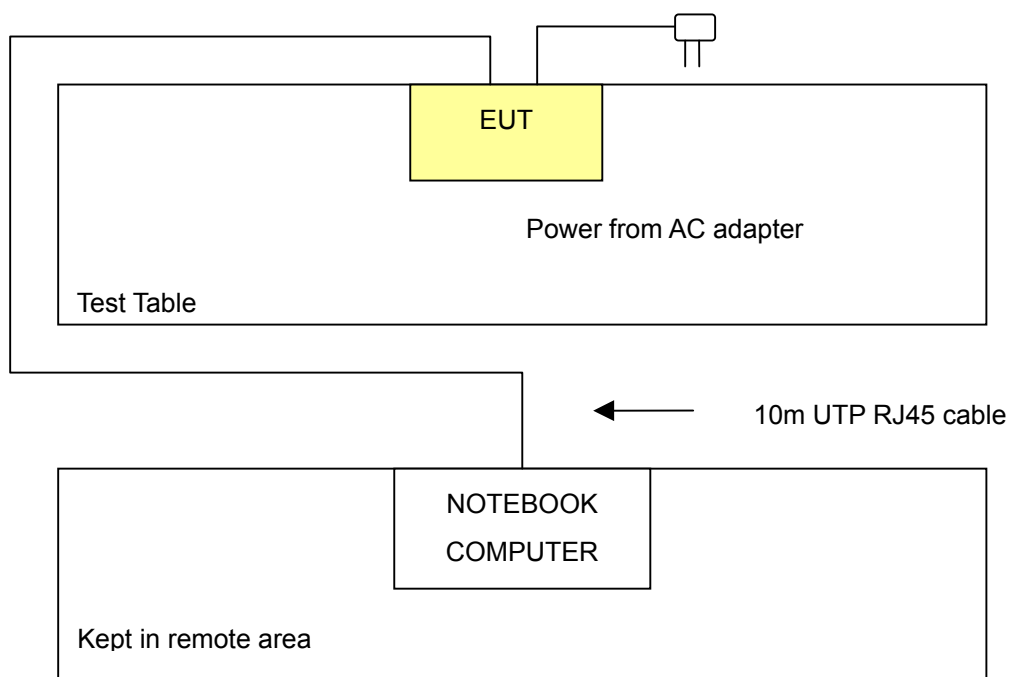

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE<1G	RE≥1G	APCM	
-	√	√	√	√	NA

Where **PLC**: Power Line Conducted Emission

RE<1G: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6

RADIATED EMISSION TEST (BELOW 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11g	1 to 11	11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

RADIATED EMISSION TEST (ABOVE 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	BPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 11	DSSS	BPSK	1
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

ANTENNA PORT CONDUCTED MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	BPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g turbo	6	6	OFDM	BPSK	12

3.2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4- 2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP05L	16484462992	E2K24CLNS

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA

NOTE:

1. All power cords of the above support units are non shielded (1.8m).
2. Item 1 act as a communication partner to transfer data.

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100288	Nov. 02, 2006
RF signal cable Woken	5D-FB	Cable-HyC02-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100100	Jan. 20, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100311	Jan. 20, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 3.
 3. The VCCI Site Registration No. is C-2047.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

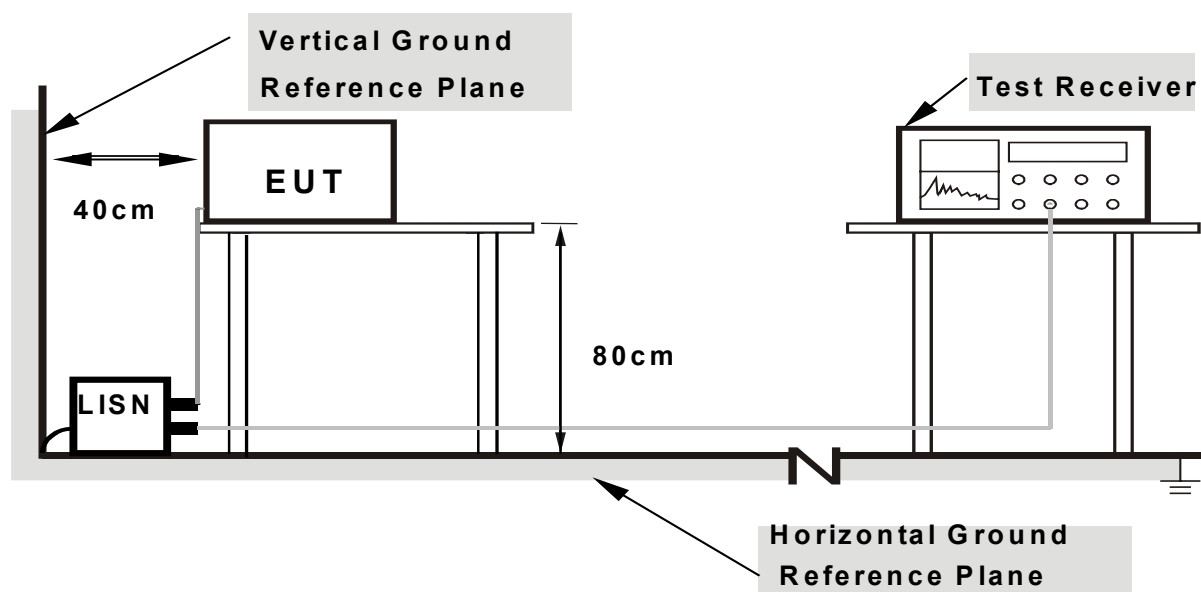

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- Placed the EUT on the testing table.
- Prepared another notebook system to act as a communication partner and placed it outside of testing area.
- The communication partner run a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency via an RJ45 cable.
- The communication partner sent data to EUT by command "PING".


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.228	0.11	42.62	-	42.73	-	62.52	52.52	-19.79	-
2	0.455	0.13	40.99	-	41.12	-	56.79	46.79	-15.67	-
3	0.916	0.21	38.72	-	38.93	-	56.00	46.00	-17.07	-
4	1.367	0.24	41.79	-	42.03	-	56.00	46.00	-13.97	-
5	14.215	0.53	44.35	-	44.88	-	60.00	50.00	-15.12	-
6	16.230	0.66	45.37	-	46.03	-	60.00	50.00	-13.97	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

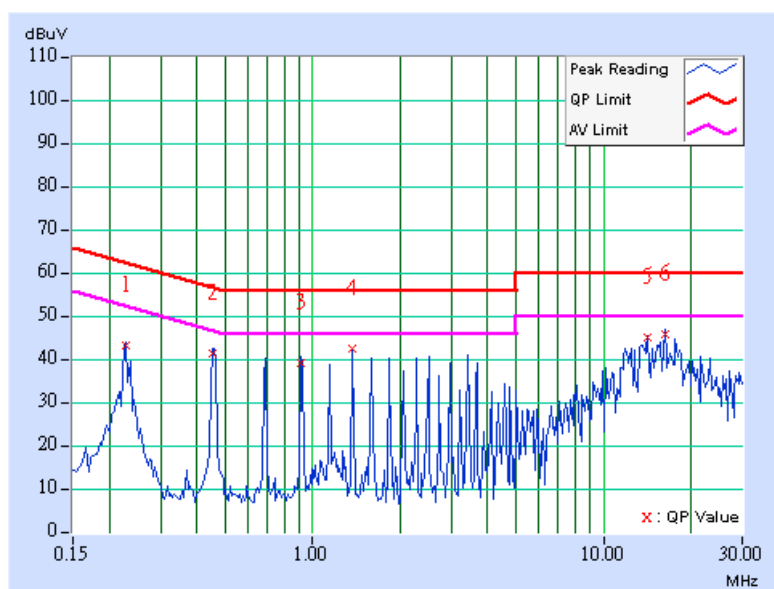

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.228	0.11	42.38	-	42.49	-	62.52	52.52	-20.03	-
2	0.455	0.13	40.41	-	40.54	-	56.79	46.79	-16.25	-
3	0.916	0.21	38.32	-	38.53	-	56.00	46.00	-17.47	-
4	1.602	0.24	42.43	-	42.67	-	56.00	46.00	-13.33	-
5	2.523	0.26	37.39	-	37.65	-	56.00	46.00	-18.35	-
6	14.215	0.63	44.51	-	45.14	-	60.00	50.00	-14.86	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

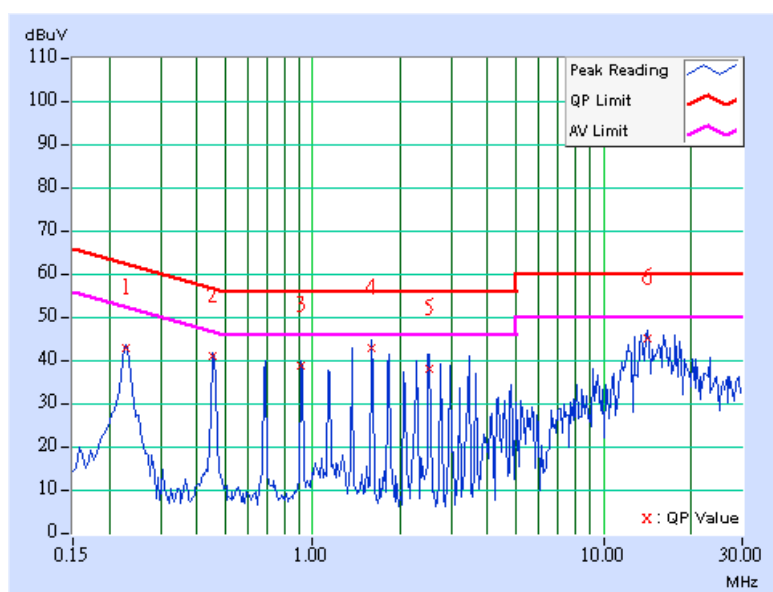

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.11	41.13	-	41.24	-	62.66	52.66	-21.42	-
2	0.455	0.13	40.44	-	40.57	-	56.79	46.79	-16.22	-
3	0.908	0.21	38.67	-	38.88	-	56.00	46.00	-17.12	-
4	1.582	0.24	39.09	-	39.33	-	56.00	46.00	-16.67	-
5	3.406	0.28	37.82	-	38.10	-	56.00	46.00	-17.90	-
6	13.359	0.51	44.34	-	44.85	-	60.00	50.00	-15.15	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

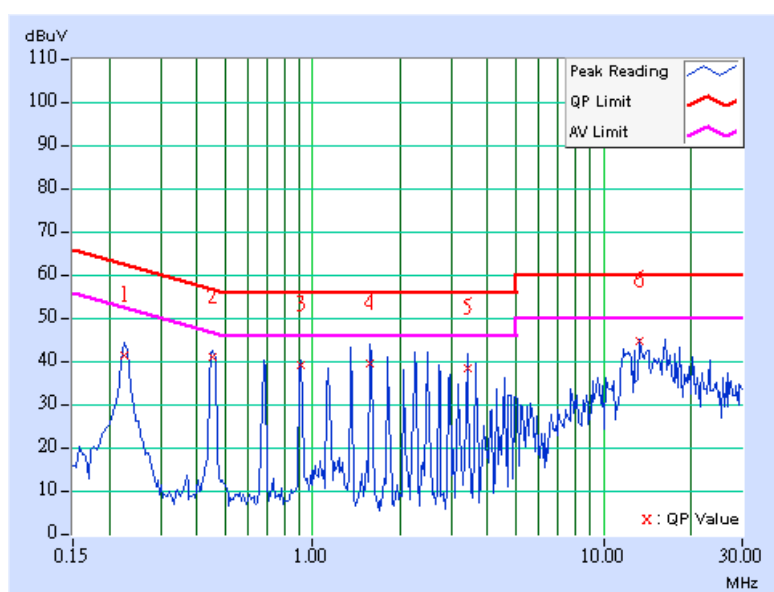

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.11	40.62	-	40.73	-	62.66	52.66	-21.93	-
2	0.455	0.13	40.02	-	40.15	-	56.79	46.79	-16.64	-
3	0.908	0.21	38.13	-	38.34	-	56.00	46.00	-17.66	-
4	1.586	0.24	42.38	-	42.62	-	56.00	46.00	-13.38	-
5	3.637	0.28	37.32	-	37.60	-	56.00	46.00	-18.40	-
6	14.152	0.63	43.79	-	44.42	-	60.00	50.00	-15.58	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

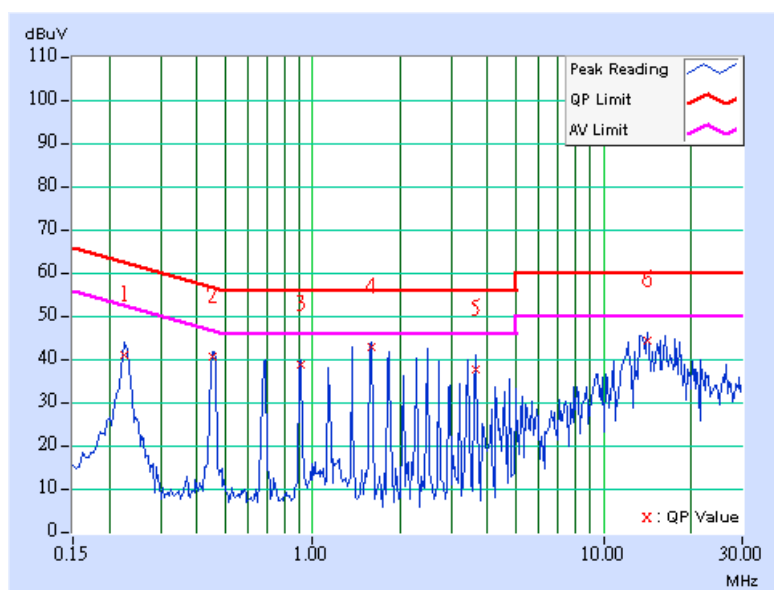

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.11	40.73	-	40.84	-	62.66	52.66	-21.82	-
2	0.455	0.13	41.03	-	41.16	-	56.79	46.79	-15.63	-
3	0.908	0.21	38.60	-	38.81	-	56.00	46.00	-17.19	-
4	1.586	0.24	42.49	-	42.73	-	56.00	46.00	-13.27	-
5	3.391	0.28	36.26	-	36.54	-	56.00	46.00	-19.46	-
6	16.230	0.66	44.49	-	45.15	-	60.00	50.00	-14.85	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

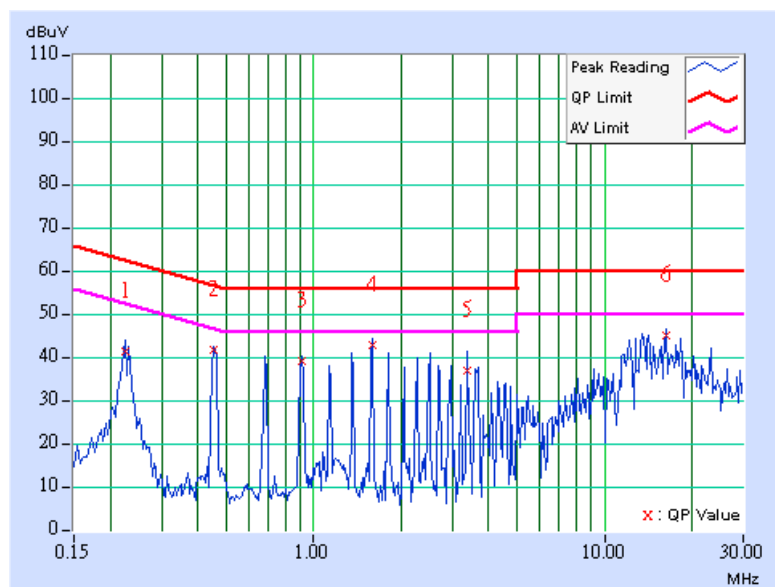

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 65%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jay Chen		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.224	0.11	40.76	-	40.87	-	62.66	52.66	-21.79	-
2	0.455	0.13	40.00	-	40.13	-	56.79	46.79	-16.66	-
3	1.590	0.24	42.54	-	42.78	-	56.00	46.00	-13.22	-
4	3.387	0.28	31.71	-	31.99	-	56.00	46.00	-24.01	-
5	12.141	0.59	40.74	-	41.33	-	60.00	50.00	-18.67	-
6	16.230	0.73	44.51	-	45.24	-	60.00	50.00	-14.76	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

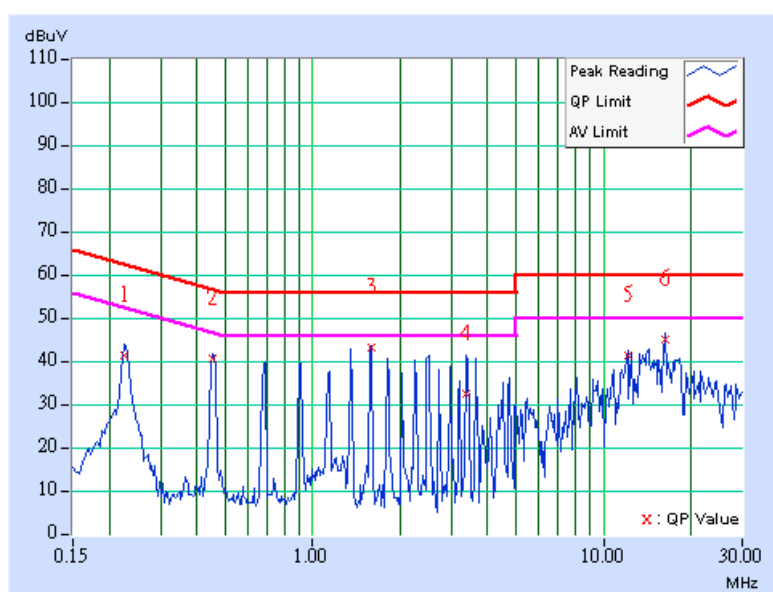

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESIB7	100188	Dec. 19, 2005
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 27, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-157	Jan. 22, 2006
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-407	Jan. 16, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA 9170241	Feb. 23, 2006
Preamplifier Agilent	8449B	3008A01961	Oct. 23, 2006
Preamplifier Agilent	8447D	2944A10629	Oct. 27, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218182/4	Feb. 17, 2006
RF signal cable HUBER+SUHNER	SUCOFLEX 104	218194/4	Feb. 17, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower ADT.	AT100	AT93021702	NA
Turn Table ADT.	TT100.	TT93021702	NA
Controller ADT.	SC100.	SC93021702	NA

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in HwaYa Chamber 1.
3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
4. The IC Site Registration No. is IC4924-2.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak method or average method as specified and then reported in data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 KHz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

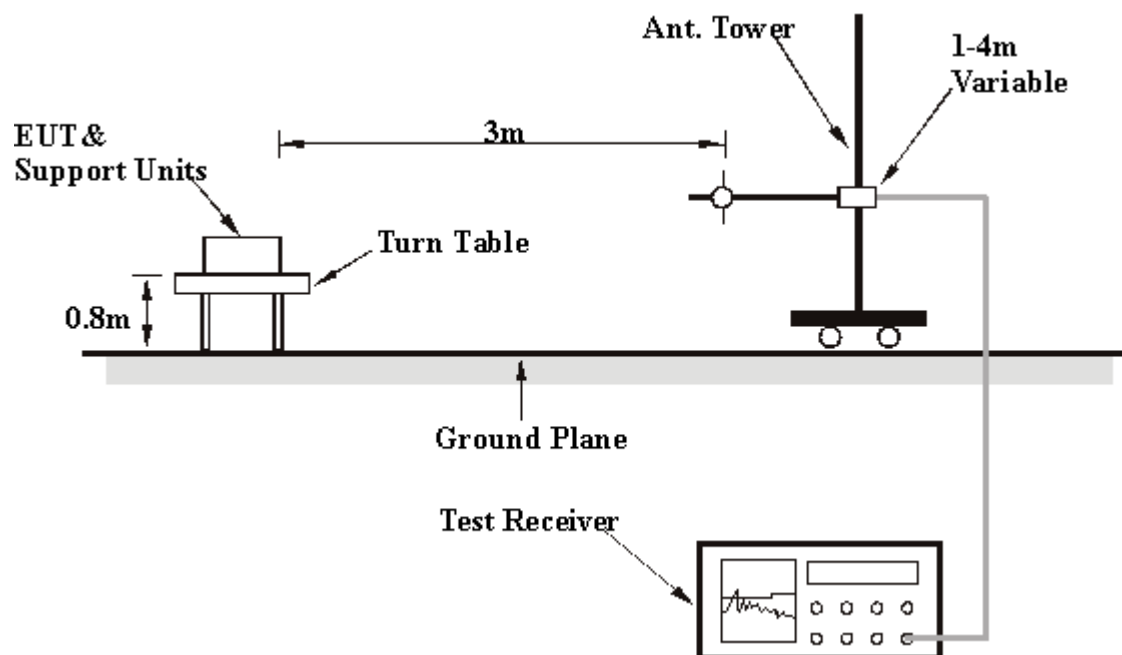

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

RADIATED WORST-CASE DATA: BELOW 1GHz_NORMAL MODE

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg. C, 54%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	25.05 QP	40.00	-14.95	1.00 H	193	11.37	13.68
2	94.15	31.94 QP	43.50	-11.56	2.00 H	340	21.66	10.28
3	98.04	33.25 QP	43.50	-10.25	1.00 H	193	22.66	10.59
4	140.80	31.58 QP	43.50	-11.92	1.00 H	124	17.35	14.23
5	164.13	30.14 QP	43.50	-13.36	1.00 H	193	15.89	14.26
6	199.12	32.86 QP	43.50	-10.64	1.00 H	136	21.66	11.20
7	249.66	39.10 QP	46.00	-6.90	1.00 H	115	26.02	13.08
8	294.37	31.34 QP	46.00	-14.66	1.50 H	148	17.08	14.25
9	374.07	31.49 QP	46.00	-14.51	1.00 H	151	15.46	16.03
10	393.51	32.15 QP	46.00	-13.85	1.50 H	148	15.67	16.48
11	449.88	30.27 QP	46.00	-15.73	1.00 H	91	12.36	17.91
12	500.42	31.48 QP	46.00	-14.52	2.00 H	133	12.88	18.59
13	731.74	32.28 QP	46.00	-13.72	2.00 H	91	9.29	22.99

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg. C, 54%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.94	36.84 QP	40.00	-3.16	1.00 V	151	23.17	13.68
2	63.05	31.61 QP	40.00	-8.39	1.00 V	118	18.50	13.11
3	113.59	32.23 QP	43.50	-11.27	1.00 V	298	20.09	12.14
4	160.24	30.96 QP	43.50	-12.54	1.00 V	19	16.32	14.63
5	166.07	30.94 QP	43.50	-12.56	1.00 V	295	16.87	14.07
6	249.66	34.66 QP	46.00	-11.34	1.00 V	268	21.58	13.08
7	374.07	31.35 QP	46.00	-14.65	1.00 V	97	15.33	16.03
8	449.88	33.86 QP	46.00	-12.14	1.00 V	43	15.96	17.91
9	500.42	34.57 QP	46.00	-11.43	1.00 V	13	15.97	18.59
10	731.74	31.08 QP	46.00	-14.92	1.00 V	289	8.09	22.99

REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

RADIATED WORST-CASE DATA: BELOW 1GHz_TURBO MODE

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg. C, 54%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.47	24.57 QP	40.00	-15.43	1.00 H	247	10.81	13.76
2	98.04	33.25 QP	43.50	-10.25	1.00 H	193	22.66	10.59
3	142.14	32.27 QP	43.50	-11.23	1.50 H	244	18.01	14.26
4	165.52	29.54 QP	43.50	-13.96	1.00 H	210	15.42	14.12
5	199.12	32.86 QP	43.50	-10.64	1.00 H	136	21.66	11.20
6	249.66	39.10 QP	46.00	-6.90	1.00 H	115	26.02	13.08
7	295.63	32.47 QP	46.00	-13.53	1.50 H	247	18.20	14.27
8	375.58	32.24 QP	46.00	-13.76	1.50 H	147	16.18	16.06
9	393.51	32.15 QP	46.00	-13.85	1.50 H	148	15.67	16.48
10	450.63	28.69 QP	46.00	-17.31	1.00 H	237	10.77	17.92
11	500.42	31.48 QP	46.00	-14.52	2.00 H	133	12.88	18.59
12	733.50	35.24 QP	46.00	-10.76	2.00 H	247	12.21	23.03

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	26deg. C, 54%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.11	37.11 QP	40.00	-2.89	1.00 V	247	23.41	13.70
2	63.05	31.61 QP	40.00	-8.39	1.00 V	118	18.50	13.11
3	112.96	33.27 QP	43.50	-10.23	1.50 V	321	21.19	12.08
4	160.24	30.96 QP	43.50	-12.54	1.00 V	19	16.32	14.63
5	166.62	30.94 QP	43.50	-12.56	1.00 V	295	16.93	14.01
6	251.36	33.80 QP	46.00	-12.20	2.00 V	127	20.70	13.10
7	374.07	31.35 QP	46.00	-14.65	1.00 V	97	15.33	16.03
8	450.24	35.40 QP	46.00	-10.60	1.00 V	100	17.49	17.91
9	500.42	34.57 QP	46.00	-11.43	1.00 V	13	15.97	18.59
10	731.74	31.08 QP	46.00	-14.92	1.00 V	289	8.09	22.99
11	751.18	29.77 QP	46.00	-16.23	2.00 V	199	6.35	23.42

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.

802.11b DSSS MODULATION

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.64 PK	74.00	-19.36	1.00 H	200	22.60	32.04
1	2390.00	46.08 AV	54.00	-7.92	1.00 H	200	14.04	32.04
*2	2412.00	101.01 PK			1.00 H	200	68.88	32.13
*2	2412.00	97.25 AV			1.00 H	200	65.12	32.13
3	2688.00	57.58 PK	81.01	-23.43	1.02 H	158	24.64	32.94
3	2688.00	48.95 AV	77.25	-28.30	1.02 H	158	16.01	32.94
4	4824.00	48.17 PK	74.00	-25.83	1.00 H	12	9.97	38.20
4	4824.00	37.82 AV	54.00	-16.18	1.00 H	12	-0.38	38.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	59.21 PK	74.00	-14.79	1.31 V	121	27.48	31.73
1	2320.00	50.06 AV	54.00	-3.94	1.31 V	121	18.33	31.73
2	2360.00	62.10 PK	74.00	-11.90	1.05 V	122	30.20	31.90
2	2360.00	51.00 AV	54.00	-3.00	1.05 V	122	19.10	31.90
3	2390.00	62.87 PK	74.00	-11.13	1.01 V	139	30.83	32.04
3	2390.00	51.13 AV	54.00	-2.87	1.01 V	139	19.09	32.04
*4	2412.00	111.34 PK			1.05 V	121	79.21	32.13
*4	2412.00	106.30 AV			1.05 V	121	74.17	32.13
5	2688.00	61.57 PK	91.34	-29.77	1.00 V	206	28.63	32.94
5	2688.00	57.15 AV	86.30	-29.15	1.00 V	206	24.21	32.94
6	4824.00	52.38 PK	74.00	-21.62	1.21 V	63	14.18	38.20
6	4824.00	47.46 AV	54.00	-6.54	1.21 V	63	9.26	38.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
*1	2437.00	100.87 PK			1.34 H	242	68.62	32.25
*1	2437.00	96.88 AV			1.34 H	242	64.63	32.25
2	2688.00	58.63 PK	80.87	-22.24	1.17 H	284	25.69	32.94
2	2688.00	51.12 AV	76.88	-25.76	1.17 H	284	18.18	32.94
3	4874.00	48.25 PK	74.00	-25.75	1.14 H	196	9.93	38.32
3	4874.00	38.94 AV	54.00	-15.06	1.14 H	196	0.62	38.32

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	56.50 PK	74.00	-17.50	1.20 V	225	26.16	30.34
1	2016.00	47.87 AV	54.00	-6.13	1.20 V	225	17.53	30.34
2	2266.00	58.11 PK	74.00	-15.89	1.37 V	18	26.61	31.50
2	2266.00	48.00 AV	54.00	-6.00	1.37 V	18	16.50	31.50
3	2320.00	60.98 PK	74.00	-13.02	1.09 V	17	29.25	31.73
3	2320.00	50.70 AV	54.00	-3.30	1.09 V	17	18.97	31.73
4	2369.00	64.12 PK	74.00	-9.88	1.07 V	17	32.18	31.94
4	2369.00	52.37 AV	54.00	-1.63	1.07 V	17	20.43	31.94
*5	2437.00	111.49 PK			1.07 V	18	79.24	32.25
*5	2437.00	106.82 AV			1.07 V	18	74.57	32.25
6	2688.00	64.28 PK	91.49	-27.21	1.00 V	321	31.34	32.94
6	2688.00	60.62 AV	86.82	-26.20	1.00 V	321	27.68	32.94
7	4874.00	53.31 PK	74.00	-20.69	1.25 V	329	14.99	38.32
7	4874.00	49.49 AV	54.00	-4.51	1.25 V	329	11.17	38.32

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
*1	2462.00	100.57 PK			1.02 H	22	68.21	32.36
*1	2462.00	96.79 AV			1.02 H	22	64.43	32.36
2	2483.50	54.81 PK	74.00	-19.19	1.02 H	22	22.35	32.46
2	2483.50	45.47 AV	54.00	-8.53	1.02 H	22	13.01	32.46
3	2688.00	58.91 PK	80.57	-21.66	1.20 H	227	25.97	32.94
3	2688.00	50.87 AV	76.79	-25.92	1.20 H	227	17.93	32.94
4	4924.00	48.00 PK	74.00	-26.00	1.18 H	39	9.54	38.46
4	4924.00	36.66 AV	54.00	-17.34	1.18 H	39	-1.80	38.46

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	1Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	54.99 PK	74.00	-19.01	1.20 V	221	24.65	30.34
1	2016.00	47.51 AV	54.00	-6.49	1.20 V	221	17.17	30.34
2	2320.00	64.11 PK	74.00	-9.89	1.08 V	216	32.38	31.73
2	2320.00	51.92 AV	54.00	-2.08	1.08 V	216	20.19	31.73
3	2378.00	63.11 PK	74.00	-10.89	1.10 V	205	31.13	31.98
3	2378.00	52.46 AV	54.00	-1.54	1.10 V	205	20.48	31.98
*4	2462.00	112.00 PK			1.10 V	202	79.64	32.36
*4	2462.00	106.50 AV			1.10 V	202	74.14	32.36
5	2483.50	56.77 PK	74.00	-17.23	1.08 V	202	24.31	32.46
5	2483.50	46.15 AV	54.00	-7.85	1.08 V	202	13.69	32.46
6	2688.00	62.22 PK	92.00	-29.78	1.13 V	260	29.28	32.94
6	2688.00	58.23 AV	86.50	-28.27	1.13 V	260	25.29	32.94
7	4924.00	53.06 PK	74.00	-20.94	1.22 V	242	14.60	38.46
7	4924.00	48.18 AV	54.00	-5.82	1.22 V	242	9.72	38.46

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

802.11g OFDM MODULATION_NORMAL MODE

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.11 PK	74.00	-19.89	1.36 H	233	22.07	32.04
1	2390.00	45.49 AV	54.00	-8.51	1.36 H	233	13.45	32.04
*2	2412.00	98.29 PK			1.36 H	233	66.16	32.13
*2	2412.00	88.24 AV			1.36 H	233	56.11	32.13
3	2688.00	57.55 PK	78.29	-20.74	1.21 H	238	24.61	32.94
3	2688.00	49.03 AV	68.24	-19.21	1.21 H	238	16.09	32.94
4	4824.00	48.97 PK	74.00	-25.03	1.32 H	125	10.77	38.20
4	4824.00	35.03 AV	54.00	-18.97	1.32 H	125	-3.17	38.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	60.99 PK	74.00	-13.01	1.11 V	24	29.26	31.73
1	2320.00	51.29 AV	54.00	-2.71	1.11 V	24	19.56	31.73
2	2340.00	61.71 PK	74.00	-12.29	1.06 V	120	29.89	31.82
2	2340.00	51.13 AV	54.00	-2.87	1.06 V	120	19.31	31.82
3	2360.00	62.80 PK	74.00	-11.20	1.03 V	123	30.90	31.90
3	2360.00	51.82 AV	54.00	-2.18	1.03 V	123	19.92	31.90
4	2390.00	68.60 PK	74.00	-5.40	1.32 V	124	36.56	32.04
4	2390.00	52.01 AV	54.00	-1.99	1.32 V	124	19.97	32.04
*5	2412.00	110.48 PK			1.06 V	131	78.35	32.13
*5	2412.00	99.91 AV			1.06 V	131	67.78	32.13
6	2688.00	61.73 PK	90.48	-28.75	1.00 V	204	28.79	32.94
6	2688.00	56.62 AV	79.91	-23.29	1.00 V	204	23.68	32.94
7	4824.00	46.70 PK	74.00	-27.30	1.00 V	360	8.50	38.20
7	4824.00	35.01 AV	54.00	-18.99	1.00 V	360	-3.19	38.20

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
*1	2437.00	98.35 PK			1.00 H	202	66.10	32.25
*1	2437.00	88.63 AV			1.00 H	202	56.38	32.25
2	2688.00	58.51 PK	78.35	-19.84	1.08 H	199	25.57	32.94
2	2688.00	49.18 AV	68.63	-19.45	1.08 H	199	16.24	32.94
3	4874.00	48.04 PK	74.00	-25.96	1.04 H	333	9.72	38.32
3	4874.00	34.93 AV	54.00	-19.07	1.04 H	333	-3.39	38.32

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	61.13 PK	74.00	-12.87	1.10 V	23	29.40	31.73
1	2320.00	50.87 AV	54.00	-3.13	1.10 V	23	19.14	31.73
2	2360.00	64.18 PK	74.00	-9.82	1.09 V	24	32.28	31.90
2	2360.00	52.13 AV	54.00	-1.87	1.09 V	24	20.23	31.90
*3	2437.00	110.66 PK			1.08 V	25	78.41	32.25
*3	2437.00	99.89 AV			1.08 V	25	67.64	32.25
4	2688.00	62.16 PK	90.66	-28.50	1.00 V	204	29.22	32.94
4	2688.00	58.20 AV	79.89	-21.69	1.00 V	204	25.26	32.94
5	4874.00	47.90 PK	74.00	-26.10	1.02 V	210	9.58	38.32
5	4874.00	34.78 AV	54.00	-19.22	1.02 V	210	-3.54	38.32

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
*1	2462.00	98.74 PK			1.29 H	234	66.38	32.36
*1	2462.00	87.61 AV			1.29 H	234	55.25	32.36
2	2483.50	55.52 PK	74.00	-18.48	1.29 H	134	23.06	32.46
2	2483.50	45.72 AV	54.00	-8.28	1.29 H	134	13.26	32.46
3	2688.00	57.98 PK	78.74	-20.76	1.16 H	32	25.04	32.94
3	2688.00	49.28 AV	67.61	-18.33	1.16 H	32	16.34	32.94
4	4924.00	48.07 PK	74.00	-25.93	1.16 H	32	9.61	38.46
4	4924.00	35.02 AV	54.00	-18.98	1.16 H	32	-3.44	38.46

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2320.00	61.84 PK	74.00	-12.16	1.09 V	25	30.11	31.73
1	2320.00	50.94 AV	54.00	-3.06	1.09 V	25	19.21	31.73
2	2360.00	62.28 PK	74.00	-11.72	1.08 V	26	30.38	31.90
2	2360.00	51.51 AV	54.00	-2.49	1.08 V	26	19.61	31.90
*3	2462.00	111.01 PK			1.08 V	8	78.65	32.36
*3	2462.00	101.20 AV			1.08 V	8	68.84	32.36
4	2483.50	60.28 PK	74.00	-13.72	1.08 V	8	27.82	32.46
4	2483.50	47.02 AV	54.00	-6.98	1.08 V	8	14.56	32.46
5	2688.00	62.48 PK	91.01	-28.53	1.00 V	318	29.54	32.94
5	2688.00	57.24 AV	81.20	-23.96	1.00 V	318	24.30	32.94
6	4924.00	49.01 PK	74.00	-24.99	1.06 V	191	10.55	38.46
6	4924.00	35.31 AV	54.00	-18.69	1.06 V	191	-3.15	38.46

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

802.11g OFDM MODULATION_TURBO MODE

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.22 PK	74.00	-17.78	1.00 H	16	24.18	32.04
1	2390.00	45.46 AV	54.00	-8.54	1.00 H	16	13.42	32.04
*2	2437.00	93.62 PK			1.00 H	16	61.37	32.25
*2	2437.00	83.51 AV			1.00 H	16	51.26	32.25
3	2483.50	53.61 PK	74.00	-20.39	1.00 H	16	21.15	32.46
3	2483.50	45.35 AV	54.00	-8.65	1.00 H	16	12.89	32.46
4	2688.00	57.05 PK	73.62	-16.57	1.25 H	360	24.11	32.94
4	2688.00	46.80 AV	63.51	-16.71	1.25 H	360	13.86	32.94
5	4874.00	46.67 PK	74.00	-27.33	1.09 H	352	8.35	38.32
5	4874.00	34.30 AV	54.00	-19.70	1.09 H	352	-4.02	38.32

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.

EUT	Professional Access Point	MEASUREMENT DETAIL	
MODEL	5453	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak (PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Match Tsui		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2016.00	52.65 PK	74.00	-21.35	1.00 V	270	22.31	30.34
1	2016.00	45.59 AV	54.00	-8.41	1.00 V	270	15.25	30.34
2	2320.00	61.67 PK	74.00	-12.33	1.14 V	210	29.94	31.73
2	2320.00	52.34 AV	54.00	-1.66	1.14 V	210	20.61	31.73
3	2380.00	61.62 PK	74.00	-12.38	1.14 V	148	29.63	31.99
3	2380.00	51.89 AV	54.00	-2.11	1.14 V	148	19.90	31.99
*4	2437.00	106.76 PK			1.10 V	140	74.51	32.25
*4	2437.00	96.96 AV			1.10 V	140	64.71	32.25
5	2483.50	55.19 PK	74.00	-18.81	1.09 V	139	22.73	32.46
5	2483.50	47.93 AV	54.00	-6.07	1.09 V	139	15.47	32.46
6	2688.00	62.39 PK	86.76	-24.37	1.00 V	22	29.45	32.94
6	2688.00	46.13 AV	76.96	-30.83	1.00 V	22	13.19	32.94
7	4874.00	47.48 PK	74.00	-26.52	1.09 V	92	9.16	38.32
7	4874.00	34.61 AV	54.00	-19.39	1.09 V	92	-3.71	38.32

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * “: Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.


4.3.7 TEST RESULTS

802.11b DSSS MODULATION


EUT	Professional Access Point	MODEL	5453
MODULATION TYPE	BPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.12	0.5	PASS
6	2437	11.12	0.5	PASS
11	2462	11.16	0.5	PASS


CH1

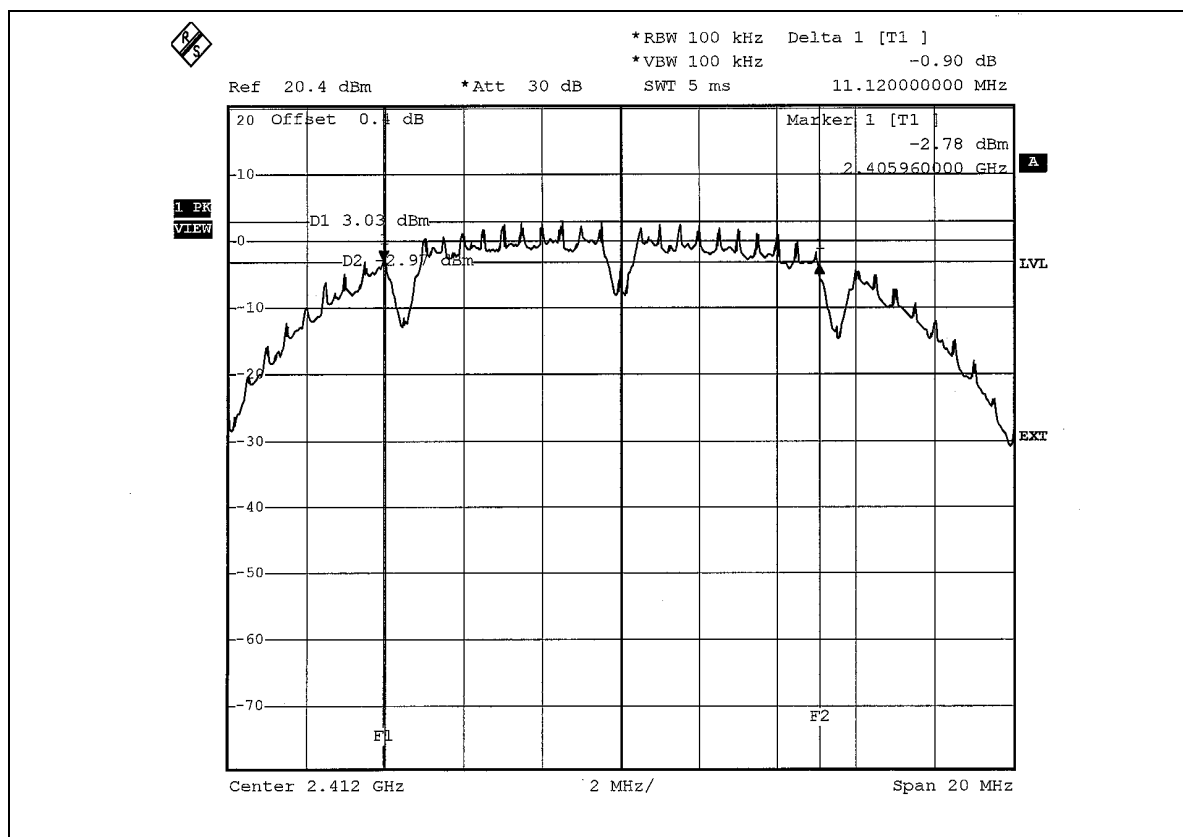

CH6

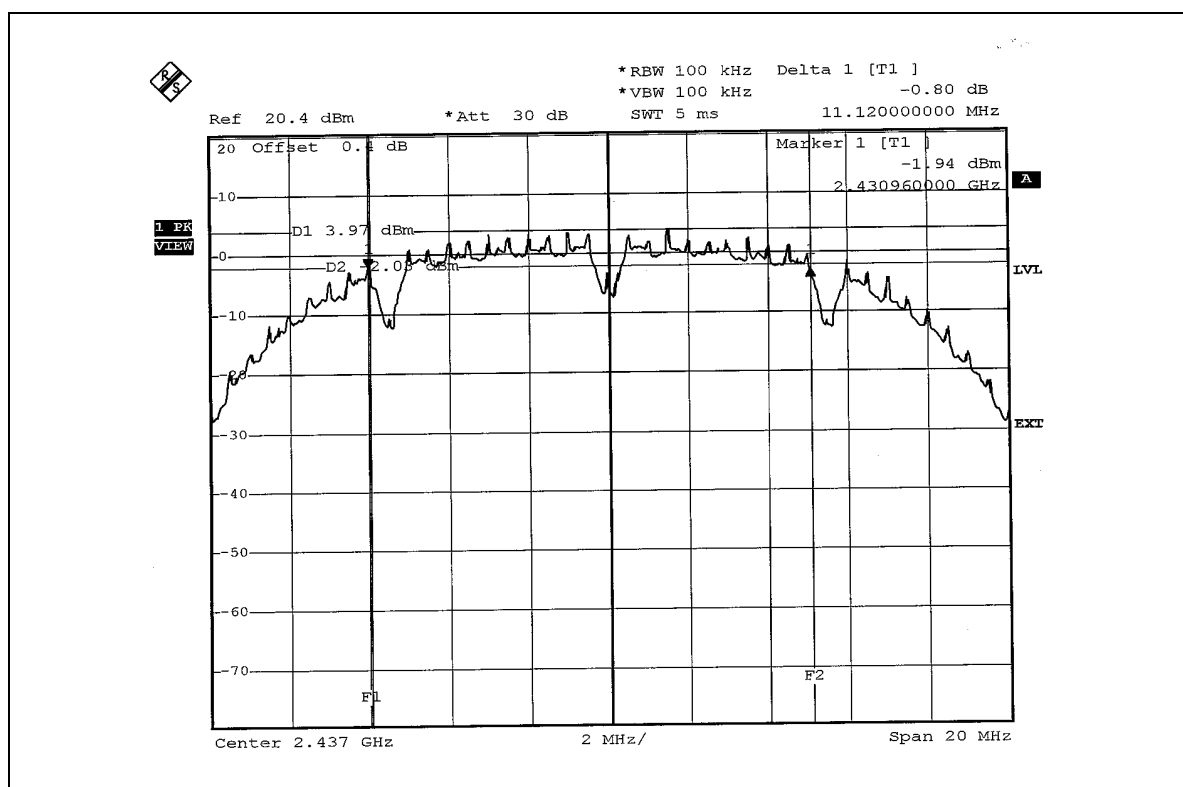

CH11

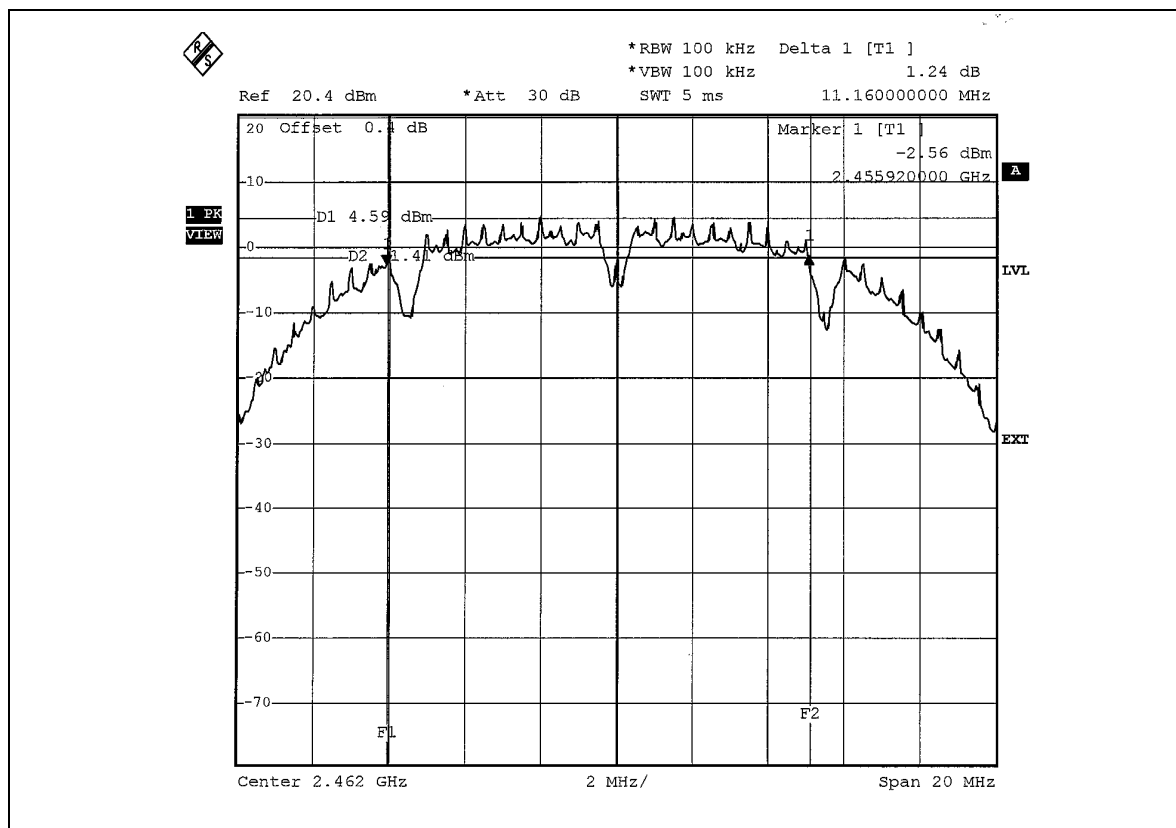


**802.11g OFDM MODULATION_NORMAL MODE**


EUT	Professional Access Point	MODEL	5453
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.40	0.5	PASS
6	2437	16.36	0.5	PASS
11	2462	16.44	0.5	PASS


CH1

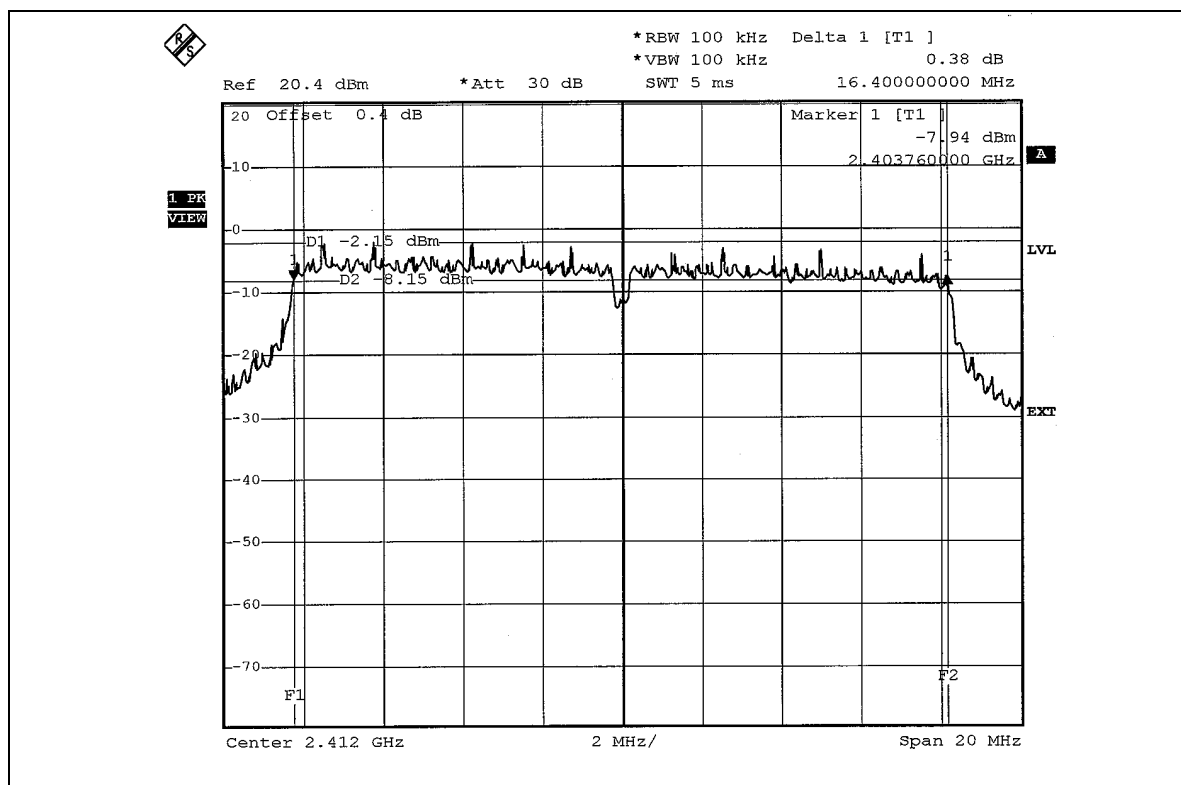

CH6

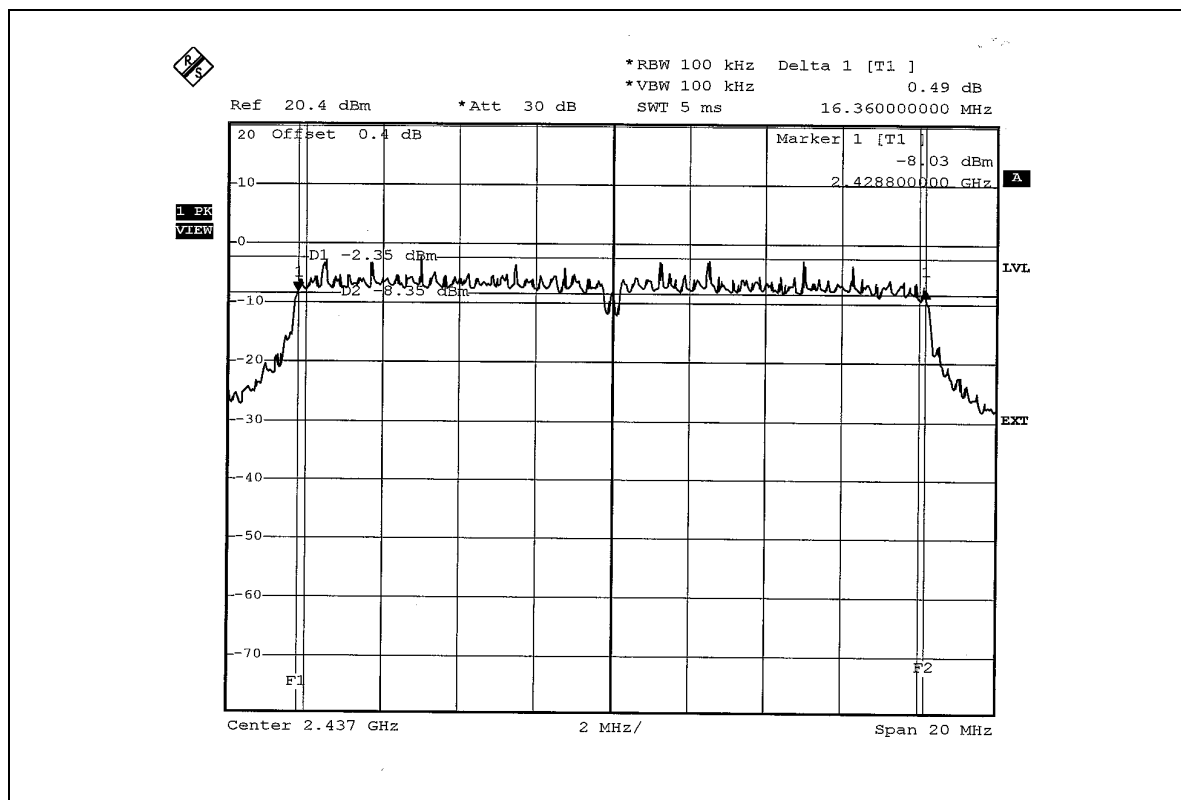

CH11

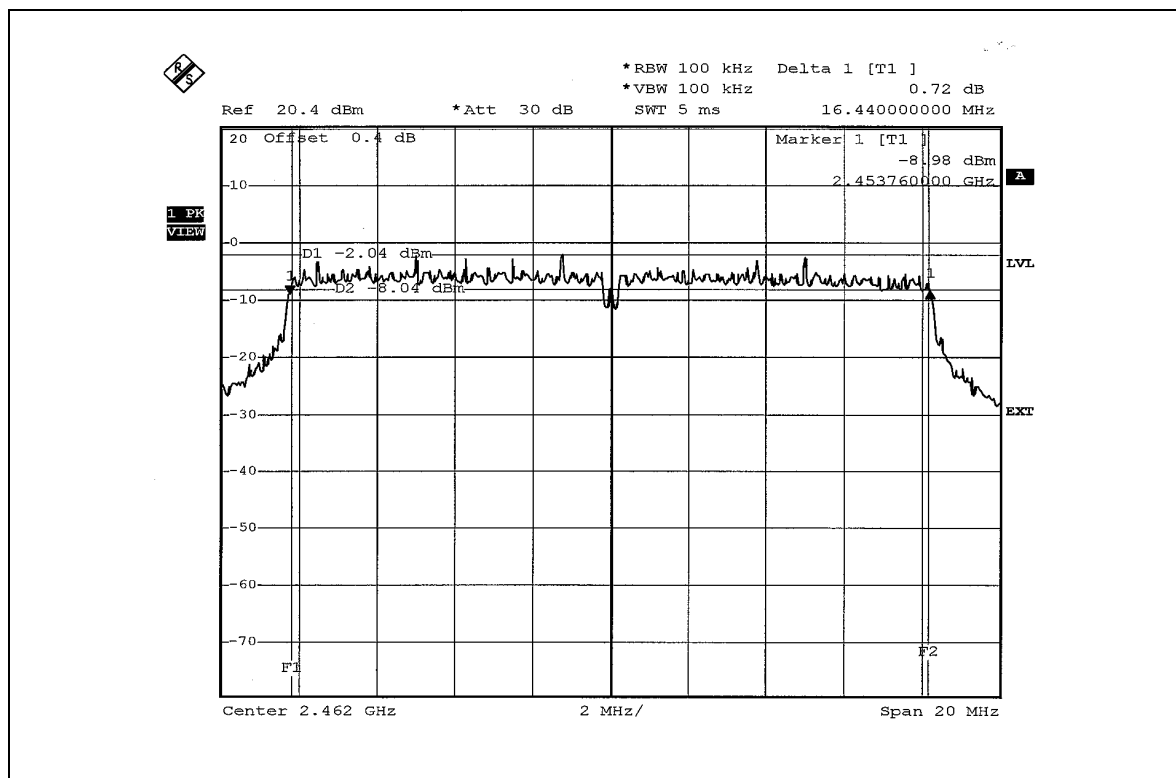


**802.11g OFDM MODULATION_TURBO MODE**

EUT	Professional Access Point	MODEL	5453
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	33.04	0.5	PASS

CH6

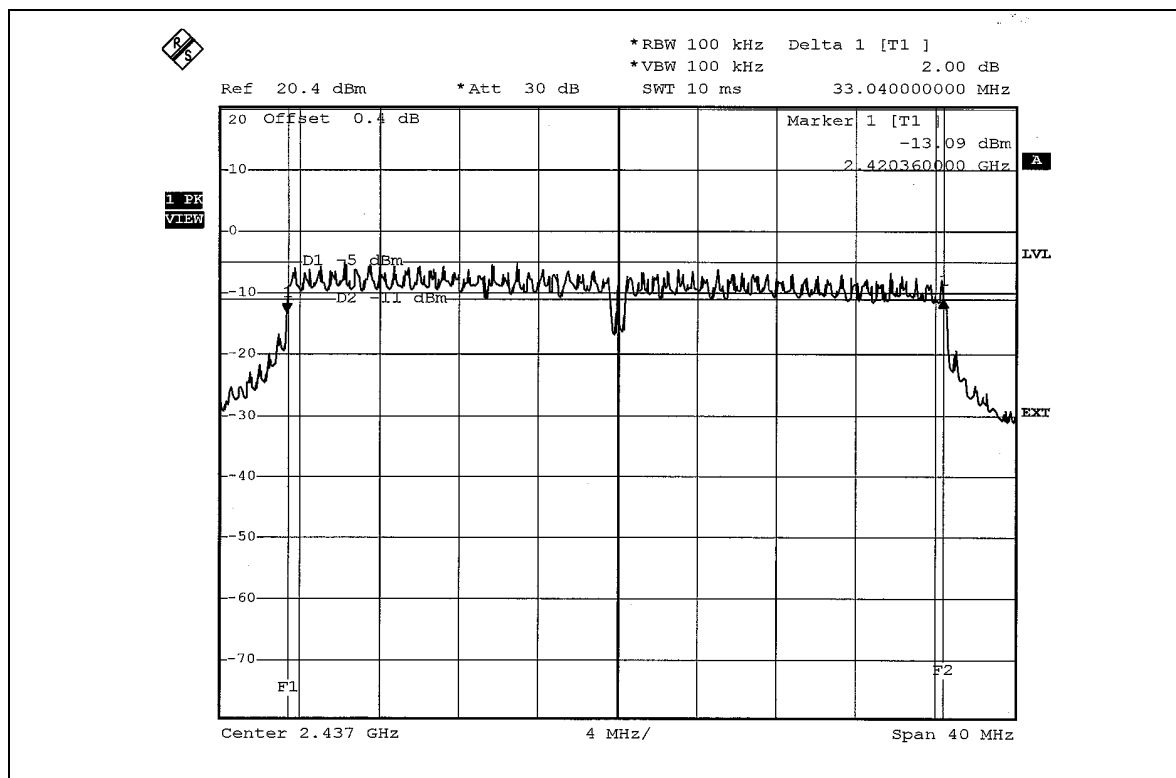

4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 06, 2005
DIGITAL RT OSCILLOSCOPE	TDS1012	C037299	Dec. 07, 2005
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP



4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

EUT	Professional Access Point	MODEL	5453
MODULATION TYPE	BPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	44.771	16.51	30	PASS
6	2437	45.709	16.60	30	PASS
11	2462	45.499	16.58	30	PASS

802.11g OFDM MODULATION_NORMAL MODE

EUT	Professional Access Point	MODEL	5453
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	28.510	14.55	30	PASS
6	2437	28.840	14.60	30	PASS
11	2462	28.510	14.55	30	PASS



802.11g OFDM MODULATION_TURBO MODE

EUT	Professional Access Point	MODEL	5453
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	28.119	14.49	30	PASS

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP

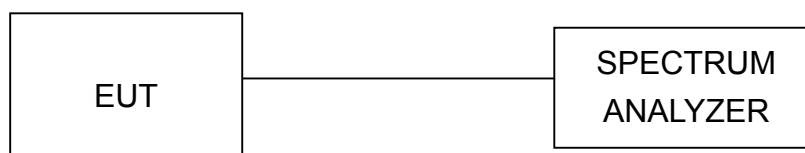

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6




4.5.7 TEST RESULTS

802.11b DSSS MODULATION


EUT	Professional Access Point	MODEL	5453
MODULATION TYPE	BPSK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-7.30	8	PASS
6	2437	-7.25	8	PASS
11	2462	-7.86	8	PASS


CH1

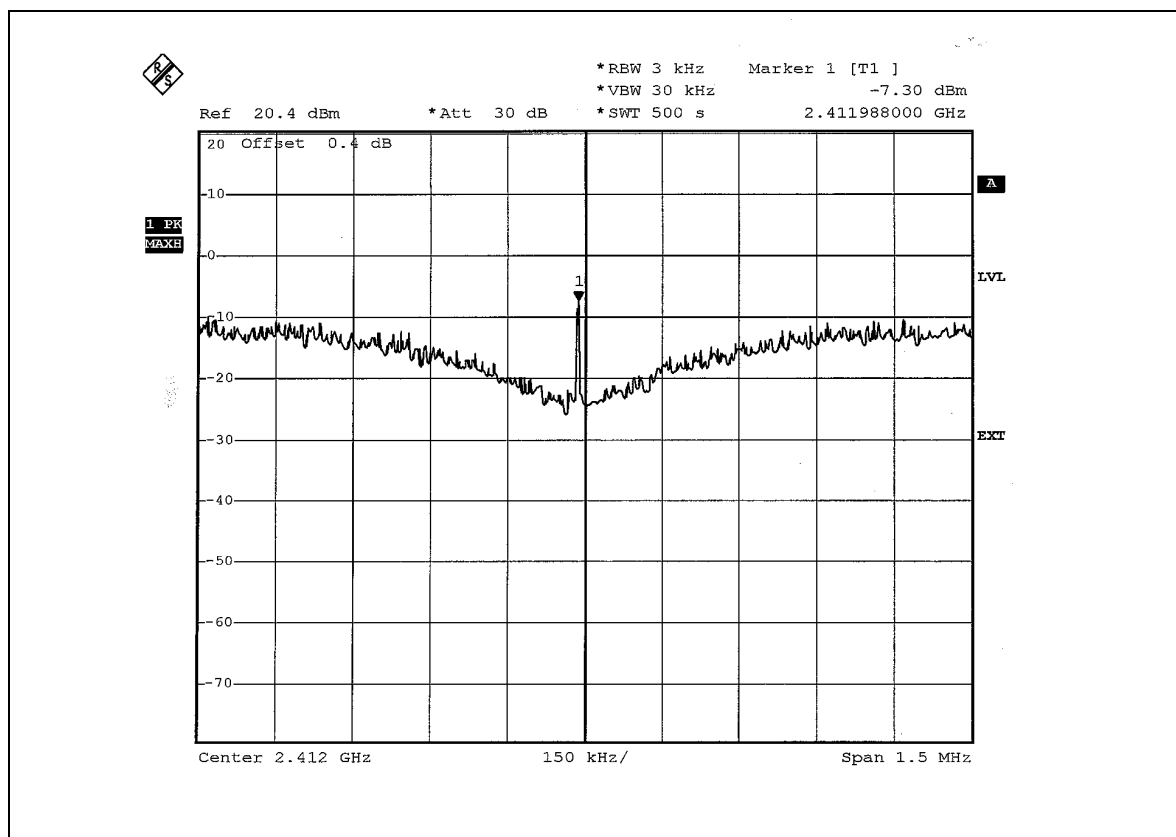

CH6

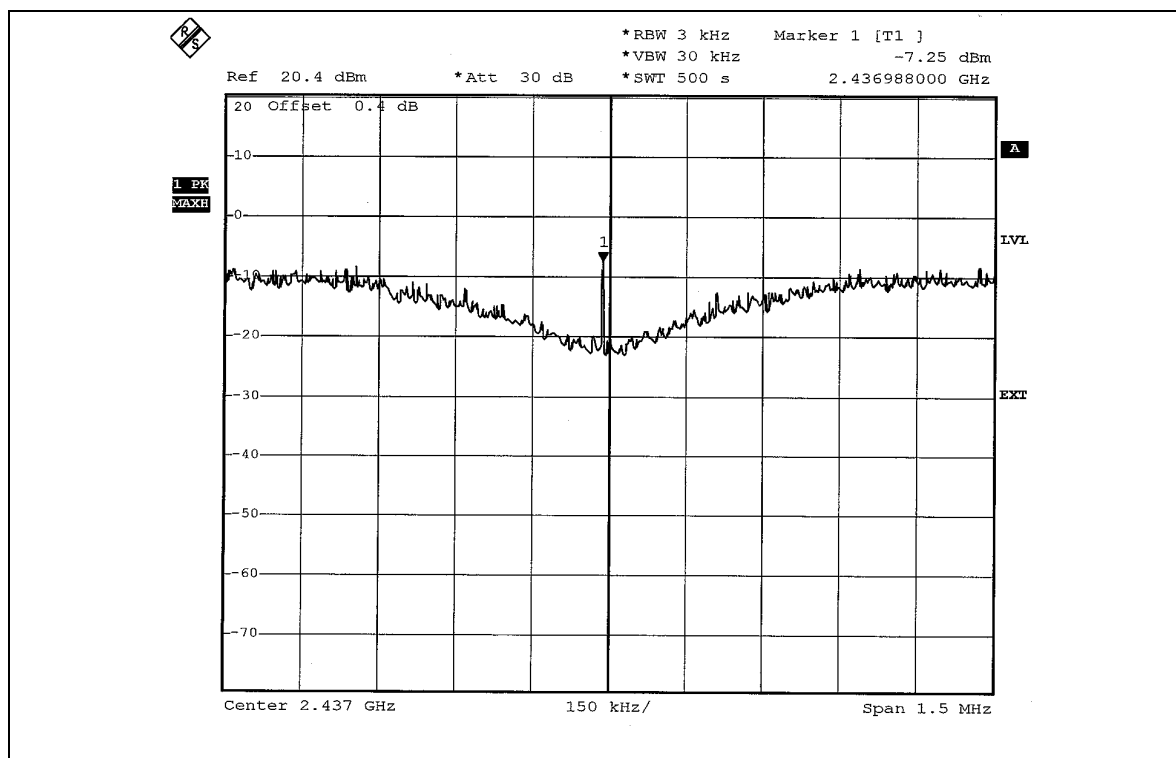

CH11

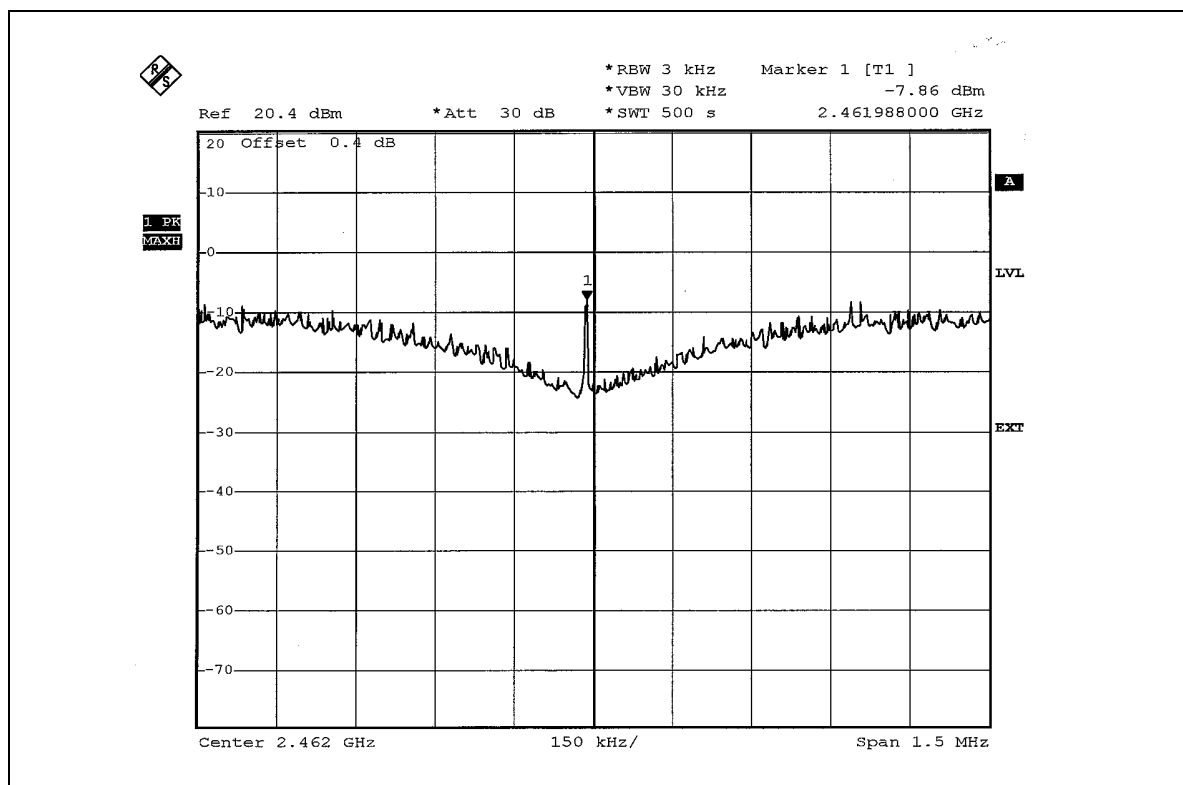




802.11g OFDM MODULATION_NORMAL MODE


EUT	Professional Access Point	MODEL	5453
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-15.36	8	PASS
6	2437	-15.51	8	PASS
11	2462	-15.19	8	PASS


CH1

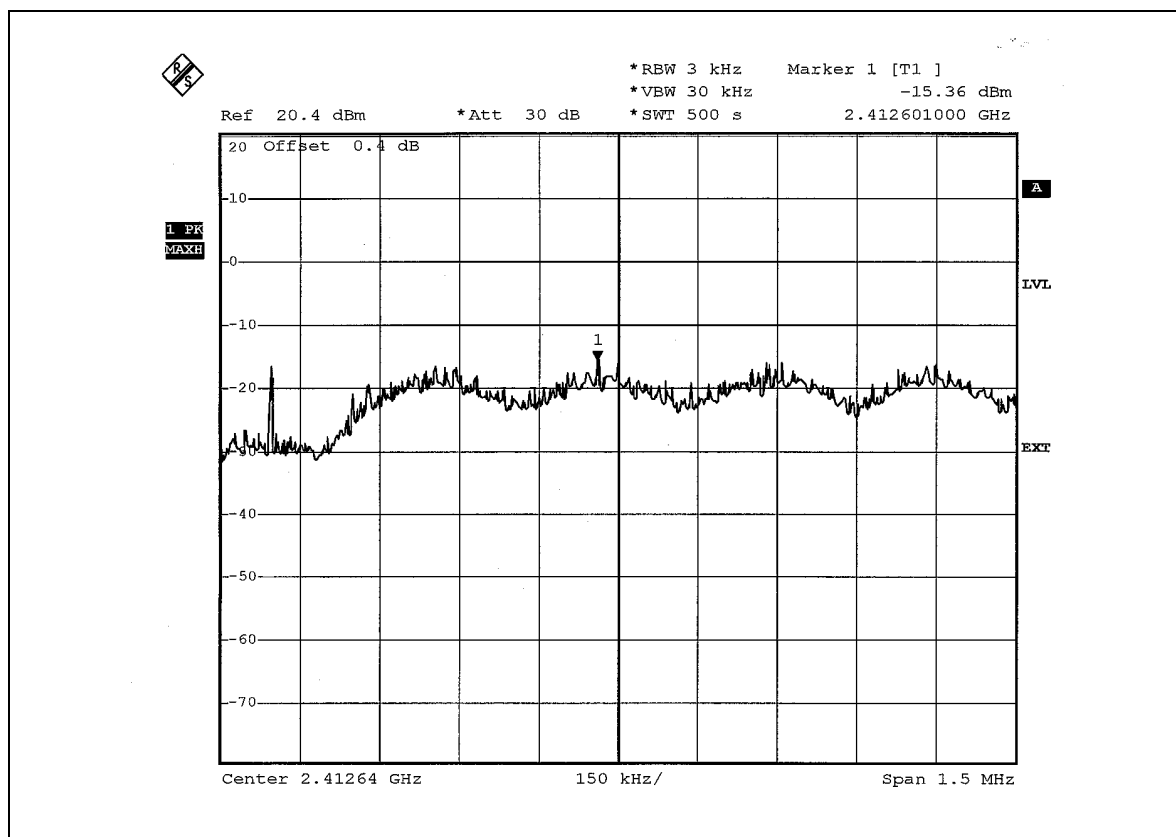

CH6

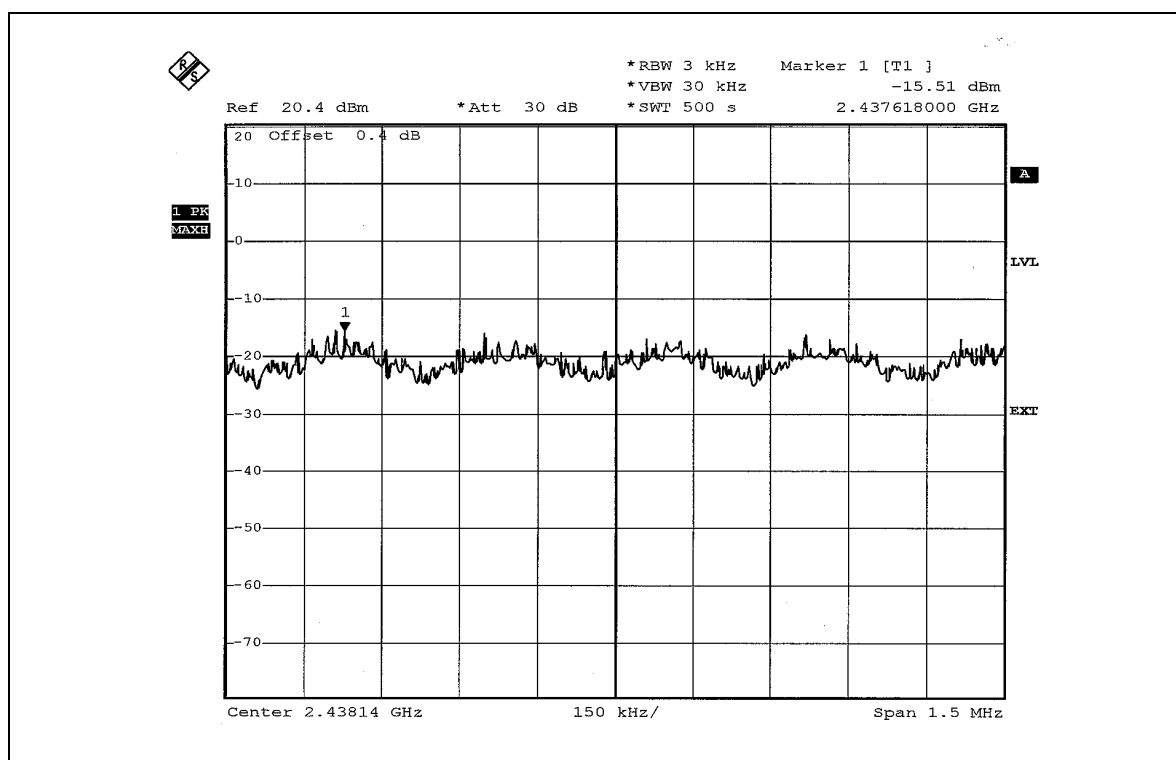

CH11

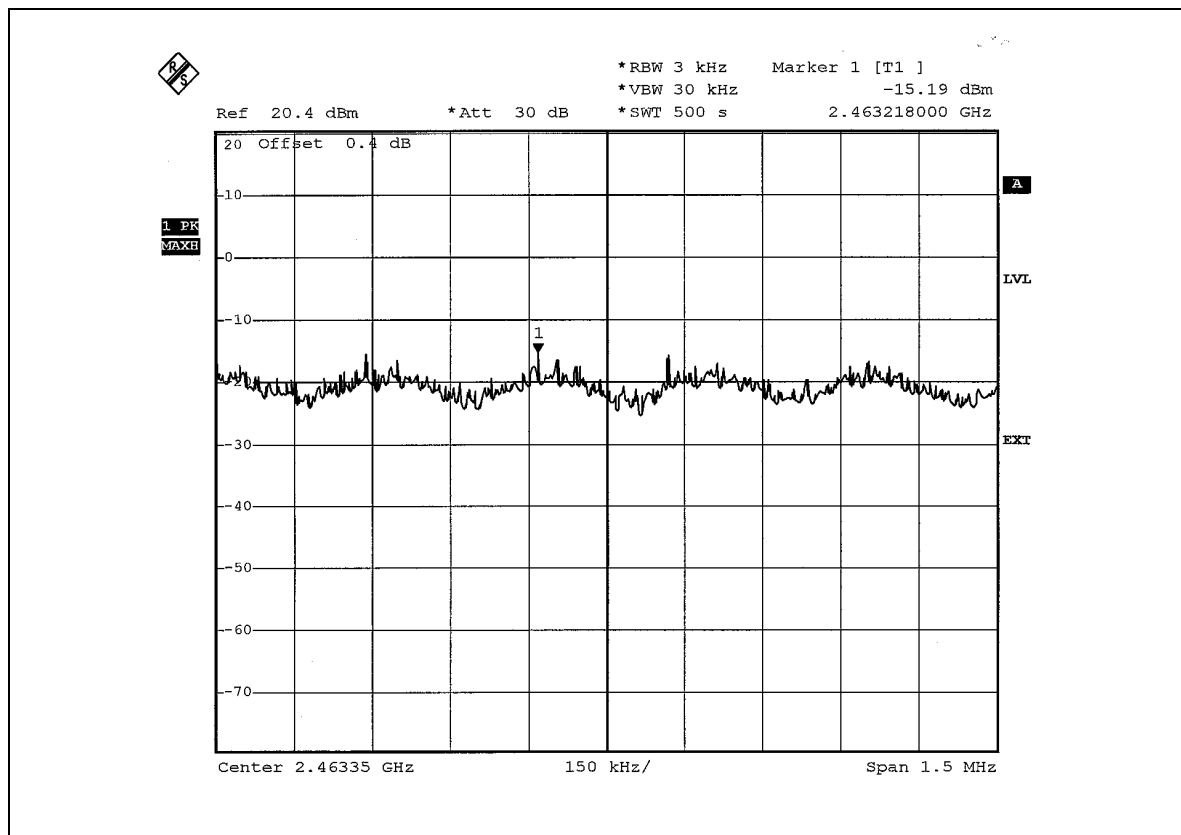




802.11g OFDM MODULATION_TURBO MODE

EUT	Professional Access Point	MODEL	5453
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg. C, 62%RH, 991hPa
TESTED BY	Match Tsui		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-17.85	8	PASS



CH6

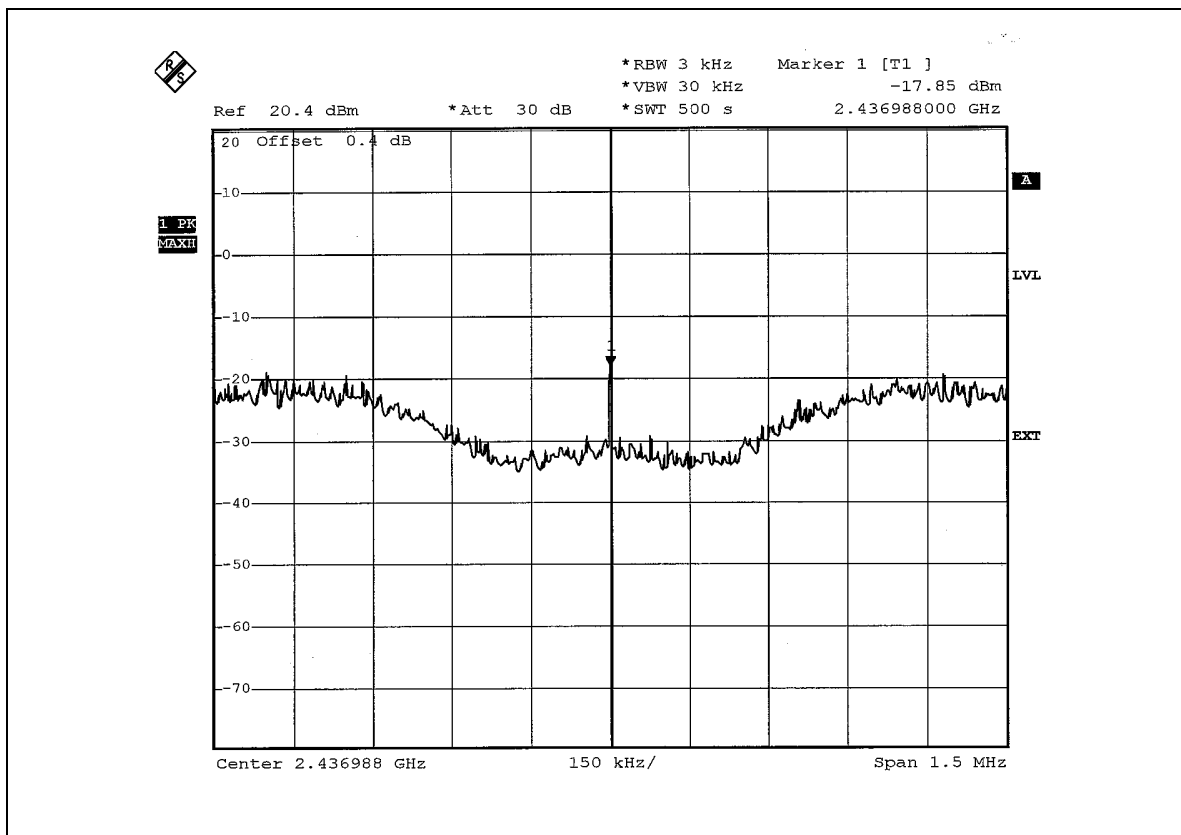

4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 14, 2006

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz; Average RBW=1MHz, VBW=1kHz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 18 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

NOTE 1:



The band edge emission plot on page 68 show 48.15dBc delta between carrier maximum power and local maximum emission in restrict band (2.3600GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 111.34dBuV/m (Peak), so the maximum field strength in restrict band is $111.34 - 48.15 = 63.19\text{dBuV/m}$, which is under 74dBuV/m limit.



The band edge emission plot on page 68 show 53.32dBc delta between carrier maximum power and local maximum emission in restrict band (2.3600GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 106.30dBuV/m (Average), so the maximum field strength in restrict band is $106.30 - 53.32 = 52.98\text{dBuV/m}$, which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on the page 69 show 53.96dBc delta between carrier maximum power and local maximum emission in restrict band (2.4934GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 112.00BuV/m (Peak), so the maximum field strength in restrict band is $112.00 - 53.96 = 58.04\text{dBuV/m}$, which is under 74dBuV/m limit.

The band edge emission plot on the page 70 show 63.32dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 106.50dBuV/m (Average), so the maximum field strength in restrict band is $106.50 - 63.32 = 43.18\text{dBuV/m}$, which is under 54dBuV/m limit.

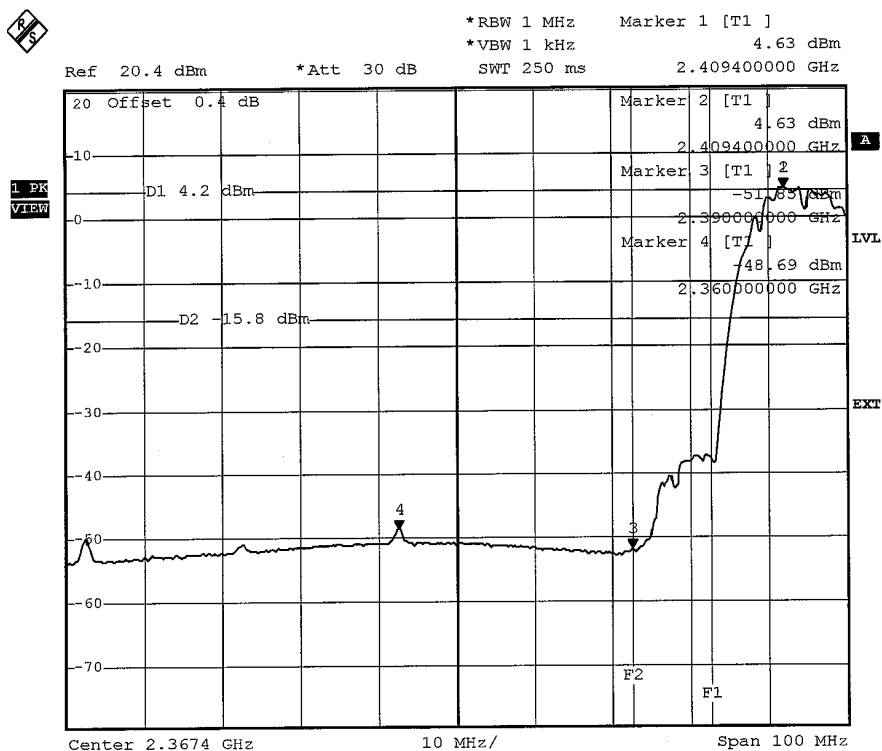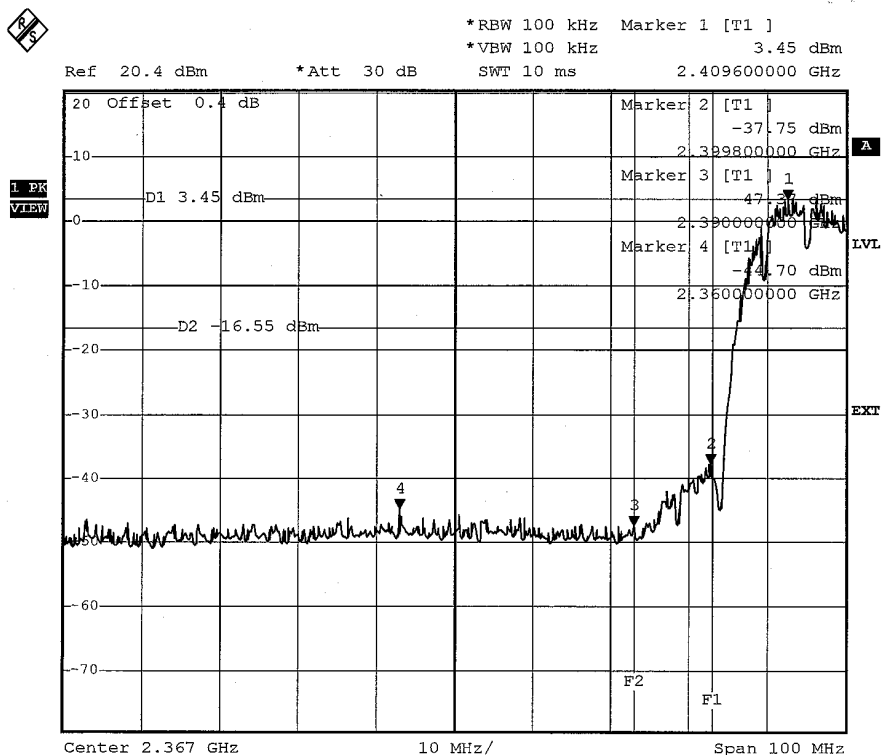

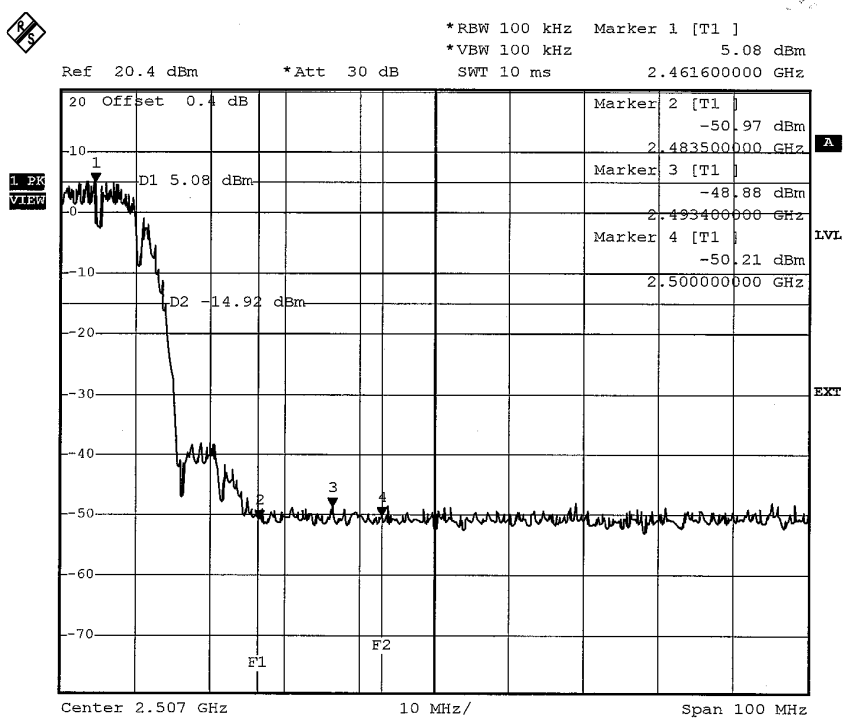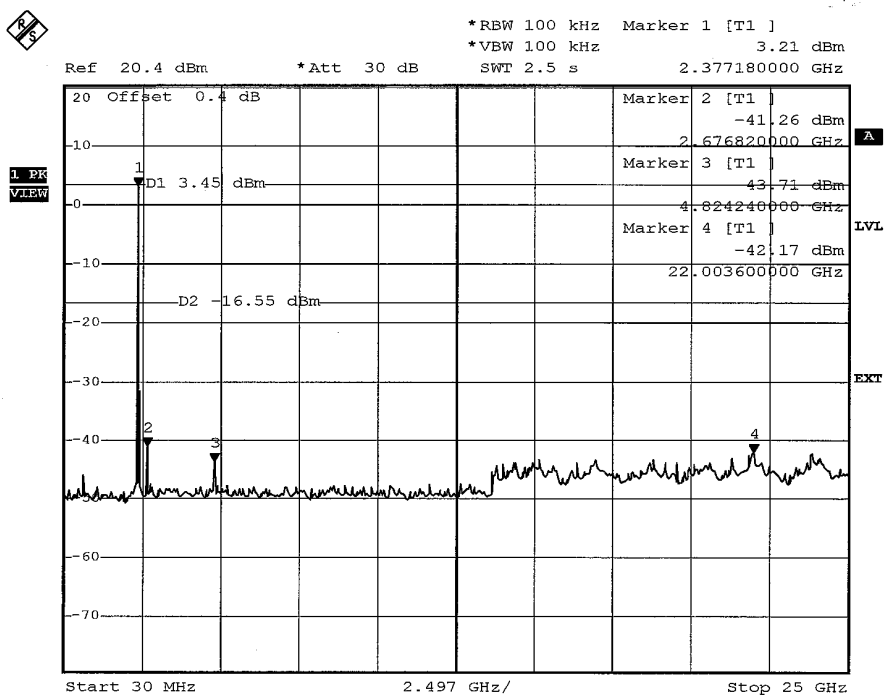

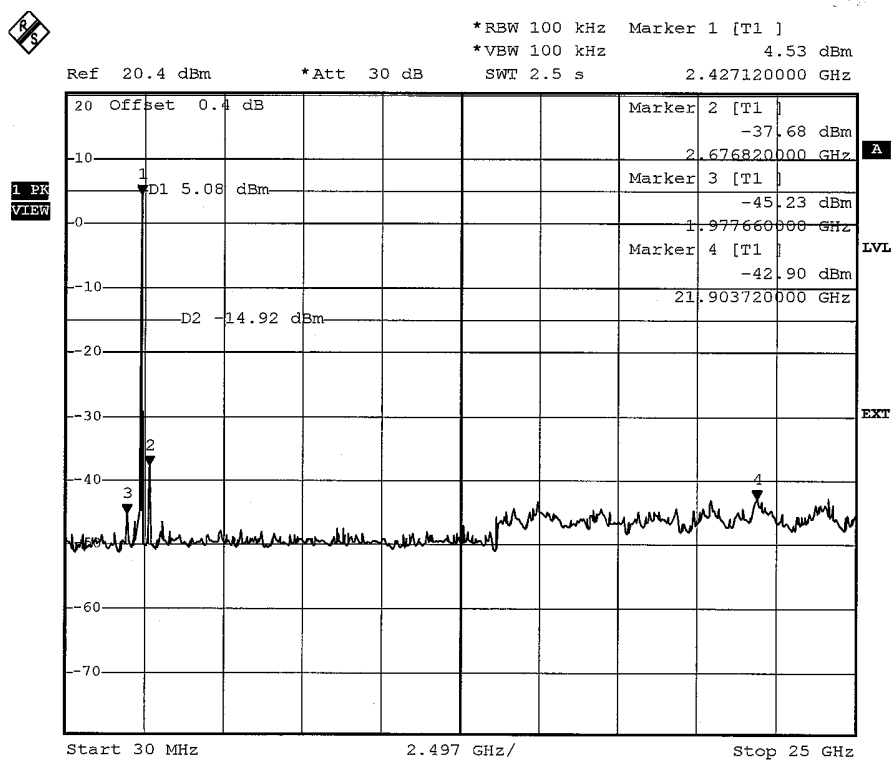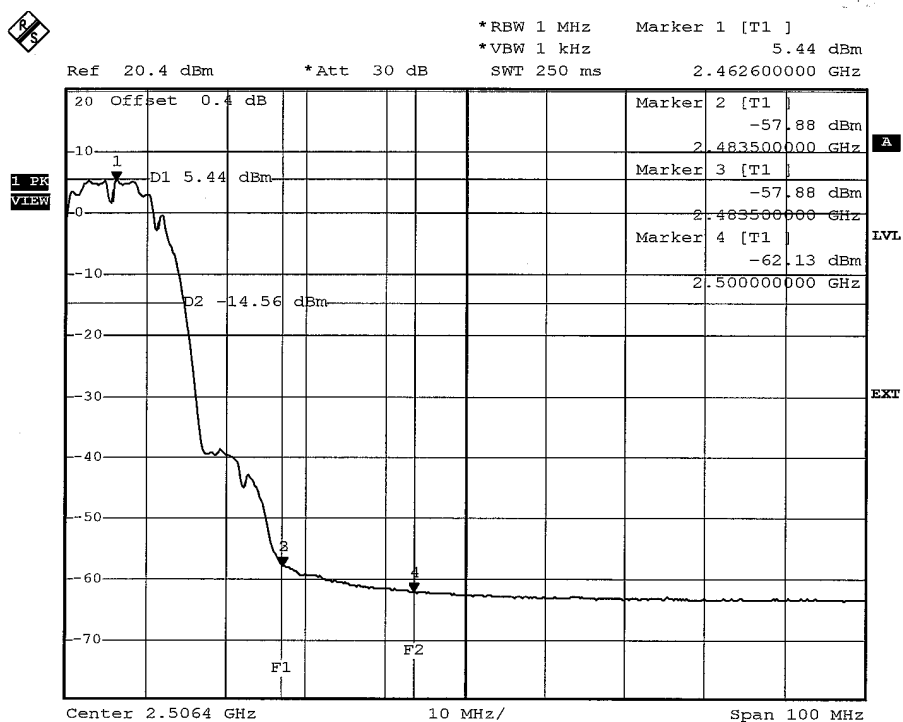

802.11g OFDM MODULATION_NORMAL MODE

NOTE 1:



The band edge emission plot on page 72 show 44.95dBc delta between carrier maximum power and local maximum emission in restrict band (2.3600GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 110.48dBuV/m (Peak), so the maximum field strength in restrict band is $110.48 - 44.95 = 65.53\text{dBuV/m}$, which is under 74dBuV/m limit.



The band edge emission plot on page 72 show 48.98 dBc delta between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 99.91dBuV/m (Average), so the maximum field strength in restrict band is $99.91 - 48.98 = 50.93\text{dBuV/m}$, which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on the page 73 show 47.58dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 111.01dBuV/m (Peak), so the maximum field strength in restrict band is $111.01 - 47.58 = 63.43\text{dBuV/m}$, which is under 74dBuV/m limit.

The band edge emission plot on the page 74 show 53.64dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 101.20dBuV/m (Average), so the maximum field strength in restrict band is $101.20 - 53.64 = 47.56\text{dBuV/m}$, which is under 54dBuV/m limit.

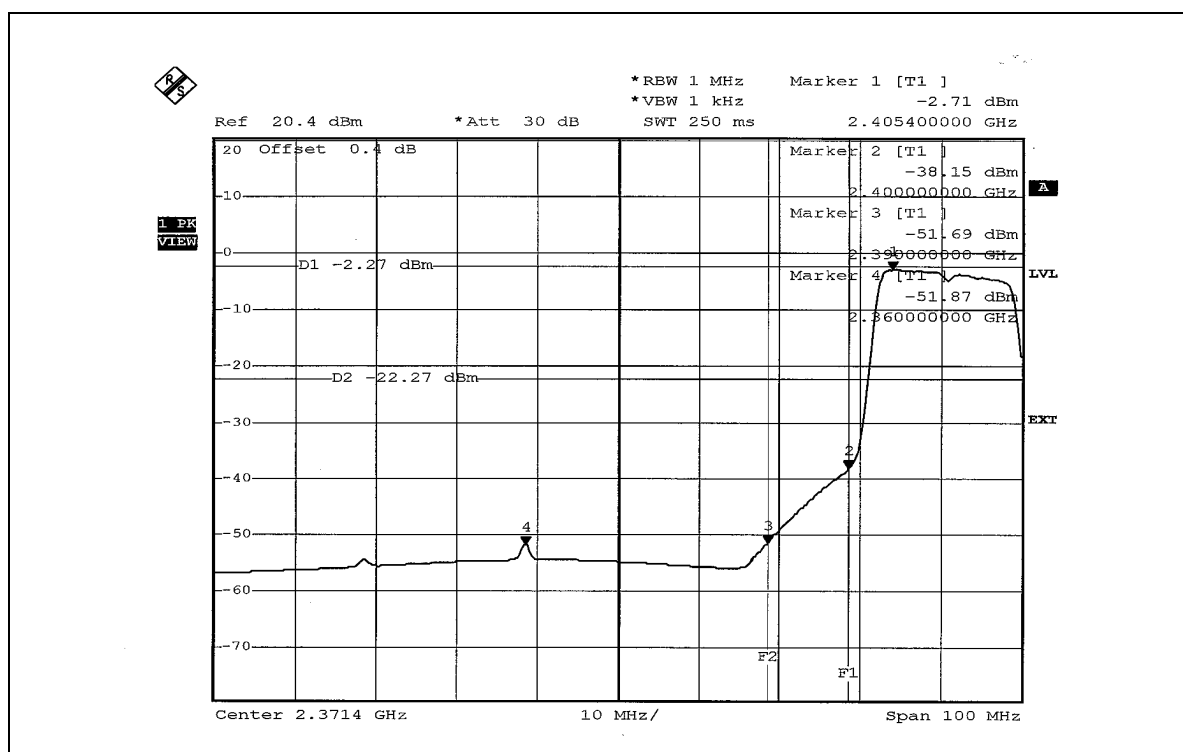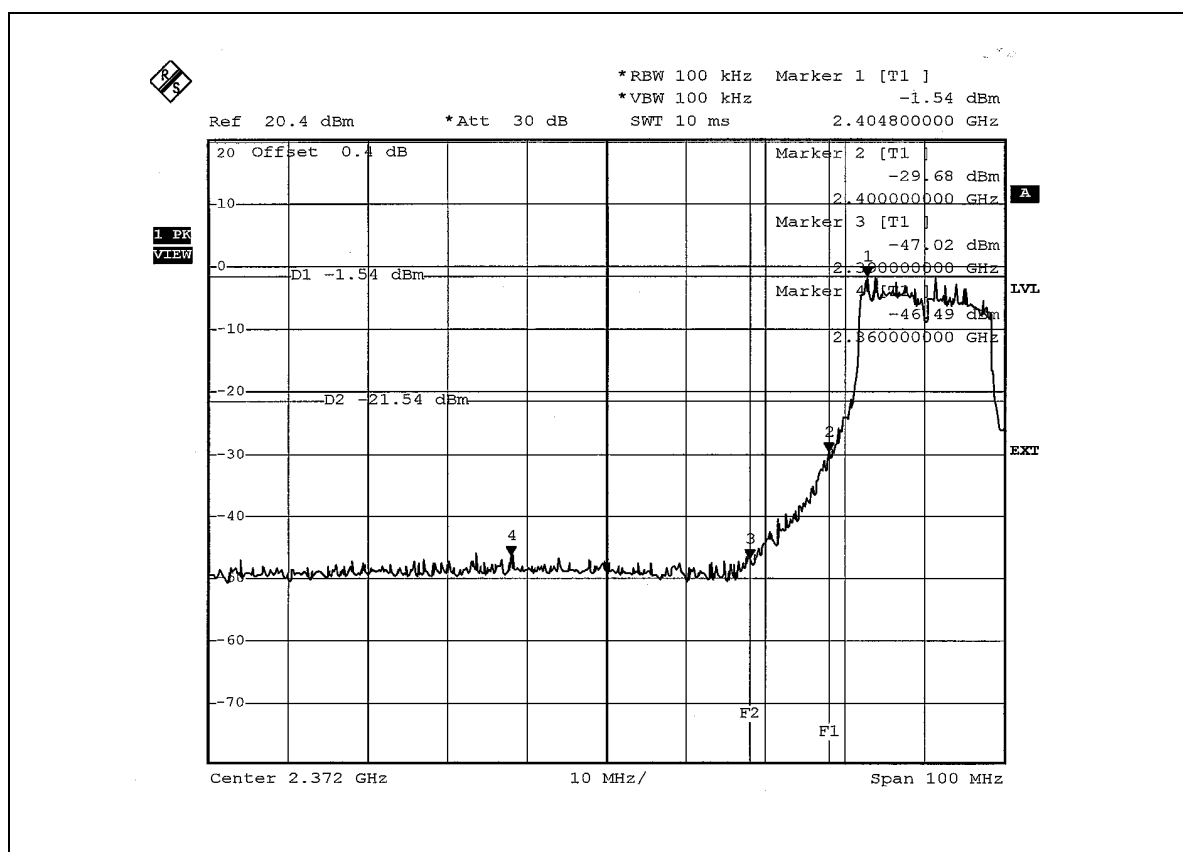

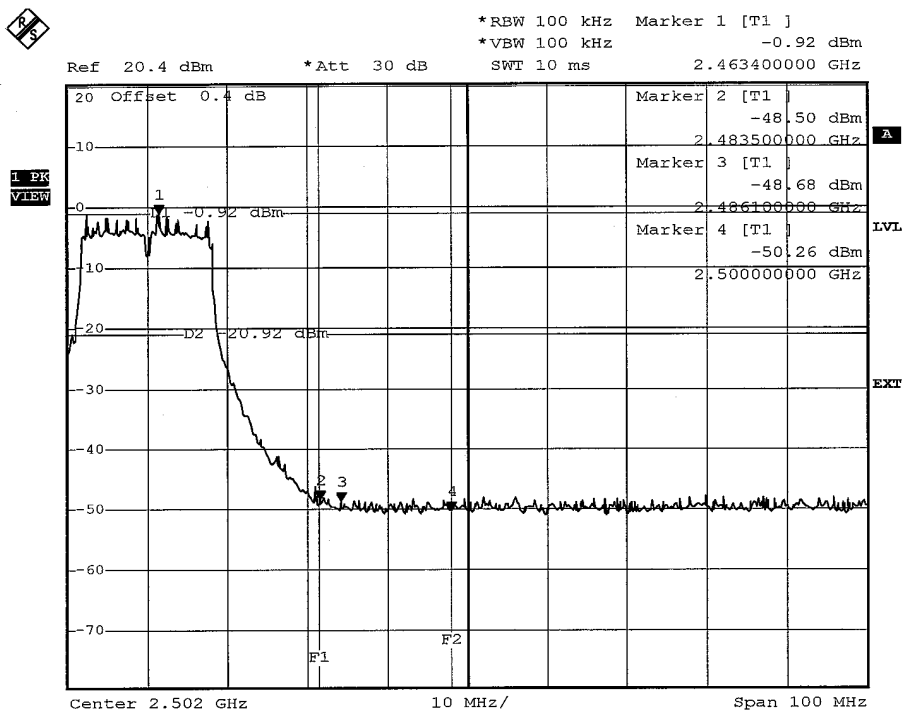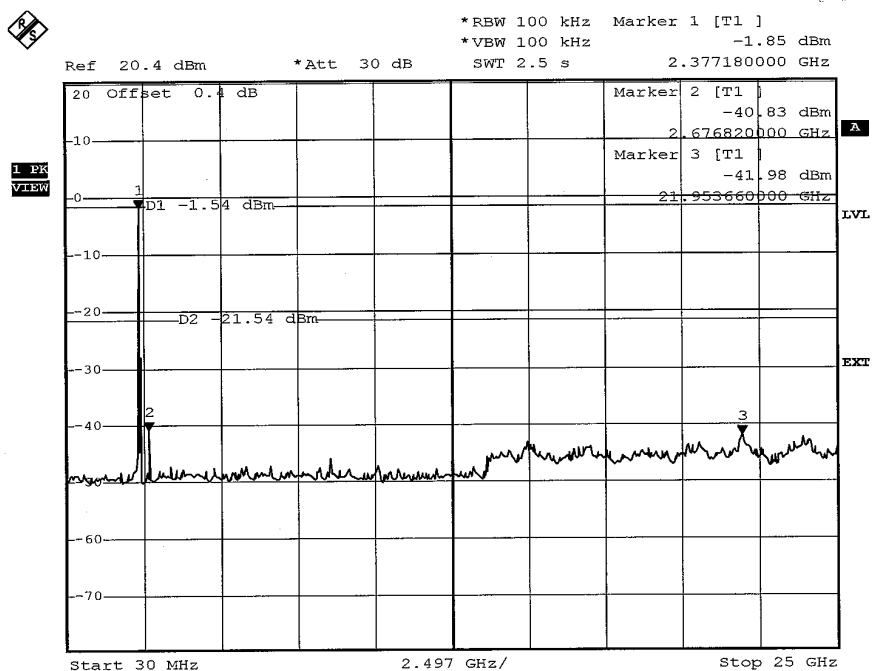

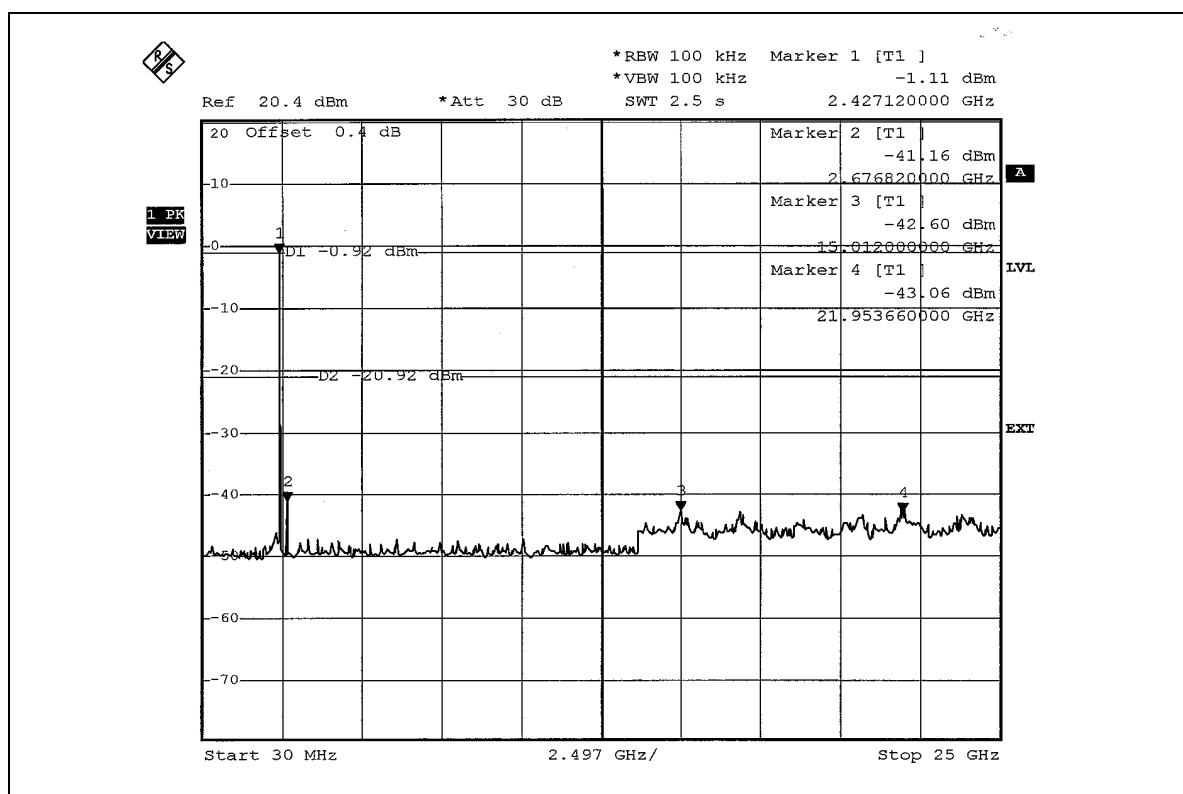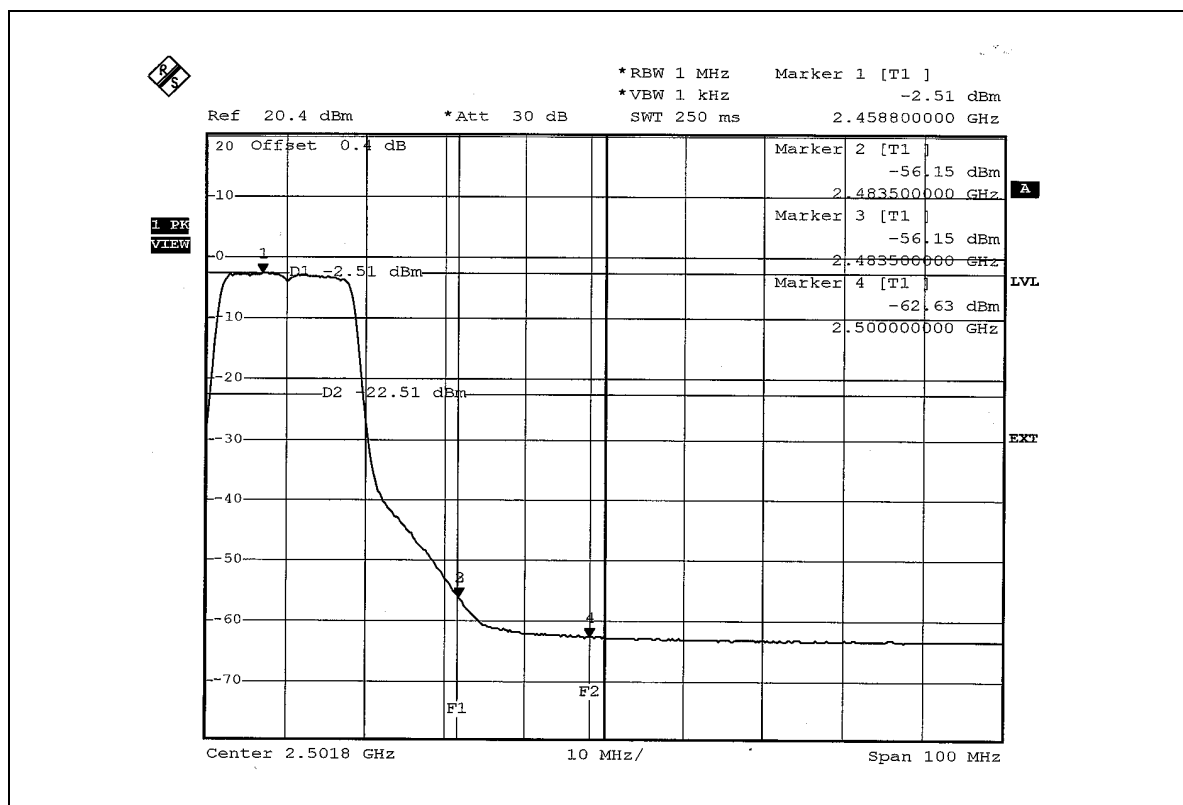



802.11g OFDM MODULATION_TURBO MODE

NOTE 1:



The band edge emission plot on page 76 show 38.56dBc delta between carrier maximum power and local maximum emission in restrict band (2.320388GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 106.76dBuV/m (Peak), so the maximum field strength in restrict band is $106.76 - 38.56 = 68.20$ dBuV/m, which is under 74dBuV/m limit.



The band edge emission plot on page 76 show 44.79dBc delta between carrier maximum power and local maximum emission in restrict band (2.3202GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 96.96dBuV/m (Average), so the maximum field strength in restrict band is $96.96 - 44.79 = 52.17$ dBuV/m, which is under 54dBuV/m limit.



NOTE 2:

The band edge emission plot on the page 77 show 45.53dBc delta between carrier maximum power and local maximum emission in restrict band (2.4855GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 106.76dBuV/m (Peak), so the maximum field strength in restrict band is $106.76 - 45.53 = 61.23$ dBuV/m, which is under 74dBuV/m limit.

The band edge emission plot on the page 78 show 54.91dBc delta between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 96.96dBuV/m (Average), so the maximum field strength in restrict band is $96.96 - 54.91 = 42.05$ dBuV/m, which is under 54dBuV/m limit.

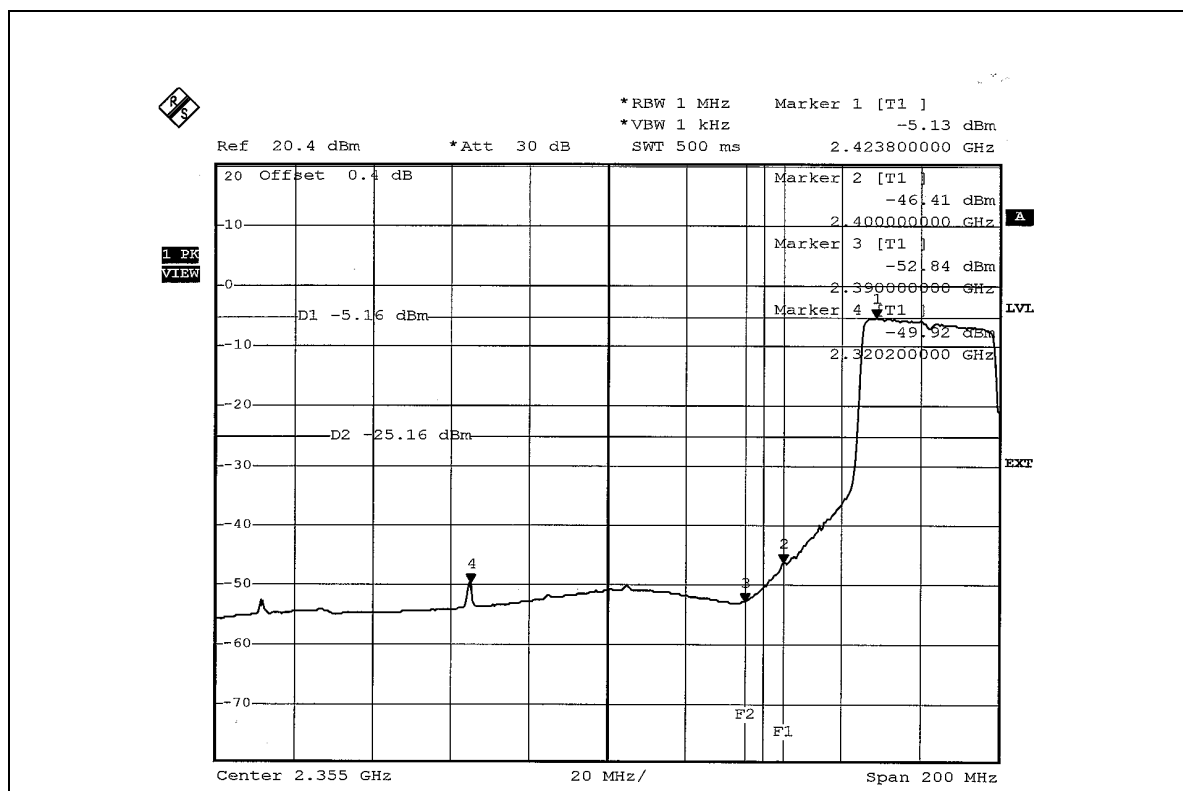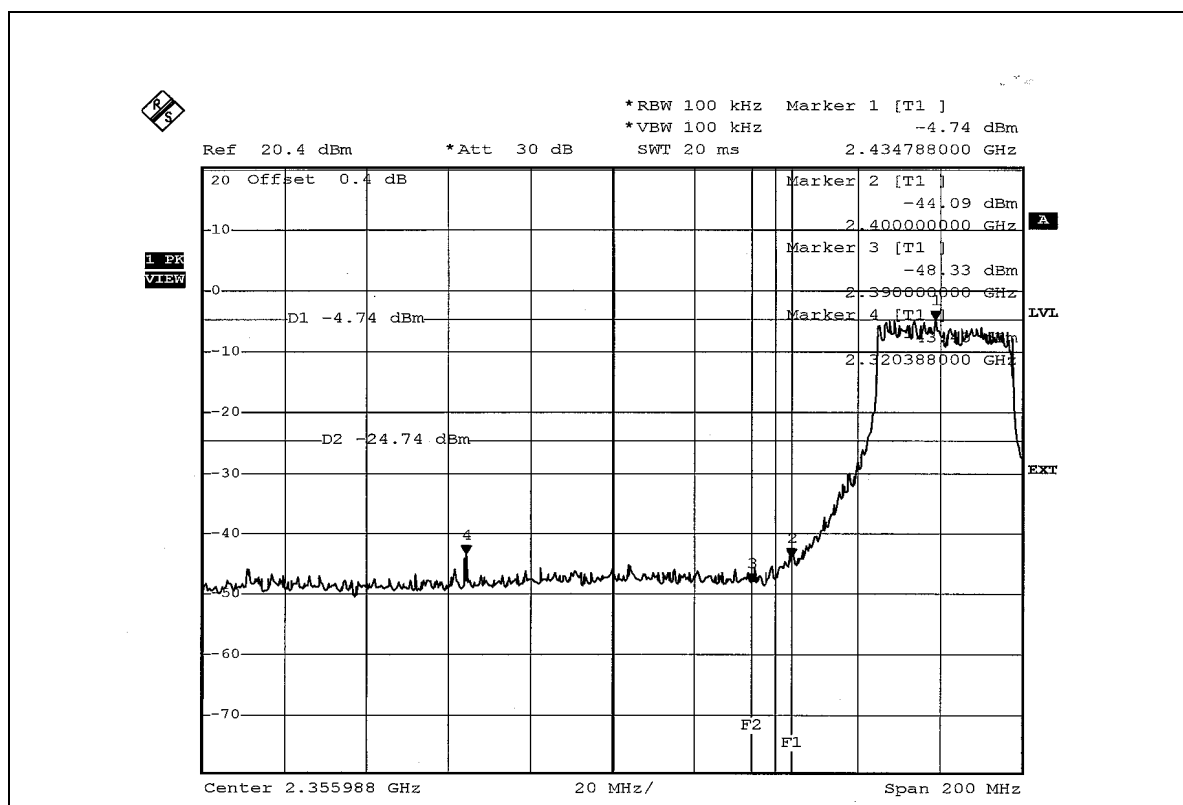

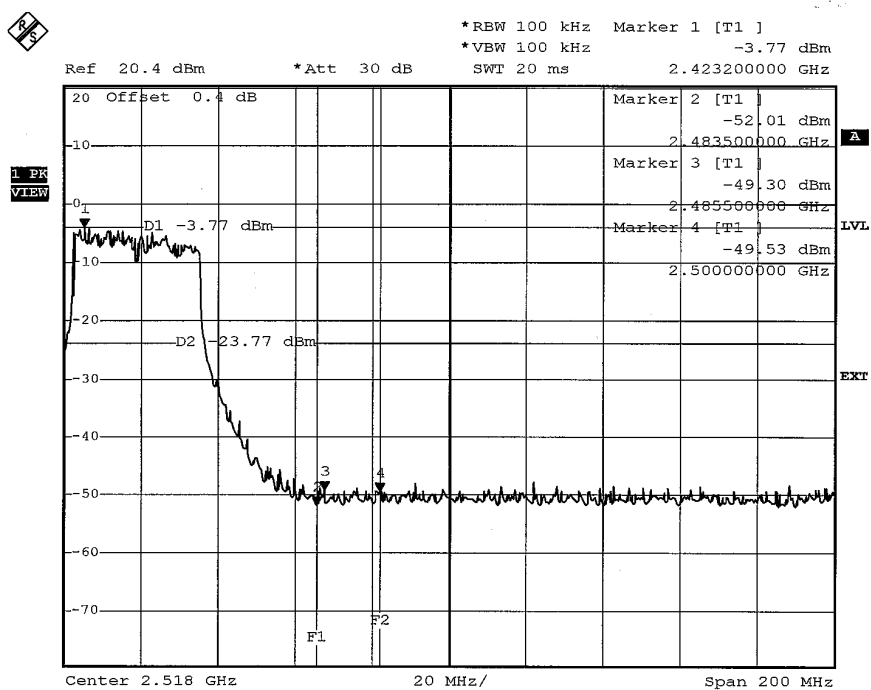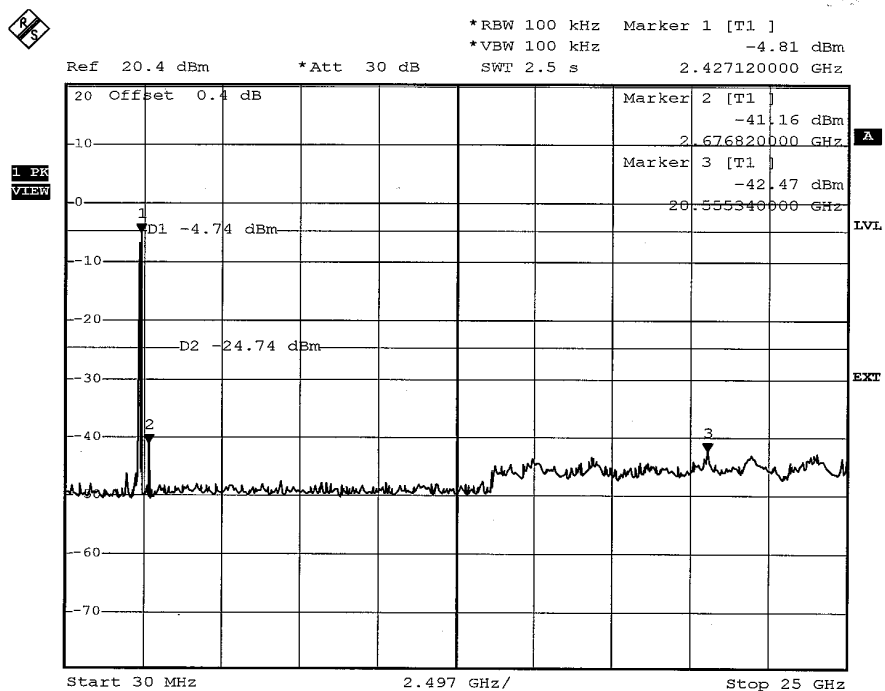

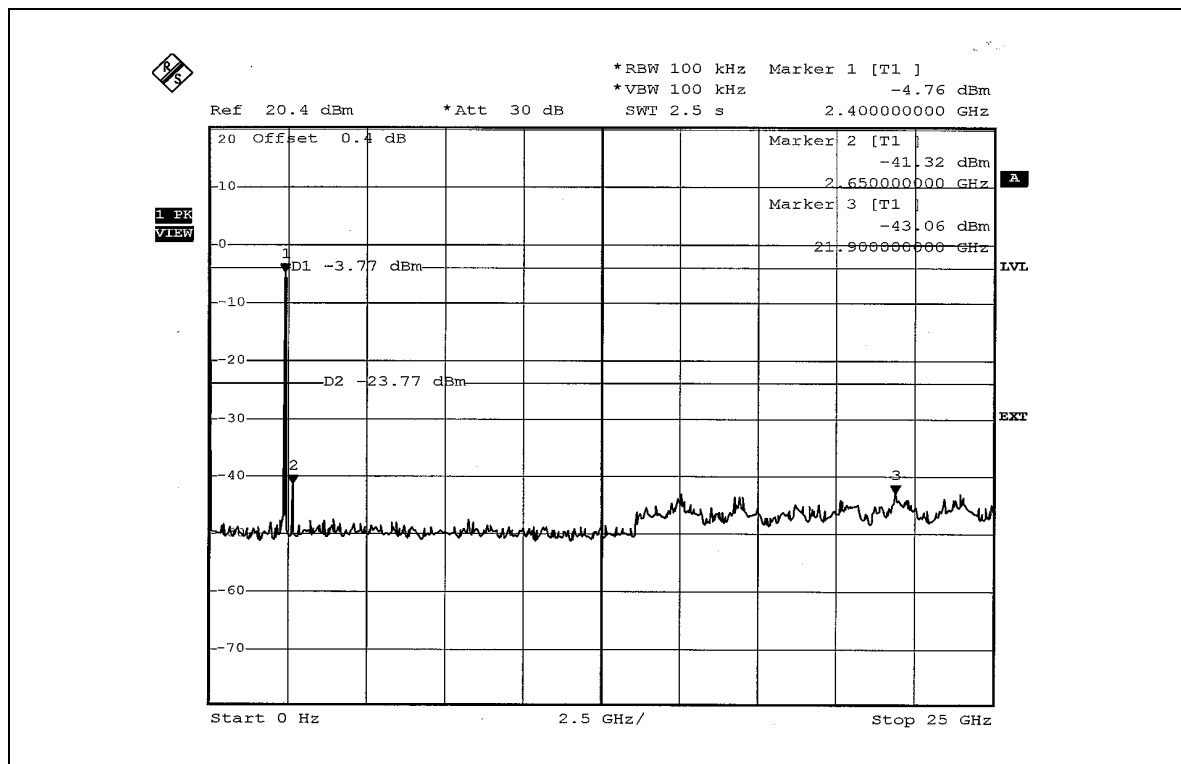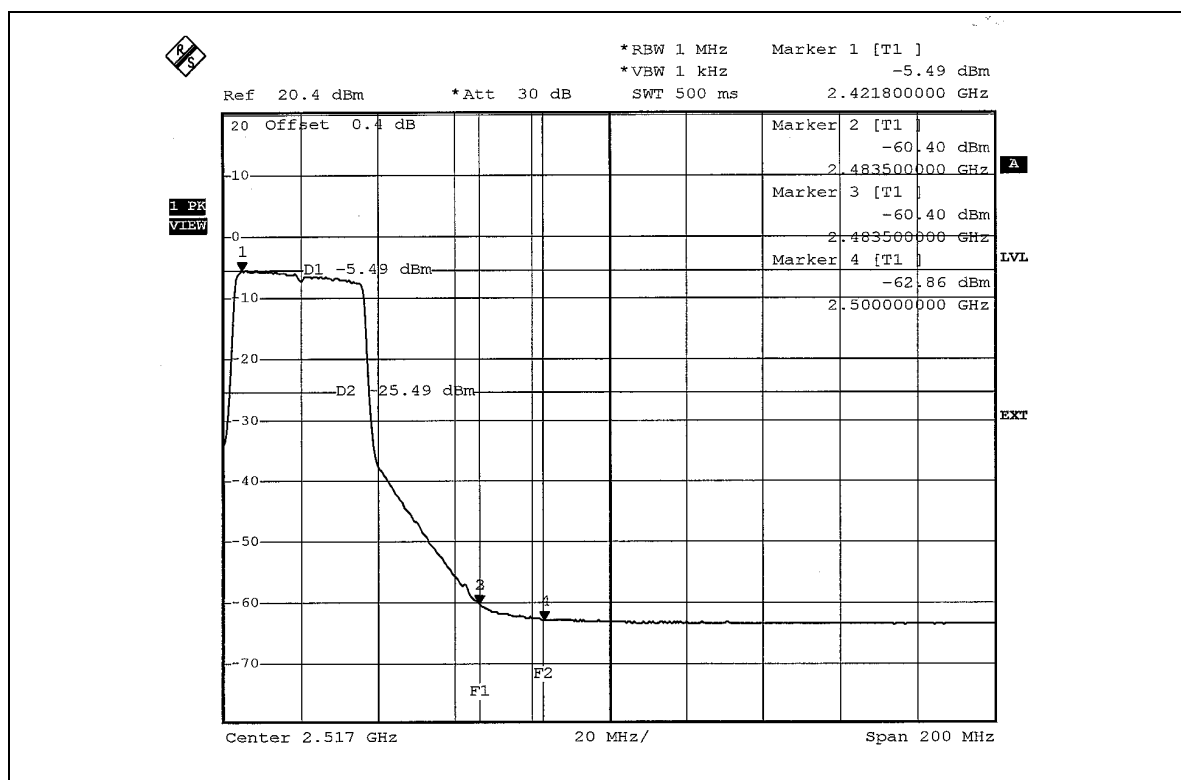



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION



The antenna used in this product is Dipole antenna with R-SMA antenna connector. The maximum Gain of the antenna is 5dBi.

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST

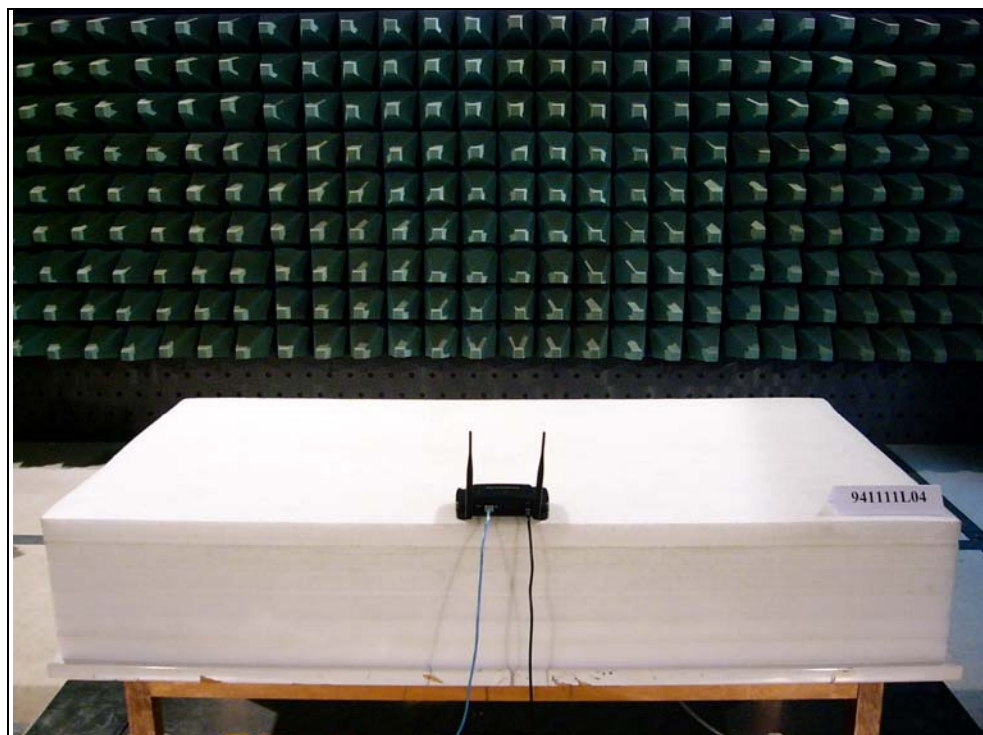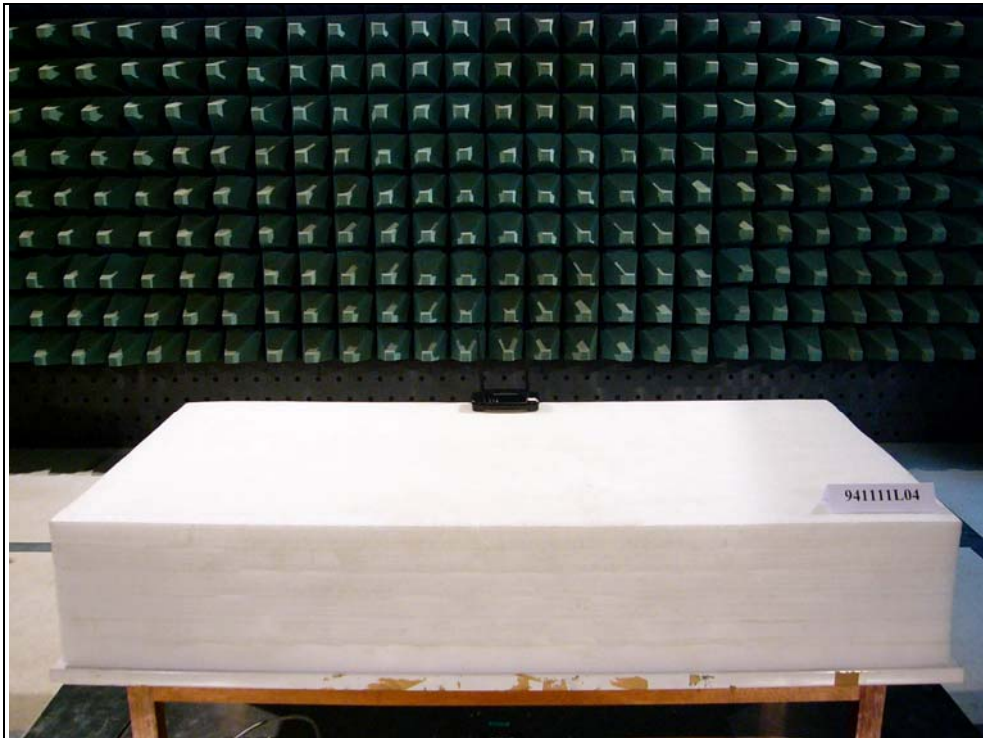



6. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also



APPENDIX-A

MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.