



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2229-2  
**FCC ID** : IHDT56AC6  
**STANDARD** : 47 CFR Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : Feb. 17, 2022 ~ Feb. 26, 2022

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Reviewed by: Derreck Chen / Supervisor

Approved by: Eric Shih / Manager



**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



## TABLE OF CONTENTS

<b>REVISION HISTORY .....</b>	<b>3</b>
<b>SUMMARY OF TEST RESULT .....</b>	<b>4</b>
<b>1 GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1 Applicant .....	5
1.2 Manufacturer .....	5
1.3 Product Feature of Equipment Under Test .....	5
1.4 Product Specification of Equipment Under Test .....	5
1.5 Modification of EUT .....	6
1.6 Testing Location .....	6
1.7 Test Software .....	6
1.8 Applicable Standards .....	6
1.9 Specification of Accessory .....	7
<b>2 RE-USE OF MEASURED DATA .....</b>	<b>8</b>
2.1 Introduction Section .....	8
2.2 Model Difference Information .....	8
2.3 Reference detail Section: .....	8
2.4 Spot Check Verification Data Section .....	9
<b>3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>	<b>10</b>
3.1 Carrier Frequency Channel .....	10
3.2 Test Mode .....	11
3.3 Connection Diagram of Test System .....	12
3.4 EUT Operation Test Setup .....	12
<b>4 TEST RESULT .....</b>	<b>13</b>
4.1 Output Power Measurement .....	13
4.2 Radiated Band Edges and Spurious Emission Measurement .....	15
4.3 Antenna Requirements .....	19
<b>5 LIST OF MEASURING EQUIPMENT .....</b>	<b>20</b>
<b>6 UNCERTAINTY OF EVALUATION .....</b>	<b>21</b>
<b>APPENDIX A. RADIATED SPURIOUS EMISSION</b>	
<b>APPENDIX B. DUTY CYCLE PLOTS</b>	
<b>APPENDIX C. SETUP PHOTOGRAPHS</b>	
<b>APPENDIX D. REFERENCE REPORT</b>	



## REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1N1011-03B	Rev. 01	Initial issue of report	Mar. 15, 2022

## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
4.1	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
4.2	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 8.61 dB at 2372.265 MHz
4.3	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago, IL60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC

222 W, Merchandise Mart Plaza, Chicago, IL60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2229-2
FCC ID	IHDT56AC6
IMEI Code	Conducted : N/A Radiation: 352303500031051/352303500032208 for Sample 1 352303500035193/352303500037645 for Sample 2
HW Version	DVT2
SW Version	STA32.48
EUT Stage	Identical Prototype

### Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two types of EUT, the difference could be referred to the XT2229-2\_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we evaluate the sample 1 to perform full test and the sample 2 verified worse cases for RSE testing.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	Bluetooth LE 1Mbps : -1.36 dBm (0.0007 W) Bluetooth LE 2Mbps : -1.34 dBm (0.0007 W)
Antenna Type / Gain	PIFA Antenna type with gain -4.8 dBi
Type of Modulation	Bluetooth LE : GFSK

Note: For BLE 1Mbps & 2Mbps mode, the whole testing has assessed only BLE 2Mbps mode by referring to their higher conducted power.



## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Location

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

<b>Test Firm</b>	Sporton International Inc. (Shenzhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH01-SZ	CN1256	421272

## 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24

## 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.



2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-201
AC Adapter 1(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-202
AC Adapter 1(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-206
AC Adapter 2(US)	Brand Name	Motorola(Acbel)	Model Name	MC-201
AC Adapter 2(EU)	Brand Name	Motorola(Acbel)	Model Name	MC-202
AC Adapter 2(AR)	Brand Name	Motorola(Acbel)	Model Name	MC-206
AC Adapter 2(CHILE)	Brand Name	Motorola(Acbel)	Model Name	MC-209
AC Adapter 3(IN)	Brand Name	Motorola(Chenyang)	Model Name	MC-204
AC Adapter 4(IN)	Brand Name	Motorola(Aohai)	Model Name	MC-204
AC Adapter 5(BR)	Brand Name	Motorola(Flex)	Model Name	MC-207
AC Adapter 6(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-207
AC Adapter 7(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-101
AC Adapter 7(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-102
AC Adapter 7(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-103
AC Adapter 7(AU)	Brand Name	Motorola(Chenyang)	Model Name	MC-105
AC Adapter 8(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-101
AC Adapter 8(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-102
AC Adapter 8(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-103
AC Adapter 8(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-105
AC Adapter 9(US)	Brand Name	Motorola(Aohai)	Model Name	MC-101
AC Adapter 9(EU)	Brand Name	Motorola(Aohai)	Model Name	MC-102
AC Adapter 9(UK)	Brand Name	Motorola(Aohai)	Model Name	MC-103
AC Adapter 10(IN)	Brand Name	Motorola(Chenyang)	Model Name	MC-104
AC Adapter 11(IN)	Brand Name	Motorola(Aohai)	Model Name	MC-104
AC Adapter 12(AU)	Brand Name	Motorola(Aohai)	Model Name	MC-105
AC Adapter 13(EU)	Brand Name	Motorola(Salom)	Model Name	SC-42
AC Adapter 14(UK)	Brand Name	Motorola(Chenyang)	Model Name	SC-43
Earphone 1	Brand Name	Motorola(Lyand)	Model Name	LYM239-76C-003
Earphone 2	Brand Name	Motorola(LCHSE)	Model Name	MEND1432B875000
USB Cable 1	Brand Name	Motorola(Yihuaxing)	Model Name	T365-011B
USB Cable 2	Brand Name	Motorola (SUNTOPS)	Model Name	336258
USB Cable 3	Brand Name	Motorola (SUNTOPS)	Model Name	336281
USB Cable 4	Brand Name	Motorola (I SHENG)	Model Name	SC18D33506
USB Cable 5	Brand Name	Motorola (Yihuaxing)	Model Name	T365-012B
Battery 1	Brand Name	Motorola(Sunwoda)	Model Name	NH50
Battery 2	Brand Name	Motorola (SCUD)	Model Name	NH50



## 2 Re-use of Measured Data

### 2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2229-2, FCC ID: IHDT56AC6) is electrically identical to the reference device (Model: XT2231-2, FCC ID: IHDT56AC3) for the portions of the circuitry corresponding to the data being re-used. Based on their similarity, the FCC Part 15C DTS (BLE) reuse the original model's result and do spot-check, following the FCC KDB 484596 D01 v01.

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AC6 .

### 2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AC3 and FCC ID: IHDT56AC6 is as below:

- Remove NFC.

Other differences and all the details of similarity and difference can be found in the confidential documents (XT2229-2\_Operational Description of Product Equality Declaration).

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. 1N1011-01 for the reference device Model: XT2231-2, FCC ID: IHDT56AC3).

### 2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID(Parent)	Type Grant/ Permissive Change	Reference Title	FCC ID Filling (Variant)	Report Title/Section
15C	DTS (BLE)	2400~2483.5	IHDT56AC2	Original Grant	1N1011-01	IHDT56AC6	All sections applicable except for RSE and Conducted Power
			IHDT56AC3	Data reuse			





## 2.4 Spot Check Verification Data Section

Conducted power test and radiated spurious emission for re-testing against the variant model based on the original model was performed in this filing.

Summary for power spot check for rule entry and technology is listed as below:

Test Item	Mode	IHDT56AC3 Parent Worst Result	IHDT56AC6 Variant Check Result	Difference (dB)
Conducted Power (dBm)	BLE 1Mbps	-0.66	-1.36	0.70
	BLE 2Mbps	-0.62	-1.34	0.72

Conclusion:

We confirm that the test data reuse policy of FCC KDB 484596 D01 Referencing Test Data v01 has been followed and the test data for AC Conduction and Conducted test items except Conducted Power as referenced from the parent model report represents compliance with new FCC ID.



### 3 Test Configuration of Equipment Under Test

#### 3.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-


### 3.2 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
Simultaneous transmission	BLE 2Mbps Ch00 + LTE Band 41 Link
<b>Remark:</b> For Radiated Test Cases, The tests were performed with Adapter 1, Earphone 1 and USB Cable 1.	

### 3.3 Connection Diagram of Test System

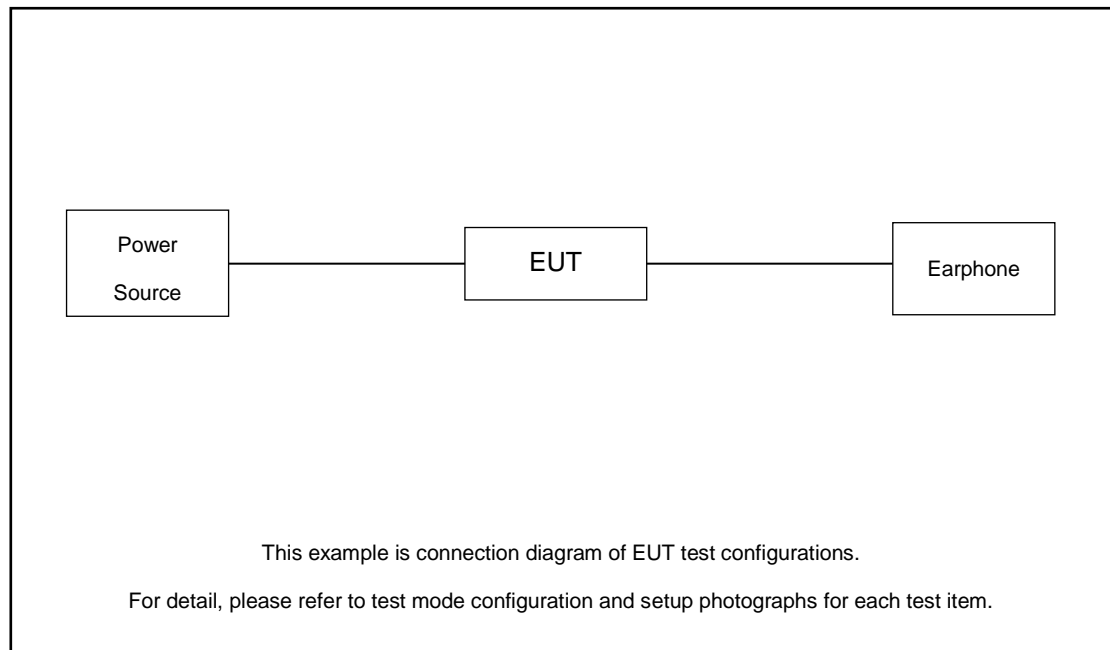

### 3.4 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

## 4 Test Result

### 4.1 Output Power Measurement

#### 4.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


#### 4.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 4.1.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

#### 4.1.4 Test Setup

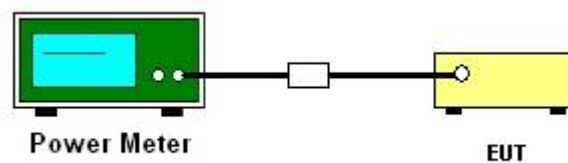

**4.1.5 Test Result of Peak Output Power**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)
BLE	1Mbps	1	0	2402	-2.13	30.00
BLE	1Mbps	1	19	2440	-1.36	30.00
BLE	1Mbps	1	39	2480	-2.33	30.00
BLE	2Mbps	1	0	2402	-2.10	30.00
BLE	2Mbps	1	19	2440	-1.34	30.00
BLE	2Mbps	1	39	2480	-2.29	30.00

**4.1.6 Test Result of Average Output Power (Reporting Only)**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
BLE	1Mbps	1	0	2402	2.16	-3.30
BLE	1Mbps	1	19	2440	2.16	-2.40
BLE	1Mbps	1	39	2480	2.16	-3.40
BLE	2Mbps	1	0	2402	5.05	-3.20
BLE	2Mbps	1	19	2440	5.05	-2.30
BLE	2Mbps	1	39	2480	5.05	-3.30



## 4.2 Radiated Band Edges and Spurious Emission Measurement

### 4.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

### 4.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.


### 4.2.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.




## 4.2.4 Test Setup


For radiated emissions below 30MHz

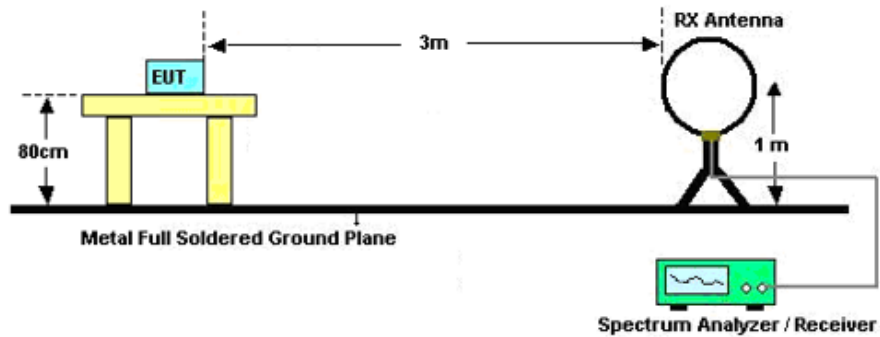

For radiated emissions from 30MHz to 1GHz

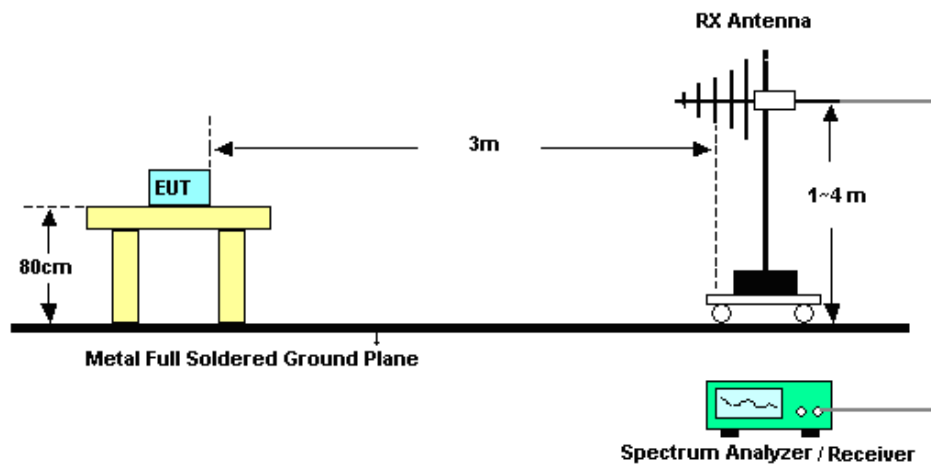

For radiated emissions above 1GHz

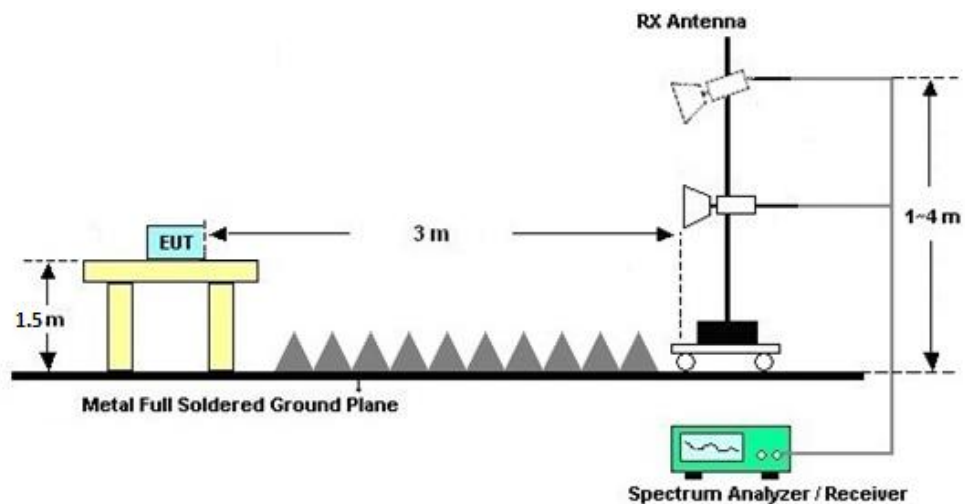



#### **4.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

#### **4.2.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix A.

#### **4.2.7 Duty Cycle**

Please refer to Appendix B.

#### **4.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix A.



## **4.3 Antenna Requirements**

### **4.3.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **4.3.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **4.3.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 08, 2021	Feb. 17, 2022	Apr. 07, 2022	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	Feb. 17, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	Feb. 17, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 21, 2021	Feb. 26, 2022	Jul. 20, 2022	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 22, 2021	Feb. 26, 2022	Jun. 21, 2022	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Jul. 15, 2021	Feb. 26, 2022	Jul. 14, 2022	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 25, 2021	Feb. 26, 2022	Jul. 24, 2022	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 11, 2021	Feb. 26, 2022	Apr. 10, 2022	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 07, 2021	Feb. 26, 2022	Apr. 06, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00 101800-30- 10P-R	1943528	1GHz~18GHz	Oct. 16, 2021	Feb. 26, 2022	Oct. 15, 2022	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 16, 2021	Feb. 26, 2022	Oct. 15, 2022	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-3 5-HG	1871923	18GHz~40GHz	Jul. 21, 2021	Feb. 26, 2022	Jul. 20, 2022	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	6160100019 85	N/A	NCR	Feb. 26, 2022	NCR	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 26, 2022	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 26, 2022	NCR	Radiation (03CH01-SZ)

NCR: No Calibration Required.

## 6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage  $K=2$  to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	2.48dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.53dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.02dB
---	--------

----- THE END -----



## Appendix A. Radiated Spurious Emission

For Sample 1:

2.4GHz 2400~2483.5MHz

BLE 2Mbps (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2325.75	54.71	-19.29	74	45.85	32	9.56	32.7	291	280	P	H
		2372.37	45.25	-8.75	54	36.3	32.03	9.62	32.7	291	280	A	H
		2402	92.25	-	-	83.3	32	9.65	32.7	291	280	P	H
		2402	91.66	-	-	82.71	32	9.65	32.7	291	280	A	H
		2323.23	55.22	-18.78	74	46.36	32	9.56	32.7	330	226	P	V
		2339.4	45.22	-8.78	54	36.24	32.1	9.58	32.7	330	226	A	V
		2402	89.41	-	-	80.46	32	9.65	32.7	330	226	P	V
		2402	88.84	-	-	79.89	32	9.65	32.7	330	226	A	V
BLE CH 19 2440MHz		2378.32	53.98	-20.02	74	45.03	32.03	9.62	32.7	281	281	P	H
		2366.14	45.19	-8.81	54	36.21	32.07	9.61	32.7	281	281	A	H
		2440	92.11	-	-	82.81	32.3	9.7	32.7	281	281	P	H
		2440	91.53	-	-	82.23	32.3	9.7	32.7	281	281	A	H
		2487.68	53.37	-20.63	74	44.21	32.1	9.76	32.7	281	281	P	H
		2497.83	45.06	-8.94	54	35.89	32.1	9.77	32.7	281	281	A	H
		2383.5	53.74	-20.26	74	44.78	32.03	9.63	32.7	365	230	P	V
		2378.74	45.21	-8.79	54	36.26	32.03	9.62	32.7	365	230	A	V
		2440	91.89	-	-	82.59	32.3	9.7	32.7	365	230	P	V
		2440	91.33	-	-	82.03	32.3	9.7	32.7	365	230	A	V
		2487.68	54.41	-19.59	74	45.25	32.1	9.76	32.7	365	230	P	V
		2495.66	45.15	-8.85	54	35.99	32.1	9.76	32.7	365	230	A	V



<b>BLE CH 39 2480MHz</b>		2480	90.84	-	-	81.62	32.17	9.75	32.7	272	271	P	H
		2480	90.12	-	-	80.9	32.17	9.75	32.7	272	271	A	H
		2484.72	54.58	-19.42	74	45.36	32.17	9.75	32.7	272	271	P	H
		2497.92	45.18	-8.82	54	36.01	32.1	9.77	32.7	272	271	A	H
		2480	89	-	-	79.78	32.17	9.75	32.7	395	230	P	V
		2480	88.18	-	-	78.96	32.17	9.75	32.7	395	230	A	V
		2484.28	53.85	-20.15	74	44.63	32.17	9.75	32.7	395	230	P	V
		2491.88	45.19	-8.81	54	36.03	32.1	9.76	32.7	395	230	A	V
<b>Remark</b>	<ol style="list-style-type: none"><li>1. No other spurious found.</li><li>2. All results are PASS against Peak and Average limit line.</li></ol>												



**2.4GHz 2400~2483.5MHz**  
**BLE 2Mbps (Harmonic @ 3m)**

BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	43.34	-30.66	74	49.59	33.9	12	52.15	-	-	P	H
		4804	43.16	-30.84	74	49.41	33.9	12	52.15	-	-	P	V
BLE CH 19 2440MHz		4880	43.49	-30.51	74	49.81	33.73	12.05	52.1	-	-	P	H
		7320	46.66	-27.34	74	48.49	35.77	14.17	51.77	-	-	P	H
		4880	44.13	-29.87	74	50.45	33.73	12.05	52.1	-	-	P	V
		7320	47	-27	74	48.83	35.77	14.17	51.77	-	-	P	V
BLE CH 39 2480MHz		4960	43.49	-30.51	74	49.7	33.73	12.09	52.03	-	-	P	H
		7440	47.14	-26.86	74	48.76	35.79	14.24	51.65	-	-	P	H
		4960	43.4	-30.6	74	49.61	33.73	12.09	52.03	-	-	P	V
		7440	48.2	-25.8	74	49.82	35.79	14.24	51.65	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												





## Emission below 1GHz

## BLE 2Mbps (LF)

BLE	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE LF		46.49	19.69	-20.31	40	32.34	20.26	2.15	35.06	-	-	P	H
		102.75	19.57	-23.93	43.5	37.04	15.26	2.46	35.19	-	-	P	H
		201.69	21.7	-21.8	43.5	37.6	16.45	2.75	35.1	-	-	P	H
		328.76	21.67	-24.33	46	32.82	20.54	3.21	34.9	-	-	P	H
		384.05	22.54	-23.46	46	32.32	21.77	3.28	34.83	-	-	P	H
		577.08	24.56	-21.44	46	30	25.33	3.78	34.55	-	-	P	H
		43.58	30.37	-9.63	40	43.24	20.1	2.07	35.04	-	-	P	V
		99.84	21.67	-21.83	43.5	39.66	14.75	2.46	35.2	-	-	P	V
		178.41	22.27	-21.23	43.5	36.52	18.19	2.66	35.1	-	-	P	V
		206.54	20.51	-22.99	43.5	36.3	16.54	2.76	35.09	-	-	P	V
		427.7	21.95	-24.05	46	30.75	22.64	3.3	34.74	-	-	P	V
		574.17	24.81	-21.19	46	30.32	25.27	3.77	34.55	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



For Sample 2:

## 2.4GHz 2400~2483.5MHz

## BLE 2Mbps (Band Edge @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2363.13	54.95	-19.05	74	45.97	32.07	9.61	32.7	289	276	P	H
		2367.015	45.37	-8.63	54	36.39	32.07	9.61	32.7	289	276	A	H
		2402	93.37	-	-	84.42	32	9.65	32.7	289	276	P	H
		2402	92.57	-	-	83.62	32	9.65	32.7	289	276	A	H
		2387.175	54.57	-19.43	74	45.64	32	9.63	32.7	372	246	P	V
		2366.07	45.32	-8.68	54	36.34	32.07	9.61	32.7	372	246	A	V
		2402	88.57	-	-	79.62	32	9.65	32.7	372	246	P	V
		2402	87.49	-	-	78.54	32	9.65	32.7	372	246	A	V
Remark		1. No other spurious found. 2. All results are PASS against limit line.											

## 2.4GHz 2400~2483.5MHz

## BLE 2Mbps (Harmonic @ 3m)

BLE	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		4804	45.96	-28.04	74	52.21	33.9	12	52.15	-	-	P	H
		4804	44.14	-29.86	74	50.39	33.9	12	52.15	-	-	P	V
Remark		1. No other spurious found. 2. All results are PASS against limit line.											



For Simultaneous transmission:

## BLE 2Mbps CH00 + LTE Band 41 Link (Band Edge @ 3m)

	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE 2Mbps CH00 + LTE Band 41 Link		2321.025	55.59	-18.41	74	46.73	32	9.56	32.7	289	282	P	H
		2372.265	45.39	-8.61	54	36.44	32.03	9.62	32.7	289	282	A	H
		2402	92.66	-	-	83.71	32	9.65	32.7	289	282	P	H
		2402	92.05	-	-	83.1	32	9.65	32.7	289	282	A	H
		2382.03	54.3	-19.7	74	45.34	32.03	9.63	32.7	369	247	P	V
		2367.75	45.08	-8.92	54	36.1	32.07	9.61	32.7	369	247	A	V
		2402	88.66	-	-	79.71	32	9.65	32.7	369	247	P	V
		2402	88.05	-	-	79.1	32	9.65	32.7	369	247	A	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

## BLE 2Mbps CH00 + LTE B41 Link (Harmonic @ 3m)

	Note	Frequency ( MHz )	Level ( dBμV/m )	Over Limit ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE 2Mbps CH00 + LTE Band 41 Link		4804	45.31	-28.69	74	51.56	33.9	12	52.15	-	-	P	H
		4804	45.09	-28.91	74	51.34	33.9	12	52.15	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>over limit</b> line.
P/A	<b>P</b> eak or <b>A</b> verage
H/V	<b>H</b> orizontal or <b>V</b> ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
1		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

#### For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

#### For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

## Appendix B. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 2Mbps	31.29	0.196	5.092	10kHz

### Bluetooth LE 2Mbps

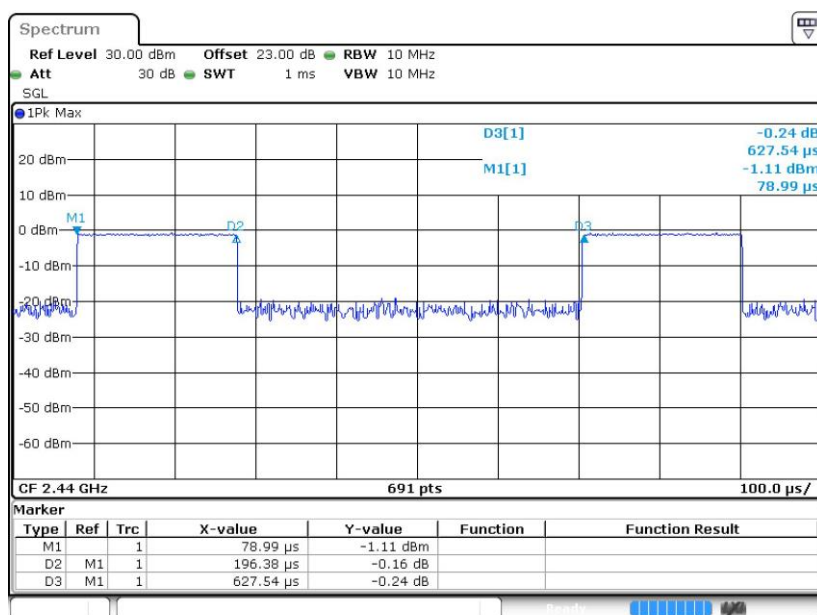



## **Appendix D. Reference Report**

Please refer to Sporton report number 1N1011-01 which is issued separately.