


Site: AC2	Time: 2019/12/06 - 00:12
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz	

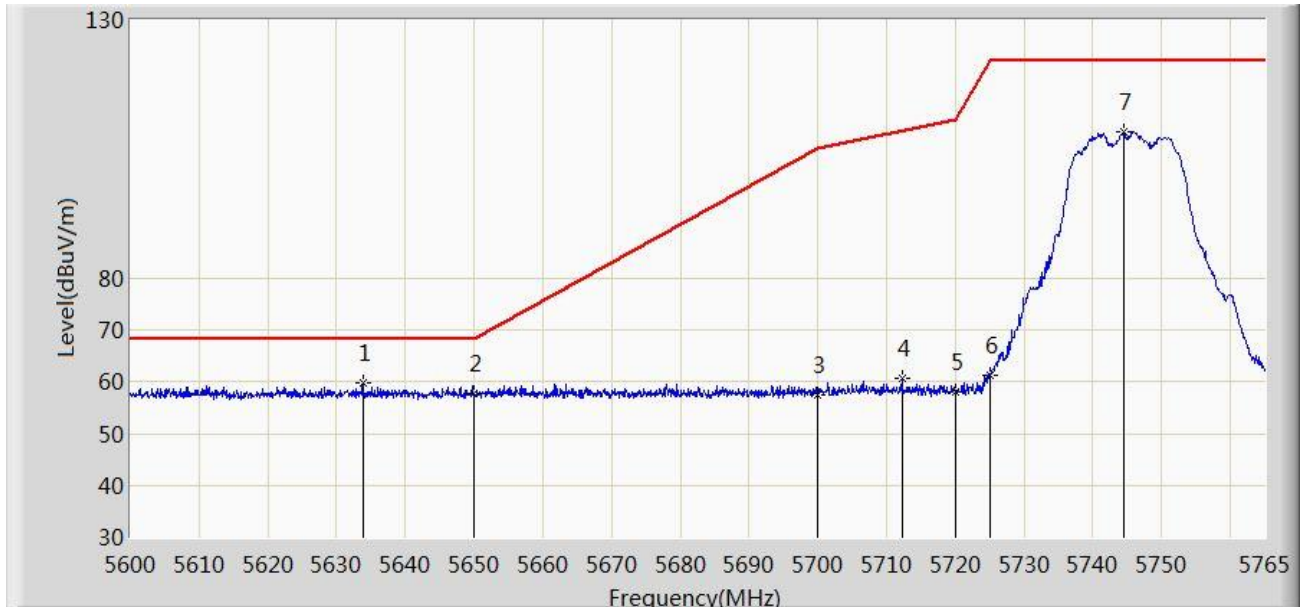


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5633.825	59.818	54.625	-8.382	68.200	5.192	PK
2			5650.000	57.770	52.434	-10.430	68.200	5.336	PK
3			5700.000	57.552	52.234	-47.648	105.200	5.318	PK
4			5712.200	60.741	55.273	-47.878	108.618	5.467	PK
5			5720.000	58.055	52.581	-52.745	110.800	5.474	PK
6			5725.000	61.395	55.917	-60.805	122.200	5.478	PK
7			5744.540	108.272	102.674	N/A	N/A	5.599	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:14
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5745MHz	

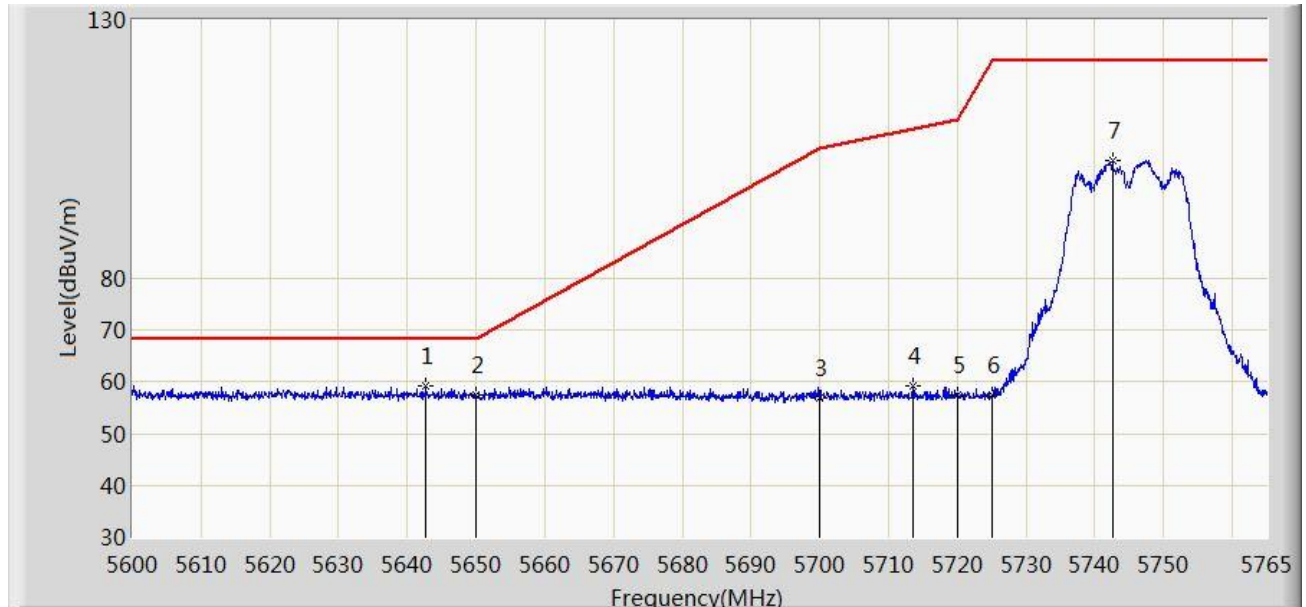


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5642.652	59.209	53.993	-8.991	68.200	5.216	PK
2			5650.000	57.430	52.094	-10.770	68.200	5.336	PK
3			5700.000	57.024	51.706	-48.176	105.200	5.318	PK
4			5713.520	59.132	53.663	-49.856	108.988	5.469	PK
5			5720.000	57.554	52.080	-53.246	110.800	5.474	PK
6			5725.000	57.350	51.872	-64.850	122.200	5.478	PK
7			5742.643	102.903	97.337	N/A	N/A	5.566	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:15
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz	

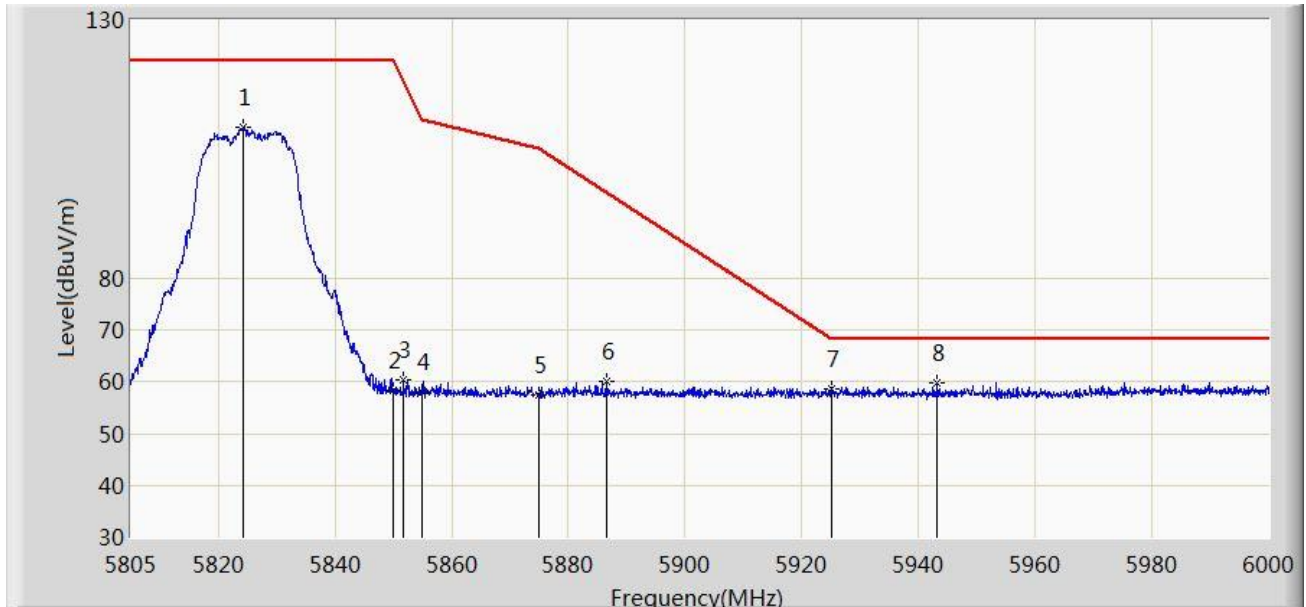


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5824.305	109.375	103.601	N/A	N/A	5.773	PK
2			5850.000	58.265	52.296	-63.935	122.200	5.968	PK
3			5851.703	60.496	54.525	-57.820	118.316	5.971	PK
4			5855.000	58.051	52.076	-52.749	110.800	5.975	PK
5			5875.000	57.603	51.590	-47.597	105.200	6.013	PK
6			5886.510	60.011	53.985	-36.644	96.655	6.027	PK
7			5925.000	58.623	52.488	-9.577	68.200	6.136	PK
8		*	5943.255	59.786	53.700	-8.414	68.200	6.086	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:18
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5825MHz	

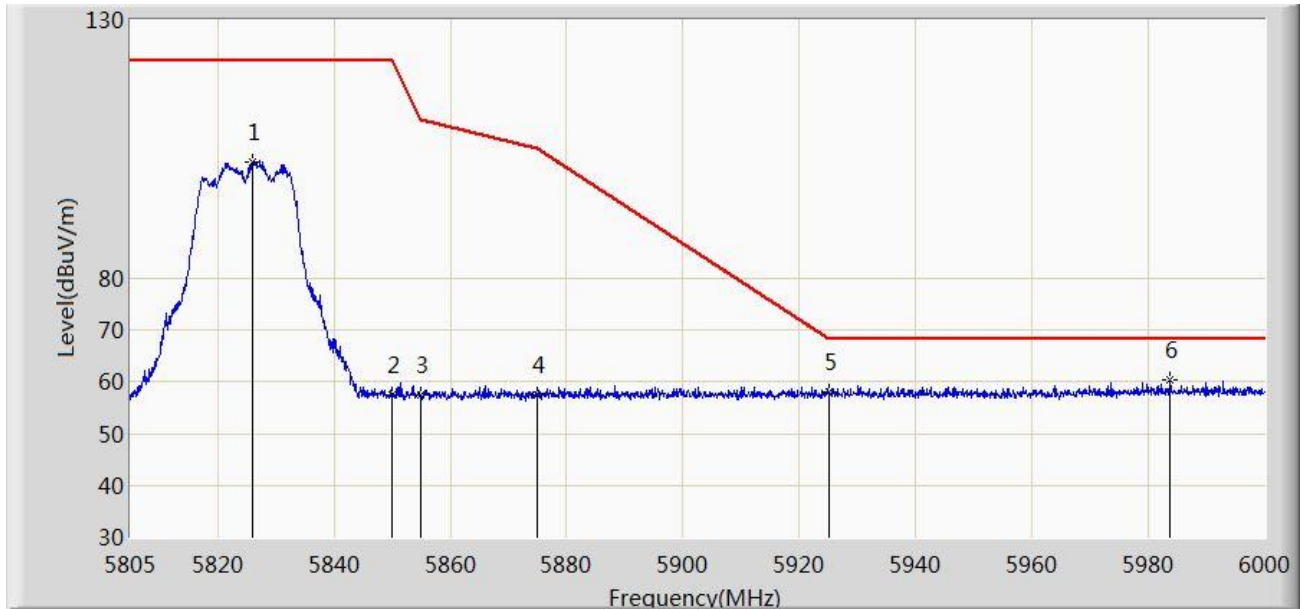


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5826.060	102.518	96.759	N/A	N/A	5.759	PK
2			5850.000	57.392	51.423	-64.808	122.200	5.968	PK
3			5855.000	57.346	51.371	-53.454	110.800	5.975	PK
4			5875.000	57.619	51.606	-47.581	105.200	6.013	PK
5			5925.000	58.085	51.950	-10.115	68.200	6.136	PK
6		*	5983.717	60.448	53.975	-7.752	68.200	6.472	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:21
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

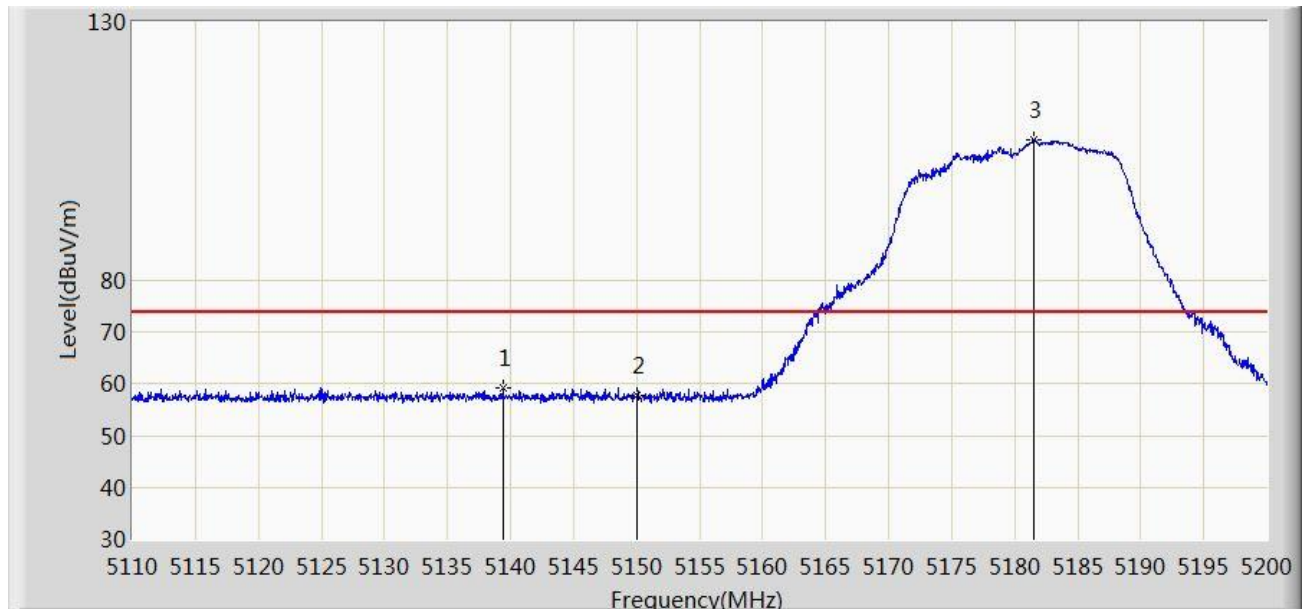


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5139.385	59.319	54.898	-8.881	68.200	4.421	PK
2			5150.000	57.632	53.190	-10.568	68.200	4.442	PK
3		*	5181.505	107.228	102.756	N/A	N/A	4.471	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:26
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

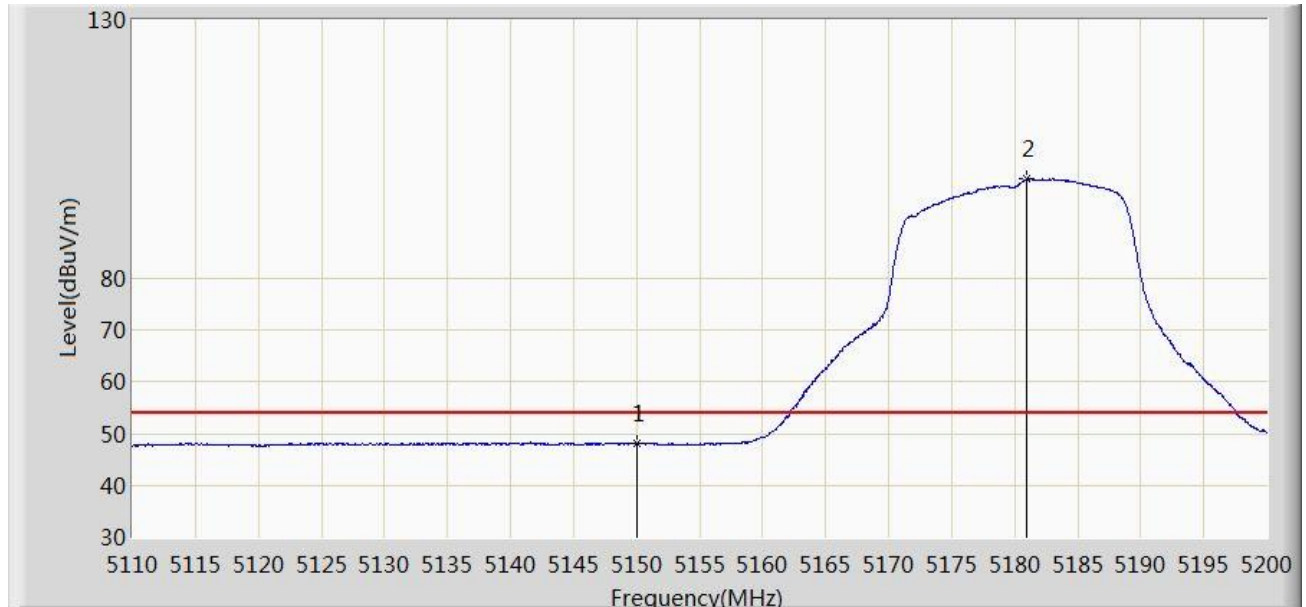


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.097	43.655	-5.903	54.000	4.442	AV
2		*	5180.965	99.207	94.730	N/A	N/A	4.477	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:27
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

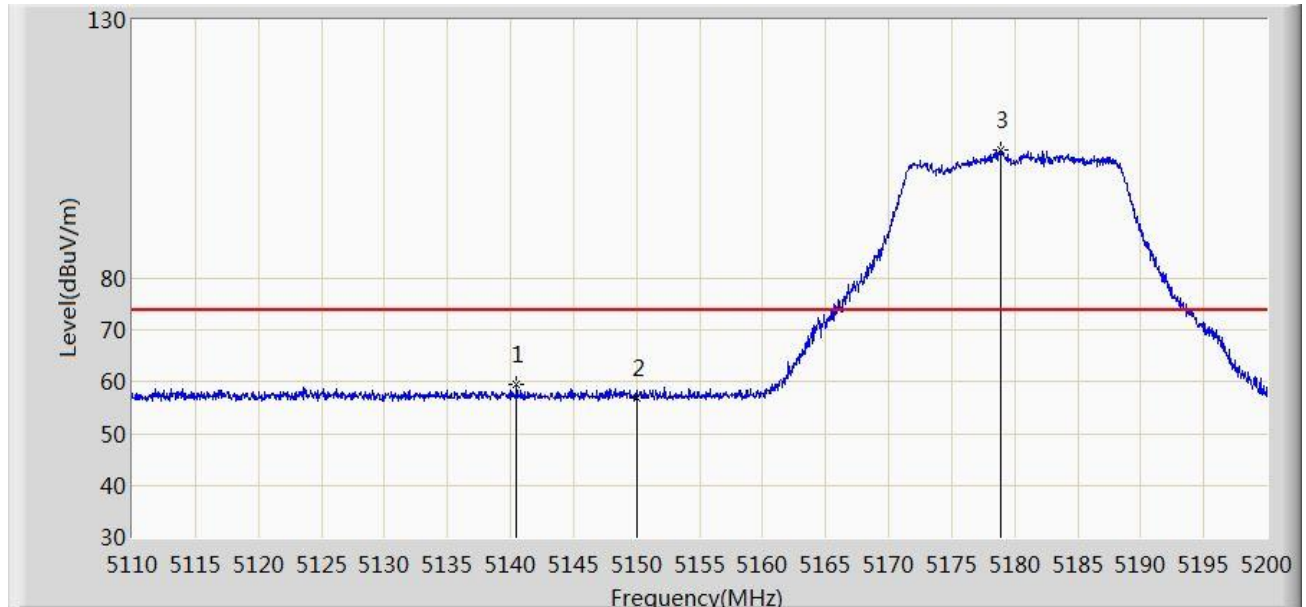


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5140.510	59.561	55.140	-14.439	74.000	4.421	PK
2			5150.000	57.011	52.569	-16.989	74.000	4.442	PK
3		*	5178.850	104.723	100.228	N/A	N/A	4.495	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:28
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5180MHz	

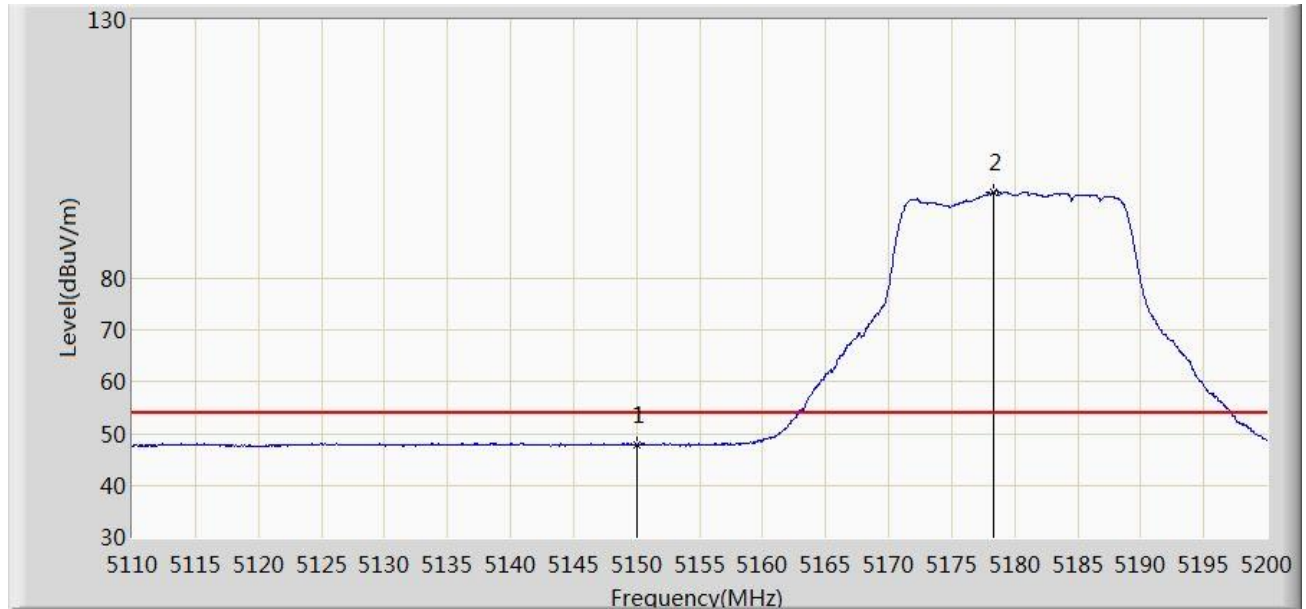


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	47.861	43.419	-6.139	54.000	4.442	AV
2		*	5178.310	96.664	92.165	N/A	N/A	4.499	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:30
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

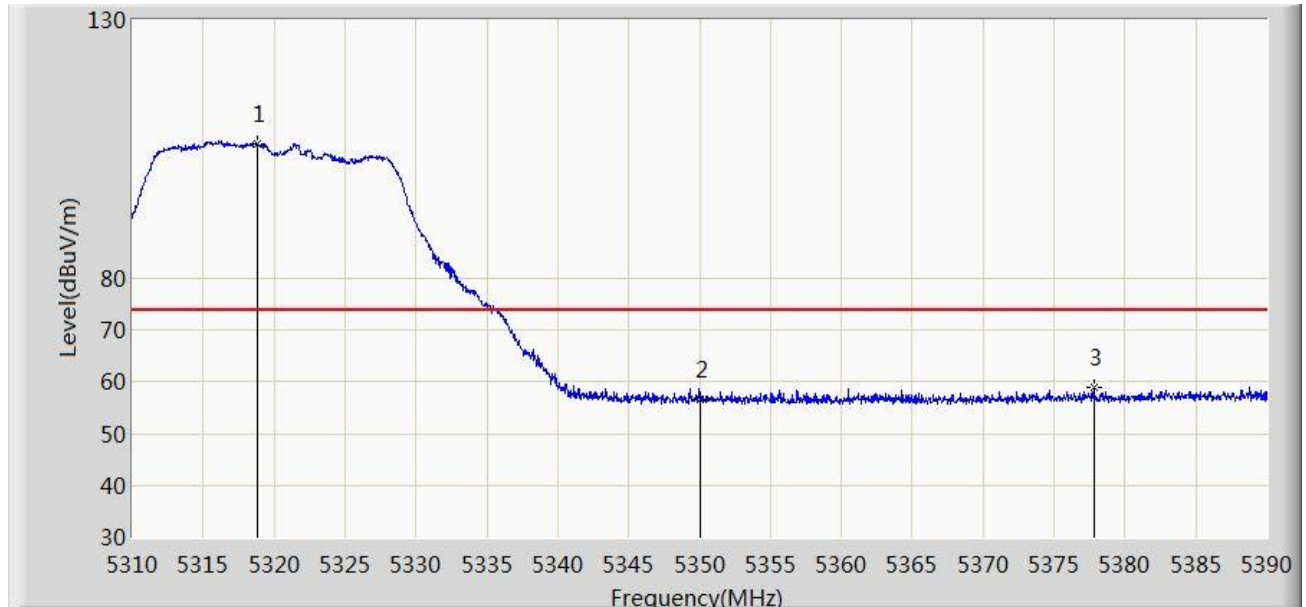


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.800	106.073	102.001	N/A	N/A	4.072	PK
2			5350.000	56.629	52.452	-17.371	74.000	4.177	PK
3			5377.800	58.976	54.541	-15.024	74.000	4.435	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:31
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

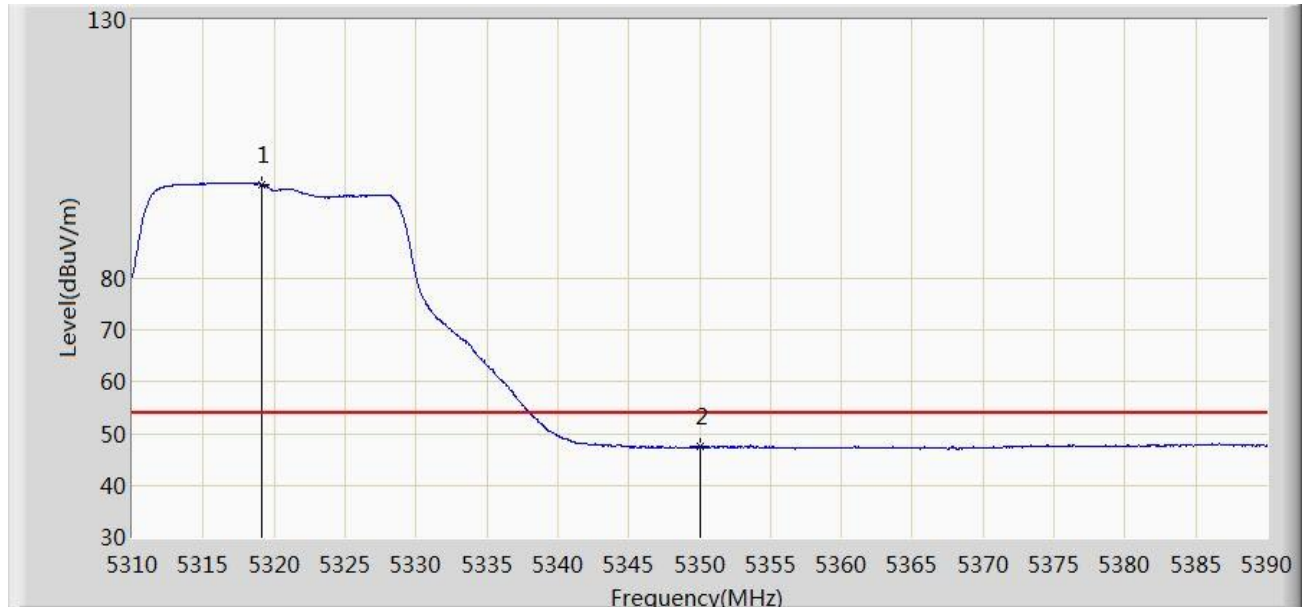


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.160	98.273	94.201	N/A	N/A	4.072	AV
2			5350.000	47.430	43.253	-6.570	54.000	4.177	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:32
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

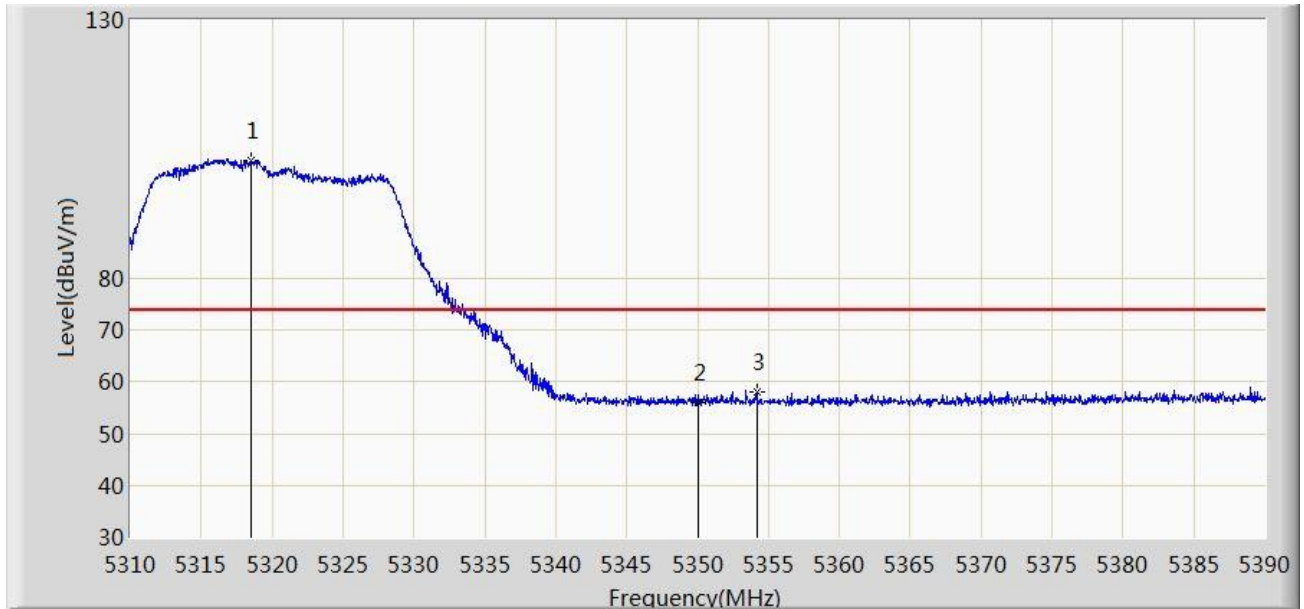


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.520	102.840	98.768	N/A	N/A	4.072	PK
2			5350.000	56.100	51.923	-17.900	74.000	4.177	PK
3			5354.160	58.110	53.912	-15.890	74.000	4.197	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5320MHz	

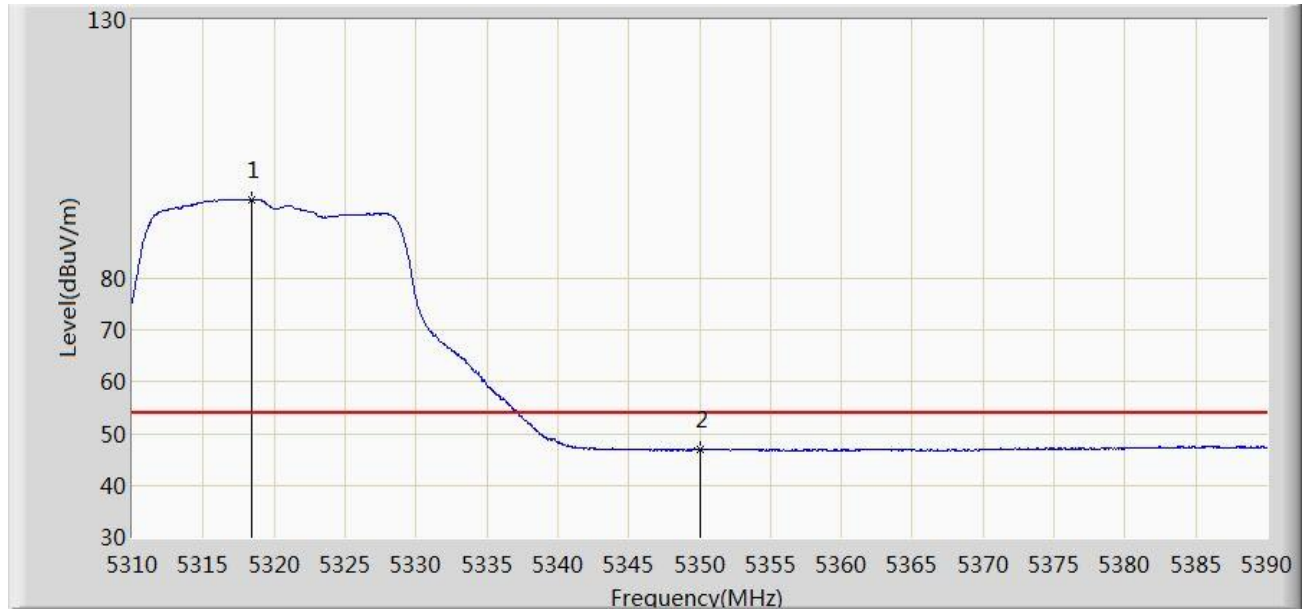


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.400	95.178	91.106	N/A	N/A	4.072	AV
2			5350.000	46.830	42.653	-7.170	54.000	4.177	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:35
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

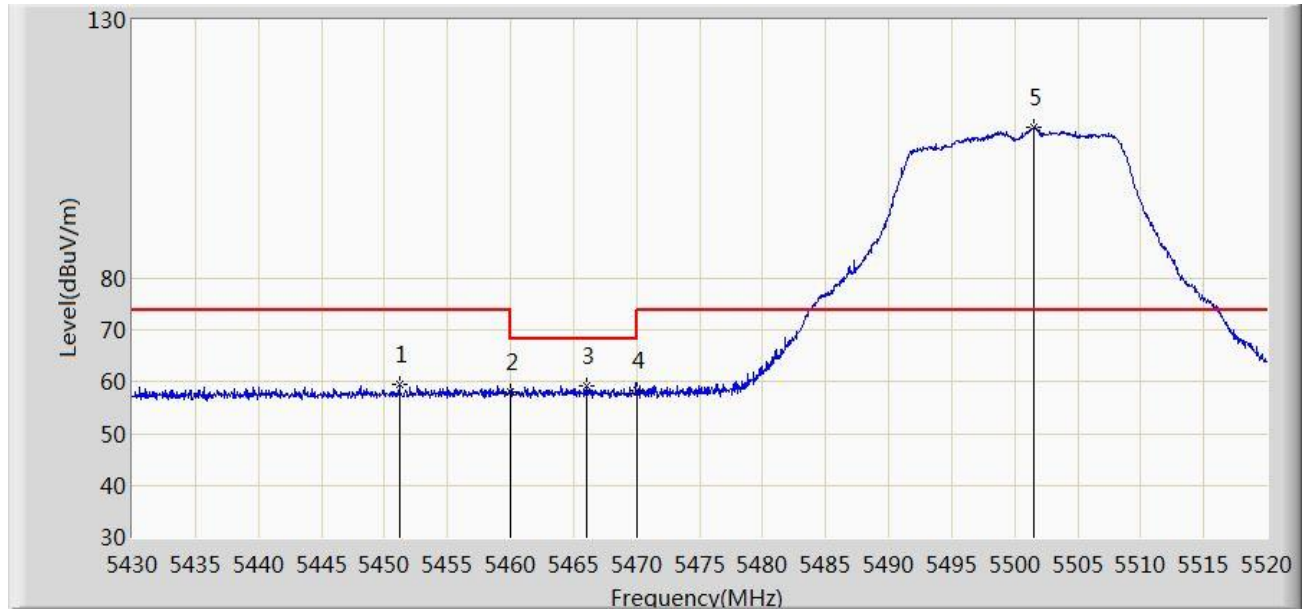


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5451.195	59.548	55.072	-14.452	74.000	4.477	PK
2			5460.000	58.063	53.623	-15.937	74.000	4.440	PK
3			5466.000	59.111	54.662	-9.089	68.200	4.449	PK
4			5470.000	58.354	53.898	-9.846	68.200	4.455	PK
5		*	5501.505	109.096	104.633	N/A	N/A	4.463	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:38
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

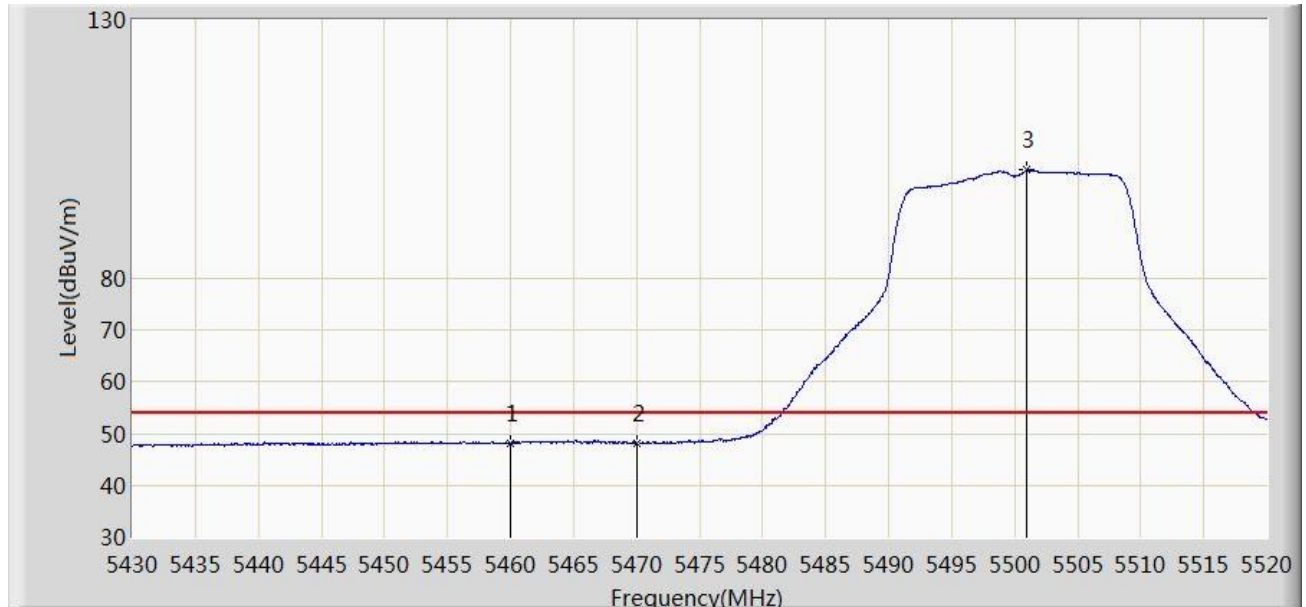


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	48.134	43.694	-5.866	54.000	4.440	AV
2			5470.000	48.232	43.776	-5.768	54.000	4.455	AV
3		*	5500.965	101.013	96.545	N/A	N/A	4.468	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:39
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

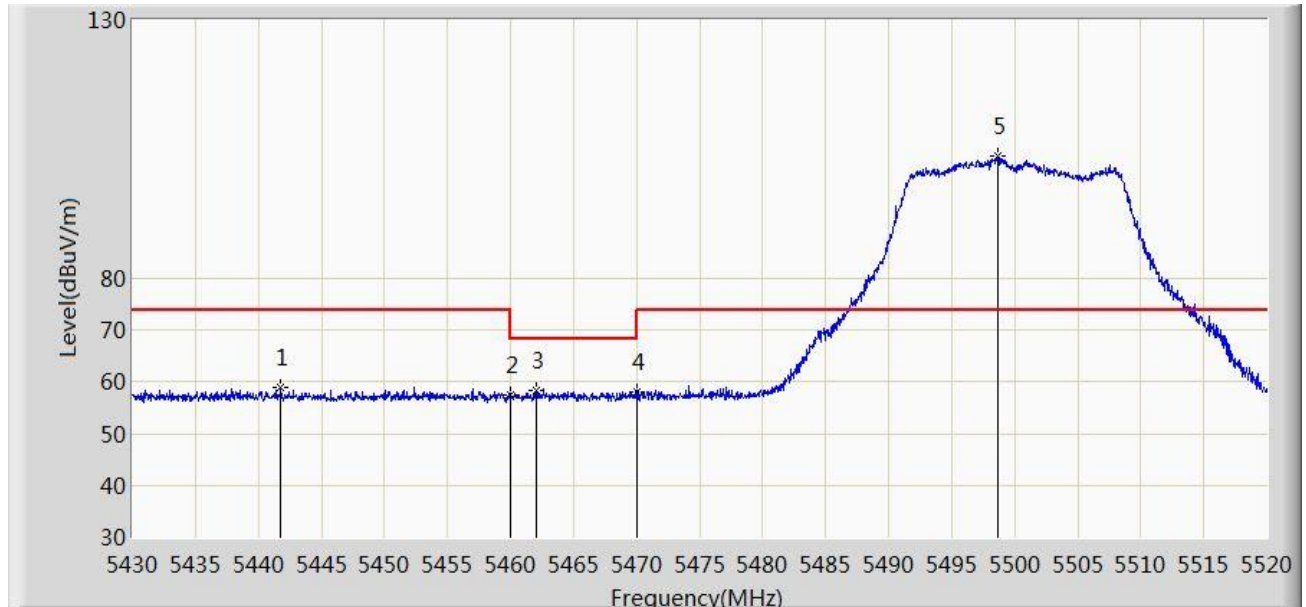


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5441.745	58.841	54.210	-15.159	74.000	4.631	PK
2			5460.000	57.344	52.904	-16.656	74.000	4.440	PK
3			5462.040	58.499	54.056	-9.701	68.200	4.443	PK
4			5470.000	58.213	53.757	-9.987	68.200	4.455	PK
5		*	5498.625	103.654	99.165	N/A	N/A	4.489	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:40
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5500MHz	

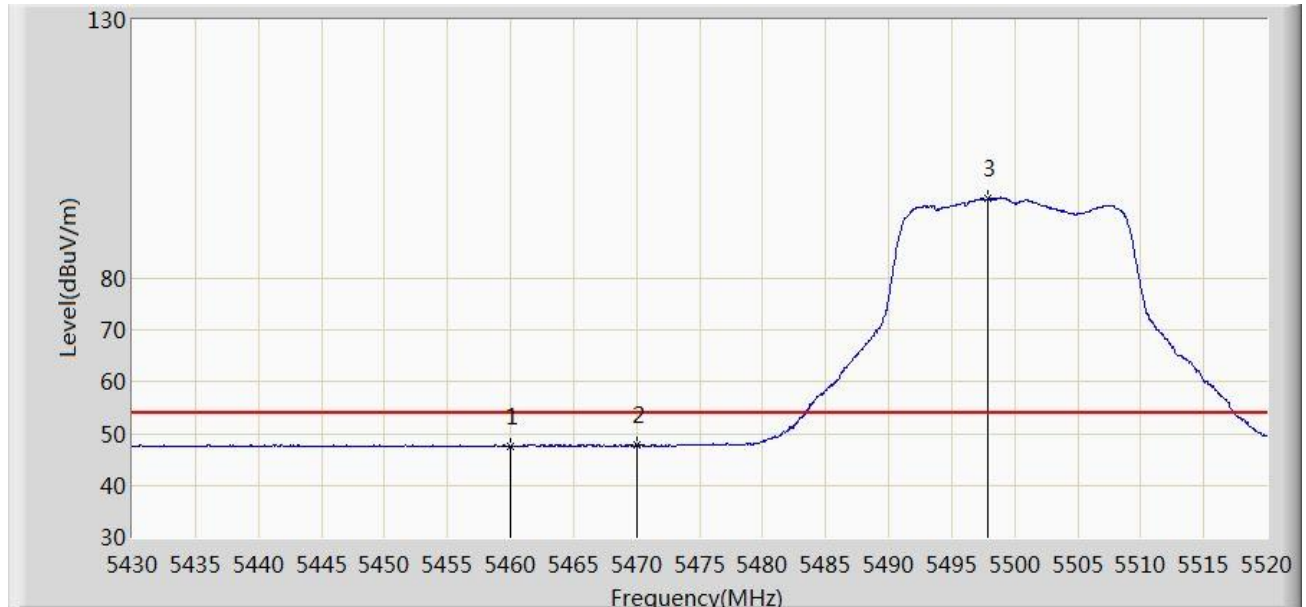


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	47.538	43.098	-6.462	54.000	4.440	AV
2			5470.000	47.759	43.303	-6.241	54.000	4.455	AV
3		*	5497.860	95.397	90.901	N/A	N/A	4.496	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:43
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

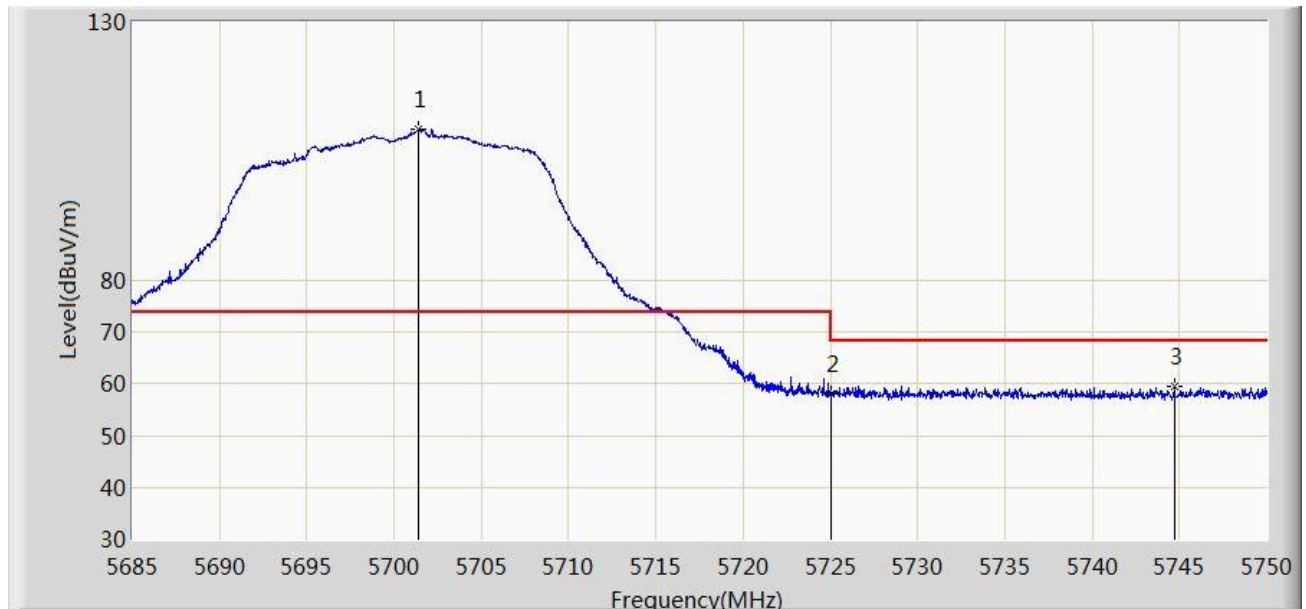


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.380	109.145	103.804	N/A	N/A	5.341	PK
2			5725.000	58.047	52.569	-10.153	68.200	5.478	PK
3			5744.703	59.634	54.033	-8.566	68.200	5.602	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5700MHz	

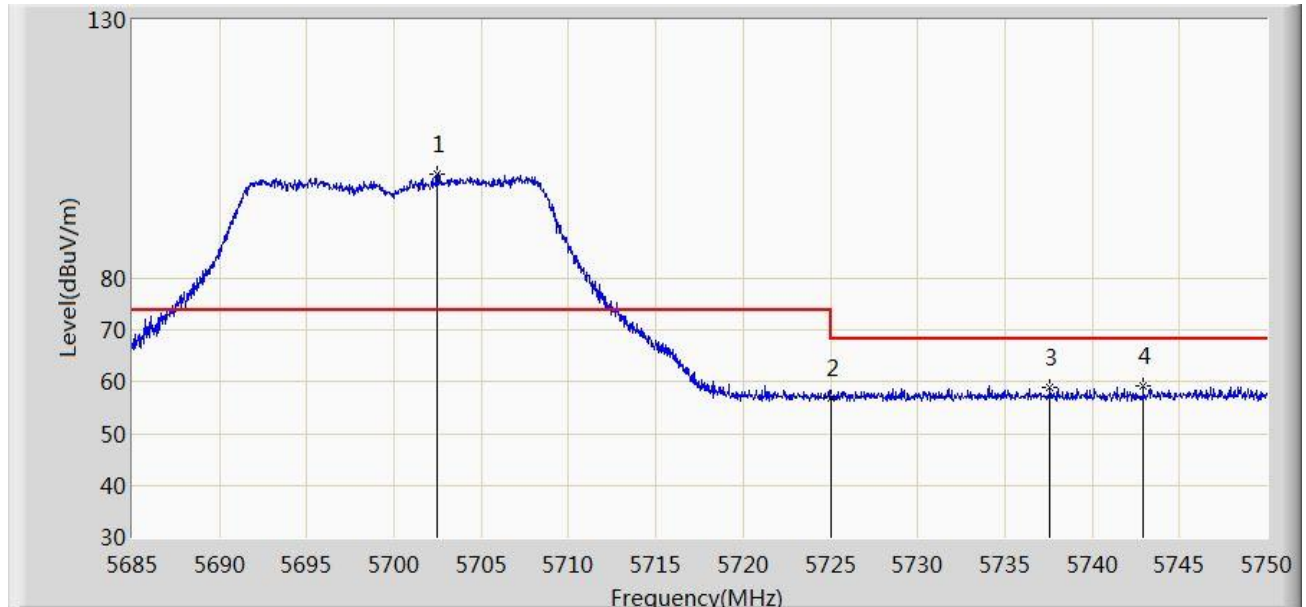


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.485	100.297	94.938	N/A	N/A	5.359	PK
2			5725.000	56.907	51.429	-11.293	68.200	5.478	PK
3			5737.585	58.959	53.420	-9.241	68.200	5.539	PK
4			5742.915	59.132	53.565	-9.068	68.200	5.567	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:48
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz	

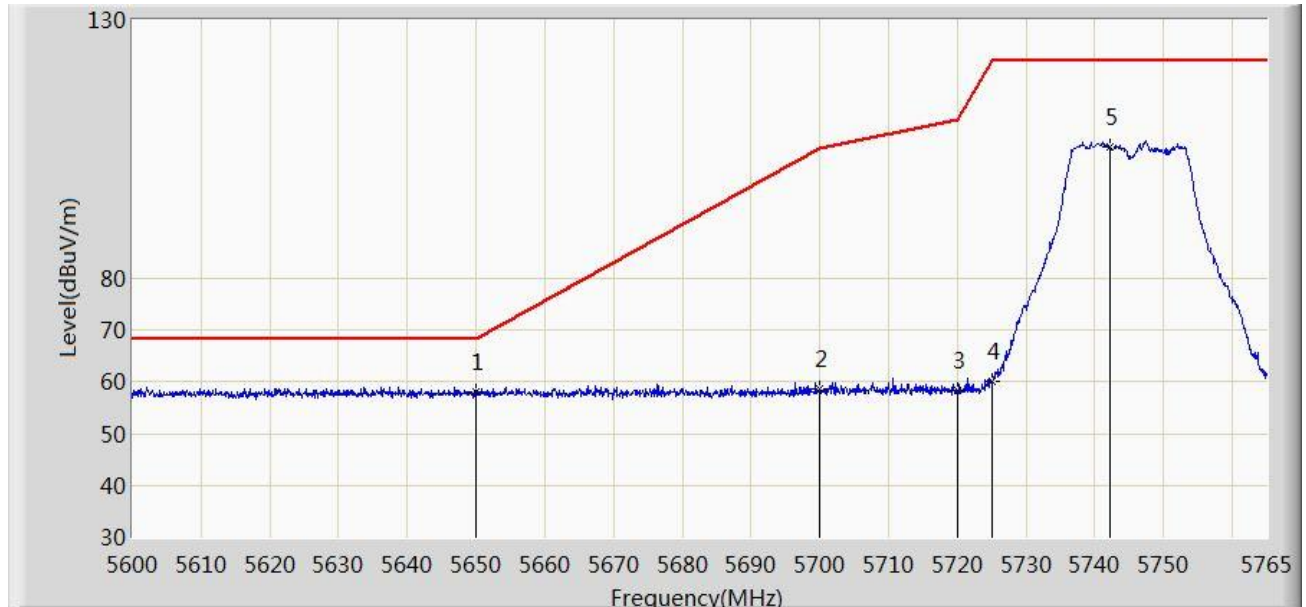


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5650.000	57.967	52.631	-10.233	68.200	5.336	PK
2			5700.000	58.654	53.336	-46.546	105.200	5.318	PK
3			5720.000	58.427	52.953	-52.373	110.800	5.474	PK
4			5725.000	60.057	54.579	-62.143	122.200	5.478	PK
5			5742.162	105.312	99.749	N/A	N/A	5.563	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:50
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5745MHz	

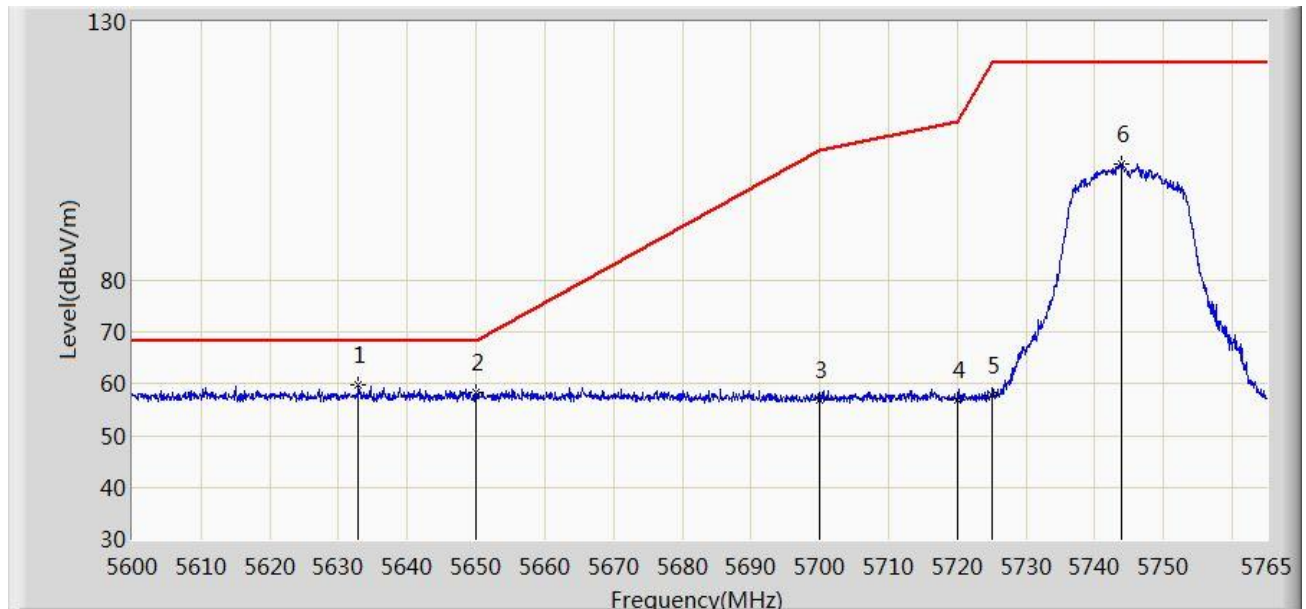


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5632.835	59.682	54.489	-8.518	68.200	5.193	PK
2			5650.000	58.412	53.076	-9.788	68.200	5.336	PK
3			5700.000	56.768	51.450	-48.432	105.200	5.318	PK
4			5720.000	57.029	51.555	-53.771	110.800	5.474	PK
5			5725.000	57.874	52.396	-64.326	122.200	5.478	PK
6			5743.880	102.555	96.970	N/A	N/A	5.585	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:52
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz	

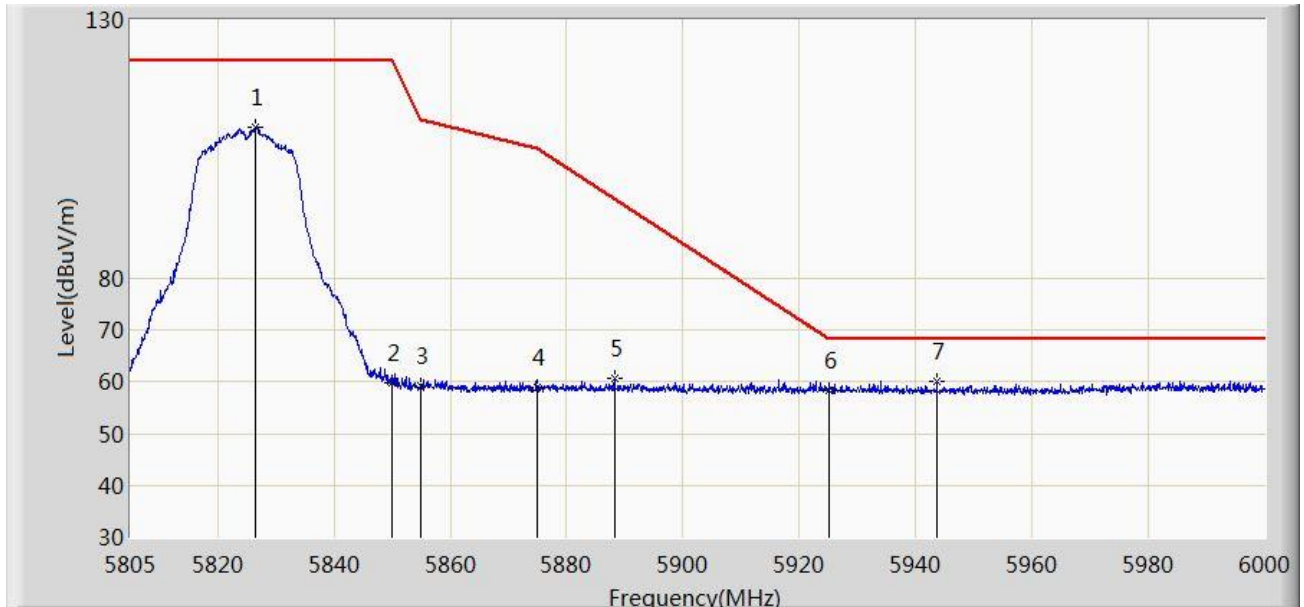


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5826.450	109.129	103.373	N/A	N/A	5.755	PK
2			5850.000	59.784	53.815	-62.416	122.200	5.968	PK
3			5855.000	59.380	53.405	-51.420	110.800	5.975	PK
4			5875.000	59.003	52.990	-46.197	105.200	6.013	PK
5			5888.167	60.758	54.731	-34.668	95.426	6.027	PK
6			5925.000	58.398	52.263	-9.802	68.200	6.136	PK
7		*	5943.645	59.974	53.890	-8.226	68.200	6.084	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 00:59
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at Channel 5825MHz	

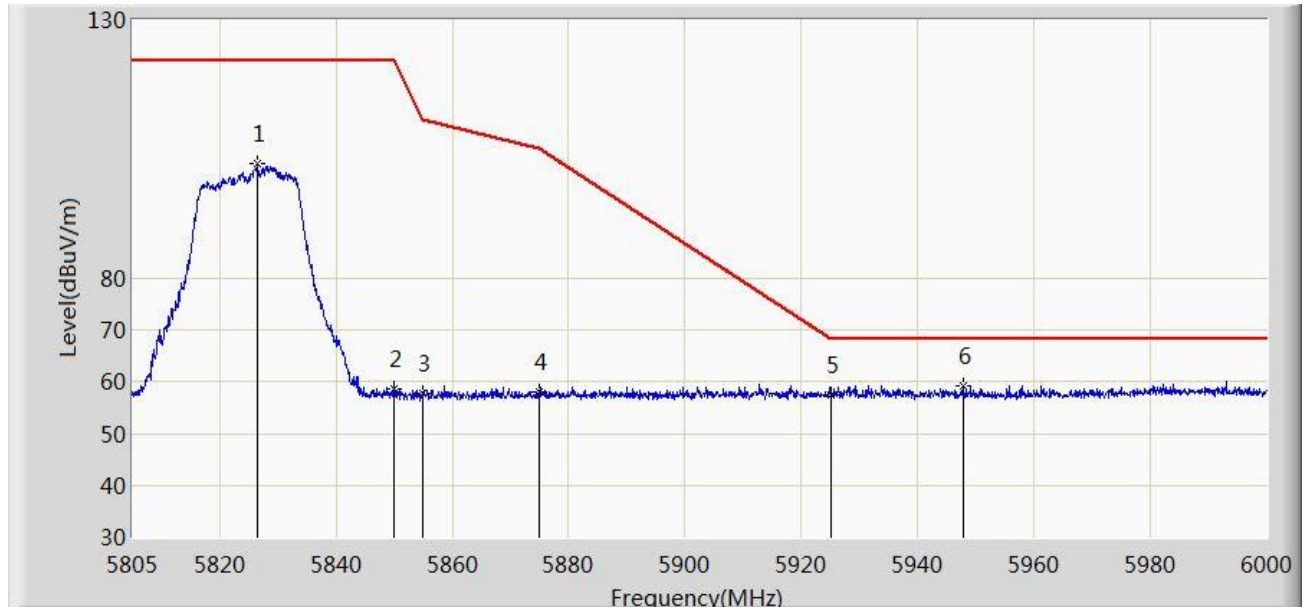


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5826.450	102.264	96.508	N/A	N/A	5.755	PK
2			5850.000	58.620	52.651	-63.580	122.200	5.968	PK
3			5855.000	57.757	51.782	-53.043	110.800	5.975	PK
4			5875.000	58.089	52.076	-47.111	105.200	6.013	PK
5			5925.000	57.618	51.483	-10.582	68.200	6.136	PK
6		*	5947.740	59.157	53.095	-9.043	68.200	6.062	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

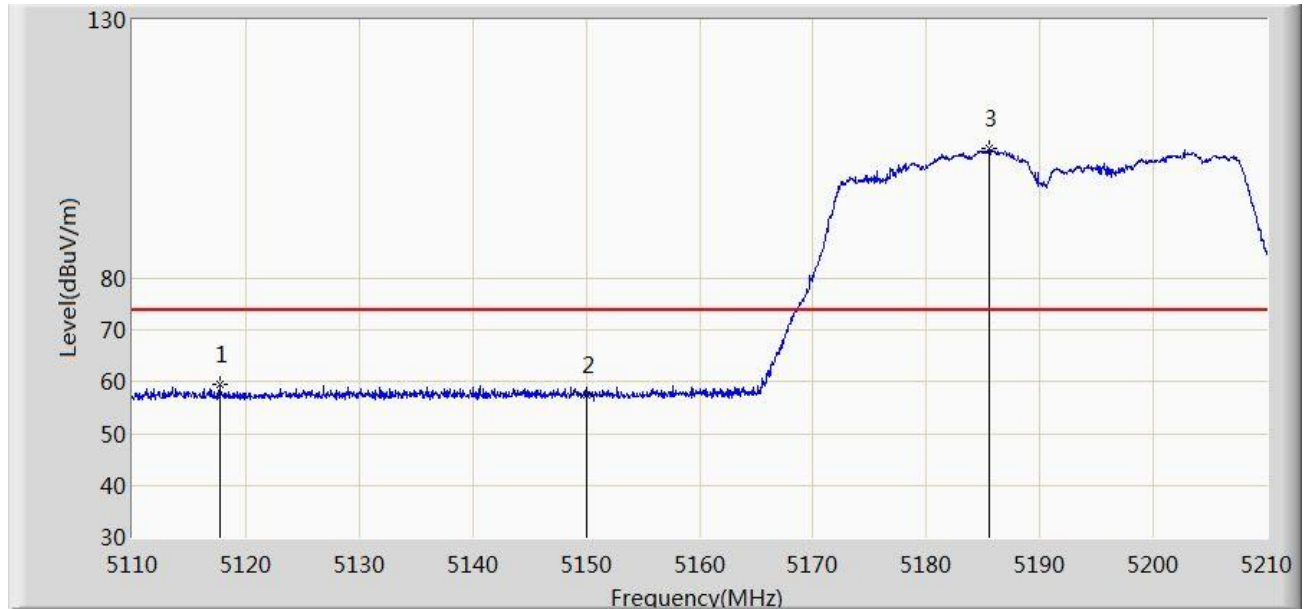


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5117.700	59.637	55.134	-14.363	74.000	4.503	PK
2			5150.000	57.449	53.007	-16.551	74.000	4.442	PK
3		*	5185.600	105.093	100.667	N/A	N/A	4.426	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:05
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

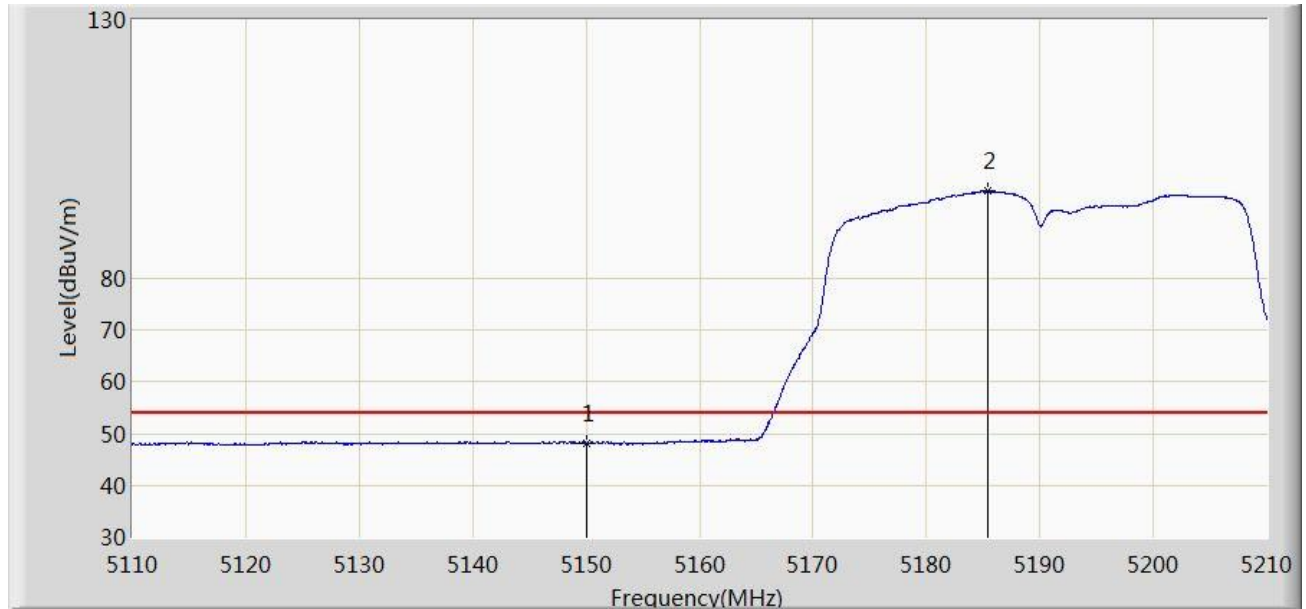


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.241	43.799	-5.759	54.000	4.442	AV
2		*	5185.400	96.932	92.504	N/A	N/A	4.428	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Profile: 5G Bandedge	Page No.: 39
Site: AC2	Time: 2019/12/06 - 01:06
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

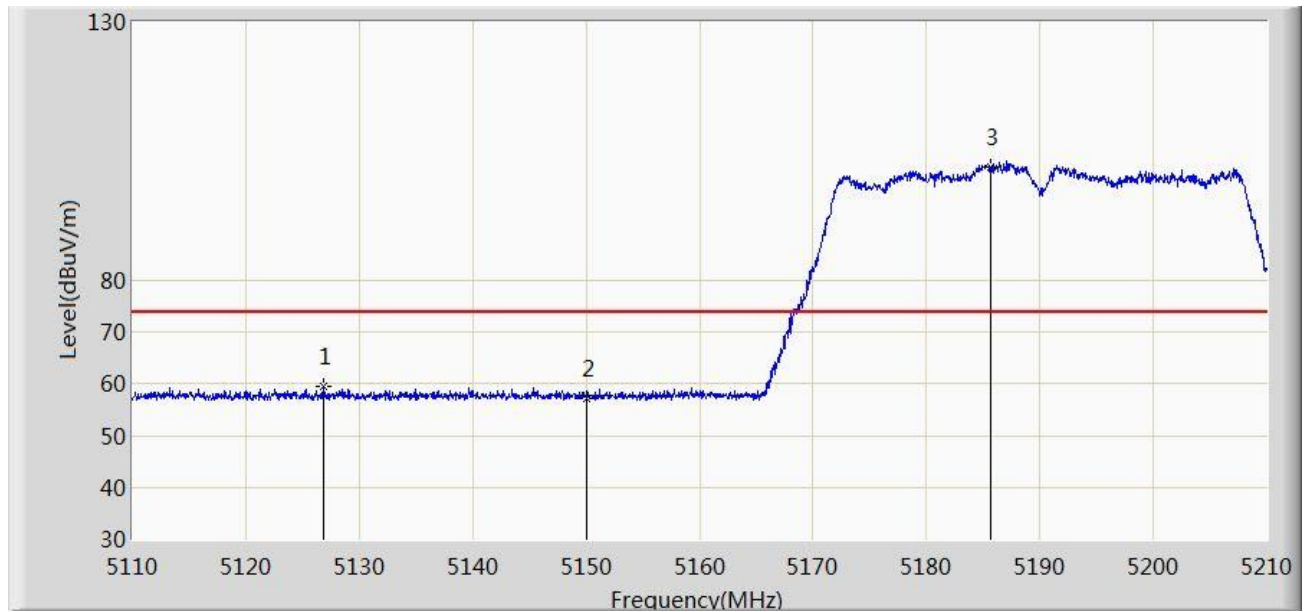


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5126.900	59.532	55.085	-14.468	74.000	4.447	PK
2			5150.000	57.225	52.783	-16.775	74.000	4.442	PK
3		*	5185.700	101.799	97.375	N/A	N/A	4.423	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:09
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5190MHz	

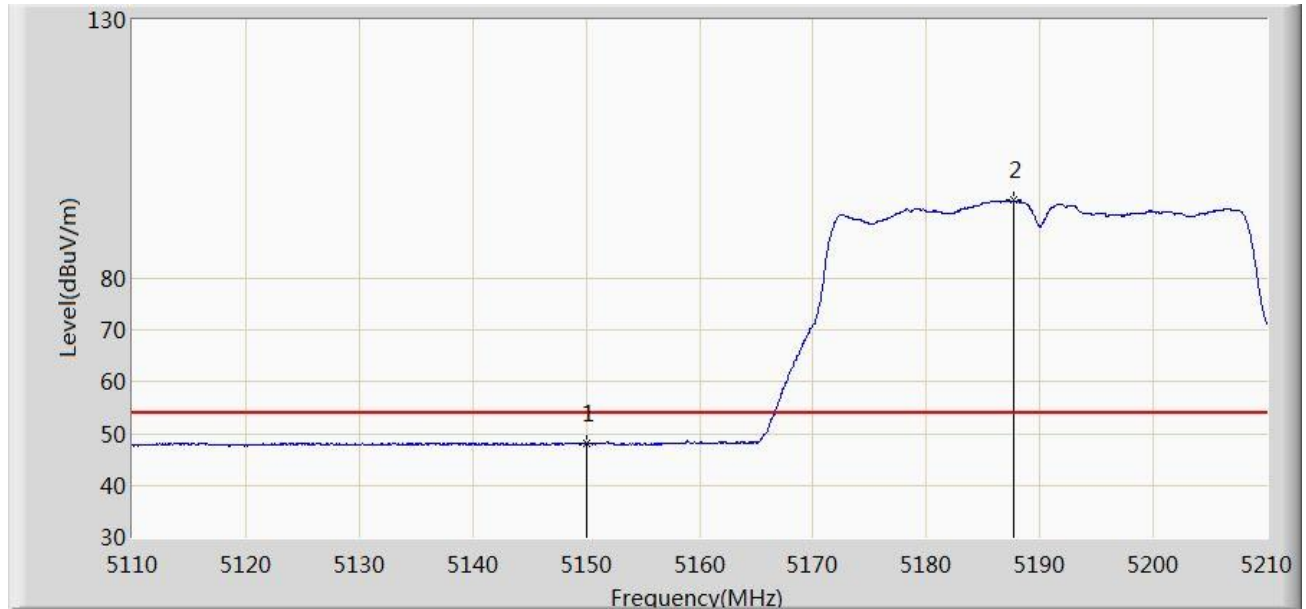


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	48.026	43.584	-5.974	54.000	4.442	AV
2		*	5187.650	95.114	90.712	N/A	N/A	4.402	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:13
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

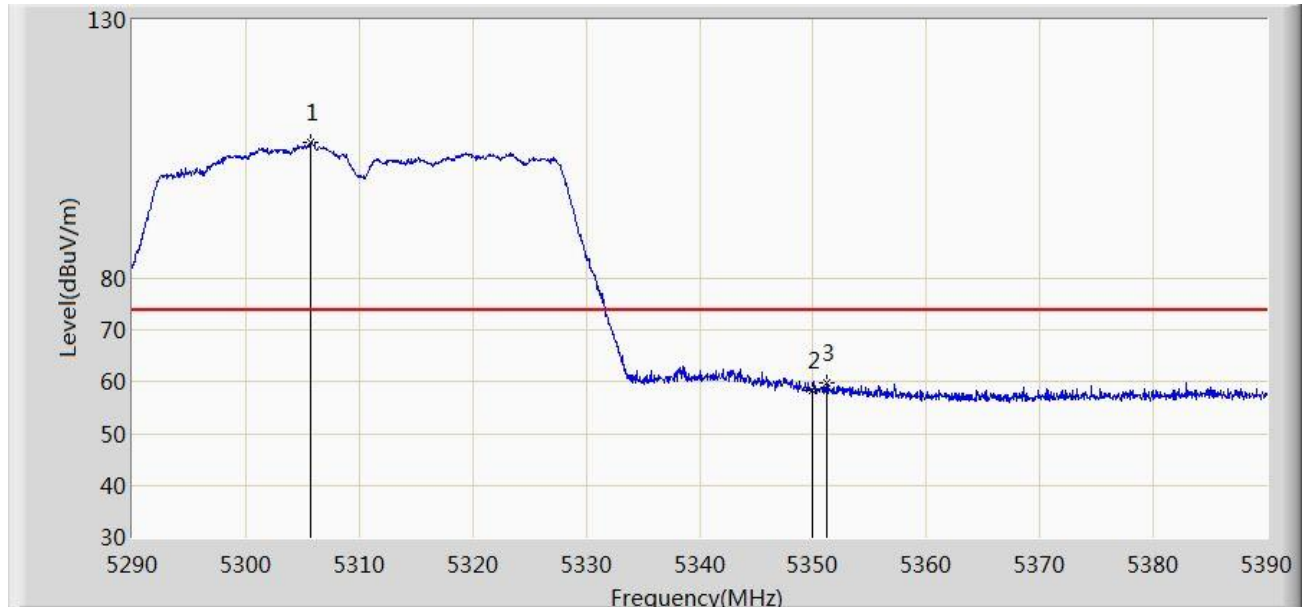


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5305.700	106.302	101.976	N/A	N/A	4.326	PK
2			5350.000	58.279	54.102	-15.721	74.000	4.177	PK
3			5351.200	59.762	55.577	-14.238	74.000	4.185	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:16
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

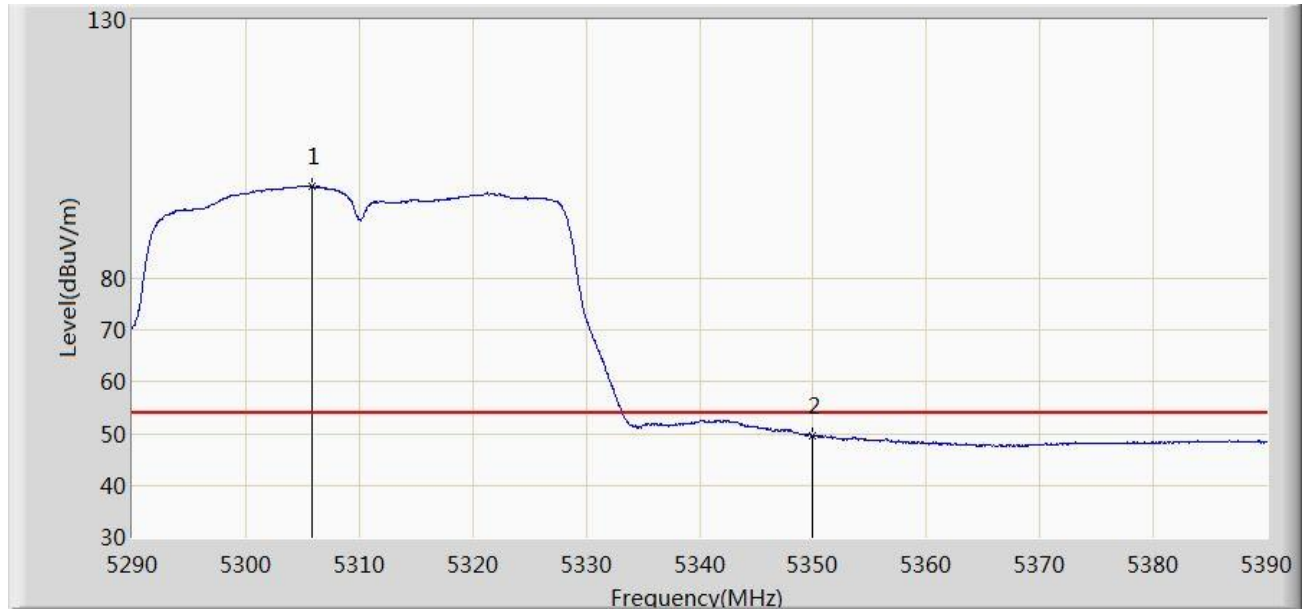


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5305.800	97.884	93.560	N/A	N/A	4.324	AV
2			5350.000	49.576	45.399	-4.424	54.000	4.177	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:17
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

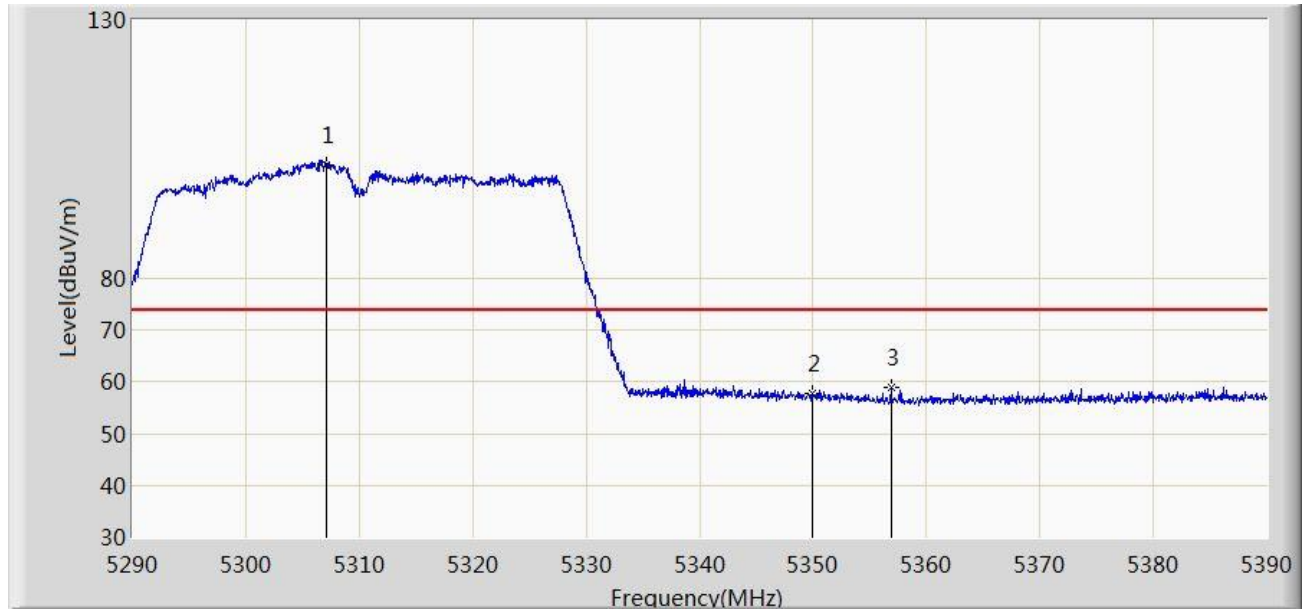


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.107	101.855	97.558	N/A	N/A	4.297	PK
2			5350.000	57.680	53.503	-16.320	74.000	4.177	PK
3			5356.900	58.913	54.707	-15.087	74.000	4.207	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5310MHz	

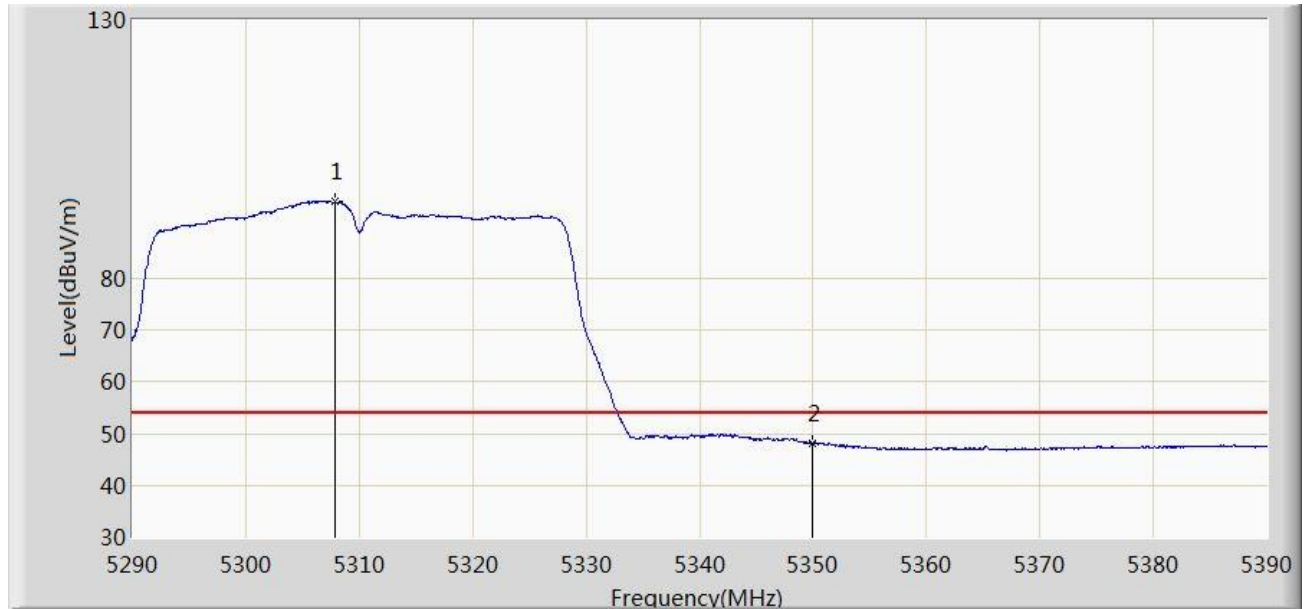


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5307.900	94.771	90.490	N/A	N/A	4.281	AV
2			5350.000	48.119	43.942	-5.881	54.000	4.177	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

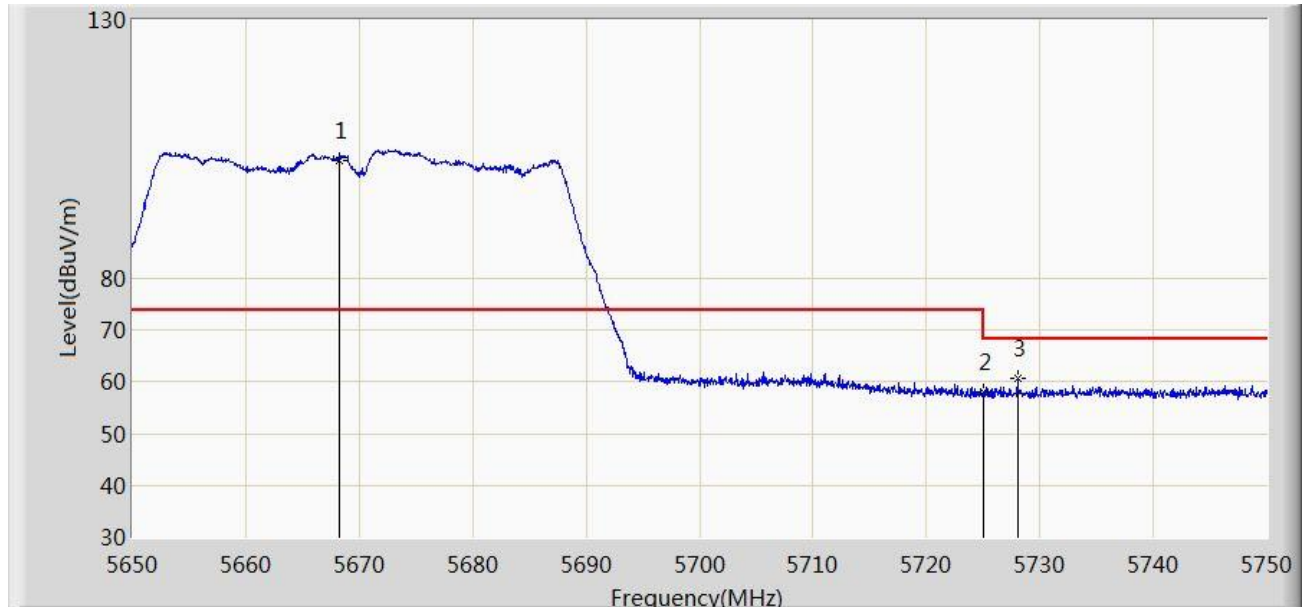


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5668.196	102.789	97.349	N/A	N/A	5.440	PK
2			5725.000	58.095	52.617	-10.105	68.200	5.478	PK
3			5728.050	60.746	55.256	-7.454	68.200	5.489	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:22
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5670MHz	

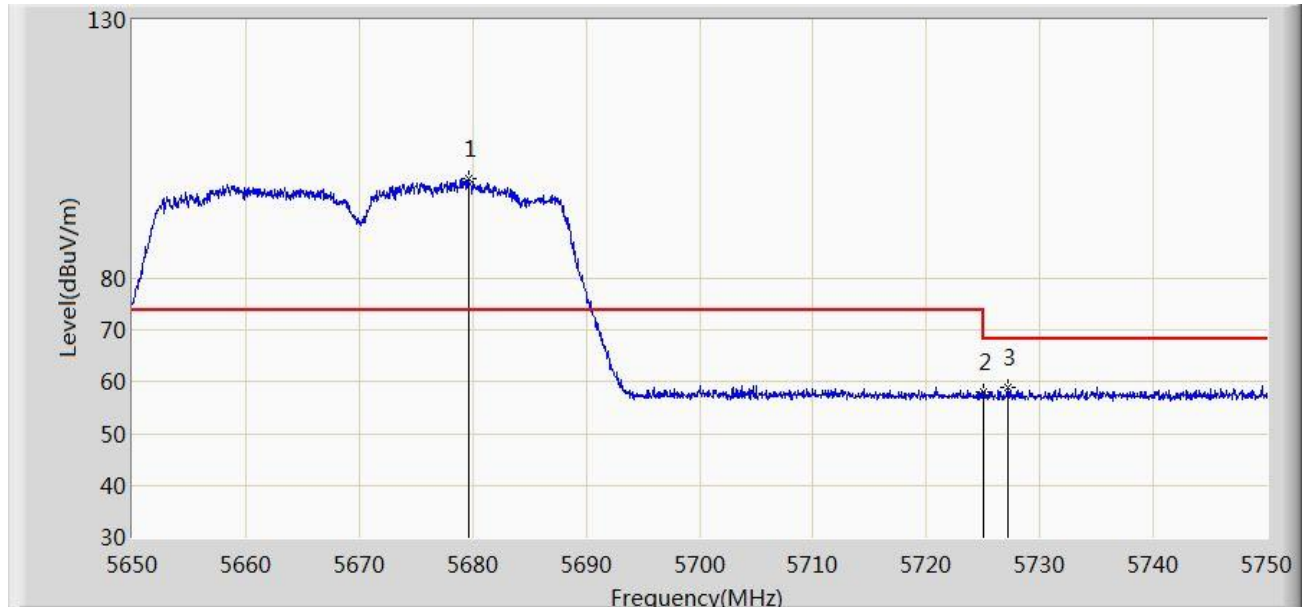


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5679.600	99.168	93.809	N/A	N/A	5.359	PK
2			5725.000	58.046	52.568	-10.154	68.200	5.478	PK
3			5727.150	59.018	53.533	-9.182	68.200	5.485	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:24
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

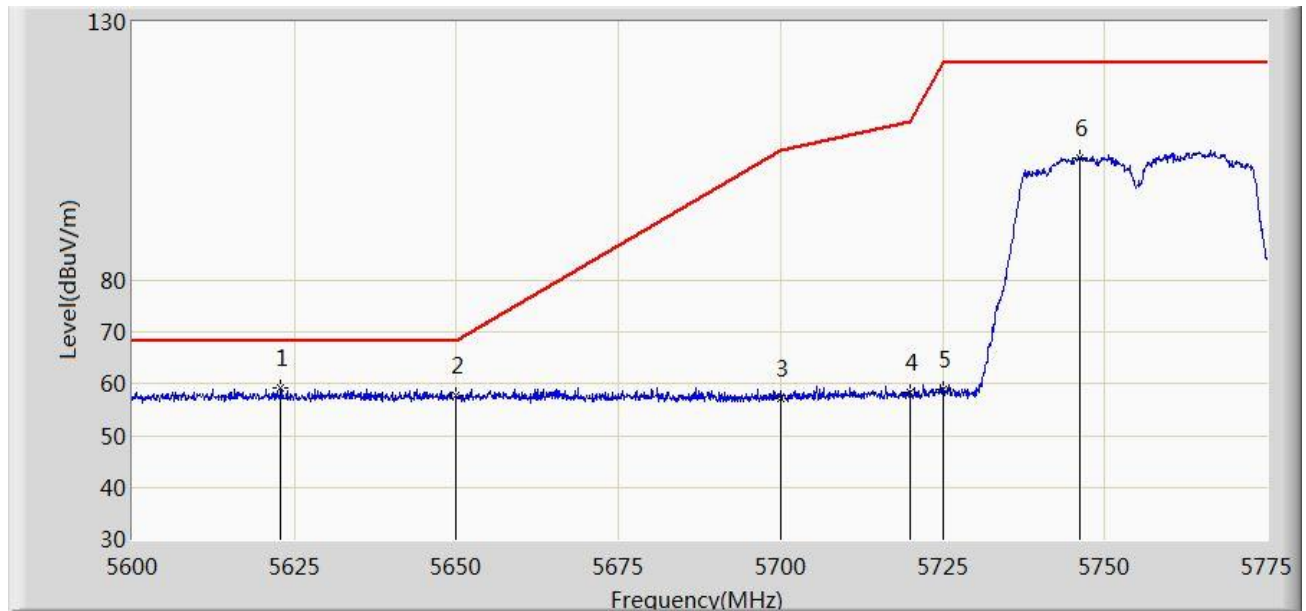


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5622.925	59.246	54.065	-8.954	68.200	5.180	PK
2			5650.000	57.698	52.362	-10.502	68.200	5.336	PK
3			5700.000	57.223	51.905	-47.977	105.200	5.318	PK
4			5720.000	58.274	52.800	-52.526	110.800	5.474	PK
5			5725.000	58.969	53.491	-63.231	122.200	5.478	PK
6			5746.151	103.814	98.184	N/A	N/A	5.630	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:25
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5755MHz	

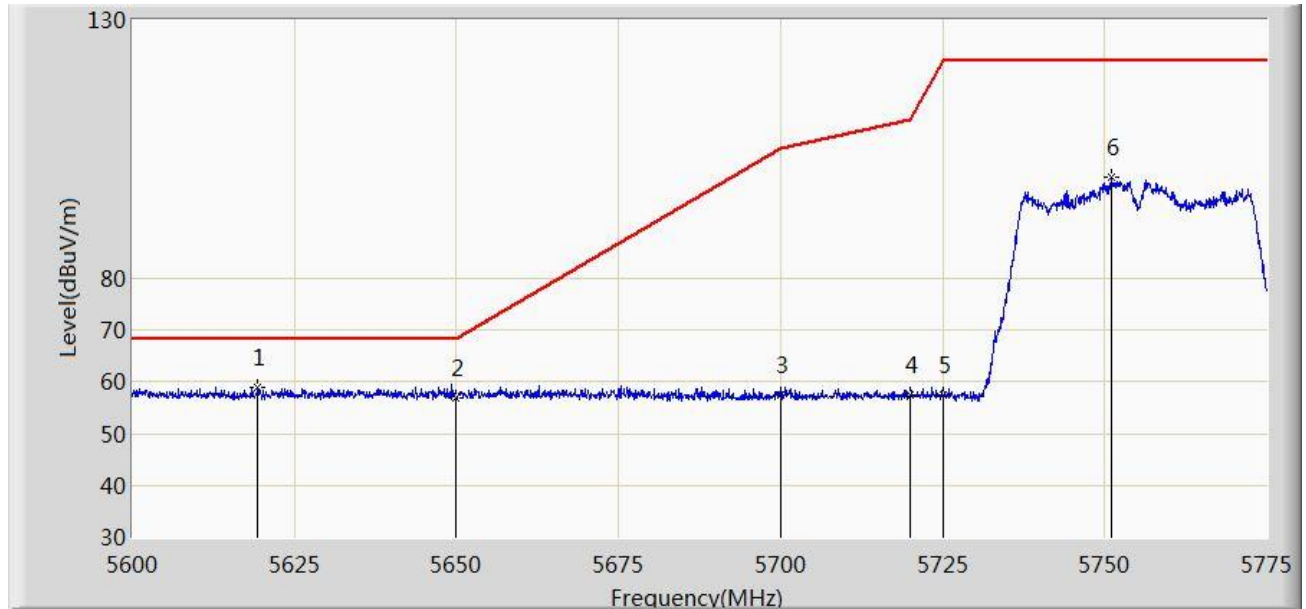


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5619.337	59.093	53.968	-9.107	68.200	5.125	PK
2			5650.000	56.920	51.584	-11.280	68.200	5.336	PK
3			5700.000	57.437	52.119	-47.763	105.200	5.318	PK
4			5720.000	57.456	51.982	-53.344	110.800	5.474	PK
5			5725.000	57.440	51.962	-64.760	122.200	5.478	PK
6			5750.937	99.569	93.845	N/A	N/A	5.724	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:27
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

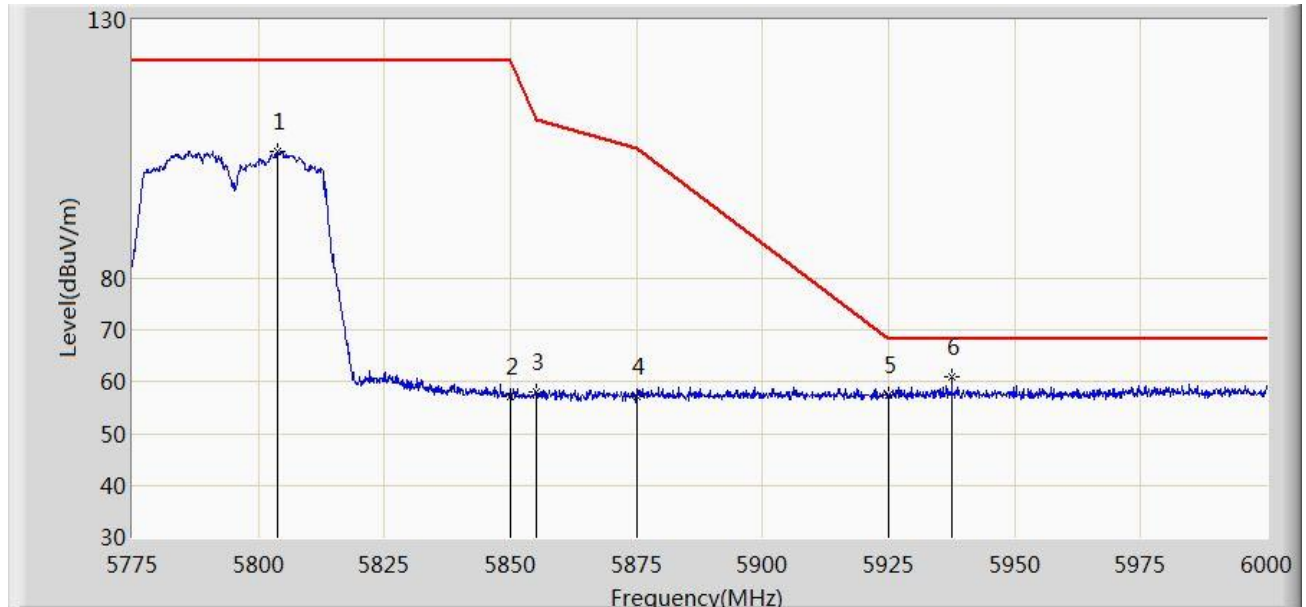


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5803.913	104.653	98.786	N/A	N/A	5.867	PK
2			5850.000	57.170	51.201	-65.030	122.200	5.968	PK
3			5855.000	58.204	52.229	-52.596	110.800	5.975	PK
4			5875.000	57.086	51.073	-48.114	105.200	6.013	PK
5			5925.000	57.390	51.255	-10.810	68.200	6.136	PK
6		*	5937.562	60.935	54.818	-7.265	68.200	6.117	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:29
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT40 at Channel 5795MHz	

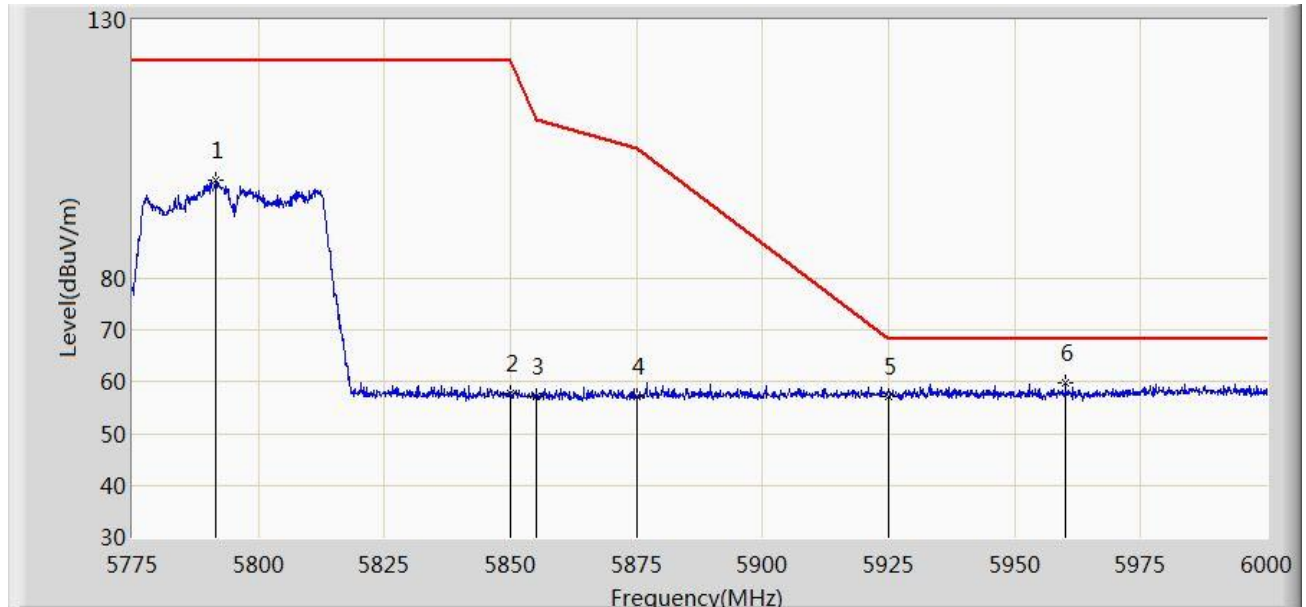


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5791.650	99.119	93.292	N/A	N/A	5.827	PK
2			5850.000	57.767	51.798	-64.433	122.200	5.968	PK
3			5855.000	57.305	51.330	-53.495	110.800	5.975	PK
4			5875.000	57.084	51.071	-48.116	105.200	6.013	PK
5			5925.000	57.206	51.071	-10.994	68.200	6.136	PK
6		*	5960.062	59.802	53.808	-8.398	68.200	5.994	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

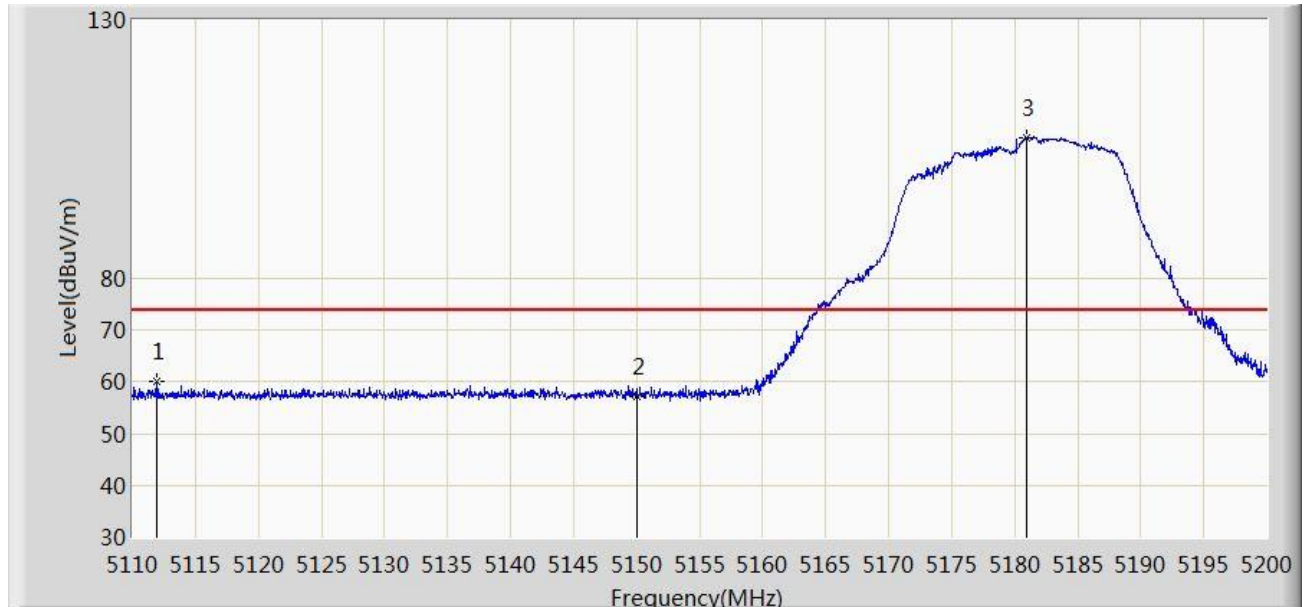


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5111.890	60.074	55.590	-13.926	74.000	4.484	PK
2			5150.000	57.252	52.810	-16.748	74.000	4.442	PK
3		*	5180.920	107.196	102.719	N/A	N/A	4.477	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:37
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

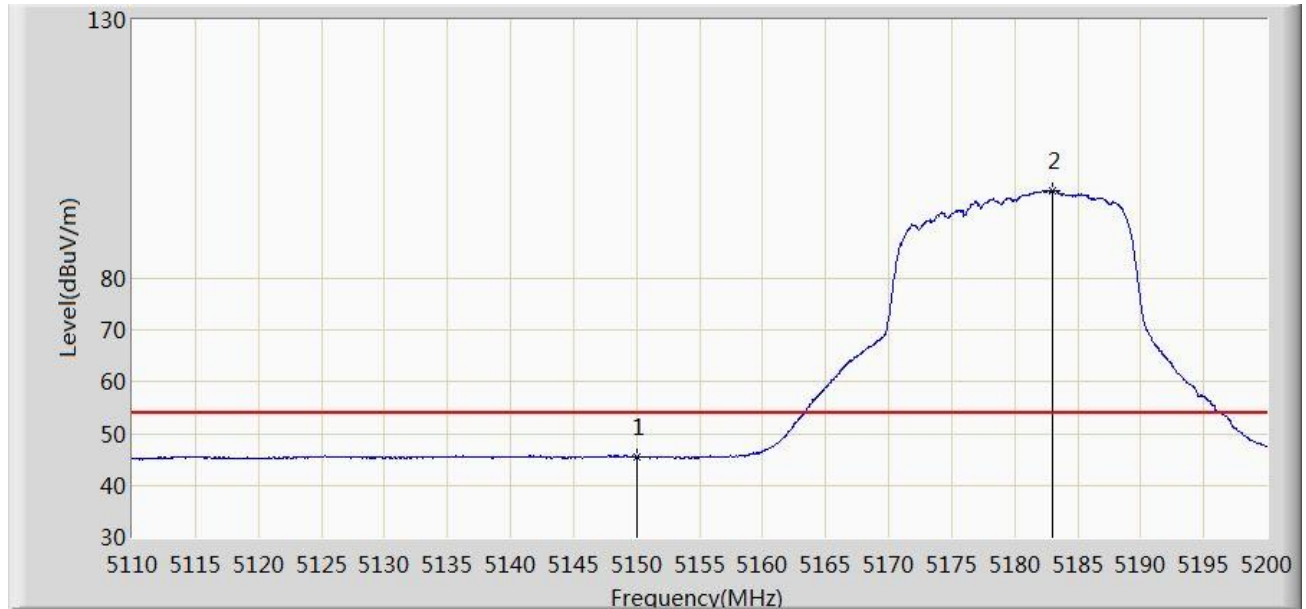


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.481	41.039	-8.519	54.000	4.442	AV
2		*	5183.035	97.012	92.556	N/A	N/A	4.456	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:41
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

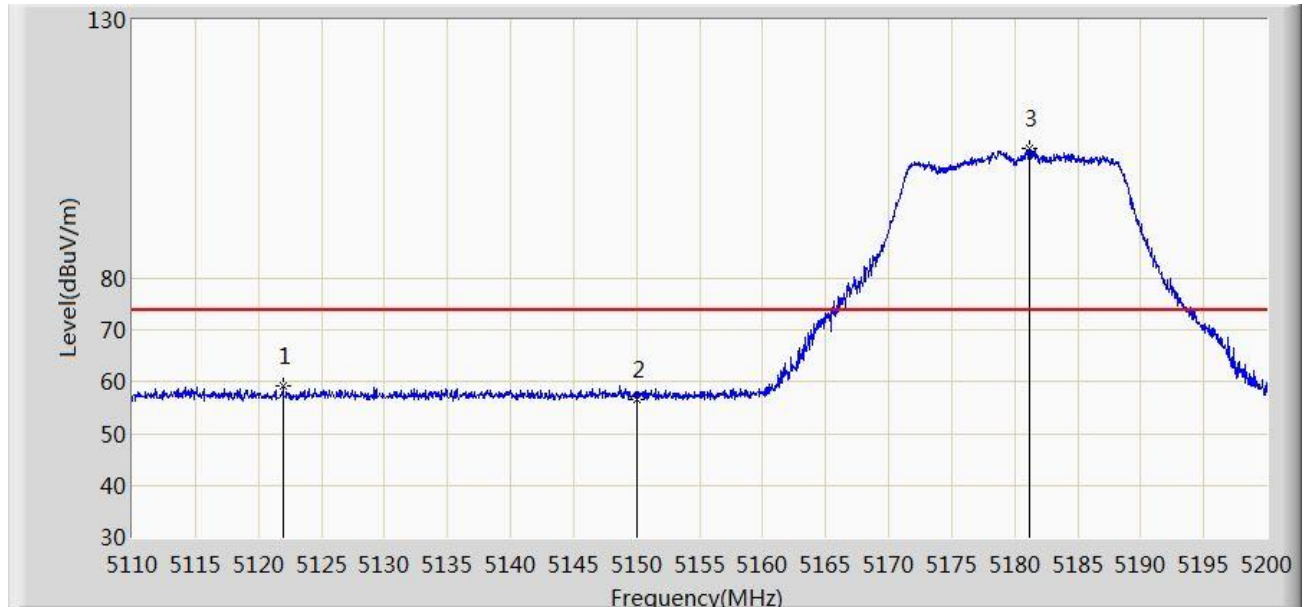


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5121.970	59.349	54.872	-14.651	74.000	4.477	PK
2			5150.000	56.507	52.065	-17.493	74.000	4.442	PK
3		*	5181.145	105.055	100.580	N/A	N/A	4.476	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:43
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5180MHz	

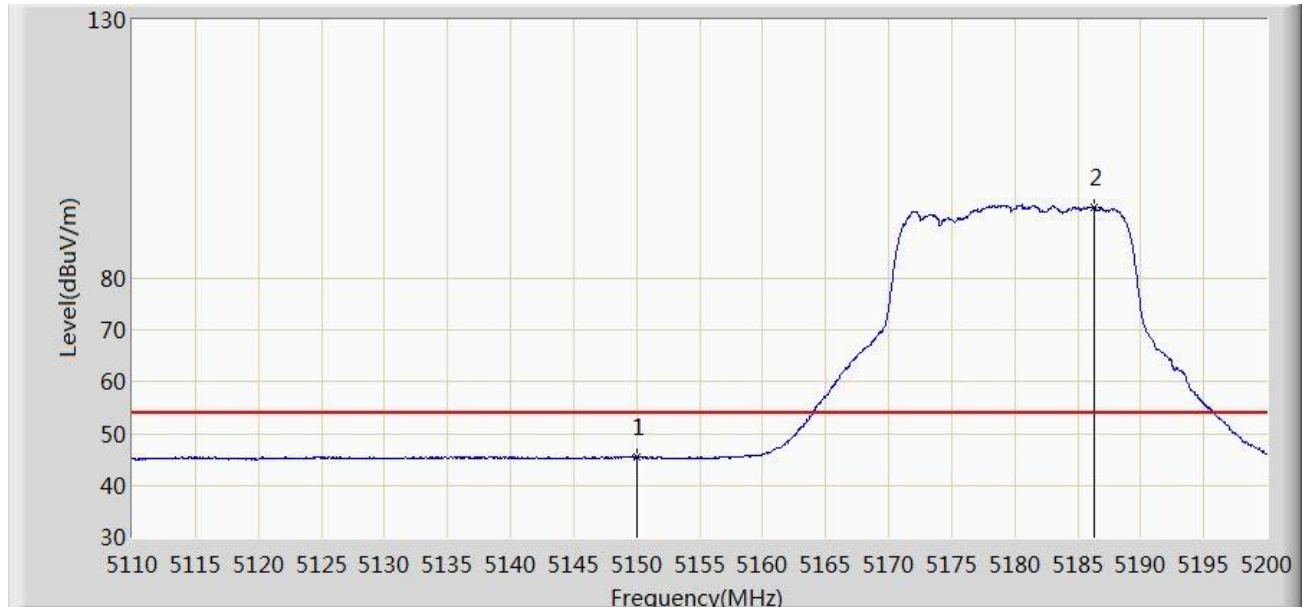


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.416	40.974	-8.584	54.000	4.442	AV
2		*	5186.320	93.831	89.414	N/A	N/A	4.416	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:46
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

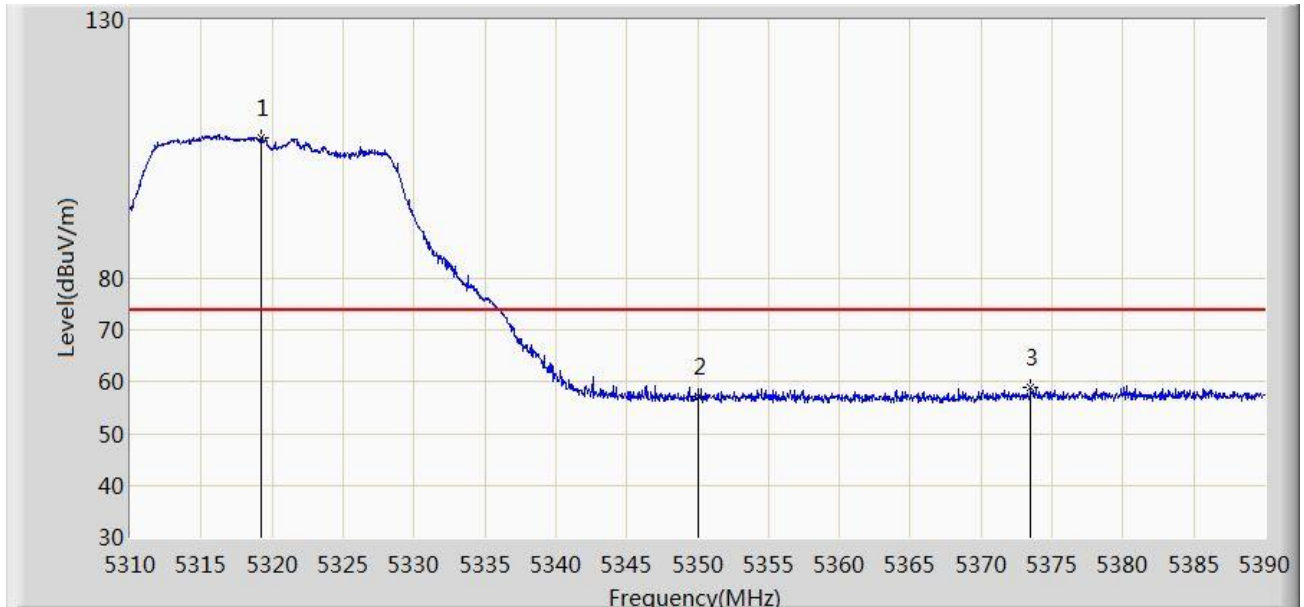


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5319.200	107.179	103.107	N/A	N/A	4.072	PK
2			5350.000	57.330	53.153	-16.670	74.000	4.177	PK
3			5373.480	58.934	54.592	-15.066	74.000	4.342	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:47
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

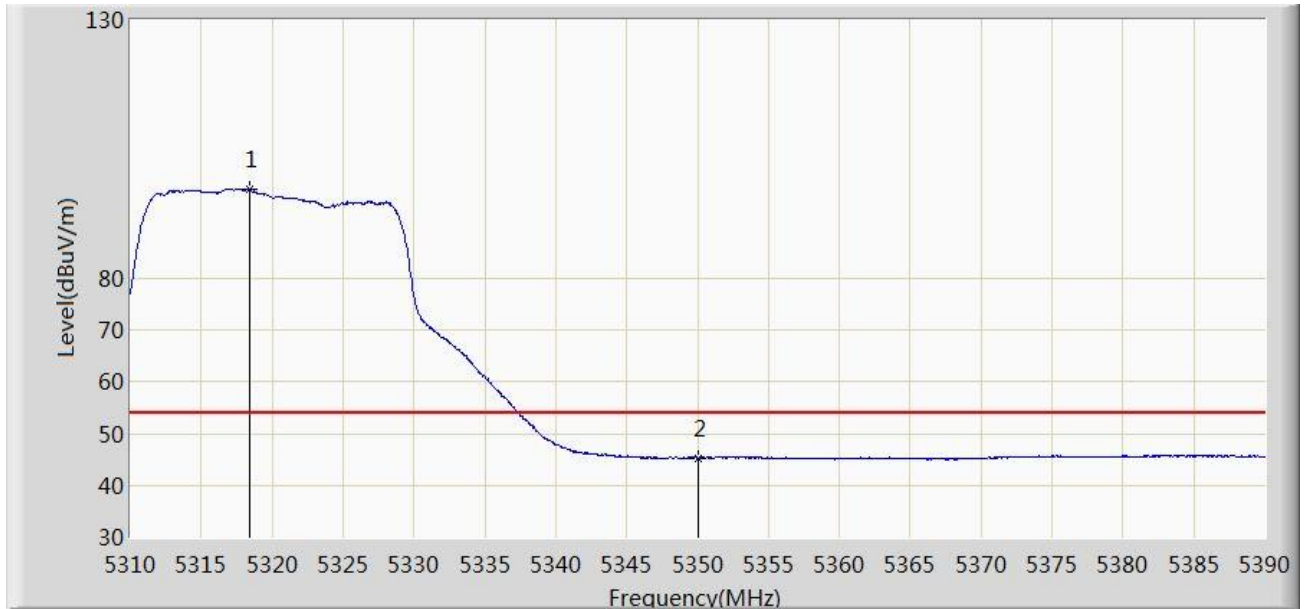


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.440	97.245	93.173	N/A	N/A	4.072	AV
2			5350.000	45.334	41.157	-8.666	54.000	4.177	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:49
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

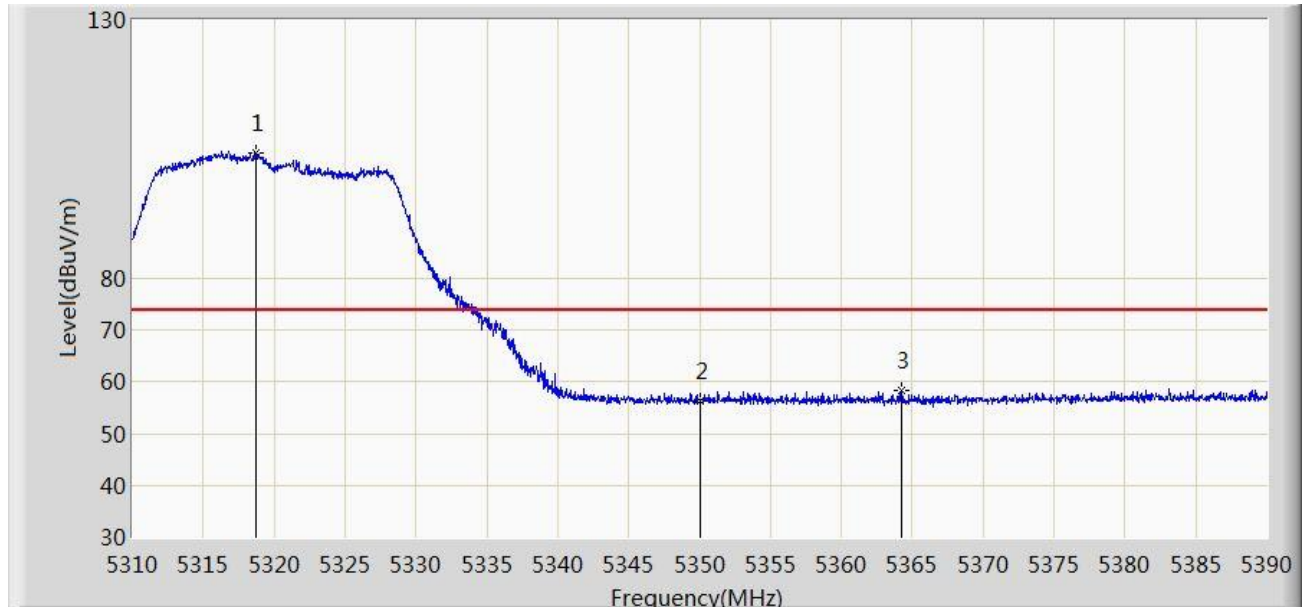


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5318.720	104.132	100.060	N/A	N/A	4.072	PK
2			5350.000	56.257	52.080	-17.743	74.000	4.177	PK
3			5364.200	58.235	54.005	-15.765	74.000	4.230	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:51
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5320MHz	

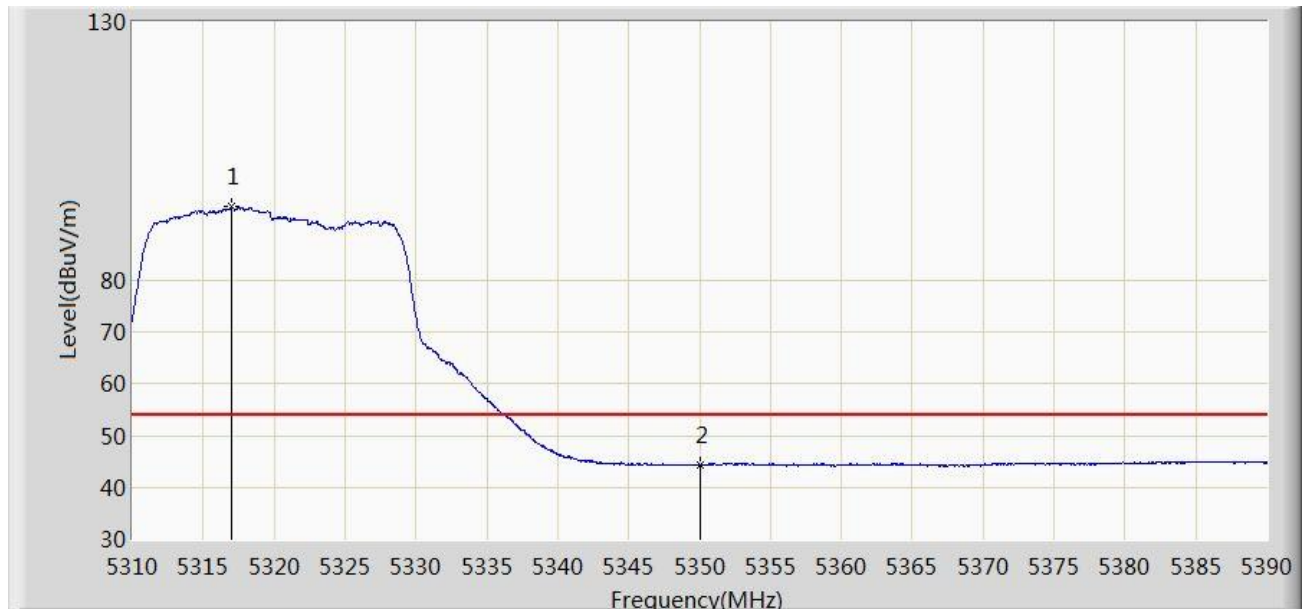


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5317.040	94.222	90.130	N/A	N/A	4.092	AV
2			5350.000	44.327	40.150	-9.673	54.000	4.177	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:53
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

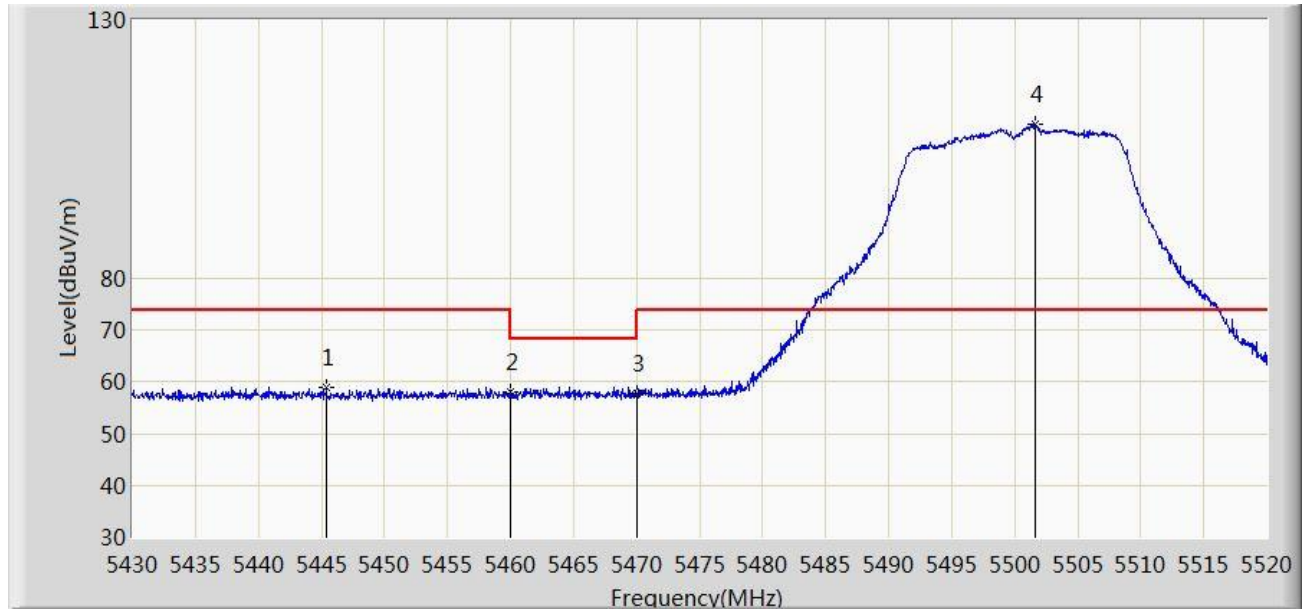


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5445.390	58.818	54.247	-15.182	74.000	4.571	PK
2			5460.000	58.091	53.651	-15.909	74.000	4.440	PK
3			5470.000	57.781	53.325	-10.419	68.200	4.455	PK
4		*	5501.595	109.800	105.338	N/A	N/A	4.462	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:55
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

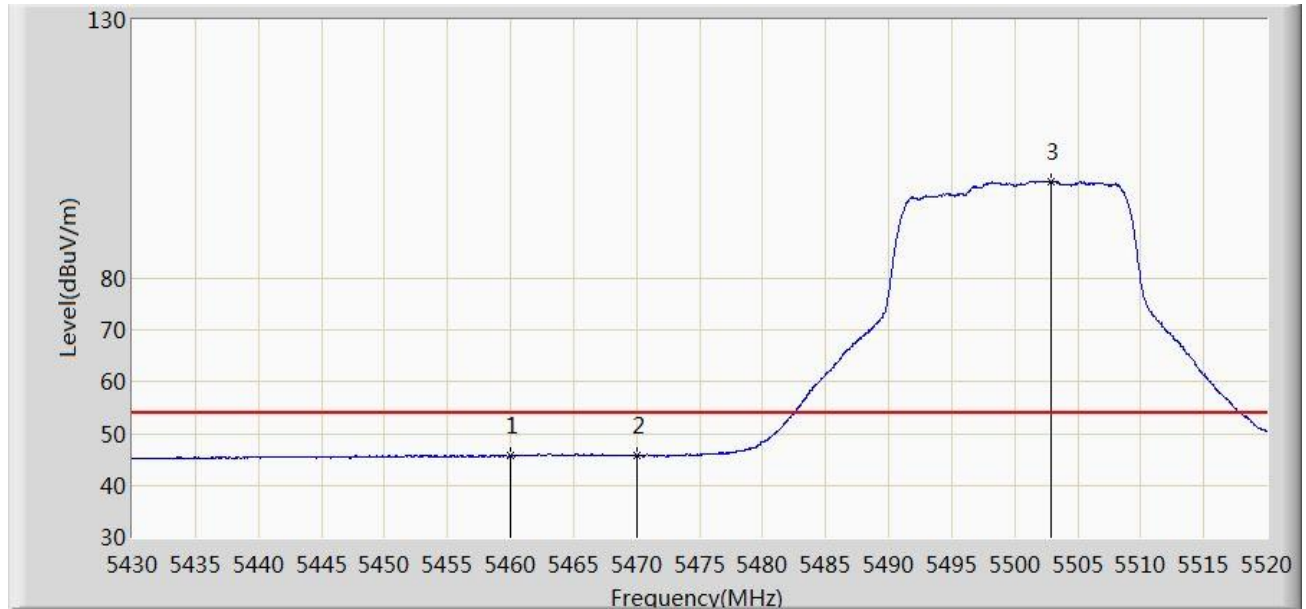


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.710	41.270	-8.290	54.000	4.440	AV
2			5470.000	45.733	41.277	-8.267	54.000	4.455	AV
3		*	5502.945	98.830	94.380	N/A	N/A	4.451	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:57
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

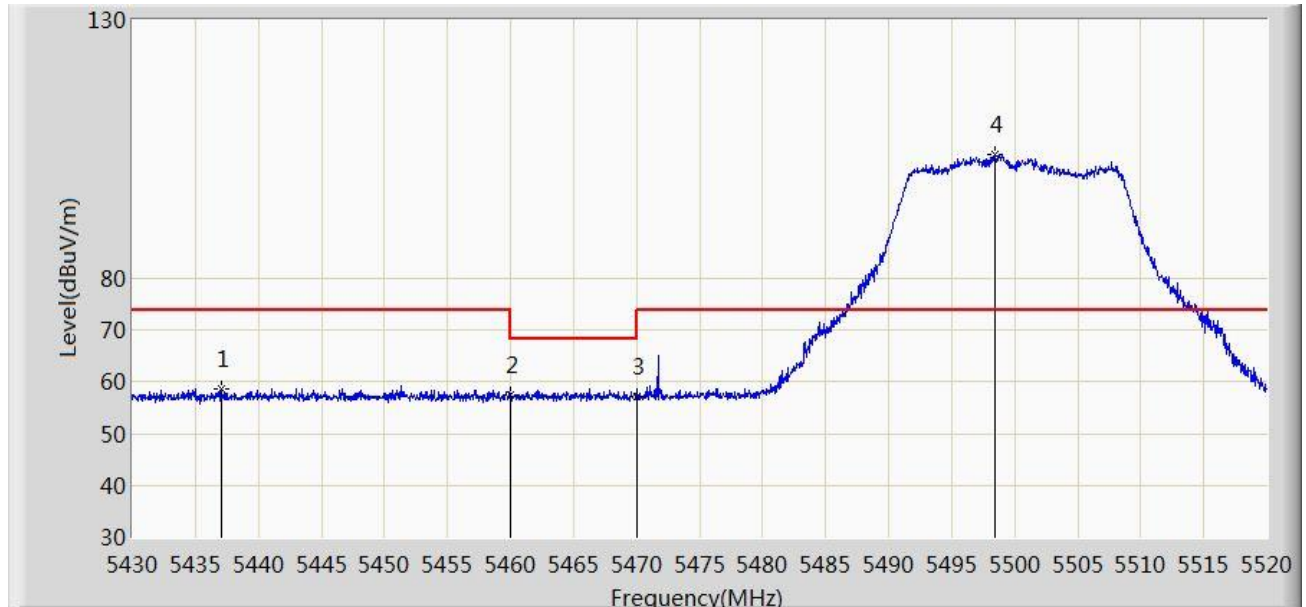


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5437.065	58.753	54.045	-15.247	74.000	4.708	PK
2			5460.000	57.456	53.016	-16.544	74.000	4.440	PK
3			5470.000	57.097	52.641	-11.103	68.200	4.455	PK
4		*	5498.490	103.910	99.420	N/A	N/A	4.490	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 01:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5500MHz	

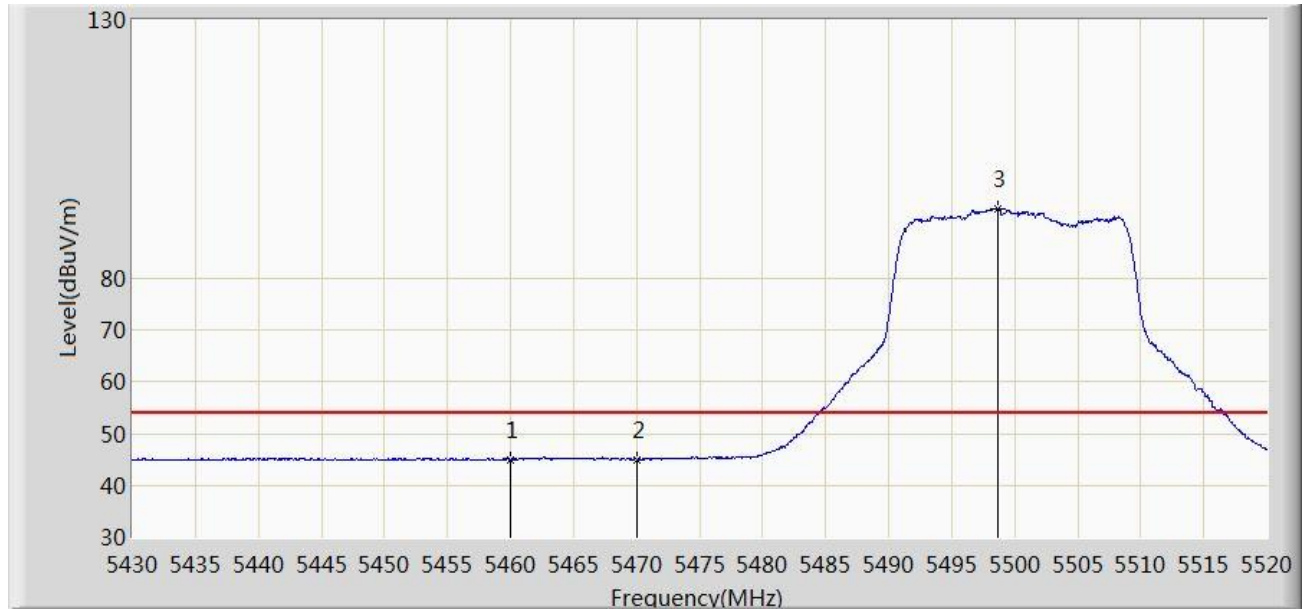


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.038	40.598	-8.962	54.000	4.440	AV
2			5470.000	45.049	40.593	-8.951	54.000	4.455	AV
3		*	5498.715	93.525	89.037	N/A	N/A	4.489	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

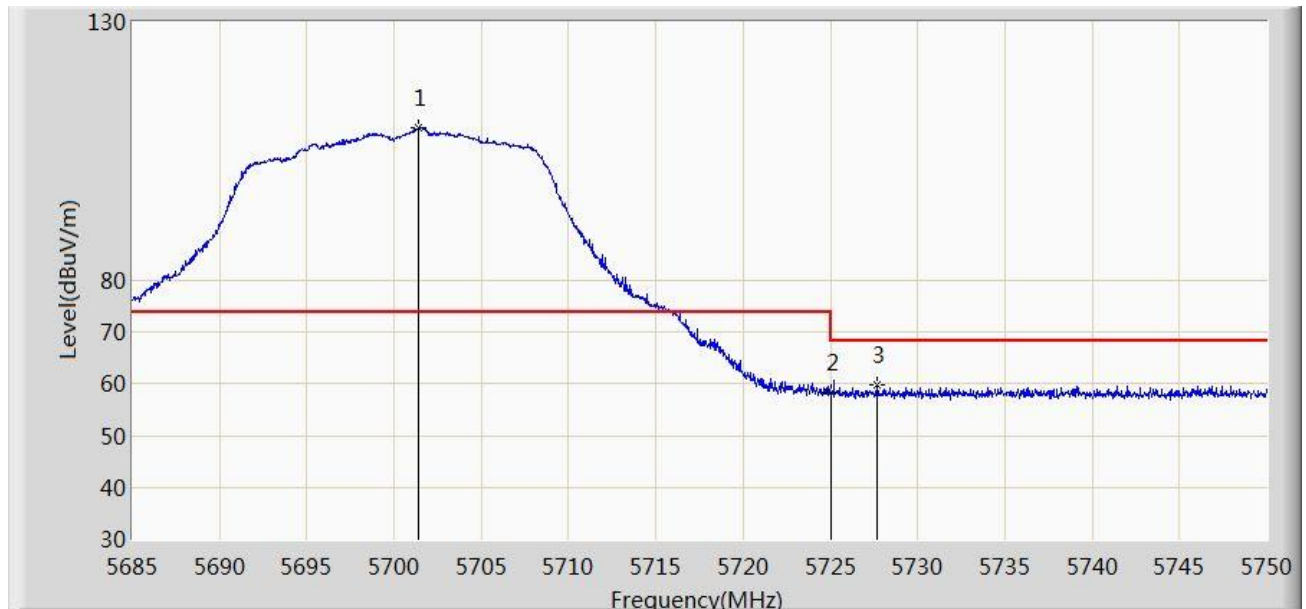


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5701.380	109.456	104.115	N/A	N/A	5.341	PK
2			5725.000	58.370	52.892	-9.830	68.200	5.478	PK
3			5727.705	59.910	54.422	-8.290	68.200	5.488	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:03
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5700MHz	

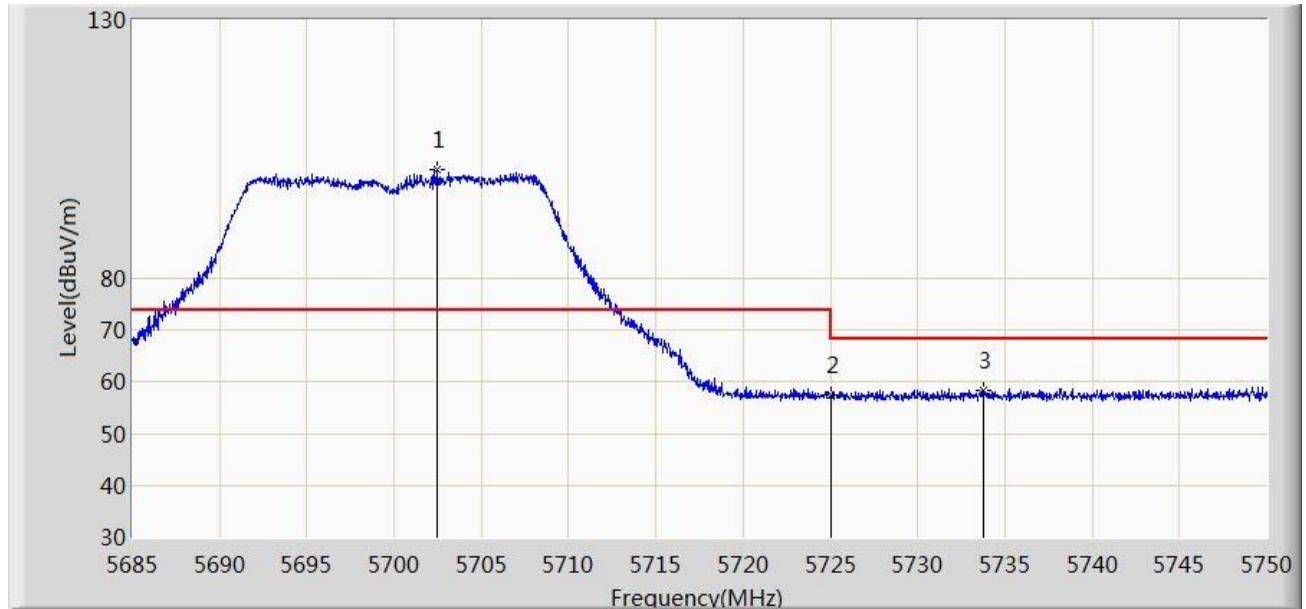


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5702.453	101.014	95.656	N/A	N/A	5.359	PK
2			5725.000	57.468	51.990	-10.732	68.200	5.478	PK
3			5733.783	58.492	52.972	-9.708	68.200	5.519	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:05
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz	

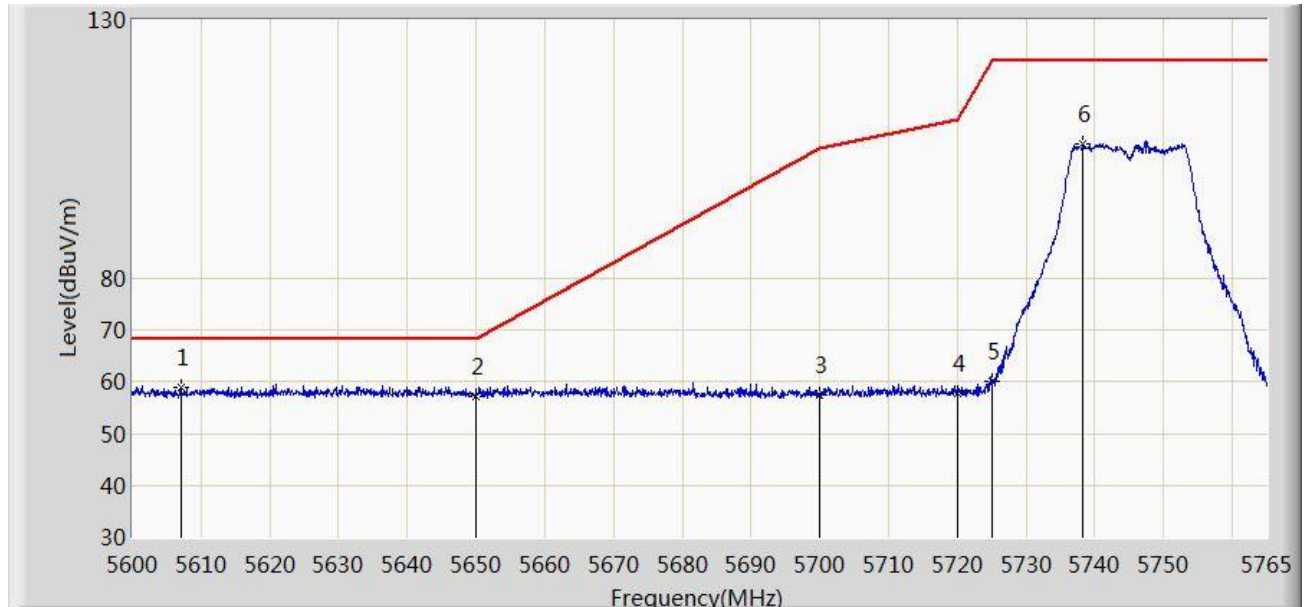


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5607.013	58.870	53.937	-9.330	68.200	4.933	PK
2			5650.000	57.208	51.872	-10.992	68.200	5.336	PK
3			5700.000	57.625	52.307	-47.575	105.200	5.318	PK
4			5720.000	57.727	52.253	-53.073	110.800	5.474	PK
5			5725.000	60.044	54.566	-62.156	122.200	5.478	PK
6			5738.270	105.972	100.429	N/A	N/A	5.544	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:08
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5745MHz power=15	

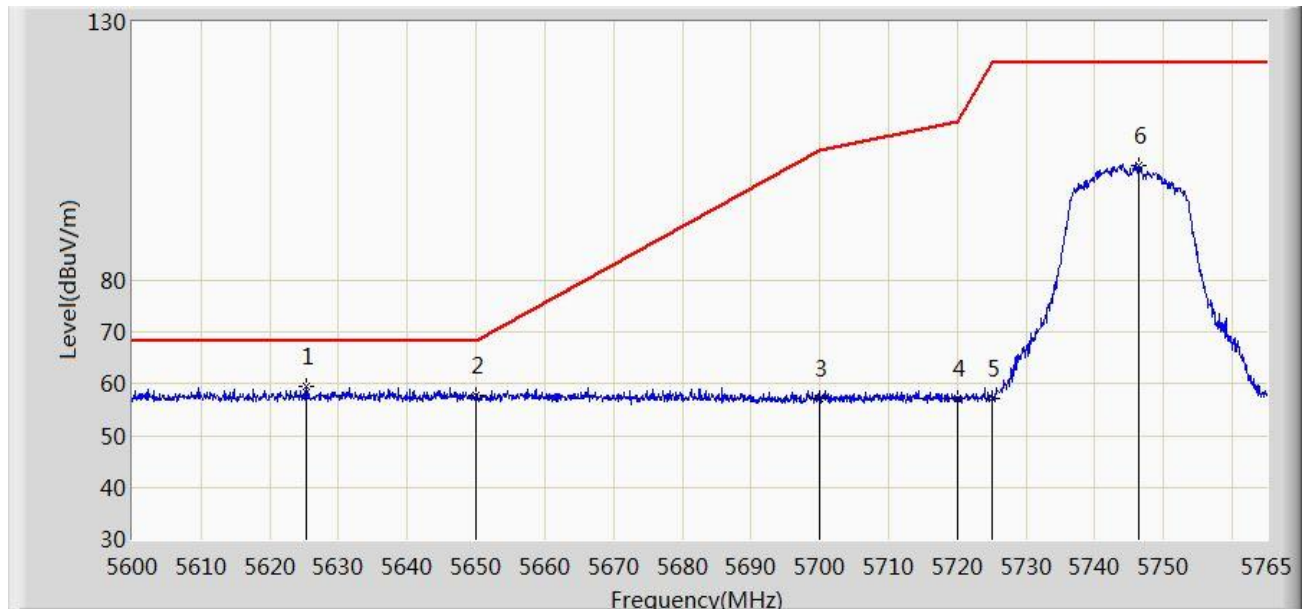


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5625.328	59.546	54.349	-8.654	68.200	5.196	PK
2			5650.000	57.692	52.356	-10.508	68.200	5.336	PK
3			5700.000	57.049	51.731	-48.151	105.200	5.318	PK
4			5720.000	57.296	51.822	-53.504	110.800	5.474	PK
5			5725.000	57.226	51.748	-64.974	122.200	5.478	PK
6			5746.355	102.310	96.676	N/A	N/A	5.634	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:10
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

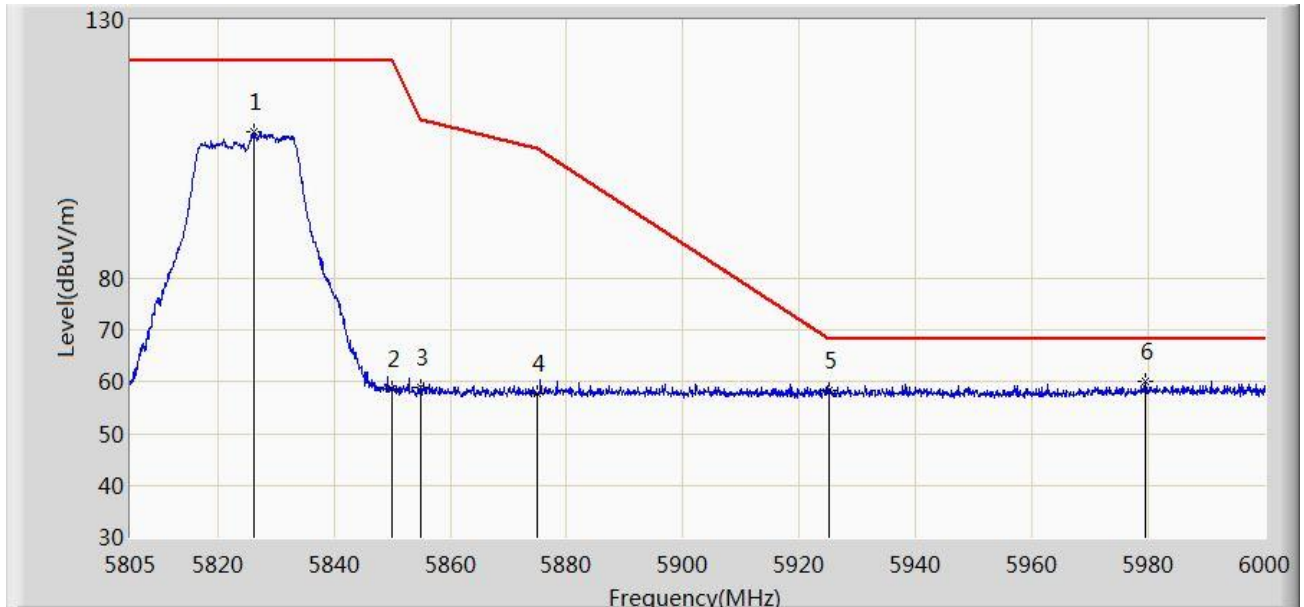


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5826.158	108.502	102.744	N/A	N/A	5.759	PK
2			5850.000	58.570	52.601	-63.630	122.200	5.968	PK
3			5855.000	58.903	52.928	-51.897	110.800	5.975	PK
4			5875.000	57.675	51.662	-47.525	105.200	6.013	PK
5			5925.000	58.430	52.295	-9.770	68.200	6.136	PK
6		*	5979.525	60.231	53.783	-7.969	68.200	6.448	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:13
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT20 at Channel 5825MHz	

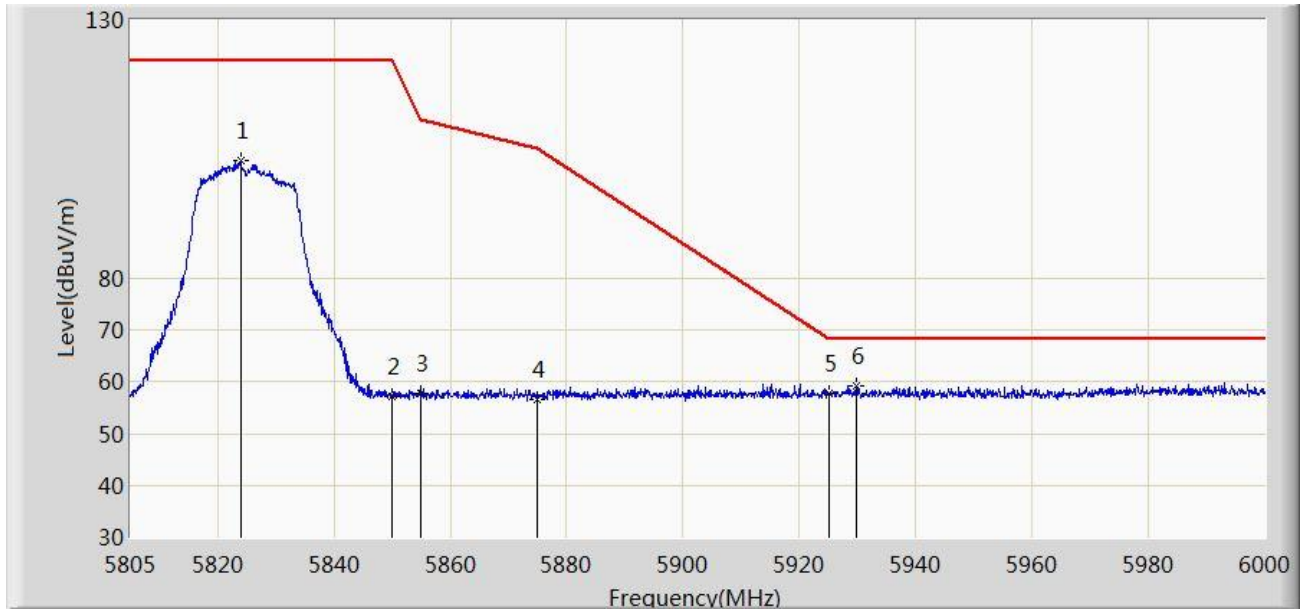


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5823.915	102.703	96.926	N/A	N/A	5.777	PK
2			5850.000	57.281	51.312	-64.919	122.200	5.968	PK
3			5855.000	57.645	51.670	-53.155	110.800	5.975	PK
4			5875.000	56.716	50.703	-48.484	105.200	6.013	PK
5			5925.000	57.802	51.667	-10.398	68.200	6.136	PK
6		*	5929.897	59.349	53.191	-8.851	68.200	6.158	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:17
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

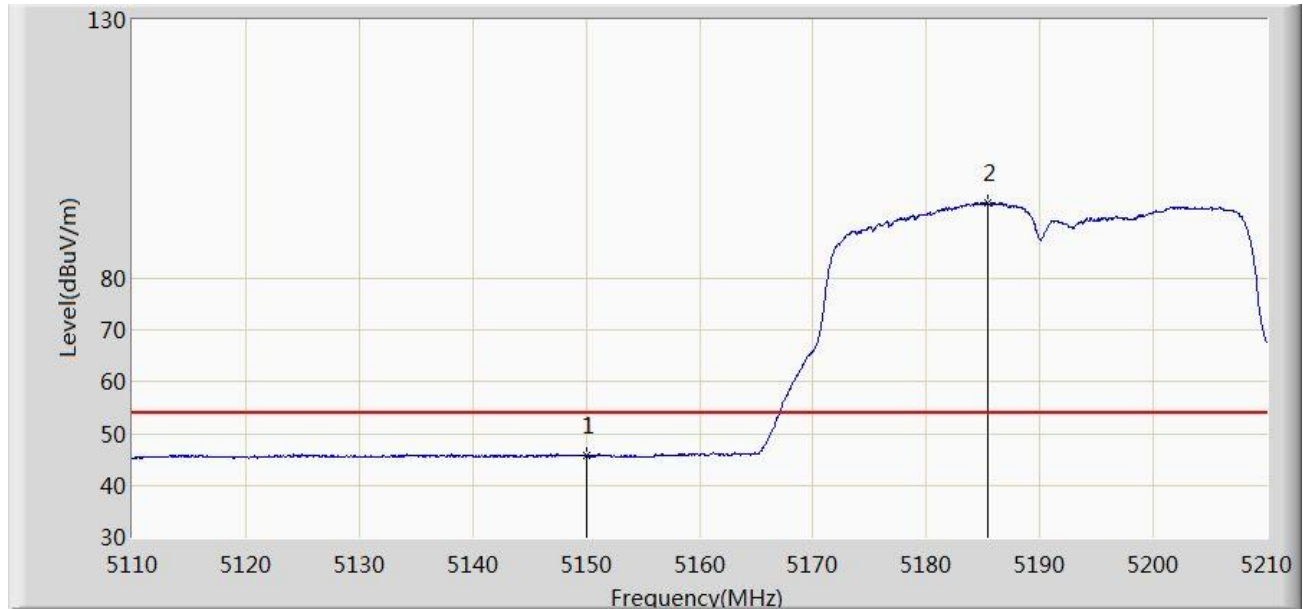


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.839	41.397	-8.161	54.000	4.442	AV
2		*	5185.350	94.650	90.221	N/A	N/A	4.428	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:20
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

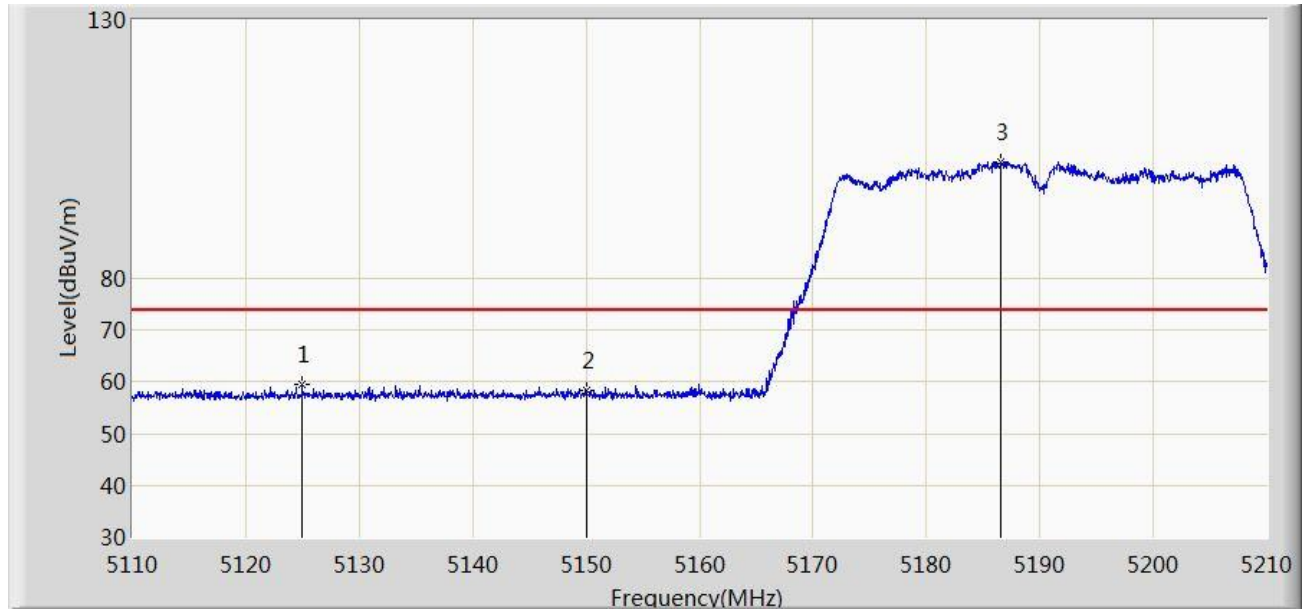


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5124.950	59.389	54.930	-14.611	74.000	4.459	PK
2			5150.000	58.260	53.818	-15.740	74.000	4.442	PK
3		*	5186.600	102.655	98.241	N/A	N/A	4.414	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:25
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

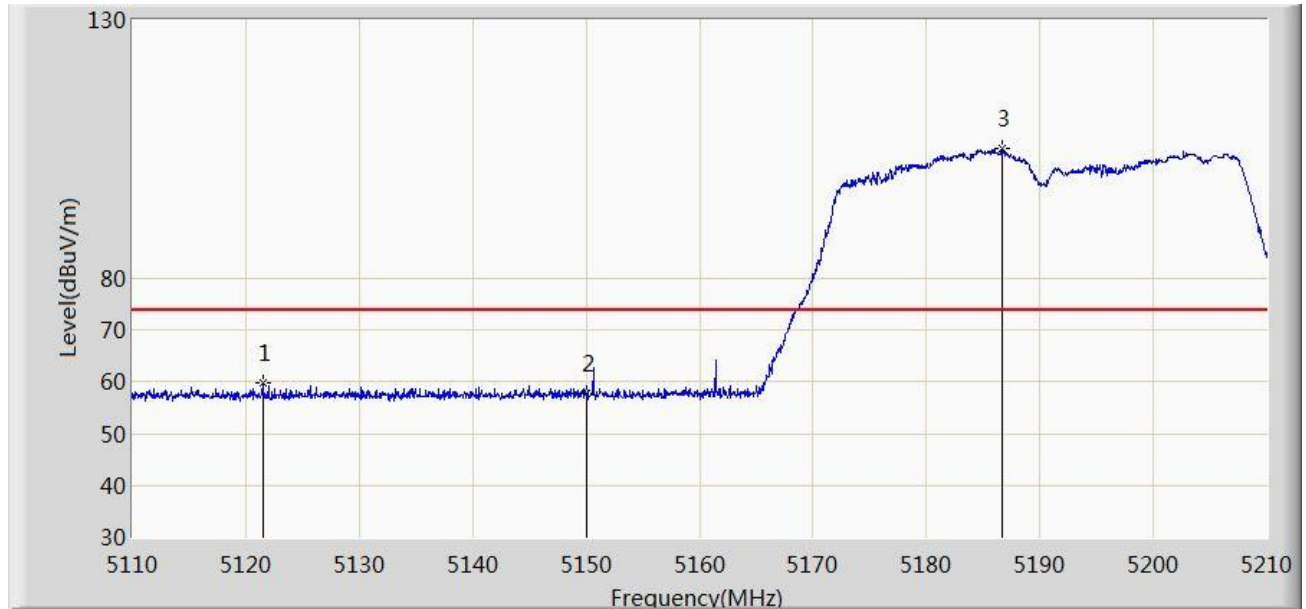


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5121.500	59.818	55.338	-14.182	74.000	4.480	PK
2			5150.000	57.890	53.448	-16.110	74.000	4.442	PK
3		*	5186.650	105.036	100.623	N/A	N/A	4.414	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:26
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5190MHz	

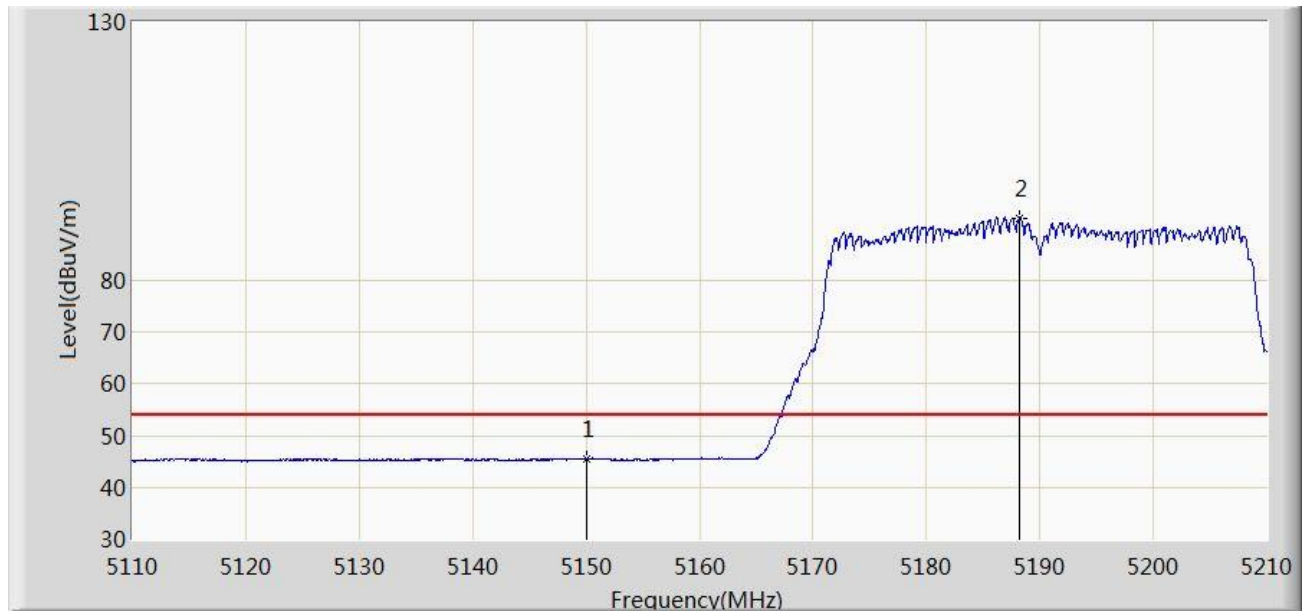


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	45.353	40.911	-8.647	54.000	4.442	AV
2		*	5188.200	91.982	87.587	N/A	N/A	4.395	AV

Note: Measure Level (dB μ V/m) = Reading Level (dB μ V) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:31
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

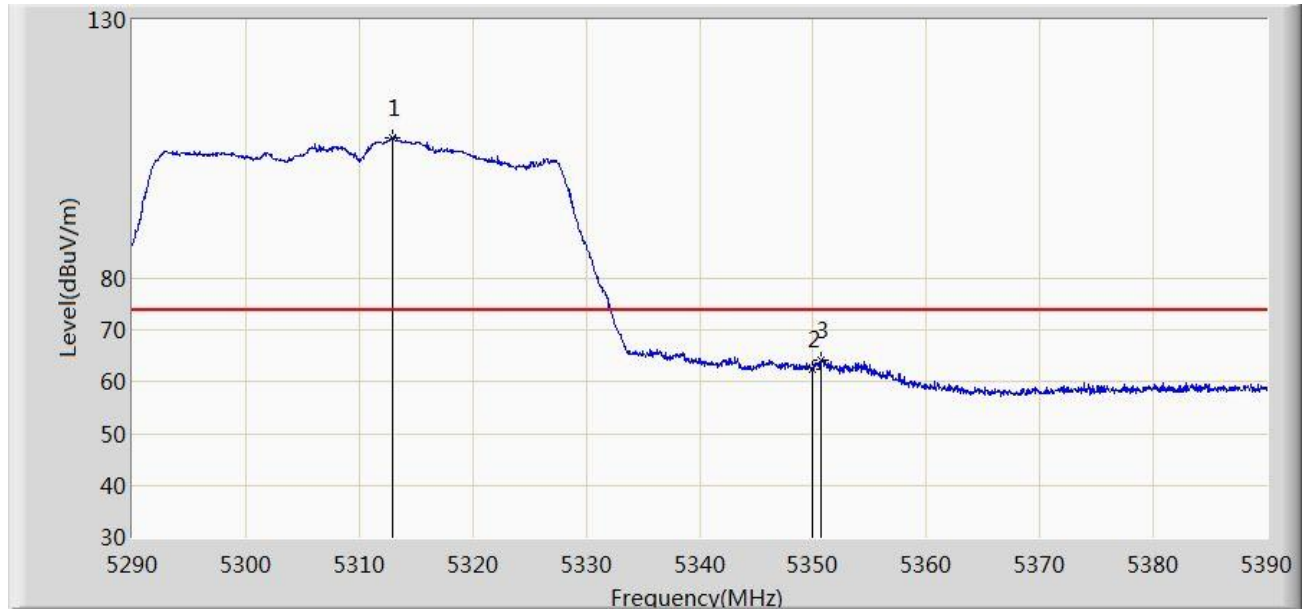


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.950	107.195	103.019	N/A	N/A	4.176	PK
2			5350.000	62.428	58.251	-11.572	74.000	4.177	PK
3			5350.650	64.353	60.172	-9.647	74.000	4.181	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:50
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

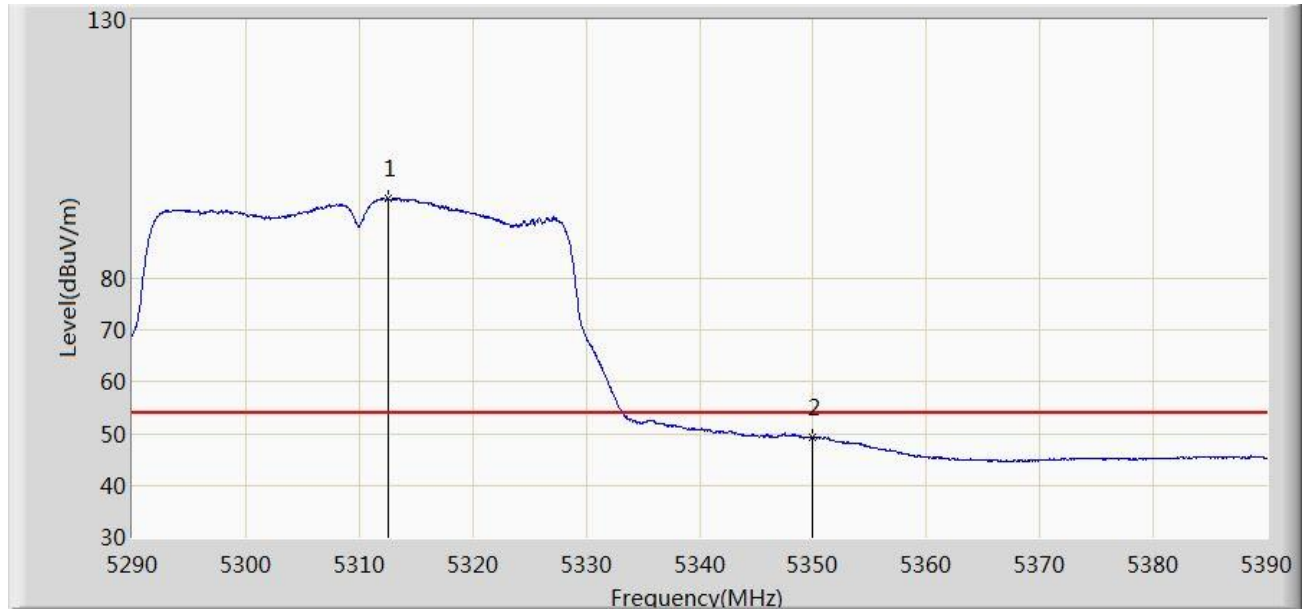


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5312.550	95.464	91.279	N/A	N/A	4.185	AV
2			5350.000	49.221	45.044	-4.779	54.000	4.177	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:52
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

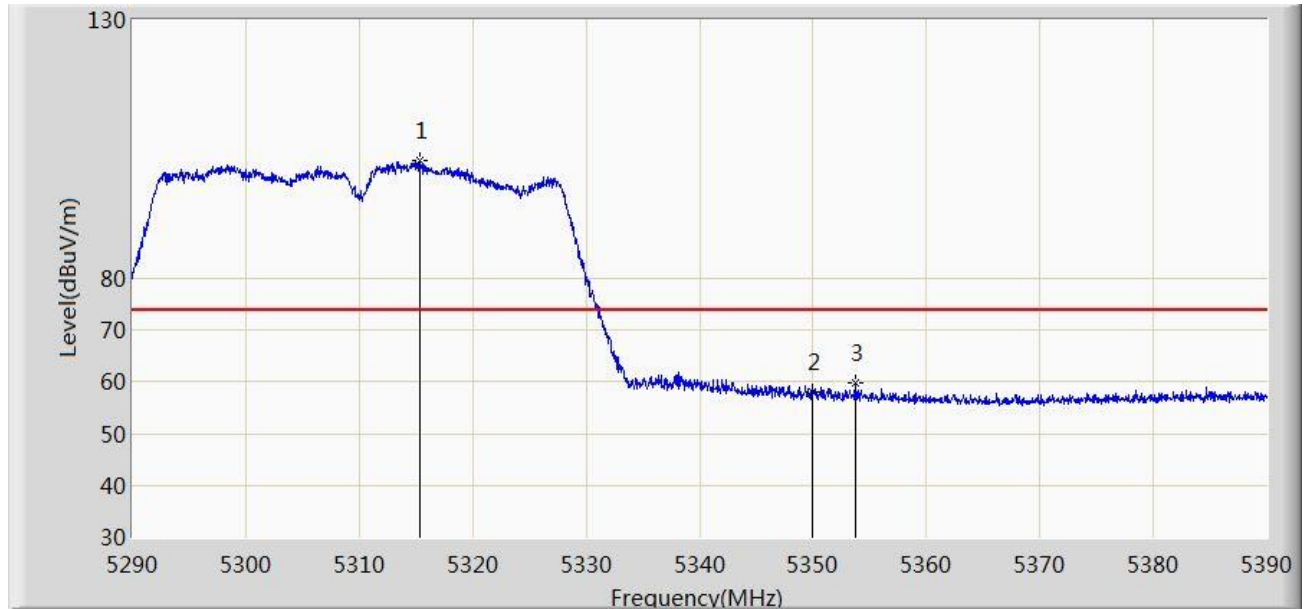


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5315.350	102.714	98.587	N/A	N/A	4.127	PK
2			5350.000	58.197	54.020	-15.803	74.000	4.177	PK
3			5353.700	59.723	55.527	-14.277	74.000	4.196	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:53
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5310MHz	

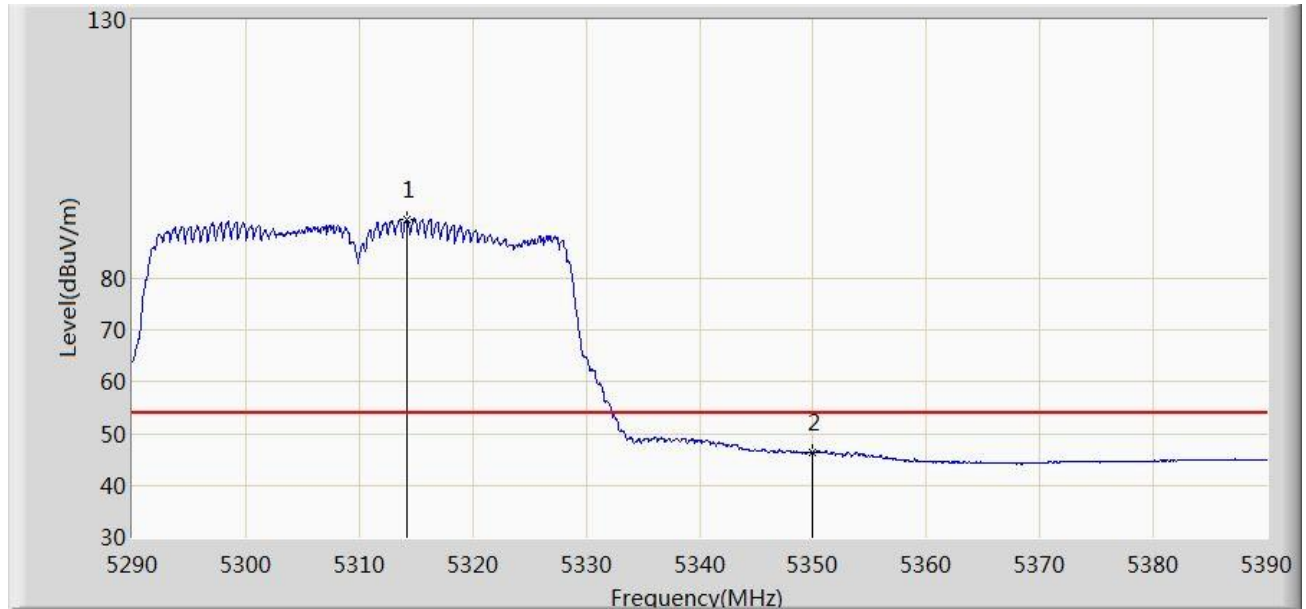


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5314.200	91.406	87.256	N/A	N/A	4.151	AV
2			5350.000	46.231	42.054	-7.769	54.000	4.177	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:56
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

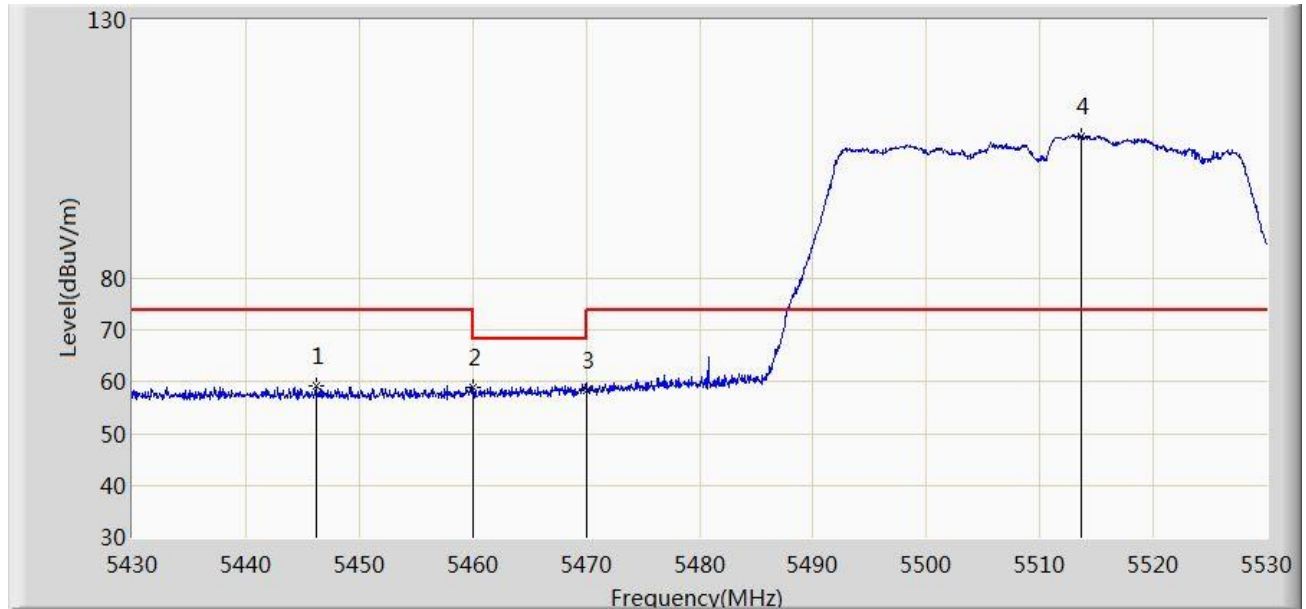


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5446.200	59.095	54.537	-14.905	74.000	4.558	PK
2			5460.000	58.914	54.474	-15.086	74.000	4.440	PK
3			5470.000	58.453	53.997	-9.747	68.200	4.455	PK
4		*	5513.600	107.506	102.866	N/A	N/A	4.640	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:58
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

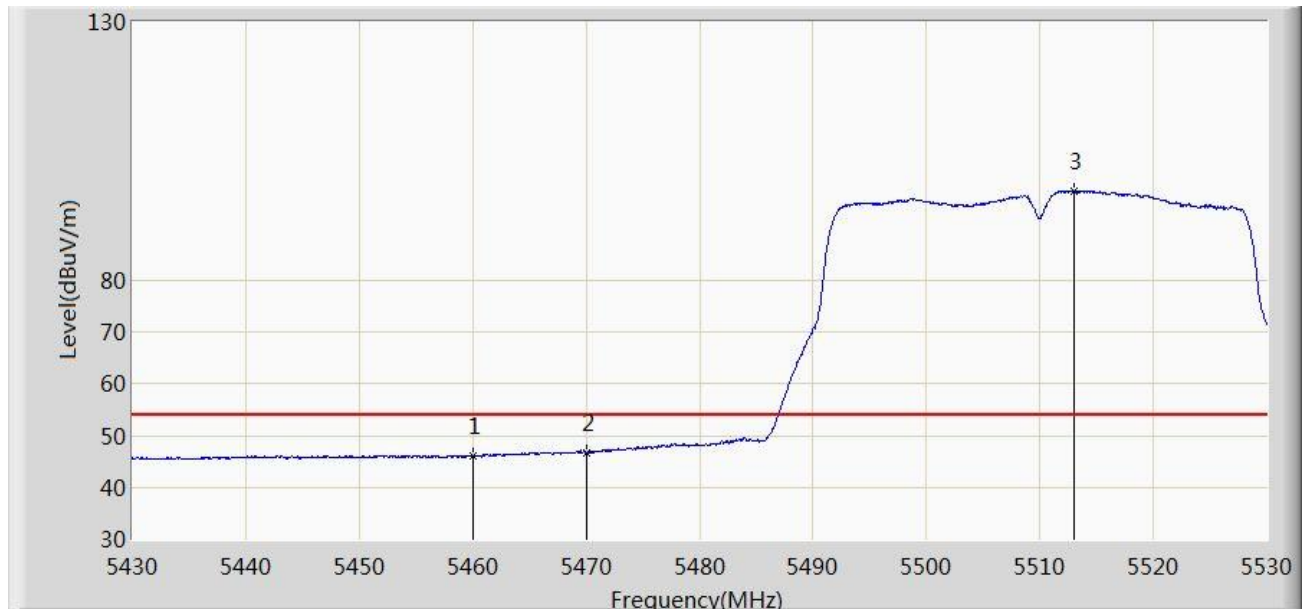


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.101	41.661	-7.899	54.000	4.440	AV
2			5470.000	46.686	42.230	-7.314	54.000	4.455	AV
3		*	5513.000	97.204	92.578	N/A	N/A	4.626	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 02:59
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

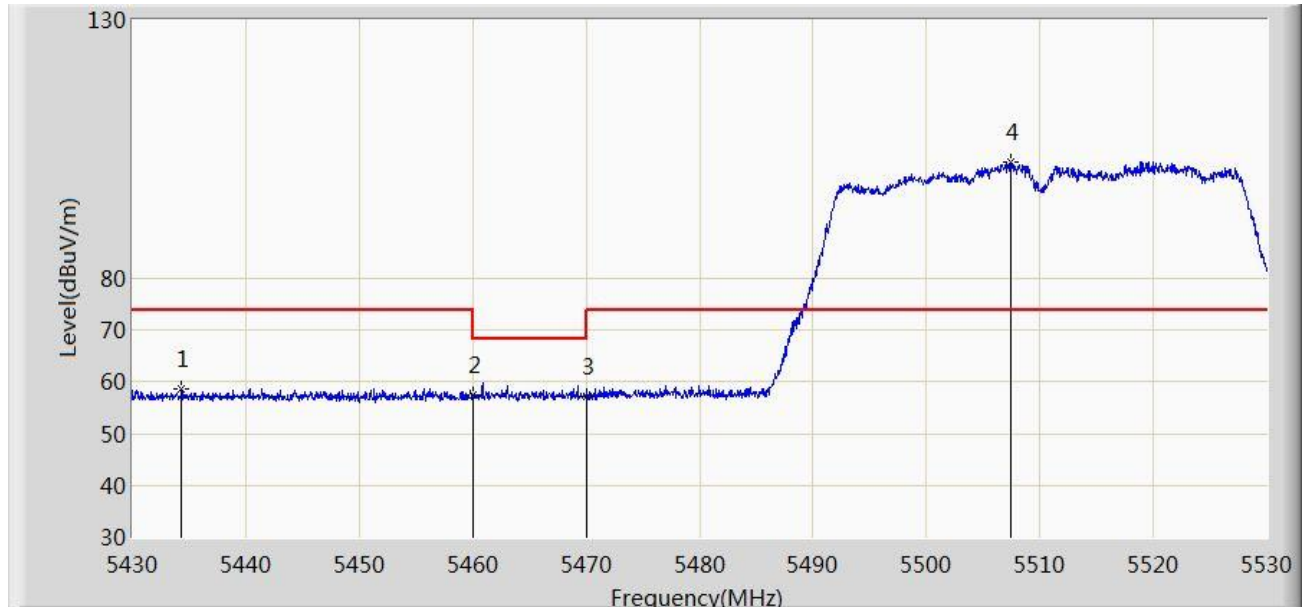


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5434.350	58.623	53.924	-15.377	74.000	4.699	PK
2			5460.000	57.355	52.915	-16.645	74.000	4.440	PK
3			5470.000	57.205	52.749	-10.995	68.200	4.455	PK
4		*	5507.400	102.439	97.950	N/A	N/A	4.489	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:01
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5510MHz	

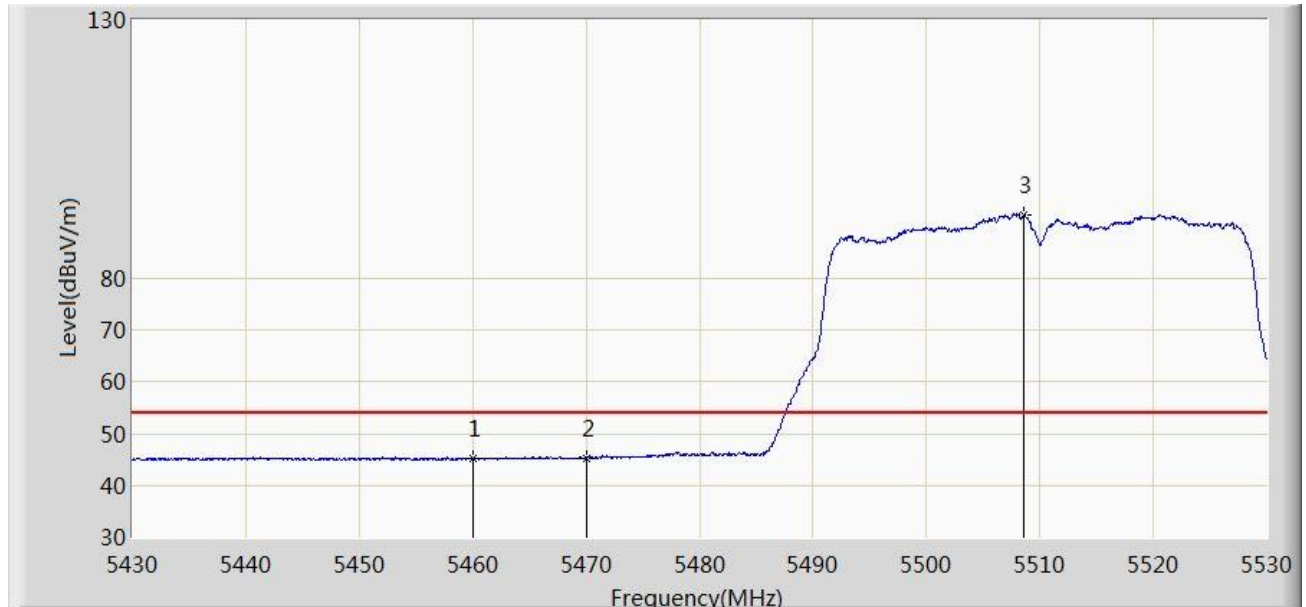


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.108	40.668	-8.892	54.000	4.440	AV
2			5470.000	45.332	40.876	-8.668	54.000	4.455	AV
3		*	5508.600	92.295	87.776	N/A	N/A	4.519	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:04
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

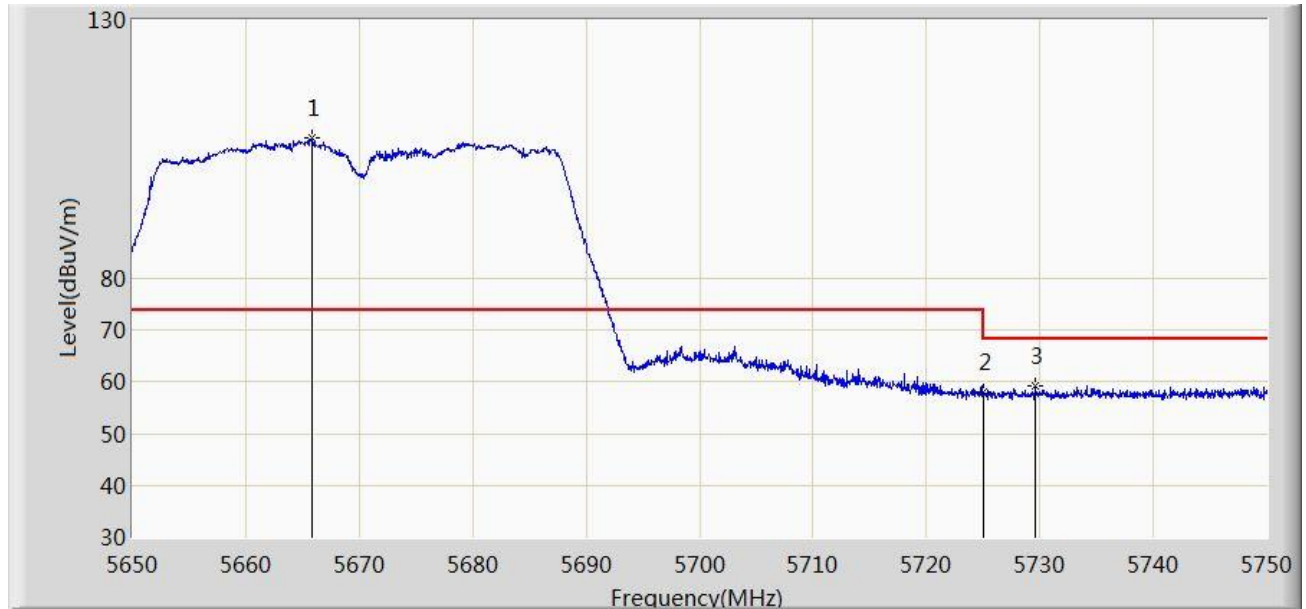


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5665.900	107.054	101.608	N/A	N/A	5.446	PK
2			5725.000	57.928	52.450	-10.272	68.200	5.478	PK
3			5729.550	59.159	53.662	-9.041	68.200	5.498	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:06
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5670MHz	

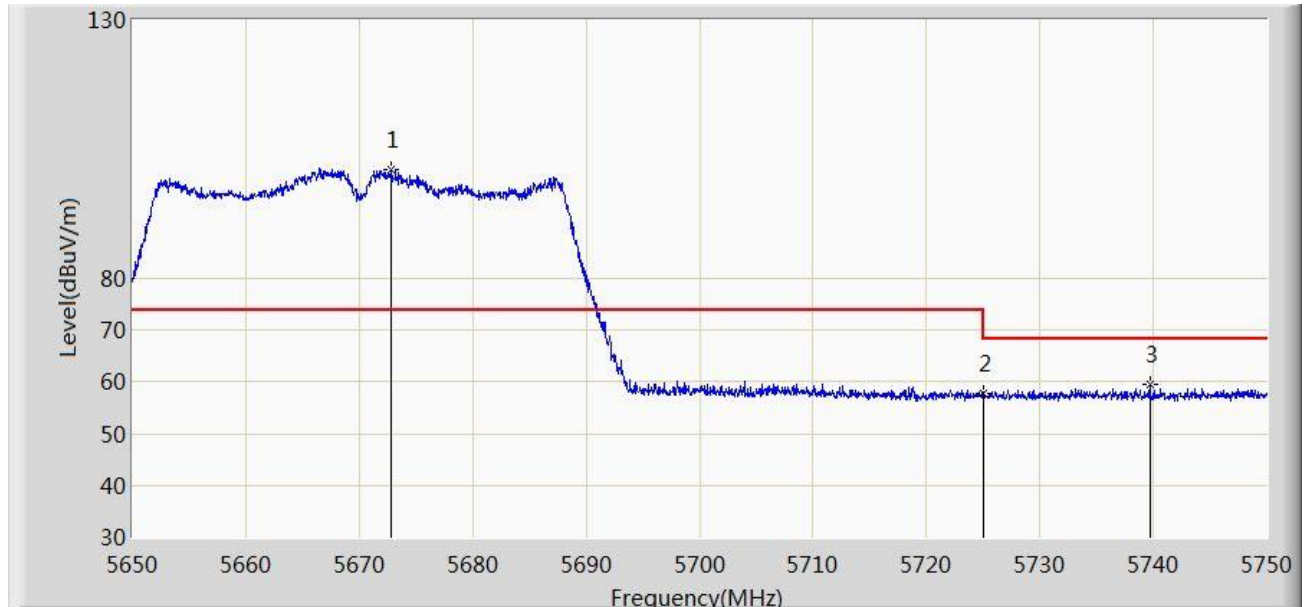


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5672.850	101.087	95.659	N/A	N/A	5.428	PK
2			5725.000	57.809	52.331	-10.391	68.200	5.478	PK
3			5739.700	59.488	53.937	-8.712	68.200	5.551	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:09
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

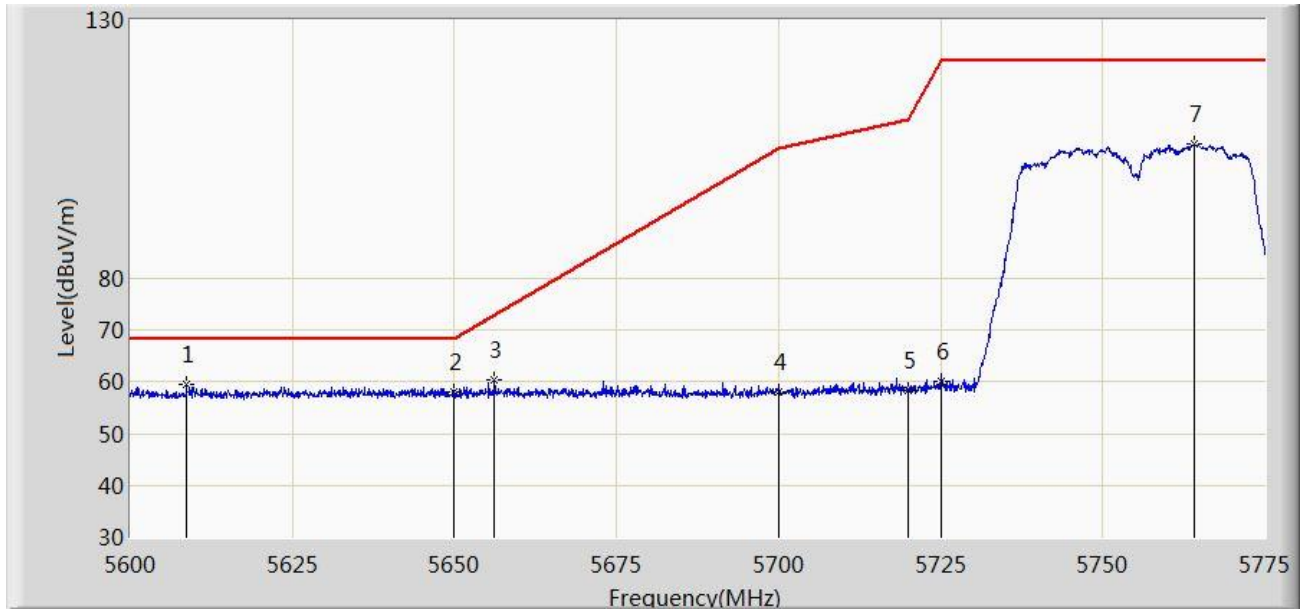


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5608.663	59.488	54.529	-8.712	68.200	4.958	PK
2			5650.000	58.034	52.698	-10.166	68.200	5.336	PK
3			5656.175	60.342	54.905	-12.445	72.787	5.437	PK
4			5700.000	58.120	52.802	-47.080	105.200	5.318	PK
5			5720.000	58.381	52.907	-52.419	110.800	5.474	PK
6			5725.000	60.062	54.584	-62.138	122.200	5.478	PK
7			5764.237	105.977	100.122	N/A	N/A	5.855	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:11
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5755MHz	

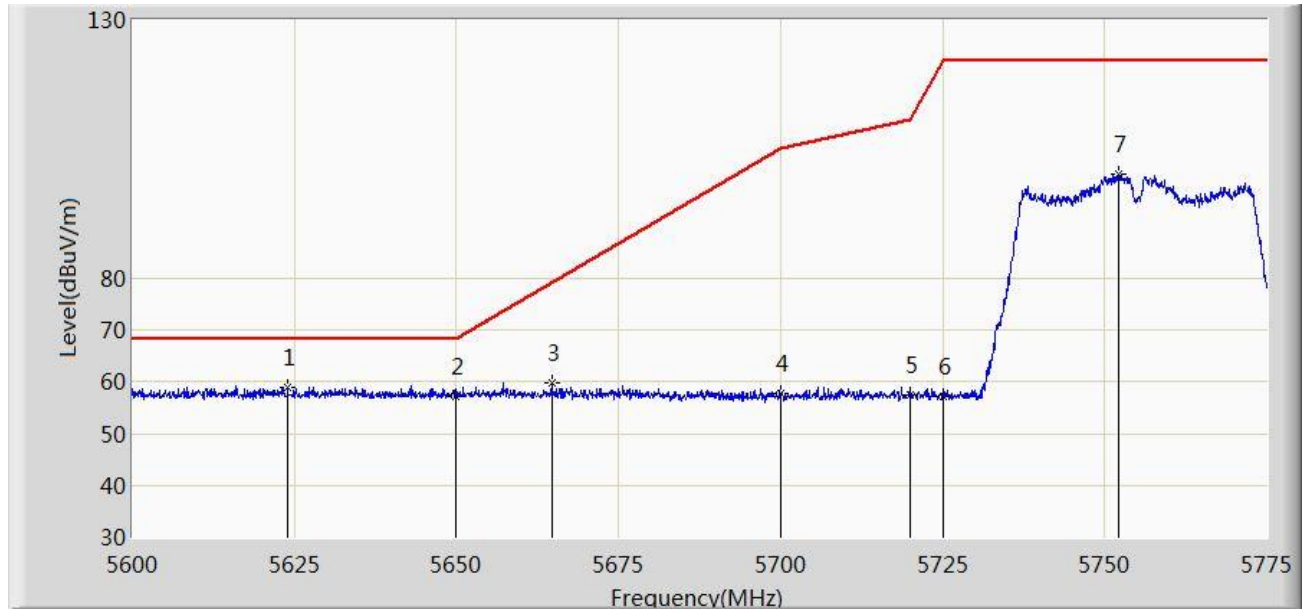


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5623.975	59.086	53.889	-9.114	68.200	5.197	PK
2			5650.000	57.270	51.934	-10.930	68.200	5.336	PK
3			5664.663	59.803	54.354	-19.281	79.084	5.450	PK
4			5700.000	57.683	52.365	-47.517	105.200	5.318	PK
5			5720.000	57.522	52.048	-53.278	110.800	5.474	PK
6			5725.000	57.298	51.820	-64.902	122.200	5.478	PK
7			5752.075	100.106	94.360	N/A	N/A	5.746	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:13
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

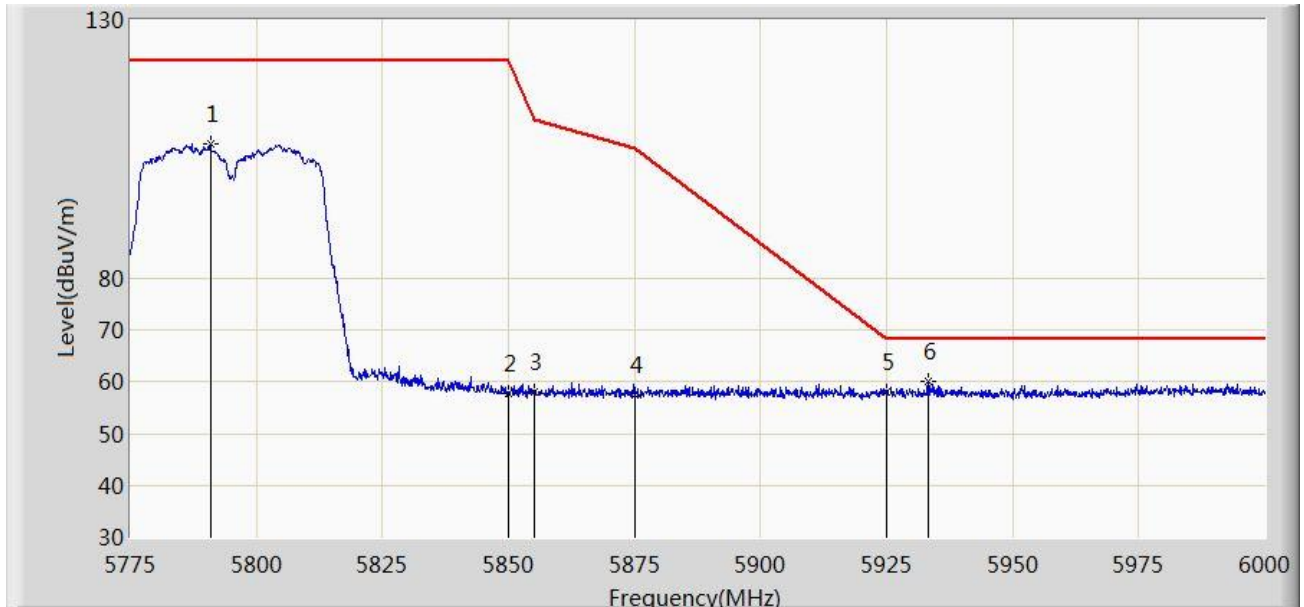


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5790.862	105.985	100.164	N/A	N/A	5.821	PK
2			5850.000	57.920	51.951	-64.280	122.200	5.968	PK
3			5855.000	58.177	52.202	-52.623	110.800	5.975	PK
4			5875.000	57.471	51.458	-47.729	105.200	6.013	PK
5			5925.000	58.037	51.902	-10.163	68.200	6.136	PK
6		*	5933.175	60.060	53.919	-8.140	68.200	6.142	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:15
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT40 at Channel 5795MHz	

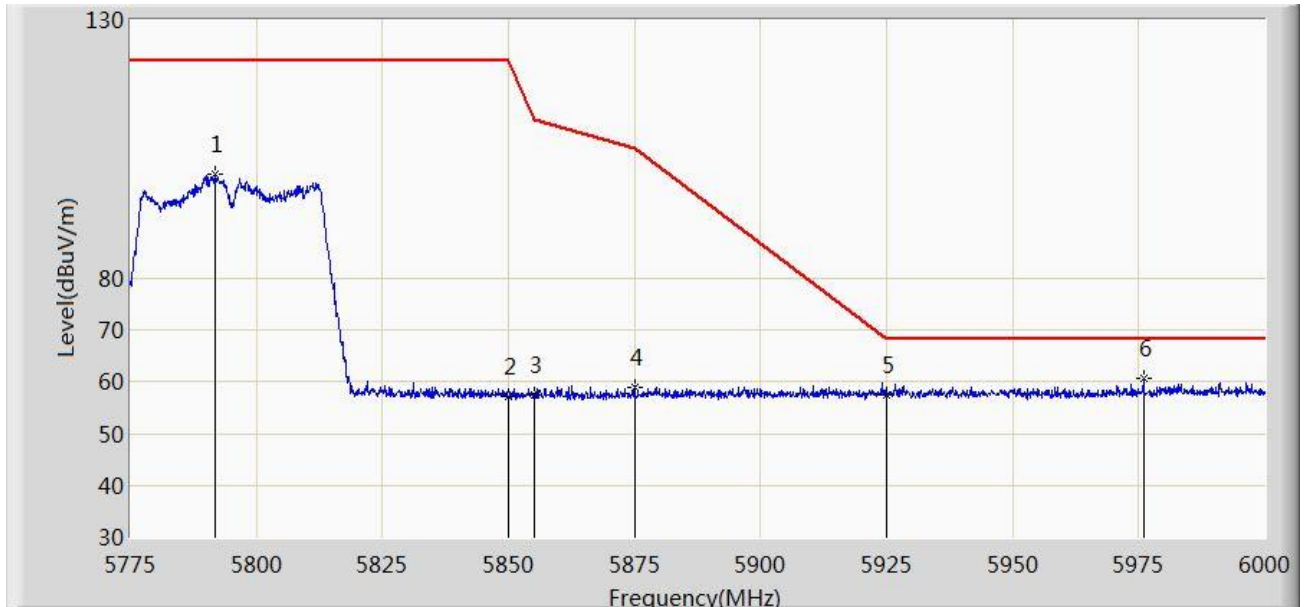


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5791.875	100.136	94.307	N/A	N/A	5.829	PK
2			5850.000	57.099	51.130	-65.101	122.200	5.968	PK
3			5855.000	57.551	51.576	-53.249	110.800	5.975	PK
4			5875.000	58.969	52.956	-46.231	105.200	6.013	PK
5			5925.000	57.569	51.434	-10.631	68.200	6.136	PK
6		*	5975.925	60.756	54.418	-7.444	68.200	6.337	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:18
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

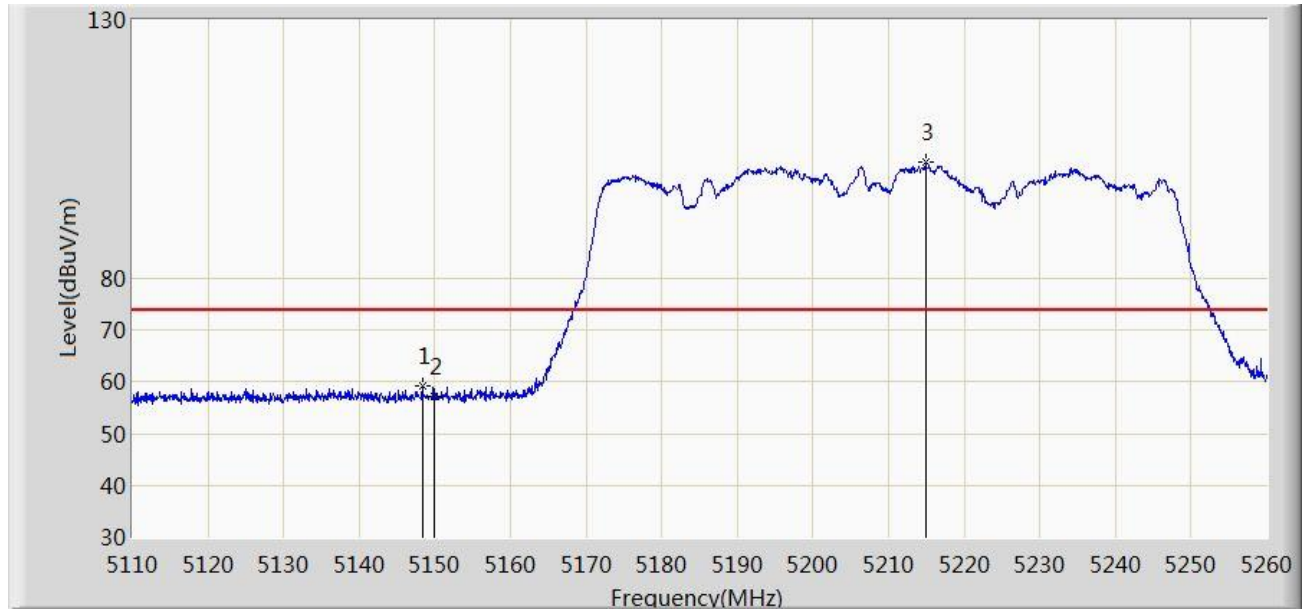


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5148.325	59.107	54.684	-14.893	74.000	4.423	PK
2			5150.000	57.306	52.864	-16.694	74.000	4.442	PK
3		*	5214.850	102.612	98.444	N/A	N/A	4.168	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:21
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

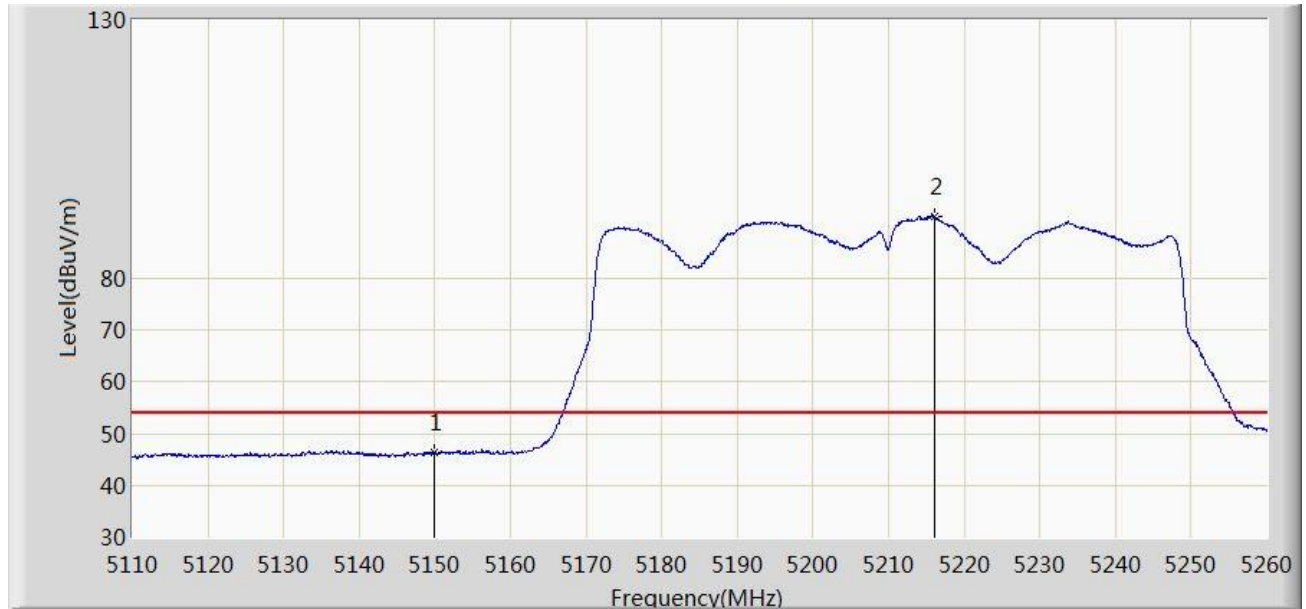


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.262	41.820	-7.738	54.000	4.442	AV
2		*	5216.050	92.015	87.856	N/A	N/A	4.160	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:23
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

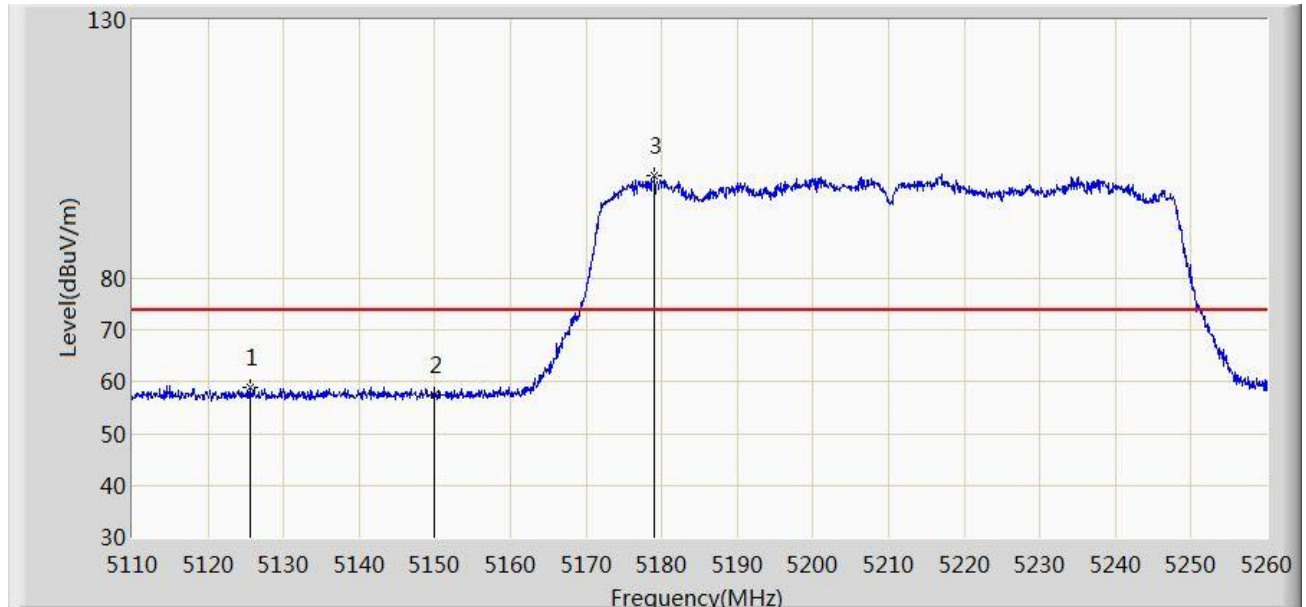


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5125.525	59.057	54.602	-14.943	74.000	4.456	PK
2			5150.000	57.369	52.927	-16.631	74.000	4.442	PK
3		*	5179.000	99.796	95.303	N/A	N/A	4.494	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:24
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5210MHz	

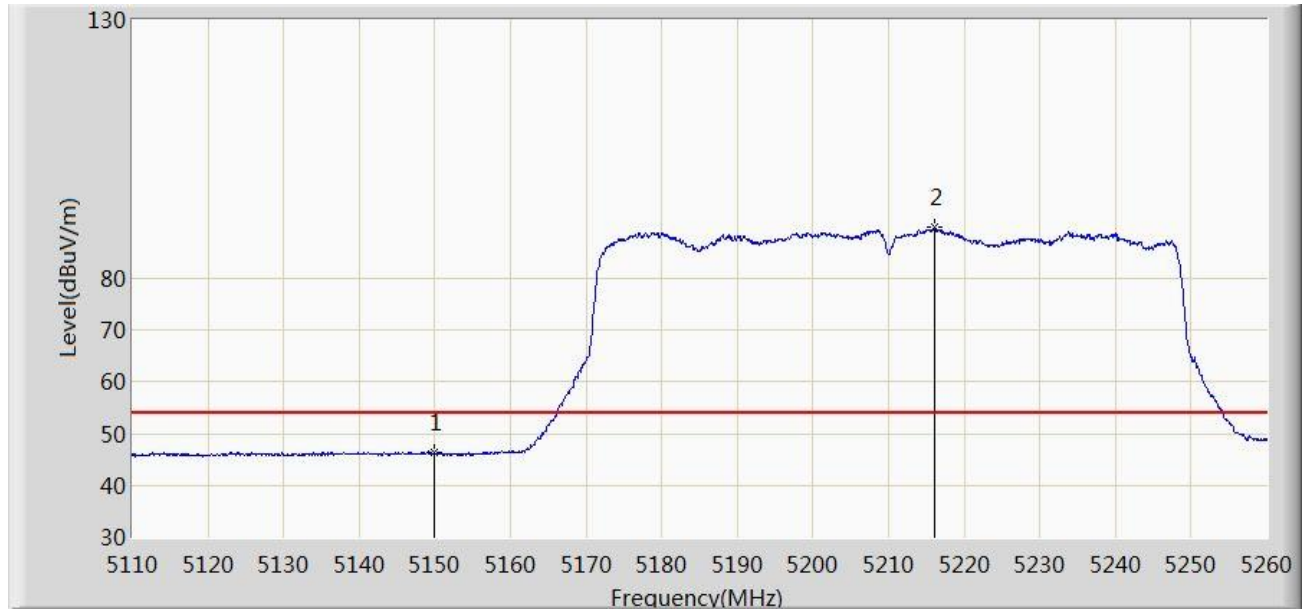


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5150.000	46.256	41.814	-7.744	54.000	4.442	AV
2		*	5216.050	89.817	85.658	N/A	N/A	4.160	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:29
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

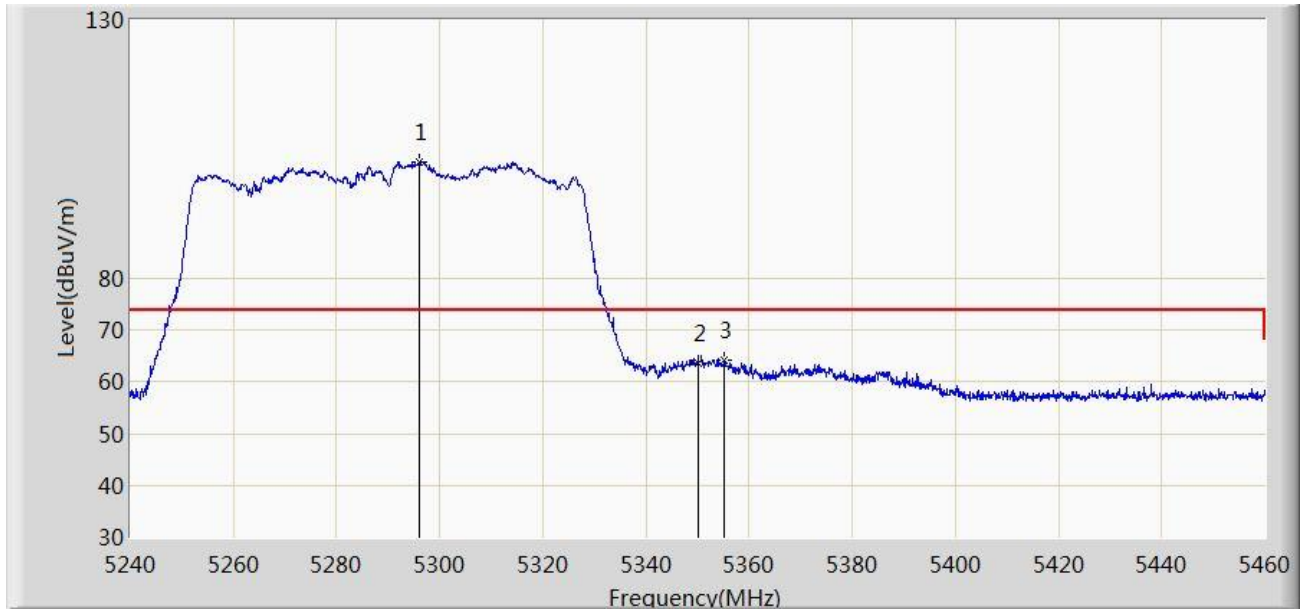


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.990	102.532	98.137	N/A	N/A	4.395	PK
2			5350.000	63.752	59.575	-10.248	74.000	4.177	PK
3			5355.170	64.345	60.144	-9.655	74.000	4.201	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:31
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

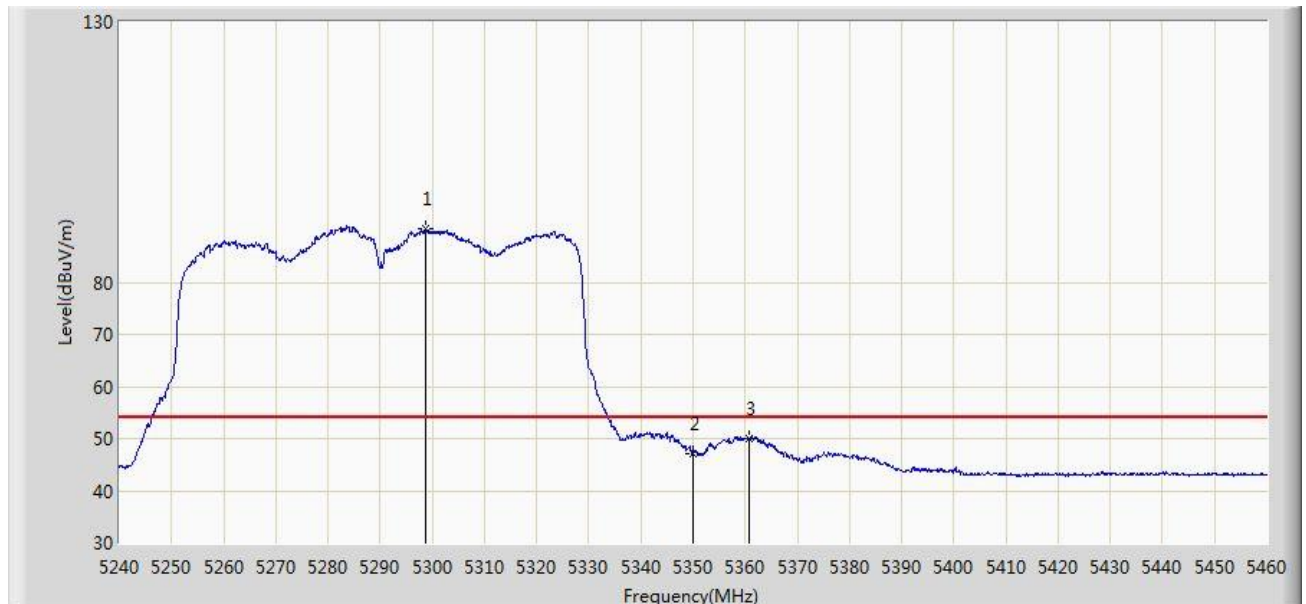


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5298.740	90.153	85.743	N/A	N/A	4.411	AV
2			5350.000	47.244	43.067	-6.756	54.000	4.177	AV
3			5360.670	50.094	45.876	-3.906	54.000	4.218	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:33
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

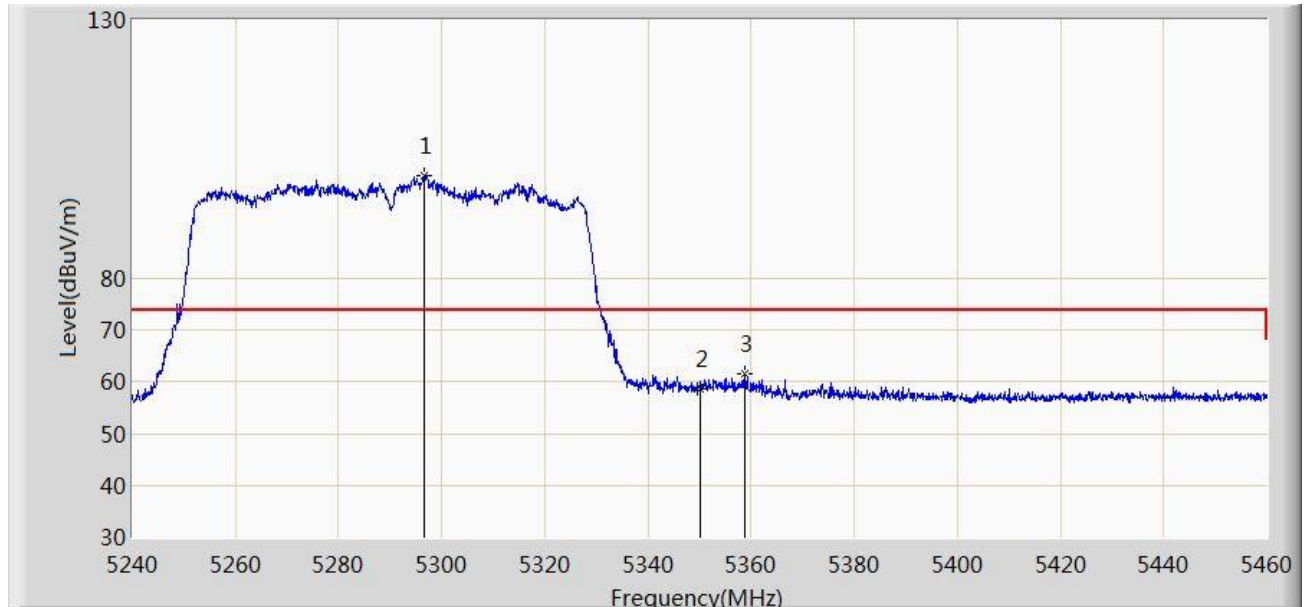


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5296.650	99.948	95.549	N/A	N/A	4.399	PK
2			5350.000	58.687	54.510	-15.313	74.000	4.177	PK
3			5358.690	61.503	57.291	-12.497	74.000	4.212	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:34
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5290MHz	

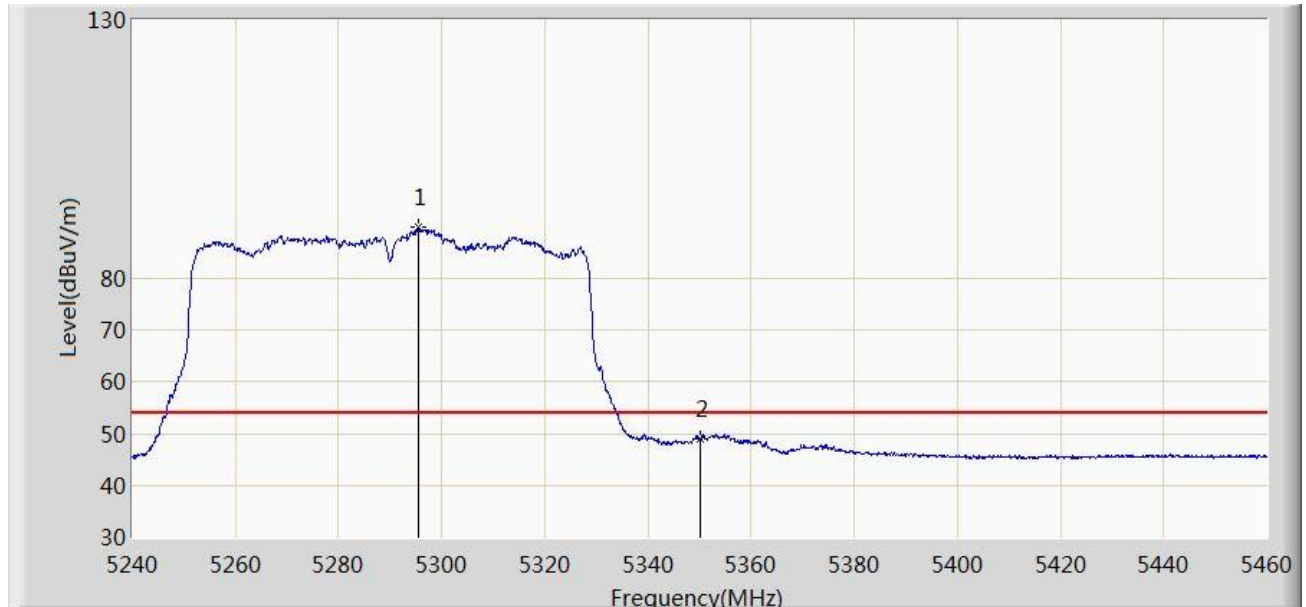


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5295.550	89.859	85.467	N/A	N/A	4.392	AV
2			5350.000	48.868	44.691	-5.132	54.000	4.177	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:39
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

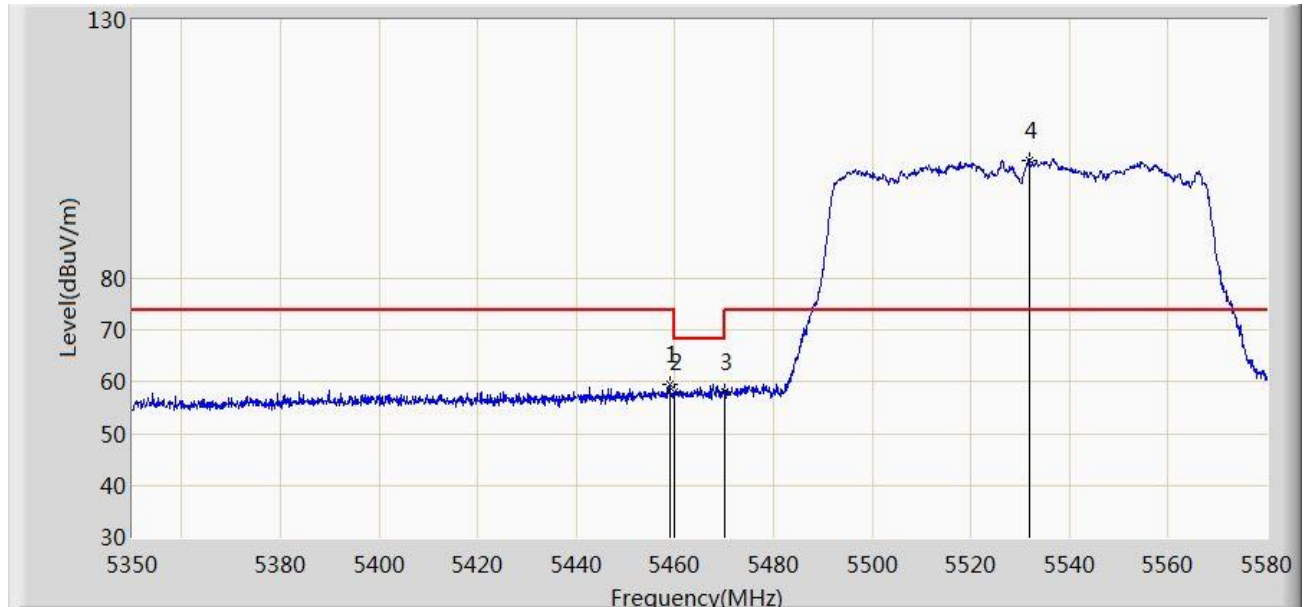


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5458.905	59.522	55.084	-14.478	74.000	4.438	PK
2			5460.000	57.989	53.549	-16.011	74.000	4.440	PK
3			5470.000	58.014	53.558	-10.186	68.200	4.455	PK
4		*	5531.815	102.953	98.059	N/A	N/A	4.894	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:43
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

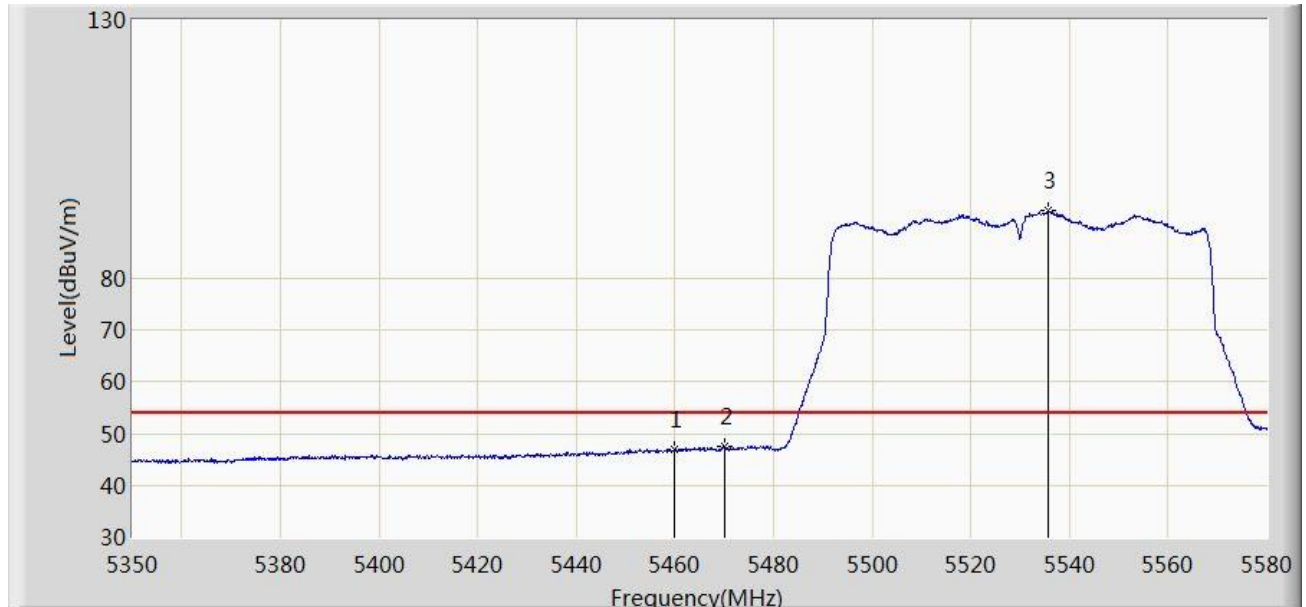


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	46.945	42.505	-7.055	54.000	4.440	AV
2			5470.000	47.431	42.975	-6.569	54.000	4.455	AV
3		*	5535.610	93.259	88.346	N/A	N/A	4.913	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:44
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

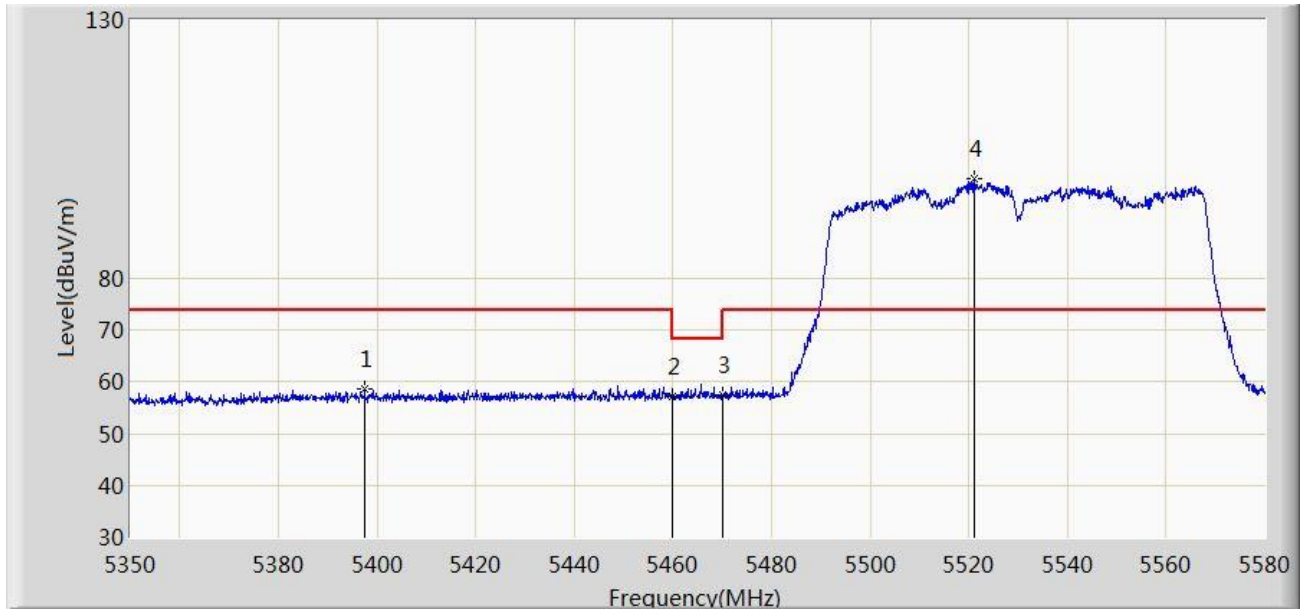


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5397.495	58.757	54.107	-15.243	74.000	4.649	PK
2			5460.000	57.316	52.876	-16.684	74.000	4.440	PK
3			5470.000	57.498	53.042	-10.702	68.200	4.455	PK
4		*	5521.235	99.273	94.447	N/A	N/A	4.826	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:45
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5530MHz	

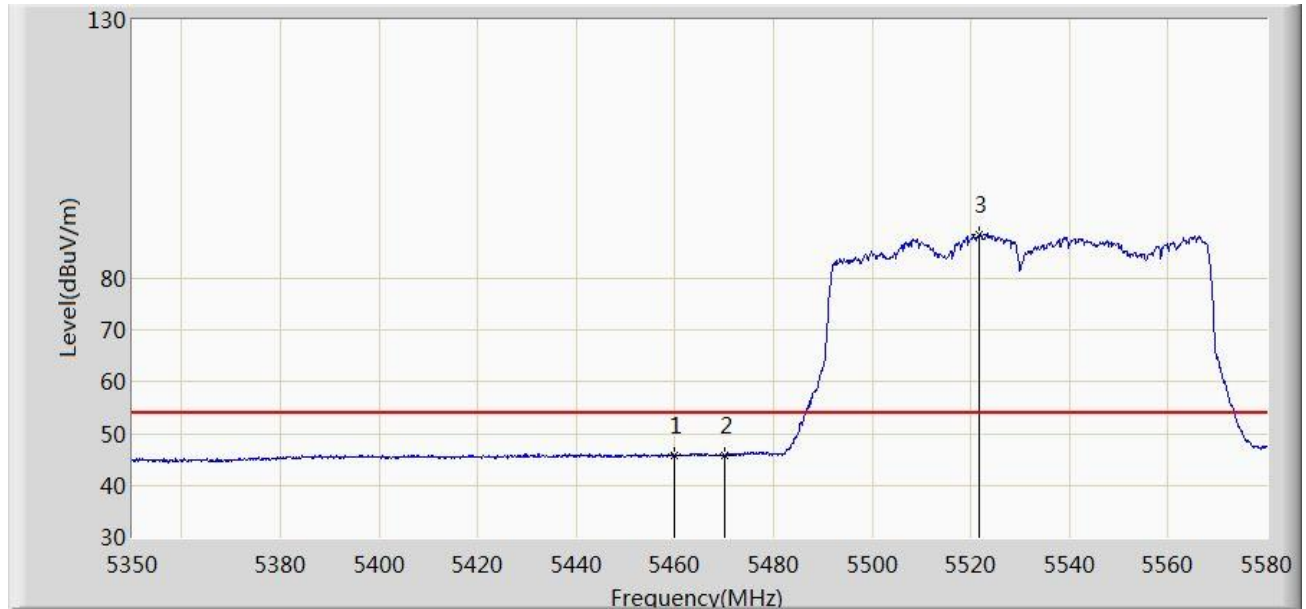


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5460.000	45.786	41.346	-8.214	54.000	4.440	AV
2			5470.000	45.869	41.413	-8.131	54.000	4.455	AV
3		*	5521.695	88.588	83.751	N/A	N/A	4.837	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:48
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

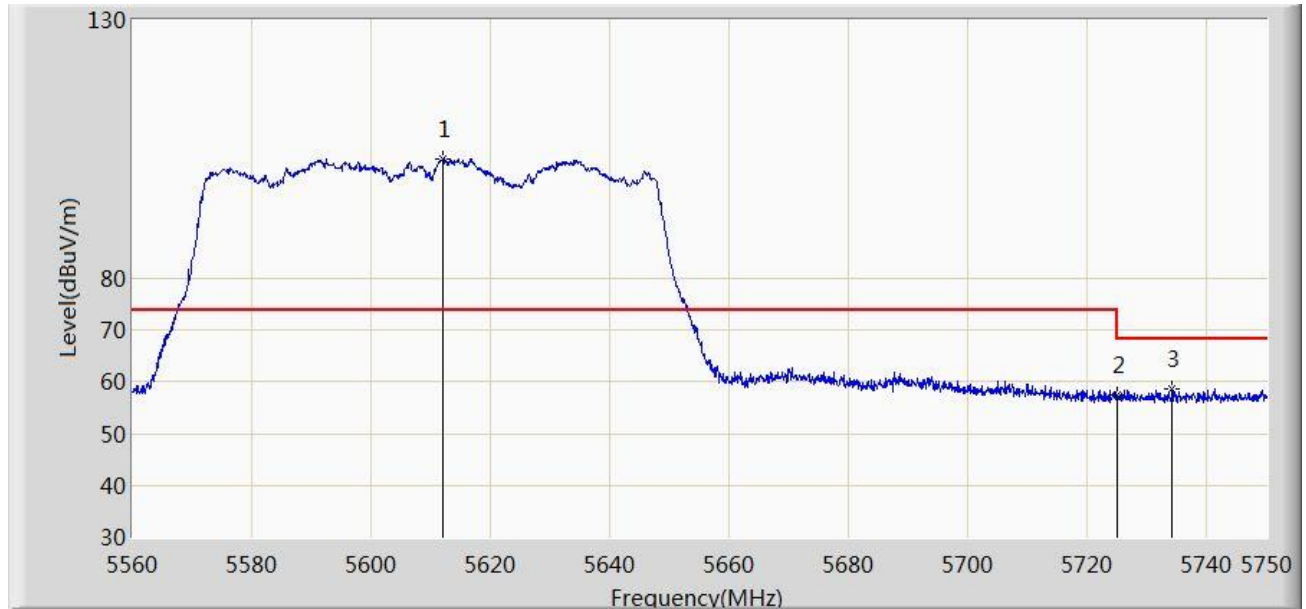


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5612.060	103.150	98.138	N/A	N/A	5.012	PK
2			5725.000	57.468	51.990	-10.732	68.200	5.478	PK
3			5734.135	58.798	53.277	-9.402	68.200	5.521	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:49
Limit: FCC_Part15.209_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5610MHz	

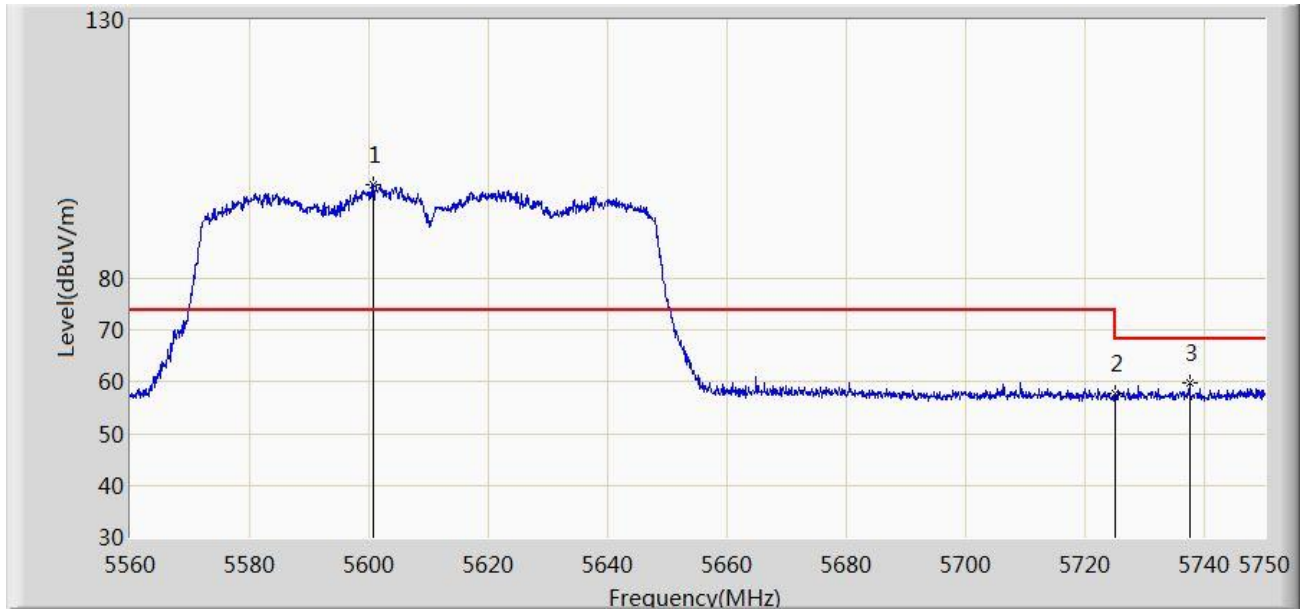


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		*	5600.660	98.224	93.361	N/A	N/A	4.862	PK
2			5725.000	57.798	52.320	-10.402	68.200	5.478	PK
3			5737.365	59.794	54.256	-8.406	68.200	5.538	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:51
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

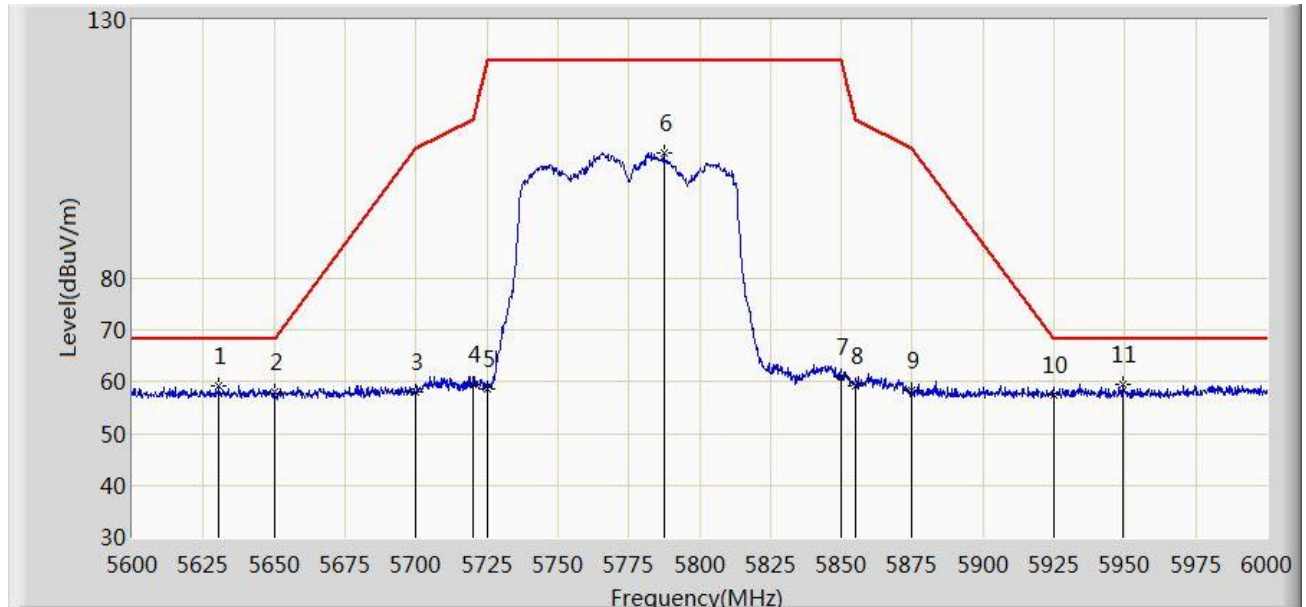


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5630.400	59.209	54.015	-8.991	68.200	5.194	PK
2			5650.000	57.967	52.631	-10.233	68.200	5.336	PK
3			5700.000	58.088	52.770	-47.112	105.200	5.318	PK
4			5720.000	59.446	53.972	-51.354	110.800	5.474	PK
5			5725.000	58.604	53.126	-63.596	122.200	5.478	PK
6			5787.400	104.210	98.416	N/A	N/A	5.794	PK
7			5850.000	60.992	55.023	-61.208	122.200	5.968	PK
8			5855.000	59.355	53.380	-51.445	110.800	5.975	PK
9			5875.000	58.469	52.456	-46.731	105.200	6.013	PK
10			5925.000	57.386	51.251	-10.814	68.200	6.136	PK
11		*	5949.400	59.676	53.623	-8.524	68.200	6.053	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2019/12/06 - 03:58
Limit: FCC_Part15.407_RSE(3m)	Engineer: Tyler Yuan
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11ac-VHT80 at Channel 5775MHz	

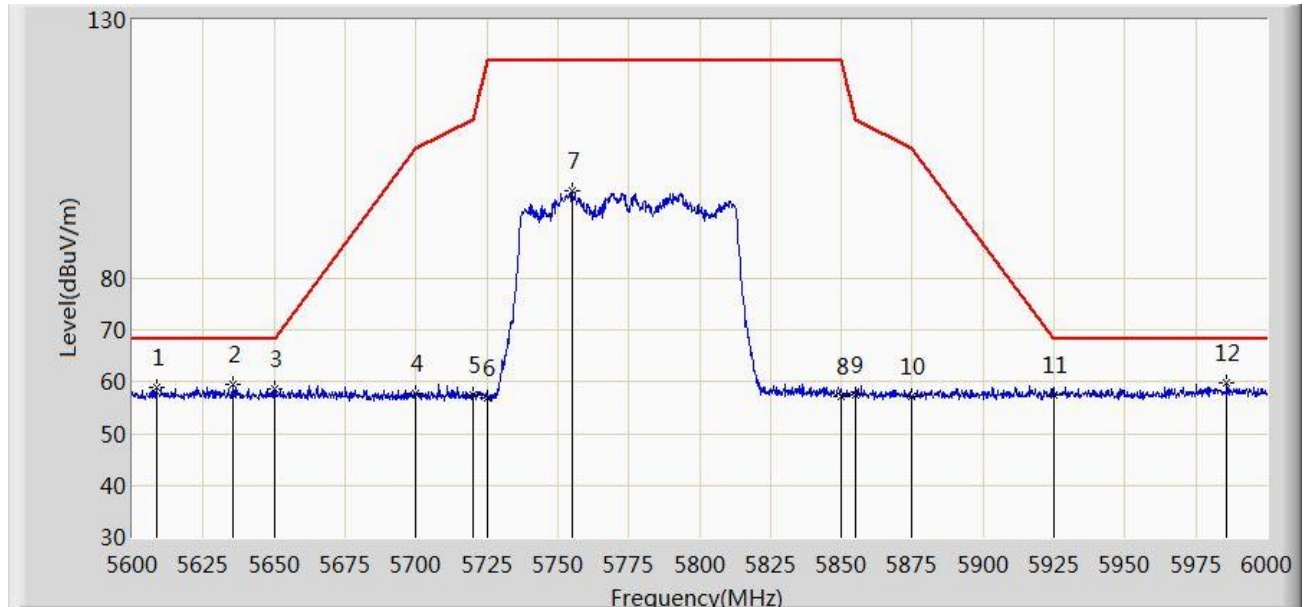

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			5608.400	58.884	53.929	-9.316	68.200	4.955	PK
2			5635.600	59.391	54.199	-8.809	68.200	5.192	PK
3			5650.000	58.578	53.242	-9.622	68.200	5.336	PK
4			5700.000	57.759	52.441	-47.441	105.200	5.318	PK
5			5720.000	57.444	51.970	-53.356	110.800	5.474	PK
6			5725.000	56.846	51.368	-65.354	122.200	5.478	PK
7			5755.000	97.057	91.253	N/A	N/A	5.804	PK
8			5850.000	57.103	51.134	-65.097	122.200	5.968	PK
9			5855.000	57.464	51.489	-53.336	110.800	5.975	PK
10			5875.000	57.281	51.268	-47.919	105.200	6.013	PK
11			5925.000	57.595	51.460	-10.605	68.200	6.136	PK
12		*	5985.800	59.772	53.315	-8.428	68.200	6.458	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

7.10. AC Conducted Emissions Measurement


7.10.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 & RSS-Gen Issue 5 Section 7.2.4 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

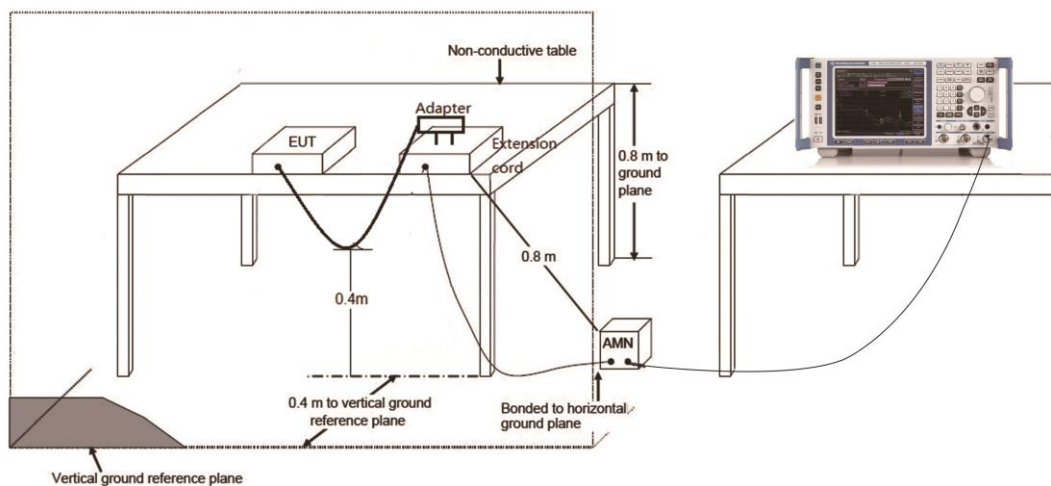

7.10.3. Test Result

Site: SR2	Time: 2019/12/19 - 15:19
Limit: FCC_Part15.207_CE	Engineer: Liz Yuan
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

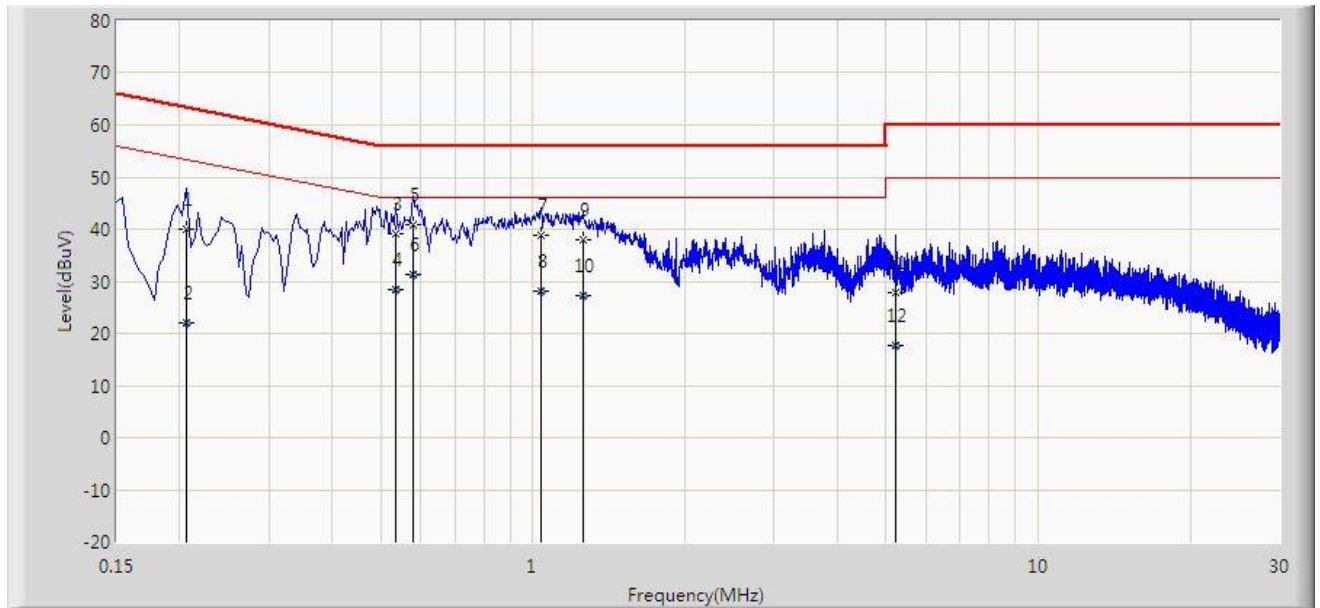


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.206	39.885	29.904	-23.480	63.365	9.981	QP
2			0.206	22.090	12.109	-31.275	53.365	9.981	AV
3			0.534	39.234	29.085	-16.766	56.000	10.149	QP
4			0.534	28.405	18.256	-17.595	46.000	10.149	AV
5			0.578	41.009	30.883	-14.991	56.000	10.126	QP
6		*	0.578	31.355	21.229	-14.645	46.000	10.126	AV
7			1.038	38.926	29.019	-17.074	56.000	9.907	QP
8			1.038	28.183	18.275	-17.817	46.000	9.907	AV
9			1.254	37.917	28.018	-18.083	56.000	9.900	QP
10			1.254	27.206	17.307	-18.794	46.000	9.900	AV
11			5.218	27.728	17.683	-32.272	60.000	10.044	QP
12			5.218	17.630	7.585	-32.370	50.000	10.044	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2019/12/19 - 15:11
Limit: FCC_Part15.207_CE	Engineer: Liz Yuan
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Standalone VR Headset	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

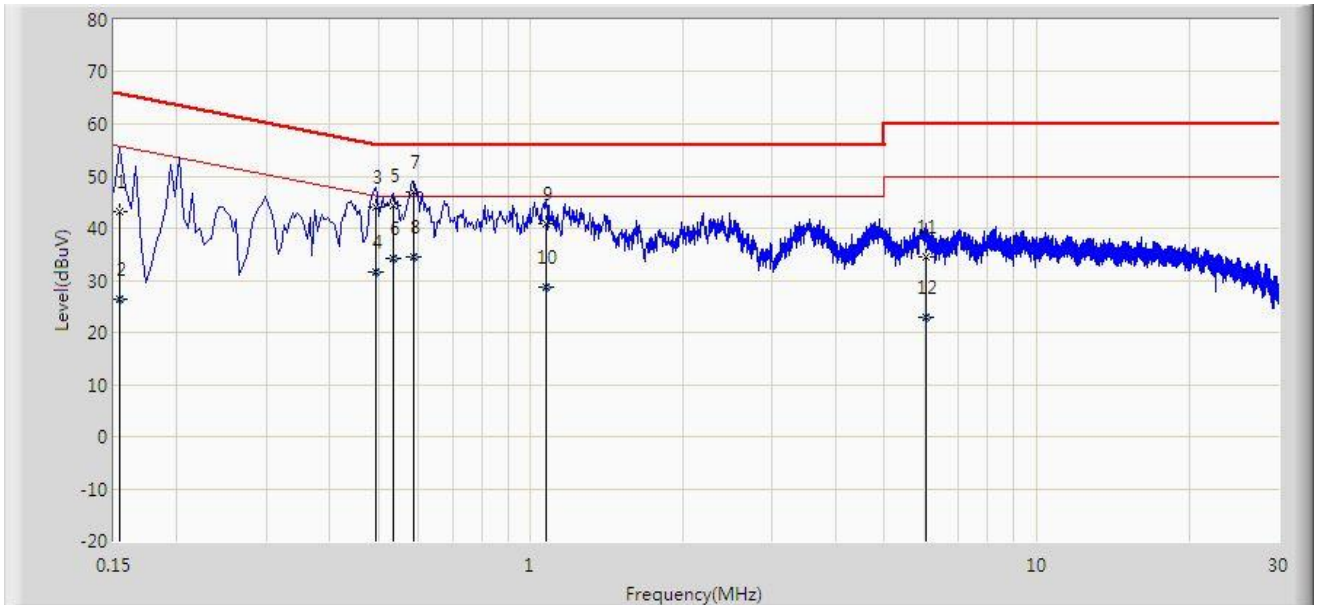

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	43.314	32.598	-22.467	65.781	10.716	QP
2			0.154	26.263	15.547	-29.519	55.781	10.716	AV
3			0.494	44.118	33.940	-11.982	56.100	10.178	QP
4			0.494	31.588	21.409	-14.512	46.100	10.178	AV
5			0.534	44.317	34.149	-11.683	56.000	10.168	QP
6			0.534	34.251	24.084	-11.749	46.000	10.168	AV
7		*	0.586	46.839	36.700	-9.161	56.000	10.139	QP
8			0.586	34.439	24.300	-11.561	46.000	10.139	AV
9			1.070	40.764	30.857	-15.236	56.000	9.906	QP
10			1.070	28.650	18.744	-17.350	46.000	9.906	AV
11			6.054	34.559	24.427	-25.441	60.000	10.133	QP
12			6.054	23.029	12.897	-26.971	50.000	10.133	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules and RSS-247 of the ISED Rules.

The End

Appendix A - Test Setup Photograph

Refer to “1911RSU052-UT” file.

Appendix B - EUT Photograph

Refer to “1911RSU052-UE” file.