

规格书

SPECIFICATION FOR APPROVAL

客 户 名 称:

客户项目名称: 超声波天线 (WiFi天线)

客 户 料 号:

物 料 名 称: WIFI 2.4/5.8G天线 灰色1.13线L: 330MM+I-pex

乔木料号:

日期: 2024.3.28

版别: A

	MANUFACTURE SIGNATURE	CUSTOMER SIGNATURE
CHECKED BAY:	熊江琴	
AUDITOR BAY:	吴亚锋	
APPROVED BAY	谭文锋	
DATE:	2024.3.28	

公司地址: 东莞市大朗镇富民南路52号新辉大厦2楼

电话: 15014105881 手机: 15014105881

Email: 1931648562@qq.com

Product Number: DF5DBI82564/5-40

Product Name: Antenna

Index:

- 1. Revision History / Page 3**
- 2. Specification / Page 4**
- 3. Characteristics and Reliability Test / Page 5 ~ 6**
- 4. Antenna - S Parameter Test Data / Page 7**
- 5. Antenna - Radiation Pattern Test Data / Page 8**
- 6. Mechanical and Packing Drawing / Page 9 ~ 10**

Product Number: DF5DBI82564/5-40

Product Name: Antenna

1. Revision History

Revision	Date	Change Notification	Description
1.0	2024.3.28	初版	

Product Number: DF5DBI82564/5-40

Product Name: Antenna

2. Specification

Sample Photo



A. Electrical Characteristics

Frequency	2400 ~ 2500/5150~5850 MHz
S.W.R.	≤ 2.0
Antenna Gain	4.06dBi@ 2400 MHz 4.69dBi@5850
Polarization	Linear
Impedance	50 Ohm

B. Material & Mechanical Characteristics

Material of Radiator	
Material of Plastic	Body: Hinge: Base:
Cable Type	1.13mm 黑色
Connector Type	I-pex

C. Environmental

Operation Temperature	- 40 °C ~ + 65 °C
Storage Temperature	- 40 °C ~ + 80 °C
Antenna Color Storage life	< 2 year

Product Number: DF5DBI82564/5-40

Product Name: Antenna

3. Characteristics and Reliability Test

Test Items 測試項目		Test Condition and Procedure 測試方法	Requirement s 要求	Result 結果
C1 V	.S.W.R. 電壓駐波比	Set DUT on Network Analyzer; make individual calibration to test 設置網路分析儀參數進行測試	Directive DUT specification 符合待測物規範	PASS
C2	Insertion Loss 插入損失	Set DUT on Network Analyzer; make individual calibration to test 設置網路分析儀參數進行測試	Directive DUT specification 符合待測物規範	N/A
C3	Antenna Gain 天線增益	Set DUT on Antenna Chamber; make individual calibration to test 設置天線暗室參數進行測試	Directive DUT specification 符合待測物規範	PASS
C4 V	voltage Breakdown 耐電壓	Test voltage should be applied between insulated portions, or between ground as specified. 在绝缘部分测试电压,或指定接地面之间	Max Voltage $\geq$ 500 V or directive material specification 最大電壓 $\geq$ 500V 或符合材料規範	N/A
C5	Insulation Resistance 絕緣阻抗	Set Voltage: 500 $\pm$ 50V; between the insulated portions, or between ground as specified. 設置電壓 500 $\pm$ 50V,在绝缘部份測試或指定接地面之间	Resistance $\geq$ 500 M ohm or directive material specification 阻抗 $\geq$ 500M ohm 或符合材料規範	N/A
C6	Contact Resistance 接觸阻抗	Air Temp: 26°C; measured with test equipment 室溫 26°C · 指定量測設備	Directive material specification 符合材料規範	N/A
M1 V	vibration 震動	GB / T2423.48-2008 Amplitude: 0.03 inch (1.5mm); Freq: 20 to 80 to 20 Hz 3 directions; 2 hours for each direction 振幅 1.5mm ; 頻率 20~80~20Hz ; 3 個方向各 2H	1. No Visual Damage 2. Frequency Tol. $\leq$ 5% 無明顯外觀不良; 頻率偏移 $\leq$ 5%	PASS
M2	Random Drop 跌落	GB / T2423.8-1995 Single : Height: 1.0 Meter; 3 directions; 1 time for each direction 單支天線 · 高 1m ; 3 個方向各 1 次	1. No parts separated 、 fracture 2. Frequency Tol. $\leq$ 5% 產品無脫落、斷裂; 頻率偏移 $\leq$ 5%	PASS

Product Number: DF5DBI82564/5-40

Product Name: Antenna

		Packing : Height: 0.76 Meter; 1 corner, 3 edges, 6 surface 包裝：高 0.76m · 一角、三棱、六面各一次		PASS
		Antenna+Machine:Height: 0.76 Meter; 1 corner, 3 edges, 6 surface.整機：高 0.76m · 一角、三棱、六面各一次		N/A
M3	Solderability	GB / T2423.28-2005	Tin evenly on full	N/A


	可焊性	Temp: 260±5°C;Duration: 5 seconds 溫度 260±5°C;持續 5 秒	上錫均勻飽滿	
M4 P	ull Test 拉力	Holding with individual specification; force applied to axis of terminal .單獨定義產品端子拉力	Directive DUT specification Frequency Tol.≤5% 符合待測物規範;頻率偏移≤5%	PASS
M5 T	o rque Test 扭力	Holding with individual specification; applied clockwise and counterclockwise to the axis of terminal 單獨定義產品端子之順時針及逆時針扭力	Directive DUT specification Frequency Tol.≤ 5% 符合待測物規範;頻率偏移≤5%	N/A
M6 D	imension 尺寸	Inspection of dimension, color, material, package, surface process.检查尺寸,颜色,材料,包装,表面處理	Directive DUT specification 符合待測物規範	PASS
E1 W	aterproof 防水	With Reference to IEC 60529 // IP Code Definition 參考 IEC60529 IP 定義	Directive DUT specification 符合待測物規範	N/A
E2	Salt Spray 鹽霧	GB / T 2423.17-2008 Temp: 35°C; RH: ≥ 95%; NaCl solution: ≥ 5%;Time: 24H 溫度 35°C; 濕度≥95%;鹽水濃度≥5%; 測試 24H	No Visual Damage Frequency Tol.≤5% 無明顯外觀不良;頻率偏移≤5%	PASS
E3 T	emperature and Humidity Chamber 恒溫恒濕	GB / T 2423.3-2006 Temp: 80°C / 12 H; -40°C / 12H RH: ≥ 90 %; Time: 24H 溫度 80°C 測試 12H 轉-40°C 測試 12H; 濕度≥90 %; 時間 24H	After 2 Hours Recovery No Visual Damage Frequency Tol.≤5% 恢復 2H 后, 無明顯外觀不良;頻率偏移≤5%	PASS

Product Number: DF5DBI82564/5-40

Product Name: Antenna


E4 T	ermal Shock 冷熱衝擊	GB / T 2423.22 - 2008 40°C (30 minutes) to + 80°C (30 minutes); Cycles: 24 40°C 測試 30 分轉 80°C 測試 30 分為一個週期; 共 24 週期	After 2 Hours Recovery No Visual Damage Frequency Tol.≤5% 恢復 2H 后, 無明顯外觀不良; 頻 率偏移≤5%	PASS
E5 A	ging test 老化	GB /T 2423.2 - 2008 Temp: 80°C; Time: 24 hours 溫度 80°C, 測試 24H	After 2 Hours Recovery No Visual Damage Frequency Tol.≤5% 無明顯外觀不良; 頻率偏移≤5%	PASS
E6 H	igh Temp. 高溫	Temp. 270±10°C; Times: 120 seconds 溫度 270±10°C, 測試時間 120 秒	No Visual Damage 無明顯外觀不良	N/A
R1	RoHS	With Reference to IEC 62321:2008 with flow chart 參考 IEC 62321 測試流程	Directive RoHS 2011/65/EU 符合 RoHS 2011/65/EU 標準	PASS
R2	PFOS	With Reference to USA EPA 3550C:1996 by LC/MS 參考 USA EPA 3550C 測試流程	Directive RoHS 2006/122/EC 符合 RoHS 2011/65/EU 標準	PASS

4. Antenna - S Parameter Test Data

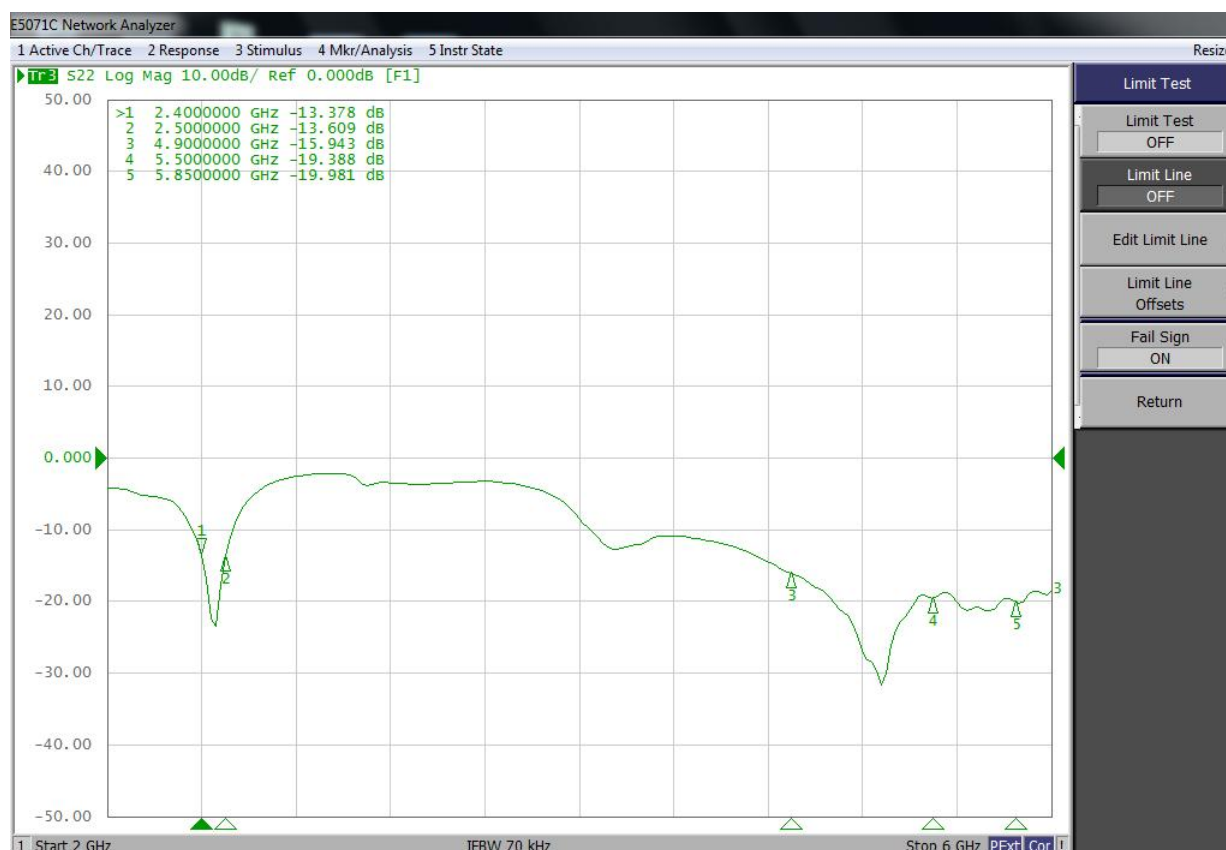


5. Antenna - Radiation Pattern Test Data


2.4G

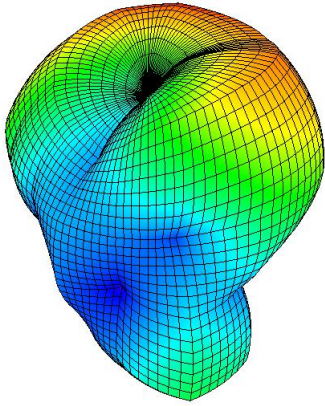


2.45G

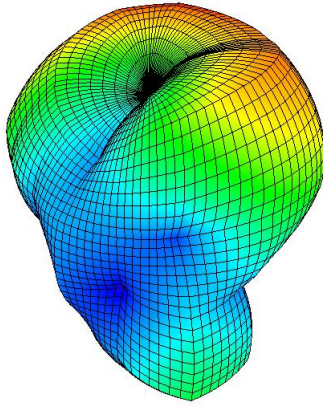


2.5G

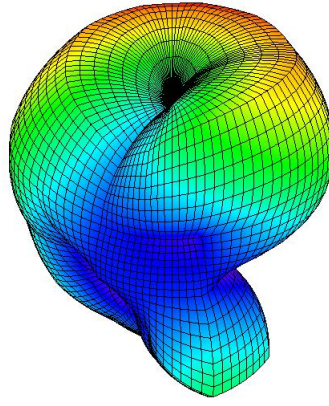


5.15G

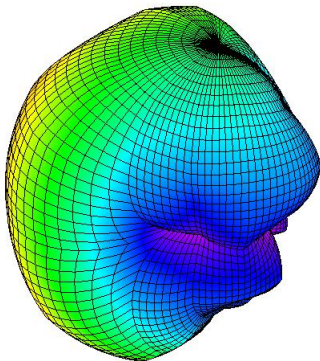

5.5
G



5.85
G



6. Antenna - Radiation Pattern Test Data

VSWR (Criterion: 2.0:1 Max)

Frequency (GHz)	VSWR
	Ant
2.4	1.78
2.5	1.84
5.15	1.44
5.5	1.32
5.85	1.45

Frequency (GHz)	Ant	
	Peek Gain (dBi)	Efficiency
2400	4.06	66.38
2500	3.79	64.47
5.15	3.51	61.64
5.5	4.09	65.7
5.85	4.69	64.53