Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 1 of 26

## **TEST REPORT**

Test Result :	PASS *
Date of Issue:	2023/10/31
Date of Test:	2023/10/10 to 2023/10/30
Date of Receipt:	2023/09/28
	47 CFR Part 27
Standards:	47 CFR Part 2
FCC ID:	2AX2URN934A
Trade Mark:	Rolling Wireless
Model No.:	RN934A
EUT Description:	RN934A
Address of Manufacturer:	15, rue Edward Steichen, 2540 Luxembourg
Manufacturer:	Rolling Wireless S.à r.l.
Address of Applicant:	15, rue Edward Steichen, 2540 Luxembourg
Applicant:	Rolling Wireless S.à r.l.
Application No.:	SEWA2310000121RG

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

veli

Well Wei Wireless Laboratory Manager



d by the ct to its General Condition Company .aspx a at http://www.sgs.c older of t issues defi limitatic and this documents dings at th only ument This do or fals only e: (86-755) 8307 1443

South of No. 6 Plant, No. 1, Runsheng Read, Stuchou Industrial Park, Stuchou Area, China (Jiangsu) Pilot Free Trade Zone 2150000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号约6号厂房南部 邮编: 215000

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 2 of 26

## 1 Version

		<b>Revision Record</b>		
Version	Chapter	Date	Modifier	Remark
01		2023/10/31		Original

Prepared By	Cleriti (Levi Li) / Test Engineer
Checked By	Stone JM (Stone Gu) / Reviewer



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, remail: Cl Doceheck the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, remail: Cl Doceheck the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, remail: Cl Doceheck the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, remail: Cl Doceheck the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, remail: Cl Doceheck the authenticity

South of No. 6 Plant, No. 1, Runsheng Road, Suchou holushisia Plank, Suchou Area, China (Liangou) Pilot Fiee Taxle Zone 215000 t (86-512) 62992980 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业型区河胜商に号的6号厂房南部 単集: 215000 t (86-512) 62992980

www.sgsgroup.com.cn

sgs.china@sgs.com

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 3 of 26

## Contents

1	Vers	sion	2
2	Test	Summary	4
	2.1	LTE Band 7/CA_7C	4
3	Gen	eral Information	6
	3.1	Details of Client	6
	3.2	Test Location	6
	3.3	Test Facility	6
	3.4	General Description of EUT	7
	3.5	Test Mode	8
	3.6	Test Environment	8
	3.7	Description of Support Units	8
	3.8	Technical Specification	9
	3.9	Test Frequencies	10
4	Des	cription of Tests	11
	4.1	Conducted Output Power	11
	4.2	Effective (Isotropic) Radiated Power of Transmitter	12
	4.3	Occupied Bandwidth	13
	4.4	Band Edge at Antenna Terminals	14
	4.5	Spurious And Harmonic Emissions at Antenna Terminal	15
	4.6	Peak-Average Ratio	16
	4.7	Field Strength of Spurious Radiation	17
	4.8	Frequency Stability / Temperature Variation	18
	4.9	Test Setups	19
		4.9.1 Test Setup 1	19
		4.9.2 Test Setup 2	19
		4.9.3 Test Setup 3	20
	4.10	) Test Conditions	21
5	Mair	Test Instruments	23
6	Mea	surement Uncertainty	25
7	App	endixes	26



SG

Unless otherwise agreed in writing, this document is issued by overleaf, available on request or accessible at <u>http://www.sgs.com</u> subject to Terms and Conditions for Electronic Documents at <u>htt</u> Attention is drawn to the limitation of liability, indemmification any advised that information contained hereon reflects the Company' Client's instructions, if any. The Company's sole responsibility i transaction from exercising all their rights and obligations under	/en/Terms-and- p://www.sgs.com d jurisdiction iss s findings at the is to its Client a r the transaction	Conditions.aspx and, for electr n/en/Terms-and-Conditions/Te uues defined therein. Any holo time of its intervention only and this document does not documents. This document	onic format documents, rms-e-Document.aspx. ler of this document is and within the limits of exonerate parties to a cannot be reproduced
except in full, without prior written approval of the Company. An appearance of this document is unlawful and offenders may be pri results shown in this test report refer only to the sample(s) tested an Attention: To check the authenticity of testing /inspection reports of the Attention is a set of the sample of the sa	osecuted to the nd such sample(	fullest extent of the law. Unles s) are retained for 30 days only	ss otherwise stated the
or email: <u>CN.Doccheck@sgs.com</u>	ort & certificate	piease contact us at telepho	me: (66-755) 6507 1445,
South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zon	e 215000	t (86-512) 62992980	www.sgsgroup.com.cn
中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编	: 215000	t (86-512) 62992980	sgs.china@sgs.com

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 4 of 26

## 2 Test Summary

## 2.1 LTE Band 7/CA\_7C

Test Item	FCC Rule No.	Requirements	Test Result	Verdict
Effective (Isotropic) Radiated Power Output Data	§2.1046, §27.50(h)(2)	EIRP ≤ 2W	Section 1 of Appendix B.1&B.2	Pass
Peak-Average Ratio		≤13 dB	Section 2 of Appendix B.1&B.2	Pass
Bandwidth	§2.1049	OBW: No limit. EBW: No limit.	Section 3 of Appendix B.1&B.2	Pass
Band Edges Compliance	§2.1051, §27.53(m4)	For mobile digital stations, the attenuation factor shall be not less than 40 + 10 log (P) dB on all frequencies between the channel edge and 5 megahertz from the channel edge, 43 + 10 log (P) dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and 55 + 10 log (P) dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that 43 + 10 log (P) dB on all frequencies between 2490.5 MHz and 2496 MHz and 55 + 10 log (P) dB at or below 2490.5 MHz.	Section 4 of Appendix B.1&B.2	Pass
Spurious Emission at Antenna Terminals	§2.1051, §27.53(m)	Channel Edge -25dBm/ 1 MHz 9 kHz 9 kHz S 5 MHz X=Max {6MHz, EBW} Channel	Section 5 of Appendix B.1&B.2	Pass
Field Strength of Spurious Radiation	§2.1053, §27.53(m)	edge -25 dBm/ 1 MHz 9 kHz 9 5 MHz × MHz 10 <sup>th</sup> harmonics X=Max {6MHz, EBW}	Section 6 of Appendix B.1&B.2	Pass
Frequency	§2.1055(a)(1)(b)	Within authorized bands of	Section 7 of	Pass



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon releats the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the faw. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CAL.Doccheck@sgs.com

South of No. 6 Plant, No. 1, Runsheng Road, Stuchou Industrial Park, Suchou Area, Chine (Jiangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润脏路1号的6号厂房南部 邮编: 215000



		Report No.:	SEWA2310000121RG01
		Rev.:	01
		Page:	5 of 26
Stability	§2.1055(d)(1) §27.54	operation/frequency block.	Appendix B.1&B.2

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Document at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cancent be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or rappearance of this document is unsaveliable to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing imspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or amall: <u>Ch.Doccheck@asgs.com</u>

※米服务 (苏州)	
理 检验检测专用章	
Schuster & Testing Services	
SGS-CSTC Schends Technical Services (Services, Co., Ltd	
Wireless Laborate Pechnical Services	

Member of the SGS Group (SGS SA)

中国 - 苏州 - 中国 (江苏) 自由現場武操区苏州丁坚原区湖胜数号的6号 (房南部 単編: 215000 t (86-512) 62992980 sgs.china@sgs.com

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 6 of 26

## **3** General Information

### 3.1 Details of Client

Applicant:	Rolling Wireless S.à r.l.
Address of Applicant:	15, rue Edward Steichen, 2540 Luxembourg
Manufacturer:	Rolling Wireless S.à r.l.
Address of Manufacturer:	15, rue Edward Steichen, 2540 Luxembourg

### 3.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.	
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone	
Post code:	215000	
Test engineer:	Levi Li, Tizzy Song	

## 3.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

A2LA (Certificate No. 6336.01)

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

Innovation, Science and Economic Development Canada

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

• FCC –Designation Number: CN1312

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refor roly to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CM. Doccheck @docs.com

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业团区湖胜路1号约6号厂房南部 邮编: 215000

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 7 of 26

## 3.4 General Description of EUT

EUT Description:	RN934A		
Model No.:	RN934A		
Trade Mark:	Rolling Wireless		
Hardware Version:	1		
Software Version:	AFPQ52XA_00.07.05.00		
IMEI:	354360450001151		
Antenna Type:	🖾 External, 🔲 Integrated		
	LTE Band 7: -2.5dE	Зі	
	LTE Band CA_7C: -2.5dBi		
Antenna Gain:	Note: The antenna gain are deriv manufacturer.	ed from the gain information	report provided by the
RF Cable:	4.5dB(Below 1GHz) 4.8dB(1.0~2.4GHz) 5.2dB(2.4~3.4GHz)		
	rovided and confirmed by the d integrity of the information.	e applicant. SGS is not liable	e to the accuracy,



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the Jaw. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

SouthorNo.6 Plant, No.1, Ransheng Road, Suchou holustria Plant, Suchou Area, Chine (Langou) Plot Free Tacke Zone 215000 tt (8 中国 - 苏州 - 中国(江苏)自由贸易试验区苏州片区苏州工业园区润脏商に号的6号厂房南部 邮编: 215000 tt (8

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 8 of 26

### 3.5 Test Mode

Test Mode	Test Modes Description	
LTE/TM1	LTE system, QPSK modulation	
LTE/TM2	LTE system, 16QAM modulation	
LTE/TM3	LTE system, 64QAM modulation	
LTE/TM4	LTE system, 256QAM modulation	
Remark: The test mode(s) are selected according to relevant radio technology specifications.		

### 3.6 Test Environment

Environment Parameter	101 kPa Selec	101 kPa Selected Values During Tests				
Relative Humidity	44-46	% RH Ambient				
Value	Temperature(°C)	Voltage(V)				
NTNV	22~23	4.0				
LTLV	-30	3.4				
LTHV	-30	4.2				
HTLV	50	3.4				
HTHV	50	4.2				
Remark:						
NV: Normal Voltage LV: L	ow Extreme Test Voltage	HV: High Extreme Test Voltage				
NT: Normal Temperature LT: L	ow Extreme Test Temperature	HT: High Extreme Test Temperature				

## 3.7 Description of Support Units

The EUT has been tested as an independent unit.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.reps-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443.

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jiangsu) Pitol Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州上区苏州工业团区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 9 of 26

### 3.8 Technical Specification

Characteristics	Description						
Radio System Type	🖾 LTE						
	Band		ТХ			RX	
Supported Frequency Range	LTE Band 7		2500 to	2570 MHz		2620 to 2	2690 MHz
	LTE CA : LTE Band CA_7C						
	LTE Band 7		⊠5 MHz	z 🛛 🖂 10 MHz	z D	∐15 MHz	🛛 20 MHz
			⊠10MH	z+20MHz	$\triangleright$	∐15MHz+	10MHz
Supported Channel Bandwidth	LTE Band CA 7C		⊠15MH	z+15MHz	$\triangleright$	∐15MHz+	20MHz
	LTE Ballu CA_7C		⊠20MH	z+10MHz	$\triangleright$	⊴20MHz+	15MHz
			⊠20MH	z+20MHz			
Characteristics	Description						
	E-UTRA:	QP	SK	16QAM	640	QAM	256QAM
		4M4	47G7D	4M48W7D	4M	148W7D	4M48W7D
	LTE Band 7	8M8	98G7D	8M95W7D	8M	194W7D	8M94W7D
		13N	15G7D	13M5W7D	13	M5W7D	13M5W7D
		17N	19G7D	17M9W7D	17	M9W7D	17M9W7D
Designation of Emissions		50RB+100RB:					
		27N	17G7D	27M6W7D	27	M6W7D	27M7W7D
(Remark: the necessary		75RB+50RB:					
bandwidth of which is the		23N	11G7D	23M1W7D	23	M1W7D	23M1W7D
worst value from the		75RB+75RB:					
measured occupied		28N	12G7D	28M3W7D	28	M3W7D	28M3W7D
bandwidths for each type of	LTE Band CA_7C	75RB+100RB:					
channel bandwidth	LTE Band CA_TC	32N	16G7D	32M5W7D	32	M5W7D	32M5W7D
configuration.)		100	RB+50R	B:			
		27N	17G7D	27M7W7D	27	M7W7D	27M7W7D
		100	RB+75R	B:			
		32N	16G7D	32M6W7D	321	M6W7D	32M5W7D
		100	RB+100	RB:			
		37N	17G7D	37M6W7D	37	M7W7D	37M6W7D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itested and such sample(s) are relatined for 30 days only. Attention: Desch Handerson of Jesting inspection report à certificate, please contact us at telehome: (86-75) 8307 1443, Attention: Desch Handerson (90 testing inspection report à certificate, please contact us at telehome: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Holustia/ Park, Suzhou Area, China (Jangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润脏路1号的6号厂房南部 邮编: 215000

Report No.: SEWA2310000121RG01 Rev.: 01 Page: 10 of 26

3.9	Test	Frequencies	
-----	------	-------------	--

S

Toot Mada	Dondwidth	Bandwidth TX / RX		RF Channel	
Test Mode	Danuwidin		Low (L)	Middle (M)	High (H)
			Channel 20775	Channel 21100	Channel 21425
		TX	2502.5 MHz	2535 MHz	2567.5 MHz
	5MHz	RX	Channel 2775	Channel 3100	Channel 5825
		КЛ	2622.5 MHz	2655 MHz	2687.5 MHz
		<u> </u>	Channel 20800	Channel 21100	Channel 21400
	10MHz	TX	2505 MHz	2535 MHz	2565 MHz
		TX 15MHz	Channel 2800	Channel 3100	Channel 3400
			2625 MHz	2655 MHz	2685 MHz
LTE Band 7			Channel 20825	Channel 21100	Channel 21375
			2507.5 MHz	2535 MHz	2562.5 MHz
	15MHz		Channel 2825	Channel 3100	Channel 3375
		RX	2627.5 MHz	2655 MHz	2682.5 MHz
			Channel 20850	Channel 21100	Channel 21350
		TX	2510 MHz	2535 MHz	2560 MHz
	20MHz	DV	Channel 2850	Channel 3100	Channel 3350
		RX		2655 MHz	2680 MHz

Table 4.3.1.1.7A-1: Test frequencies for CA\_7C

Range	CC-Combo / NRB_agg [RB]			CC1 Note1					CC2 Note1		
		BW [RB]	NuL	fu∟ [MHz]	NDL	f <sub>DL</sub> [MHz]	BW [RB]	NUL	f∪∟ [MHz]	NDL	f <sub>DL</sub> [MHz]
Low	50+100	50	20805	2505.5	2805	2625.5	100	20949	2519.9	2949	2639.9
		100	20850	2510	2850	2630	50	20994	2524.4	2994	2644.4
	75+50	75	20825	2507.5	2825	2627.5	50	20945	2519.5	2945	2639.5
	75+75	75	20825	2507.5	2825	2627.5	75	20975	2522.5	2975	2642.5
	75+100	75	20828	2507.8	2828	2627.8	100	20999	2524.9	2999	2644.9
		100	20850	2510	2850	2630	75	21021	2527.1	3021	2647.1
	100+100	100	20850	2510	2850	2630	100	21048	2529.8	3048	2649.8
Mid	50+100	50	21006	2525.6	3006	2645.6	100	21150	2540	3150	2660
		100	21051	2530.1	3051	2650.1	50	21195	2544.5	3195	2664.5
	75+50	75	21051	2530.1	3051	2650.1	50	21171	2542.1	3171	2662.1
	75+75	75	21025	2527.5	3025	2647.5	75	21175	2542.5	3175	2662.5
	75+100	75	21003	2525.3	3003	2645.3	100	21174	2542.4	3174	2662.4
		100	21026	2527.6	3026	2647.6	75	21197	2544.7	3197	2664.7
	100+100	100	21001	2525.1	3001	2645.1	100	21199	2544.9	3199	2664.9
High	50+100	50	21206	2545.6	3206	2665.6	100	21350	2560	3350	2680
		100	21251	2550.1	3251	2670.1	50	21395	2564.5	3395	2684.5
	75+50	75	21277	2552.7	3277	2672.7	50	21397	2564.7	3397	2684.7
	75+75	75	21225	2547.5	3225	2667.5	75	21375	2562.5	3375	2682.5
	75+100	75	21179	2542.9	3179	2662.9	100	21350	2560	3350	2680
		100	21201	2545.1	3201	2665.1	75	21372	2562.2	3372	2682.2
	100+100	100	21152	2540.2	3152	2660.2	100	21350	2560	3350	2680
Note 1:	Carriers in inc	reasing f	requency	order.							



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawill and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are related for 30 days only. *Aremandi* 10 Decoher barres and the timpsection report & certificate, please contact us at telephone: (86-75) 8307 1443, *Aremandi* 10 Decoher barres for the sample(s) in the sample(s) are related for 30 days only.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国•苏州•中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 11 of 26

## 4 Description of Tests

### 4.1 Conducted Output Power

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.2.1

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

#### Remark: Reference test setup 1



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overlear, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Dness otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Plank, Suzhou Area, Chine (Jianguu) Plind Fiee Trade Zone 215000 tt (86-512) 629929800 中国・苏州・中国(江苏)自由貿易试验区苏州片区苏州工业団区洞路路1号的6号厂房南部 解编: 215000 tt (86-512) 62992980 www.sgsgroup.com.cn

sgs.china@sgs.com

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 12 of 26

### 4.2 Effective (Isotropic) Radiated Power of Transmitter

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8.4 Calculate power in dBm by the following formula: ERP (dBm) = Conducted Power (dBm) + antenna gain (dBd) EIRP(dBm) = Conducted Power (dBm) + antenna gain (dBi) EIRP=ERP+2.15dB

S



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, advised to Terms on the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that Information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document conson excentere parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refor rolly to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

 South of No. 6 Plant, Mo. 1, Runsheng Road, Suzhou Industrial Plant, Suzhou Area, Chine (Jaingsu) Pliot Free Trade Zone
 215000
 t (86-512) 62992980

 中国・苏州・中国(江苏)自由民勇试道区苏州上区苏州工业园区调胜路1号的号厂房南都
 戦場:
 215000
 t (86-512) 62992980

www.sgsgroup.com.cn

sgs.china@sgs.com

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 13 of 26

#### 4.3 Occupied Bandwidth

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 4.2 & 4.3

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

#### **Remark: Reference test setup 1**

#### Test Settings

- The signal analyzer's automatic bandwidth measurement capability was used to perform the 99% occupied bandwidth and the 26dB bandwidth. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
- 2. RBW = 1 5% of the expected OBW
- 3. VBW ≥ 3 x RBW
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep = auto couple
- 7. The trace was allowed to stabilize
- 8. If necessary, steps 2 7 were repeated after changing the RBW such that it would be within
  - 1 5% of the 99% occupied bandwidth observed in Step 7



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-an-Conditions</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: Check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Read, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 14 of 26

#### 4.4 Band Edge at Antenna Terminals

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at two frequencies (low channel and high channel).in the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to rms.

#### **Remark: Reference test setup 1**

#### Test Settings

- 1. Start and stop frequency were set such that the band edge would be placed in the center of the plot
- 2. Span was set large enough so as to capture all out of band emissions near the band edge
- 3. RBW > 1% of the emission bandwidth
- VBW ≥ 3 x RBW
- 5. Detector = RMS
- 6. Number of sweep points ≥ 2 x Span/RBW
- 7. Trace mode = trace average for continuous emissions, max hold for pulse emissions
- 8. Sweep time = auto couple
- 9. The trace was allowed to stabilize



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions, aspx and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document connect the ereproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at thelephone; (66-755) 83071443

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, Chine (Jangsu) Pikil Firee Trade Zone 215000 t (86-512) 62992980 中国 - 苏州 - 中国(江苏)自由現場试验区苏州片区苏州工业国区湖社覧1号的5号厂房南部 単编: 215000 t (86-512) 62992980

www.sgsgroup.com.cn

sgs.china@sgs.com

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 15 of 26

#### 4.5 Spurious And Harmonic Emissions at Antenna Terminal

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 6.0

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least 43 + 10 log(P) dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

#### **Remark: Reference test setup 1**

#### Test Settings

1. Start frequency was set to 9kHz and stop frequency was set to at least 10\* the fundamental frequency(Separated into at least two plots per channel)

- 2. Detector = RMS
- 3. Trace mode = trace average for continuous emissinos, max hold for pulse emissions
- 4. Sweep time = auto couple
- 5. The trace was allowed to stabilize
- 6. Please see test notes below for RBW and VBW settings



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content on appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing (negoral & certificate, please context us at theophone; (66-755) 83071443

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Plank, Suzhou Area, Chine (Jiangsu) Plint Fiee Trade Zone 215000 t (86-512) 629929800 中国・苏州・中国(江苏)自由貿易這些区苏州片区苏州工业団区洞難路1号的6月厂房南部 邮编: 215000 t (86-512) 62992980 www.sgsgroup.com.cn

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 16 of 26

### 4.6 Peak-Average Ratio

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.7.2

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

#### Remark: Reference test setup 1

#### Test Settings

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.gas.com/en/Terms-and-Conditions.aspx and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits to Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document connent cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at tleephone: (66-755) 83071443.

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润脏路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 17 of 26

### 4.7 Field Strength of Spurious Radiation

Measurement Procedure: FCC KDB 971168 D01 V03r01 Section 5.8

#### Below 1GHz test procedure as below:

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). Test the EUT in the lowest channel, the middle channel ,the Highest channel.
- 5). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 6). Repeat above procedures until all frequencies measured was complete. E (dBµV/m) = Measured amplitude level (dBµV) + (Cable Loss (dB) + Antenna Factor (dB/m) – AMP(dB)) EIRP (dBm) = E (dBµV/m) + 20 log D – 104.8; where D is the measurement distance in meters

#### Above 1GHz test procedure as below:

- 1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2) Calculate power in dBm by the following formula:
   E (dBµV/m) = Measured amplitude level (dBµV) + (Cable Loss (dB) + Antenna Factor (dB/m) AMP(dB))
   EIRP (dBm) = E (dBµV/m) + 20 log D 104.8; where D is the measurement distance in meters
- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete

#### Remark1: Reference test setup 2

Remark2: The emission below 18G were measured at a 3m test distance, while emissions above 18GHz were measured at a 1m test distance. At a measurement distance of 1 meter the limit line was increased by 20\*LOG(3/1) = 9.54 dB.

#### Remark: Reference test setup 2

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & AMP. The basic equation with a sample calculation is as follows:

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier (dB)

Level = Reading Level + AF + Factor -95.26

Margin = Limit – Level

2) Scan from 9kHz to 40GHz, The disturbance between 9KHz to 30MHz and 18GHz to 40GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics

had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

3) All modes have been tested, but only the worst case data displayed in this report.



Unless otherwise agreed in writing, this document is issued by the	Company subject to its (	General Conditions of	Service printed
overleaf, available on request or accessible at http://www.sgs.com/en/			
subject to Terms and Conditions for Electronic Documents at http://w			
Attention is drawn to the limitation of liability, indemnification and jur			
advised that information contained hereon reflects the Company's fin			
Client's instructions, if any. The Company's sole responsibility is to			
transaction from exercising all their rights and obligations under the			
except in full, without prior written approval of the Company. Any un			
appearance of this document is unlawful and offenders may be prosed			rwise stated the
results shown in this test report refer only to the sample(s) tested and su	uch sample(s) are retained	d for 30 days only.	
Attention: To check the authenticity of testing /inspection report &	certificate, please conta	act us at telephone: (8)	6-755) 8307 1443,
or email: CN.Doccheck@sgs.com			
Out of the Officer Mark Developer Devel On the Intertial Development and Officer (France) Dist France Tests Tests	45000 + /00	E40) 0000000 Hanne	

Sound mote or Pant, wo. 1, Hunsheing Hoad, Suzhou Industrial Pant, Suzhou Area, China (Jangsu) Mitchiele Table Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区湖胜路1号的6号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.c t (86–512) 62992980 sqs.china@sqs.com

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 18 of 26

### 4.8 Frequency Stability / Temperature Variation

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 V03r01; Section 9

- . The frequency stability of the transmitter is measured by:
- a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.
- b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.

#### Time Period and Procedure:

- 1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
- 2. The equipment is turned on in a "standby" condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
- 3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**Remark: Reference test setup 3** 



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions, are to comment. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document connect to the reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content on appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 83071443

South of No. 6 Plant, No. 1, Runsheng Road, Stuchou Industrial Park, Stuchou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000


 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 19 of 26


### 4.9 Test Setups

#### 4.9.1 Test Setup 1

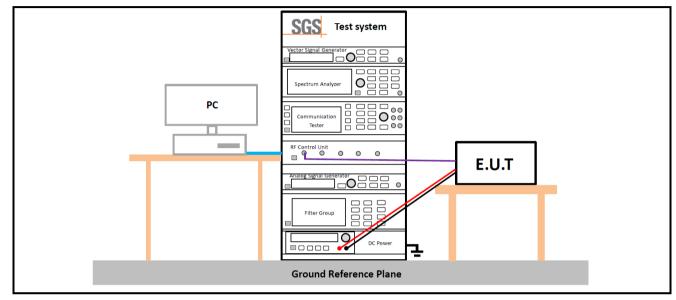

#### 4.9.2 Test Setup 2

合检测专用章 on & Testing Services

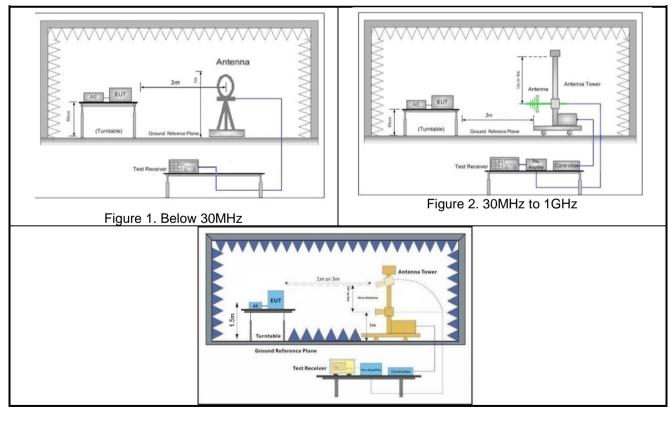

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.gos.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sos.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing Inspection report & certificate, please contact us at telephone: (86-755) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangau) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润脏器1号的6号厂房南部 邮编: 215000


 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 20 of 26

Figure 3. above 1GHz

#### 4.9.3 Test Setup 3

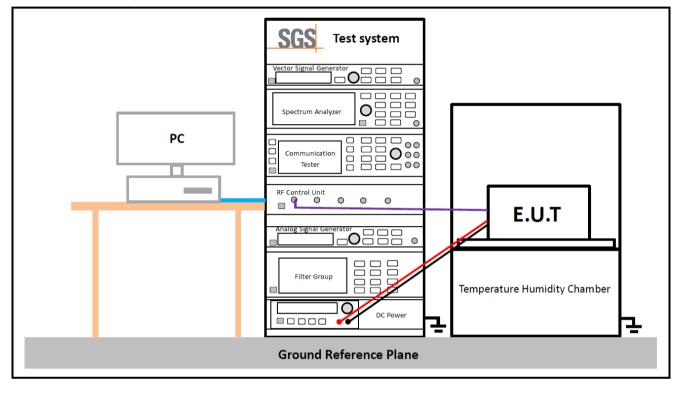



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein, Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extend for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-75) 8307 1443,

South of No. 6 Plant, No. 1, Runsheng Road, Suchou Industrial Park, Suchou Area, China (Jangsu) Pitot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜商1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 21 of 26

### 4.10Test Conditions

Test Case         Test Conditions           Test Environment         Ambient Climate & Rated Voltage           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel)           Test Mode         LTE/TM1;LTE/TM2; LTE/TM3           LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Peak-to-Average Ratio           Test Case         Test Conditions           Test Environment         Ambient Climate & Rated Voltage           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel)           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel)           Test Case         Test Conditions           Test Case         Test Conditions           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel)           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel )           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel )           Test Case         Test Conditions <th></th> <th colspan="4">Transmit Output Power Data - Average Power, Total</th>		Transmit Output Power Data - Average Power, Total				
Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel)         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Peak-to-Average Ratio         Test Conditions         Test Conditions         Test Setup 1         Ret Conditions         Test Setup 1         Ret Setup 1         Ret Note Colspan="2">Colspan="2">Conditions         Test Setup 1         Ret Conditions         Test Setup 1         Test Conditions         Test Conditions         Test Conditions         Test Setup 1         Test Conditions         Test Setup 1         Test Setup 1         Test Setup 1         Test Conditions         Test Conditions         Test Conditions         Test Setup 1         Ret Conditions         Test Conditions         Test Conditions         Test Setup 1         Test Setup 1	Test Case					
RF Channels (TX)     L, M, H (L= low channel, M= middle channel, H= high channel)       Test Mode     LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4       Peak-to-Average Ratio       Test Conditions       Test Case     Test Conditions       Test Setup     Test Setup 1       RF Channels (TX)     L, M, H (L= low channel, M= middle channel, H= high channel)       Test Setup     Test Setup 1       RF Channels (TX)     L, M, H (L= low channel, M= middle channel, H= high channel)       Test Mode     LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4       Bandwidth - Occupied Bandwidth       Test Case     Test Conditions       Test Setup     Test Setup 1       RF Channels (TX)     L, M, H (L= low channel, M= middle channel, H= high channel )       Test Setup     Test Setup 1       RF Channels (TX)     L, M, H (L= low channel, M= middle channel, H= high channel )       Test Mode     LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4       Bandwidth - Emission Bandwidth       Test Case     Test Conditions       Test Environment     Ambient Climate & Rated Voltage       Test Setup     Test Setup 1       RF Channels (TX)     L, M, H (L= low channel, M= middle channel, H= high channel )       Test Setup     Test Setup 1       RF Channels (TX)     L, M, H (L= low channel, M= middle channel, H= high channel )	Test Environment	Ambient Climate & Rated Voltage				
Test Mode       LTE/TM1:LTE/TM2: LTE/TM3: LTE/TM4         Peak-to-Average Ratio         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel)         Test Mode       LTE/TM1:LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Occupied Bandwidth         Test Case       Test Conditions         Test Setup       Test Setup 1         RE Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel)         Test Case       Test Conditions         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1:LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Emission Bandwidth         Test Case       Test Conditions         Test Case       Test Conditions         Test Setup       Test Setup 1         Rest Case       Test Conditions         Test Case       Test Conditions         Test Setup       Test Setup 1         Rest Case       Test Conditions         Test Mode       LTE/TM1:LTE/TM2; LTE/TM3; LTE/TM4     <	Test Setup	Test Setup 1				
Peak-to-Average Ratio           Test Case         Test Conditions           Test Environment         Ambient Climate & Rated Voltage           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel)           Test Mode         LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4           Bandwidth - Occupied Bandwidth           Test Case         Test Conditions           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel)           Test Case         Test Conditions           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel )           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel )           Test Mode         LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4           Bandwidth - Emission Bandwidth           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel )           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel )           Test Mode<	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Case         Test Conditions           Test Environment         Ambient Climate & Rated Voltage           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel)           Test Mode         LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4           Bandwidth - Occupied Bandwidth           Test Case           Test Conditions           Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel )           Test Setup         Test Setup 1           RF Channels (TX)         L, M, H (L= low channel, M= middle channel, H= high channel )           Test Mode         LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4           Bandwidth - Emission Bandwidth           Test Case           Test Conditions           Test Case           Test Conditions           Test Setup 1           Test Setup 1           Test Case           Test Conditions           Test Mode           LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM3           Test Mode         LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM3           Test Setup 1      <	Test Mode	LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4				
Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel)         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Occupied Bandwidth         Test Case         Test Conditions         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Emission Bandwidth         Test Case       Test Conditions         Test Setup       Test Setup 1         Rest Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Conditions         Test Case         Test Conditions         T	Peak-to-Average Ratio					
Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel)         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Occupied Bandwidth         Test Case         Test Conditions         Test Setup       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Emission Bandwidth         Test Case         Test Conditions         Test Setup 1         Rest Case         Test Setup 1         Test Conditions         Test Mode         LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Conditions         Test Case <td>Test Case</td> <td>Test Conditions</td>	Test Case	Test Conditions				
RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel)         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Occupied Bandwidth         Test Case         Test Case       Test Conditions         Test Setup       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Emission Bandwidth         Test Case       Test Conditions         Test Revironment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Conditions         Test Environment       Ambient Climate & Rated Voltage	Test Environment	Ambient Climate & Rated Voltage				
Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Occupied Bandwidth         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Emission Bandwidth         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup 1         Ref Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Setup       Test Setup 1         Ref Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Case       Test Conditions         Test Setup       Ambient Climate & Rated Voltage         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         Ref Channels (TX)	Test Setup	Test Setup 1				
Bandwidth - Occupied Bandwidth         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Emission Bandwidth         Test Case       Test Conditions         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Case       Test Conditions         Test Setup       Test Conditions         Test Setup       Test Setup 1         RF Channels (TX)       L, H (L= low channel, H= high channel) <td>RF Channels (TX)</td> <td>L, M, H (L= low channel, M= middle channel, H= high channel)</td>	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test CaseTest ConditionsTest EnvironmentAmbient Climate & Rated VoltageTest SetupTest Setup 1RF Channels (TX)L, M, H (L= low channel, M= middle channel, H= high channel )Test ModeLTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4Bandwidth - Emission BandwidthTest CaseTest ConditionsTest SetupAmbient Climate & Rated VoltageTest SetupTest Setup 1RF Channels (TX)L, M, H (L= low channel, M= middle channel, H= high channel )Test ModeLTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4Band Edges ComplianceTest CaseTest CaseTest ConditionsTest CaseTest ConditionsTest CaseTest ConditionsTest CaseTest ConditionsTest SetupTest ConditionsTest SetupTest Setup 1Rest CaseTest ConditionsTest SetupTest Setup 1Rest SetupTest Setup 1Rest SetupTest Setup 1Rest SetupTest Setup 1Ref Channels (TX)L, H (L= low channel, H= high channel)	Test Mode	LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4				
Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Emission Bandwidth         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Case       Test Conditions         Test Setup       Ambient Climate & Rated Voltage         Test Setup       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         Ref Channels (TX)       L, H (L= low channel, H= high channel)         RF Channels (TX)       L, H (L= low channel, H= high channel)		Bandwidth - Occupied Bandwidth				
Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Emission Bandwidth         Test Case       Test Conditions         Test Setup       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Case         Test Conditions         Test Case         Test Mode         LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Conditions         Test Case         Test Conditions         Test Setup 1	Test Case	Test Conditions				
RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Emission Bandwidth         Test Case         Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Conditions         Test Case         Test Conditions         Test Case         Test Conditions         Test Conditions         Test Setup 1         Tes	Test Environment	Ambient Climate & Rated Voltage				
Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Bandwidth - Emission Bandwidth         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Conditions         Test Case       Test Conditions         Test Conditions         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         Rest Setup       Test Setup 1         RF Channels (TX)       L, H (L= low channel, H= high channel)	Test Setup	Test Setup 1				
Bandwidth - Emission Bandwidth         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, H (L= low channel, H= high channel)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )				
Test CaseTest ConditionsTest EnvironmentAmbient Climate & Rated VoltageTest SetupTest Setup 1RF Channels (TX)L, M, H (L= low channel, M= middle channel, H= high channel )Test ModeLTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4Band Edges ComplianceTest CaseTest CaseTest ConditionsTest EnvironmentAmbient Climate & Rated VoltageTest SetupTest Setup 1RF Channels (TX)L, H (L= low channel, H= high channel)	Test Mode	LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4				
Test EnvironmentAmbient Climate & Rated VoltageTest SetupTest Setup 1RF Channels (TX)L, M, H (L= low channel, M= middle channel, H= high channel )Test ModeLTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4Band Edges ComplianceTest CaseTest CaseTest ConditionsTest EnvironmentAmbient Climate & Rated VoltageTest SetupTest Setup 1RF Channels (TX)L, H (L= low channel, H= high channel)		Bandwidth - Emission Bandwidth				
Test Setup       Test Setup 1         RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Conditions         Test Setup       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, H (L= low channel, H= high channel)	Test Case	Test Conditions				
RF Channels (TX)       L, M, H (L= low channel, M= middle channel, H= high channel )         Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Test Case         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, H (L= low channel, H= high channel)	Test Environment	Ambient Climate & Rated Voltage				
Test Mode       LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4         Band Edges Compliance         Band Edges Compliance         Test Case         Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, H (L= low channel, H= high channel)	Test Setup	Test Setup 1				
Test Case       Test Conditions         Test Environment       Ambient Climate & Rated Voltage         Test Setup       Test Setup 1         RF Channels (TX)       L, H (L= low channel, H= high channel)	RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel )				
Test CaseTest ConditionsTest EnvironmentAmbient Climate & Rated VoltageTest SetupTest Setup 1RF Channels (TX)L, H (L= low channel, H= high channel)	Test Mode	LTE/TM1;LTE/TM2; LTE/TM3; LTE/TM4				
Test EnvironmentAmbient Climate & Rated VoltageTest SetupTest Setup 1RF Channels (TX)L, H (L= low channel, H= high channel)		Band Edges Compliance				
Test Setup     Test Setup 1       RF Channels (TX)     L, H (L= low channel, H= high channel)	Test Case	Test Conditions				
RF Channels (TX) L, H (L= low channel, H= high channel)	Test Environment	Ambient Climate & Rated Voltage				
	Test Setup	Test Setup 1				
Test Mode LTE/TM1	RF Channels (TX)	L, H (L= low channel, H= high channel)				
	Test Mode	LTE/TM1				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-eDocument.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or faisification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fulleet steint of the flaw. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report at certificate, please contact us at telephone: (86-755) 8307 1443, or email: C.M. Doccheck@ags.com

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Holustia/ Park, Suzhou Area, China (Jangsu) Plot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润脏路1号的6号厂房南部 邮编: 215000

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 22 of 26

	Spurious Emission at Antenna Terminals				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 1				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	LTE/TM1				
	Field Strength of Spurious Radiation				
Test Case	Test Conditions				
Test Environment	Ambient Climate & Rated Voltage				
Test Setup	Test Setup 2				
RF Channels (TX)	L, M, H (L= low channel, M= middle channel, H= high channel)				
Test Mode	LTE/TM1 Remark: All bandwidth and modulation of LTE have been pre tested, and only the worst results are reflected in the report.				
	Frequency Stability				
Test Case	Test Conditions				
Test Environment	(1) -30 °C to +50 °C with step 10 °C at Rated Voltage				
	(2) VL, VN and VH of Rated Voltage at Ambient Climate.				
Test Setup	Test Setup 3				
RF Channels (TX)	M (M= middle channel)				
Test Mode	LTE/TM1				
	The report only show the bandwidth with the worst case.				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawill and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) are related for 30 days only. *Aremandi* 10 Decoher barres and the timpsection report & certificate, please contact us at telephone: (86-75) 8307 1443, *Aremandi* 10 Decoher barres for the sample(s) in the sample(s) are related for 30 days only.

of and the CHARDENT CALL STATE CONTINUES CONTINUES

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 23 of 26

## 5 Main Test Instruments

SG

	RF conducted test							
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)			
Shielding Room	Brilliant-emc	N/A	SUWI-04-01-06	2021/05/08	2024/05/07			
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2023/02/06	2024/02/05			
Signal Analyzer	ROHDE&SCHWARZ	FSV3030	SUWI-01-02-02	2023/05/11	2024/05/10			
Measurement Software	Tonscend	JS1120-3 Test System V 2.6.88.0336	SUWI-02-09-09	NCR	NCR			
Radio Communication Analyzer	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22			
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2023/02/06	2024/02/05			
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2023/02/06	2024/02/05			
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-01	2023/02/06	2024/02/05			
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2023/05/11	2024/05/10			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Diress otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relained for 30 days only.

South of No. 9Pent, No. 1, Runsheng Road, Suchou Industrial Park, Suzhou Area, China (Jangsu) Pilot Free Trade Zone 215000 中国 • 苏州 • 中国(江苏)自由贸易试验区苏州片区苏州工业园区润脏路1号的5号厂房南部 邮编: 215000

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 24 of 26

		RSE Test S	ystem	24 01 20	
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-02	2021/11/25	2024/11/24
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-13	2023/02/07	2024/02/06
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2023/05/11	2024/05/10
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-06	2022/11/23	2023/11/22
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2023/02/08	2024/02/07
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	VULB 9168	SUWI-01-11-04	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9120D	SUWI-01-11-05	2021/12/05	2023/12/04
Receiving antenna	SCHWRZBECK MESS- ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2023/05/12	2024/05/11
Active Loop Antenna	SCHWRZBECK MESS- ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2023/05/13	2024/05/12
Amplifier	Tonscend	TAP9K3G32	SUWI-01-14-06	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP01018050	SUWI-01-14-04	2022/11/23	2023/11/22
Amplifier	Tonscend	TAP30M7G30	SUWI-01-14-05	2022/11/23	2023/11/22
Wideband Radio Communication Tester	Anritsu	MT8820C	SUWI-01-16-08	2023/02/06	2024/02/05
Wideband Radio Communication Tester	Anritsu	MT8821C	SUWI-01-26-03	2022/11/23	2023/11/22
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR



SG

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawfull and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) itested and such sample(s) are relatined for 30 days only. Attention: Desch Handerson of Jesting inspection report à certificate, please contact us at telehome: (86-75) 8307 1443, Attention: Desch Handerson (90 testing inspection report à certificate, please contact us at telehome: (86-75) 8307 1443,

South Mb. SPent, No. 1, Runsherg Read, Suzhou Industrel Park, Suzhou Area, Chine (Jangsu) Plot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业国区润脏路1号的号厂房南部 邮编: 215000 t (86–512) 62992980 www.sgsgroup.com.cn t (86–512) 62992980 sgs.china@sgs.com

Report No.: SEWA2310000121RG01 Rev.: 01 25 of 26 Page:

#### **Measurement Uncertainty** 6

For a 95% confidence level (k = 2), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Spurious emissions, conducted	±0.54dB
4	Radio Frequency	±1.0 %
5	Duty Cycle	±0.37%
6	Occupied Bandwidth	±1.0 %
		± 3.13dB (9k -30MHz)
7	Radiated Emission	± 4.88dB (30M -1GHz)
1	Radiated Emission	± 4.75dB (1GHz to 18GHz)
		± 4.77dB (Above 18GHz)
Remark <sup>.</sup>	•	

emark:

S

The Ulab (lab Uncertainty) is less than Ucispi/ETSI (CISPR/ETSI Uncertainty), so the test results

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;

non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.



otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service f, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.agr</u>, and, for electronic format doc to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.Terms-en-Docume</u> in is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this docu-that information contained hereon reflects the Company's findings at the time of its intervention only and within the instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate part ion from exercising all their rights and obligations under the transaction documents. This document conto be repi in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisification of the as ance of this document is unlawful and offenders may be prosecuted to the fullest extent of the faw. Unless otherwise at shown in this test report refer only to the sample(s) tested and such sample(s) are retained to 730 days only. IC ND Decekroments only of telephone: (86-755) 83 except ne: (86-755) 8307 1443

South of No. 6 Plant. No. 1. Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 中国・苏州・中国(江苏)自由贸易试验区苏州片区苏州工业园区润胜路1号的6号厂房南部 邮编: 215000 t (86-512) 62992980

www.sgsgroup.com.cn

 Report No.:
 SEWA2310000121RG01

 Rev.:
 01

 Page:
 26 of 26

## 7 Appendixes

Appendix A.2	WWAN Setup Photos
Appendix B.1	LTE Band 7
Appendix B.2	LTE Band CA_7C

---End of Report---



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law content such as the sample(s) lested and such sample(s) are relained for 30 days only.

www.sgsgroup.com.cn

sgs.china@sgs.com