



5.8 GHz 8 dBi ISM / UNII Band Omnidirectional Wireless LAN Antenna - Model: HG5808U

Applications and Features

Applications:

- 5.8GHz UNII applications
- 5.8GHz ISM applications
- 5.8GHz Wireless LAN systems
- WiFi
- Multipoint Applications

Features:

- Superior performance
- Heavy duty industrial grade design
- Fiberglass radome
- All weather operation
- Integral N-Female Connector
- Supplied with mast mounting kit



Features

Performance

The HyperGain® HG5808U is a very compact yet high performance omnidirectional WiFi antenna designed for the 5.8GHz ISM and UNII band. It is ideally suited for multipoint and mobile applications where high gain and wide coverage is desired.

Rugged and Weatherproof

The HG5808U construction features a fiberglass radome for durability and aesthetics. Included with the antenna, the mounting system features a heavy-duty steel bracket and U-Bolt for superior strength.

Specifications

Electrical Specifications


Frequency	5725-5850 MHz
Gain	8 dBi
Horizontal Beam Width	360°
Vertical Beam Width	16°
Impedance	50 Ohm
Max. Input Power	100 Watts
VSWR	< 1.5:1 avg.
Connector	N Female



Mechanical Specifications

Weight	.44 lbs. (0.2 kg)
Dimensions	.78" (20 mm) Dia. x 13.7" (350 mm)
Radome Material	Gray Fiberglass
Operating Temperature	-40° C to to 85° C (-40° F to 185° F)
Mounting	2" (50.8 mm) dia. mast max.

RF Antenna Patterns

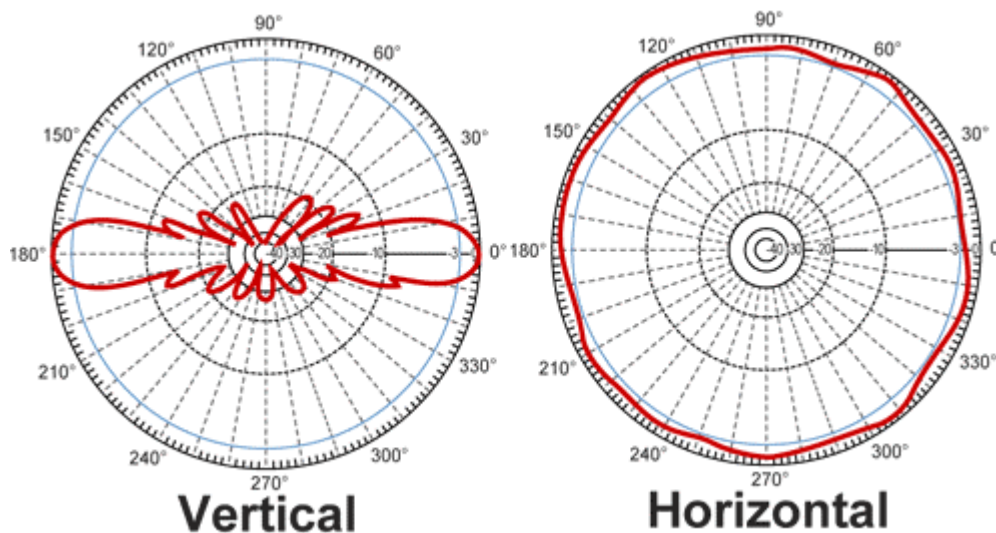

Guaranteed Quality

This product is backed by Hyperlink's Limited Warranty

Mounting Options

Description		Part Number
	Ceiling / Wall Universal Antenna Mount can be used with HyperLink's 4.5" sq and 8.5" sq. patch antennas as well as N-Type bulkhead and TNC/BNC bulkhead omni directional antennas. Includes ceiling/wall mounting hardware.	HGX-UMOUNT02