

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 247 REQUIREMENT

OF

FCC Applicant: Huawei Technologies Co., Ltd.

Administration Building, Headquarters of Huawei Technologies Co.,

Ltd., Bantian, Longgang District, Shenzhen, 518129, China

IC Applicant: Huawei Technologies Co., Ltd.

> Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, China(Peoples

Republic Of)

Product Name: Notebook Computer

HUAWEI, HONOR **Brand Name:**

FCC Model No.: KPR-W19, KPR-W29, KPR-WXXXXX (X Can be 0-9, A-Z, a-z, blank

or symbol "-")

KPR-W19, KPR-W29 IC Model No.:

For the marketing purpose, only different model designations on the Model Difference:

marking plate for different markets. No RF concern.

T190305W03-RP1 **Report Number:**

FCC ID: QISKPR-WX9

IC: 6369A-KPRWX9

FCC Rule Part: §15.247, Cat: DTS

IC Rule Part: RSS-247 issue 2 Feb 2017

Issue Date: Mar. 21, 2019

Date of Test: Mar. 07, 2019 ~ Mar. 14, 2019

Date of EUT Received: Mar. 07, 2019

Issued by Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan.

(R.O.C.)

service@ccsrf.com

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: T190305W03-RP1

Page 2 of 113

Note: The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this re-

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

Henry Chiang / Engineer

Approved By:

Kevin Tsai / Deputy Manager





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: T190305W03-RP1

Page 3 of 113

Revision History

Report Number	Revision	Description	Effected Page	Issue Date	Revised By
T190305W03-RP1	Rev.00	Initial creation of docu- ment	All	Mar. 21, 2019	Violetta Tang

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Table of Contents

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	7
3	SUMMARY OF TEST RESULTS	9
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSION TEST	13
7	DUTY CYCLE OF TEST SIGNAL	17
8	PEAK OUTPUT POWER MEASUREMENT	19
9	6dB & 99% BANDWIDTH MEASUREMENT	31
10	CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT	42
11	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	51
12	POWER SPECTRAL DENSITY	108
13	ANTENNA REQUIREMENT	113

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



GENERAL INFORMATION

1.1 Product description

Product Name:	Notebook Computer			
Brand Name:	HUAWEI, HONOR			
FCC Model No.:	KPR-W19 blank or s	, KPR-W29, KPR-WXXXXX (X Can be 0-9, A-Z, a-z, ymbol "-")		
IC Model No.:	KPR-W19	, KPR-W29		
Model Difference:	For the marketing purpose, only different model designations on the marking plate for different markets. No RF concern.			
Product SW/HW version:	1809 (OS Build 17763.194) / B3A			
Radio SW/HW version:	Wi-Fi Con	nponent: 20 / Wi-Fi Component: 8265		
Test SW Version:	N/A			
RF power setting in TEST SW:	N/A			
		om Rechargeable Li-ion Battery or 5Vdc / 9Vdc / 5Vdc / 20Vdc from AC/DC Adapter.		
Power Supply:	Battery:	Model No.: HB4593R1ECW, Supplier: HUAWEI		
	Adapter:	Model No.: HW-200325YYY (Y=0-9, A-Z or blank) Supplier: HUAWEI		

WLAN 2.4GHz:

Wi-Fi	Frequency Range	Channels	Rated Power in dBm (Peak)	Rated Power in dBm (EIRP)	Type of Emission	Modulation Technology
	rtange		in abin (i cak)	iii dbiii (EiiXi)	LIIII331011	recritiology
802.11b			18.60	20.25	13M6G1D	DSSS,
802.11g	2412-2462	11	21.55	20.45	16M7D1D	
802.11n HT20			21.60	20.24	17M8D1D	OFDM
802.11n HT40	2422-2452	7	19.37	19.28	36M3D1D	
Antenna Designation:		PIFA Antenna, Main Antenna Gain: 1.95 dBi Aux Antenna Gain: 0.65 dBi				
Modulati	on type:	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM				
Transitio	n Rate:	802.11 g: 802.11 n	1/2/5.5/11 Mbps 6/9/12/18/24/36/ _20MHz: 6.5 – 14 _40MHz: 13.5 – 3	/48/54 Mbps 14.4Mbps		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: T190305W03-RP1

Page 6 of 113

1.2 Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247

FCC KDB 558074 D01 DTS Meas. Guidance v05r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

RSS-247 issue 2 Feb. 2017

RSS-Gen. issue 5 Apr. 2018

ANSI C63.10:2013

Note: All test items have been performed and record as per the above standards.

1.3 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd.,

Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309)

FCC Designation number: TW1309

Canada Registration number: 2324G

1.4 Special Accessories

There are no special accessories used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: T190305W03-RP1

Page 7 of 113

SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 **Conducted Test (RF)**

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max, emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level. Note:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor. Following shows an offset computation example with cable loss and attenuator.

2.5 Configuration of Tested System

Fig. 2-1 Radiated & Conducted Emission Configuration



Fig 2-2 AC power line Configuration




Table 2-1 Equipment Used in Tested System

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Data Cable	Power Cord
1.	WLAN Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



SUMMARY OF TEST RESULTS

FCC Rules	IC Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Compliant
§15.247(b) (3)	RSS-247 §5.4(4)	Peak Output Power	Compliant
§15.247(a)(2)	RSS-247 §5.1 (1) RSS-Gen §6.7	6dB & 99% Emission Bandwidth	Compliant
§15.247(d)	RSS-247 §5.5 RSS-Gen §8.10	Conducted Band Edge and Spurious Emission	Compliant
§15.205 §15.209 §15.247(d)	RSS-247 §5.5 RSS-Gen §8.9 RSS-Gen §8.10 RSS-Gen §6.13	Radiated Band Edge and Spurious Emission	Compliant
§15.247(e)	RSS-247 §5.2(2)	Power Spectral Density	Compliant
§15.203 §15.247(b)	RSS- Gen §6.8	Antenna Requirement	Compliant

DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band


11 channels are provided for 802.11b, 802.11g and 802.11n HT20

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n_HT40

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422 MHz	7	2442 MHz
4	2427 MHz	8	2447 MHz
5	2432 MHz	9	2452 MHz
6	2437 MHz		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Page 10 of 113

4.2 The Worst Test Modes and Channel Details

- 1. The EUT has been tested under operating condition.
- 2. Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3. Investigation has been done on all the possible configurations for searching the worst case. The gevin UE is pre-scanned among below modes.
- 4. Therefore, below summary is the modes of test configuration that yield the highest reading and generate the highest emission chosen to carry out the relevantly mandatory test items.

AC POWER LINE CONDUCTED EMISSION TEST:

Test Condition	AC Power line conducted emission for line and neutral
Worst Case	Operation in normal mode

RADIATED EMISSION TEST:

RADIATED EMISSION TEST (BELOW 1 GHz)							
MODE AVAILABLE TESTED CHANNEL CHANNEL MODULATION DATA RATE (Mbps) PORT							
802.11g	1 to 11	1,6,11	OFDM	6	MIMO		
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	MCS 8	MIMO		

RADIATED EMISSION TEST (ABOVE 1 GHz)						
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT	
802.11b	1 to 11	1, 6, 11	DSSS	1	MIMO	
802.11g	1 to 11	1, 6, 11	OFDM	6	MIMO	
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 8	MIMO	
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	MCS 8	MIMO	


Note:

The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for 802.11b/g/n WLAN Transmitter for channel Low, Mid and High, the worst case H position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)





ANTENNA PORT CONDUCTED MEASUREMENT:

, L	WILLIAM TOKI GONDOGILD MENGGIKEMENT.						
CONDUCTED TEST							
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	DATA RATE (Mbps)	ANTENNA PORT		
802.11b	1 to 11	1, 6, 11	DSSS	11	MAIN		
802.11g	1 to 11	1, 6, 11	OFDM	54	Aux		
802.11n (HT20)	1 to 11	1, 6, 11	OFDM	MCS 8	Aux		
802.11n (HT40)	3 to 9	3, 6, 9	OFDM	MCS 8	Aux		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575 dB
Peak Output Power	+/- 1.92 dB
6dB Bandwidth	+/- 61.248 Hz
100 kHz Bandwidth of Frequency Band Edges	+/- 1.92 dB
Peak Power Density	+/- 1.996 dB
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12 dB
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68 dB
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18 dB
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47 dB
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81 dB
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87 dB

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.



CONDUCTED EMISSION TEST

6.1 Standard Applicable

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak	Average		
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60	50		

6.2 Measurement Equipment Used

	Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
CABLE	EMCI	CFD300-NL	CERF	2018/06/29	2019/06/28			
EMI Test Receiver	R&S	ESCI	100064	2018/07/24	2019/07/23			
LISN	SCHWARZ- BECK	NSLK 8127	8127-541	2019/01/31	2020/01/30			
LISN	SCHAFFNER	NNB 41	03/10013	2019/02/13	2020/02/12			
Software		EZ-EMC(CCS-3A1-CE)					

6.3 EUT Setup

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI 63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only

^{1.} The lower limit shall apply at the transition frequencies

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.



6.4 Test SET-UP (Block Diagram of Configuration)

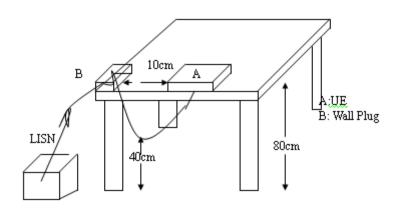

6.5 Measurement Procedure


- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all phases of power being supplied by given UE are completed

6.6 Measurement Result

Note: Refer to next page for measurement data and plots.

Note2: The * reveals the worst-case results that closet to the limit.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only





Page 15 of 113

AC POWER LINE CONDUCTED EMISSION TEST DATA

T190305W03-RP1 Date: 2019/3/12 Job No.:

Huawei Technologies Co., Ltd. Time: 05:48:49 PM Company:


FCC/IC QP Temp.(°C)/Hum.(%): 25(°C)/60% Standard:

Conduction test Test By: Henry Test item:

Test Voltage: AC 120V/60Hz L1 Line:


KPR-W19, KPR-WXXXXX, KPR-W19 Model:

Description: Operation

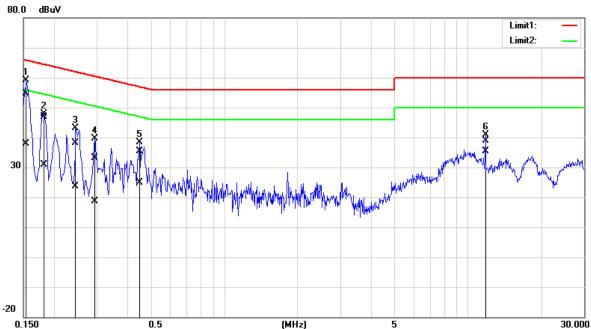

No	Frequen-	Qua-	Aver-	Correc-	Qua-	Aver-	Qua-	Aver-	Qua-	Aver-	Re-
	су	siPeak	age	tion	siPeak	age	siPeak	age	siPeak	age	mark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1539	54.59	37.70	0.16	54.75	37.86	65.78	55.79	-11.03	-17.93	Pass
2	0.1819	46.70	30.79	0.15	46.85	30.94	64.39	54.40	-17.54	-23.46	Pass
3	0.2460	37.95	23.42	0.15	38.10	23.57	61.89	51.89	-23.79	-28.32	Pass
4	0.2940	32.89	18.59	0.15	33.04	18.74	60.41	50.41	-27.37	-31.67	Pass
5	0.4500	35.17	24.61	0.16	35.33	24.77	56.87	46.88	-21.54	-22.11	Pass
6	11.8139	38.48	34.98	0.51	38.99	35.49	60.00	50.00	-21.01	-14.51	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





T190305W03-RP1 Date: 2019/3/12 Job No.:

Huawei Technologies Co., Ltd. Time: 05:53:29 PM Company:


FCC/IC QP Temp.(°C)/Hum.(%): 24(°C)/50% Standard:

Conduction test Test By: Henry Test item:

Test Voltage: AC 120V/60Hz Line:

KPR-W19, KPR-WXXXXX, KPR-W19 Model:

Description: Operation

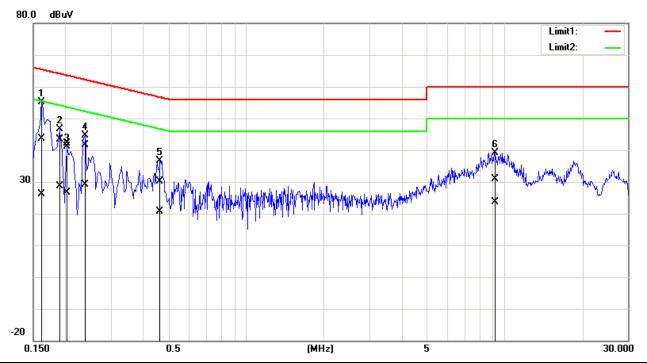

No	Frequen-	Qua-	Aver-	Correc-	Qua-	Aver-	Qua-	Aver-	Qua-	Aver-	Re-
	су	siPeak	age	tion	siPeak	age	siPeak	age	siPeak	age	mark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1620	43.60	26.09	0.10	43.70	26.19	65.36	55.36	-21.66	-29.17	Pass
2	0.1900	43.34	28.43	0.10	43.44	28.53	64.03	54.04	-20.59	-25.51	Pass
3	0.2020	41.94	26.42	0.10	42.04	26.52	63.52	53.53	-21.48	-27.01	Pass
4*	0.2380	41.58	28.99	0.10	41.68	29.09	62.16	52.17	-20.48	-23.08	Pass
5	0.4660	30.13	20.60	0.11	30.24	20.71	56.58	46.58	-26.34	-25.87	Pass
6	9.1899	30.54	23.39	0.36	30.90	23.75	60.00	50.00	-29.10	-26.25	Pass

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



DUTY CYCLE OF TEST SIGNAL

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle.

All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

Formula:

Duty Cycle = Ton / (Ton+Toff)

Measurement Procedure:

- 1. Set span = Zero
- 2. RBW = 8MHz
- 3. VBW = 8MHz,
- 4. Detector = Peak

Duty Cycle:

	Duty Cycle (%)	Duty Factor (dB)	1/T (kHz)	VBW setting (kHz)
802.11b	98.97	0.04	0.08	0.01
802.11g	94.77	0.23	0.49	1.00
802.11n_20	95.64	0.19	0.52	1.00
802.11n_40	84.40	0.74	1.07	2.00

b = 98.97%, g = 94.77%, $n_ht_20 = 95.64\%$


Duty Cycle Factor: $10 * \log(1/0.9897) = 0.04$ Duty Cycle Factor: $10 * \log(1/0.9477) = 0.23$ Duty Cycle Factor: $10 * \log(1/0.9564) = 0.19$ Duty Cycle Factor: $10 * \log(1/0.844) = 0.74$

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




7.1 DUTY CYCLE TEST SIGNAL Measurement Result


802.11 b

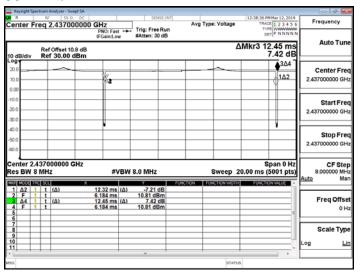


802.11 g

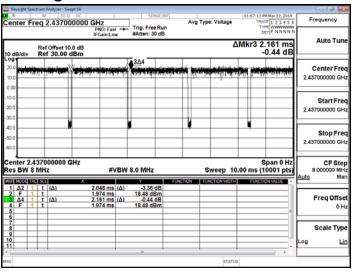

802.11 n 20 MHz

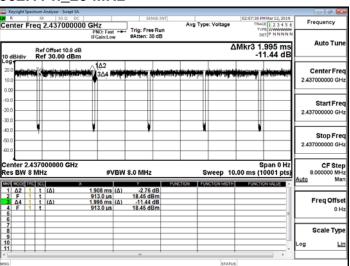

802.11 n 40 MHz

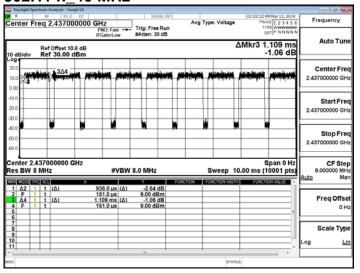

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For systems using digital modulation in the 2400-2483.5 MHz bands, the limit for peak output power is 1Watt.

Per RSS-247 §5.4(d)

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

If the transmitting antenna of directional gain greater than 6dBi are used the peak output power form the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the Antenna exceeds 6dBi.

In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of Antenna exceeds 6dBi.

As per FCC KDB 662911 D01

Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi.

(i) If transmit signals are correlated, then Directional gain

= $10 \log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})^2/N_{ANT}] dBi$

[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




8.2 Measurement Equipment Used

	Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Power Meter	Anritsu	ML2496A	1242004	2018/10/23	2019/10/22				
Power Sensor	Anritsu	MA2411B	1207365	2018/10/23	2019/10/22				
Power Sensor	Anritsu	MA2411B	1207368	2018/10/24	2019/10/23				
Attenuator	Marvelous	MVE2213-10	RF31	2019/02/26	2020/02/25				
Coaxial Cables	Woken	00100A1F1A 185C	RF229	2019/02/26	2020/02/25				

8.3 Test Set-up

Power Meter:



8.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guid-
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter.

Power Meter:

It is used as the auxiliary test equipment to conduct the output power measurement.

4. Record the max. Reading as observed from Spectrum or Power Meter.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




8.5 Measurement Result

802.1	1b Ch0				
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	1	16.51	30.00	PASS
6	2437	1	18.60	30.00	PASS
11	2462	1	16.57	30.00	PASS
802.1	1b Ch0				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	1	13.96	30.00	PASS
6	2437	1	15.94	30.00	PASS
11	2462	1	13.96	30.00	PASS

802.1	1b Ch1				
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	1	16.55	30.00	PASS
6	2437	1	18.59	30.00	PASS
11	2462	1	16.58	30.00	PASS
802.1	1b Ch1				
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	1	13.86	30.00	PASS
6	2437	1	15.93	30.00	PASS
11	2462	1	13.88	30.00	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






802.1	802.11b 2Tx								
CH Freq. (MHz)		Data Rate	Pov	ver m)	Total Peak Output Power	Limit (dBm)	RESULT		
	(CH 0	CH 1	(dBm)	()			
1	2412	1	13.95	13.05	16.53	30.00	PASS		
6	2437	1	16.05	14.95	18.55	30.00	PASS		
11	2462	1	13.97	13.02	16.53	30.00	PASS		
СН	Freq. (MHz)	Data Rate	Po	Output wer Bm)	Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT		
			CH 0	CH 1	(dBm)				
1	2412	1	11.20	10.30	13.82	30.00	PASS		
6	2437	1	13.40	12.20	15.89	30.00	PASS		
11	2462	1	11.25	10.15	13.79	30.00	PASS		

802.1	802.11g Ch0								
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT				
1	2412	6	19.29	30.00	PASS				
6	2437	6	21.25	30.00	PASS				
11	2462	6	19.25	30.00	PASS				
802.1	1g Ch0								
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT				
1	2412	6	14.16	30.00	PASS				
6	2437	6	16.15	30.00	PASS				
11	2462	6	14.16	30.00	PASS				



802.1	802.11g Ch1							
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT			
1	2412	6	19.49	30.00	PASS			
6	2437	6	21.55	30.00	PASS			
11	2462	6	19.52	30.00	PASS			
802.1	1g Ch1							
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT			
1	2412	6	14.12	30.00	PASS			
6	2437	6	16.13	30.00	PASS			
11	2462	6	14.07	30.00	PASS			


802.1	1g 2Tx						
СН	Freq. (MHz)	Data Rate	Peak Output Power (dRm) CH 0 CH 1		Total Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	6	16.62	15.93	19.30	30.00	PASS
6	2437	6	18.85	17.69	21.32	30.00	PASS
11	2462	6	16.76	15.91	19.37	30.00	PASS
СН	Freq. (MHz)	Data Rate	Po	Output wer Bm)	Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT
			CH 0	CH 1	(dBm)		
1	2412	6	11.22	10.30	14.02	30.00	PASS
6	2437	6	13.35	12.28	16.09	30.00	PASS
11	2462	6	11.20	10.30	14.01	30.00	PASS





802.1	1n_HT20	M Ch0			
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	MCS0	19.33	30.00	PASS
6	2437	MCS0	21.37	30.00	PASS
11	2462	MCS0	19.41	30.00	PASS
802.1	1n_HT20	M Ch0			
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	MCS0	14.00	30.00	PASS
6	2437	MCS0	15.97	30.00	PASS
11	2462	MCS0	14.00	30.00	PASS

802.1	1n_HT20	M Ch1			
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
1	2412	MCS0	19.46	30.00	PASS
6	2437	MCS0	21.60	30.00	PASS
11	2462	MCS0	19.51	30.00	PASS
802.1	1n_HT20	M Ch1			
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
1	2412	MCS0	13.97	30.00	PASS
6	2437	MCS0	15.96	30.00	PASS
11	2462	MCS0	13.96	30.00	PASS





802.1	1n_HT20	M MIMO					
СН	Freq. (MHz)	Data Rate	Po	output wer Rm)	Total Peak Output Power	Limit (dBm)	RESULT
	(1411-12)	rtato	CH 0	CH 1	(dBm)	(dBiii)	
1	2412		16.66	15.94	19.33	30.00	PASS
6	2437		18.83	17.65	21.29	30.00	PASS
11	2462		16.90	15.93	19.45	30.00	PASS
802.1	1n_HT20	M MIMO)				
СН	Freq. (MHz)	Data Rate	Pov	Output wer Bm)	Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT
			CH 0	CH 1	(dBm)		
1	2412		11.15	10.34	13.96	30.00	PASS
1 6	2412 2437		11.15 13.25	10.34 12.03	13.96 15.88	30.00 30.00	PASS PASS

802.1	1n_HT40	M Ch0			
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
3	2422	MCS0	15.37	30.00	PASS
6	2437	MCS0	19.21	30.00	PASS
9	2452	MCS0	15.25	30.00	PASS
802.1	1n_HT40	M Ch0			
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
3	2422	MCS0	10.99	30.00	PASS
6	2437	MCS0	14.95	30.00	PASS
9	2452	MCS0	10.97	30.00	PASS



802.1	1n_HT40	M Ch1			
СН	Freq. (MHz)	Data Rate	Peak Output Power (dBm)	Limit (dBm)	RESULT
3	2422	MCS0	15.27	30.00	PASS
6	2437	MCS0	19.37	30.00	PASS
9	2452	MCS0	15.23	30.00	PASS
802.1	1n_HT40	M Ch1			
СН	Freq. (MHz)	Data Rate	Max. Avg. Output include tune up tolerance Power (dBm)	Limit (dBm)	RESULT
3	2422	MCS0	10.91	30.00	PASS
6	2437	MCS0	14.94	30.00	PASS
9	2452	MCS0	10.92	30.00	PASS

802.1	1n_HT40	M MIMO					
СН	Freq. (MHz)	Data Rate	Pov	output wer Rm)	Total Peak Output Power	Limit (dBm)	RESULT
	(1411.12)	rtato	CH 0	CH 1	(dBm)	(dBill)	
3	2422		12.53	11.66	15.13	30.00	PASS
6	2437		16.62	15.73	19.21	30.00	PASS
9	2452		12.67	11.59	15.17	30.00	PASS
802.1	1n_HT40	M MIMO					
СН	Freq. (MHz)	Data Rate	Po	Output wer Bm)	Max. Avg. Output include tune up tolerance Power	Limit (dBm)	RESULT
			CH 0	CH 1	(dBm)		
3	2422		7.40	6.65	10.79	30.00	PASS
6	2437		11.62	10.66	14.92	30.00	PASS
9	2452		7.65	6.57	10.89	30.00	PASS

^{*} Note: The duty cycle factor is compensated to obtain the maximum value of measurement in average.




EIRP

802.1	1b Ch0						
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	1	13.96	1.95	15.91	36	PASS
6	2437	1	15.94	1.95	17.89	36	PASS
11	2462	1	13.96	1.95	15.91	36	PASS
802.1	1b Ch1						
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	1	13.86	0.65	14.51	36	PASS
6	2437	1	15.93	0.65	16.58	36	PASS

802.1	1b_2TX								
СН	Freq. (MHz)	Data Rate	Po	Output wer Bm)	Total Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
			CH 0	CH 1	(dDIII)	(uDi)			
1	2412	1	11.20	10.30	13.82	4.36	18.18	36	PASS
6	2437	1	13.40	12.20	15.89	4.36	20.25	36	PASS
11	2462	1	11.25	10.15	13.79	4.36	18.15	36	PASS


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





802.11	lg Ch0						
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	6	14.16	1.95	16.11	36	PASS
6	2437	6	16.15	1.95	18.10	36	PASS
11	2462	6	14.16	1.95	16.11	36	PASS
802.11	lg Ch1						
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	6	14.12	0.65	14.77	36	PASS
6	2437	6	16.13	0.65	16.78	36	PASS
11	2462	6	14.07	0.65	14.72	36	PASS

802.1	1g_2TX								
СН	Freq. (MHz)	Data Rate	Po	Output wer Bm)	Total Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
			CH 0	CH 1	(*)	()			
1	2412	6	11.22	10.30	14.02	4.36	18.38	36	PASS
6	2437	6	13.35	12.28	16.09	4.36	20.45	36	PASS
11	2462	6	11.20	10.30	14.01	4.36	18.37	36	PASS





802.1	1n_HT20N	/I Ch0					
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
1	2412	MCS0	14.00	1.95	15.95	36	PASS
6	2437	MCS0	15.97	1.95	17.92	36	PASS
11	2462	MCS0	14.00	1.95	15.95	36	PASS
000 1							
802. I	1n_HT20N	/I Ch1					
CH	Treq. (MHz)	A Ch1 Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
	Freq.	Data	•	Gain			RESULT PASS
СН	Freq. (MHz)	Data Rate	Power (dBm)	Gain (dBi)	(dBm)	(dBm)	

802.1	802.11n_HT20M MIMO								
СН	Freq. (MHz)	Data Rate	Po	Output wer Bm)	Total Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
			CH 0	CH 1	(*)	(*)			
1	2412	MCS8	16.66	15.94	13.96	4.36	18.32	36	PASS
6	2437	MCS8	18.83	17.65	15.88	4.36	20.24	36	PASS
11	2462	MCS8	16.90	15.93	13.93	4.36	18.29	36	PASS



802.11n_HT40M Ch0								
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT	
3	2422	MCS0	10.99	1.95	12.94	36	PASS	
6	2437	MCS0	14.95	1.95	16.90	36	PASS	
9	2452	MCS0	10.97	1.95	12.92	36	PASS	

802.1	802.11n_HT40M Ch1							
СН	Freq. (MHz)	Data Rate	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT	
3	2422	MCS0	10.91	0.65	11.56	36	PASS	
6	2437	MCS0	14.94	0.65	15.59	36	PASS	
9	2452	MCS0	10.92	0.65	11.57	36	PASS	

802.11n_HT40M MIMO									
СН	Freq. (MHz)	Data Rate	Po	Output wer Bm)	Total Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	RESULT
			CH 0	CH 1	(dDIII)	(ubi)			
3	2422	MCS8	7.40	6.65	10.79	4.36	15.15	36	PASS
6	2437	MCS8	11.62	10.66	14.92	4.36	19.28	36	PASS
9	2452	MCS8	7.65	6.57	10.89	4.36	15.25	36	PASS

* Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





6DB & 99% BANDWIDTH MEASUREMENT

9.1 Standard Applicable


The minimum 6 dB bandwidth shall be at least 500 kHz.

The occupied bandwidth or the "99% emission bandwidth" is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable **RSSs**

9.2 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Spectrum Analyzer	Agilent	N9010A	MY51440113	2018/06/20	2019/06/19		
Attenuator	Marvelous	MVE2213- 10	RF31	2019/02/26	2020/02/25		
DC Block	PASTERNACK	PE8210	RF81	2019/02/26	2020/02/25		
Coaxial Cables	Woken	00100A1F 1A185C	RF229	2019/02/26	2020/02/25		

9.3 Test Set-up



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



9.4 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. For 6dB Bandwidth:
 - Set the spectrum analyzer as RBW = 100 kHz, VBW = 3*RBW, Span = 30M/50MHz, Detector=peak, Sweep=auto.
- 5. Mark the peak frequency and –6dB (upper and lower) frequency.
- 6. For 99% Bandwidth:
 - Set the spectrum analyzer as RBW=1%, VBW = 3*RBW, Span = 30M/50MHz, Detector=Sample, Sweep=auto.
- 7. Turn on the 99% bandwidth function, max reading.
- 8. Repeat above procedures until all frequency of interest measured was complete.

9.5 Measurement Result

6dB Bandwidth

802.11b Ch0

			~ .	
802.	11	h	n'h'	7
ΔUII		11	1.11	ı

Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result	Freq. (MHz)	6dB BW (kHz)	Limit (kHz)	Result
2412	10140.00	> 500	PASS	2412	10150.00	> 500	PASS
2437	10150.00	> 500	PASS	2437	10140.00	> 500	PASS
2462	10140.00	> 500	PASS	2462	10140.00	> 500	PASS

802.11q Ch0

802.11g Ch1

Freq.	6dB BW	Limit	Result	Freq.	6dB BW	Limit	Result
(MHz)	(kHz)	(kHz)	Nesuit	(MHz)	(kHz)	(kHz)	Result
2412	13680.00	> 500	PASS	2412	15130.00	> 500	PASS
2437	15150.00	> 500	PASS	2437	15160.00	> 500	PASS
2462	15140.00	> 500	PASS	2462	15130.00	> 500	PASS

802.11 n HT20 Ch0

802.11 n HT20 Ch1

002.11_11_11120 0110				002.11_1			
Freq.	6dB BW	Limit	Result	Freq.	6dB BW	Limit	Result
(MHz)	(kHz)	(kHz)	Kesuit	(MHz)	(kHz)	(kHz)	Result
2412	15140.00	> 500	PASS	2412	15150.00	> 500	PASS
2437	15130.00	> 500	PASS	2437	15140.00	> 500	PASS
2462	15140.00	> 500	PASS	2462	15150.00	> 500	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



802.11 n HT40 Ch0

802.11 n HT40 Ch1

Freq.	6dB BW	Limit	Result			
(MHz)	(kHz)	(kHz)	Resuit			
2422	35140.00	> 500	PASS			
2437	35130.00	> 500	PASS			
2452	35130.00	> 500	PASS			

Freq.	6dB BW	Limit	Result				
(MHz)	(kHz)	(kHz)	Result				
2422	35130.00	> 500	PASS				
2437	35130.00	> 500	PASS				
2452	35140.00	> 500	PASS				

99% Bandwidth

802.11b Ch0				
Freq.	99% BW			
(MHz)	(MHz)			
2412	13.602			
2437	13.626			
2462	13.532			

802.11b Ch1	
Freq.	99% BW
(MHz)	(MHz)
2412	13.601
2437	13.621
2462	13.530

802.11g Ch0	
Freq.	99% BW
(MHz)	(MHz)
2412	16.664
2437	16.670
2462	16.665

802.11g Ch1	
Freq.	99% BW
(MHz)	(MHz)
2412	16.697
2437	16.677
2462	16.670

802.11n_HT20M Ch0		
Freq.	99% BW	
(MHz)	(MHz)	
2412	17.813	
2437	17.809	
2462	17.795	

802.11n_HT20M Ch1	
Freq.	99% BW
(MHz)	(MHz)
2412	17.798
2437	17.808
2462	17.785

802.11n_HT40M Ch0	
Freq.	99% BW
(MHz)	(MHz)
2422	36.226
2437	36.269
2452	36.209

802.11n_HT40M Ch1	
Freq.	99% BW
(MHz)	(MHz)
2422	36.214
2437	36.273
2452	36.187

*Refer to next page for plots

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



802.11b (Main)


6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid



6dB Band Width Test Data CH-High

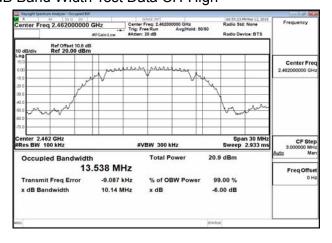


802.11g (Main)


6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid

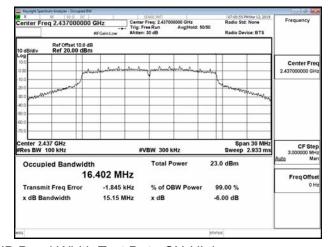

6dB Band Width Test Data CH-High

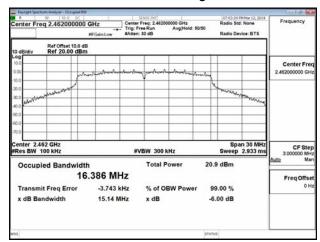


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) tested and such sample(s) tested and such sample(s) are retained for 90 days only. Pk 并另有规则,此根告结果僅對测试之樣品負責,同時此樣品僅保留90天。本根告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions of Se Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




802.11n 20M (Main)


6dB Band Width Test Data CH-Low

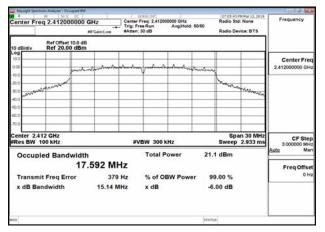

6dB Band Width Test Data CH-Mid

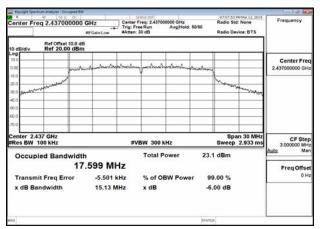


6dB Band Width Test Data CH-High

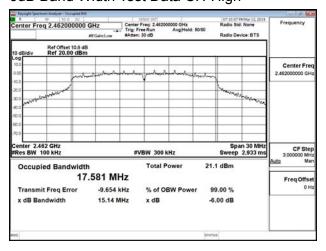


802.11n_40M (Main)


6dB Band Width Test Data CH-Low

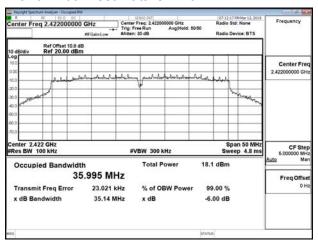

6dB Band Width Test Data CH-Mid

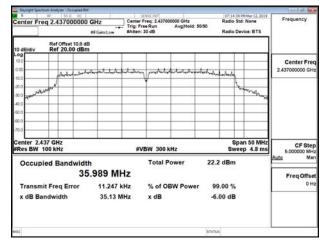

6dB Band Width Test Data CH-High

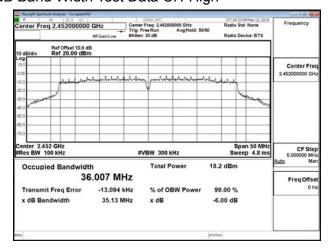

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) tested and such sample(s) tested and such sample(s) are retained for 90 days only. Pk 并另有规则,此根告结果僅對测试之樣品負責,同時此樣品僅保留90天。本根告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions of Se Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




802.11b (Aux)


6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid

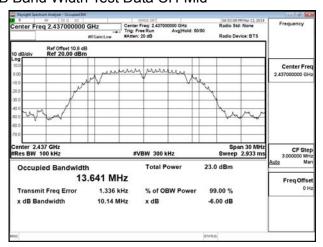

6dB Band Width Test Data CH-High

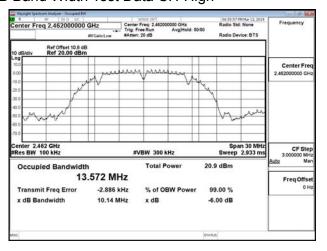


802.11g (Aux)


6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid

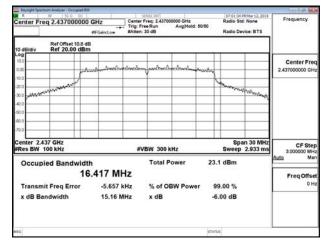


6dB Band Width Test Data CH-High

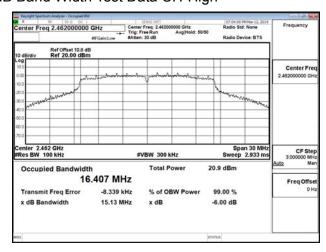

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) tested and such sample(s) tested and such sample(s) are retained for 90 days only. Pk 并另有规则,此根告结果僅對测试之樣品負責,同時此樣品僅保留90天。本根告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions for Electronic Documents at www.sgs.com/terms and conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions of Se Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






802.11n 20M (Aux)


6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid

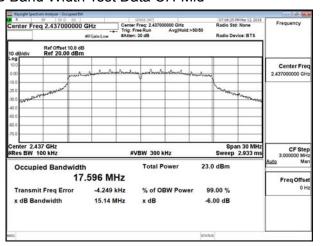


6dB Band Width Test Data CH-High

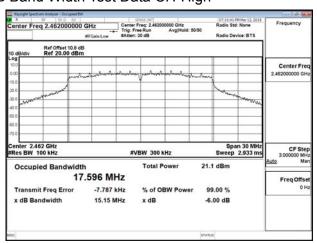


802.11n_40M (Aux) 6dB Band Width Test Data CH-Low



6dB Band Width Test Data CH-Mid

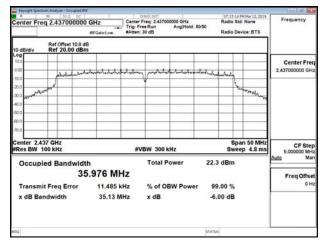

6dB Band Width Test Data CH-High

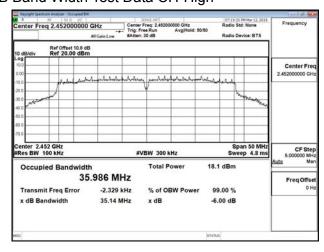

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




802.11b (Main)


99% Band Width Test Data CH-Low



99% Band Width Test Data CH-Mid

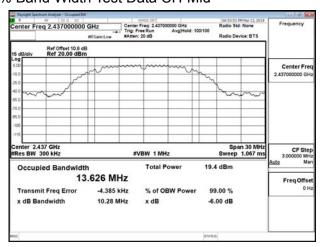

99% Band Width Test Data CH-High

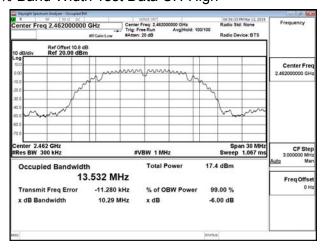


802.11g (Main)


99% Band Width Test Data CH-Low



99% Band Width Test Data CH-Mid

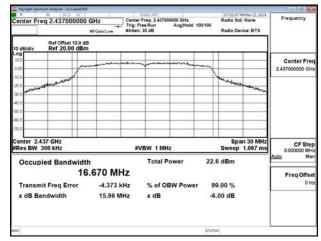

99% Band Width Test Data CH-High

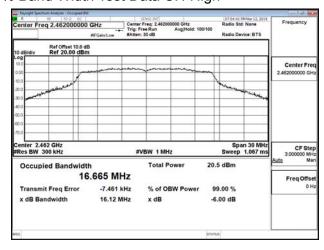


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



802.11n 20M (Main)


99% Band Width Test Data CH-Low

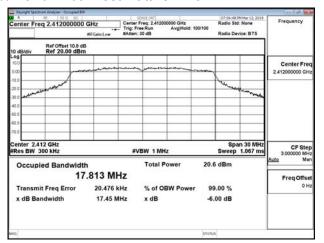

99% Band Width Test Data CH-Mid




99% Band Width Test Data CH-High

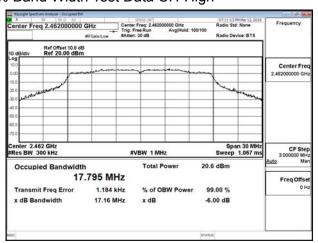


802.11n_40M (Main)


99% Band Width Test Data CH-Low

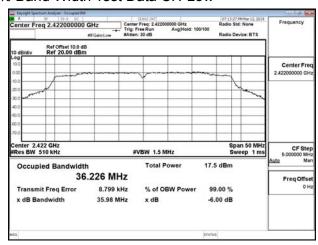

99% Band Width Test Data CH-Mid

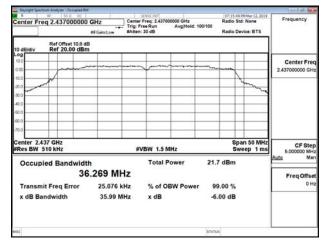

99% Band Width Test Data CH-High

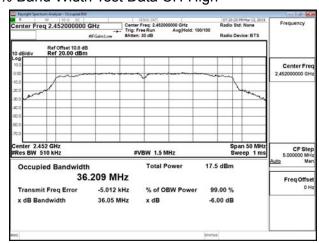


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




802.11b (Aux)


99% Band Width Test Data CH-Low

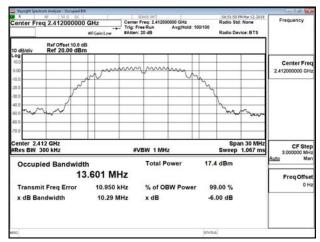

99% Band Width Test Data CH-Mid

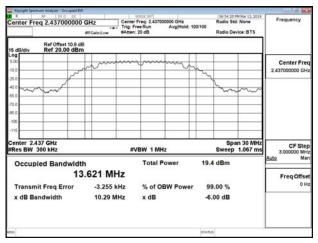


99% Band Width Test Data CH-High

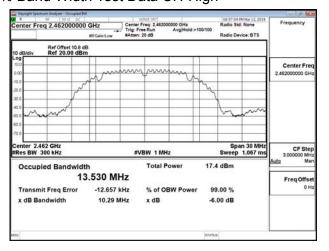


802.11g (Aux)


99% Band Width Test Data CH-Low

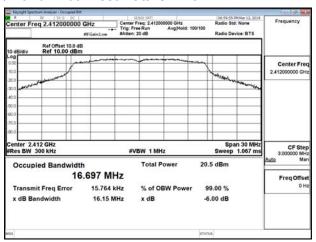

99% Band Width Test Data CH-Mid

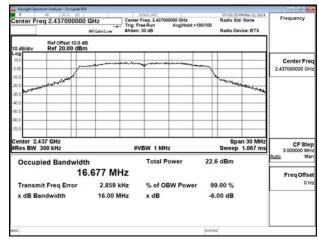

99% Band Width Test Data CH-High

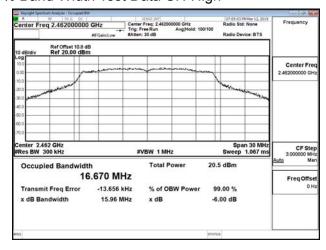


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




802.11n 20M (Aux)


99% Band Width Test Data CH-Low

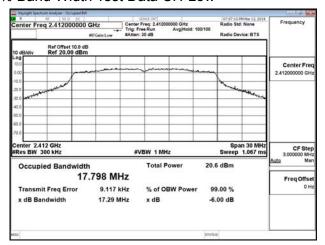

99% Band Width Test Data CH-Mid

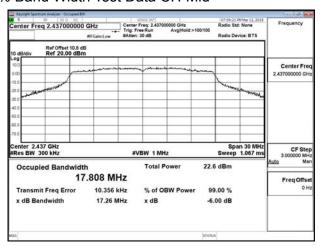


99% Band Width Test Data CH-High

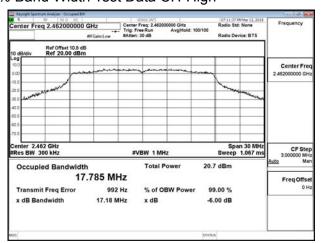


802.11n_40M (Aux)


99% Band Width Test Data CH-Low

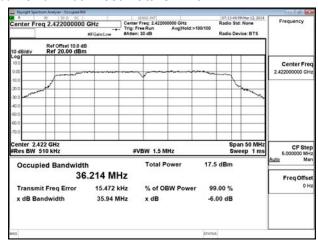

99% Band Width Test Data CH-Mid

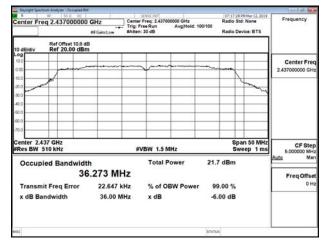

99% Band Width Test Data CH-High

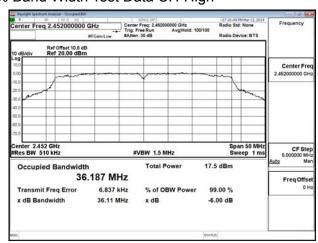

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable 10.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Measurement Equipment Used 10.2

Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Spectrum Analyzer	Agilent	N9010A	MY5144011 3	2018/06/20	2019/06/19			
Attenuator	Marvelous	MVE2213-10	RF31	2019/02/26	2020/02/25			
DC Block	PASTERNACK	PE8210	RF81	2019/02/26	2020/02/25			
Coaxial Cables	Woken	00100A1F1A 185C	RF229	2019/02/26	2020/02/25			

10.3 **Test SET-UP**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



10.4 Measurement Procedure

Conducted Band Edge Limt

- Set analyzer center frequency to DTS channel center frequency.
- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 100kHz & VBW = 300 kHz.
- Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9.Use the peak marker function to determine the maximum amplitude level.

Conducted Band Edge:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set start to edge frequency, and stop frequency of spectrum analyzer so as to encompass the spectrum to be examined.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Detector = Peak, Sweep = auto
- 6. Mark the highest reading of the emission as the reference level measurement.
- 7. Set DL as the limit = reading on marker 1 20dBm
- 8. Marker on frequency, 2.3999GHz and 2.4836GHz, and examine shall 100 kHz immediately outside the authorized (2400~2483.5) be attenuated by 20dB at least relative to the maximum emission of power.
- 9. Repeat above procedures until all default test channel (low, middle, and high) was complete.

Conducted Spurious Emission:

- To connect Antenna Port of EUT to Spectrum
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set RBW = 100 kHz & VBW= 300 kHz, Detector = Peak, Sweep = Auto.
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10.5 **Measurement Result**

Refere	nce Leve	l of Limit 802.11b mode	Reference Level of Limit 802.11g mode			
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit	
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)	
2412	4.36	-15.64	2412	3.62	-16.38	
2437	6.44	-13.56	2437	5.43	-14.57	
2462	4.36	-15.64	2462	3.54	-16.46	


Referen	ce Level	of Limit 802.11n20 mode	Referen	ce Level o	of Limit 802.11n40 MODE
Freq.	PSD	Reference Level of Limit	Freq.	PSD	Reference Level of Limit
(MHz)	(dBm)	(dBm)	(MHz)	(dBm)	(dBm)
2412	3.62	-16.38	2422	-2.16	-22.16
2437	5.84	-14.16	2437	1.75	-18.25
2462	3.85	-16.15	2452	-2.23	-22.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report teler only to the sample(s) lested and such carriangle(s) are retained for 90 days only.


Rep 37 就明,此報告結果僅對測試之樣品負責,同時止樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlocated to the full of efforted party to responsible the full of the full of the full on the full of the full o document is unlawful and offenders may be prosecuted to the fullest extent of the law.







802.11b Band Edge Limit Test Data CH-Low

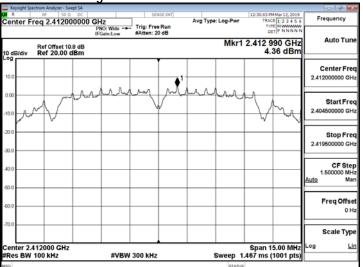




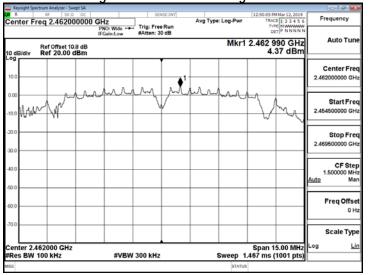

802.11g Band Edge Limit Test Data CH-Low

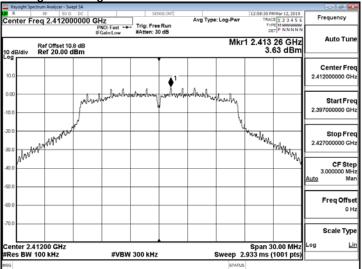


802.11g Band Edge Limit Test Data CH-High

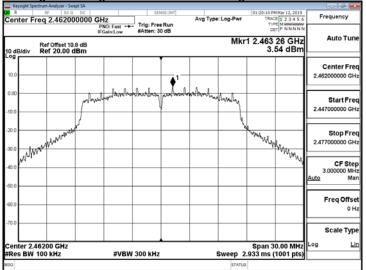

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for so days only.

Phys Apt 2 (1997) (Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders







802.11n_HT20 Band Edge Limit Test Data CH-Low

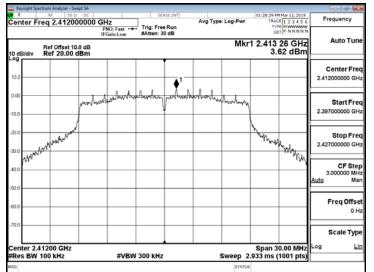


802.11n_HT20 Band Edge Limit Test Data CH-High

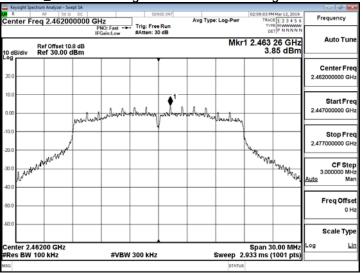

802.11n_HT40 Band Edge Limit Test Data CH-Low

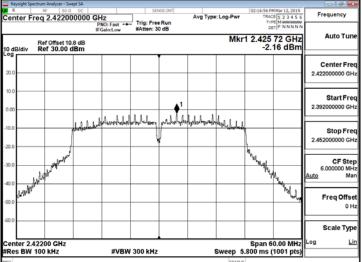


802.11n_HT40 Band Edge Limit Test Data CH-High

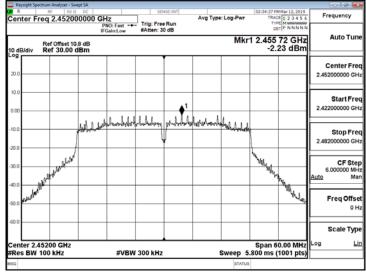

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report reter only to the sample(s) tested and such sample(s) are retained for so days only.


Phys Apt 2 (1997) (Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






802.11b

Band Edge Test Data CH-Low

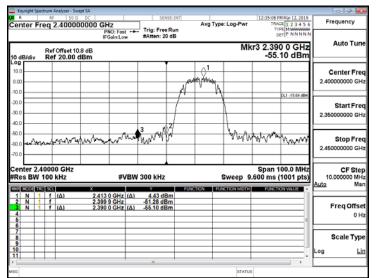


802.11g


Band Edge Test Data CH-Low

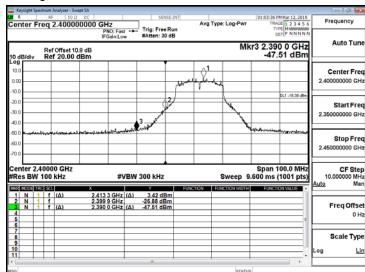

Band Edge Test Data CH-High

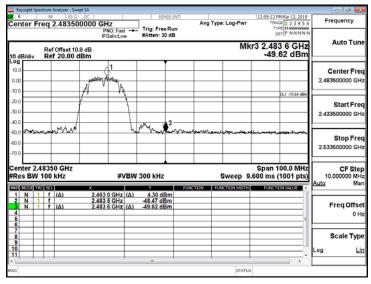

Band Edge Test Data CH-High

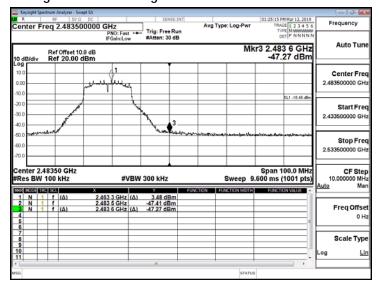

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report relearning to the sample(s) tested and such carriage of the state of 90 days only.

Ref. Pa f a tit whe state of the state prosecuted to the fullest extent of the law




802.11n_HT20

Band Edge Test Data CH-Low

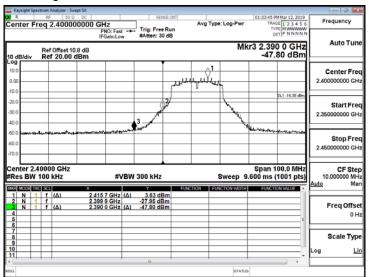


Band Edge Test Data CH-High

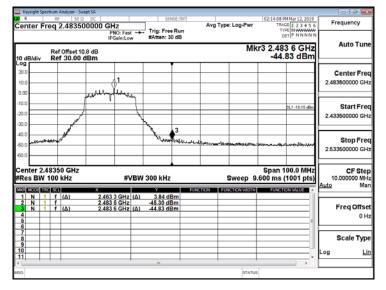


802.11n_HT40

Band Edge Test Data CH-Low

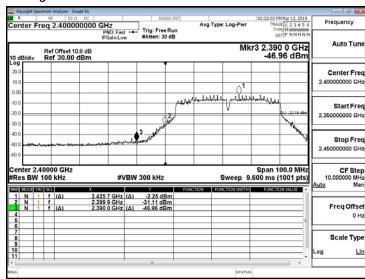

Band Edge Test Data CH-High

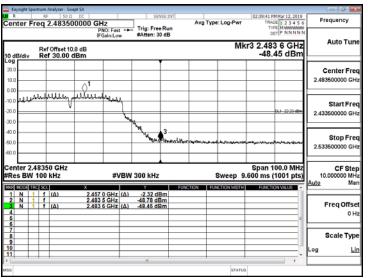


Member of the SGS Group (SGS SA)


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report relearning to the sample(s) tested and such carriage of the state of 90 days only.

Ref. Pa f a tit whe state of the state prosecuted to the fullest extent of the law









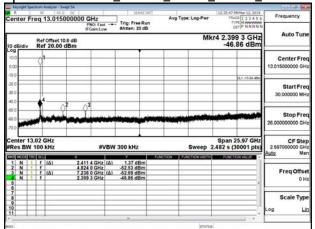


Spurious Emission_802.11b_20MHz_Chain0_2437MHz

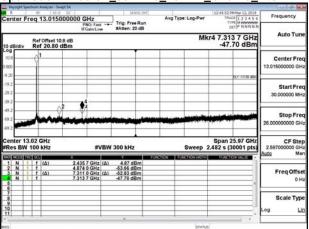


Spurious Emission_802.11b_20MHz_Chain0_2462MHz

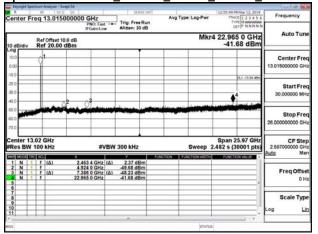


Spurious Emission_802.11g_20MHz_Chain0_2412MHz

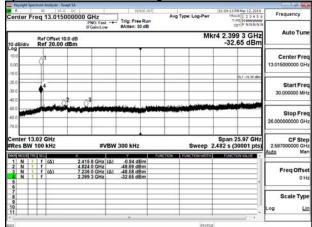


Spurious Emission_802.11g_20MHz_Chain0_2437MHz

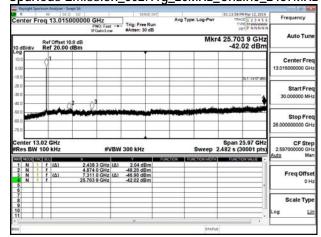


Spurious Emission_802.11g_20MHz_Chain0_2462MHz

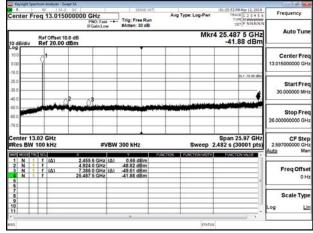


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.









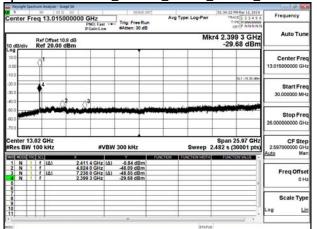


Spurious Emission_802.11n_20MHz_Chain0_2437MHz

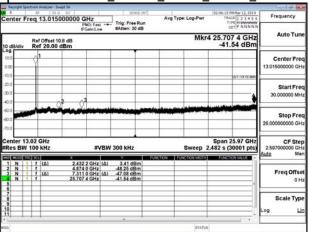


Spurious Emission 802.11n 20MHz Chain0 2462MHz

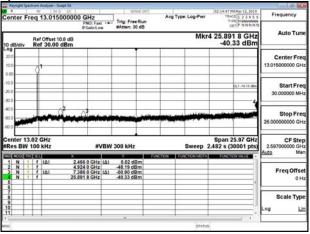


Spurious Emission_802.11n_40MHz_Chain0_2422MHz

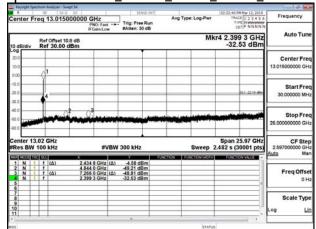

Spurious Emission_802.11n_40MHz_Chain0_2437MHz

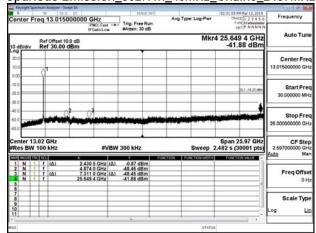

Spurious Emission_802.11n_40MHz_Chain0_2452MHz

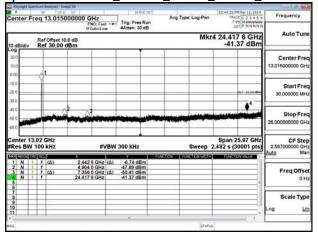

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable 11.1

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the RSS-Gen §8.10 Table 7.

And according to 15.33(a)(1) & RSS-Gen §6.13(a) for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.


According to RSS-Gen §8.9 Table 5 & 6 Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level (dB μ V/m) = 20 log Emission level (dB μ V/m)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only



11.2 Measurement Equipment Used:


966A Chamber							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.		
Band Reject Filters	MICRO TRONICS	BRM 50702	120	2019/02/26	2020/02/25		
Bilog Antenna	Sunol Sciences	JB3	A030105	2018/07/13	2019/07/12		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	2019/02/26	2020/02/25		
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	2019/02/26	2020/02/25		
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	2019/01/30	2020/01/29		
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	2018/08/20	2019/08/19		
Loop Ant	ETS.LINDGREN	6502	148045	2018/10/08	2019/10/07		
Pre-Amplifier	EMEC	EM330	060609	2019/02/26	2020/02/25		
Pre-Amplifier	HP	8449B	3008A00965	2019/02/26	2020/02/25		
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	2018/05/31	2019/05/30		
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R		
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R		
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R		
Software		e3 V6	.11-20180413				

NOTE: N.C.R refers to Not Calibrated Required.




11.3 Test SET-UP

(A) Radiated Emission Test Set-UP Frequency Below 30MHz.

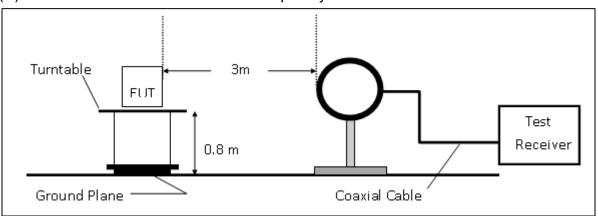


(B) Radiated Emission Test Set-Up, Frequency form 30MHz to 1000MHz

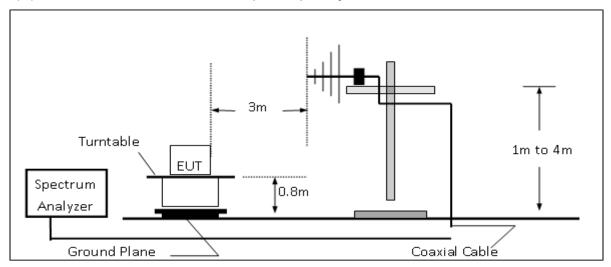

(C) Radiated Emission Test Set-UP Frequency Over 1 GHz Turntable 3m 1m to 4m **EUT** Spectrum 1.5m Analyzer Ground Plane Absorber Coaxial Cable

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





11.4 Measurement Procedure

- The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 6. Set the spectrum analyzer as RBW=120 kHz and VBW=300 kHz for Peak Detector (PK) and Quasi-peak (QP) at frequency below 1 GHz.
- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Peak Detector at frequency above 1 GHz.
- 8. Set the spectrum analyzer as RBW=1 MHz, VBW=10 Hz (Duty cycle > 98%) or VBW ≥ 1/T (Duty cycle < 98%) for Average Detector at frequency above 1 GHz.
- 9. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. On spectrum, change spectrum mode in linear display mode, and reduce VBW = 10Hz if average reading is measured.
- 12. Repeat above procedures until all default test channel measured were complete.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No.: T190305W03-RP1

Page 55 of 113

11.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	9	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dB μ V/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)


Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz 11.6

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) was not reported.

11.7 **Measurement Result**

Note: Refer to next page spectrum analyzer data chart and tabular data sheets.


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Band Edge Measurement Result (802.11b)

:802.11b **Operation Mode Test Date** :2019-03-07 :BE CH LOW :22/51 **Test Mode** Temp./Humi. **EUT Pol** :H Plan Antenna Pol. :VERTICAL **Test Channel** :2412 MHz :Jerry Engineer

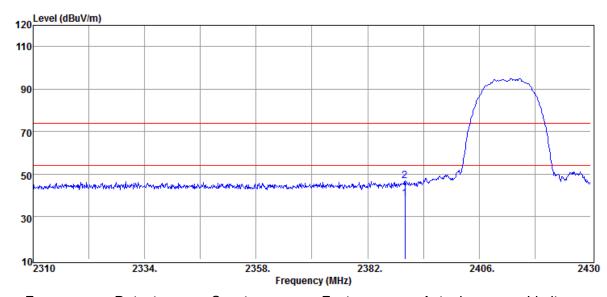

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2390.00	Average	41.74	-3.33	38.41	54.00	-15.59
2390.00	Peak	50.15	-3.33	46.82	74.00	-27.18

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11b **Operation Mode Test Date** :2019-03-08


Test Mode :BE CH LOW Temp./Humi. :22/51 **EUT Pol** :H Plan Antenna Pol. :HORIZONTAL

Test Channel :2412 MHz :Jerry Engineer

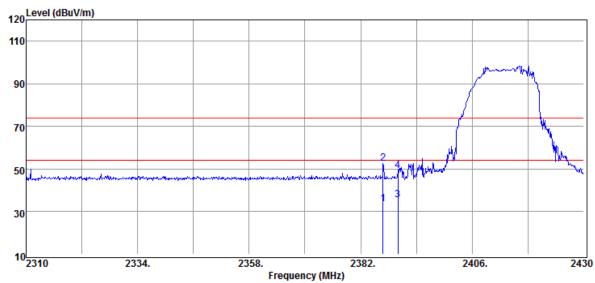

		· · · · · · ·	, ()				
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB	
2386.80	Average	37.11	-3.32	33.79	54.00	-20.21	
2386.80	Peak	55.81	-3.32	52.49	74.00	-21.51	
2390.00	Average	38.67	-3.33	35.34	54.00	-18.66	
2390.00	Peak	52.59	-3.33	49.26	74.00	-24.74	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11b **Operation Mode Test Mode** :BE CH HIGH **EUT Pol** :H Plan **Test Channel** :2462 MHz

Test Date :2019-03-07 Temp./Humi. :22/51 Antenna Pol. :VERTICAL :Jerry Engineer

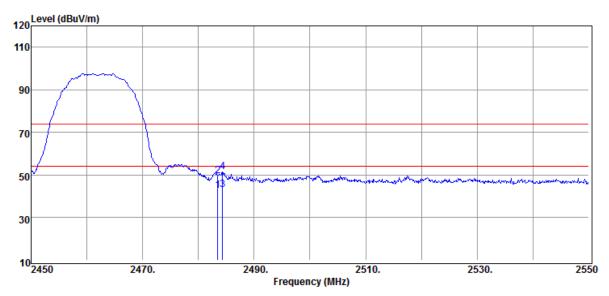

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	2483.50	Average	45.40	-2.72	42.68	54.00	-11.32
	2483.50	Peak	52.23	-2.72	49.51	74.00	-24.49
	2484.30	Average	45.70	-2.71	42.99	54.00	-11.01
	2484.30	Peak	54.34	-2.71	51.63	74.00	-22.37
	2483.50 2484.30	Peak Average	52.23 45.70	-2.72 -2.71	49.51 42.99	74.00 54.00	-24.49 -11.01

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11b **Operation Mode Test Mode** :BE CH HIGH

EUT Pol :H Plan **Test Channel** :2462 MHz **Test Date** :2019-03-07 Temp./Humi. :22/51


Antenna Pol. :HORIZONTAL

:Jerry Engineer

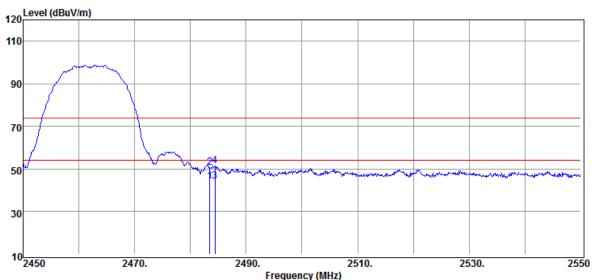

			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB	
2483.50	Average	46.83	-2.72	44.11	54.00	-9.89	
2483.50	Peak	53.27	-2.72	50.55	74.00	-23.45	
2484.40	Average	46.82	-2.71	44.11	54.00	-9.89	
2484.40	Peak	54.35	-2.71	51.64	74.00	-22.36	


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Band Edge Measurement Result (802.11g)

:802.11g **Operation Mode Test Date** :2019-03-07 :BE CH LOW **Test Mode** :21/52 Temp./Humi. **EUT Pol** :H Plan Antenna Pol. :VERTICAL **Test Channel** :2412 MHz Engineer :Jerry

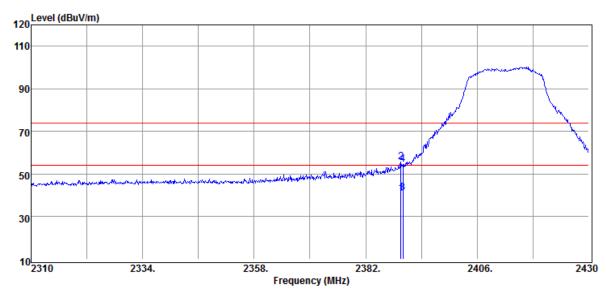

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2389.56	Average	44.32	-3.33	40.99	54.00	-13.01
2389.56	Peak	58.95	-3.33	55.62	74.00	-18.38
2390.00	Average	44.65	-3.33	41.32	54.00	-12.68
2390.00	Peak	57.79	-3.33	54.46	74.00	-19.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g **Operation Mode Test Date** :2019-03-07 :BE CH LOW **Test Mode** Temp./Humi. :21/52


EUT Pol :H Plan Antenna Pol. :HORIZONTAL

Test Channel :2412 MHz :Jerry Engineer

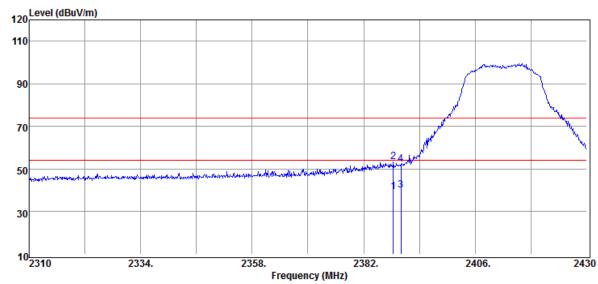

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2388.36	Average	42.69	-3.33	39.36	54.00	-14.64
2388.36	Peak	56.59	-3.33	53.26	74.00	-20.74
2390.00	Average	43.36	-3.33	40.03	54.00	-13.97
2390.00	Peak	55.69	-3.33	52.36	74.00	-21.64


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g **Operation Mode** :BE CH HIGH **Test Mode EUT Pol** :H Plan :2462 MHz **Test Channel**

Test Date :2019-03-07 Temp./Humi. :21/53 Antenna Pol. :VERTICAL :Jerry Engineer

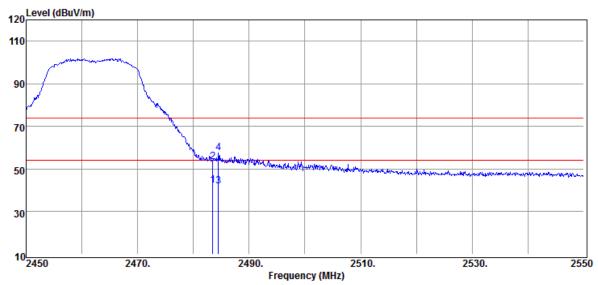

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	45.16	-2.72	42.44	54.00	-11.56
2483.50	Peak	56.00	-2.72	53.28	74.00	-20.72
2484.50	Average	44.74	-2.70	42.04	54.00	-11.96
2484.50	Peak	60.09	-2.70	57.39	74.00	-16.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g **Operation Mode** :BE CH HIGH **Test Mode**

EUT Pol :H Plan :2462 MHz **Test Channel**

Test Date :2019-03-07 Temp./Humi. :21/53


Antenna Pol. :HORIZONTAL

:Jerry Engineer

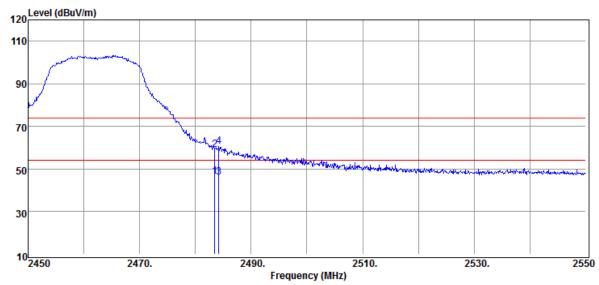

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	49.20	-2.72	46.48	54.00	-7.52
2483.50	Peak	61.71	-2.72	58.99	74.00	-15.01
2484.20	Average	48.83	-2.71	46.12	54.00	-7.88
2484.20	Peak	63.29	-2.71	60.58	74.00	-13.42


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Band Edge Measurement Result (802.11n20)

:802.11n20 **Operation Mode Test Date** :2019-03-07 :BE CH LOW **Test Mode** :21/52 Temp./Humi. **EUT Pol** :H Plan Antenna Pol. :VERTICAL **Test Channel** :2412 MHz :Jerry Engineer

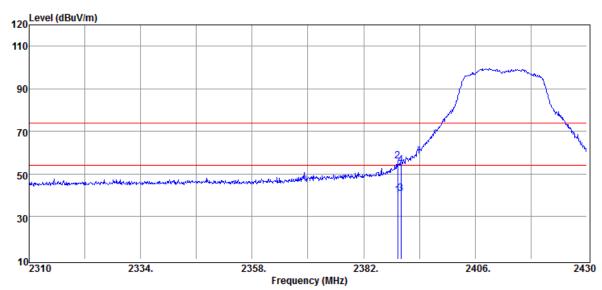

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2389.32	Average	43.57	-3.33	40.24	54.00	-13.76
2389.32	Peak	59.39	-3.33	56.06	74.00	-17.94
2390.00	Average	43.99	-3.33	40.66	54.00	-13.34
2390.00	Peak	57.31	-3.33	53.98	74.00	-20.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n20 **Operation Mode Test Date** :2019-03-07 **Test Mode** :BE CH LOW Temp./Humi. :21/52


EUT Pol :H Plan Antenna Pol. :HORIZONTAL

Test Channel :2412 MHz :Jerry Engineer

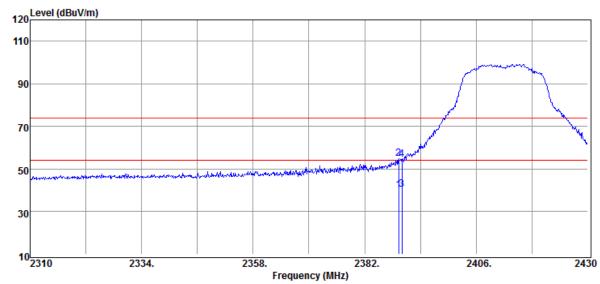

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2389.32	Average	43.41	-3.33	40.08	54.00	-13.92
2389.32	Peak	58.18	-3.33	54.85	74.00	-19.15
2390.00	Average	43.74	-3.33	40.41	54.00	-13.59
2390.00	Peak	57.83	-3.33	54.50	74.00	-19.50


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n20 **Operation Mode Test Mode** :BE CH HIGH **EUT Pol** :H Plan **Test Channel** :2462 MHz

Test Date :2019-03-07 Temp./Humi. :21/53 Antenna Pol. :VERTICAL :Jerry Engineer

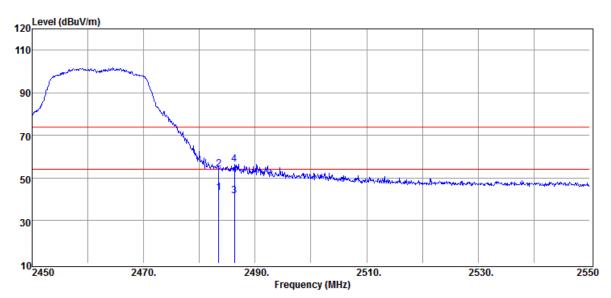

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBµV/m	dB
2483.50	Average	45.67	-2.72	42.95	54.00	-11.05
2483.50	Peak	56.83	-2.72	54.11	74.00	-19.89
2486.30	Average	44.27	-2.69	41.58	54.00	-12.42
2486.30	Peak	59.29	-2.69	56.60	74.00	-17.40

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n20 **Operation Mode Test Mode** :BE CH HIGH

EUT Pol :H Plan **Test Channel** :2462 MHz **Test Date** :2019-03-12 Temp./Humi. :21/53


Antenna Pol. :HORIZONTAL

:Jerry Engineer

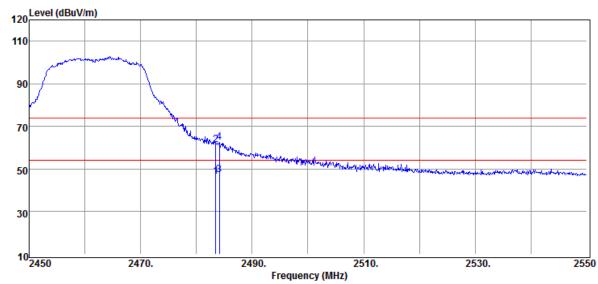

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dBμV/m	dB
2483.50	Average	49.21	-2.72	46.49	54.00	-7.51
2483.50	Peak	64.01	-2.72	61.29	74.00	-12.71
2484.10	Average	50.02	-2.71	47.31	54.00	-6.69
2484.10	Peak	65.25	-2.71	62.54	74.00	-11.46


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Band Edge Measurement Result (802.11n40)

:802.11n40 **Operation Mode Test Date** :2019-03-07 :BE CH LOW **Test Mode** :21/52 Temp./Humi. **EUT Pol** :H Plan Antenna Pol. :VERTICAL :2422 MHz **Test Channel** :Jerry Engineer

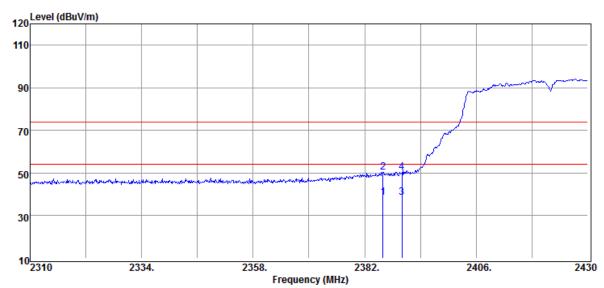

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2385.96	Average	41.89	-3.33	38.56	54.00	-15.44
2385.96	Peak	53.76	-3.33	50.43	74.00	-23.57
2390.00	Average	42.02	-3.33	38.69	54.00	-15.31
2390.00	Peak	53.54	-3.33	50.21	74.00	-23.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 **Operation Mode Test Date** :2019-03-07 **Test Mode** :BE CH LOW Temp./Humi. :21/52


EUT Pol :H Plan Antenna Pol. :HORIZONTAL

Test Channel :2422 MHz :Jerry Engineer

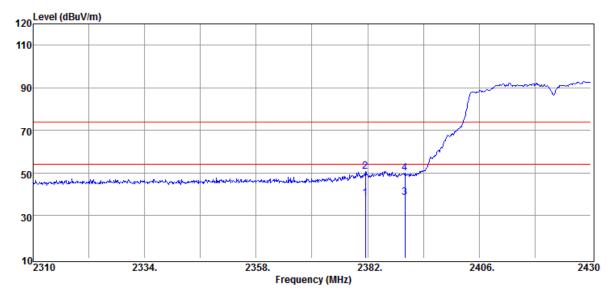

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
2381.52	Average	41.52	-3.32	38.20	54.00	-15.80
2381.52	Peak	54.06	-3.32	50.74	74.00	-23.26
2390.00	Average	41.75	-3.33	38.42	54.00	-15.58
2390.00	Peak	53.33	-3.33	50.00	74.00	-24.00


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 **Operation Mode Test Mode** :BE CH HIGH **EUT Pol** :H Plan **Test Channel** :2452 MHz

Test Date :2019-03-07 Temp./Humi. :21/53 Antenna Pol. :VERTICAL :Jerry Engineer

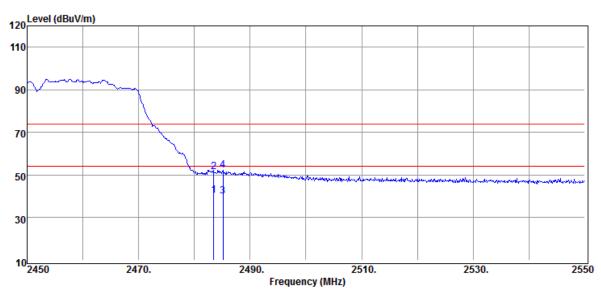

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	43.28	-2.72	40.56	54.00	-13.44
2483.50	Peak	54.05	-2.72	51.33	74.00	-22.67
2485.10	Average	42.90	-2.70	40.20	54.00	-13.80
2485.10	Peak	55.08	-2.70	52.38	74.00	-21.62

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 **Operation Mode Test Date** :2019-03-07


Test Mode :BE CH HIGH Temp./Humi. :21/53 **EUT Pol** :H Plan Antenna Pol. :HORIZONTAL

Test Channel :2452 MHz :Jerry Engineer

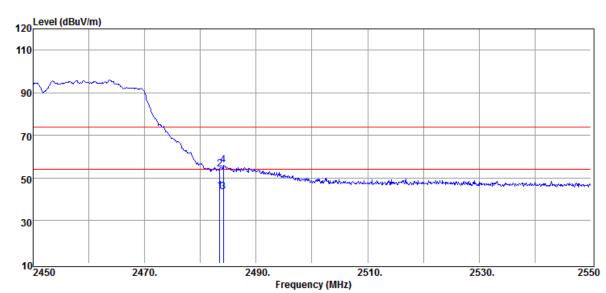

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.50	Average	46.47	-2.72	43.75	54.00	-10.25
2483.50	Peak	56.73	-2.72	54.01	74.00	-19.99
2484.10	Average	46.39	-2.71	43.68	54.00	-10.32
2484.10	Peak	58.59	-2.71	55.88	74.00	-18.12

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Below 1GHz Worst-Case Data:

Radiated Spurious Emission Measurement Result (802.11g)


:802.11g **Operation Mode** Test Date :2019-03-12

:TX CH LOW :22/56 Test Mode Temp./Humi. :H Plan **EUT Pol** Antenna Pol. :VERTICAL :2412 MHz :Jerry **Test Channel** Engineer

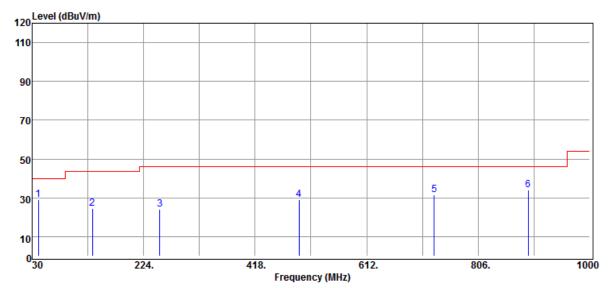

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
40.67	Peak	38.36	-9.47	28.89	40.00	-11.11
134.76	Peak	33.39	-8.73	24.66	43.50	-18.84
252.13	Peak	33.78	-9.75	24.03	46.00	-21.97
494.63	Peak	31.23	-2.12	29.11	46.00	-16.89
729.37	Peak	30.14	1.51	31.65	46.00	-14.35
893.30	Peak	29.43	4.64	34.07	46.00	-11.93

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g **Operation Mode Test Date** :2019-03-12 :TX CH LOW **Test Mode** Temp./Humi. :22/55


EUT Pol :H Plan Antenna Pol. :HORIZONTAL

Test Channel :2412 MHz :Jerry Engineer

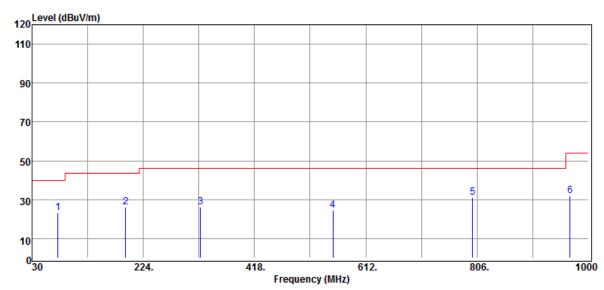

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
75.59	Peak	37.60	-14.31	23.29	40.00	-16.71
192.96	Peak	36.06	-9.82	26.24	43.50	-17.26
323.91	Peak	32.90	-6.59	26.31	46.00	-19.69
554.77	Peak	26.09	-1.47	24.62	46.00	-21.38
798.24	Peak	28.28	2.81	31.09	46.00	-14.91
967.99	Peak	25.65	6.46	32.11	54.00	-21.89


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g **Operation Mode** :TX CH MID **Test Mode EUT Pol** :H Plan :2437 MHz **Test Channel**

Test Date :2019-03-12 Temp./Humi. :21/54 Antenna Pol. :VERTICAL :Jerry Engineer

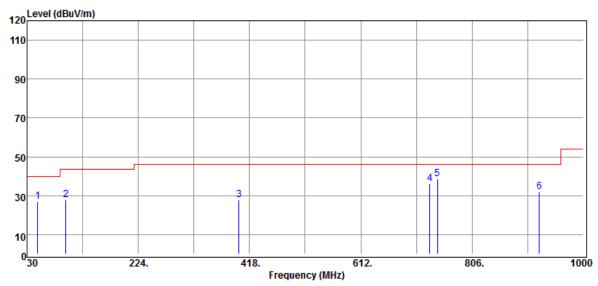

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
IVII IZ	I IVQI /AV	αυμν	ub_	αυμν/π	αυμν/π	ub_
48.43	Peak	40.88	-13.97	26.91	40.00	-13.09
97.90	Peak	40.50	-12.68	27.82	43.50	-15.68
399.57	Peak	32.57	-4.67	27.90	46.00	-18.10
732.28	Peak	34.49	1.63	36.12	46.00	-9.88
745.86	Peak	36.13	2.32	38.45	46.00	-7.55
923.37	Peak	27.22	4.94	32.16	46.00	-13.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g **Operation Mode Test Date** :2019-03-12


:TX CH MID **Test Mode** Temp./Humi. :21/54 **EUT Pol** :H Plan Antenna Pol. :HORIZONTAL

:2437 MHz **Test Channel** :Jerry Engineer

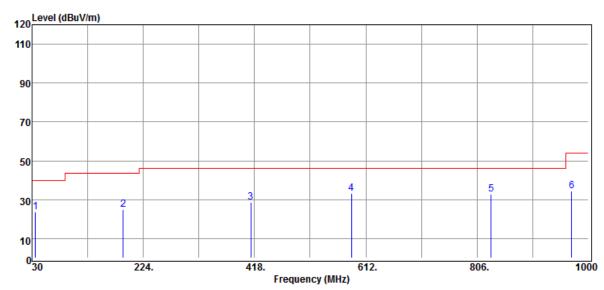

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBuV	Factor dB	Actual FS dBµV/m	Limit @3m dBµV/m	Margin dB
IVII IZ	FIVQFIAV	αυμν	uБ	αυμν/π	αυμν/π	UD UD
35.82	Peak	-8.87	32.54	23.67	40.00	-16.33
189.08	Peak	34.95	-10.24	24.71	43.50	-18.79
411.21	Peak	33.09	-4.45	28.64	46.00	-17.36
586.78	Peak	34.53	-1.38	33.15	46.00	-12.85
830.25	Peak	28.40	4.32	32.72	46.00	-13.28
970.90	Peak	27.81	6.65	34.46	54.00	-19.54


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g **Operation Mode Test Date** :2019-03-12 :TX CH HIGH **Test Mode** Temp./Humi. :21/55

EUT Pol :H Plan Antenna Pol. :VERTICAL :2462 MHz **Test Channel** :Jerry Engineer

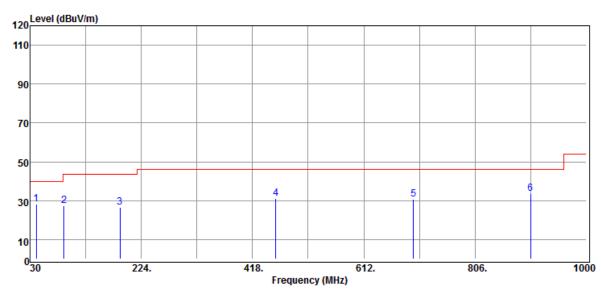

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
40.67	Peak	37.74	-9.47	28.27	40.00	-11.73
89.17	Peak	42.25	-14.90	27.35	43.50	-16.15
187.14	Peak	36.96	-10.37	26.59	43.50	-16.91
458.74	Peak	33.84	-2.79	31.05	46.00	-14.95
698.33	Peak	29.88	0.96	30.84	46.00	-15.16
903.00	Peak	28.79	4.83	33.62	46.00	-12.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11g **Operation Mode Test Date** :2019-03-12 :TX CH HIGH **Test Mode** Temp./Humi. :21/55


EUT Pol :H Plan Antenna Pol. :HORIZONTAL

:2462 MHz **Test Channel** :Jerry Engineer

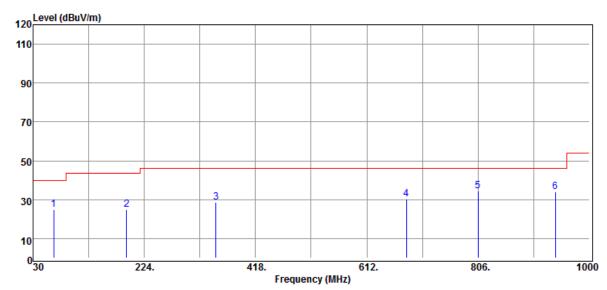

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
65.89	Peak	39.51	-14.78	24.73	40.00	-15.27
192.96	Peak	34.61	-9.82	24.79	43.50	-18.71
349.13	Peak	34.78	-6.22	28.56	46.00	-17.44
680.87	Peak	29.53	0.88	30.41	46.00	-15.59
806.00	Peak	31.26	3.20	34.46	46.00	-11.54
940.83	Peak	29.13	5.10	34.23	46.00	-11.77

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:VERTICAL



EUT Pol

Radiated Spurious Emission Measurement Result (802.11n_HT40)


:H Plan

:802.11n40 **Operation Mode Test Date** :2019-03-12

Antenna Pol.

:TX CH LOW Temp./Humi. **Test Mode** :21/54


:2422 MHz **Test Channel** :Jerry Engineer

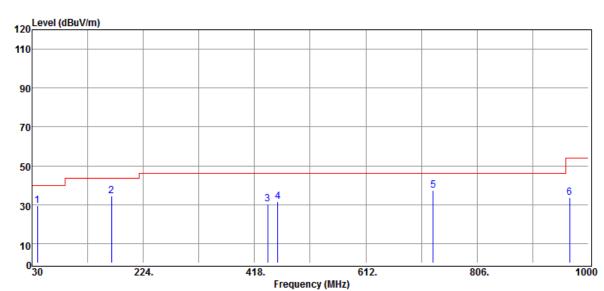

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB	
39.70	Peak	38.25	-8.62	29.63	40.00	-10.37	
168.71	Peak	44.31	-9.98	34.33	43.50	-9.17	
441.28	Peak	33.71	-3.29	30.42	46.00	-15.58	
458.74	Peak	34.38	-2.79	31.59	46.00	-14.41	
729.37	Peak	35.95	1.51	37.46	46.00	-8.54	
967.02	Peak	27.47	6.36	33.83	54.00	-20.17	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






:802.11n40 **Operation Mode Test Date** :2019-03-12


Test Mode :TX CH LOW Temp./Humi. :21/54 **EUT Pol** :H Plan Antenna Pol. :HORIZONTAL

:2422 MHz **Test Channel** :Jerry Engineer

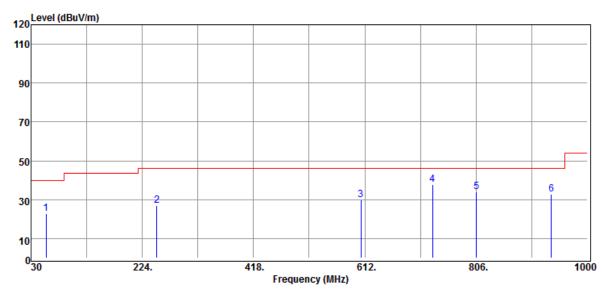

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
56.19	Peak	38.13	-15.38	22.75	40.00	-17.25
249.22	Peak	36.87	-9.80	27.07	46.00	-18.93
605.21	Peak	30.56	-0.47	30.09	46.00	-15.91
730.34	Peak	36.45	1.53	37.98	46.00	-8.02
806.97	Peak	30.73	3.24	33.97	46.00	-12.03
936.95	Peak	27.87	5.06	32.93	46.00	-13.07


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 **Operation Mode Test Date** :2019-03-12 **Test Mode** :TX CH MID Temp./Humi. :22/54

EUT Pol :H Plan Antenna Pol. :VERTICAL :2437 MHz **Test Channel** :Jerry Engineer

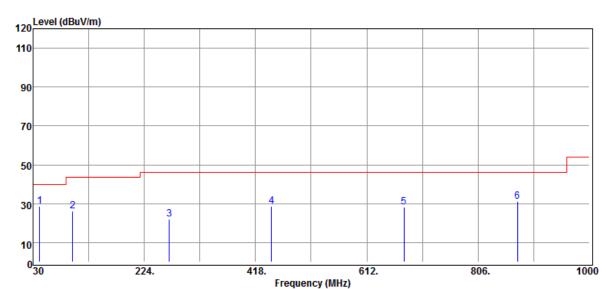

	· ····								
Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin			
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB			
41.64	Peak	38.64	-10.03	28.61	40.00	-11.39			
98.87	Peak	38.63	-12.48	26.15	43.50	-17.35			
267.65	Peak	30.20	-8.01	22.19	46.00	-23.81			
446.13	Peak	31.88	-3.15	28.73	46.00	-17.27			
676.99	Peak	27.15	0.93	28.08	46.00	-17.92			
874.87	Peak	27.04	4.04	31.08	46.00	-14.92			

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 **Operation Mode Test Date** :2019-03-12 **Test Mode** :TX CH MID Temp./Humi. :22/55


EUT Pol :H Plan Antenna Pol. :HORIZONTAL

:2437 MHz **Test Channel** :Jerry Engineer

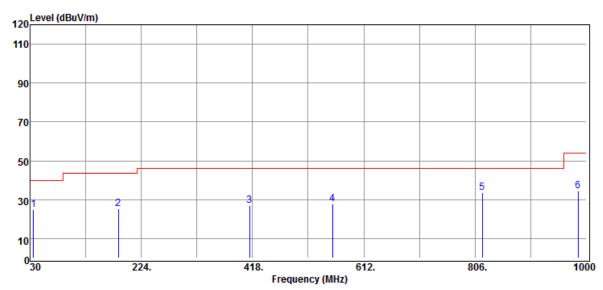

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
35.82	Peak	-7.80	32.54	24.74	40.00	-15.26
184.23	Peak	36.06	-10.59	25.47	43.50	-18.03
413.15	Peak	31.41	-4.38	27.03	46.00	-18.97
557.68	Peak	29.24	-1.50	27.74	46.00	-18.26
818.61	Peak	29.80	3.87	33.67	46.00	-12.33
985.45	Peak	27.83	6.44	34.27	54.00	-19.73


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 **Operation Mode Test Date** :2019-03-12 **Test Mode** :TX CH HIGH Temp./Humi. :21/54

EUT Pol :H Plan Antenna Pol. :VERTICAL **Test Channel** :2452 MHz :Jerry Engineer

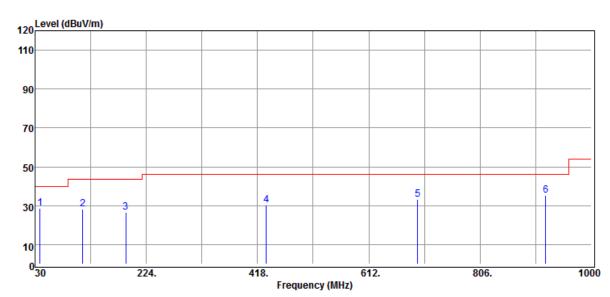

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
						_
38.73	Peak	36.48	-7.88	28.60	40.00	-11.40
113.42	Peak	37.24	-8.98	28.26	43.50	-15.24
188.11	Peak	36.81	-10.35	26.46	43.50	-17.04
433.52	Peak	33.89	-3.72	30.17	46.00	-15.83
697.36	Peak	32.40	0.99	33.39	46.00	-12.61
920.46	Peak	30.27	4.92	35.19	46.00	-10.81

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






:802.11n40 **Operation Mode Test Date** :2019-03-12 **Test Mode** :TX CH HIGH Temp./Humi. :22/56


EUT Pol :H Plan Antenna Pol. :HORIZONTAL

Test Channel :2452 MHz :Jerry Engineer

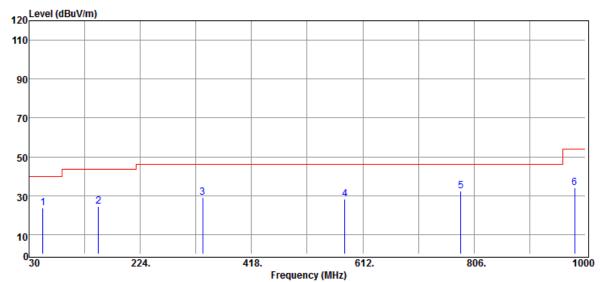

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
54.25	Peak	38.80	-15.33	23.47	40.00	-16.53
151.25	Peak	34.02	-9.37	24.65	43.50	-18.85
332.64	Peak	35.63	-6.40	29.23	46.00	-16.77
580.96	Peak	29.75	-1.49	28.26	46.00	-17.74
782.72	Peak	29.85	2.59	32.44	46.00	-13.56
981.57	Peak	27.54	6.57	34.11	54.00	-19.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:VERTICAL



Above 1GHz Data:

EUT Pol

Radiated Spurious Emission Measurement Result (802.11 b)


:H Plan

:802.11b Test Date Operation Mode :2019-03-08

Antenna Pol.

Test Mode :TX CH LOW Temp./Humi. :21/54


Test Channel :2412 MHz Engineer :Jerry

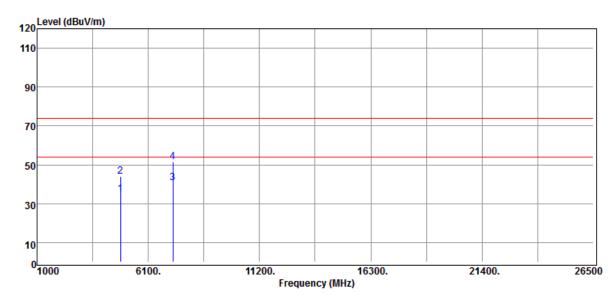

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4824.00	Average	31.80	3.02	34.82	54.00	-19.18
4824.00	Peak	40.92	3.02	43.94	74.00	-30.06
7236.00	Average	29.49	11.14	40.63	54.00	-13.37
7236.00	Peak	40.36	11.14	51.50	74.00	-22.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Operation Mode :802.11b **Test Date** :2019-03-08 Test Mode :TX CH LOW Temp./Humi. :21/54


EUT Pol Antenna Pol. :H Plan :HORIZONTAL

Test Channel :2412 MHz Engineer :Jerry

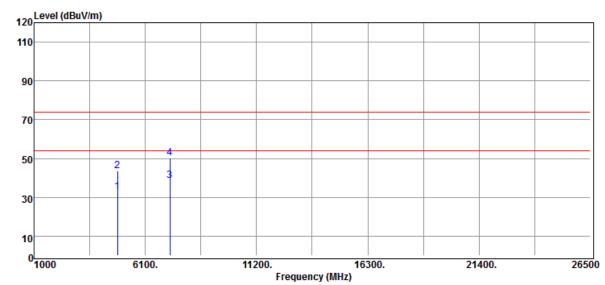

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4824.00	Average	29.75	3.02	32.77	54.00	-21.23
4824.00	Peak	40.49	3.02	43.51	74.00	-30.49
7236.00	Average	27.50	11.14	38.64	54.00	-15.36
7236.00	Peak	39.05	11.14	50.19	74.00	-23.81


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11b Test Mode :TX CH MID **EUT Pol** :H Plan **Test Channel** :2437 MHz

Test Date :2019-03-08 Temp./Humi. :21/53 Antenna Pol. :VERTICAL Engineer :Jerry

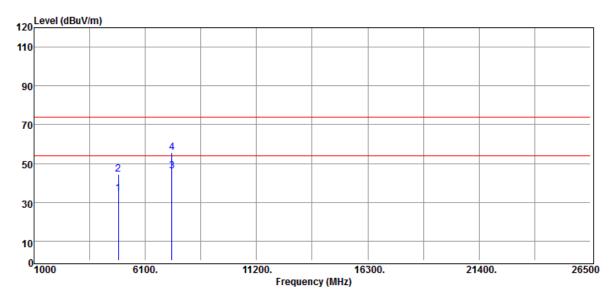

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dΒμV/m	dB
4874.00	Average	31.01	3.36	34.37	54.00	-19.63
4874.00	Peak	41.11	3.36	44.47	74.00	-29.53
7311.00	Average	35.62	10.66	46.28	54.00	-7.72
7311.00	Peak	44.98	10.66	55.64	74.00	-18.36

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11b Test Mode :TX CH MID **EUT Pol**

:H Plan **Test Channel** :2437 MHz **Test Date** :2019-03-08 Temp./Humi. :21/53


Antenna Pol. :HORIZONTAL

Engineer :Jerry

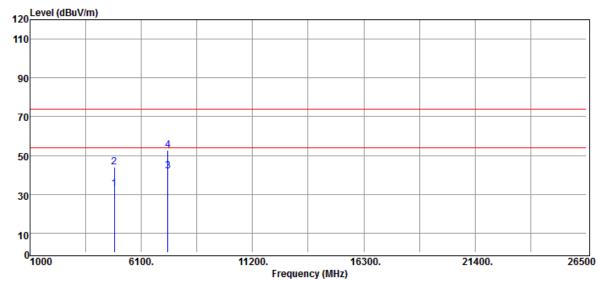


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4874.00	Average	29.58	3.36	32.94	54.00	-21.06
4874.00	Peak	40.76	3.36	44.12	74.00	-29.88
7311.00	Average	31.28	10.66	41.94	54.00	-12.06
7311.00	Peak	42.20	10.66	52.86	74.00	-21.14

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11b **Test Date** :2019-03-08 Test Mode :TX CH HIGH Temp./Humi. :21/52 **EUT Pol** Antenna Pol. :VERTICAL :H Plan **Test Channel** :2462 MHz Engineer :Jerry

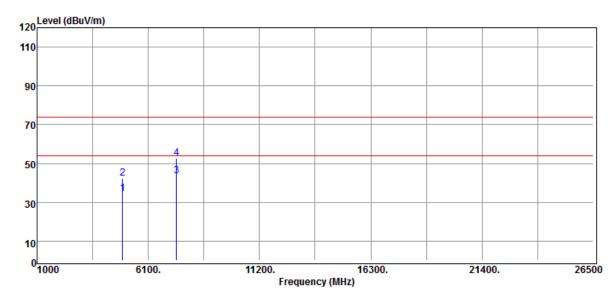

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4924.00	Average	30.49	3.93	34.42	54.00	-19.58
4924.00	Peak	38.60	3.93	42.53	74.00	-31.47
7386.00	Average	32.48	11.16	43.64	54.00	-10.36
7386.00	Peak	41.62	11.16	52.78	74.00	-21.22

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11b Test Mode :TX CH HIGH

EUT Pol :H Plan **Test Channel** :2462 MHz **Test Date** :2019-03-08 Temp./Humi. :21/52


Antenna Pol. :HORIZONTAL

Engineer :Jerry

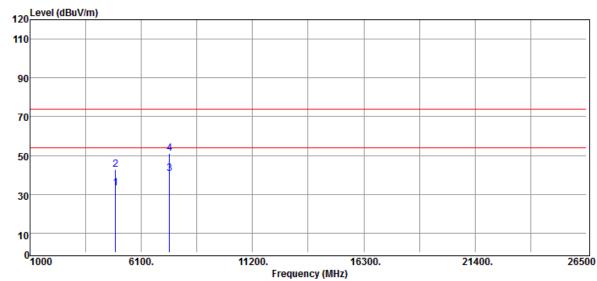

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4924.00	Average	29.49	3.93	33.42	54.00	-20.58
4924.00	Peak	38.82	3.93	42.75	74.00	-31.25
7386.00	Average	29.48	11.16	40.64	54.00	-13.36
7386.00	Peak	39.95	11.16	51.11	74.00	-22.89


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Radiated Spurious Emission Measurement Result (802.11 g)


Operation Mode :802.11g **Test Date** :2019-03-08 :TX CH LOW Test Mode Temp./Humi. :21/53 **EUT Pol** :H Plan Antenna Pol. :VERTICAL **Test Channel** :2412 MHz Engineer :Jerry

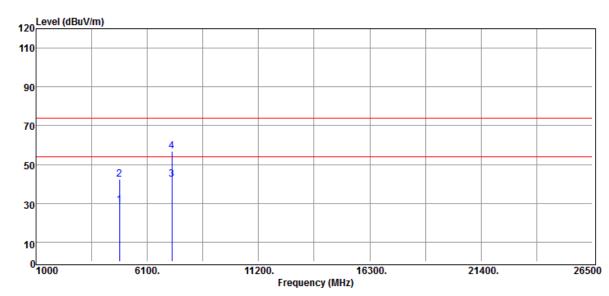

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4824.00	Average	25.98	3.02	29.00	54.00	-25.00
4824.00	Peak	39.22	3.02	42.24	74.00	-31.76
7236.00	Average	31.22	11.14	42.36	54.00	-11.64
7236.00	Peak	45.60	11.14	56.74	74.00	-17.26

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.






Operation Mode :802.11g Test Mode :TX CH LOW **EUT Pol** :H Plan **Test Channel** :2412 MHz

Test Date :2019-03-08 Temp./Humi. :21/53 Antenna Pol. :HORIZONTAL Engineer :Jerry

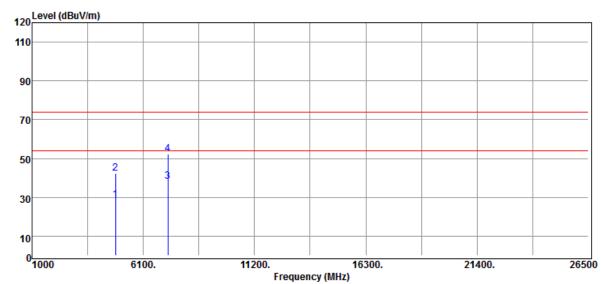

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4824.00	Average	25.79	3.02	28.81	54.00	-25.19
4824.00	Peak	39.45	3.02	42.47	74.00	-31.53
7236.00	Average	27.03	11.14	38.17	54.00	-15.83
7236.00	Peak	41.13	11.14	52.27	74.00	-21.73


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11g Test Mode :TX CH MID **EUT Pol** :H Plan **Test Channel** :2437 MHz

Test Date :2019-03-08 Temp./Humi. :21/53 Antenna Pol. :VERTICAL Engineer :Jerry

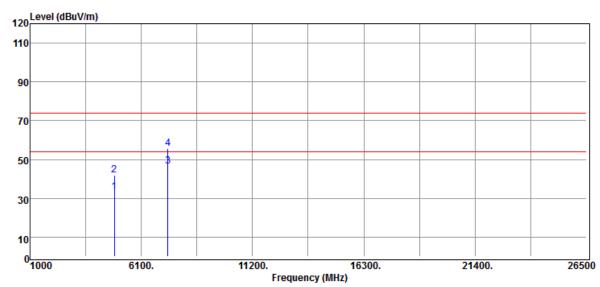

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
4874.00	Average	29.75	3.36	33.11	54.00	-20.89
4874.00	Peak	38.53	3.36	41.89	74.00	-32.11
7311.00	Average	36.03	10.66	46.69	54.00	-7.31
7311.00	Peak	45.02	10.66	55.68	74.00	-18.32


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11g Test Mode :TX CH MID **EUT Pol** :H Plan **Test Channel** :2437 MHz

Test Date :2019-03-08 Temp./Humi. :21/53 Antenna Pol. :HORIZONTAL Engineer :Jerry

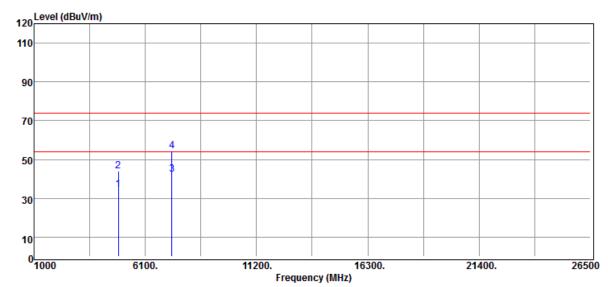

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4874.00	Average	31.19	3.36	34.55	54.00	-19.45
4874.00	Peak	40.81	3.36	44.17	74.00	-29.83
7311.00	Average	31.69	10.66	42.35	54.00	-11.65
7311.00	Peak	43.78	10.66	54.44	74.00	-19.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:2019-03-08


:VERTICAL

:21/54

:Jerry




Operation Mode Test Date :802.11g Test Mode :TX CH HIGH Temp./Humi. **EUT Pol** Antenna Pol. :H Plan **Test Channel** :2462 MHz Engineer

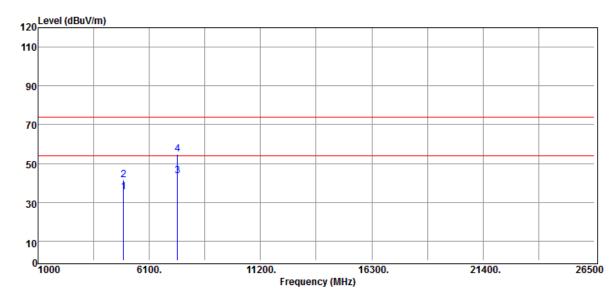

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4924.00	Average	31.49	3.93	35.42	54.00	-18.58
4924.00	Peak	37.75	3.93	41.68	74.00	-32.32
7386.00	Average	32.48	11.16	43.64	54.00	-10.36
7386.00	Peak	43.82	11.16	54.98	74.00	-19.02

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Test Channel

Operation Mode :802.11g Test Mode :TX CH HIGH **EUT Pol**

:H Plan :2462 MHz


Test Date :2019-03-08 Temp./Humi. :21/54 Antenna Pol. :HORIZONTAL

Engineer :Jerry

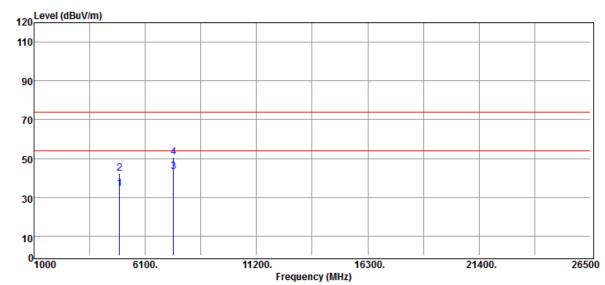

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4924.00	Average	30.53	3.93	34.46	54.00	-19.54
4924.00	Peak	38.63	3.93	42.56	74.00	-31.44
7386.00	Average	31.88	11.16	43.04	54.00	-10.96
7386.00	Peak	39.49	11.16	50.65	74.00	-23.35


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Radiated Spurious Emission Measurement Result (802.11n_HT20)

Operation Mode :802.11n20 **Test Date** :2019-03-08 Test Mode :TX CH LOW Temp./Humi. :21/54 **EUT Pol** :H Plan Antenna Pol. :VERTICAL **Test Channel** :2412 MHz Engineer :Jerry

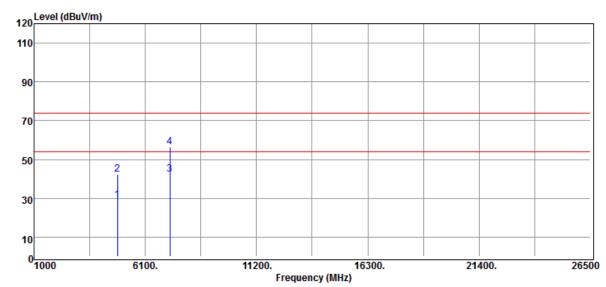

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4824.00	Average	26.08	3.02	29.10	54.00	-24.90
4824.00	Peak	39.42	3.02	42.44	74.00	-31.56
7236.00	Average	31.15	11.14	42.29	54.00	-11.71
7236.00	Peak	45.47	11.14	56.61	74.00	-17.39

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11n20 Test Mode :TX CH LOW **EUT Pol** :H Plan

Test Channel :2412 MHz **Test Date** :2019-03-08 Temp./Humi. :21/54


Antenna Pol. :HORIZONTAL

Engineer :Jerry

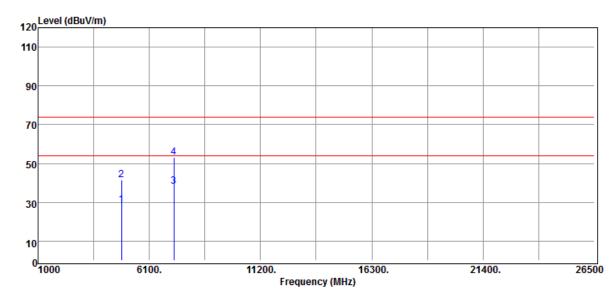

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBµV/m	dB
4824.00	Average	25.76	3.02	28.78	54.00	-25.22
4824.00	Peak	38.68	3.02	41.70	74.00	-32.30
7236.00	Average	26.90	11.14	38.04	54.00	-15.96
7236.00	Peak	41.99	11.14	53.13	74.00	-20.87


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11n20 Test Mode :TX CH MID **EUT Pol** :H Plan **Test Channel** :2437 MHz

Test Date :2019-03-08 Temp./Humi. :22/54 Antenna Pol. :VERTICAL Engineer :Jerry

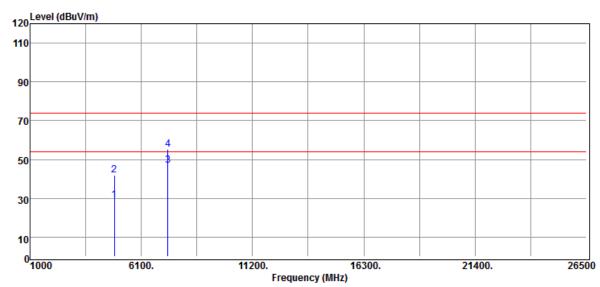

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4874.00	Average	25.83	3.36	29.19	54.00	-24.81
4874.00	Peak	38.64	3.36	42.00	74.00	-32.00
7311.00	Average	36.41	10.66	47.07	54.00	-6.93
7311.00	Peak	44.45	10.66	55.11	74.00	-18.89

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11n20 Test Mode :TX CH MID

EUT Pol :H Plan **Test Channel** :2437 MHz **Test Date** :2019-03-08 Temp./Humi. :22/54


Antenna Pol. :HORIZONTAL

Engineer :Jerry

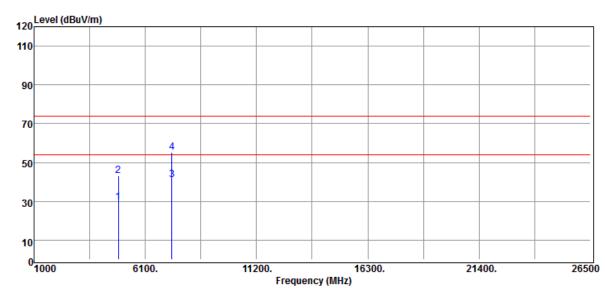

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4874.00	Average	26.24	3.36	29.60	54.00	-24.40
4874.00	Peak	39.72	3.36	43.08	74.00	-30.92
7311.00	Average	30.40	10.66	41.06	54.00	-12.94
7311.00	Peak	44.39	10.66	55.05	74.00	-18.95


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11n20 Test Mode :TX CH HIGH **EUT Pol** :H Plan **Test Channel** :2462 MHz

Test Date :2019-03-08 Temp./Humi. :22/54 Antenna Pol. :VERTICAL Engineer :Jerry

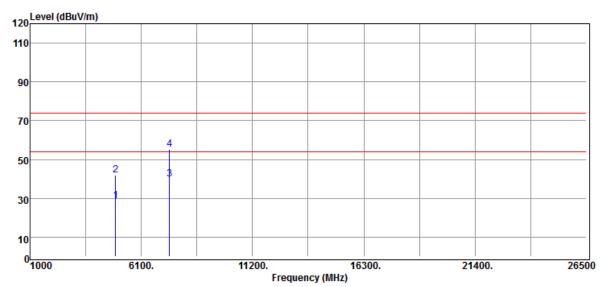

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4924.00	Average	24.60	3.93	28.53	54.00	-25.47
4924.00	Peak	37.86	3.93	41.79	74.00	-32.21
7386.00	Average	28.72	11.16	39.88	54.00	-14.12
7386.00	Peak	43.92	11.16	55.08	74.00	-18.92

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11n20 Test Mode :TX CH HIGH

EUT Pol :H Plan **Test Channel** :2462 MHz **Test Date** :2019-03-08 Temp./Humi. :22/54


Antenna Pol. :HORIZONTAL

Engineer :Jerry

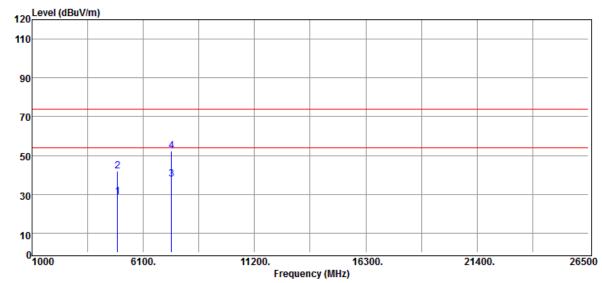

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4924.00	Average	24.93	3.93	28.86	54.00	-25.14
4924.00	Peak	37.92	3.93	41.85	74.00	-32.15
7386.00	Average	26.82	11.16	37.98	54.00	-16.02
7386.00	Peak	41.14	11.16	52.30	74.00	-21.70


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.





Radiated Spurious Emission Measurement Result (802.11n_HT40)

Operation Mode :802.11n40 **Test Date** :2019-03-08 Test Mode :TX CH LOW Temp./Humi. :22/54 **EUT Pol** :H Plan Antenna Pol. :VERTICAL **Test Channel** :2422 MHz Engineer :Jerry

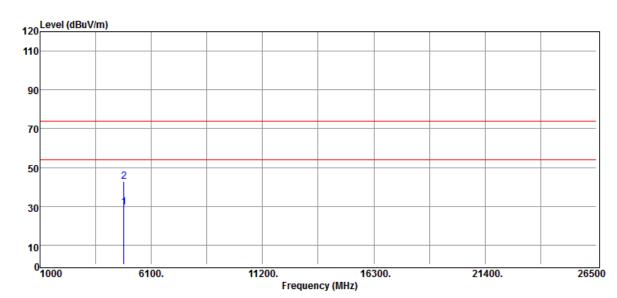


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
4844.00	Average	26.26	3.04	29.30	54.00	-24.70
4844.00	Peak	39.66	3.04	42.70	74.00	-31.30

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this

document is unlawful and offenders may be prosecuted to the fullest extent of the law.



:2019-03-08


:22/54



Operation Mode :802.11n40 **Test Date** Test Mode :TX CH LOW Temp./Humi.


EUT Pol Antenna Pol. :HORIZONTAL :H Plan

Test Channel :2422 MHz Engineer :Jerry

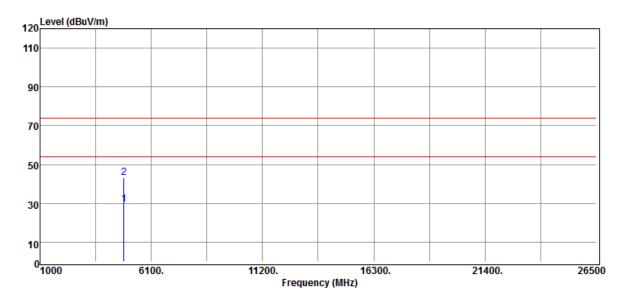

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dBµV	dB	dBμV/m	dBμV/m	dB
4844.00	Average	26.32	3.04	29.36	54.00	-24.64
4844.00	Peak	40.20	3.04	43.24	74.00	-30.76


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11n40 Test Mode :TX CH MID **EUT Pol** :H Plan **Test Channel** :2437 MHz

Test Date :2019-03-08 Temp./Humi. :21/53 Antenna Pol. :VERTICAL Engineer :Jerry

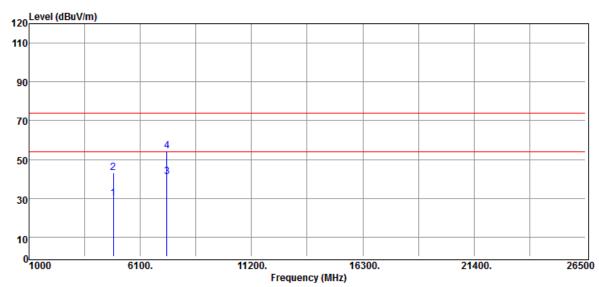

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4874.00	Average	26.68	3.36	30.04	54.00	-23.96
4874.00	Peak	39.75	3.36	43.11	74.00	-30.89
7311.00	Average	30.45	10.66	41.11	54.00	-12.89
7311.00	Peak	43.78	10.66	54.44	74.00	-19.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11n40 Test Mode :TX CH MID **EUT Pol** :H Plan **Test Channel**

:2437 MHz

Test Date :2019-03-08 Temp./Humi. :21/53


Antenna Pol. :HORIZONTAL

Engineer :Jerry

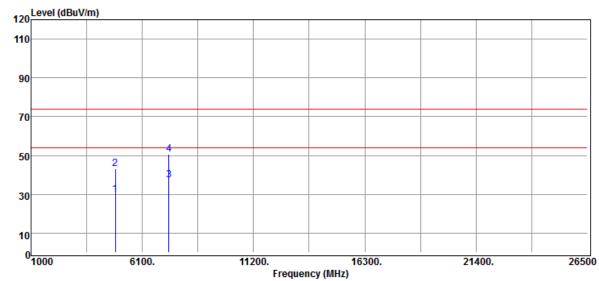


Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμ̈V	dB	dBμV/m	dΒμV/m	dB
						_
4874.00	Average	26.44	3.36	29.80	54.00	-24.20
4874.00	Peak	39.79	3.36	43.15	74.00	-30.85
7311.00	Average	26.66	10.66	37.32	54.00	-16.68
7311.00	Peak	39.89	10.66	50.55	74.00	-23.45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.






Operation Mode :802.11n40 **Test Date** :2019-03-08 Test Mode :TX CH HIGH Temp./Humi. :21/54 **EUT Pol** Antenna Pol. :VERTICAL :H Plan **Test Channel** :2452 MHz Engineer :Jerry

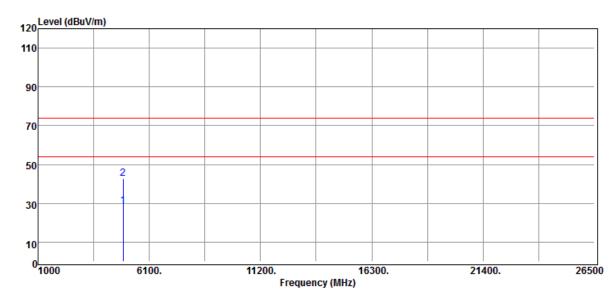

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB	
4904.00	Average	25.12	3.64	28.76	54.00	-25.24	
4904.00	Peak	39.18	3.64	42.82	74.00	-31.18	

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



:2019-03-08


:21/54



Operation Mode :802.11n40 **Test Date** Test Mode :TX CH HIGH Temp./Humi.

EUT Pol Antenna Pol. :HORIZONTAL :H Plan

Test Channel :2452 MHz Engineer :Jerry

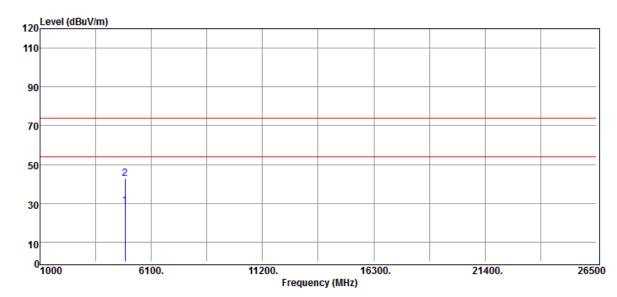

Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@ 3m	
MHz	PK/QP/AV	dΒμV	dB	dBµV/m	dBμV/m	dB
4904.00	Average	24.96	3.64	28.60	54.00	-25.40
4904.00	Peak	38.98	3.64	42.62	74.00	-31.38

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



12 POWER SPECTRAL DENSITY

Standard Applicable 12.1

Per Part 15.247 (e)

The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Per RSS-247 section 5.4 d

For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. The e.i.r.p. shall not exceed 4 W, except as provided in section 5.4(e).

12.2 **Measurement Equipment Used**

	Conducted Emission Test Site								
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.				
Spectrum Analyzer	Agilent	N9010A	MY5144011 3	2018/06/20	2019/06/19				
Attenuator	Marvelous	MVE2213-10	RF31	2019/02/26	2020/02/25				
DC Block	PASTERNACK	PE8210	RF81	2019/02/26	2020/02/25				
Coaxial Cables	Woken	00100A1F1A 185C	RF229	2019/02/26	2020/02/25				

12.3 **Test Set-up**



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



12.4 Measurement Procedure

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. The testing follows the Measurement Procedure of FCC KDB 558074 D01 DTS Meas. Guidance & ANSI C63.10.
- 3. Set the span to 1.5 times the DTS channel bandwidth.
- 4. Set the RBW = 3 kHz. & the VBW = 10 kHz
- 5. For defining Restricted Band Edge Limit: Set the RBW = 100kHz & VBW = 300 kHz.
- 6. Detector = peak.
- 7. Sweep time = auto couple.
- 8. Trace mode = max hold.
- 9. Allow trace to fully stabilize.
- 10. Use the peak marker function to determine the maximum amplitude level.

As per FCC KDB 662911 D01


Unequal antenna gains, with equal transmit powers. For antenna gains given by G1, G2, ..., GN dBi.

- (i) If transmit signals are correlated, then Directional gain
- = $10 \log[(10^{G1/20} + 10^{G2/20} + ... + 10^{GN/20})^2/N_{ANT}] dBi$

[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.].

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





12.5 Measurement Result

POWER DENSITY 802.11b			
Freq.	PSD	Limit	Result
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result
2412	-10.15	8.00	PASS
2437	-7.32	8.00	PASS
2462	-9.36	8.00	PASS

	POWER DENSITY 802.11g				
Freq.	PSD	Limit	Result		
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result		
2412	-11.70	8.00	PASS		
2437	-9.36	8.00	PASS		
2462	-11.17	8.00	PASS		

POWER DENSITY 802.11n HT20			
Freq.	PSD	Limit	Result
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result
2412	-10.72	8.00	PASS
2437	-9.40	8.00	PASS
2462	-10.71	8.00	PASS

POWER DENSITY 802.11n HT40			
Freq.	PSD	Limit	Result
(MHz)	(dBm/3kHz)	(dBm/3kHz)	Result
2422	-18.01	8.00	PASS
2437	-13.08	8.00	PASS
2452	-18.11	8.00	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Onless otherwise stated the results shown in this less report teler only to the sample(s) lested and such carriangle(s) are retained for 90 days only.


Rep 37 就明,此報告結果僅對測試之樣品負責,同時止樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and Conditions for Electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction is sused selfined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlowful to an effective may be researched to the fullest content of the fulley. document is unlawful and offenders may be prosecuted to the fullest extent of the law.


^{*}Refer to next page for plots




802.11b **Power Spectral Density Test Plot (CH-Low)**

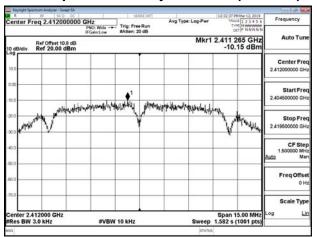


Power Spectral Density Test Plot (CH-Mid)

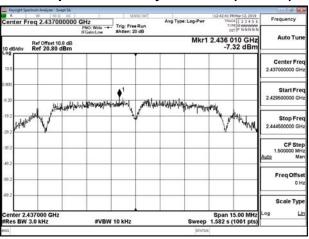


Power Spectral Density Test Plot (CH-High)

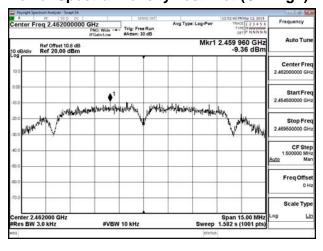


802.11g **Power Spectral Density Test Plot (CH-Low)**

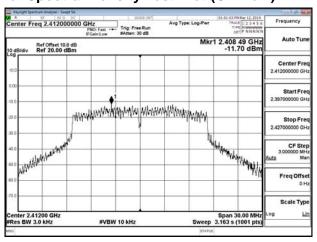

Power Spectral Density Test Plot (CH-Mid)

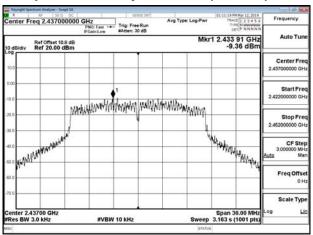

Power Spectral Density Test Plot (CH-High)

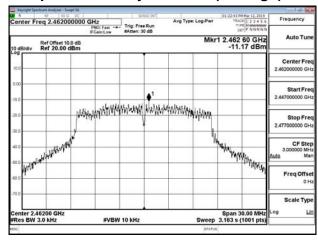

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


Unless otherwise stated the results shown in this test report relearning to the sample(s) tested and such carriage of the state of 90 days only.

Ref. Pa f a tit whe state of the state prosecuted to the fullest extent of the law




802.11n_HT20


Power Spectral Density Test Plot (CH-Low)

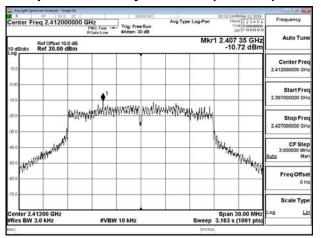

Power Spectral Density Test Plot (CH-Mid)

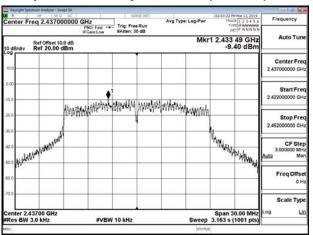


Power Spectral Density Test Plot (CH-High)

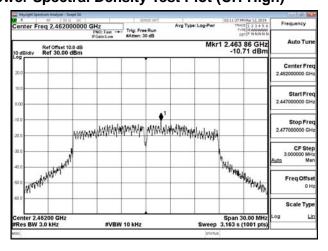


802.11n_HT40


Power Spectral Density Test Plot (CH-Low)

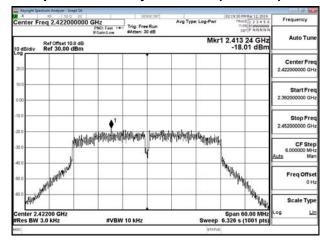

Power Spectral Density Test Plot (CH-Mid)

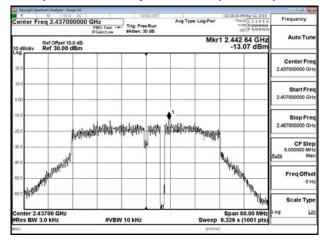


Power Spectral Density Test Plot (CH-High)

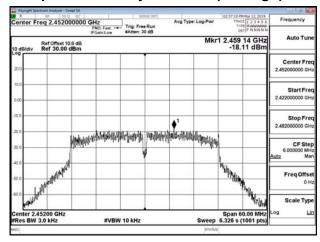

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Unless otherwise stated the results shown in this test report relearning to the sample(s) tested and such carriage of the state of 90 days only.

Ref. Pa f a tit whe state of the state prosecuted to the fullest extent of the law





13 ANTENNA REQUIREMENT

13.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by the responsible party shall be used with the device.

If the transmitting antenna is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi.

13.2 **Antenna Connected Construction**

The antenna is designed as permanently attached and no consideration of replacement. Please see EUT photo for details.

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

Offices otherwise stated the results shown in this test report retier only to the sample(s) tested and such sample(s) are retained for 90 days only.

Physical Ref Ref By 15 and the sample(s) tested and such sample(s) tested and such sample(s) are retained for 90 days only.

Physical Ref Ref By 15 and the sample(s) tested and such sample(s) tested and such sample(s) are retained for 90 days only.

Physical Ref By 15 and the sample(s) tested and such sam instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.