

SAR Test Report - New Filing

Applicant:



Midland Radio Corporation
5900 Parretta Drive
Kansas City, Missouri, 64120-2134
United States

FCC ID:

MMA75822F

Product Model Number / HVIN

75-822

Maximum Reported 1g SAR

FCC	HEAD:	0.07	W/kg
	BODY:	0.07	
General Pop. Limit:		1.60	

Product Name / PMN

75-822

In Accordance With:

FCC 47 CFR §2.1093

Radiofrequency Radiation Exposure Evaluation: Portable Devices

Approved By:

**Ben Hewson, President**

Celltech Labs Inc.

21-364 Lougheed Rd.

Kelowna, BC, V1X 7R8

Canada



Test Lab Certificate: 2470.01

Industry
Canada

IC Registration 3874A



FCC Registration: CA3874

This report shall not be reproduced in any form without the expressed written consent of Celltech Labs Inc.

Table of Contents

1.0 DOCUMENT CONTROL.....	4
2.0 CLIENT AND DEVICE INFORMATION.....	5
3.0 SCOPE OF EVALUATION.....	6
4.0 NORMATIVE REFERENCES.....	7
5.0 STATEMENT OF COMPLIANCE.....	8
6.0 SAR MEASUREMENT SYSTEM.....	9
7.0 RF CONDUCTED POWER MEASUREMENT.....	10
TABLE 7.0 CONDUCTED POWER MEASUREMENTS P1 (LITHIUM-ION BATTERY).....	10
8.0 NUMBER OF TEST CHANNELS (N_C).....	11
9.0 ACCESSORIES EVALUATED.....	12
TABLE 9.0 MANUFACTURER'S ACCESSORY LIST.....	12
10.0 SAR MEASUREMENT SUMMARY.....	13
TABLE 10.0: MEASURED RESULTS – BODY.....	13
TABLE 10.1: MEASURED RESULTS – FACE.....	13
11.0 SCALING OF MAXIMUM MEASURE SAR.....	14
TABLE 11.0 SAR SCALING.....	14
12.0 SAR EXPOSURE LIMITS.....	16
TABLE 12.0 EXPOSURE LIMITS.....	16
13.0 DETAILS OF SAR EVALUATION.....	17
13.0 DAY LOG.....	17
13.1 DUT SETUP AND CONFIGURATION.....	18
13.2 DUT POSITIONING.....	19
13.3 GENERAL PROCEDURES AND REPORT.....	19
13.4 FLUID DIELECTRIC AND SYSTEMS PERFORMANCE CHECK.....	20
13.5 SCAN RESOLUTION 100MHZ TO 2GHZ.....	20
13.6 SCAN RESOLUTION 2GHZ TO 3GHZ.....	21
13.7 SCAN RESOLUTION 5GHZ TO 6GHZ.....	21
14.0 MEASUREMENT UNCERTAINTIES.....	22
TABLE 14.0 MEASUREMENT UNCERTAINTY.....	22
TABLE 14.1 CALCULATION OF DEGREES OF FREEDOM.....	22
15.0 FLUID DIELECTRIC PARAMETERS.....	23
TABLE 15.0 FLUID DIELECTRIC PARAMETERS 150MHZ HEAD TSL.....	23
TABLE 15.1 FLUID DIELECTRIC PARAMETERS 150MHZ HEAD TSL.....	23
16.0 SYSTEM VERIFICATION TEST RESULTS.....	24
TABLE 16.0 SYSTEM VERIFICATION RESULTS 150MHZ HEAD TSL.....	24
17.0 SYSTEM VALIDATION SUMMARY.....	26
TABLE 17.0 SYSTEM VALIDATION SUMMARY.....	26
18.0 MEASUREMENT SYSTEM SPECIFICATIONS.....	26

TABLE 18.0 MEASUREMENT SYSTEM SPECIFICATIONS	26
19.0 TEST EQUIPMENT LIST	29
TABLE 19.0 EQUIPMENT LIST AND CALIBRATION	29
20.0 FLUID COMPOSITION	30
TABLE 20.0 FLUID COMPOSITION 150MHZ HEAD TSL	30
APPENDIX A – SYSTEM VERIFICATION PLOTS.....	31
APPENDIX B – MEASUREMENT PLOTS OF MAXIMUMUM MEASURED SAR	35
APPENDIX C – SETUP PHOTOS	39
FIGURE C.1 PHOTO – SETUP : BODY CONFIGURATION - FAR.....	39
FIGURE C.2 PHOTO – SETUP : BODY CONFIGURATION - CLOSE	39
FIGURE C.3 PHOTO – SETUP : FACE CONFIGURATION - FAR	40
FIGURE C.4 PHOTO – SETUP : FACE CONFIGURATION - CLOSE	40
APPENDIX D – DUT AND ACCESSORY PHOTOS	41
FIGURE D.1 PHOTO – 75-822 – FRONT, BOTTOM, TOP, SIDE	41
FIGURE D.2 PHOTO – 75-822, T1, P1, B1 – FRONT, SIDE	42
FIGURE D.2 PHOTO – 75-822, T1, P1, B1, A1 - FRONT	42
FIGURE D.3 PHOTO – P1, P2, P3 - FRONT	43
FIGURE D.4 PHOTO – P2 OPEN (RECHARGEABLE USB – AA BATTERIES X8)	43
FIGURE D.5 PHOTO – P3 OPEN (NON-RECHARGEABLE AA BATTERIES X6)	43
FIGURE D.6 PHOTO – USB CABLE– (FOR USE WITH P1) & AC POWER ADAPTER (FOR USE WITH P2)	44
FIGURE D.7 PHOTO – 12V POWER/ FIXED ANTENNA (MOBILE APPLICATION).....	44
APPENDIX E – PROBE CALIBRATION	45
APPENDIX F – DIPOLE CALIBRATION	46
APPENDIX G - PHANTOM	47

1.0 DOCUMENT CONTROL

Revision History				
Samples Tested By:		Date(s) of Evaluation:		
Report Prepared By:		Report Reviewed By:		
Report Revision	Description of Revision	Revised Section	Revised By	Revision Date
0.1	Draft Release	n/a	Ben Hewson	29 August 2023
1.0	Initial Release	n/a	Art Voss	12 September 2023
2.0	Revised Section 3 for Readability	3	Art Voss	11 October 2023
3.0	Revised Applicant Address	Cover, 2.0	Art Voss	4 December 2023

2.0 CLIENT AND DEVICE INFORMATION

Client Information	
Applicant Name	Midland Radio Corporation
Applicant Address	5900 Parretta Drive
	Kansas City, Missouri, 64120-2134
	United States
DUT Information	
Device Identifier(s):	FCC ID: MMA75822F
Type of Equipment:	FCC Part 95(subpart D) radio equipment- non- licensed
DUT Description	Portable CB Radio Tranceiver
Device Model(s) / HVIN:	75-822
Device Marketing Name / PMN:	75-822
Test Sample Serial No.:	T/A Sample - Identical Prototype
Transmit Frequency Range:	26.965 - 27.405 MHz
Number of Channels:	Fixed (Ch 1- Ch 40)
Manuf. Max. Rated Output Power:	Low Power Setting: 1 W (30.0 dBm) / High Power Setting: 4W (36.0 dBm)
Modulation:	AM/FM Analog
Duty Cycle:	75% VOX Duty Cycle
DUT Power Source:	Alkaline, AA, 6 cells, 9.0V / NiMH AA, 8 cells, 9.6V / Li Ion, 3 cells, 11.1 (typ) 12.6 (max)
Deviation(s) from standard/procedure:	None
Modification of DUT:	None

3.0 SCOPE OF EVALUATION

This Certification Report was prepared on behalf of:

Midland Radio Corporation,

,(the '*Applicant*'), in accordance with the applicable Federal Communications Commission (FCC) CFR 47 and Innovation, Scientific and Economic Development (ISED) Canada rules parts and regulations (the '*Rules*'). The scope of this investigation was limited to only the equipment, devices and accessories (the '*Equipment*') supplied by the *Applicant*. The tests and measurements performed on this *Equipment* were only those set forth in the applicable *Rules* and/or the Test and Measurement Standards they reference. The *Rules* applied and the Test and Measurement Standards used during this evaluation appear in the Normative References section of this report. The limits set forth in the technical requirements of the applicable *Rules* were applied to the measurement results obtained during this evaluation and ,unless otherwise noted, these limits were used as the Pass/Fail criteria. The Pass/Fail statements made in this report apply to only the tests and measurements performed on only the *Equipment* tested during this evaluation. Where applicable and permissible, information including test and measurement data and/or results from previous evaluations of same or similar equipment, devices and/or accessories may be cited in this report.

As per FCC 47 CFR Part §2.1091 and §2.1093, an RF Exposure evaluation report is required for this *Equipment* and the results of the RF Exposure evaluation appear in this report.

The 75-822 , FCC ID: MMA75822F, is a Portable CB Radio transceiver with VOX capability and operates in the frequency range of 26.965-27.405 MHz..The device is intended for General Population Use. The product operates from a proprietary Li-ion rechargeable battery which can be connected to a compliant AC or DC adapter for charging. Two AA battery packs of small and large size can also power the device. A speaker microphone accessory can be utilized in a portable configuration or an external vehicle mounted antenna can be attached in a mobile configuration. Test samples provided by the manufacturer were capable of transmitting at select frequencies and modulations preset by the manufacturer.

Application:

This is an application for a new device certification.

Scope:

Due to the nature of the device, the scope of this evaluation is to evaluate the SAR for intended use applications . It will include evaluation of the AM/FM Analog transmitter for all required RF exposure configurations and accessories types. The analysis of the Standalone Transmission SAR is found in Section 11.0 of this report.

The Test Plan developed for this evaluation is based on the required test channels and configurations which produced the highest worst case SAR and where applicable, SAR test reduction and/or SAR test exclusion may be utilized. The DUT was evaluated at a 100% duty cycle and adjusted to 75% duty cycle for VOX enabled applications. SAR was evaluated at the maximum tune up tolerance and conducted output power level, preset by the manufacturer and in accordance with the procedures described in IEC/IEEE 62209-1528, FCC KDB 865646, 447498.

4.0 NORMATIVE REFERENCES


Normative References*	
ANSI / ISO 17025	General Requirements for competence of testing and calibration laboratories
FCC CFR Title 47 Part 2	Code of Federal Regulations
Title 47:	Telecommunication
Part 2.1093:	Radiofrequency Radiation Exposure Evaluation: Portable Devices
IEC International Standard /IEEE International Committee on Electromagnetic Safety	
IEC/IEEE 62209-1528	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1528; Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
FCC KDB	
KDB 865664 D01v01r04	SAR Measurement Requirements for 100MHz to 6GHz
FCC KDB	
KDB 447498 D01v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
* When the issue number or issue date is omitted, the latest version is assumed.	

5.0 STATEMENT OF COMPLIANCE

This measurement report demonstrates that samples of the product model(s) were evaluated for Specific Absorption Rate (SAR) on the date(s) shown, in accordance with the Measurement Procedures cited and were found to comply with the Standard(s) Applied based on the Exposure Limits of the Use Group indicated for which the product is intended to be used.

Applicant: Midland Radio Corporation		Model / HVIN: 75-822	
Standard(s) Applied: FCC 47 CFR §2.1093		Measurement Procedure(s): FCC KDB 865664, FCC KDB 447498, IEC/IEEE 62209-1528	
Reason For Issue: <input checked="" type="checkbox"/> New Certification <input type="checkbox"/> Class I Permissive Change <input type="checkbox"/> Class II Permissive Change		Use Group: <input checked="" type="checkbox"/> General Population / Uncontrolled <input type="checkbox"/> Occupational / Controlled	
Reason for Change: Original Filing		Limits Applied: <input checked="" type="checkbox"/> 1.6W/kg - 1g Volume <input type="checkbox"/> 8.0W/kg - 1g Volume <input type="checkbox"/> 4.0W/kg - 10g Volume Date(s) Evaluated: August 9, 15, 16 2023	

The results of this investigation are based solely on the test sample(s) provided by the applicant which was not adjusted, modified or altered in any manner whatsoever except as required to carry out specific tests or measurements. A description of the device, operating configuration, detailed summary of the test results, methodologies and procedures used during this evaluation, the equipment used and the various provisions of the rules are included in this test report.

I attest that the data reported herein is true and accurate within the tolerance of the Measurement Instrument Uncertainty; that all tests and measurements were performed in accordance with accepted practices or procedures; and that all tests and measurements were performed by me or by trained personnel under my direct supervision. The results of this investigation are based solely on the test sample(s) provided by the client which were not adjusted, modified or altered in any manner whatsoever, except as required to carry out specific tests or measurements. This test report has been completed in accordance with ISO/IEC 17025.	
	Trevor Whillock Test Lab Engineer Celltech Labs Inc.
	16 August 2023 Date

6.0 SAR MEASUREMENT SYSTEM

SAR Measurement System

Celltech Labs Inc. SAR measurement facility employs a Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY6 measurement system is comprised of the measurement server, a robot controller, a computer, a near-field probe, a probe alignment sensor, an Elliptical Planar Phantom (ELI) phantom and a specific anthropomorphic mannequin (SAM) phantom for Head and/or Body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller and a teach pendant (Joystick) to control the robot's servo motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical form the DAE to digital electronic signal and transfers data to the DASY6 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter, a command decoder and a control logic unit. Transmission to the DASY6 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot utilizes a controller with built in VMbus computer.



DASY 6 SAR System with SAM Phantom



DASY 6 Measurement Controller

7.0 RF CONDUCTED POWER MEASUREMENT

Table 7.0 Conducted Power Measurements P1 (Lithium-ion Battery)

AM Modulation						
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dBm)	SAR Test Channel (Y/N)
1	26.965	35.57	36.00	4.00	0.43	
2	26.975	35.69	36.00	4.00		
3	26.985	35.64	36.00	4.00		
4	27.005	35.73	36.00	4.00		Y
5	27.015	35.59	36.00	4.00		
6	27.025	35.63	36.00	4.00		
7	27.035	35.67	36.00	4.00		
8	27.055	35.60	36.00	4.00		
9	27.065	35.51	36.00	4.00		
10	27.075	35.56	36.00	4.00		
11	27.085	35.52	36.00	4.00		
12	27.105	35.53	36.00	4.00		
13	27.115	35.61	36.00	4.00		
14	27.125	35.50	36.00	4.00		
15	27.135	35.47	36.00	4.00		
16	27.155	35.43	36.00	4.00		
17	27.165	35.53	36.00	4.00		
18	27.175	35.42	36.00	4.00		
19	27.185	35.53	36.00	4.00		
20	27.205	35.59	36.00	4.00		Y
21	27.215	35.48	36.00	4.00		
22	27.225	35.41	36.00	4.00		
23	27.255	35.50	36.00	4.00		
24	27.235	35.41	36.00	4.00		
25	27.245	25.42	36.00	4.00		
26	27.265	35.60	36.00	4.00		
27	27.275	35.47	36.00	4.00		
28	27.285	35.47	36.00	4.00		
29	27.295	35.61	36.00	4.00		
30	27.305	35.42	36.00	4.00		
31	27.315	35.43	36.00	4.00		
32	27.325	35.49	36.00	4.00		
33	27.335	35.42	36.00	4.00		
34	27.345	35.51	36.00	4.00		
35	27.355	35.40	36.00	4.00		
36	27.365	35.44	36.00	4.00		
37	27.375	35.52	36.00	4.00		
38	27.385	35.53	36.00	4.00		Y
39	27.395	35.42	36.00	4.00		
40	27.405	35.35	36.00	4.00		

FM Modulation						
Channel	Frequency (MHz)	Measured Power (dBm)	Rated Power (dBm)	Rated Power (W)	Delta (dBm)	SAR Test Channel (Y/N)
4	27.005	35.52	36.00	4.00		Y
20	27.205	35.48	36.00	4.00		Y
38	27.385	35.42	36.00	4.00		Y

*The rated 4W power and tolerance are stated for typical transmission modes and data rates. Some modes and data rates may produce lower than rated conducted power levels. Power measurements taken across the various channels did not produce levels in excess of the Rated Power plus Tolerance. SAR was evaluated using AM and FM mode at the Maximum output power level setting and produced the most conservative SAR. The reported SAR was not scaled down.

8.0 NUMBER OF TEST CHANNELS (N_C)

Number of Required Test Channels						
Frequency			Number of Channels		Spacing	
f_{LOW} (MHz)	f_{HIGH} (MHz)	f_C (MHz)	KDB 447498 (N_C)	IEC 62209 (N_C)	KDB 447498 (MHz)	IEC 62209 (MHz)
26.965	27.405	27.185	1	3		0.2
<p>KDB 447498: $N_C = \text{RoundUp} \{ [100 (F_{HIGH} - F_{LOW}) / F_C]^{0.5} \times (F_C / 100)^{0.2} \}$</p> <p>IEC 62209-1: $N_C = 2 \times \{ \text{RoundUp} [10 (F_{HIGH} - F_{LOW}) / F_C] \} + 1$</p>						

The number of channels tested was based on Low, Mid and High CB Channels.

9.0 ACCESSORIES EVALUATED

Table 9.0 Manufacturer's Accessory List

Manufacturer's Accessory List						
Test Report ID Number	Manufacturer's Part Number	Description	UDC Group ⁽²⁾	Type II Group ⁽³⁾	SAR ⁽⁴⁾ Evaluated	SAR ⁽⁵⁾ Tested
Antenna Accessory						
T1	–	Flexible Antenna	n/a	n/a	Y	Y
Battery Accessory						
P1	–	Lithium-ion Rechargeable Battery	n/a	n/a	Y	Y
P2	–	Rechargeable Battery Case (8x AA)	n/a	n/a	Y	Y
P3	–	Non-Rechargeable Battery Case (6xAA)	n/a	n/a	Y	Y
Body-Worn Accessory						
B1	–	Metal Belt-Clip	n/a	n/a	Y	Y
Audio Accessory						
A1	22-540	Speaker-Microphone (representative sample)	n/a	n/a	Y	Y
Other Accessories						
–	–	12 V power and fixed antenna adapter*	n/a	n/a	N	N
–	–	AC power adapter for rechargeable batteries (P2)	n/a	n/a	N	N
–	–	USB C cable for use in recharging	n/a	n/a	N	N

* for mobile applications only

10.0 SAR MEASUREMENT SUMMARY

Table 10.0: Measured Results – BODY

Measured 1g SAR Results - BODY Configuration															
Date	Plot ID	Test Frequency (MHz)	DUT Configuration			Accessories	Spacing		Measured SAR (W/kg)	SAR Drift (dB)	Delta Power (dB)	Crest Factor (n)	Fluid Sensitivity (n)	Duty Factor (%)	reported SAR (W/kg)
			Pos	Mode	Mod		DUT (mm)	Antenna (mm)							
8/15/2023	B1	27.005	BODY	AM	AM	P1 T1 B1 A1	0	0	0.085	1.270	-0.270	1.000	1.063	75.000	0.072
8/15/2023	B2	27.205	BODY	AM	AM	P1 T1 B1 A1	0	0	0.062	0.090	-0.410	1.000	1.064	75.000	0.054
8/15/2023	B3	27.385	BODY	AM	AM	P1 T1 B1 A1	0	0	0.032	1.170	-0.470	1.000	1.064	75.000	0.028
8/15/2023	B4	27.005	BODY	FM	FM	P1 T1 B1 A1	0	0	0.069	1.430	-0.270	1.000	1.063	75.000	0.059
8/15/2023	B5	27.205	BODY	FM	FM	P1 T1 B1 A1	0	0	0.035	8.070	-0.410	1.000	1.064	75.000	0.030
8/16/2023	B6	27.385	BODY	FM	FM	P1 T1 B1 A1	0	0	0.056	2.770	-0.470	1.000	1.064	75.000	0.049
Applicable SAR Limit						Use Group					Limit				
FCC CFR 2.1093			Health Canada Safety Code 6			General Population/User Unaware					1.6 W/kg				

Table 10.1: Measured Results – FACE

Measured 1g SAR Results - FACE Configuration															
Date	Plot ID	Test Frequency (MHz)	DUT Configuration			Accessories	Spacing		Measured SAR (W/kg)	SAR Drift (dB)	Delta Power (dB)	Crest Factor (n)	Fluid Sensitivity (n)	Duty Factor (%)	reported SAR (W/kg)
			Pos	Mode	Mod		DUT (mm)	Antenna (mm)							
8/9/2023	F1	27.005	FACE	AM	AM	P1 T1 n/a n/a	25	25	0.020	-0.210	-0.270	1.000	1.062	75.000	0.018
8/9/2023	F2	27.005	FACE	AM	AM	P2 T1 n/a n/a	25	25	0.007	-0.460	-0.270	1.000	1.062	75.000	0.007
8/9/2023	F3	27.005	FACE	AM	AM	P3 T1 n/a n/a	25	25	0.005	-0.460	-0.270	1.000	1.062	75.000	0.005
8/16/2023	F10	27.005	FACE	FM	FM	P1 T1 n/a n/a	25	25	0.007	-0.400	-0.270	1.000	1.063	75.000	0.007
8/16/2023	F11	27.005	FACE	FM	FM	P1 T1 n/a n/a	25	25	0.020	-0.390	-0.270	1.000	1.063	75.000	0.019
8/16/2023	F12	27.005	FACE	FM	FM	P1 T1 n/a n/a	25	25	0.081	-0.210	-0.270	1.000	1.063	75.000	0.072
8/16/2023	F13	27.205	FACE	AM	AM	P1 T1 n/a n/a	25	25	0.014	-0.380	-0.410	1.000	1.064	75.000	0.013
8/16/2023	F14	27.385	FACE	AM	AM	P1 T1 n/a n/a	25	25	0.023	-0.210	-0.470	1.000	1.064	75.000	0.022
Applicable SAR Limit						Use Group					Limit				
FCC CFR 2.1093			Health Canada Safety Code 6			General Population/User Unaware					1.6 W/kg				

11.0 SCALING OF MAXIMUM MEASURE SAR

Table 11.0 SAR Scaling

Scaling of Maximum Measured SAR (1g)			
Measured Parameters		Configuration	
		Body	Face
Plot ID		B1	F12
Maximum Measured SAR _M		0.064	0.061
Frequency		27.005	27.005
Drift	Power Drift	1.270 (1)	-0.210
Conducted Power		35.730	35.730
DC	Transmit Duty Cycle	100.000	100.0
Fluid Deviation from Target			
Δε	Permittivity	1.85%	1.85%
Δσ	Conductivity	-7.60%	-7.60%

Note(1): Power Drift is Positive, Drift Adjustment not Required.

Fluid Sensitivity Calculation (1g)			EEE 62209-1528
Delta SAR = Ce * Δe + Cσ * Δσ			
Ce = (-0.0007854*f³) + (0.009402*f²) - (0.02742*f) - 0.2026			
Cσ = (0.009804*f³) - (0.08661*f²) + (0.02981*f) + 0.7829			
f	Frequency (GHz)	0.027005	0.027005
Ce		-0.203	-0.203
Cσ		0.784	0.784
Ce * Δe		-0.004	-0.004
Cσ * Δσ		-0.060	-0.060
ΔSAR		-0.063	-0.063
			(%)

Manufacturer's Tuneup Tolerance			
Measured Conducted Power	35.730	35.730	(dBm)
Rated Conducted Power	36.000	36.000	(dBm)
ΔP	-0.270	-0.270	(dB)

Note(4): SAR was Evaluated at the Maximum Tuneup Tolerance. SAR Adjustment is not Required.

Crest Factor			
Transmit Duty Cycle (DC)	100.000	100.0	(%)
CF (1/DC)	1.000 (5)	1.00	###

Note(5): Crest Factor = 1 (100% Duty Cycle), Crest Factor Adjustment not Required.

SAR Adjustment for Fluid Sensitivity			
$SAR_1 = SAR_M \times [\Delta SAR]$	0.068	0.065	(W/kg)
SAR Adjustment for Tuneup Tolerance			
$SAR_2 = SAR_1 + [\Delta P]$	0.072	0.069	(W/kg)
SAR Adjustment for Drift			
$SAR_3 = SAR_2 + [Drift]$	0.072	0.072	(W/kg)
SAR Adjustment for Crest Factor			
$SAR_4 = SAR_3 \times [CF]$	0.072	0.072	(W/kg)
<i>reported</i> 1g SAR			
SAR_4	0.07	0.07	(W/kg)

*Fluid dielectric targets above and below 30MHz are not publish. Fluid deviation is based on the 30MHz target.

NOTES to Table 11.0

(1) Scaling of the Maximum Measured SAR is based on the highest, 100% duty cycle, Face, Body and/or Head SAR measured of ALL test channels, configurations and accessories used during THIS evaluation. The Measured Fluid Deviation parameters apply only to deviation of the tissue equivalent fluids used at the frequencies which produced the highest measured SAR. The Measured Conducted Power applies to the Conducted Power measured at the frequencies producing the highest Face and Body SAR. The Measured Drift is the SAR drift associated with that specific SAR measurement. The Reported SAR is the accumulation of all SAR Adjustments from the applicable Steps 1 through 4. The Plot ID is for identification of the SAR Measurement Plots in Annex A of this report.

NOTE: Some of the scaling factors in Steps 1 through 4 may not apply and are identified by light gray text.

Step 1

Per IEC/IEEE 62209-1528 and FCC KDB 865664. Scaling required only when Measured Fluid Deviation is greater than 5%. If the Measured Fluid Deviation is greater than 5%, Table 10.1 will be shown and will indicate the SAR scaling factor in percent (%). SAR is MULTIPLIED by this scaling factor only when the scaling factor is positive (+).

Step 2

Per KDB 447498. Scaling required only when the difference (Delta) between the Measured Conducted Power and the Manufacturer's Rated Conducted Power is (-) Negative. The absolute value of Delta is ADDED to the SAR.

Step 3

Per IEC/IEEE 62209-1528 Scaling required only when Measured Drift is (-) Negative. The absolute value of Measured Drift is added to Reported or Simultaneous Reported SAR.

Step 4

Per KDB 447498 4.3.2. The SAR, either measured or calculated, of ANY and ALL simultaneous transmitters must be added together and includes all contributors.

Step 5

The Reported SAR is the Maximum Final Adjusted Cumulative SAR from the applicable Steps 1 through 4 and are reported on Page 1 of this report.

12.0 SAR EXPOSURE LIMITS

Table 12.0 Exposure Limits

SAR RF EXPOSURE LIMITS			
FCC 47 CFR§2.1093	Health Canada Safety Code 6	General Population / Uncontrolled Exposure ⁽⁴⁾	Occupational / Controlled Exposure ⁽⁵⁾
Spatial Average ⁽¹⁾ (averaged over the whole body)		0.08 W/kg	0.4 W/kg
Spatial Peak ⁽²⁾ (Head and Trunk averaged over any 1 g of tissue)		1.6 W/kg	8.0 W/kg
Spatial Peak ⁽³⁾ (Hands/Wrists/Feet/Ankles averaged over 10 g)		4.0 W/kg	20.0 W/kg
(1) The Spatial Average value of the SAR averaged over the whole body.			
(2) The Spatial Peak value of the SAR averaged over any 1 gram of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(3) The Spatial Peak value of the SAR averaged over any 10 grams of tissue, defined as a tissue volume in the shape of a cube and over the appropriate averaging time.			
(4) Uncontrolled environments are defined as locations where there is potential exposure to individuals who have no knowledge or control of their potential exposure.			
(5) Controlled environments are defined as locations where there is potential exposure to individuals who have knowledge of their potential exposure and can exercise control over their exposure.			

13.0 DETAILS OF SAR EVALUATION

13.0 Day Log

DAY LOG					Fluid Dielectric	SPC	Test	Task
Date	Ambient Temp (°C)	Fluid Temp (°C)	Relative Humidity (%)	Barometric Pressure (kPa)				
09 Aug 2023	24.3	23.3	38%	100.6	X	X	X	30H Fluids, SPC & SAR Testing
10 Aug 2023	22.0	22.8	37%	101.2			X	30H SAR Testing
15 Aug 2023	25.6	22.7	39%	100.9	X	X	X	30H Fluids, SPC & SAR Testing
16 Aug 2023	24.3	21.6	35%	101.3			X	30H SAR Testing

Per IEC/IEE 62209-1528 Test series was started within 24 hours and completed within 48 hours of Fluid Parameter Measurement

13.1 DUT Setup and Configuration

DUT Setup and Configuration	
Overview	<p>The 75-822 was evaluated for <i>Body</i> and <i>Face</i> SAR at the maximum conducted output power level, preset by the manufacturer, with a fully charged batteries in unmodulated continuous transmit operation (AM mode at 100% duty cycle) with the transmit key continuously depressed. For a Push-To-Talk (PTT) device with VOX enabled operation, a 75% duty cycle compensation for the <u>reported SAR</u> was used, as per FCC KDB 447498.</p> <p>The test procedures outlined in FCC KDB 447498 " General SAR Test Reduction Considerations for " as well as FCC KDB 865664, and IEC/IEEE 62209-1528 were used throughout the evaluation of this device.</p>

13.2 DUT Positioning

DUT Positioning	
Positioning	The DUT Positioner was securely fastened to the Phantom Platform. Registration marks were placed on the DUT and the Positioner to ensure consistent positioning of the DUT for each test evaluation.
FACE Configuration	The DUT was securely clamped into the device holder with the surface of the DUT normally held to the user's face facing the phantom. The device holder was adjusted to ensure that the horizontal axis of the DUT was parallel to the bottom of the phantom. A 25mm spacer block was used to set the separation distance between the DUT and the phantom to 25mm. When applicable and unless by design, the antenna of the DUT was prevented from sagging away from the phantom. The spacer block was removed before testing.
BODY Configuration	Body-Worn and Audio Accessories were affixed to the DUT in the manner in which they are intended to be used. The DUT, with its accessories, were securely clamped into the device holder with the surface of the DUT normally in contact with the body in direct contact with the bottom of the phantom, or 0mm separation from the DUT's accessory to the phantom. Body-Worn Accessory straps, linkages, etc. were positioned in a fashion resembling that for which they were intended to be used. Audio Accessory cables, etc., were positioned in a fashion resembling that for which they were intended to be used.
HEAD Configuration	This device is not intended to be held to the ear and was not tested in the HEAD configuration.

13.3 General Procedures and Report

General Procedures and Reporting	
General Procedures	<p>The fluid dielectric parameters of the Active Tissue Simulating Liquid (TSL) were measured as described in this Section, recorded and entered into the DASY Measurement Server. Active meaning the TSL used during the SAR evaluation of the DUT. The temperature of the Active TSL was measured and recorded prior to performing a System Performance Check (SPC). An SPC was performed with the Active TSL prior to the start of the test series. The temperature of the Active TSL was measured throughout the day and the Active TSL temperature was maintained to $\pm 0.5^{\circ}\text{C}$. The Active TSL temperature was maintained to within $\pm 1.0^{\circ}\text{C}$ throughout the test series. TSL analysis and SPC were repeated when the Active TSL use exceeded 84 hours.</p> <p>An Area Scan exceeding the length and width of the DUT projection was performed and the locations of all maximas within 2dB of the Peak SAR recorded. A Zoom Scan centered over the Peak SAR location(s) was performed and the 1g and 10g SAR values recorded. The resolutions of the Area Scan and Zoom Scan are described in the Scan Resolution table(s) in this Section. A Power Reference Measurement was taken at the phantom reference point immediately prior to the Area Scan. A Power Drift measurement was taken at the phantom reference point immediately following the Zoom Scan to determine the power drift. A Z-Scan from the <u>Maximum Distance to Phantom Surface</u> to the fluid surface was performed following the power drift measurement.</p>
Reporting	<p>The 1g SAR, 10g SAR and power drift measurements are recorded in the SAR Measurement Summary tables in the SAR Measurement Summary Section of this report. The SAR values shown in the 100% DC (Duty Cycle) column are the SAR values reported by the SAR Measurement Server with the DUT operating at 100% transmit duty cycle. These tables also include other information such as transmit channel and frequency, modulation, accessories tested and DUT-phantom separation distance.</p> <p>In the Scaling of Maximum Measured SAR Section of this report, the highest measured SAR in the BODY configuration, within the entire scope of this assessment, are, when applicable, scaled for Fluid Sensitivity, Manufacturer's Tune-Up Tolerance, Simultaneous Transmission and Drift. With the exception of Duty Cycle correction/compensation, SAR values are <u>ONLY</u> scaled up, not down. The final results of this scaling is the <u>reported SAR</u> which appears on the Cover Page of this report.</p>

13.4 Fluid Dielectric and Systems Performance Check

Fluid Dielectric and Systems Performance Check	
Fluid Dielectric Measurement Procedure	<p>The fluid dielectric parameters of the Tissue Simulating Liquid (TSL) are measured using the Open-Ended Coax Method connected to an Agilent 8753ET Network Analyzer connected to a measurement server running Aprel Dielectric Property Measurement System. A frequency range of $\pm 100\text{MHz}$ for frequencies $> 300\text{MHz}$, $\pm 50\text{MHz}$ for frequencies $\leq 300\text{MHz}$ and $\pm 20\text{MHz}$ for frequencies $\leq 30\text{MHz}$ with frequency step size of 10MHz (5MHz below 100MHz) is used. The center frequency is centered around the SAR measurement probe's calibration point for that TSL frequency range. A calibration of the setup is performed using a short-open-deionized water (at 23°C in a 300ml beaker) method. A sample of the TSL is placed in a 300ml beaker and the open-ended coax is submerged approximately 8mm below the fluid surface in the approximate center of the beaker. A check of the setup is made to ensure no air is trapped under the open-ended coax. The sample of TSL is measured and compared to the FCC OET Bulletin 65 Supplement C targets for HEAD or BODY for the entire fluid measurement range. Fluid adjustment are made if the dielectric parameters are $> 5\%$ in range that the DUT is to be tested. If the adjustments fail to bring the parameters to $\leq 5\%$ but are $< 10\%$, the SAR Fluid Sensitivity as per IEC 62201-1 and FCC KDB 865664 are applied to the highest measured SAR. A TSL with dielectric parameters $> 10\%$ in the DUT test frequency range are not used.</p>
Systems Performance Check	<p>The fluid dielectric parameters of the Active TSL are entered into the DASY Measurement Server at each of the 10MHz step size intervals. Active meaning the TSL used during the SAR evaluation of the DUT. The DASY Measurement System will automatically interpolate the dielectric parameters for DUT test frequencies that fall between the 10MHz step intervals.</p> <p>A Systems Performance Check (SPC) is performed in accordance with IEEE 1528 "System Check" and FCC KDB 865664 "System Verification". A validation source, dipole or Confined Loop Antenna (CLA), is placed under the geometric center of the phantom and separated from the phantom in accordance to the validation source's Calibration Certificate data. A CW signal set to the frequency of the validate source's and SAR measurement probe's calibration frequency with a forward power set to the validation source's Calibration Certificate data power setting is applied to the validation source. An Area Scan is centered over the projection of the validation source's feed point and an Area Scan is taken. A Zoom Scan centered over the Peak SAR measurement of the Area Scan and the 1g and 10g SAR is measured. The measured 1g and 10g SAR is compared to the 1g and 10g SAR measurements from the validation source's Calibration Certificate. When required, the measured SAR is normalized to 1.0W and compared to the normalized SAR indicated on the validation source's Calibration Certificate. The SPC is considered valid when the measured and normalized SAR is $\leq 10\%$ of the measured and normalize SAR of the validation source's Calibration Certificate.</p> <p>The fluid dielectric parameters of the Active TSL and SPC are repeated when the Active TSL has been in use for greater than 84 hours or if the Active TSL temperature has exceed $\pm 1^\circ\text{C}$ of the initial fluid analysis.</p>

13.5 Scan Resolution 100MHz to 2GHz

Scan Resolution 100MHz to 2GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	$4 \pm 1 \text{ mm}$
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	$5^\circ \pm 1^\circ$
Area Scan Spatial Resolution $\Delta X, \Delta Y$	15 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	7.5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	$150 \pm 5 \text{ mm}$
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.6 Scan Resolution 2GHz to 3GHz

Scan Resolution 2GHz to 3GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	12 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	5 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	5 mm
Zoom Scan Volume X, Y, Z	30 mm
Phantom	ELI
Fluid Depth	150 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

13.7 Scan Resolution 5GHz to 6GHz

Scan Resolution 5GHz to 6GHz	
Maximum distance from the closest measurement point to phantom surface: (Geometric Center of Probe Center)	4 ± 1 mm
Maximum probe angle normal to phantom surface. (Flat Section ELI Phantom)	5° ± 1°
Area Scan Spatial Resolution $\Delta X, \Delta Y$	10 mm
Zoom Scan Spatial Resolution $\Delta X, \Delta Y$	4 mm
Zoom Scan Spatial Resolution ΔZ (Uniform Grid)	2 mm
Zoom Scan Volume X, Y, Z	22 mm
Phantom	ELI
Fluid Depth	100 ± 5 mm
An Area Scan with an area extending beyond the device was used to locate the candidate maximas within 2dB of the global maxima.	
A Zoom Scan centered over the peak SAR location(s) determined by the Area Scan was used to determine the 1-gram and 10-gram peak spatial-average SAR	

14.0 MEASUREMENT UNCERTAINTIES

Table 14.0 Measurement Uncertainty

Measurement uncertainty table is not required per KDB 865664 D01 v01r04 section 2.8.2 page 12. SAR measurement uncertainty analysis is required in SAR reports only when the highest measured SAR in a frequency band is ≥ 1.5 W/kg for 1-g SAR. The equivalent ratio (1.5/1.6) should be applied to extremity and occupational exposure conditions. The highest reported SAR value is less than 1.5W/kg. Therefore, the measurement uncertainty table is not required.

Table 14.1 Calculation of Degrees of Freedom

Calculation of the Degrees and Effective Degrees of Freedom	
$v_i = n - 1$	$v_{\text{eff}} = \frac{u_c^4}{m \sum_{i=1} \frac{c_i^4 u_i^4}{v_i}}$

15.0 FLUID DIELECTRIC PARAMETERS

Table 15.0 Fluid Dielectric Parameters 150MHz HEAD TSL

Aprel Laboratory
Test Result for UIM Dielectric Parameter
Wed 0/Aug/2023 11:06:00
Freq Frequency(GHz)
Test_e Epsilon of UIM
Test_s Sigma of UIM

12 FLUID DIELECTRIC PARAMETERS								Fluid Sensitivity Calculation IEC/IEEE 62209-1528 7.8.2			
Date:	9-Aug-2023	Fluid Temp:	23.3	Frequency:	30MHz	Tissue:	Head	ΔSAR 1g	ΔSAR 10g	SAR Correction Factor (1)	
Freq (MHz)		Test ε	Test σ (S/m)	Target ε	Target σ (S/m)	Deviation Permittivity	Deviation Conductivity			1g	10g
20.0000		56.0800	0.6900	55.4900	0.75	1.06%	-8.00%	-0.062	-0.060	1.062	1.060
27.0050	*	56.9206	0.6970	55.1468	0.75	3.22%	-7.07%	-0.062	-0.060	1.062	1.060
27.2050	*	56.9446	0.6972	55.1370	0.75	3.28%	-7.04%	-0.062	-0.060	1.062	1.060
27.3850	*	56.9662	0.6974	55.1281	0.75	3.33%	-7.02%	-0.062	-0.060	1.062	1.060
30.0000		57.2800	0.7000	55.0000	0.75	4.15%	-6.67%	-0.062	-0.060	1.062	1.060

*Channel Frequency Tested

Fluid dielectric targets above and below 30MHz are not published. Deviation based on 30MHz target using 150 MHz Head TSL.

Table 15.1 Fluid Dielectric Parameters 150MHz HEAD TSL

Aprel Laboratory
Test Result for UIM Dielectric Parameter
Tue 15/Aug/2023 16:34:32
Freq Frequency(GHz)
Test_e Epsilon of UIM
Test_s Sigma of UIM

15 FLUID DIELECTRIC PARAMETERS								Fluid Sensitivity Calculation IEC/IEEE 62209-1528 7.8.2			
Date:	15-Aug-2023	Fluid Temp:	22.7	Frequency:	30MHz	Tissue:	Head	ΔSAR 1g	ΔSAR 10g	SAR Correction Factor (1)	
Freq (MHz)		Test ε	Test σ (S/m)	Target ε	Target σ (S/m)	Deviation Permittivity	Deviation Conductivity			1g	10g
20.0000		56.3500	0.7000	55.4900	0.75	1.55%	-6.67%	-0.062	-0.060	1.062	1.060
27.0050	*	56.1679	0.6930	55.1468	0.75	1.85%	-7.60%	-0.063	-0.062	1.063	1.062
27.2050	*	56.1627	0.6928	55.1370	0.75	1.86%	-7.63%	-0.064	-0.062	1.064	1.062
27.3850	*	56.1580	0.6926	55.1281	0.75	1.87%	-7.65%	-0.064	-0.062	1.064	1.062
30.0000		56.0900	0.6900	55.0000	0.75	1.98%	-8.00%	-0.062	-0.060	1.062	1.060

*Channel Frequency Tested

Fluid dielectric targets above and below 30MHz are not published. Deviation based on 30MHz target using 150 MHz Head TSL.

16.0 SYSTEM VERIFICATION TEST RESULTS

Table 16.0 System Verification Results 150MHz HEAD TSL

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N	S/N	
09 Aug 2023		30	CLA-30	1005	
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	23.3	24	38%	1000	0
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
57.28	55.00	4.15%	0.70	0.75	-6.67%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
1.21	1.22	-0.82%	0.76	0.76	0.53%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
1.21	1.25	-3.20%	0.76	0.78	-1.93%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEC/IEEE 62209-1528 and FCC KDB 846224,</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

System Verification Test Results					
Date		Frequency (MHz)	Validation Source		
			P/N	S/N	
15 Aug 2023		30	CLA-30	1005	
Fluid Type	Fluid Temp °C	Ambient Temp °C	Ambient Humidity (%)	Forward Power (mW)	Source Spacing (mm)
Head	22.7	26	39%	1000	0
Fluid Parameters					
Permittivity			Conductivity		
Measured	Target	Deviation	Measured	Target	Deviation
56.09	55.00	1.98%	0.69	0.75	-8.00%
Measured SAR					
1 gram			10 gram		
Measured	Target	Deviation	Measured	Target	Deviation
1.20	1.22	-1.64%	0.76	0.76	-0.26%
Measured SAR Normalized to 1.0W					
1 gram			10 gram		
Normalized	Target	Deviation	Normalized	Target	Deviation
1.20	1.25	-4.00%	0.76	0.78	-2.70%
<p>Prior to the SAR evaluations, system checks were performed on the planar section of the phantom and a SPEAG validation dipole in accordance with the procedures described in IEC/IEEE 62209-1528 and FCC KDB 846224,</p> <p>The dielectric parameters of the simulated tissue mixture were measured prior to the system performance check using a Dielectric Probe Kit and a Network Analyzer.</p> <p>The forward power was applied to the dipole and the system was verified to a tolerance of +10% from the system manufacturer's dipole calibration target SAR value.</p> <p>The forward power applied was same forward power applied by the calibration lab during the calibration of this validation source.</p>					

17.0 SYSTEM VALIDATION SUMMARY

Table 17.0 System Validation Summary

System Validation Summary											
Frequency (MHz)	Validation Date	Probe Model	Probe S/N	Validation Source	Source S/N	Tissue	Tissue Dielectrics		Validation Results		
							Permittivity	Conductivity	Sensitivity	Linearity	Isotropy
30	9-Aug-23	EX3DV4	3600	CLA-30	1005	Head	57.28	0.70	Pass	Pass	Pass

18.0 MEASUREMENT SYSTEM SPECIFICATIONS


Table 18.0 Measurement System Specifications

Measurement System Specification	
Specifications	
Positioner	Stäubli Unimation Corp. Robot Model: TX90XL
Repeatability	+/- 0.035 mm
No. of axis	6.0
Data Acquisition Electronic (DAE) System	
Cell Controller	
Processor	Intel(R) Core(TM) i7-7700
Clock Speed	3.60 GHz
Operating System	Windows 10 Professional
Data Converter	
Features	Signal Amplifier, multiplexer, A/D converter, and control logic
Software	Measurement Software: DASY6, V 6.4.0.12171 / DASY52 V10.2(1504)
	Postprocessing Software: SEMCAD X, V14.6.12(7470)
Connecting Lines	Optical downlink for data and status info., Optical uplink for commands and clock
DASY Measurement Server	
Function	Real-time data evaluation for field measurements and surface detection
Hardware	Intel ULV Celeron CPU 400 MHz; 128 MB chip disk; 128 MB RAM
Connections	COM1, COM2, DAE, Robot, Ethernet, Service Interface
E-Field Probe	
Model	EX3DV4
Serial No.	7826
Construction	Triangular core fiber optic detection system
Frequency	10 MHz to 6 GHz
Linearity	±0.2 dB (30 MHz to 3 GHz)
Phantom	
Type	ELI Elliptical Planar Phantom
Shell Material	Fiberglass
Thickness	2mm +/- .2mm
Volume	> 30 Liter


Table 18.1

Measurement System Specification (Continued)


Probe Specification

Construction:	Symmetrical design with triangular core; Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, glycol)	
Calibration:	In air from 10 MHz to 2.5 GHz In head simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy $\pm 8\%$)	
Frequency:	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)	
Directivity:	± 0.2 dB in head tissue (rotation around probe axis) ± 0.4 dB in head tissue (rotation normal to probe axis)	
Dynamic Range:	5 μ W/g to > 100 mW/g; Linearity: ± 0.2 dB	
Surface Detect:	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surfaces	
Dimensions:	Overall length: 330 mm; Tip length: 16 mm; Body diameter: 12 mm; Tip diameter: 6.8 mm Distance from probe tip to dipole centers: 2.7 mm	
Application:	General dosimetry up to 3 GHz; Compliance tests of mobile phone	EX3DV4 E-Field Probe

Phantom Specification
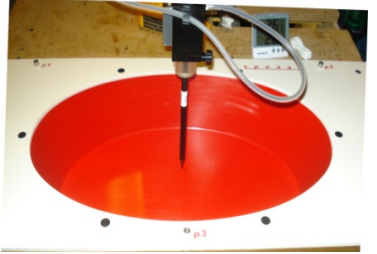
<p>The ELI V5.0 phantom is an elliptical planar fiberglass shell phantom with a shell thickness of 2.0mm +/- .2mm at the planar area. This phantom conforms to OET Bulletin 65, Supplement C, IEC/IEEE 62209-1528.</p>		
		ELI Phantom

Device Positioner Specification

<p>The DASY device positioner has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.</p>		
		Device Positioner

19.0 TEST EQUIPMENT LIST

Table 19.0 Equipment List and Calibration

Test Equipment List				
DESCRIPTION	ASSET NO.	SERIAL NO.	DATE CALIBRATED	CALIBRATION DUE
Schmid & Partner DASY 6 System	-	-	-	-
-DASY Measurement Server	00158	1078	CNR	CNR
-Robot	00046	599396-01	CNR	CNR
-DAE4	00019	353	18-Apr-23	18-Apr-24
-EX3DV4 E-Field Probe	00213	7826	20-Apr-22	20-Apr-25
-CLA 30 Validation Dipole	00300	1005	13-Apr-23	13-Apr-26
ELI Phantom	00247	1234	CNR	CNR
HP 85070C Dielectric Probe Kit	00033	none	CNR	CNR
Gigatronics 8652A Power Meter	00007	1835801	13-May-22	13-May-25
Gigatronics 80701A Power Sensor	00186	1837002	COU	COU
Gigatronics 80334A Power Sensor	00237	1837001	13-May-22	13-May-25
HP 8753ET Network Analyzer	00134	US39170292	6-Jan-21	6-Jan-24
Rohde & Schwarz SMR20 Signal Generator	00006	100104	11-Aug-20	11-Aug-23
Amplifier Research 10W1000C Power Amplifier	00041	27887	CNR	CNR
Amplifier Research 5S1G4 Power Amplifier	00106	26235	CNR	CNR
Narda Directional Coupler 3020A	00064	-	CNR	CNR
Bipolar Power Supply 6299A	00086	1144A02155	CNR	CNR
DC-18G 10W 30db Attenuator	00102	-	COU	COU
R&S FSP40 Spectrum Analyzer	00241	100500	10-Aug-21	10-Aug-24
RF Cable-SMA	00311	-	CNR	CNR
HP Calibration Kit	00145	-	CNR	CNR

CNR = Calibration Not Required

COU = Calibrate on Use

Note: Per KDB 865664, Dipoles are evaluated annually for return loss and impedance. The dipole's SAR target can only be assessed by the SAR equipment manufacturer and remains the target until the dipole is recalibrated by the manufacturer. The dipole's SAR is evaluated and compared to this target during each and every System Verification which is performed prior to and/or during each DUT SAR evaluation. The results of these verifications are shown in Section 16.0

20.0 FLUID COMPOSITION

Table 20.0 Fluid Composition 150MHz HEAD TSL

				150MHz Head
Tissue Simulating Liquid (TSL) Composition				
Component by Percent Weight				
Water	Sugar	Salt ⁽¹⁾	HEC ⁽²⁾	Bacteriacide ⁽³⁾
38.35	55.5	5.15	0.9	0.1

(1) Non-Iodinized

(2) HydroxyEthyl-Cellulose: Sigma-Aldrich P/N 54290-500g

(3) Dow Chemical Dowicil 75 Antimicrobial Perservative

Note: 150MHz HEAD TSL formulation was used during this evaluation.

APPENDIX A – SYSTEM VERIFICATION PLOTS

DUT: CLA-30 - SN1005; Type: CLA-30; Serial: SN1005

Procedure Name: SPC 30H Input=1.0W, 1g Target[1.098][122][1.342]W/kg_ 10g Target [0.699][0.777][0.855] 2

Communication System: UID 0, CW (0); Frequency: 30 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 30$ MHz; $\sigma = 0.7$ S/m; $\epsilon_r = 57.28$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 8/9/2023 6:09:07 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN7826; ConvF(15.21, 15.21, 15.21) @ 30 MHz; Calibrated: 5/16/2023
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/18/2023
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 30H Input=1.0W, 1g Target[1.098][122][1.342]W/kg_ 10g Target [0.699][0.777][0.855] 2/Area Scan (9x9x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.26 W/kg

SPC/SPC 30H Input=1.0W, 1g Target[1.098][122][1.342]W/kg_ 10g Target [0.699][0.777][0.855] 2/Zoom Scan (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 42.08 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.95 W/kg
SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.762 W/kg
Smallest distance from peaks to all points 3 dB below = 16.5 mm
Ratio of SAR at M2 to SAR at M1 = 63.8%
Maximum value of SAR (measured) = 1.30 W/kg

SPC/SPC 30H Input=1.0W, 1g Target[1.098][122][1.342]W/kg_ 10g Target [0.699][0.777][0.855] 2/Z Scan (1x1x42): Measurement

grid: dx=20mm, dy=20mm, dz=5mm
Penetration depth = 12.86 (11.33, 13.63) [mm]
Maximum value of SAR (interpolated) = 1.57 W/kg

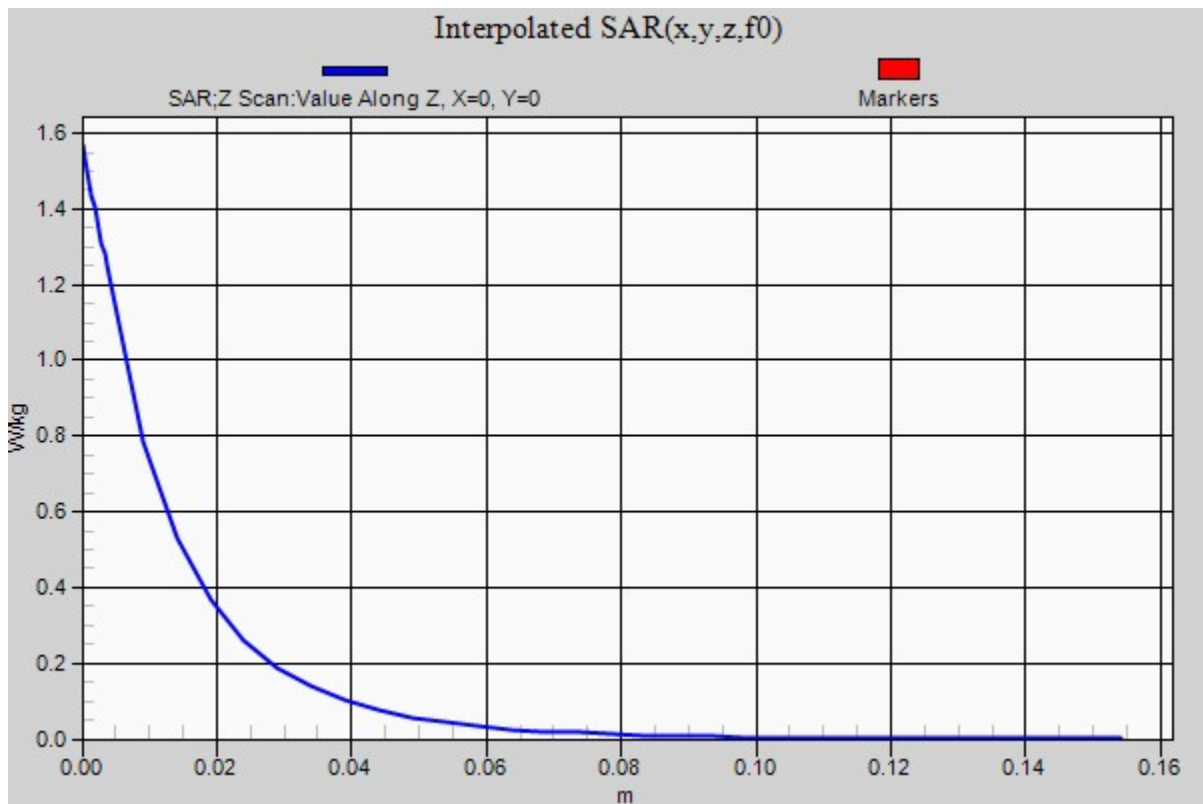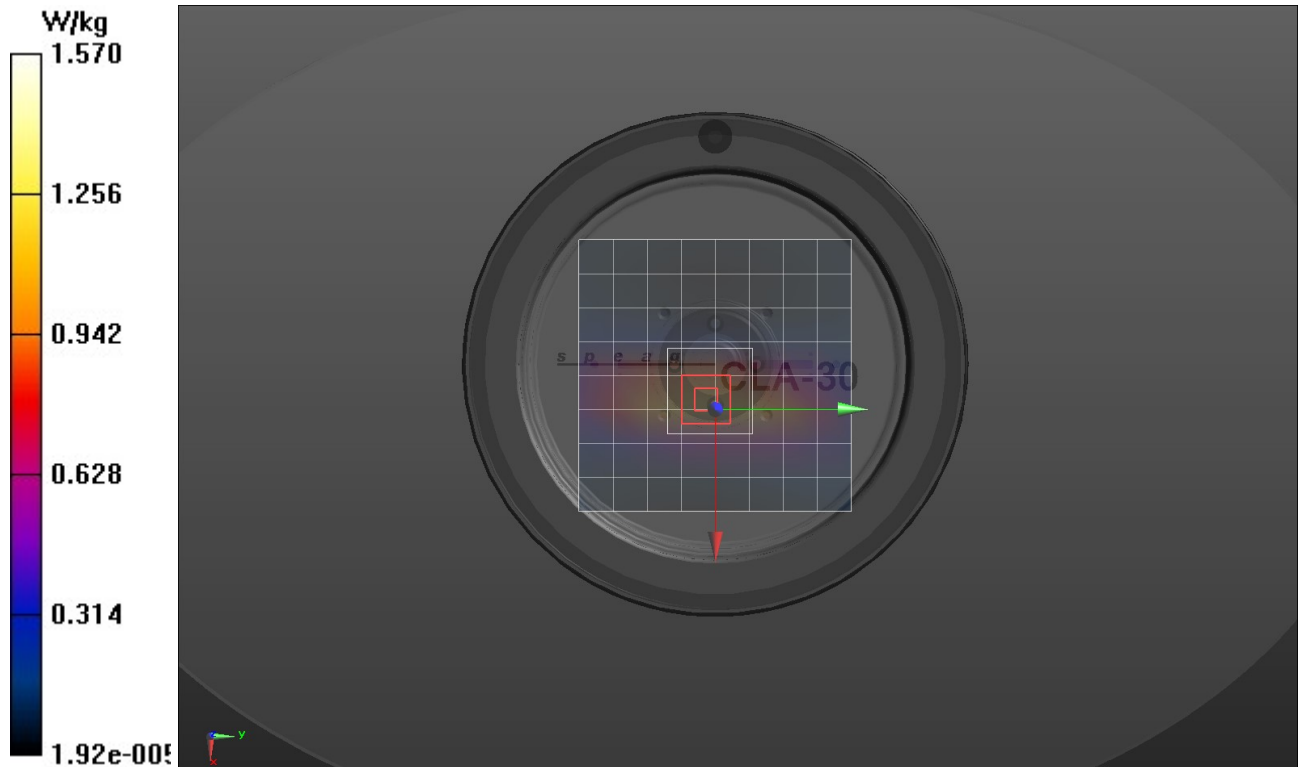

DUT: CLA-30 - SN1005; Type: CLA-30; Serial: SN1005

Procedure Name: SPC 30H Input=1.0W, 1g Target[1.098][1.22][1.342]W/kg_ 10g Target [0.699][0.777][0.855] 2 2

Communication System: UID 0, CW (0); Frequency: 30 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 30$ MHz; $\sigma = 0.69$ S/m; $\epsilon_r = 56.09$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

Date/Time: 8/15/2023 5:42:43 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN7826; ConvF(15.21, 15.21, 15.21) @ 30 MHz; Calibrated: 5/16/2023
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/18/2023
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

SPC/SPC 30H Input=1.0W, 1g Target[1.098][1.22][1.342]W/kg_ 10g Target [0.699][0.777][0.855] 2 2/Area Scan (9x9x1):



Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.28 W/kg

SPC/SPC 30H Input=1.0W, 1g Target[1.098][1.22][1.342]W/kg_ 10g Target [0.699][0.777][0.855] 2 2/Zoom Scan (6x6x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 42.35 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 1.95 W/kg
SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.756 W/kg
Smallest distance from peaks to all points 3 dB below = 16.5 mm
Ratio of SAR at M2 to SAR at M1 = 63.6%
Maximum value of SAR (measured) = 1.30 W/kg

SPC/SPC 30H Input=1.0W, 1g Target[1.098][1.22][1.342]W/kg_ 10g Target [0.699][0.777][0.855] 2 2/Z Scan (1x1x42):

Measurement grid: dx=20mm, dy=20mm, dz=5mm
Penetration depth = 12.64 (11.26, 13.55) [mm]
Maximum value of SAR (interpolated) = 1.58 W/kg

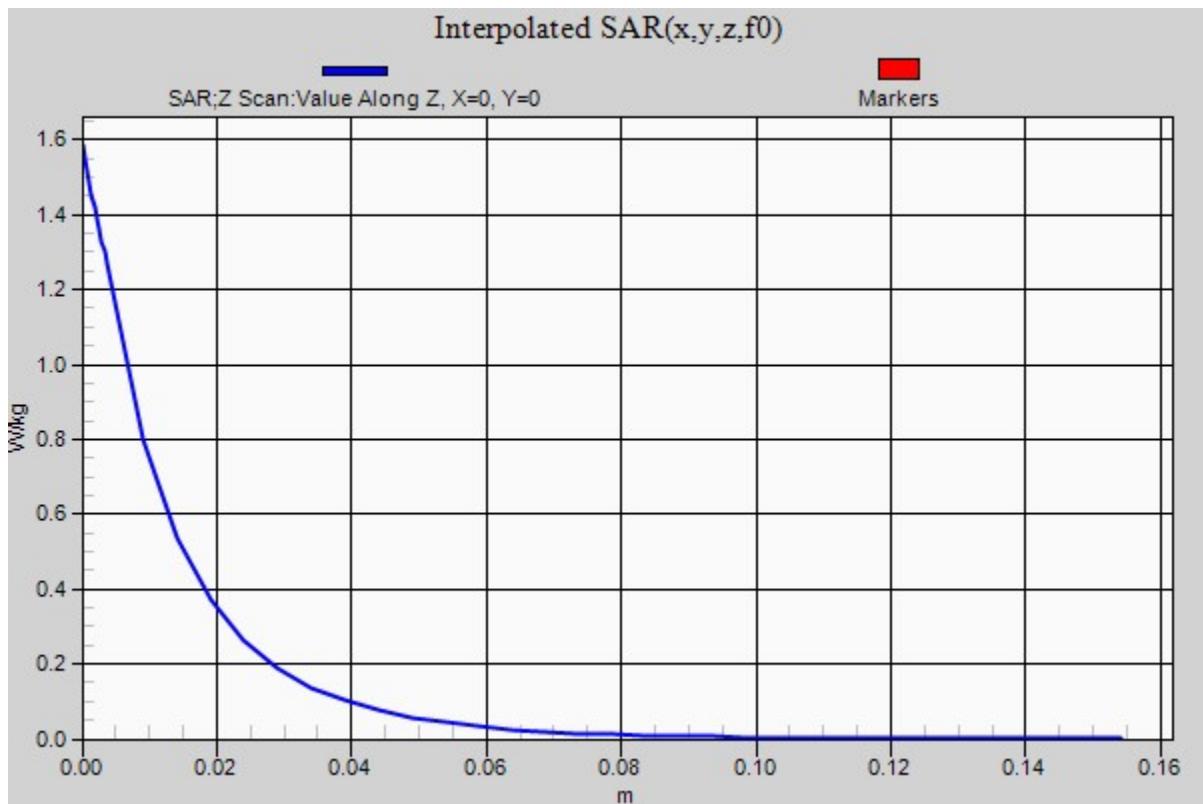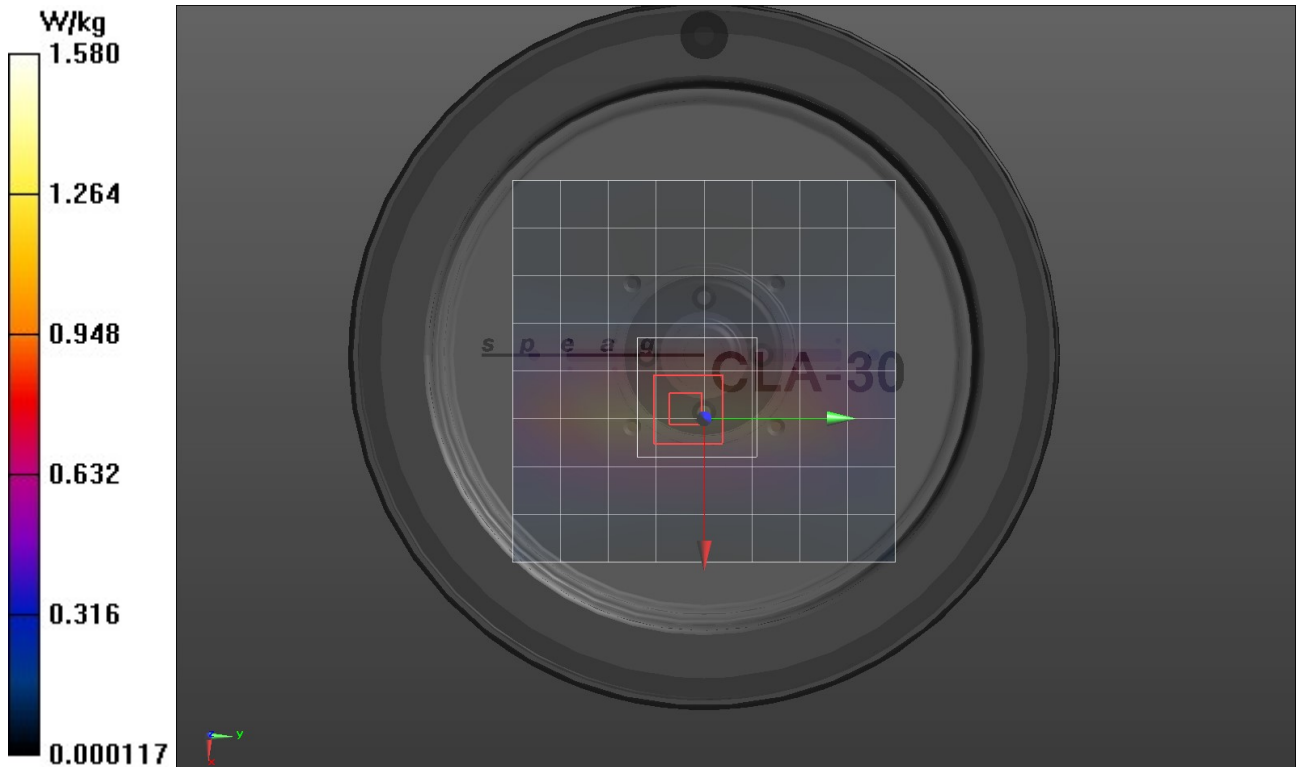

APPENDIX B – MEASUREMENT PLOTS OF MAXIMUM MEASURED SAR

Plot B1

DUT: MIDLAND75-822; Type: PTT; Serial: Sample Prototype

Procedure Name: B1-MIDLAND75-822, 27.005 MHz Body Config[25mm] , Belt Clip B1, Audio A1 AntT1, Bat P1

Communication System: UID 0, AM(0); Frequency: 27.005 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 27.005$ MHz; $\sigma = 0.693$ S/m; $\epsilon_r = 56.168$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Date/Time: 8/15/2023 6:23:20 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN7826; ConvF(15.21, 15.21, 15.21) @ 27.005 MHz; Calibrated: 5/16/2023
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/18/2023
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

30H/B1-MIDLAND75-822, 27.005 MHz Body Config[25mm] , Belt Clip B1, Audio A1 AntT1, Bat P1/Area Scan (8x27x1):

Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0741 W/kg

30H/B1-MIDLAND75-822, 27.005 MHz Body Config[25mm] , Belt Clip B1, Audio A1 AntT1, Bat P1/Zoom Scan (5x5x7)/Cube 0:

Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.737 V/m; Power Drift = 1.27 dB

Peak SAR (extrapolated) = 0.169 W/kg

SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.042 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 65.6%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0781 W/kg


30H/B1-MIDLAND75-822, 27.005 MHz Body Config[25mm] , Belt Clip B1, Audio A1 AntT1, Bat P1/Z Scan (1x1x42): Measurement

grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = 13.10 (8.327, 14.97) [mm]

Maximum value of SAR (interpolated) = 0.0259 W/kg

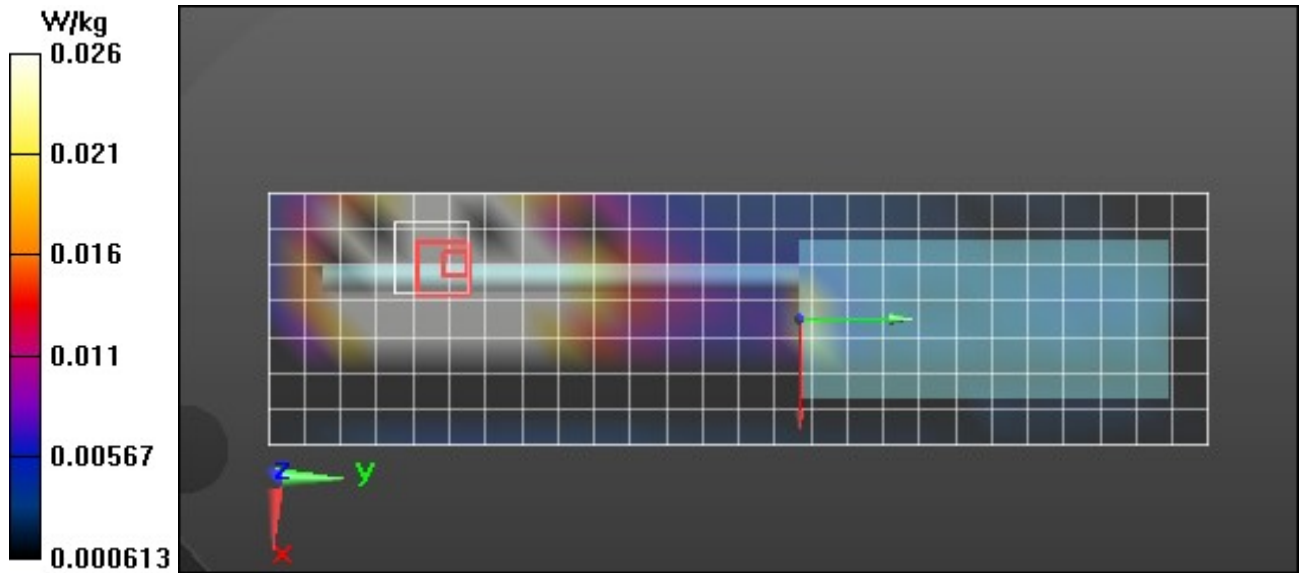

F12

DUT: MIDLAND75-822; Type: PTT; Serial: Sample Prototype

Procedure Name: F12-MIDLAND75-822, 27.385 MHz Face Config[25mm] , AntT1, bat P1

Communication System: UID 0, FM(0); Frequency: 27.385 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 27.385$ MHz; $\sigma = 0.693$ S/m; $\epsilon_r = 56.158$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Date/Time: 8/16/2023 7:25:31 PM

DASY5 Configuration:

- Probe: EX3DV4 - SN7826; ConvF(15.21, 15.21, 15.21) @ 27.385 MHz; Calibrated: 5/16/2023
- Sensor-Surface: 4mm (Mechanical Surface Detection (Locations From Previous Scan Used)), Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn353; Calibrated: 4/18/2023
- Phantom: ELI V5.0 (20deg probe tilt); Type: QD OVA 002 Ax; Serial: 1234
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

30H/F12-MIDLAND75-822, 27.385 MHz Face Config[25mm] , AntT1, bat P1/Area Scan (8x21x1): Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.103 W/kg

30H/F12-MIDLAND75-822, 27.385 MHz Face Config[25mm] , AntT1, bat P1/Zoom Scan (5x5x7)/Cube 0: Measurement grid:

dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.651 V/m; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 0.109 W/kg

SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.061 W/kg

Ratio of SAR at M2 to SAR at M1 = 75.2%

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.0843 W/kg

30H/F12-MIDLAND75-822, 27.385 MHz Face Config[25mm] , AntT1, bat P1/Z Scan (1x1x42): Measurement grid: dx=20mm, dy=20mm, dz=5mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Penetration depth = 27.56 (24.45, 30.77) [mm]

Maximum value of SAR (interpolated) = 0.0268 W/kg

