

EMC TEST REPORT

No. 2107583STO-107

Electromagnetic disturbances

EQUIPMENT UNDER TEST

Equipment: Electronic control gear for LED
Type/Model: ICPSLC24-10NA-IL-2
Manufacturer: IKEA of Sweden AB
Tested by request of: IKEA of Sweden AB

SUMMARY

Referring to the emission limits, and the operating mode during the tests specified in this report, the equipment complies with the requirements according to the following standards:


FCC 47 CFR Part 15: Radio frequency devices, Subpart B: Unintentional radiators. Class B equipment.

ICES-005 Issue 5: Lighting Equipment, Class B. (2018)

For details, see clause 2 – 4.

Date of issue: January 4, 2022

Tested by:


Per Granberg

Approved by:


Anders Lindström

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Revision History

Test report no.	Release no.	Date of issue	Description
2107583STO-107	1	January 4, 2022	

Terms, definition and abbreviations

The following terms, definitions and abbreviations may be used throughout the report.

Term/definition/abbreviation	Meaning
AAN	Asymmetrical Artificial Network
AC	Alternating Current
AE	Associated Equipment
AMN	Artificial Mains Network
ANSI	American National Standards Institute
AV	Average
BW	Bandwidth
CAV	CISPR Average
CFR	Code of Federal Regulations
CISPR	Comité international spécial des perturbations radioélectriques
CM	Common Mode
CMAD	Common Mode Absorption Device
DC	Direct Current
DM	Differential Mode
EM	Electromagnetic
EMC	Electromagnetic Compatibility
EUT	Equipment Under Test
F	Fail
FAR	Fully Anechoic Room
FCC	Federal Communications Commission
F_x	Highest fundamental frequency generated or used within the EUT, or highest frequency at which it operates
ICES	Interference-Causing Equipment Standard
H	Horizontal
I_{ref}	Reference Current
ISN	Impedance Stabilizing Network
MU	Measurement Uncertainty
N/A	Not Applicable
P	Pass
PE	Protective Earth
PK	Peak
Pol.	Polarisation
QP / QPK	Quasi-Peak
RBW	Resolution Bandwidth
RF	Radio Frequency
RGP	Reference Ground Plane
RH	Relative Humidity
RMS	Root Mean Square
Rx	Receiver / Receiving
SAC	Semi-Anechoic Chamber
Tx	Transmitter / Transmitting
V	Vertical
VBW	Video Bandwidth

CONTENTS

	Page
1. Client Information	5
2. Equipment under test (EUT).....	5
2.1 Identification of the EUT	5
2.2 Test set up and EUT photos	6
2.3 Additional information about the EUT	7
2.4 Peripheral/auxiliary equipment.....	7
2.5 Decision rule	7
3. Test Specifications	8
3.1 Additions, deviations and exclusions from standards and accreditation	8
3.2 Test site	8
3.3 Mode of operation during the test	8
4. Test Summary	9
5. Conducted continuous disturbances	10
5.1 Test results, AC Power input port, Class B.....	11
5.2 Test equipment	12
6. Radiated rf Emission in the frequency-range 30 MHz – 13 GHz	13
6.1 Test results, 30 – 1000 MHz, FCC/ICES-005, Class B	15
6.2 Test results, 1 – 13 GHz, FCC, Class B	16
6.3 Test equipment	17

1. CLIENT INFORMATION


The EUT has been tested by request of

Company	IKEA of Sweden AB Box 702 SE-343 81 Älmhult Sweden
Name of contact	Jonas Filipsson
Client observer	-

2. EQUIPMENT UNDER TEST (EUT)

2.1 Identification of the EUT

Equipment:	Electronic control gear for LED														
Type/Model:	ICPSLC24-10NA-IL-2														
Brand name:	IKEA														
S/N:	-														
Manufacturer:	IKEA of Sweden AB Box 702 SE-343 81 Älmhult Sweden														
Highest clock frequency, F_X:	38,4 MHz														
Transmitting freq.:	2405 – 2480 MHz														
Software version:	-														
Hardware version:	-														
Mounting position: (during normal use)	☐ Table-top ☐ Floor-standing ☐ Wall/ceiling ☐ Hand-held ☒ Other: Various														
Input ratings	Voltage [V]	Freq. [Hz]	Current [A]	Power [W]	Coupling										
☒ AC	100 – 120	50/60	0.13	-	<table> <tr> <td>L1</td><td>L2</td><td>L3</td><td>N</td><td>PE</td></tr> <tr> <td>☒</td><td>☐</td><td>☐</td><td>☒</td><td>☐</td></tr> </table>	L1	L2	L3	N	PE	☒	☐	☐	☒	☐
L1	L2	L3	N	PE											
☒	☐	☐	☒	☐											
☐ DC					<table> <tr> <td>V+</td><td>V-</td><td>PE</td></tr> <tr> <td>☐</td><td>☐</td><td>☐</td></tr> </table>	V+	V-	PE	☐	☐	☐				
V+	V-	PE													
☐	☐	☐													
☐ Battery					<table> <tr> <td>V+</td><td>V-</td><td></td></tr> <tr> <td>☐</td><td>☐</td><td></td></tr> </table>	V+	V-		☐	☐					
V+	V-														
☐	☐														
☐ Other:															
Output ratings	Voltage [V]	Freq. [Hz]	Current [A]	Power [W]	Coupling										
☒ DC	24	-	0 – 0.42	10	<table> <tr> <td>V+</td><td>V-</td><td>PE</td></tr> <tr> <td>☒</td><td>☒</td><td>☐</td></tr> </table>	V+	V-	PE	☒	☒	☐				
V+	V-	PE													
☒	☒	☐													
☐ Other:															
Supplementary information:	Class II														

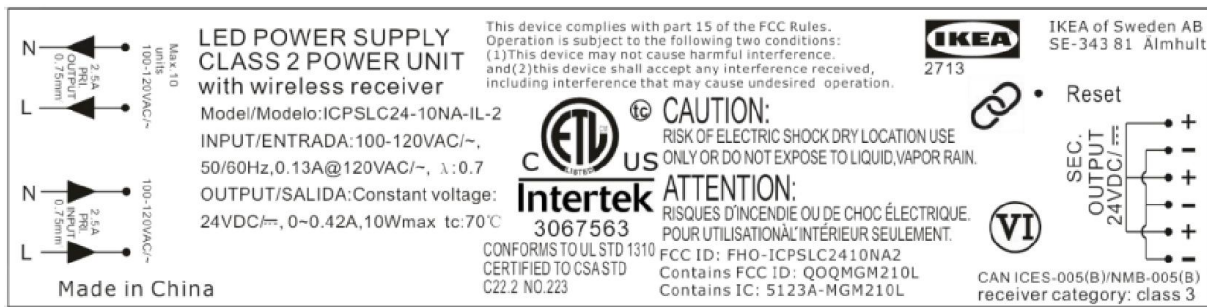

Photo/copy of marking/rating plate(s)

2.2 Test set up and EUT photos

Test set up and EUT photos are enclosed in Annex 1 to this test report.

2.3 Additional information about the EUT

The ICPSLC24-10NA-IL-2 is a LED-driver with output of 24 V DC, provided radio remote controlled dimming and on-off.

The EUT has the following ports:

Port type	Port name	Length [m]	Shielded
AC I/O			
☒ AC power input	AC mains/power supply	-	☐
☐ AC power output			☐
DC I/O			
☐ DC power input			☐
☒ DC power output	Load port (1)	3.5	☐
Signal/control I/O			
☐ Signal/control			☐
☐ Telecom/network			☐
Supplementary information:			
(1) Interface (port) of a driver for connecting a long (≥ 3 m) load cable with a light source.			

The EUT ports were connected according to the following:

Port name	Cable type	Connected to
Power supply	2 core	AC-mains
Load/local wired	2 core	LED light load of 10 W

2.4 Peripheral/auxiliary equipment

Peripheral

Equipment needed for correct operation of the EUT, but not included as part of the testing.

Equipment	Manufacturer	Type/Model	S/N
Load	IKEA	10 W, LED-strip	-
Remote control	IKEA	605121-1 7AX-RC-ZAB-H0 3V, Zigbee3.0	-

2.5 Decision rule

The statements of conformity are reported as:

Passed – When the measured values are within the specified limits.

Failed – When one or more measures values are outside the specified limits.

3. TEST SPECIFICATIONS

3.1 Additions, deviations and exclusions from standards and accreditation

The following editions of basic standards were applied instead of the standards referenced in FCC 47 CFR Part 15 and ICES-005:

Referenced	Applied
ANSI C63.4-2014	ANSI C63.4-2014

3.2 Test site

Measurements were performed at:

Intertek Semko AB.
Torshamnsgatan 43,
P.O. Box 1103
SE-164 22 Kista

Intertek Semko AB is an FCC listed test site with site registration number 90913
Intertek Semko AB is an FCC accredited conformity assessment body with designation number SE0002

Intertek Semko AB is an Industry Canada listed test facility with IC assigned code 2042G

Measurement chambers

Measurement Chamber	Type of chamber	IC Site filing #
☒ STORA HALLEN	Semi-anechoic 10 m and 3 m	2042G-2
☐ BJÖRKHALLEN	Semi-anechoic 3 m	2042G-1
☐ 5 m CHAMBER	Semi-anechoic 5 m	2042G-3

3.3 Mode of operation during the test

Mode no.	Supply	Description
1	120 V, 60 Hz	Max light intensity, provided with a LED-load of 10 W

Test	Mode of operation
Conducted continuous emission	1
Radiated emission of EM fields	1

4. TEST SUMMARY

The test has been carried out at the Intertek Semko AB premises in Kista, Sweden.

The results in this report apply only to sample tested.

Result: P – F – N/A

EMISSION TESTS					
Chapter	Standard(s)	Description	Port type(s)	Note(s)	Verdict
5	ANSI C63.4	Conducted continuous emission	AC input	-	P
6	ANSI C63.4	Radiated emission of EM fields	Enclosure	-	P
Supplementary information:					


5. CONDUCTED CONTINUOUS DISTURBANCES in the frequency-range 0.15 – 30 MHz

Date of test	Temp. [°C]	Humidity [%RH]	Tested by
November 12, 2021	22	25	PEG

Test setup and procedure:	EUT was placed 0.8 m from the AMN /ISN. Overview sweeps were performed for each lead of the cable(s). AE requiring mains power to operate was/were connected to AMN /ISN terminated with 50 Ω , when applicable.		
EUT position:	☒ Table-top (EUT 0.4 m from the RGP) ☐ Floor-standing (EUT 12 mm from the RGP) ☐ Other:		
Tested port type(s):	Coupling device	Measurement uncertainty	
		Frequency range	Value
☒ AC power	☒ AMN	0.15 – 30 MHz	± 3.3 dB
Supplementary information: Measurement uncertainty is calculated in accordance with CISPR 16-4-2:2011. The measurement uncertainty is given with a confidence of 95 %.			

Port	Frequency [MHz]	Voltage limits [dBμV] (2)	
		QP	AV
Limits FCC Part 15 subpart B and ICES-005			
☐ AC power input Class A	0.15 – 0.50	79	66
	0.50 – 30.0	73	60
☒ AC power input Class B	0.15 – 0.50	66 – 56 (1)	56 – 46 (1)
	0.50 – 5.00	56	46
	5.00 – 30.0	60	50
Supplementary information: (1) The limits decrease linearly with the logarithm of the frequency. (2) At transitional frequencies the lower limit applies.			

5.1 Test results, AC Power input port, Class B

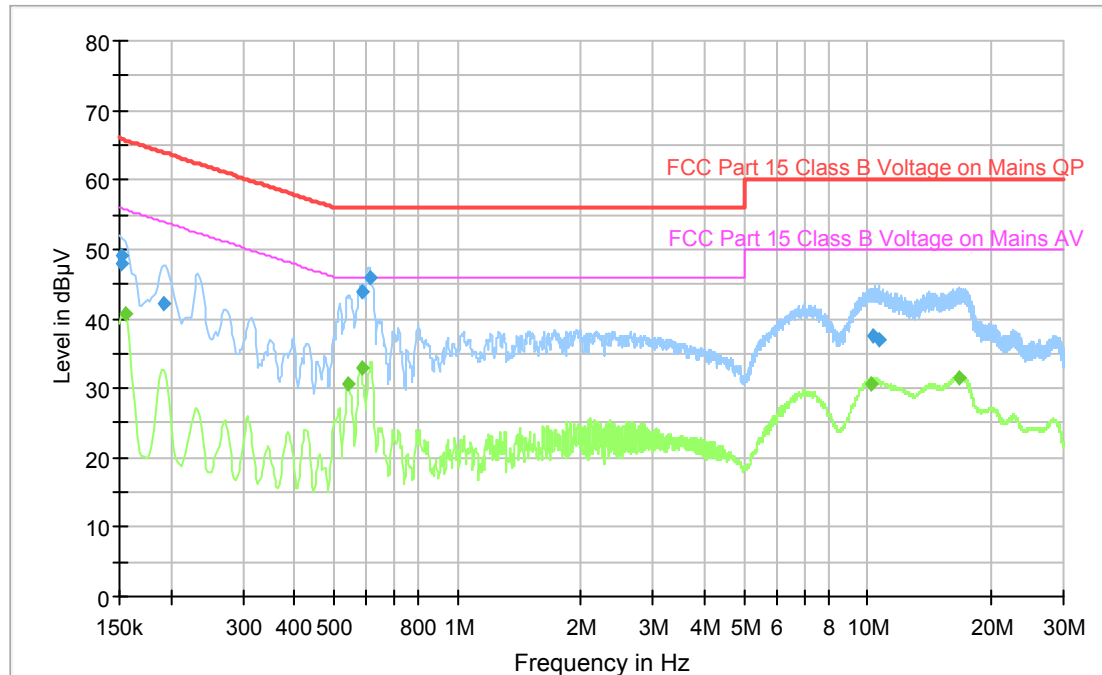

Diagram, Peak and AV overview sweep

Measurement results, Quasi-peak & Average

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	PE
0.152250	49.24	---	65.88	16.64	1000.0	9.000	L1	GND
0.154500	---	40.62	55.75	15.13	1000.0	9.000	L1	GND
0.192750	42.09	---	63.92	21.83	1000.0	9.000	L1	GND
0.543750	---	30.69	46.00	15.31	1000.0	9.000	L1	GND
0.582000	---	32.93	46.00	13.07	1000.0	9.000	L1	GND
0.586500	43.77	---	56.00	12.23	1000.0	9.000	L1	GND
0.609000	45.87	---	56.00	10.13	1000.0	9.000	L1	GND
10.189500	---	30.50	50.00	19.50	1000.0	9.000	L1	GND
10.268250	37.65	---	60.00	22.35	1000.0	9.000	L1	GND
10.664250	37.01	---	60.00	22.99	1000.0	9.000	L1	GND
16.653750	---	31.43	50.00	18.57	1000.0	9.000	L1	GND

Result [dBμV] = Analyser reading [dBμV] + cable loss [dB] + LISN insertion loss [dB]

5.2 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. date	Cal. interval
Measurement software	Rohde & Schwarz	EMC32 - V10.50.40	--	--	--
Receiver	Rohde & Schwarz	ESU 8	12866	2021-07-07	1 year
AMN / LISN	Rohde & Schwarz	ESH3-Z5	2728	2021-07-05	1 year
Pulse limiter	Rohde & Schwarz	ESH3-Z5	32455	2021-07-06	1 year
Measurement cable	Huber+Suhner	RG 223/U	9815	2021-06-07	1 year
Measurement cable	Suhner	G03232 D-01	9701	2021-06-07	1 year

6. RADIATED RF EMISSION IN THE FREQUENCY-RANGE 30 MHz – 13 GHz


Date of test	Temp. [°C]	Humidity [%RH]	Tested by
November 18, 2021	21	29	PEG
December 9, 2021	21	20	PEG

Test setup and procedure:	The EUT was placed on a non-conductive support on the RGP. Overview sweeps were performed with the measurement receiver in max hold mode and the peak detector activated in the frequency range 30 – 1000 MHz. Above 1 GHz, both the peak and average detectors were activated, when applicable. During height scan above 1 GHz the EUT was kept in antennas cone of radiation.	
EUT position:	☒ Table-top (EUT 0.8 m from the RGP) ☐ Floor-standing (EUT 12 mm from the RGP) ☐ Other:	
Highest measured frequency:	☐ $F_X \leq 108$ MHz: 1 GHz ☐ $108 \text{ MHz} < F_X \leq 500$ MHz: 2 GHz ☐ $500 \text{ MHz} < F_X \leq 1$ GHz: 5 GHz ☒ $F_X > 1$ GHz: 5 x F_X up to a max. of 40 GHz ☐ F_X is unknown: 40 GHz	
Frequency range:	Measuring distance	Measurement uncertainty
☒ 30 to 1000 MHz	3 m	± 5.1 dB
☐ 30 to 1000 MHz	10 m	± 5.0 dB
☒ 1.0 to 18 GHz	3 m	± 4.5 dB
☐ 18 to 26 GHz	3 m	± 4.8 dB
☐ 26 to 40 GHz	3 m	± 5.7 dB
Supplementary information: Measurement uncertainty is calculated in accordance with CISPR 16-4-2:2011. The measurement uncertainty is given with a confidence of 95 %.		

Test	Freq. [MHz]	Meas. angle [°]	Antenna			RBW [kHz]			VBW [kHz]
			Type	Height	Pol.	QP	PK	AV	PK
Preview	30 – 1000	0 – 359	Bilog	1 – 4 m	V and H	-	120	-	1000
Final						120	-	-	-
Preview	1000 – 40000	0 – 359	Horn	1 – 4 m		-	1000	1000	3000
Final						-	1000	1000	-

Measurement distance [m]	Frequency [MHz]	Limits [dBµV/m]		
		QP	PK	AV
Limits, FCC, Class A				
□ 3 / □ 10	30 – 88	49.5 / 39.1	-	-
	88 – 216	54.0 / 43.5	-	-
	216 – 960	56.9 / 46.4	-	-
	960 – 1000	60.0 / 49.5	-	-
□ 3	Above 1000	-	80.0	60.0
Limits, FCC, Class B				
☒ 3 / □ 10	30 – 88	40.0 / 29.5	-	-
	88 – 216	43.5 / 33.1	-	-
	216 – 960	46.0 / 35.6	-	-
	960 – 1000	54.0 / 43.5	-	-
☒ 3	Above 1000	-	74.0	54.0
Limits, ICES-005 Class A				
□ 3 / □ 10	30 – 88	49.5 / 39.1	-	-
	88 – 216	54.0 / 43.5	-	-
	230 – 1000	56.9 / 46.4	-	-
Limits, ICES-005, Class B				
☒ 3 / □ 10	30 – 88	40.0 / 29.5	-	-
	88 – 216	43.5 / 33.1	-	-
	230 – 1000	46.0 / 35.6	-	-

6.1 Test results, 30 – 1000 MHz, FCC/ICES-005, Class B

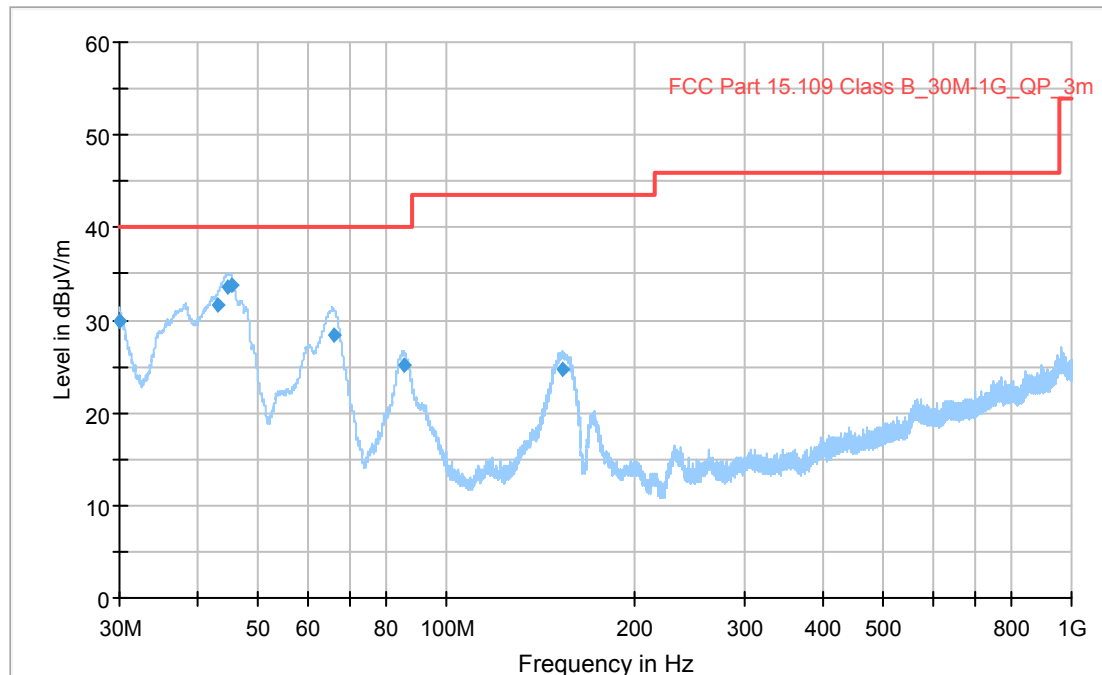

Diagram, Peak overview sweep


Measurement results, Quasi-peak

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.000	29.79	40.00	10.21	1000.0	120.0	100.0	V	276.0
43.080	31.63	40.00	8.37	1000.0	120.0	100.0	V	163.0
44.790	33.67	40.00	6.33	1000.0	120.0	103.0	V	123.0
45.420	33.71	40.00	6.29	1000.0	120.0	103.0	V	103.0
65.940	28.45	40.00	11.55	1000.0	120.0	117.0	V	143.0
85.290	25.11	40.00	14.89	1000.0	120.0	118.0	V	55.0
152.880	24.77	43.52	18.75	1000.0	120.0	100.0	V	297.0

The EUT also fulfil the class B limit of ICES-005, see limit table on page 14.

Result [dBµV/m] = Analyser reading [dBµV] + Antenna factor [1/m] - Amplifier gain [dB] + Cable loss [dB]

6.2 Test results, 1 – 13 GHz, FCC, Class B

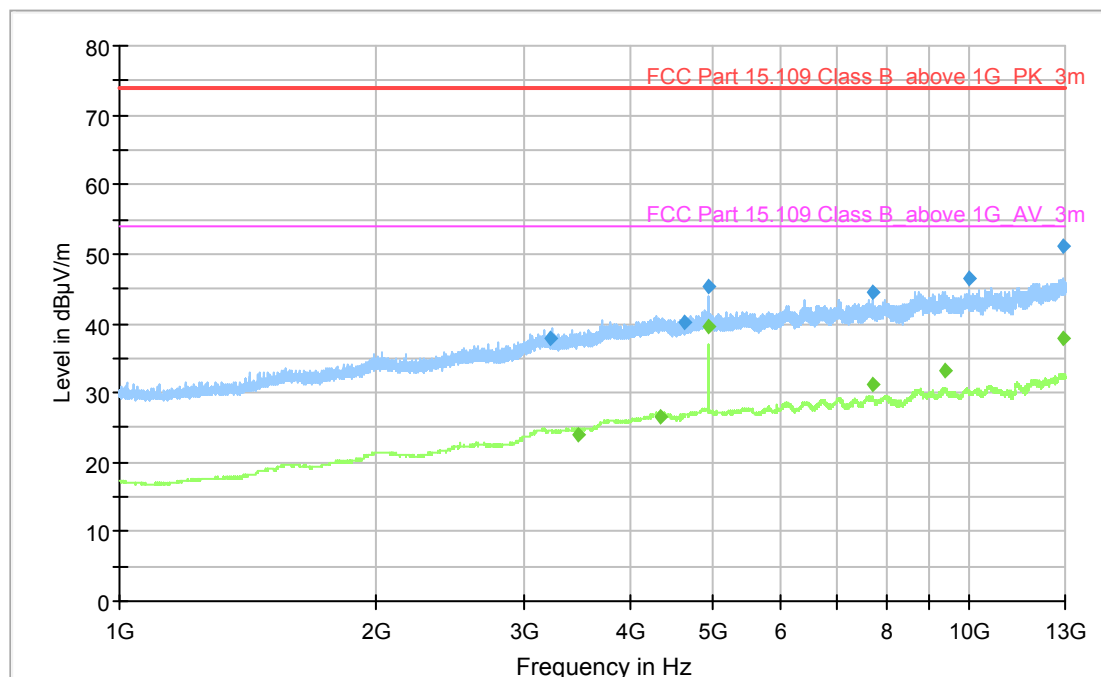

Diagram, Peak and Average overview sweep

Measurement results, Peak and Average

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol
3224.250	37.77	---	74.00	36.23	1000.0	1000.0	305.0	H
3462.000	---	23.97	54.00	30.03	1000.0	1000.0	100.0	H
4342.250	---	26.43	54.00	27.57	1000.0	1000.0	100.0	V
4632.250	40.27	---	74.00	33.73	1000.0	1000.0	325.0	V
4952.750	---	39.56	54.00	14.44	1000.0	1000.0	254.0	V
4952.750	45.45	---	74.00	28.55	1000.0	1000.0	321.0	H
7696.000	---	31.29	54.00	22.71	1000.0	1000.0	325.0	H
7704.250	44.34	---	74.00	29.66	1000.0	1000.0	100.0	H
9400.250	---	33.21	54.00	20.79	1000.0	1000.0	325.0	H
10036.500	46.64	---	74.00	27.36	1000.0	1000.0	169.0	V
12928.250	51.22	---	74.00	22.78	1000.0	1000.0	117.0	V
12956.750	---	37.76	54.00	16.24	1000.0	1000.0	325.0	H

Frequency (MHz)	Azimuth (deg)	Corr. (dB/m)
3224.250	53.0	-4
3462.000	-5.0	-3
4342.250	124.0	0
4632.250	163.0	0
4952.750	188.0	1
4952.750	173.0	1
7696.000	203.0	7
7704.250	-5.0	7
9400.250	74.0	9
10036.500	183.0	10
12928.250	200.0	14
12956.750	99.0	14

Result [dBμV/m] = Analyser reading [dBμV] + Antenna factor [1/m] - Amplifier gain [dB] + Cable loss [dB]

6.3 Test equipment

Equipment type	Manufacturer	Model	Inv. No.	Last Cal. date	Cal. interval
Measurement software	Rohde & Schwarz	EMC32 - V11.30.00	--	--	--
Measurement Receiver	Rohde & Schwarz	ESW44	33890	2021-07-21	1 year
Antenna	Chase	CBL 6111A	34200	2020-03-18	3 years
Pre-amplifier	SEMKO	AM1331	7992	2021-09-30	1 year
Horn antenna	Rohde & Schwarz	HF907	31245	2020-01-17	3 years
Pre-amplifier	Bonn	BLMA 0118-M	31246	2021-09-08	1 year
Measurement cable	Huber & Suhner	Sucoflex 106	39122	2021-05-06	1 year
Measurement cable	Rosenberger	LA5-S003-7000	39148	2021-05-06	1 year
Measurement cable	Rosenberger	LA5-S003-7000	39163	2021-02-04	1 year