





HERMON LABORATORIES

Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Compliance	Verdict: PASS
Date(s):		13-Apr-23	
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.7 Spurious emission measurements in 30 - 1000 MHz range at low carrier frequency



MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

256QAM
10 MHz
ANTENNA CHAIN: #2

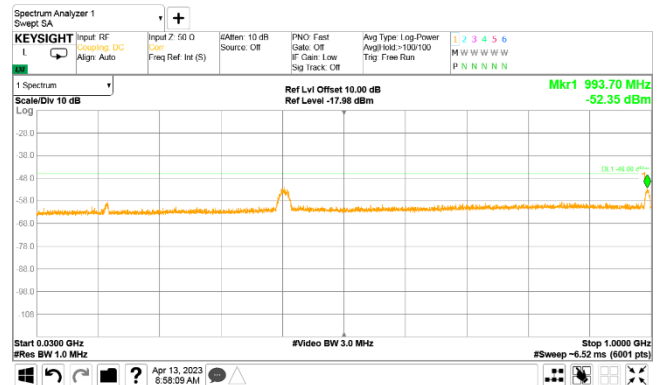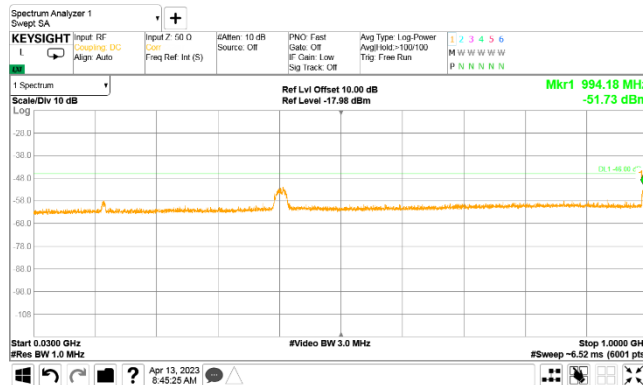

ANTENNA CHAIN: #3

ANTENNA CHAIN: #4

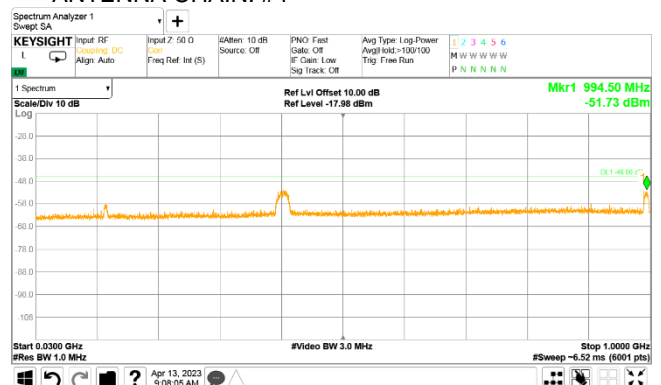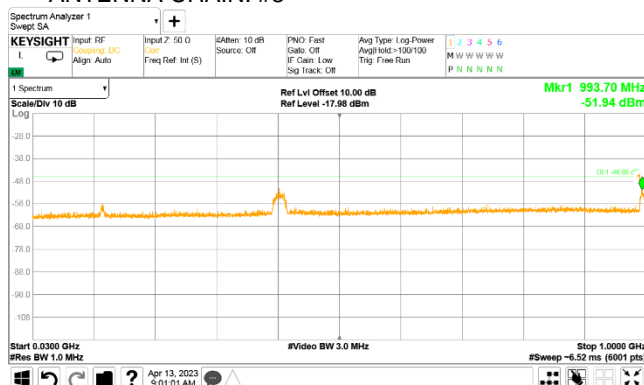





HERMON LABORATORIES

Test specification: Section 96.41(e)(3), Conducted spurious emissions	
Test procedure: Section 96.41(e)(3)	
Test mode: Compliance	Verdict: PASS
Date(s): 13-Apr-23	
Temperature: 21 °C	Relative Humidity: 54 %
Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:	

Plot 7.6.8 Spurious emission measurements in 30 - 1000 MHz range at mid carrier frequency




MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

256QAM
10 MHz
ANTENNA CHAIN: #2

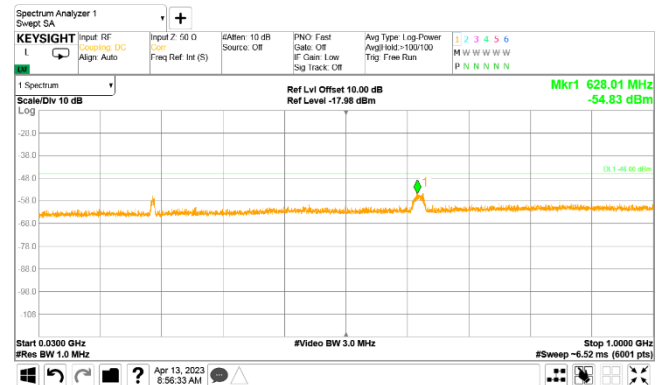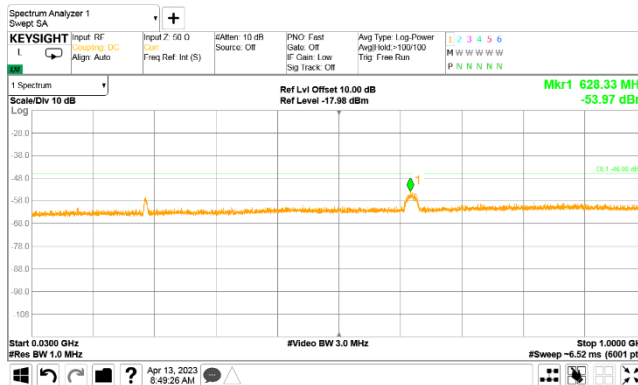

ANTENNA CHAIN: #3

ANTENNA CHAIN: #4

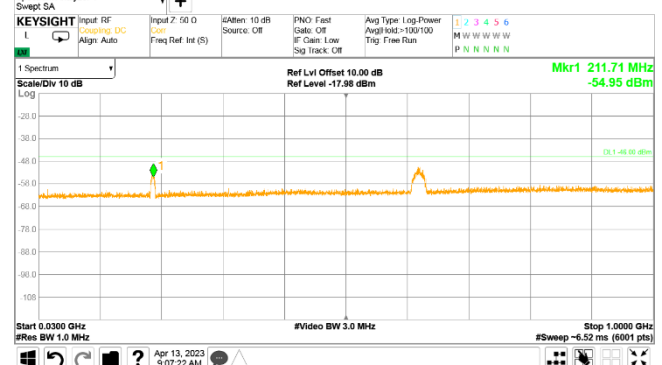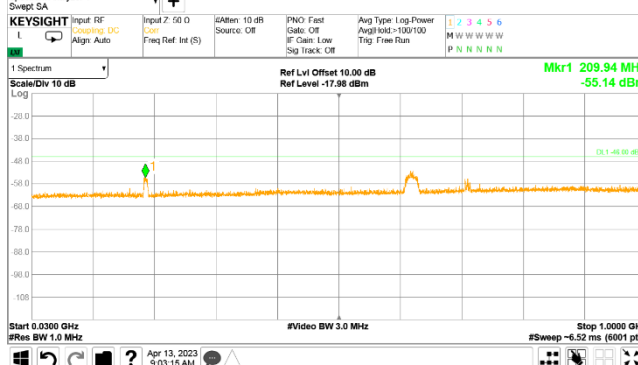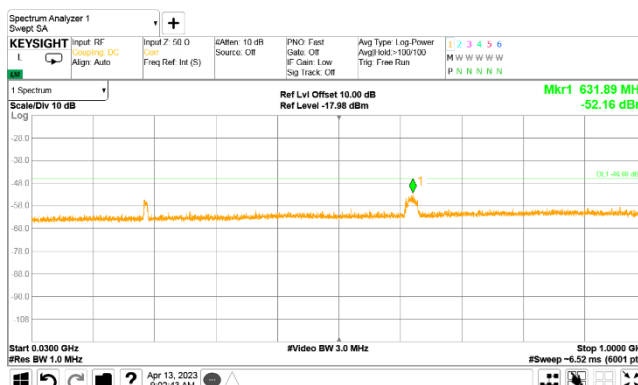





HERMON LABORATORIES

Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Apr-23			
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.9 Spurious emission measurements in 30 - 1000 MHz range at high carrier frequency



MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

256QAM
10 MHz
ANTENNA CHAIN: #2

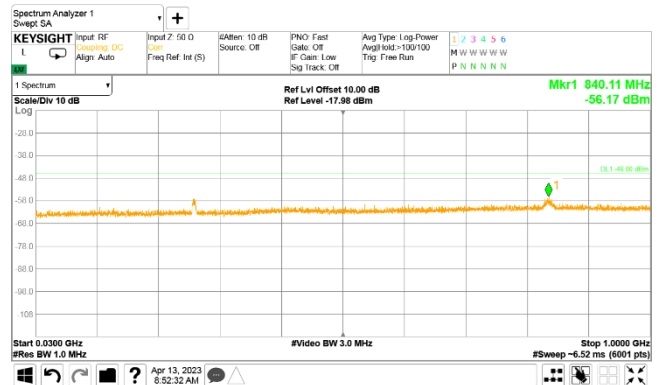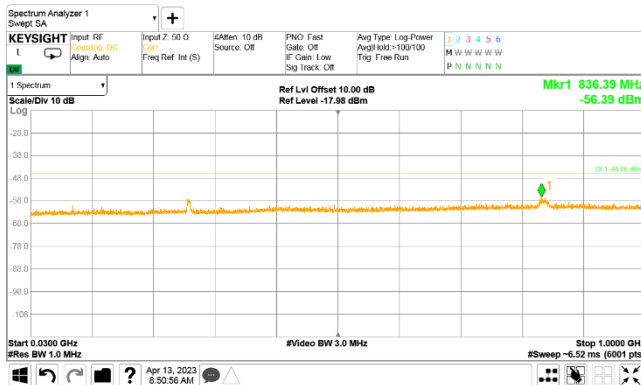

ANTENNA CHAIN: #3

ANTENNA CHAIN: #4

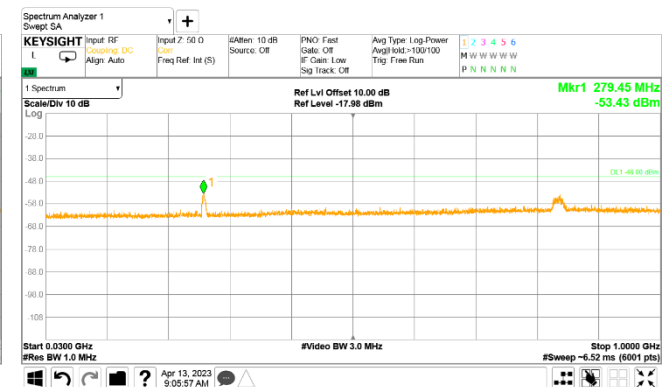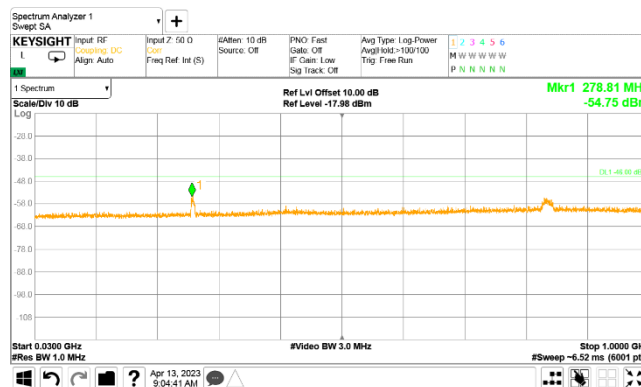





HERMON LABORATORIES

Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Apr-23			
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			


Plot 7.6.10 Spurious emission measurements in 1000 - 3000 MHz range at low carrier frequency

MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1


256QAM
10 MHz
ANTENNA CHAIN: #2

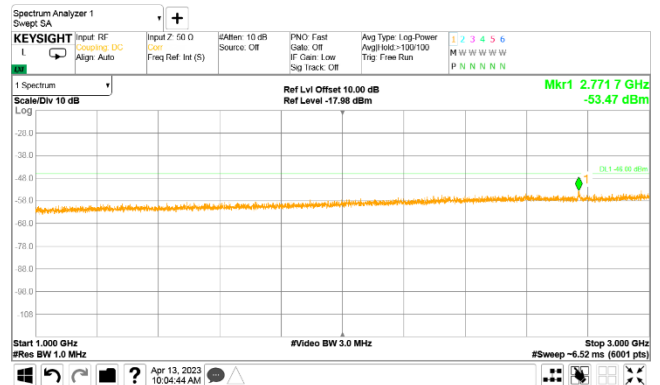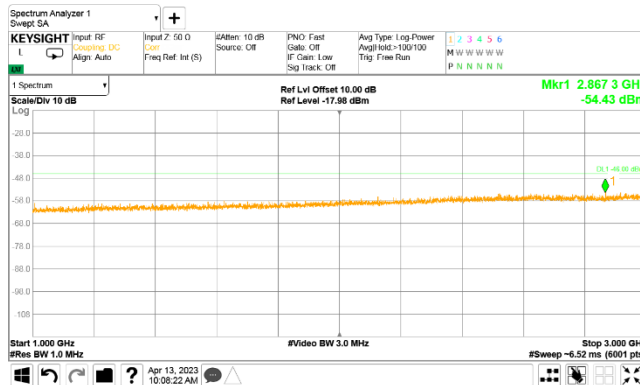

ANTENNA CHAIN: #3

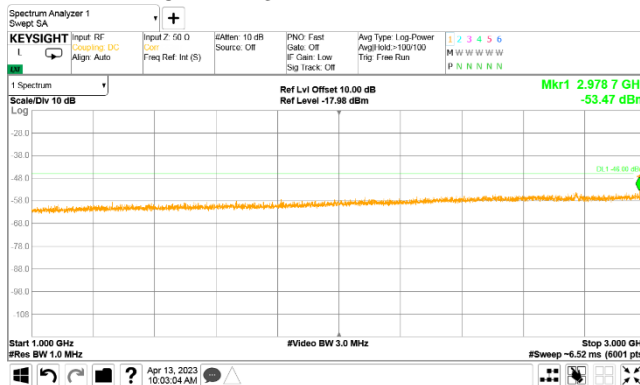

ANTENNA CHAIN: #4

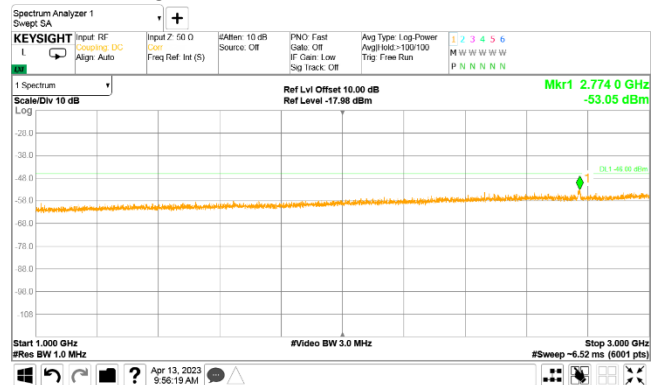





HERMON LABORATORIES

Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Apr-23			
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			


Plot 7.6.11 Spurious emission measurements in 1000 - 3000 MHz range at mid carrier frequency

MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1


256QAM
10 MHz
ANTENNA CHAIN: #2

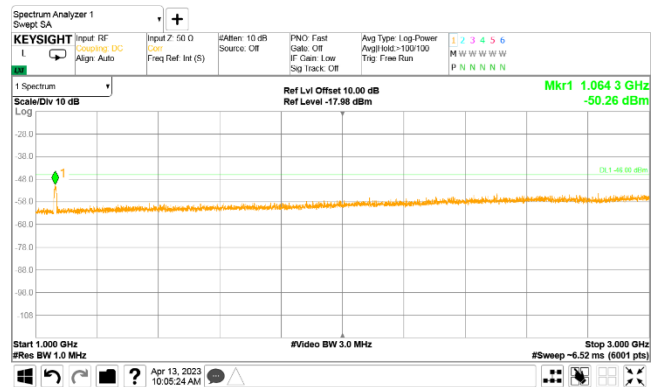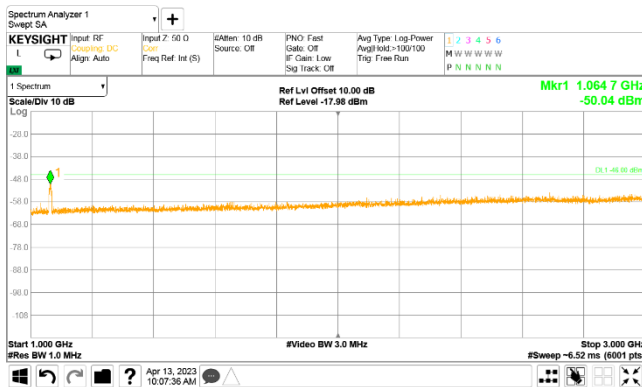

ANTENNA CHAIN: #3

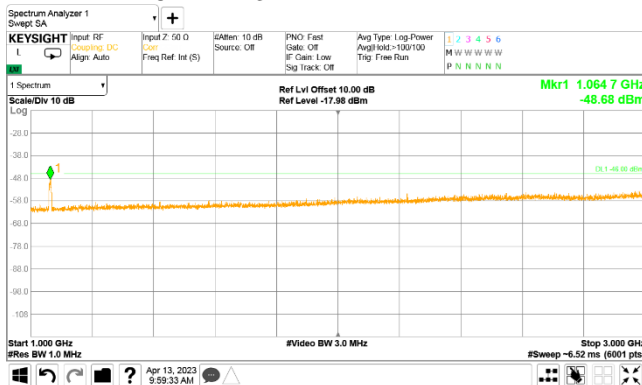


ANTENNA CHAIN: #4

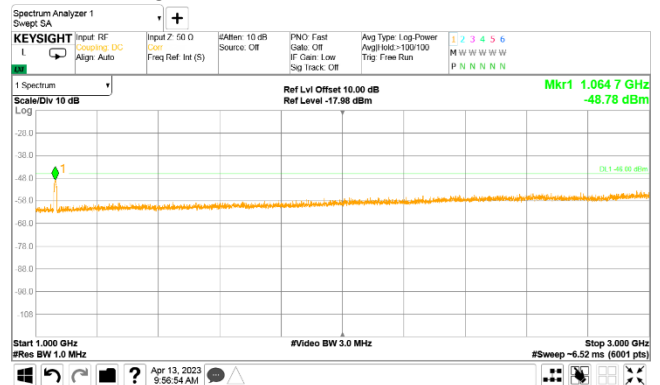


Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Apr-23			
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.12 Spurious emission measurements in 1000 - 3000 MHz range at high carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

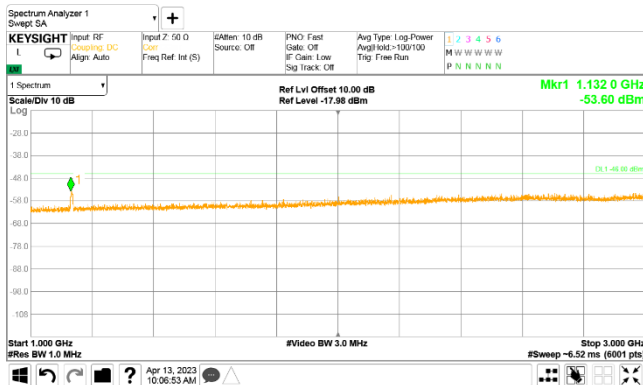


256QAM
10 MHz
ANTENNA CHAIN: #2

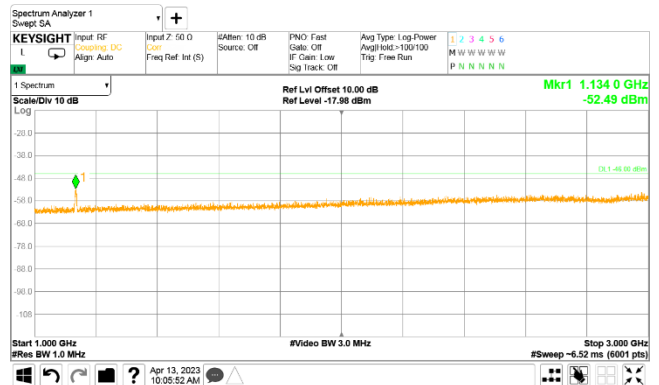

ANTENNA CHAIN: #3

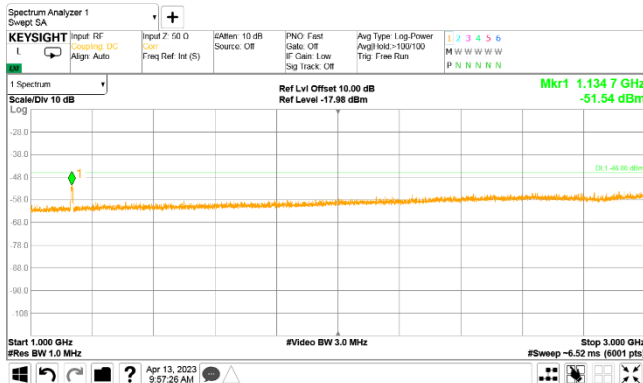


ANTENNA CHAIN: #4

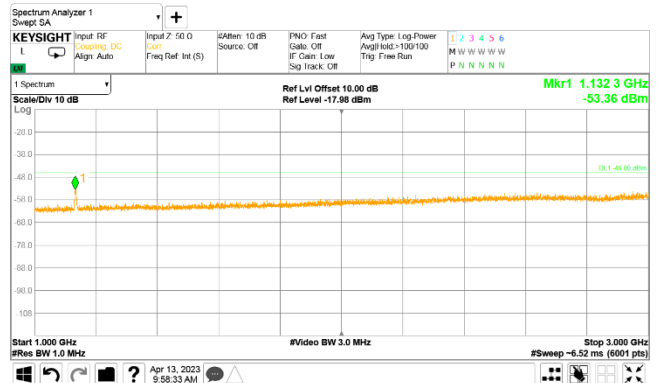


Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Apr-23			
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.13 Spurious emission measurements in 3000 - 3530 MHz range at low carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

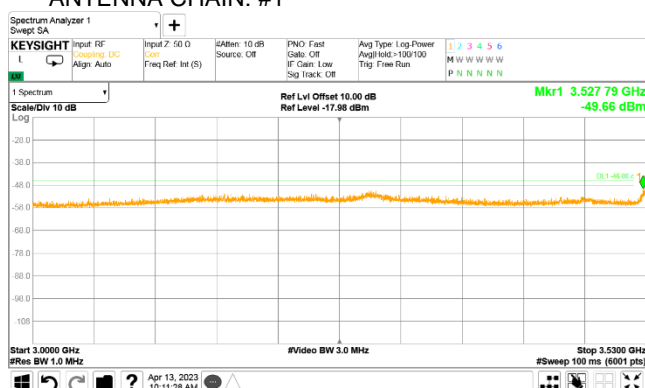


256QAM
10 MHz
ANTENNA CHAIN: #2

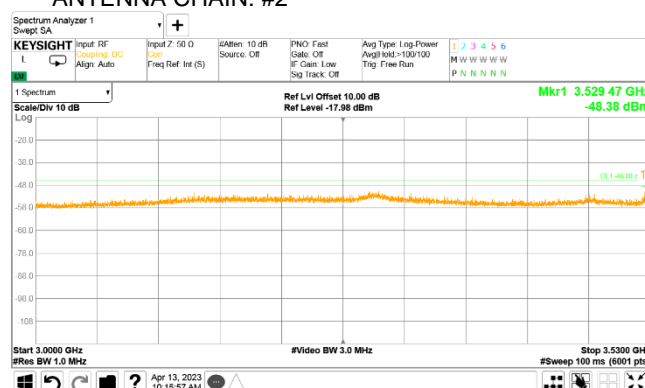

ANTENNA CHAIN: #3

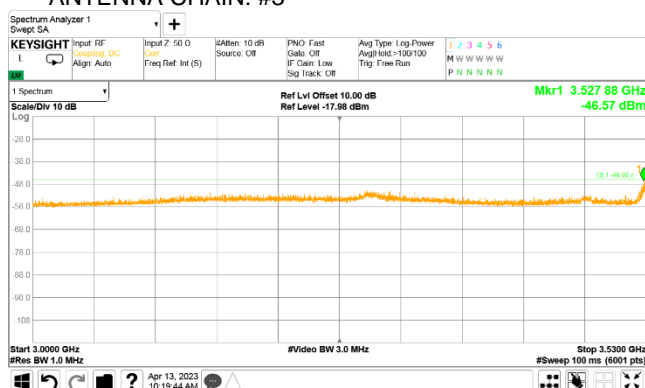


ANTENNA CHAIN: #4

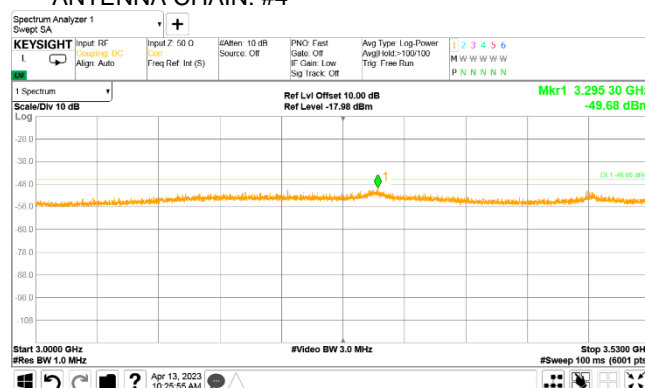


Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Apr-23			
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.14 Spurious emission measurements in 3000 - 3530 MHz range at mid carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

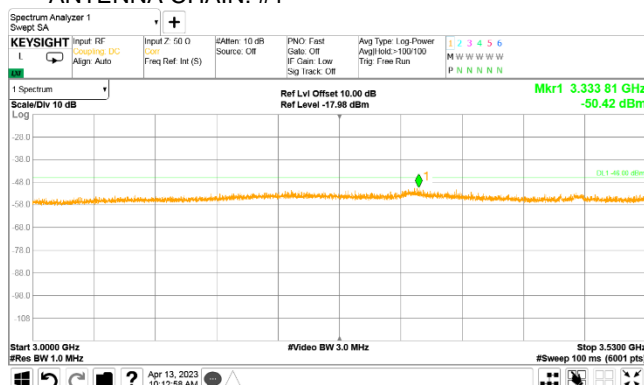


256QAM
10 MHz
ANTENNA CHAIN: #2

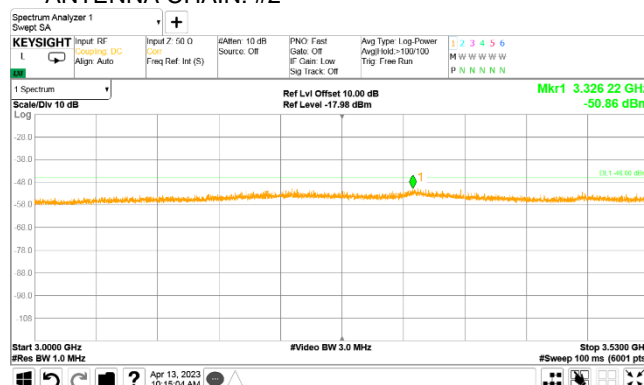

ANTENNA CHAIN: #3

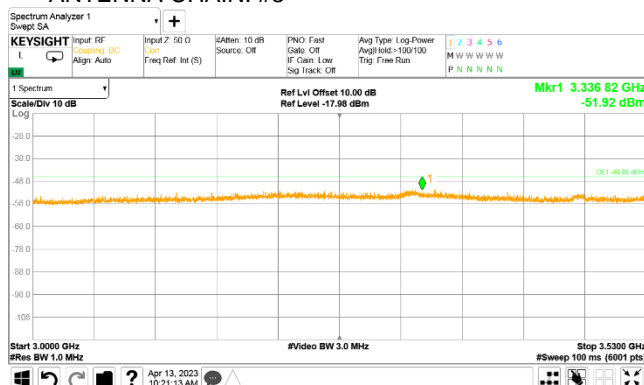

ANTENNA CHAIN: #4

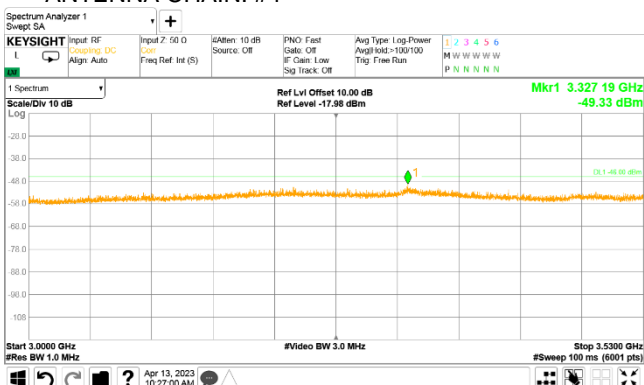




HERMON LABORATORIES


Test specification:		Section 96.41(e)(3), Conducted spurious emissions	
Test procedure:		Section 96.41(e)(3)	
Test mode:		Verdict: PASS	
Date(s):			
13-Apr-23			
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.15 Spurious emission measurements in 3000 - 3530 MHz range at high carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

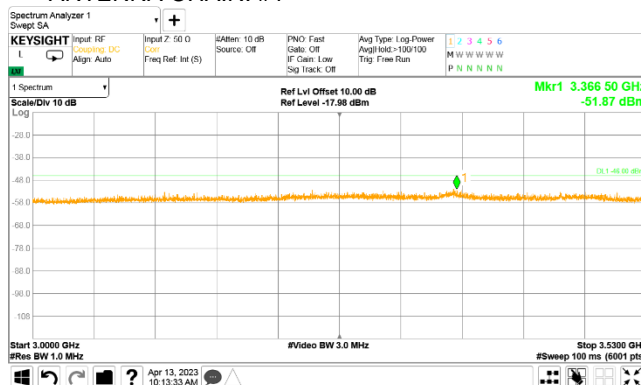

256QAM
10 MHz
ANTENNA CHAIN: #2

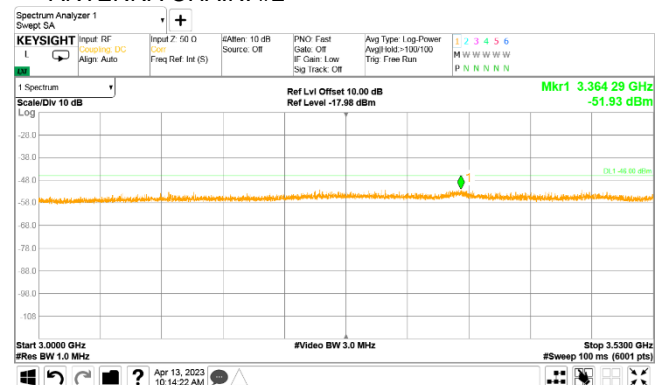

ANTENNA CHAIN: #3

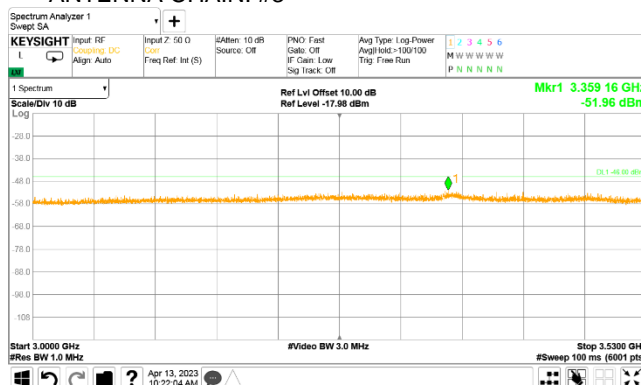

ANTENNA CHAIN: #4






HERMON LABORATORIES


Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Apr-23			
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.16 Spurious emission measurements in 3720 - 4400 MHz range at low carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

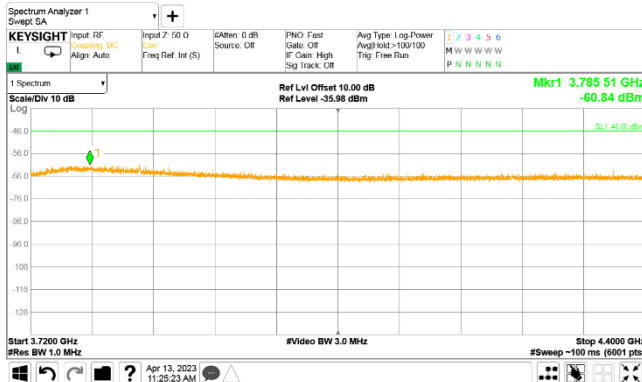


256QAM
10 MHz
ANTENNA CHAIN: #2

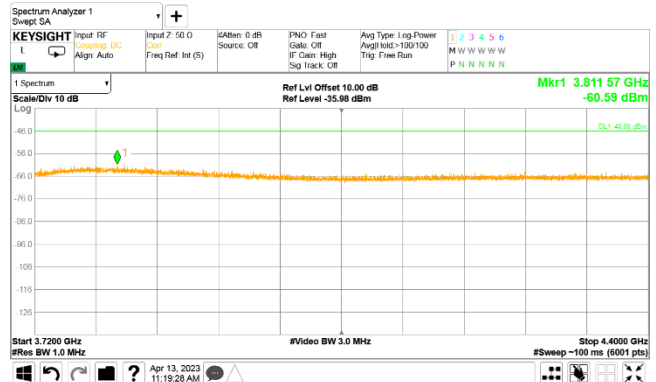

ANTENNA CHAIN: #3

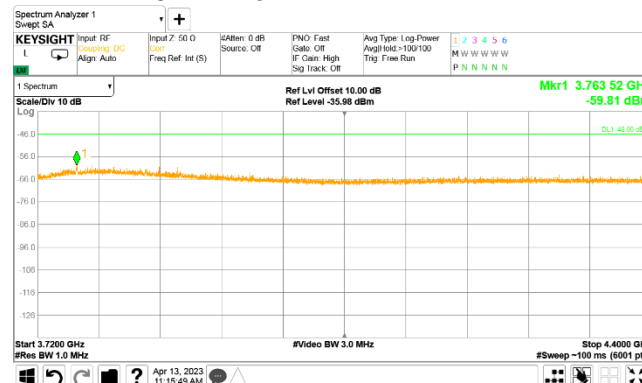

ANTENNA CHAIN: #4

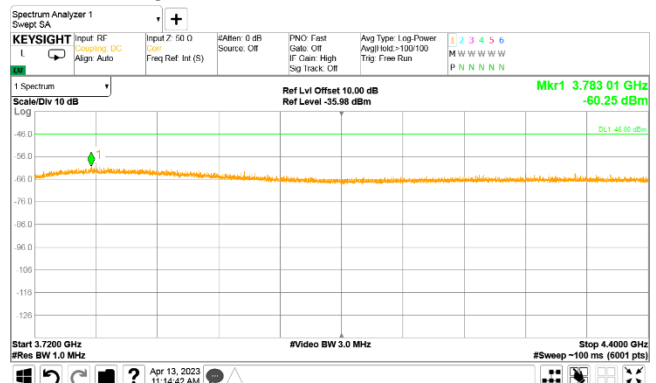




HERMON LABORATORIES


Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Apr-23			
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.17 Spurious emission measurements in 3720 - 4400 MHz range at mid carrier frequency


MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

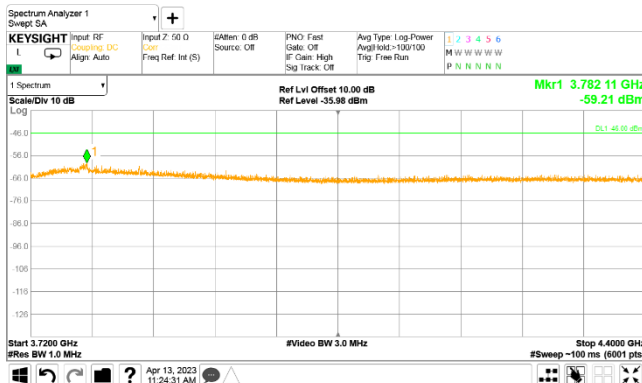


256QAM
10 MHz
ANTENNA CHAIN: #2

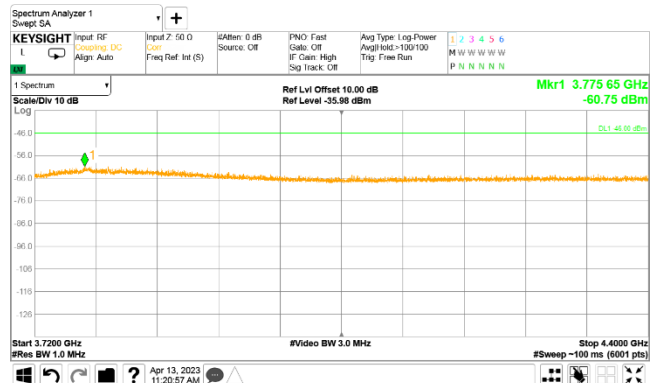

ANTENNA CHAIN: #3

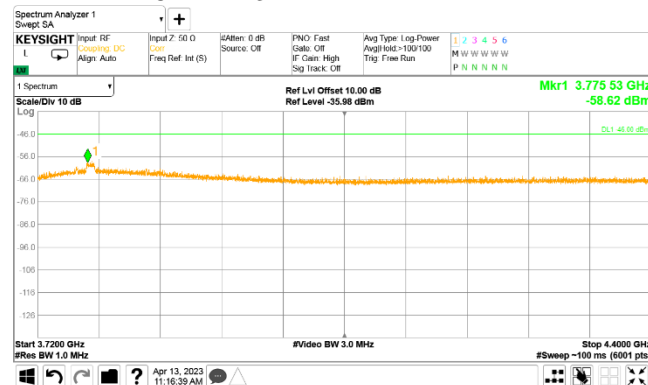

ANTENNA CHAIN: #4

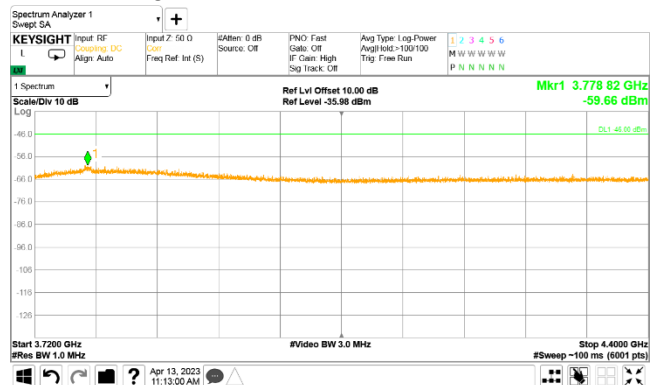




HERMON LABORATORIES

Test specification: Section 96.41(e)(3), Conducted spurious emissions			
Test procedure: Section 96.41(e)(3)			
Test mode: Compliance		Verdict: PASS	
Date(s): 13-Apr-23			
Temperature: 21 °C	Relative Humidity: 54 %	Air Pressure: 1012 hPa	Power: 110 VAC, 50 Hz
Remarks:			

Plot 7.6.18 Spurious emission measurements in 3720 - 4400 MHz range at high carrier frequency

MODULATION:
CHANNEL SPACING:
ANTENNA CHAIN: #1

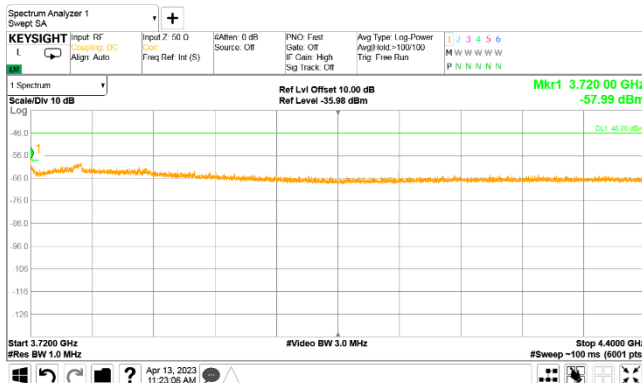

256QAM
10 MHz
ANTENNA CHAIN: #2

