

FCC REPORT

(GSM & WCDMA)

Applicant: Shenzhen Huafului Technology Co., Ltd.

Address of Applicant: Unit 1401 14/F, Jin qi zhi gu mansion Liu xian street, Xili, Nan shan district Shenzhen China

Equipment Under Test (EUT)

Product Name: Smartphone

Model No.: KINGKONG MINI 2

Trade mark: CUBOT

FCC ID: 2AHZ5KKMN2

Applicable standards: FCC CFR Title 47 Part 2
FCC CFR Title 47 Part 22 Subpart H
FCC CFR Title 47 Part 24 Subpart E
FCC CFR Title 47 Part 27 Subpart L

Date of sample receipt: 09 Sep., 2020

Date of Test: 10 Sep., to 09 Oct., 2020

Date of report issued: 02 Nov., 2020

Test Result: PASS*

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2. Version

Version No.	Date	Description
00	10 Oct., 2020	Original
01	02 Nov., 2020	Update Applicant, Address, Manufacturer Address, Factory Address.

Tested by:

Mike Ou
Test Engineer

Date:

02 Nov., 2020

Reviewed by:

Winner Zhang
Project Engineer

Date:

02 Nov., 2020

3. Contents

	Page
1. COVER PAGE	1
2. VERSION	2
3. CONTENTS	3
4. TEST SUMMARY	4
5. GENERAL INFORMATION	5
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF E. U. T.	5
5.3 TEST ENVIRONMENT AND MODE.....	7
5.4 DESCRIPTION OF SUPPORT UNITS	7
5.5 MEASUREMENT UNCERTAINTY	7
5.6 ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD	7
5.7 LABORATORY FACILITY	8
5.8 LABORATORY LOCATION.....	8
5.9 TEST INSTRUMENTS LIST	8
6. TEST RESULTS	9
6.1 CONDUCTED OUTPUT POWER, ERP AND EIRP	9
6.2 PEAK-TO-AVERAGE POWER RATIO.....	13
6.3 OCCUPY BANDWIDTH.....	16
6.4 MODULATION CHARACTERISTIC.....	25
6.5 OUT OF BAND EMISSION AT ANTENNA TERMINALS.....	25
6.6 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT	35
6.7 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT	41
6.8 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT	45
7. TEST SETUP PHOTO	48
8. EUT CONSTRUCTIONAL DETAILS.....	49

4. Test Summary

Test Item	Section in CFR 47	Result
RF Exposure (SAR)	Part 1.1307 Part 2.1093	Pass (Please refer to SAR Report)
RF Output Power	Part 2.1046 Part 22.913 (a)(5) Part 24.232 (c) Part 27.50 (d)(4)	Pass
Peak-to-Average Power Ratio	Part 24.232 (d) Part 27.50(d)(5)	Pass
Modulation Characteristics	Part 2.1047	Pass
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 22.917(b) Part 24.238(b) Part 27.53(h)	Pass
Out of band emission at antenna terminals	Part 2.1053 Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	Pass
Field strength of spurious radiation	Part 22.917 (a) Part 24.238 (a) Part 27.53 (h)	Pass
Frequency stability vs. temperature	Part 22.355 Part 24.235 Part 27.54 Part 2.1055(a)(1)(b)	Pass
Frequency stability vs. voltage	Part 22.355 Part 24.235 Part 27.54 Part 2.1055(d)(2)	Pass
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. The cable insertion loss used by "RF Output Power" and other conduction measurement items is 0.5dB(Fundamental Frequency below 1GHz)/1.0dB(Fundamental Frequency above 1GHz) (provided by the customer).		
Test Method:	ANSI/TIA-603-E-2016 ANSI C63.26-2015	

5. General Information

5.1 Client Information

Applicant:	Shenzhen Huafurui Technology Co., Ltd.
Address:	Unit 1401 14/F, Jin qi zhi gu mansion Liu xian street, Xili, Nan shan district Shenzhen China
Manufacturer/ Factory:	Shenzhen Huafurui Technology Co., Ltd.
Address:	Unit 1401 14/F, Jin qi zhi gu mansion Liu xian street, Xili, Nan shan district Shenzhen China

5.2 General Description of E.U.T.

Product Name:	Smartphone			
Model No.:	KINGKONG MINI 2			
Operation Frequency range:	GSM 850: 824.20MHz-848.80MHz PCS1900: 1850.20MHz-1909.80MHz WCDMA Band V: 826.4MHz-846.6MHz WCDMA Band II: 1852.4 MHz-1907.6 MHz WCDMA Band IV: 1712.4 MHz-1752.6 MHz			
Modulation type:	2G	☒ Voice(GMSK)	☒ GPRS(GMSK)	☒ EGPRS(GMSK, 8PSK)
	3G	☒ RCM(QPSK)	☒ HSUPA(QPSK)	☒ HSDPA(QPSK,16QAM)
Antenna type:	Internal Antenna			
Antenna gain:	GSM 850: 0.89 dBi(declare by Applicant) PCS 1900: 1.23 dBi(declare by Applicant) WCDMA Band V: 0.89 dBi(declare by Applicant) WCDMA Band II: 1.23 dBi(declare by Applicant) WCDMA Band IV: 1.15 dBi(declare by Applicant)			
Power supply:	Rechargeable Li-ion Battery DC3.85V-3000mAh			
AC adapter:	Model: HJ-0501000E1-US Input: AC100-240V, 50/60Hz, 0.2A Output: DC 5.0V, 1.0A			
Test Sample Condition:	The test samples were provided in good working order with no visible defects.			

Operation Frequency List:

GSM 850		PCS1900	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
128	824.20	512	1850.20
129	824.40	513	1850.40
....			
189	836.40	660	1879.80
190	836.60	661	1880.00
191	836.80	662	1880.20
...	...	...	...
250	848.60	809	1909.60
251	848.80	810	1909.80
WCDMA Band V		WCDMA Band II	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
4132	826.40	9262	1852.40
4133	826.60	9263	1852.60
....			
4182	836.40	9399	1879.80
4183	836.60	9400	1880.00
4184	836.80	9401	1880.20
...	...	...	...
4232	846.40	9537	1907.40
4233	846.60	9538	1907.60
WCDMA Band IV			
Channel	Frequency (MHz)		
1312	1712.40		
1313	1712.60		
....			
1412	1732.40		
1413	1732.60		
1414	1732.80		
...	...		
1512	1752.40		
1513	1752.60		

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

GSM850			PCS1900		
Channel		Frequency(MHz)	Channel		Frequency(MHz)
Lowest	128	824.20	Lowest	512	1850.20
Middle	190	836.60	Middle	661	1880.00
Highest	251	848.80	Highest	810	1909.80
WCDMA Band V			WCDMA Band II		
Channel		Frequency(MHz)	Channel		Frequency(MHz)
Lowest	4132	826.40	Lowest	9262	1852.40
Middle	4183	836.60	Middle	9400	1880.00
Highest	4233	846.60	Highest	9538	1907.60
WCDMA Band IV					
Channel		Frequency(MHz)			
Lowest	1312	1712.40			
Middle	1413	1732.60			
Highest	1513	1752.60			

5.3 Test environment and mode

Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.85Vdc, Extreme: Low 3.50 Vdc, High 4.40Vdc
Test mode:	
GSM mode	Keep the EUT communication with simulated station in GSM mode
GPRS mode	Keep the EUT communication with simulated station in GPRS mode
EGPRS mode	Keep the EUT communication with simulated station in EGPRS mode
RMC mode	Keep the EUT communication with simulated station in RMC mode
HSDPA	Keep the EUT communication with simulated station in HSDPA mode
HSUPA	Keep the EUT communication with simulated station in HSUPA mode
Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes. Just the worst case position (H mode) shown in report.	

5.4 Description of Support Units

Test Equipment	Manufacturer	Model No.	Serial No.
Simulated Station	Anritsu	MT8820C	6201026545

5.5 Measurement Uncertainty

Parameters	Expanded Uncertainty
Radiated Emission (9kHz ~ 30MHz)	±3.12 dB (k=2)
Radiated Emission (30MHz ~ 1000MHz)	±4.32 dB (k=2)
Radiated Emission (1GHz ~ 18GHz)	±5.16 dB (k=2)
Radiated Emission (18GHz ~ 40GHz)	±3.20 dB (k=2)

5.6 Additions to, deviations, or exclusions from the method

No

5.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.8 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.

Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax: +86-755-23116366


Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.9 Test Instruments list

Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2020	07-21-2021
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-07-2020	03-06-2021
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2020	06-21-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-07-2020	03-06-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2020	06-21-2021
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170582	11-18-2019	11-17-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-07-2020	03-06-2021
Pre-amplifier	CD	PAP-1G18	11804	03-07-2020	03-06-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-05-2020	03-04-2021
Spectrum analyzer	Rohde & Schwarz	FSP40	100363	11-18-2019	11-17-2020
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-05-2020	03-04-2021
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-18-2019	11-17-2020
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-05-2020	03-04-2021
Signal Generator	R&S	SMR20	1008100050	03-05-2020	03-04-2021
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-07-2020	03-06-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-07-2020	03-06-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-07-2020	03-06-2021
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	09-25-2019	09-24-2020
				09-25-2020	09-24-2021
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	11-01-2019	11-31-2020
Simulated Station	Rohde & Schwarz	CMW500	140493	07-22-2020	07-21-2021

6. Test results

6.1 Conducted Output Power, ERP and EIRP

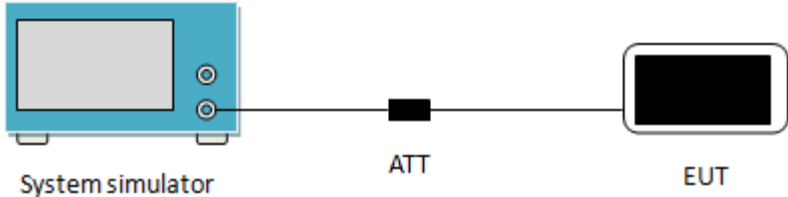Test Requirement:	FCC part 22.913(a)(5), FCC part 24.232(c), FCC part 27.50(d)(4)
Limit:	GSM 850: 7W, PCS 1900: 2W WCDMA Band V: 7W, WCDMA Band II: 2W, WCDMA Band IV: 1W
Test setup:	 The diagram illustrates the test setup. On the left is a blue box labeled 'System simulator'. A line connects it to a small black rectangle labeled 'ATT' (attenuator). Another line connects the 'ATT' to a black rectangle labeled 'EUT' (Equipment Under Test).
Test Procedure:	The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated station. Transmitter output power was read off in dBm.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data:

EUT Mode	Burst Average power (dBm)		
	128	190	251
	824.20 (MHz)	836.60 (MHz)	848.80 (MHz)
GSM 850	33.34	32.88	32.65
GPRS 850 (1 Uplink slot)	33.32	32.87	32.64
GPRS 850 (2 Uplink slot)	32.86	32.45	32.21
GPRS 850 (3 Uplink slot)	31.47	31.08	30.83
GPRS 850 (4 Uplink slot)	30.45	30.04	29.82
Antenna Gain (dBi)	0.89		
Max. ERP (dBm)	32.08		
ERP Limit (dBm)	38.45		
EGPRS 850 (1 Uplink slot)	25.96	25.52	25.99
EGPRS 850 (2 Uplink slot)	25.41	25.17	24.61
EGPRS 850 (3 Uplink slot)	23.13	23.22	22.56
EGPRS 850 (4 Uplink slot)	21.88	21.65	21.05
Antenna Gain (dBi)	0.89		
Max. ERP (dBm)	24.73		
ERP Limit (dBm)	38.45		
EUT Mode	Burst Average power (dBm)		
	512	661	810
	1850.20 (MHz)	1880.00 (MHz)	1909.80 (MHz)
PCS 1900	30.42	30.51	30.53
GPRS 1900 (1 Uplink slot)	30.40	30.50	30.52
GPRS 1900 (2 Uplink slot)	29.93	30.02	30.08
GPRS 1900 (3 Uplink slot)	28.41	28.53	28.60
GPRS 1900 (4 Uplink slot)	27.37	27.48	27.59
Antenna Gain (dBi)	1.23		
Max. EIRP (dBm)	31.76		
EIRP Limit (dBm)	33.00		
EGPRS 1900 (1 Uplink slot)	26.01	25.85	25.84
EGPRS 1900 (2 Uplink slot)	25.21	24.33	24.77
EGPRS 1900 (3 Uplink slot)	22.92	23.00	22.89
EGPRS 1900 (4 Uplink slot)	21.75	21.74	21.69
Antenna Gain (dBi)	1.23		
Max. EIRP (dBm)	27.24		
EIRP Limit (dBm)	33.00		
Note: EIRP (dBm) = Burst Average power (dBm) + Antenna Gain (dBi).			
ERP (dBm) = EIRP (dBm) - 2.15 (dB).			

EUT Mode		Burst Average power (dBm)		
		4132	4183	4233
		826.40 (MHz)	836.60 (MHz)	846.60 (MHz)
UMTS 850 HSDPA	Subtest 1	21.81	21.78	21.68
	Subtest 2	20.82	21.29	20.67
	Subtest 3	20.08	20.21	20.04
	Subtest 4	20.31	20.30	20.38
UMTS 850 HSUPA	Subtest 1	20.22	20.86	20.77
	Subtest 2	21.67	21.59	21.51
	Subtest 3	20.03	20.54	20.36
	Subtest 4	21.81	21.78	21.69
	Subtest 5	20.23	20.84	21.02
UMTS 850 RMC	12.2kbps	22.79	22.75	22.63
UMTS 850 AMR	12.2kbps	22.78	22.74	22.62
Antenna Gain (dBi)		0.89		
Max. ERP (dBm)		21.53		
ERP Limit (dBm)		38.45		
EUT Mode		Burst Average power (dBm)		
		9262	9400	9538
		1852.40 (MHz)	1880.00 (MHz)	1907.60 (MHz)
UMTS 1900 HSDPA	Subtest 1	22.51	22.43	22.40
	Subtest 2	21.47	21.83	21.97
	Subtest 3	20.77	20.36	20.87
	Subtest 4	21.17	21.20	20.73
UMTS 1900 HSUPA	Subtest 1	20.84	22.18	21.59
	Subtest 2	22.44	22.29	22.33
	Subtest 3	20.65	20.93	21.01
	Subtest 4	22.49	22.44	22.40
	Subtest 5	21.26	21.78	21.81
UMTS 1900 RMC	12.2kbps	23.46	23.36	23.39
UMTS 1900 AMR	12.2kbps	23.29	23.28	23.38
Antenna Gain (dBi)		1.23		
Max. EIRP (dBm)		24.69		
EIRP Limit (dBm)		33.00		
Note: EIRP (dBm) = Burst Average power (dBm) + Antenna Gain (dBi).				
ERP (dBm) = EIRP (dBm) - 2.15 (dB).				

EUT Mode		Burst Average power (dBm)		
		1312	1412	1513
		1712.40 (MHz)	1732.40 (MHz)	1752.60 (MHz)
UMTS 1700 HSDPA	Subtest 1	22.42	22.54	22.46
	Subtest 2	21.49	22.13	21.59
	Subtest 3	21.07	20.78	20.57
	Subtest 4	21.12	20.97	21.01
UMTS 1700 HSUPA	Subtest 1	20.70	22.21	22.00
	Subtest 2	22.31	22.51	22.42
	Subtest 3	20.60	21.25	20.99
	Subtest 4	22.41	22.55	22.47
	Subtest 5	20.92	21.98	21.78
UMTS 1700 RMC	12.2kbps	23.39	23.51	23.44
UMTS 1700 AMR	12.2kbps	23.38	23.37	23.41
Antenna Gain (dBi)		1.15		
Max. EIRP (dBm)		24.66		
EIRP Limit (dBm)		30.00		
Note: EIRP (dBm) = Burst Average power (dBm) + Antenna Gain (dBi).				

6.2 Peak-to-Average Power Ratio

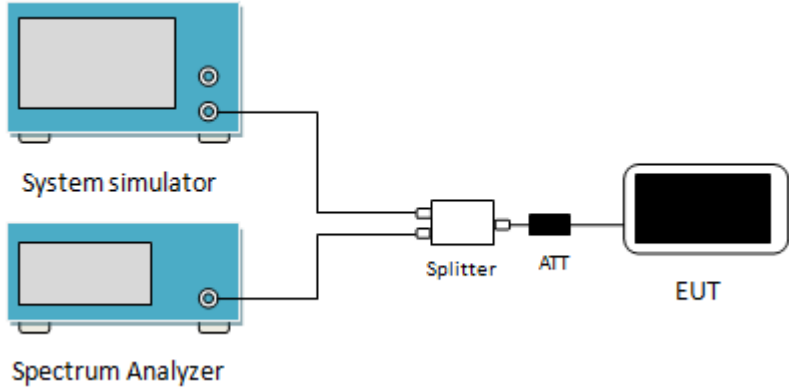
Test Requirement:	FCC part 24.232(d), FCC part 27.50(d)(5)
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test setup:	 The diagram shows a test setup for measuring the Peak-to-Average Power Ratio (PAR). It includes a System simulator, a Spectrum Analyzer, a Splitter, an ATT (Attenuator), and the EUT (Equipment Under Test). The System simulator and Spectrum Analyzer are connected to the Splitter. The Splitter is connected to the ATT, which is then connected to the EUT.
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 Set the CCDF option in spectrum analyzer, RBW $\geq$ OBW, 3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level. 4 Repeat step 1~3 at other frequency and modulations.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:

Modulation	Test channel	PAPR
GSM 850	190	2.70
EGPRS 850	190	9.02
PCS 1900	661	2.69
EGPRS 1900	661	6.99
UMTS 850 RMC	4183	2.79
UMTS 1900 RMC	9400	2.97
UMTS1700 RMC	1413	2.71


Test plots as below:

GSM 850

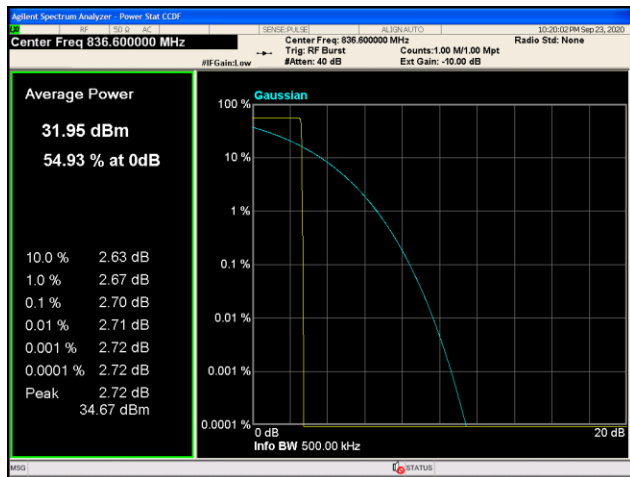


Middle channel

PCS 1900

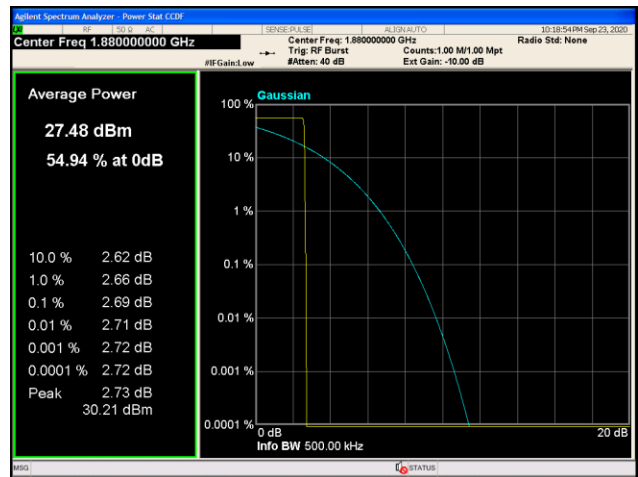


Middle channel

EGPRS 850

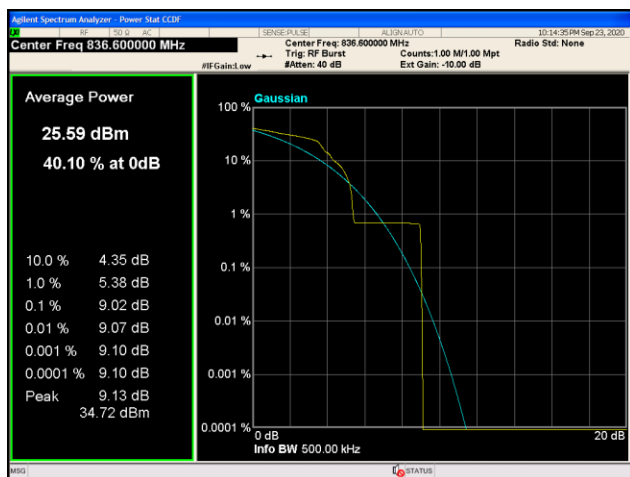


Middle channel

EGPRS 1900

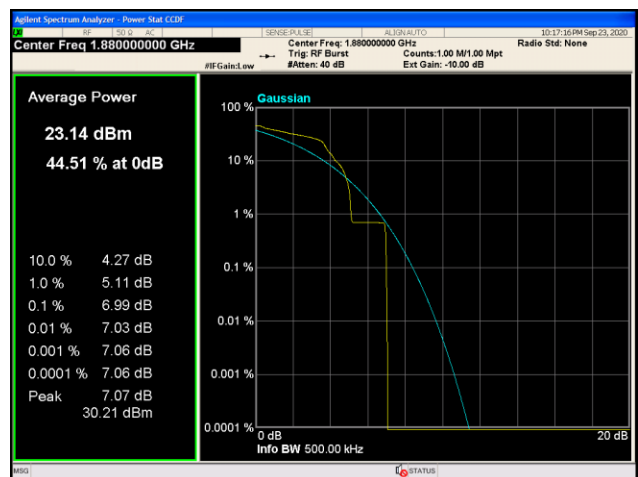


Middle channel

UMTS 850 RMC

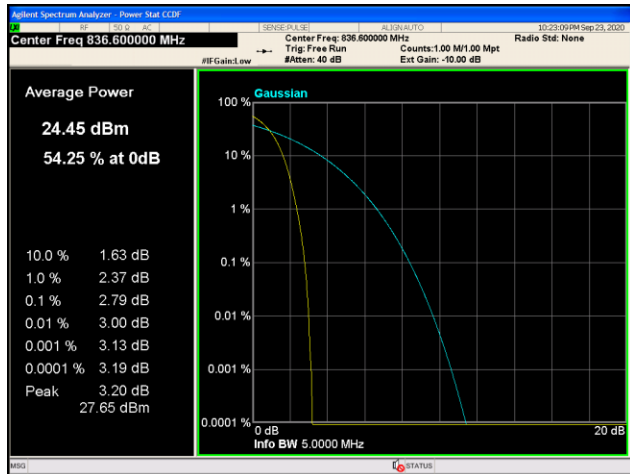


Middle channel

UMTS 1900 RMC

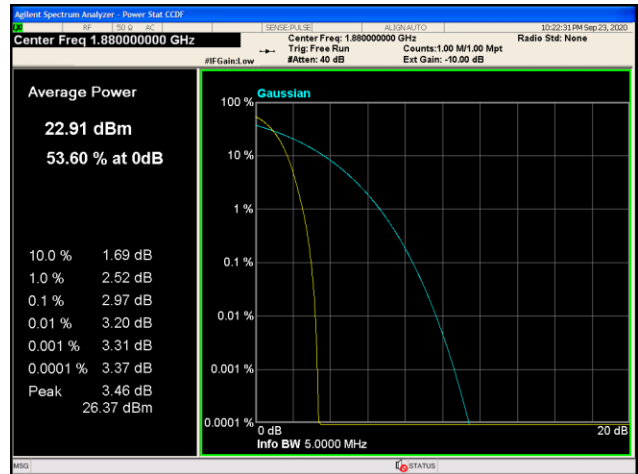


Middle channel

UMTS1700 RMC

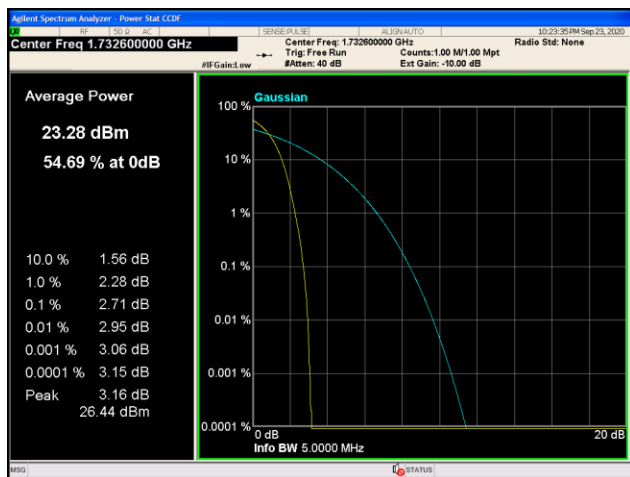

Middle channel


6.3 Occupy Bandwidth

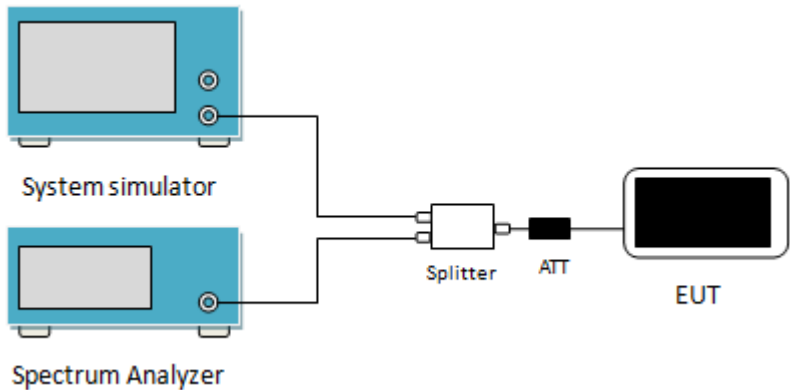Test Requirement:	FCC part 22.917(b), FCC part 24.238(b), FCC Part 27.53(h)
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a single output port. These two ports are connected to a single input port of a white rectangular unit labeled 'Splitter'. The 'Splitter' has two output ports. One output port is connected to a black rectangular unit labeled 'ATT' (Attenuator). The other output port of the 'Splitter' is connected to the input of a white rectangular unit labeled 'EUT' (Equipment Under Test).
Test Procedure:	1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer 2. RBW was set to about 1% of emission BW, VBW= 3 times RBW. 3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data:


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850	128	824.2	246	322
	190	836.6	246	318
	251	848.8	246	318
EGPRS850	128	824.2	244	318
	190	836.6	250	310
	251	848.8	246	318
PCS 1900	512	1850.2	244	322
	661	1880.0	242	316
	810	1909.8	246	318
EGPRS1900	512	1850.2	256	328
	661	1880.0	256	312
	810	1909.8	254	322
UMTS 850 12.2k RMC	4132	826.4	4200	4740
	4183	836.6	4220	4760
	4233	846.6	4220	4800
UMTS 1900 12.2k RMC	9262	1852.4	4200	4720
	9400	1880.0	4180	4780
	9538	1907.6	4200	4760
UMTS 1700 12.2k RMC	1312	1712.40	4180	4700
	1413	1732.60	4220	4740
	1513	1752.60	4200	4740
Note: GSM & GPRS use the same modulation technical (GMSK), and with the same channels, so the 99% OBW and the -26dB of GPRS not performed.				

Test plot as follows:

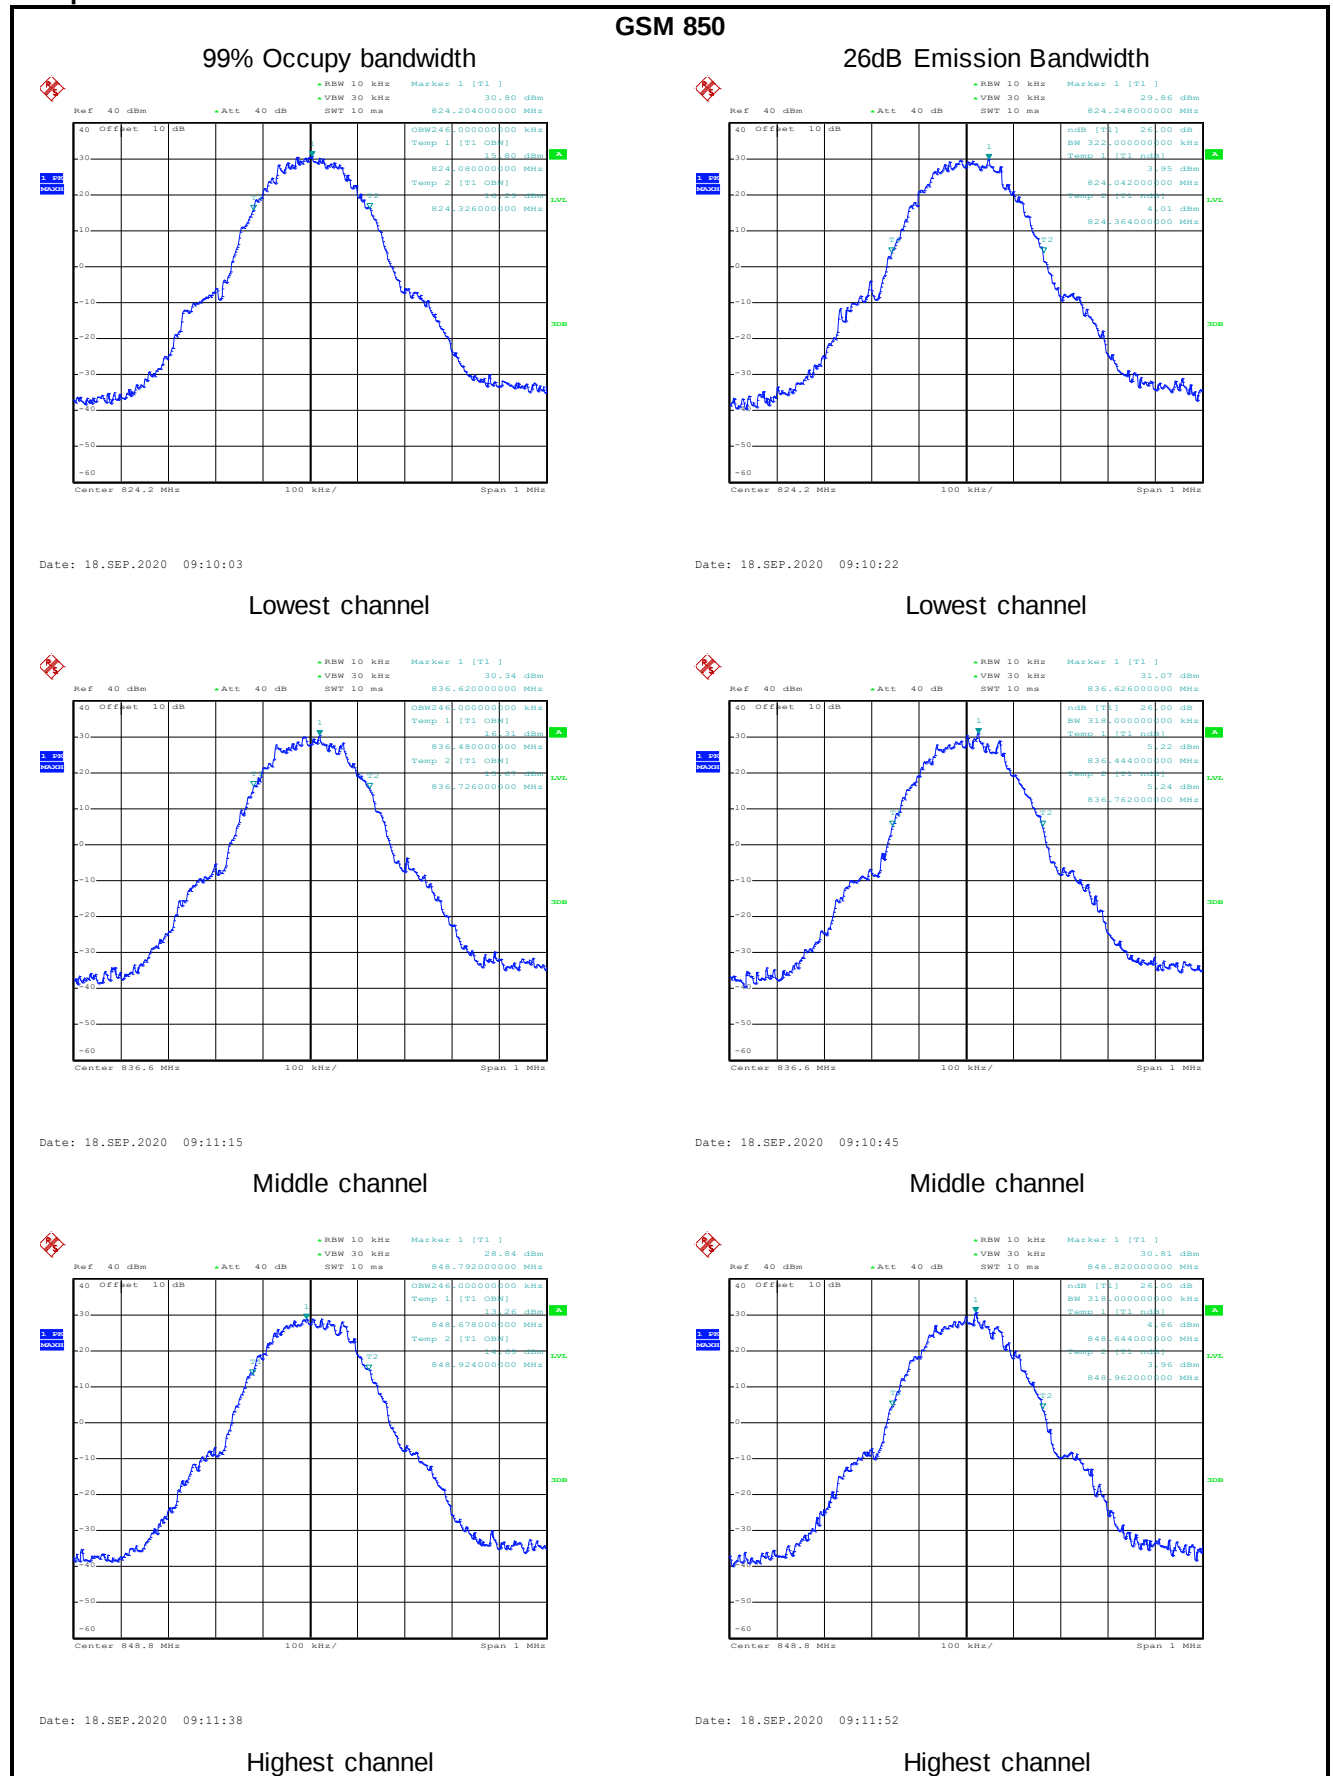


EGPRS 850

99% Occupancy bandwidth

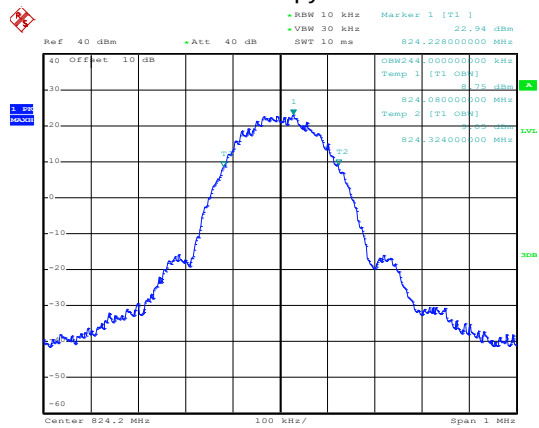


Date: 18.SEP.2020 09:24:15

26dB Emission Bandwidth

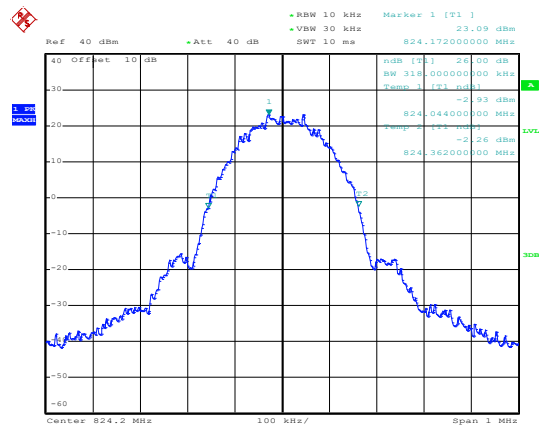


Date: 18.SEP.2020 09:23:46

Lowest channel

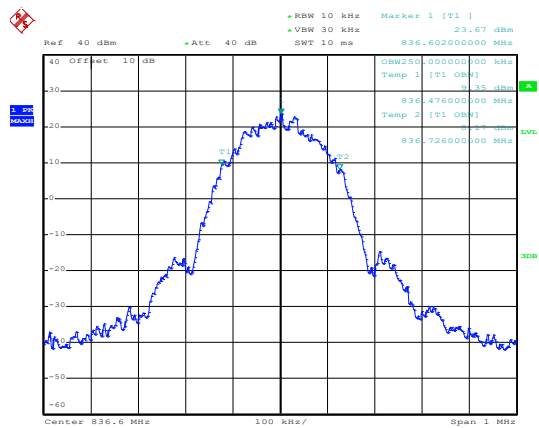


Date: 18.SEP.2020 09:24:32

Lowest channel

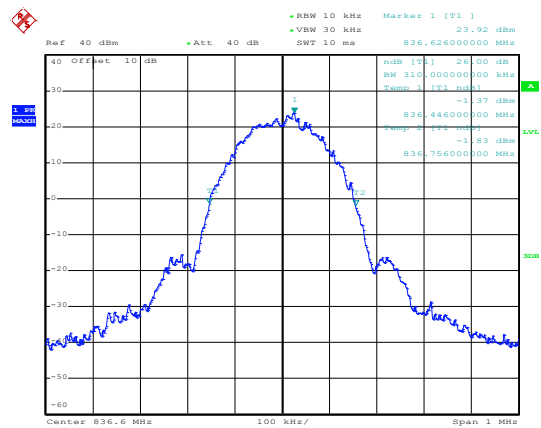


Date: 18.SEP.2020 09:24:54

Middle channel

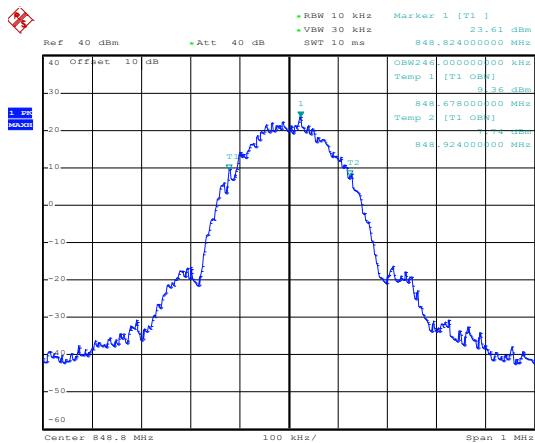

Date: 18.SEP.2020 09:25:25

Middle channel

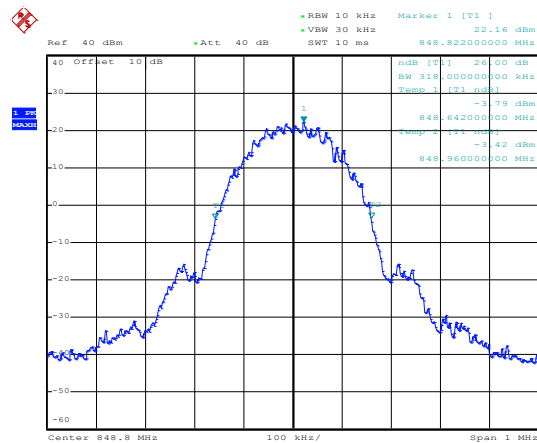


Date: 18.SEP.2020 09:25:12

Highest channel

Highest channel


PCS 1900

99% Occupancy bandwidth

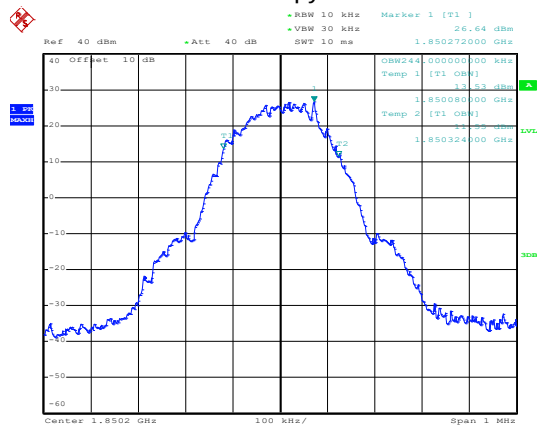


Date: 18.SEP.2020 09:19:03

26dB Emission Bandwidth

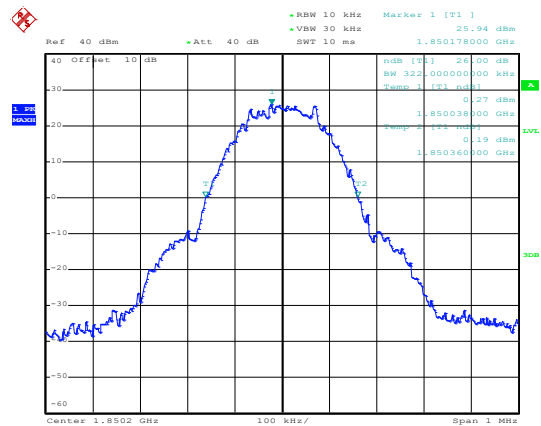


Date: 18.SEP.2020 09:19:32

Lowest channel

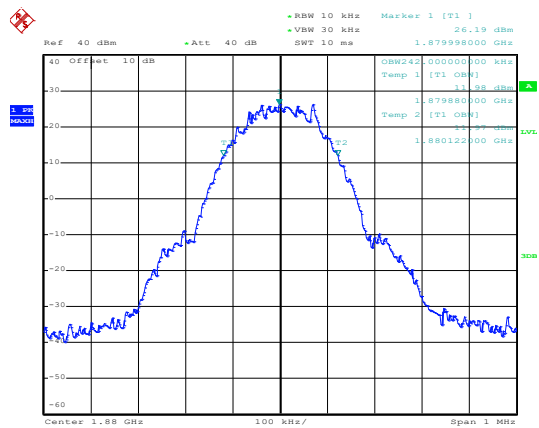


Date: 18.SEP.2020 09:20:48

Lowest channel

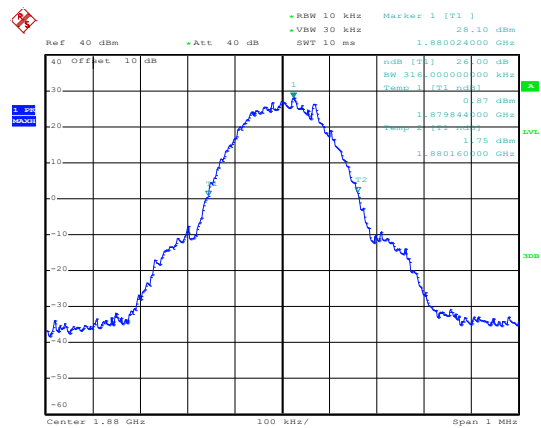


Date: 18.SEP.2020 09:20:32

Middle channel

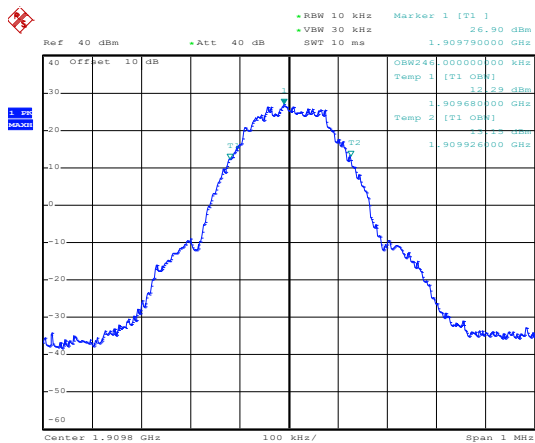

Date: 18.SEP.2020 09:21:28

Middle channel

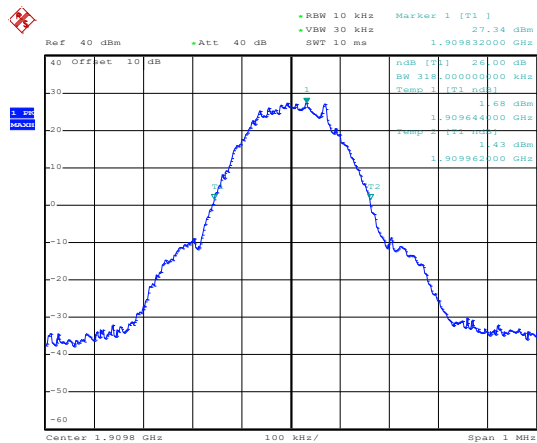


Date: 18.SEP.2020 09:22:22

Highest channel

Highest channel


EGPRS 1900

99% Occupancy bandwidth

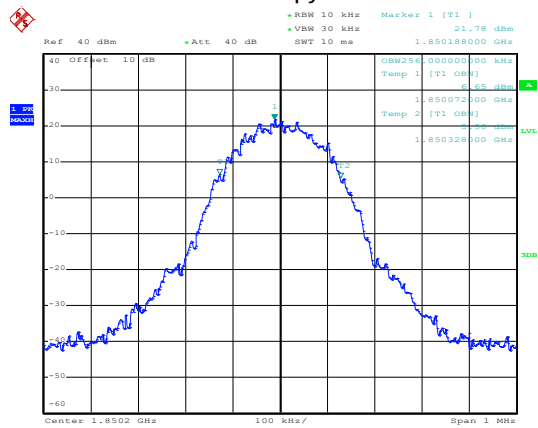


Date: 18.SEP.2020 09:29:36

26dB Emission Bandwidth

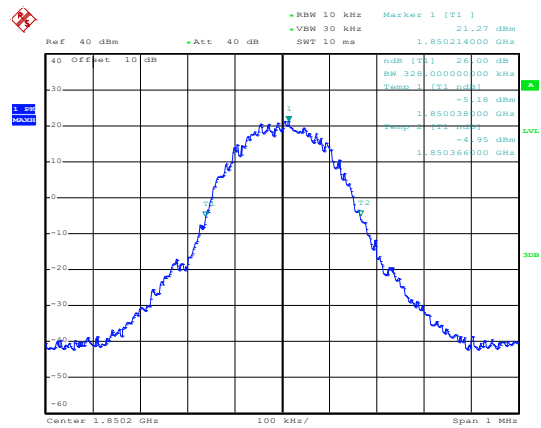


Date: 18.SEP.2020 09:29:48

Lowest channel

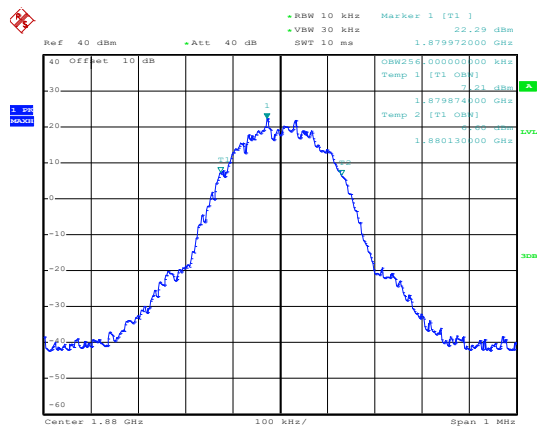


Date: 18.SEP.2020 09:29:22

Lowest channel

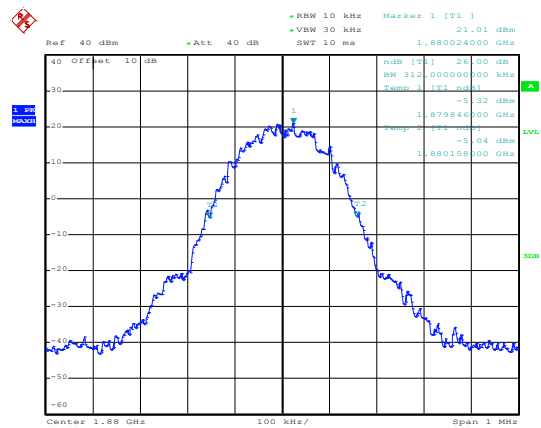


Date: 18.SEP.2020 09:29:11

Middle channel

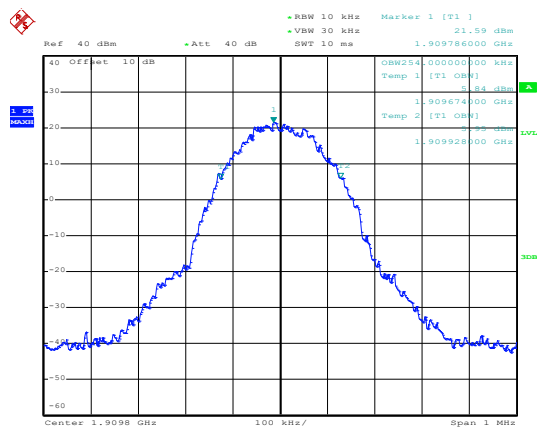

Date: 18.SEP.2020 09:28:46

Middle channel

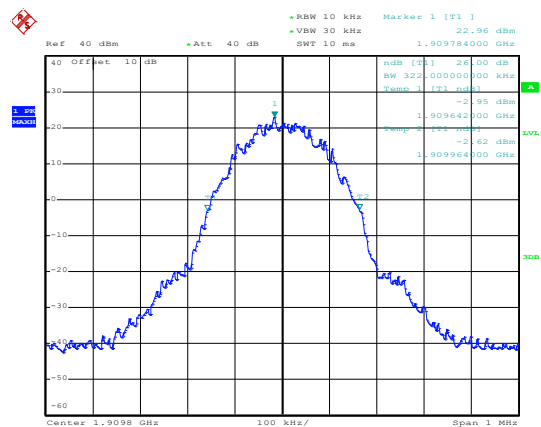


Date: 18.SEP.2020 09:29:00

Highest channel

Highest channel


UMTS 850 12.2k RMC

99% Occupancy bandwidth

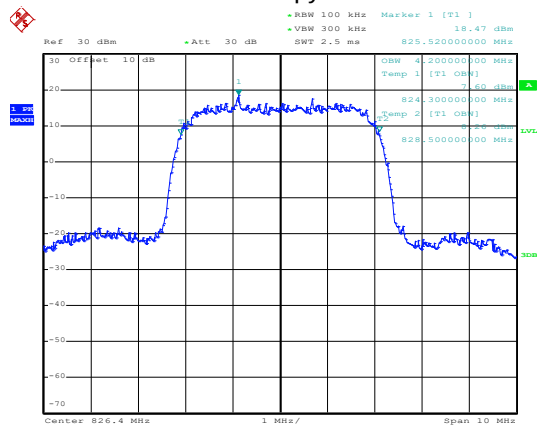


Date: 18.SEP.2020 09:55:28

26dB Emission Bandwidth

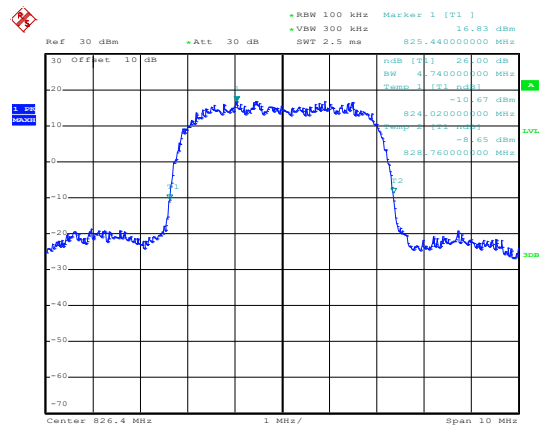


Date: 18.SEP.2020 09:55:33

Lowest channel

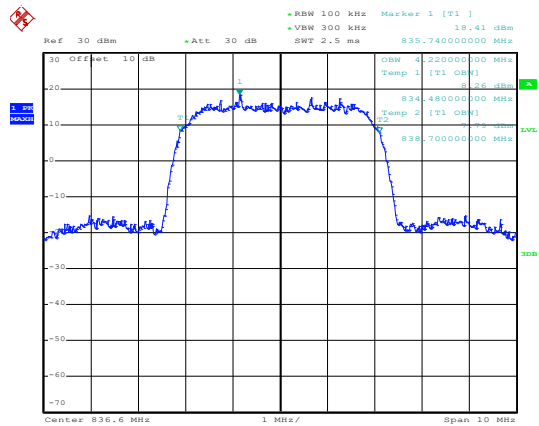


Date: 18.SEP.2020 09:55:16

Lowest channel

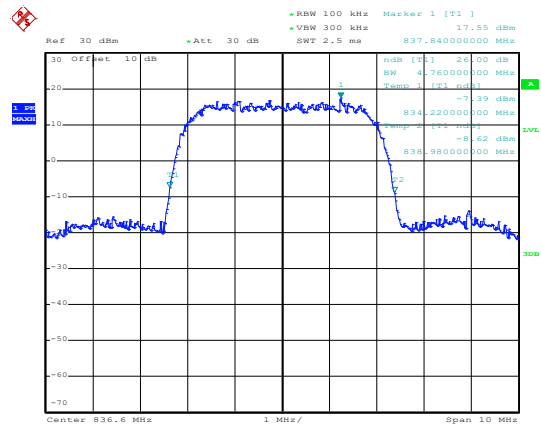


Date: 18.SEP.2020 09:55:10

Middle channel

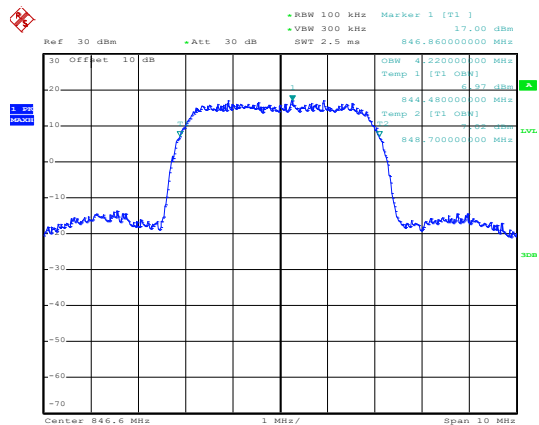

Date: 18.SEP.2020 09:54:51

Middle channel

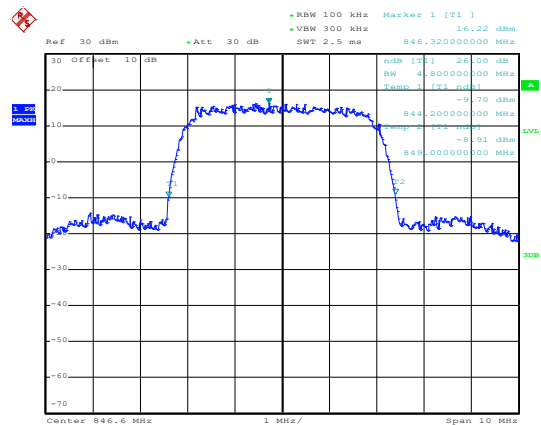


Date: 18.SEP.2020 09:54:58

Highest channel

Highest channel


UMTS 1900 12.2k RMC

99% Occupancy bandwidth

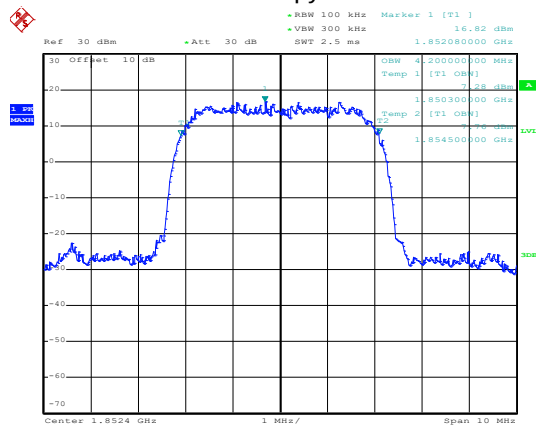


Date: 18.SEP.2020 09:41:25

26dB Emission Bandwidth

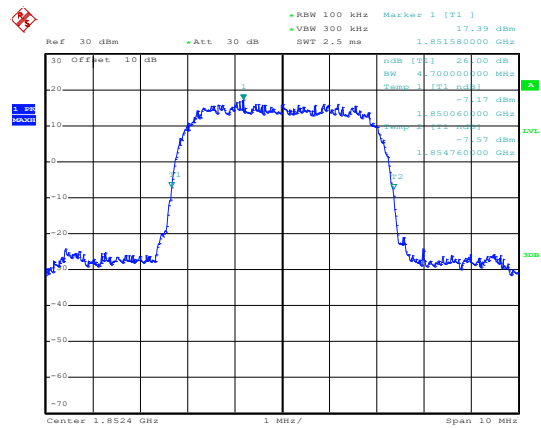


Date: 18.SEP.2020 09:41:39

Lowest channel

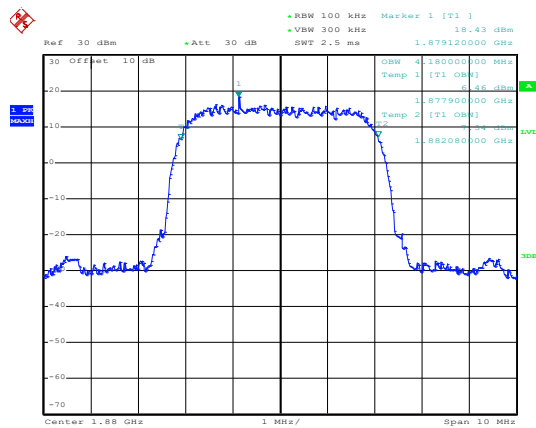


Date: 18.SEP.2020 09:41:24

Lowest channel

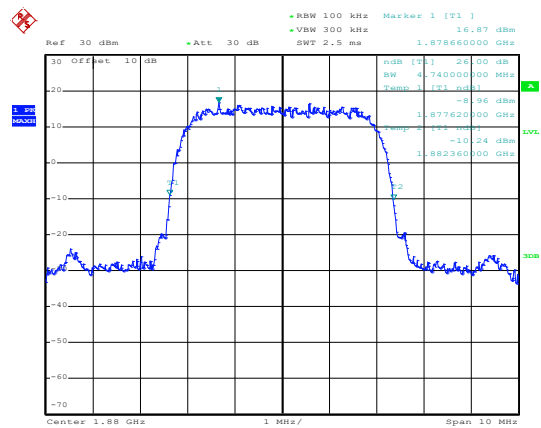


Date: 18.SEP.2020 09:41:30

Middle channel

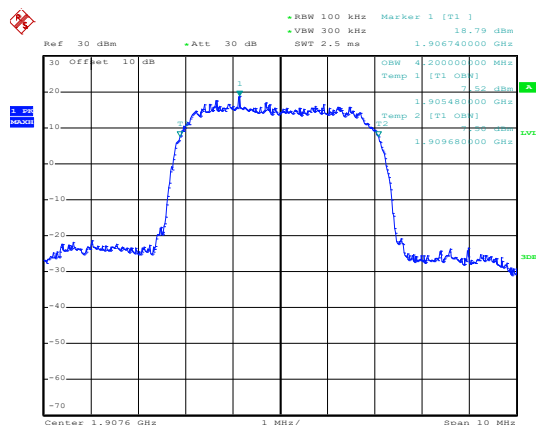

Date: 18.SEP.2020 09:41:12

Middle channel

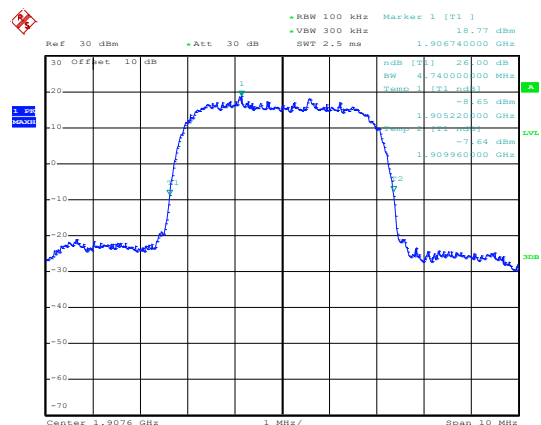


Date: 18.SEP.2020 09:41:04

Highest channel

Highest channel


UMTS 1700 12.2k RMC

99% Occupancy bandwidth

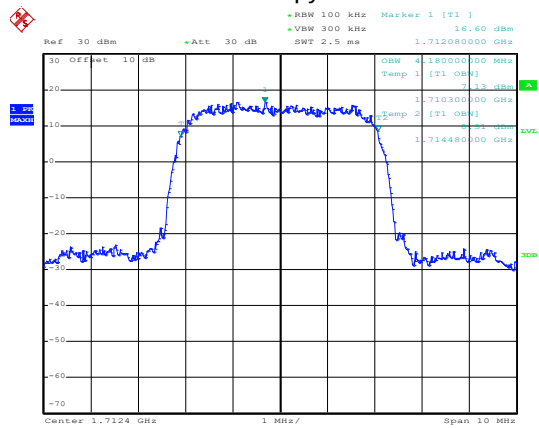


Date: 18.SEP.2020 09:42:27

26dB Emission Bandwidth

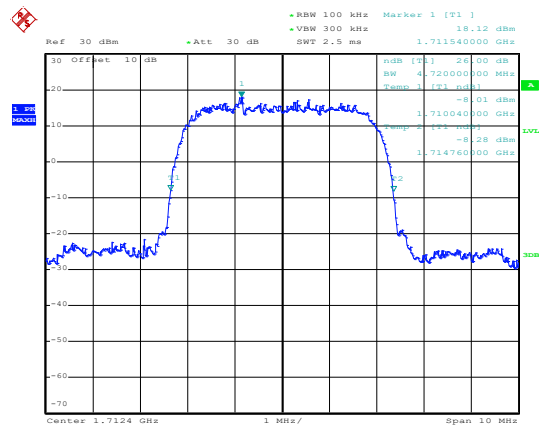


Date: 18.SEP.2020 09:42:21

Lowest channel

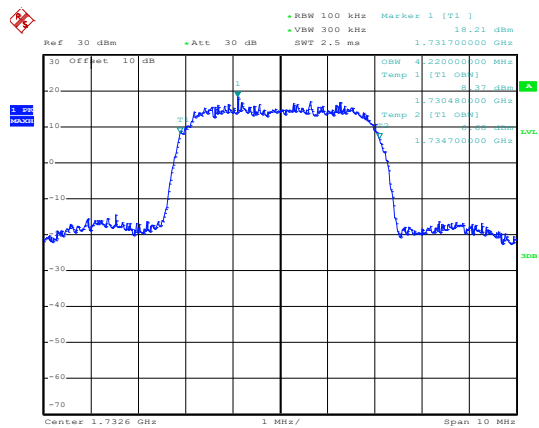


Date: 18.SEP.2020 09:42:36

Lowest channel

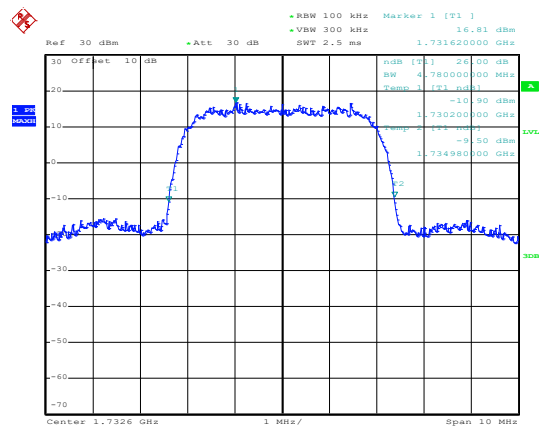


Date: 18.SEP.2020 09:42:42

Middle channel

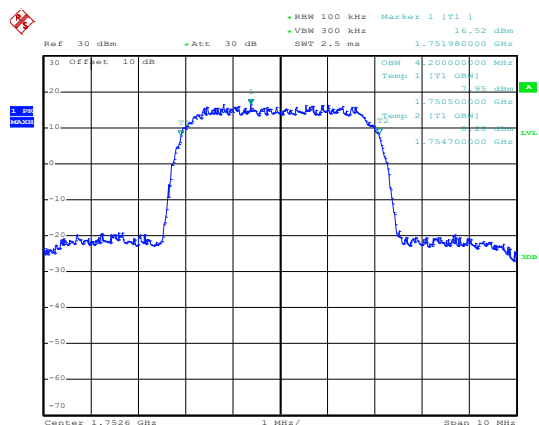

Date: 18.SEP.2020 09:43:02

Middle channel

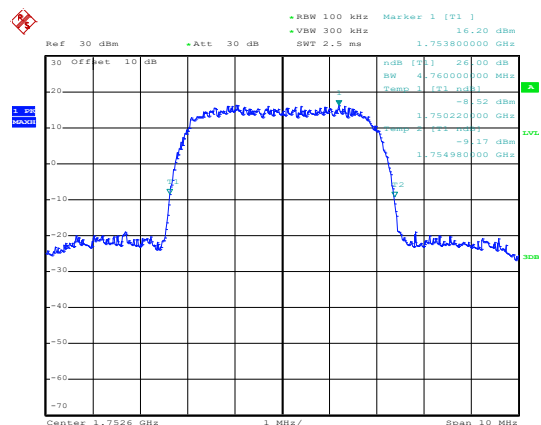

Date: 18.SEP.2020 09:42:54


Highest channel

Highest channel

6.4 Modulation Characteristic


According to FCC § 2.1047(d), Part 22H & 24E & 27L there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

6.5 Out of band emission at antenna terminals

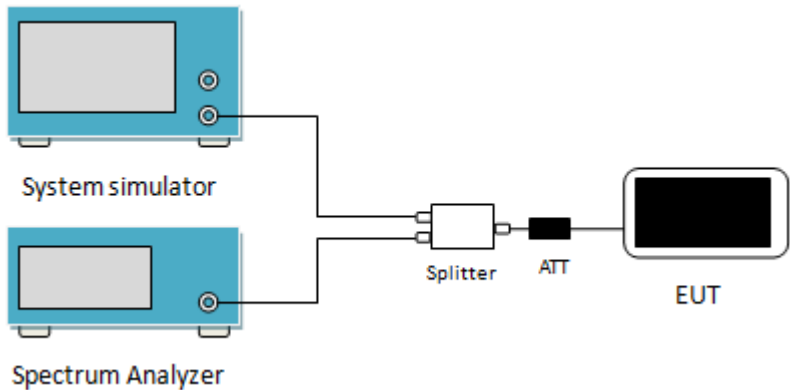
Test Requirement:	FCC part 22.917(a), FCC part 24.238(a), FCC Part 27.53 (h)
Limit:	-13dBm
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a single output port. These two ports are connected to a single input port of a white rectangular unit labeled 'Splitter'. The 'Splitter' has two output ports. One output port is connected to a black rectangular unit labeled 'ATT' (attenuator). The other output port is connected to a black rectangular unit labeled 'EUT' (Equipment Under Test).
Test Procedure:	1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation. 2 For the out of band: For GSM850&WCDMA850 set the RBW=100 kHz, VBW=300 kHz and for PCS1900 & WCDMA1900 set the RBW=1MHz, VBW=3MHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic. 3 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Test plots as follows (Spurious emission):

GSM 850 Lowest Channel

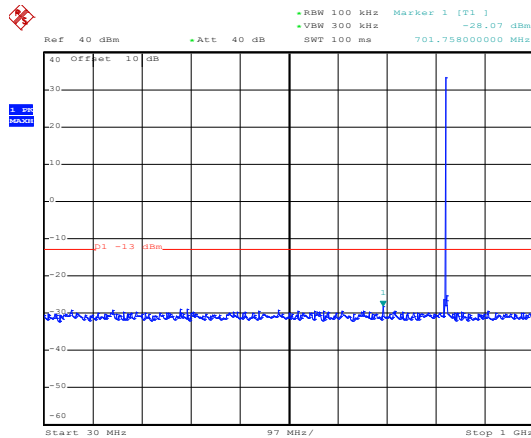


Date: 18.SEP.2020 09:13:54

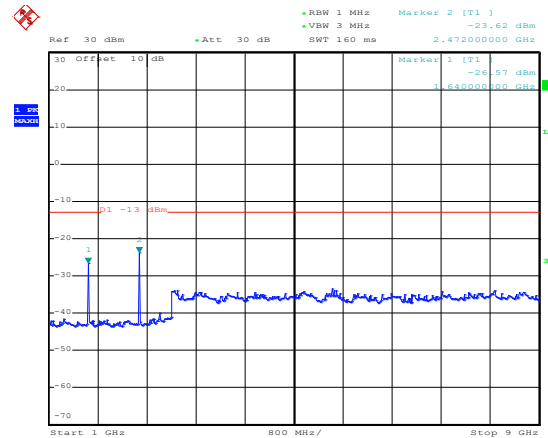


Date: 18.SEP.2020 09:14:26

Middle channel

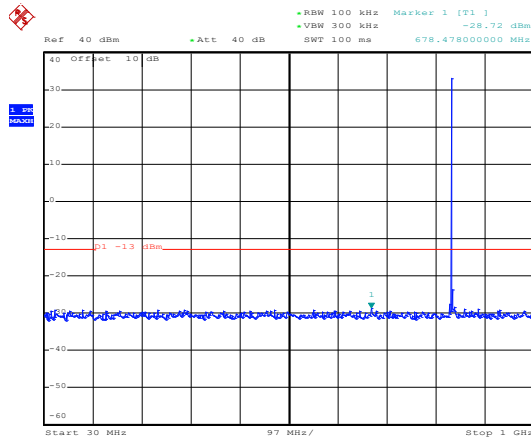


Date: 18.SEP.2020 09:13:40

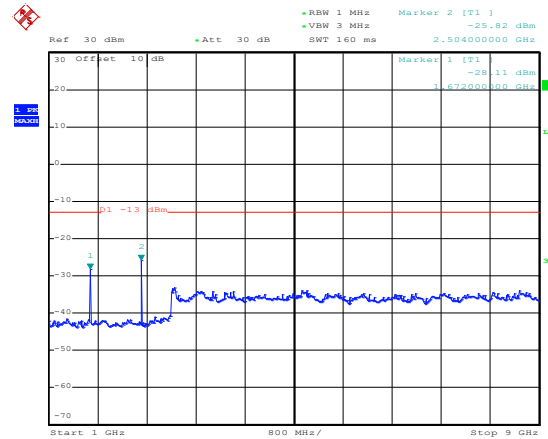


Date: 18.SEP.2020 09:14:51


Highest Channel

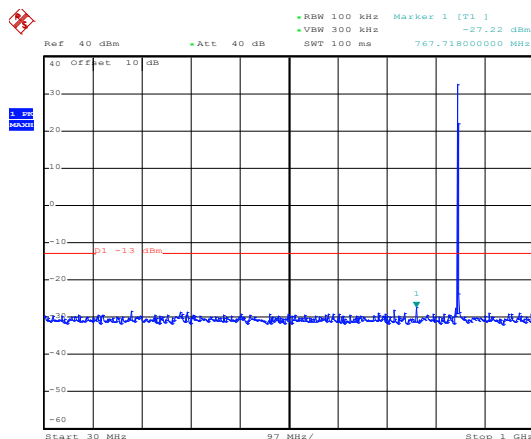


Date: 18.SEP.2020 09:13:18

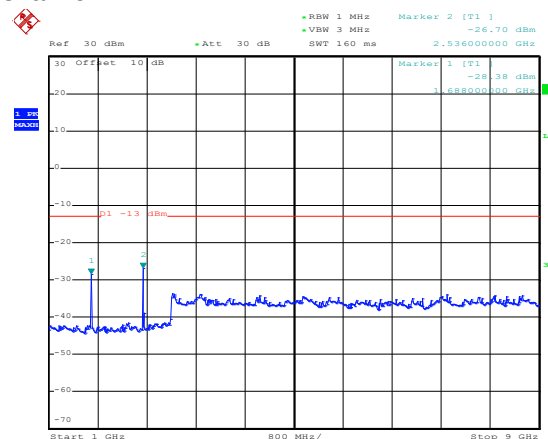

Date: 18.SEP.2020 09:15:06

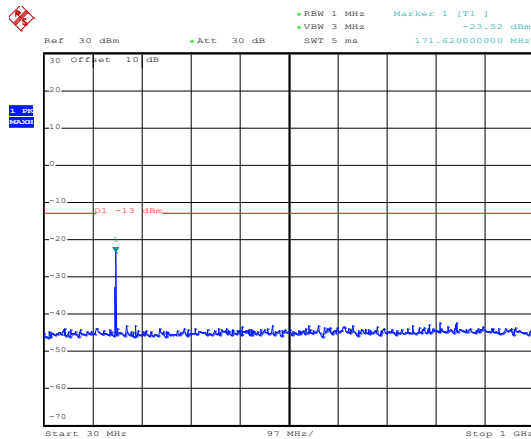
PCS 1900
Lowest Channel

Date: 18.SEP.2020 09:17:05

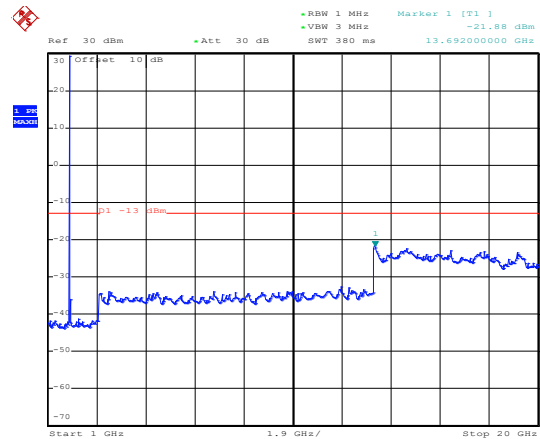


Date: 18.SEP.2020 09:15:48

Middle Channel

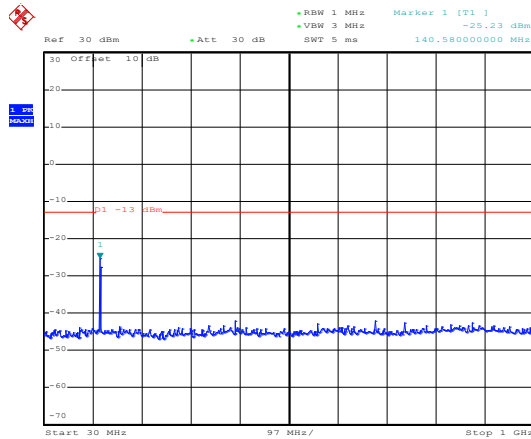


Date: 18.SEP.2020 09:16:54

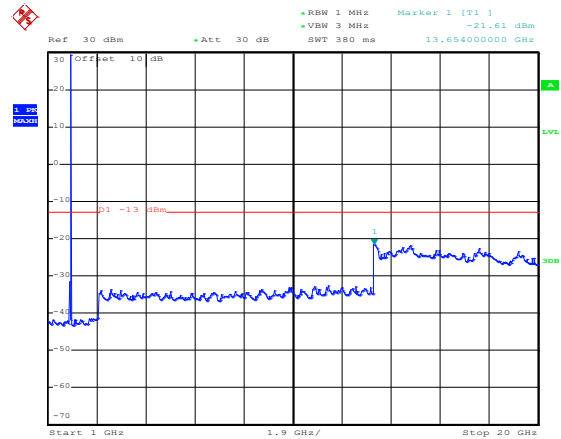


Date: 18.SEP.2020 09:16:24

Highest Channel

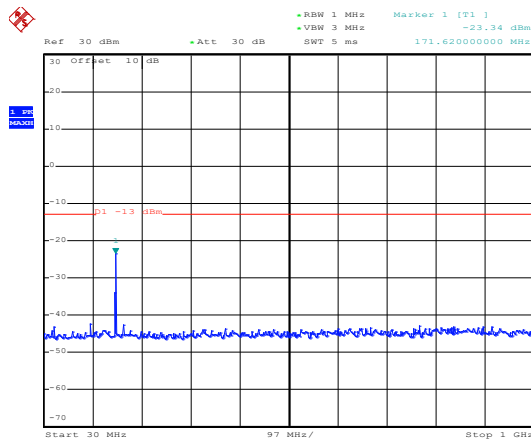


Date: 18.SEP.2020 09:16:45

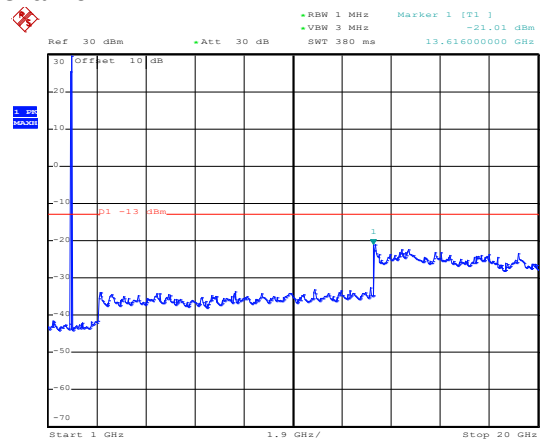


Date: 18.SEP.2020 09:16:35

UMTS 850 12.2k RMC

Lowest Channel

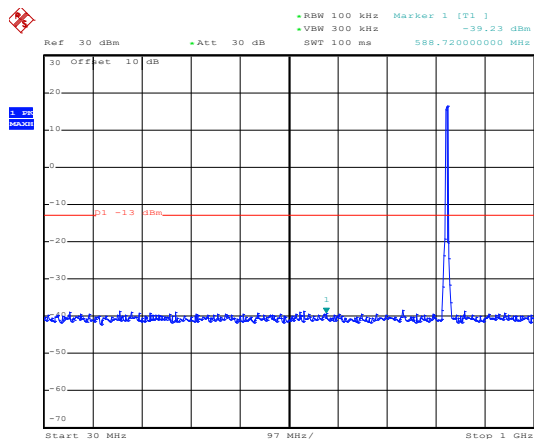


Date: 18.SEP.2020 10:00:57

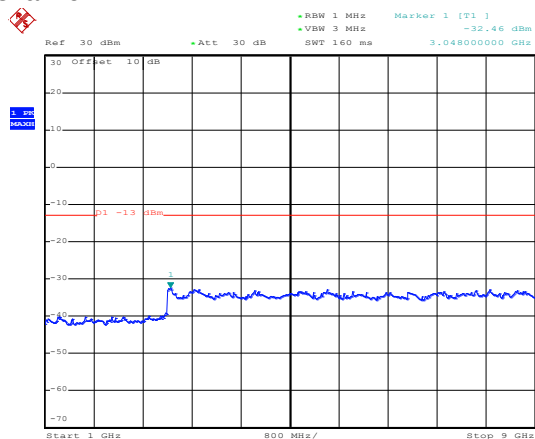


Date: 18.SEP.2020 10:41:14

Middle Channel

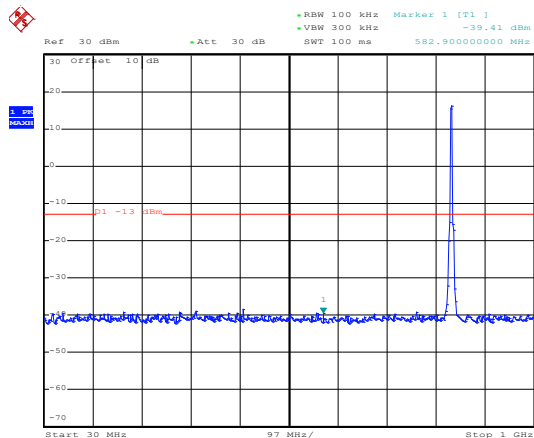


Date: 18.SEP.2020 10:01:10

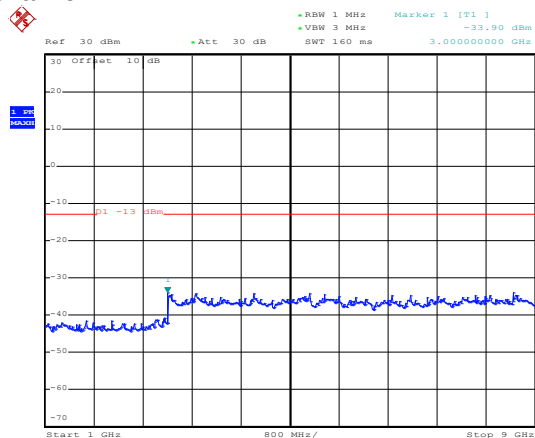


Date: 18.SEP.2020 10:01:42


Highest Channel

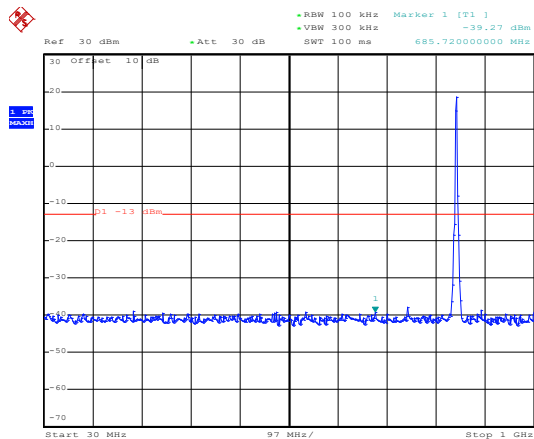


Date: 18.SEP.2020 10:01:19

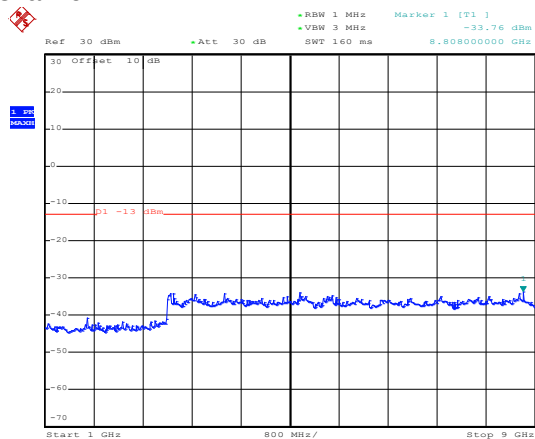

Date: 18.SEP.2020 10:01:32

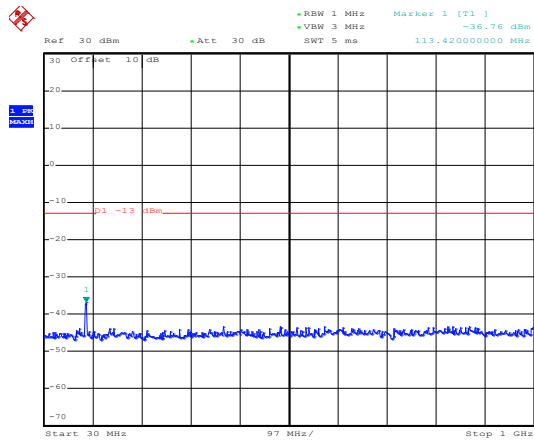
UMTS 1900 12.2k RMC
Lowest Channel

Date: 18.SEP.2020 09:58:19

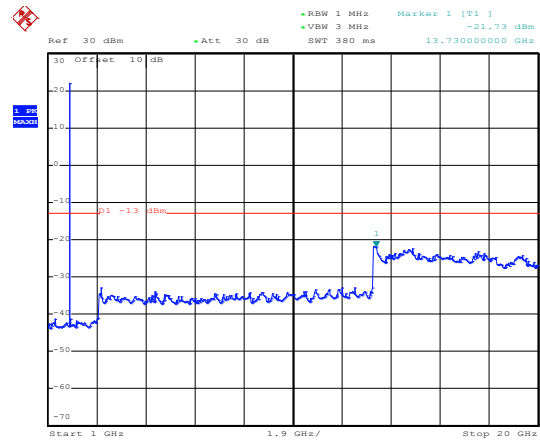


Date: 18.SEP.2020 09:58:42

Middle Channel

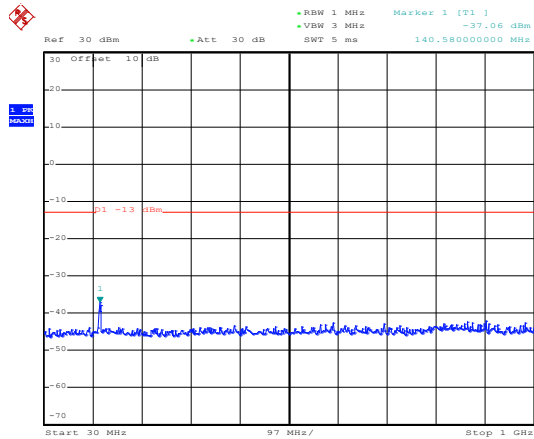


Date: 18.SEP.2020 09:58:11

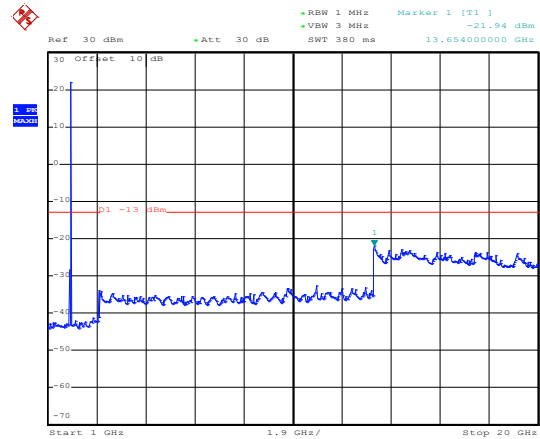


Date: 18.SEP.2020 09:58:58

Highest Channel

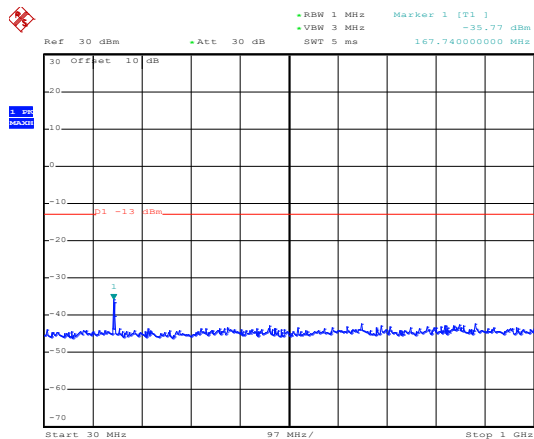


Date: 18.SEP.2020 09:57:55

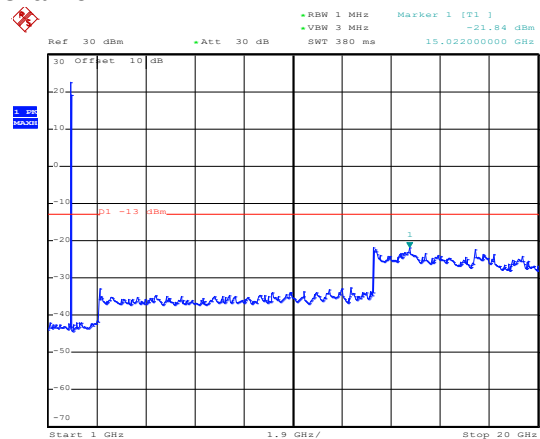


Date: 18.SEP.2020 09:59:13

UMTS 1700 12.2k RMC

Lowest Channel

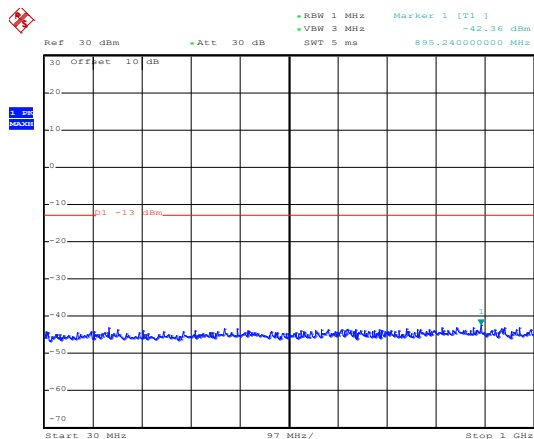


Date: 18.SEP.2020 10:00:33

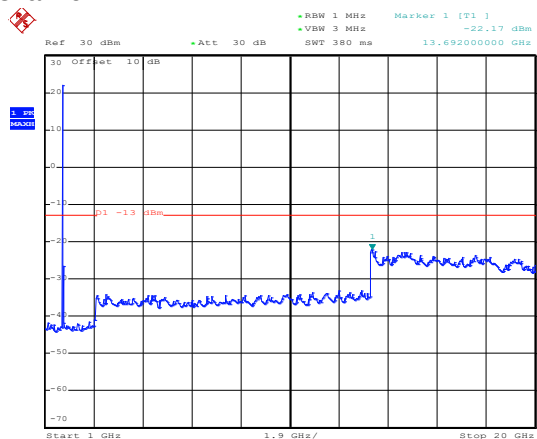


Date: 18.SEP.2020 09:59:32

Middle Channel

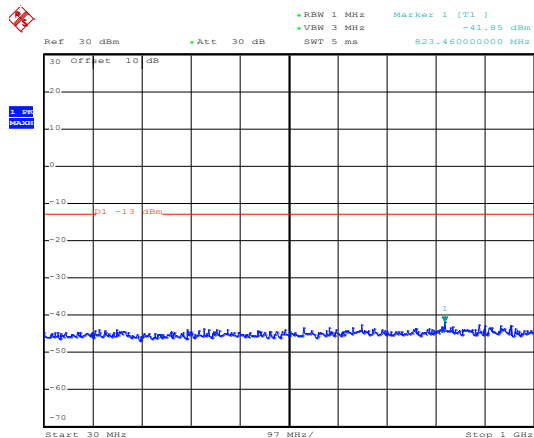


Date: 18.SEP.2020 10:00:23

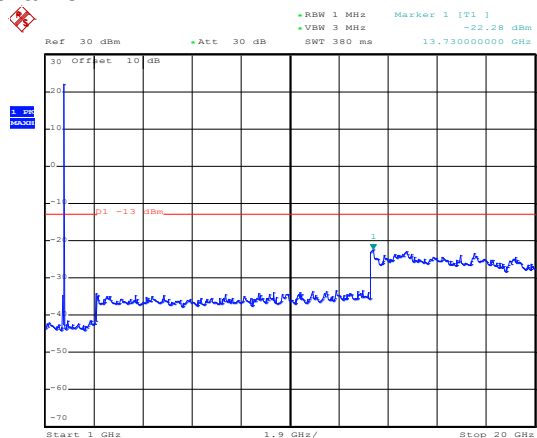


Date: 18.SEP.2020 09:59:43

Highest Channel

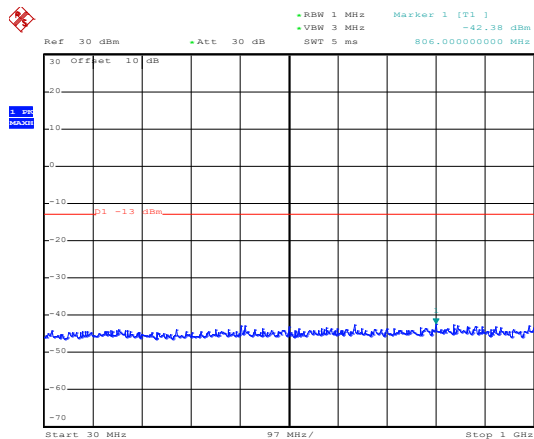


Date: 18.SEP.2020 10:00:12

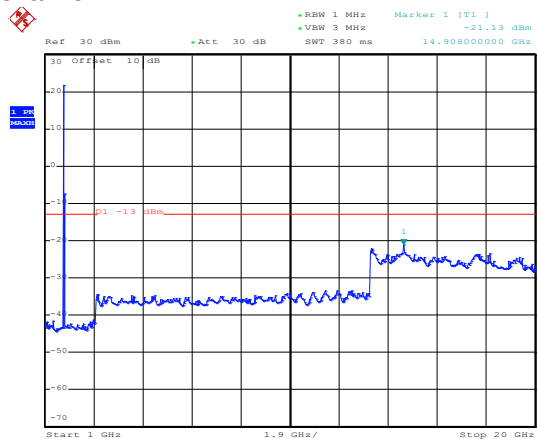


Date: 18.SEP.2020 09:59:58

Band edge emission:

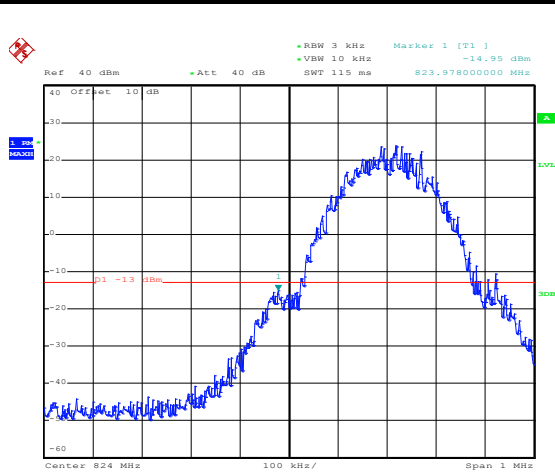


Date: 18.SEP.2020 09:12:49

Lowest channel

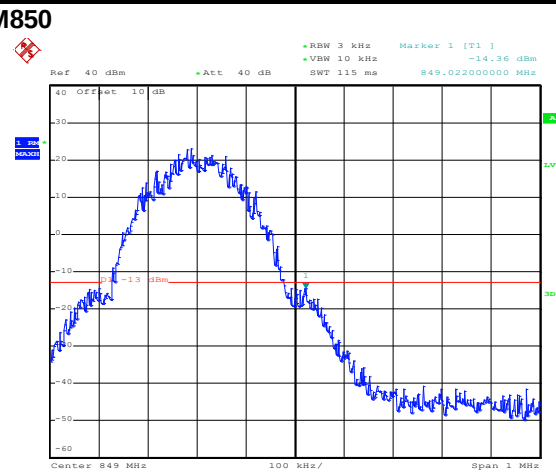


Date: 18.SEP.2020 09:12:25

Highest channel

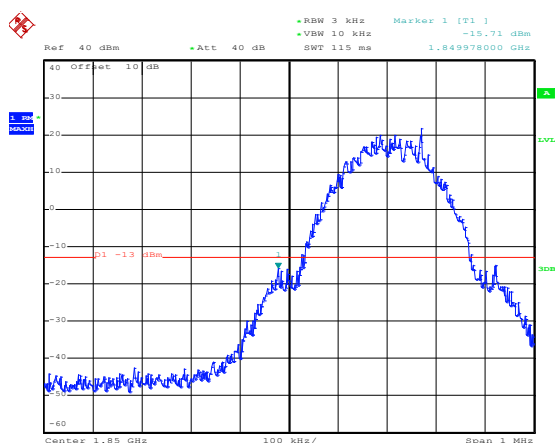

Date: 18.SEP.2020 09:18:28


Lowest channel

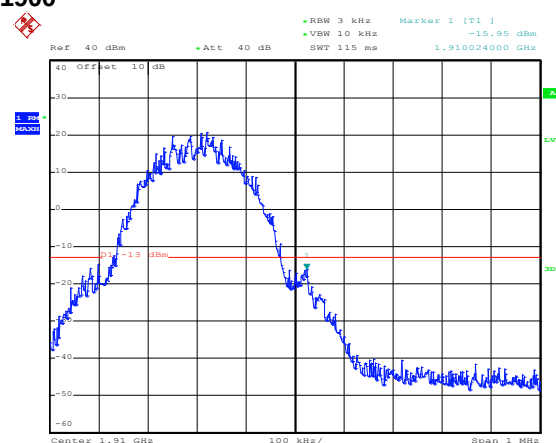

Date: 18.SEP.2020 09:18:02


Highest channel

EGPRS850

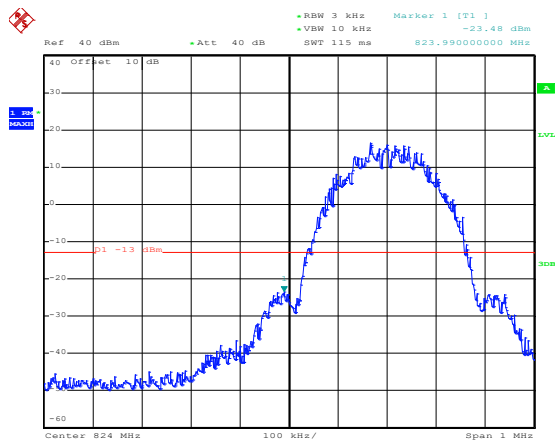

Date: 18.SEP.2020 09:26:31


Lowest channel

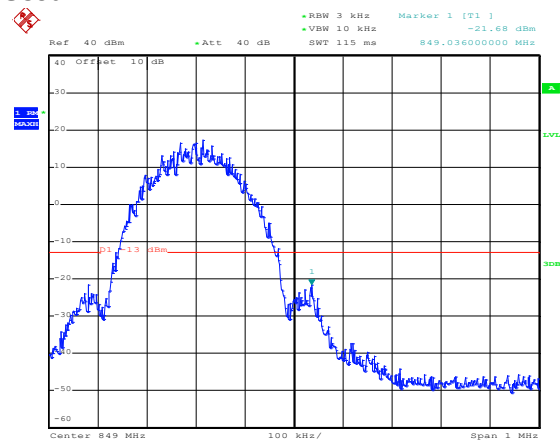

Date: 18.SEP.2020 09:25:57


Highest channel

EGPRS1900

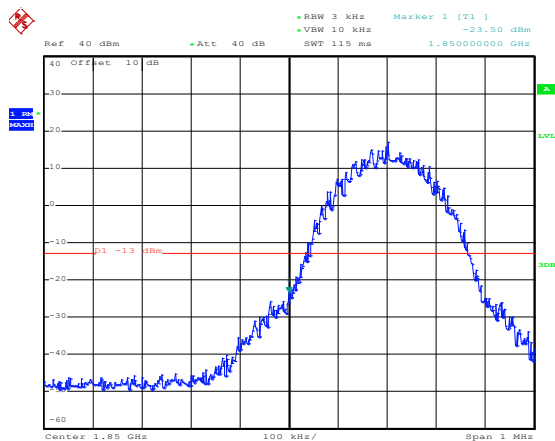

Date: 18.SEP.2020 09:27:55


Lowest channel

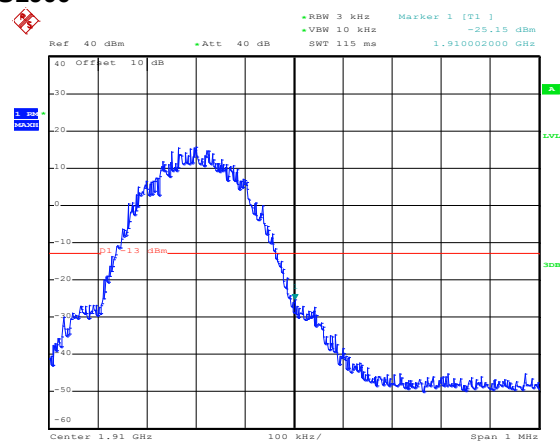

Date: 18.SEP.2020 09:28:17


Highest channel

UMTS 850 RMC 12.2kbps

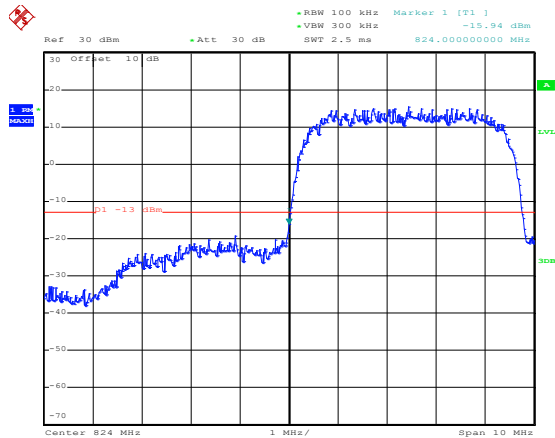

Date: 18.SEP.2020 09:56:03


Lowest channel

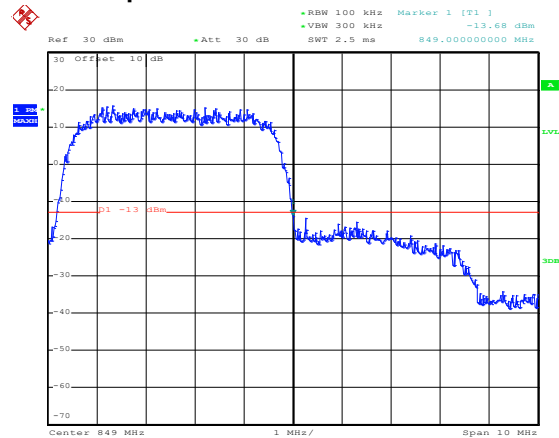

Date: 18.SEP.2020 09:56:28


Highest channel

UMTS 1900 RMC 12.2kbps

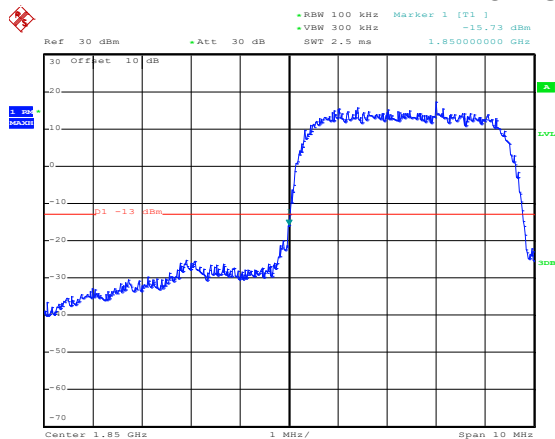


Date: 18.SEP.2020 09:57:20

Lowest channel


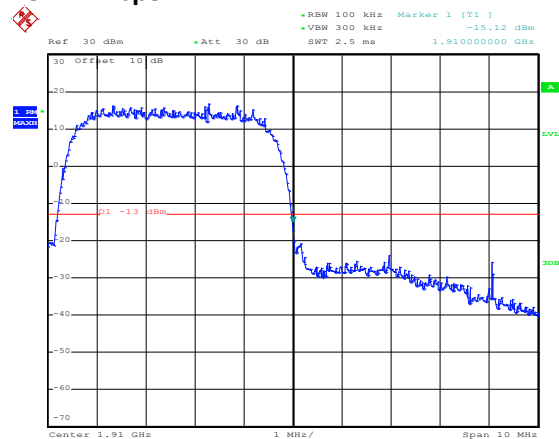


Date: 18.SEP.2020 09:57:35

Highest channel

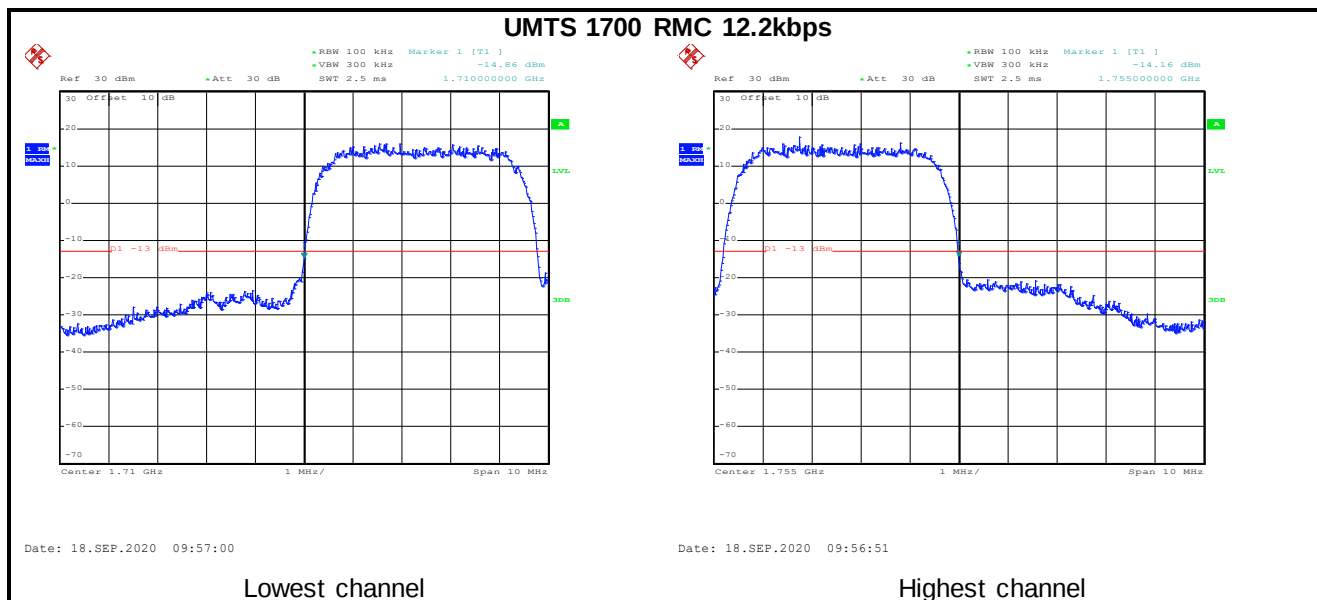

6.6 Field strength of spurious radiation measurement

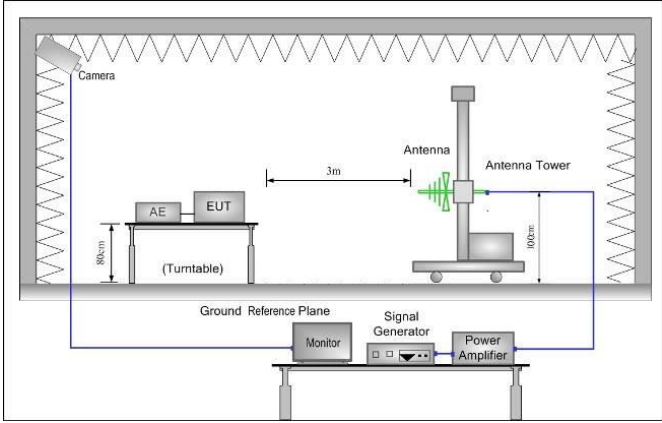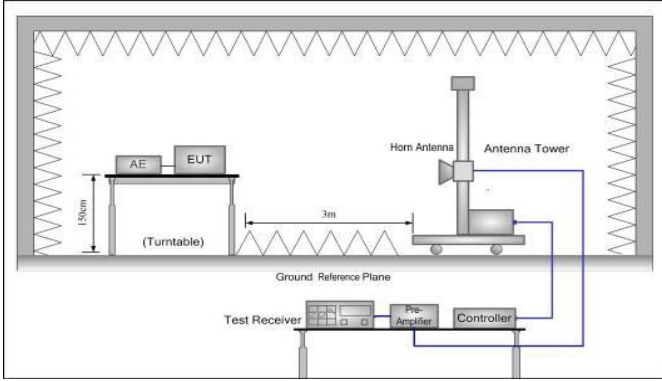Test Requirement:	FCC part 22.917(a), FCC part 24.238(a), FCC part 27.53(h)
Limit:	-13dBm
Test setup:	Below 1GHz  Above 1GHz 
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter camber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer. 2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations. 3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method. 4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency. $ERP / EIRP = S.G. \text{ output (dBm) } + \text{Antenna Gain(dB/dBi) } - \text{Cable Loss (dB)}$
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details.
Test results:	Passed

Measurement Data (worst case):

GSM850							
Lowest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
1648.40	-61.82	9.57	0.19	-52.44	-13.00	-39.44	Vertical
2472.60	-54.45	10.86	0.42	-44.01	-13.00	-31.01	Vertical
3296.80	-53.15	10.49	0.64	-43.30	-13.00	-30.30	Vertical
1648.40	-60.76	9.57	0.19	-51.38	-13.00	-38.38	Horizontal
2472.60	-56.61	10.86	0.42	-46.17	-13.00	-33.17	Horizontal
3296.80	-53.16	10.49	0.64	-43.31	-13.00	-30.31	Horizontal
Middle channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
1673.20	-61.46	9.66	0.21	-52.01	-13.00	-39.01	Vertical
2509.80	-54.42	10.91	0.46	-43.97	-13.00	-30.97	Vertical
3346.40	-54.96	12.09	0.66	-43.53	-13.00	-30.53	Vertical
1673.20	-60.61	9.66	0.21	-51.16	-13.00	-38.16	Horizontal
2509.80	-56.63	10.91	0.46	-46.18	-13.00	-33.18	Horizontal
3346.40	-54.96	12.09	0.66	-43.53	-13.00	-30.53	Horizontal
Highest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
1697.60	-62.19	9.74	0.24	-52.69	-13.00	-39.69	Vertical
2546.40	-54.03	10.95	0.50	-43.58	-13.00	-30.58	Vertical
3395.20	-54.76	12.19	0.68	-43.25	-13.00	-30.25	Vertical
1697.60	-60.78	9.74	0.24	-51.28	-13.00	-38.28	Horizontal
2546.40	-56.81	10.95	0.50	-46.36	-13.00	-33.36	Horizontal
3395.20	-54.59	12.19	0.68	-43.08	-13.00	-30.08	Horizontal
Remark:							
1. The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.							


PCS1900							
Lowest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	LimitLine (dBm)	Over Limit (dBm)	Polarization
3700.40	-56.14	12.64	0.74	-44.24	-13.00	-31.24	Vertical
5550.60	-56.30	12.76	1.12	-44.66	-13.00	-31.66	Vertical
3700.40	-58.36	12.64	0.74	-46.46	-13.00	-33.46	Horizontal
5550.60	-54.37	12.76	1.12	-42.73	-13.00	-29.73	Horizontal
Middle channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	LimitLine (dBm)	Over Limit (dBm)	Polarization
3760.00	-55.70	12.71	0.77	-43.76	-13.00	-30.76	Vertical
5640.00	-56.52	12.87	1.15	-44.80	-13.00	-31.80	Vertical
3760.00	-58.28	12.71	0.77	-46.34	-13.00	-33.34	Horizontal
5640.00	-54.37	12.87	1.15	-42.65	-13.00	-29.65	Horizontal
Highest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	LimitLine (dBm)	Over Limit (dBm)	Polarization
3819.60	-55.90	12.78	0.81	-43.93	-13.00	-30.93	Vertical
5729.40	-56.97	12.98	1.20	-45.19	-13.00	-32.19	Vertical
3819.60	-57.96	12.78	0.81	-45.99	-13.00	-32.99	Horizontal
5729.40	-54.05	12.98	1.20	-42.27	-13.00	-29.27	Horizontal
Remark:							
1. The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.							

WCDMA BAND V 12.2k RMC							
Lowest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
1652.80	-64.27	9.58	0.20	-54.89	-13.00	-41.89	Vertical
2479.20	-65.10	10.87	0.44	-54.67	-13.00	-41.67	Vertical
3305.60	-63.00	12.01	0.65	-51.64	-13.00	-38.64	Vertical
1652.80	-65.27	9.58	0.20	-55.89	-13.00	-42.89	Horizontal
2479.20	-65.51	10.87	0.44	-55.08	-13.00	-42.08	Horizontal
3305.60	-63.50	12.01	0.65	-52.14	-13.00	-39.14	Horizontal
Middle channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
1673.20	-64.80	9.66	0.21	-55.35	-13.00	-42.35	Vertical
2509.80	-65.36	10.91	0.46	-54.91	-13.00	-41.91	Vertical
3346.40	-62.98	12.09	0.66	-51.55	-13.00	-38.55	Vertical
1673.20	-65.39	9.66	0.21	-55.94	-13.00	-42.94	Horizontal
2509.80	-65.22	10.91	0.46	-54.77	-13.00	-41.77	Horizontal
3346.40	-63.39	12.09	0.66	-51.96	-13.00	-38.96	Horizontal
Highest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
1697.60	-65.09	9.74	0.24	-55.59	-13.00	-42.59	Vertical
2546.40	-66.50	12.09	0.50	-54.91	-13.00	-41.91	Vertical
3395.20	-63.08	12.19	0.68	-51.57	-13.00	-38.57	Vertical
1697.60	-65.77	9.74	0.24	-56.27	-13.00	-43.27	Horizontal
2546.40	-66.62	12.09	0.50	-55.03	-13.00	-42.03	Horizontal
3395.20	-63.95	12.19	0.68	-52.44	-13.00	-39.44	Horizontal
Remark:							
1. The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.							

WCDMA Band II 12.2k RMC							
Lowest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
3704.80	-59.12	12.65	0.76	-47.23	-13.00	-34.23	Vertical
5557.20	-56.15	12.77	1.14	-44.52	-13.00	-31.52	Vertical
3704.80	-58.64	12.65	0.76	-46.75	-13.00	-33.75	Horizontal
5557.20	-56.63	12.77	1.14	-45.00	-13.00	-32.00	Horizontal
Middle channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
3760.00	-58.86	12.71	0.77	-46.92	-13.00	-33.92	Vertical
5640.00	-55.96	12.87	1.15	-44.24	-13.00	-31.24	Vertical
3760.00	-59.15	12.71	0.77	-47.21	-13.00	-34.21	Horizontal
5640.00	-56.86	12.87	1.15	-45.14	-13.00	-32.14	Horizontal
Highest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
3815.20	-58.83	12.78	0.80	-46.85	-13.00	-33.85	Vertical
5722.80	-56.30	12.97	1.19	-44.52	-13.00	-31.52	Vertical
3815.20	-58.73	12.78	0.80	-46.75	-13.00	-33.75	Horizontal
5722.80	-57.31	12.97	1.19	-45.53	-13.00	-32.53	Horizontal
Remark:							
1. The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.							

WCDMA Band IV 12.2k RMC							
Lowest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
3424.40	-60.34	12.25	0.44	-48.52	-13.00	-35.52	Vertical
5136.60	-57.96	12.92	0.71	-45.74	-13.00	-32.74	Vertical
3424.40	-58.57	12.25	0.44	-46.75	-13.00	-33.75	Horizontal
5136.60	-58.12	12.92	0.71	-45.90	-13.00	-32.90	Horizontal
Middle channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
3464.80	-60.30	12.33	0.45	-48.42	-13.00	-35.42	Vertical
5197.20	-57.98	12.88	0.72	-45.82	-13.00	-32.82	Vertical
3464.80	-58.75	12.33	0.45	-46.87	-13.00	-33.87	Horizontal
5197.20	-57.99	12.88	0.72	-45.83	-13.00	-32.83	Horizontal
Highest channel							
Frequency (MHz)	Level at antenna terminals (dBm)	Substitute antenna gain (dBi)	Cable Loss (dBi)	Spurious Emission level (dBm)	Limit Line (dBm)	Over Limit (dBm)	Polarization
3505.20	-60.07	12.41	0.47	-48.12	-13.00	-35.12	Vertical
5257.80	-57.98	12.85	0.74	-45.86	-13.00	-32.86	Vertical
3505.20	-58.93	12.41	0.47	-46.98	-13.00	-33.98	Horizontal
5257.80	-57.52	12.85	0.74	-45.40	-13.00	-32.40	Horizontal
Remark:							
2. The emission levels of below 1 GHz are lower than the limit 20dB and not show in test report.							

6.7 Frequency stability V.S. Temperature measurement

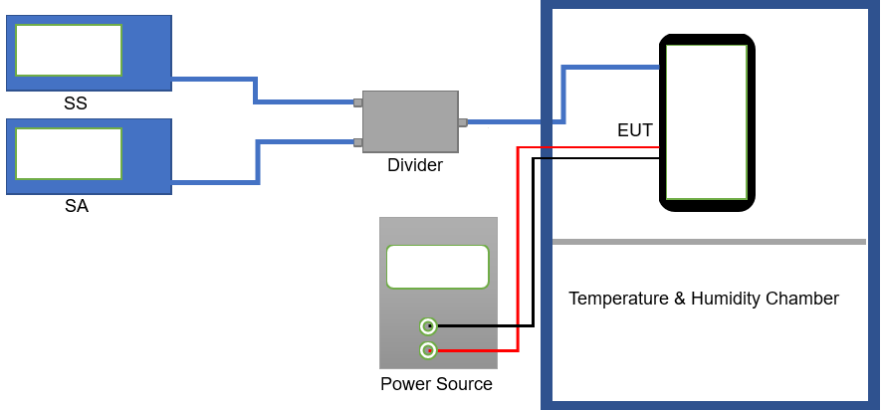Test Requirement:	FCC Part 22.355, FCC Part 24.235, FCC Part 27.54 FCC Part 2.1055(a)(1)(b)
Limit:	±2.5 ppm for GSM 850 and WCDMA 850 Within authorized band for PCS 1900 and WCDMA 1900 and WCDMA 1700
Test setup:	 The diagram illustrates the test setup. On the left, there are two blue boxes labeled 'SS' (Signal Source) and 'SA' (Spectrum Analyzer). They are connected via blue lines to a central grey box labeled 'Divider'. From the 'Divider', a blue line connects to a black rectangle labeled 'EUT' (Equipment Under Test) which is located inside a larger blue-outlined box labeled 'Temperature & Humidity Chamber'. Below the chamber, there is a grey box labeled 'Power Source' with two green circles representing terminals. Red lines connect these terminals to the 'EUT' inside the chamber.
Test procedure:	1. The equipment under test was connected to an external DC power supply and input rated voltage. 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. 3. The EUT was placed inside the temperature chamber. 4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency. 5. Turn EUT off and set the chamber temperature to –30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. 6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data (the worst channel):

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	179	0.213961	±2.5	Pass
	-20	163	0.194836		
	-10	158	0.188860		
	0	143	0.170930		
	10	136	0.162563		
	20	127	0.151805		
	30	170	0.203203		
	40	119	0.142242		
	50	150	0.179297		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	180	0.095745	Within authorized band for PCS 1900	Pass
	-20	176	0.093617		
	-10	168	0.089362		
	0	152	0.080851		
	10	146	0.077660		
	20	139	0.073936		
	30	122	0.064894		
	40	160	0.085106		
	50	130	0.069149		
Note: Only the worst case shown in the report.					

Reference Frequency: EGPRS850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	175	0.209180	±2.5	Pass
	-20	166	0.198422		
	-10	159	0.190055		
	0	146	0.174516		
	10	138	0.164953		
	20	126	0.150610		
	30	114	0.136266		
	40	152	0.181688		
	50	131	0.156586		
Reference Frequency: EGPRS 1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	176	0.093617	Within authorized band for PCS 1900	Pass
	-20	169	0.089894		
	-10	146	0.077660		
	0	135	0.071809		
	10	128	0.068085		
	20	112	0.059574		
	30	160	0.085106		
	40	153	0.081383		
	50	121	0.064362		
Note: Only the worst case shown in the report.					

Reference Frequency: WCDMA BAND V 12.2k RMC Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	173	0.206789	±2.5	Pass
	-20	166	0.198422		
	-10	158	0.188860		
	0	143	0.170930		
	10	136	0.162563		
	20	150	0.179297		
	30	124	0.148219		
	40	117	0.139852		
	50	110	0.131485		
Reference Frequency: WCDMA BAND II 12.2k RMC Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	172	0.091489	Within authorized band for WCDMA 1900	Pass
	-20	164	0.087234		
	-10	157	0.083511		
	0	146	0.077660		
	10	137	0.072872		
	20	152	0.080851		
	30	122	0.064894		
	40	130	0.069149		
	50	113	0.060106		
Reference Frequency: UMTS1700 12.2k RMC Middle channel=1413 channel=1732.6MHz					
Power supplied (Vdc)	Temperature (°C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
3.85	-30	175	0.101004	Within authorized band for WCDMA 1700	Pass
	-20	167	0.096387		
	-10	153	0.088307		
	0	146	0.084266		
	10	127	0.073300		
	20	135	0.077918		
	30	120	0.069260		
	40	112	0.064643		
	50	161	0.092924		
Note: Only the worst case shown in the report.					

6.8 Frequency stability V.S. Voltage measurement

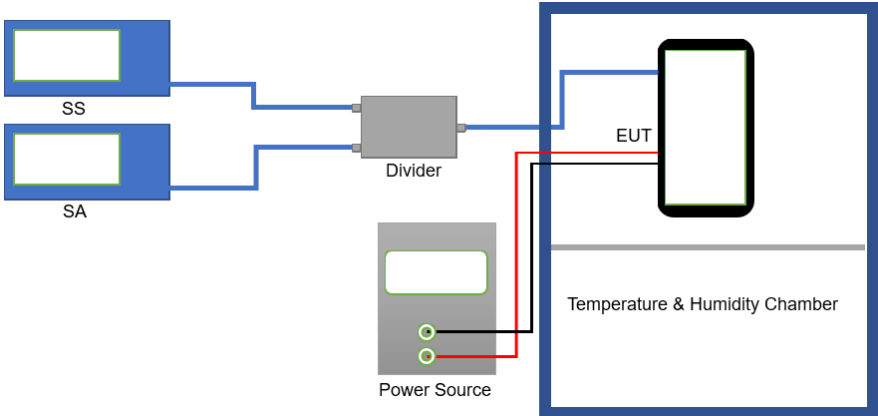Test Requirement:	FCC Part 22.355, FCC Part 24.235, FCC Part 27.54 FCC Part 2.1055(d)(2)
Limit:	±2.5 ppm for GSM 850 and WCDMA 850 Within authorized band for PCS 1900 and WCDMA 1900 and WCDMA 1700
Test setup:	 The diagram illustrates the test setup. A Signal Source (SS) and a Spectrum Analyzer (SA) are connected to a Divider. The output of the Divider is connected to the EUT (Equipment Under Test) inside a Temperature & Humidity Chamber. A Power Source is also connected to the EUT.
Test procedure:	1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage. 2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. 3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data (the worst channel):

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.40	90	0.107578	±2.5	Pass
	3.85	80	0.095625		
	3.50	70	0.083672		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.40	93	0.049468	Within authorized band for PCS 1900	Pass
	3.85	80	0.042553		
	3.50	72	0.038298		
Reference Frequency: EGPRS 850 Middle channel= 190 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.40	83	0.099211	±2.5	Pass
	3.85	72	0.086063		
	3.50	68	0.081281		
Reference Frequency: EGPRS 1900 Middle channel= 661 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.40	88	0.046809	Within authorized band for PCS 1900	Pass
	3.85	79	0.042021		
	3.50	67	0.035638		
Note: Only the worst case shown in the report.					

Reference Frequency: UMTS 850 12.2k RMC Middle channel=4183 channel=836.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.40	89	0.106383	±2.5	Pass
	3.85	76	0.090844		
	3.50	69	0.082477		
Reference Frequency: UMTS 1900 12.2k RMC Middle channel=9400 channel=1880MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.40	86	0.045745	Within authorized band for WCDMA 1900	Pass
	3.85	75	0.039894		
	3.50	64	0.034043		
Reference Frequency: UMTS1700 12.2k RMC Middle channel=1413 channel=1732.6MHz					
Temperature (°C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	4.40	84	0.048482	Within authorized band for WCDMA 1700	Pass
	3.85	73	0.042133		
	3.50	52	0.030013		
Note: Only the worst case shown in the report.					