



RF TEST REPORT

Applicant	Shanghai Simcom Ltd.
FCC ID	UDV-201710
Product	LTE-FDD/HSPA MODULE
Brand	SIMCOM
Model	SIM7600A-H
Report No.	RXA1711-0374RF02
Issue Date	November 24, 2017

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2017)/ FCC CFR 47 Part 24E (2017)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Performed by: Jiangpeng Lan

Approved by: Kai Xu

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000

TABLE OF CONTENT

1. Test Laboratory	4
1.1. Notes of the test report.....	4
1.2. Test facility	4
1.3. Testing Location	5
2. General Description of Equipment under Test.....	6
3. Applied Standards	7
4. Test Configuration	8
5. Test Case Results	9
5.1. RF Power Output	9
5.2. Radiates Spurious Emission	14
6. Main Test Instruments	27
ANNEX A: EUT Appearance and Test Setup	28
A.1 EUT Appearance.....	28
A.2 Test Setup.....	29



Summary of measurement results

No.	Test Case	Clause in FCC rules	Verdict
1	RF power output	2.1046	PASS
2	Radiates Spurious Emission	2.1053 / 24.238(a)	PASS
Date of Testing: November 14, 2017~ November 18, 2017			
Note: PASS: The EUT complies with the essential requirements in the standard. FAIL: The EUT does not comply with the essential requirements in the standard.			

1. Test Laboratory

1.1. Notes of the test report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above. This report must not be used by the client to claim product certification, approval, or endorsement by any government agencies.

1.2. Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.



1.3. Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2. General Description of Equipment under Test

Client Information

Applicant	Shanghai Simcom Ltd.
Applicant address	SIM Technology Building.,No.633, Jinzhong Rd,Changning District, Shanghai, P.R.China
Manufacturer	Shanghai Simcom Ltd.
Manufacturer address	SIM Technology Building.,No.633, Jinzhong Rd,Changning District, Shanghai, P.R.China

General information

EUT Description			
Model	SIM7600A-H		
IMEI	861475030055604		
Hardware Version	V1.02		
Software Version	B02V01		
Power Supply	External Power Supply		
Antenna Type	External Antenna		
Test Mode(s)	WCDMA Band II; LTE Band 2;		
Test Modulation	(WCDMA)QPSK; (LTE)QPSK,16QAM		
WCDMA Release	R8		
LTE Release	R10		
Rated Power Supply Voltage	3.8V		
Extreme Voltage	Minimum: 3.4V Maximum: 4.2V		
Operating Frequency Range(s)	Band	Tx (MHz)	Rx (MHz)
	WCDMA Band II	1850 ~ 1910	1930 ~ 1990
	LTE Band 2	1850 ~ 1910	1930 ~ 1990
Note: The information of the EUT is declared by the manufacturer.			



3. Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR47 Part 2 (2017)

FCC CFR 47 Part 24E (2017)

ANSI/TIA-603-D (2010)

KDB 971168 D01 Power Meas License Digital Systems v03

4. Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (X axis, horizontal polarization) and the worst case was recorded.

SIM7600A-H (FCC ID: UDV-201710) is a variant model of SIM7500A (FCC ID: UDV-201606).

Test items tested see the table below:

	Test items	Modes/Modulation
		WCDMA Band II
Conducted Test cases	RF power output	RMC/ HSDPA/ HSUPA/ DC-HSDPA
Radiated Test cases	Radiates Spurious Emission	RMC

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 2:

Test items	Bandwidth (MHz)						Modulation		RB			Test Channel		
	1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	O	O	O	O	O	O	O	O	O	O	O	O	O	O
Radiates Spurious Emission	O	O	O	O	O	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.													

5. Test Case Results

5.1. RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

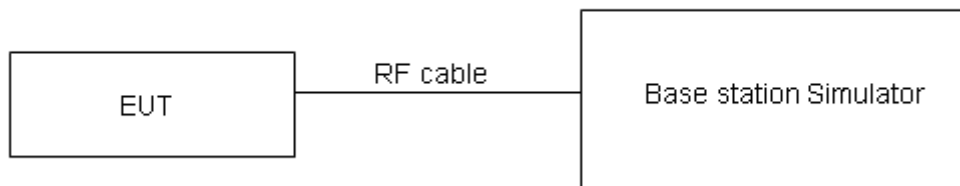

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 0.4$ dB.

**Test Results**

WCDMA Band II		Conducted Power(dBm)		
		Channel 9262	Channel 9400	Channel 9538
		1852.4(MHz)	1880(MHz)	1907.6(MHz)
RMC		22.63	22.38	22.62
HSDPA	Sub - Test 1	21.50	21.38	21.54
	Sub - Test 2	21.42	21.40	21.56
	Sub - Test 3	20.98	20.86	21.02
	Sub - Test 4	20.93	20.82	20.99
HSUPA	Sub - Test 1	21.53	21.43	21.59
	Sub - Test 2	20.98	20.84	21.03
	Sub - Test 3	21.56	21.44	21.62
	Sub - Test 4	21.46	21.36	21.52
	Sub - Test 5	21.42	21.43	21.59
DC-HSDPA	Sub - Test 1	21.56	21.27	21.51
	Sub - Test 2	21.45	21.46	21.50
	Sub - Test 3	20.94	20.85	20.96
	Sub - Test 4	20.96	20.84	20.97

LTE Band 2				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18607/1850.7	18900/1880	19193/1909.3
1.4MHz	QPSK	1	0	21.62	21.64	21.50
		1	2	21.79	21.73	21.56
		1	5	21.67	21.60	21.32
		3	0	21.80	21.86	21.32
		3	2	21.87	21.80	21.53
		3	3	21.79	21.78	21.67
		6	0	20.72	20.80	20.55
	16QAM	1	0	21.37	21.11	21.00
		1	2	21.39	21.25	21.06
		1	5	21.13	21.21	21.01
		3	0	20.73	20.50	20.51
		3	2	20.74	20.63	20.56
		3	3	20.72	20.81	20.49
		6	0	19.54	19.68	19.56
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18615/1851.5	18900/1880	19185/1908.5
3MHz	QPSK	1	0	21.78	21.95	21.72
		1	7	21.97	21.85	21.89
		1	14	21.96	21.86	21.47
		8	0	20.94	21.00	20.89
		8	4	20.95	20.97	20.98
		8	7	20.96	20.94	20.66
		15	0	20.83	20.92	20.71
	16QAM	1	0	21.74	21.49	21.22
		1	7	21.94	21.84	21.27
		1	14	21.52	21.60	21.09
		8	0	19.78	19.88	19.91
		8	4	19.98	19.98	19.98
		8	7	19.89	19.97	19.77
		15	0	19.80	19.96	19.76
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18625/1852.5	18900/1880	19175/1907.5
5MHz	QPSK	1	0	21.75	21.93	21.68
		1	13	21.95	21.81	21.86
		1	24	21.93	21.81	21.43
		12	0	20.91	20.95	20.85



		12	6	20.93	20.93	20.96
		12	13	20.94	20.92	20.62
		25	0	20.81	20.91	20.69
	16QAM	1	0	21.71	21.45	21.19
		1	13	21.91	21.82	21.24
		1	24	21.49	21.58	21.05
		12	0	19.76	19.84	19.88
		12	6	19.95	19.99	19.94
		12	13	19.86	19.95	19.73
		25	0	19.78	19.92	19.71
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18650/1855	18900/1880	19150/1905
10MHz	QPSK	1	0	21.77	21.94	21.71
		1	25	21.98	21.86	21.90
		1	49	21.95	21.85	21.46
		25	0	20.94	21.00	20.89
		25	13	20.96	20.98	20.97
		25	25	20.96	20.96	20.67
		50	0	20.89	20.93	20.73
	16QAM	1	0	21.73	21.48	21.21
		1	25	21.94	21.86	21.27
		1	49	21.52	21.60	21.08
		25	0	19.79	19.89	19.92
		25	13	19.97	20.04	19.97
		25	25	19.89	19.98	19.77
		50	0	19.81	19.97	19.75
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18675/1857.5	18900/1880	19125/1902.5
15MHz	QPSK	1	0	21.76	21.90	21.69
		1	38	21.96	21.85	21.87
		1	74	21.92	21.80	21.42
		36	0	20.92	20.96	20.86
		36	18	20.93	20.93	20.96
		36	39	20.93	20.93	20.63
		75	0	20.87	20.89	20.68
	16QAM	1	0	21.68	21.46	21.19
		1	38	21.92	21.83	21.25
		1	74	21.49	21.56	21.05
		36	0	19.76	19.87	19.89
		36	18	19.94	19.99	19.93



		36	39	19.87	19.96	19.74
		75	0	19.78	19.92	19.71
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				18700/1860	18900/1880	19100/1900
20MHz	QPSK	1	0	21.73	21.86	21.66
		1	50	21.95	21.81	21.85
		1	99	21.90	21.79	21.39
		50	0	20.89	20.91	20.82
		50	25	20.91	20.89	20.93
		50	50	20.90	20.88	20.59
		100	0	20.84	20.84	20.64
	16QAM	1	0	21.66	21.42	21.14
		1	50	21.88	21.81	21.21
		1	99	21.47	21.53	21.03
		50	0	19.73	19.83	19.86
		50	25	19.91	19.97	19.90
		50	50	19.84	19.91	19.70
		100	0	19.76	19.88	19.68

5.2. Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement


1. The testing follows FCC KDB 971168 v02r02 Section 5.8 and ANSI/TIA-603-D-2010.
2. The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, $\text{ERP} = \text{EIRP} - 2.15\text{dBi}$.

Test setup

30MHz~~~ 1GHz

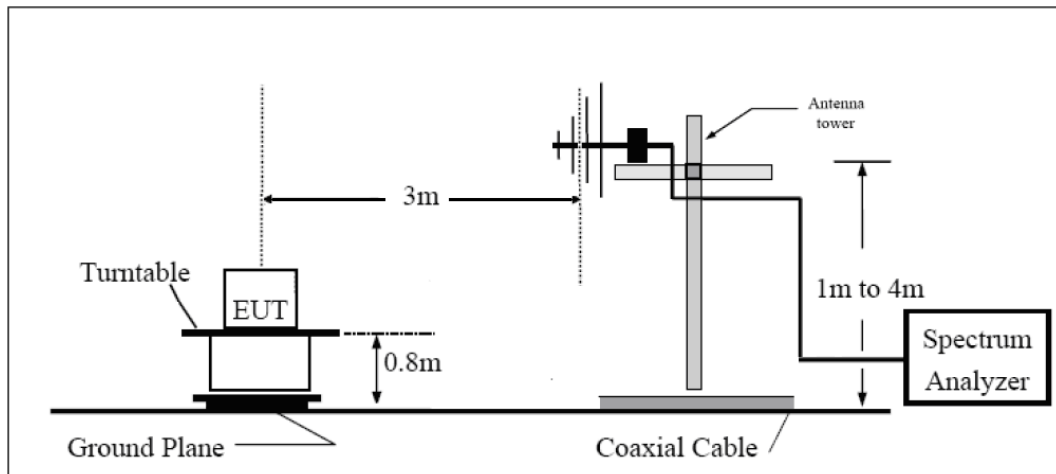

Above 1GHz

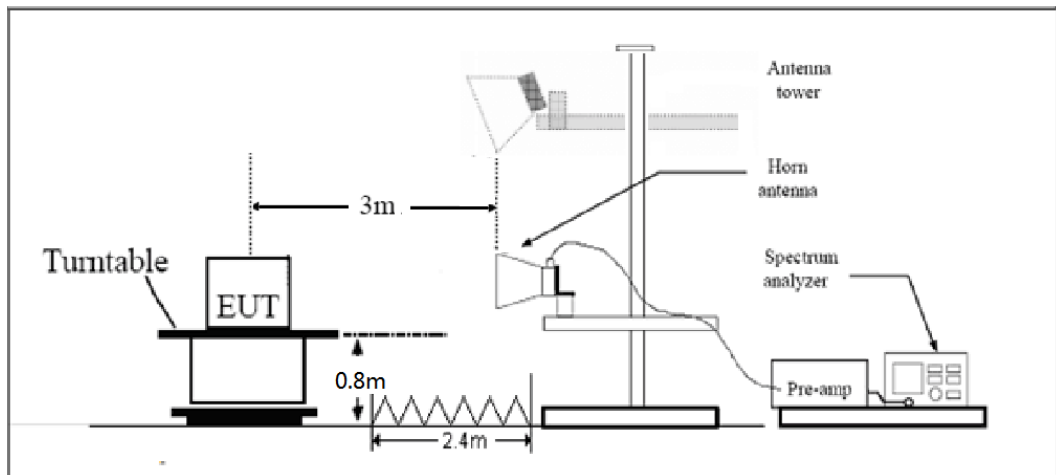

Note: Area side: 2.4mX3.6m

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in stand-up position (Z axis) and the worst case was recorded.

Limits

Rule Part 24.238(a) specifies that “on any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10} (P)$ dB.”

Limit	-13 dBm
-------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$, $U = 3.55$ dB.

Test Result

WCDMA Band II CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3704.8	-48.65	5.1	11.05	Horizontal	-42.70	-13.00	29.70	180
3	5557.2	-52.53	5.42	12.65	Horizontal	-45.30	-13.00	32.30	270
4	7409.6	-46.55	6.7	13.85	Horizontal	-39.40	-13.00	26.40	45
5	9262.0	-45.94	7.01	14.75	Horizontal	-38.20	-13.00	25.20	135
6	11114.4	-45.87	7.48	15.95	Horizontal	-37.40	-13.00	24.40	90
7	12966.8	-46.24	7.51	16.55	Horizontal	-37.20	-13.00	24.20	135
8	14819.2	-44.01	8.24	15.35	Horizontal	-36.90	-13.00	23.90	225
9	16671.6	-42.94	8.41	14.95	Horizontal	-36.40	-13.00	23.40	315
10	18524.0	-42.01	8.54	15.45	Horizontal	-35.10	-13.00	22.10	180
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

WCDMA Band II CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-54.85	5.1	11.05	Horizontal	-48.90	-13.00	35.90	315
3	5640.0	-53.13	5.42	12.65	Horizontal	-45.90	-13.00	32.90	90
4	7520.0	-46.75	6.7	13.85	Horizontal	-39.60	-13.00	26.60	225
5	9400.0	-45.44	7.01	14.75	Horizontal	-37.70	-13.00	24.70	270
6	11280.0	-44.67	7.48	15.95	Horizontal	-36.20	-13.00	23.20	45
7	13160.0	-45.34	7.51	16.55	Horizontal	-36.30	-13.00	23.30	180
8	15040.0	-44.71	8.24	15.35	Horizontal	-37.60	-13.00	24.60	90
9	16920.0	-41.54	8.41	14.95	Horizontal	-35.00	-13.00	22.00	135
10	18800.0	-41.31	8.54	15.45	Horizontal	-34.40	-13.00	21.40	225
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



WCDMA Band II CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3813.8	-50.15	5.1	11.05	Horizontal	-44.20	-13.00	31.20	45
3	5722.8	-52.73	5.42	12.65	Horizontal	-45.50	-13.00	32.50	270
4	7630.4	-47.85	6.7	13.85	Horizontal	-40.70	-13.00	27.70	315
5	9538.0	-47.64	7.01	14.75	Horizontal	-39.90	-13.00	26.90	90
6	11445.6	-45.47	7.48	15.95	Horizontal	-37.00	-13.00	24.00	225
7	13353.2	-45.44	7.51	16.55	Horizontal	-36.40	-13.00	23.40	45
8	15260.8	-43.21	8.24	15.35	Horizontal	-36.10	-13.00	23.10	180
9	17168.4	-42.34	8.41	14.95	Horizontal	-35.80	-13.00	22.80	90
10	19076.0	-42.11	8.54	15.45	Horizontal	-35.20	-13.00	22.20	315

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3701.4	-45.45	5.1	11.05	Horizontal	-39.50	-13.00	26.50	270
3	5552.1	-51.93	5.42	12.65	Horizontal	-44.70	-13.00	31.70	180
4	7402.8	-48.95	6.7	13.85	Horizontal	-41.80	-13.00	28.80	135
5	9253.5	-45.94	7.01	14.75	Horizontal	-38.20	-13.00	25.20	270
6	11104.2	-45.17	7.48	15.95	Horizontal	-36.70	-13.00	23.70	180
7	12954.9	-44.54	7.51	16.55	Horizontal	-35.50	-13.00	22.50	225
8	14805.6	-43.41	8.24	15.35	Horizontal	-36.30	-13.00	23.30	45
9	16656.3	-41.94	8.41	14.95	Horizontal	-35.40	-13.00	22.40	270
10	18507.0	-41.61	8.54	15.45	Horizontal	-34.70	-13.00	21.70	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 1.4MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-49.55	5.10	11.05	Horizontal	-43.60	-13.00	30.60	135
3	5640.0	-48.13	5.42	12.65	Horizontal	-40.90	-13.00	27.90	270
4	7520.0	-49.75	6.70	13.85	Horizontal	-42.60	-13.00	29.60	180
5	9400.0	-46.24	7.01	14.75	Horizontal	-38.50	-13.00	25.50	225
6	11280.0	-44.87	7.48	15.95	Horizontal	-36.40	-13.00	23.40	270
7	13160.0	-44.74	7.51	16.55	Horizontal	-35.70	-13.00	22.70	180
8	15040.0	-44.31	8.24	15.35	Horizontal	-37.20	-13.00	24.20	135
9	16920.0	-42.44	8.41	14.95	Horizontal	-35.90	-13.00	22.90	270
10	18800.0	-41.71	8.54	15.45	Horizontal	-34.80	-13.00	21.80	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 1.4MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3818.6	-48.75	5.10	11.05	Horizontal	-42.80	-13.00	29.80	225
3	5727.9	-45.73	5.42	12.65	Horizontal	-38.50	-13.00	25.50	45
4	7637.2	-49.55	6.70	13.85	Horizontal	-42.40	-13.00	29.40	270
5	9546.5	-46.44	7.01	14.75	Horizontal	-38.70	-13.00	25.70	180
6	11455.8	-44.67	7.48	15.95	Horizontal	-36.20	-13.00	23.20	135
7	13365.1	-44.44	7.51	16.55	Horizontal	-35.40	-13.00	22.40	270
8	15274.4	-43.41	8.24	15.35	Horizontal	-36.30	-13.00	23.30	180
9	17183.7	-42.24	8.41	14.95	Horizontal	-35.70	-13.00	22.70	225
10	19093.0	-41.81	8.54	15.45	Horizontal	-34.90	-13.00	21.90	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 3MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3703.0	-45.05	5.10	11.05	Horizontal	-39.10	-13.00	26.10	90
3	5554.5	-50.73	5.42	12.65	Horizontal	-43.50	-13.00	30.50	270
4	7406.0	-48.65	6.70	13.85	Horizontal	-41.50	-13.00	28.50	180
5	9257.5	-46.44	7.01	14.75	Horizontal	-38.70	-13.00	25.70	135
6	11109.0	-45.87	7.48	15.95	Horizontal	-37.40	-13.00	24.40	270
7	12960.5	-46.34	7.51	16.55	Horizontal	-37.30	-13.00	24.30	180
8	14812.0	-43.21	8.24	15.35	Horizontal	-36.10	-13.00	23.10	225
9	16663.5	-45.84	8.41	14.95	Horizontal	-39.30	-13.00	26.30	45
10	18515.0	-45.31	8.54	15.45	Horizontal	-38.40	-13.00	25.40	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 3MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-55.55	5.10	11.05	Horizontal	-49.60	-13.00	36.60	180
3	5640.0	-53.73	5.42	12.65	Horizontal	-46.50	-13.00	33.50	270
4	7520.0	-49.45	6.70	13.85	Horizontal	-42.30	-13.00	29.30	45
5	9400.0	-45.94	7.01	14.75	Horizontal	-38.20	-13.00	25.20	90
6	11280.0	-46.07	7.48	15.95	Horizontal	-37.60	-13.00	24.60	135
7	13160.0	-46.14	7.51	16.55	Horizontal	-37.10	-13.00	24.10	225
8	15040.0	-43.01	8.24	15.35	Horizontal	-35.90	-13.00	22.90	180
9	16920.0	-42.64	8.41	14.95	Horizontal	-36.10	-13.00	23.10	270
10	18800.0	-42.11	8.54	15.45	Horizontal	-35.20	-13.00	22.20	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 3MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3817.0	-56.05	5.10	11.05	Horizontal	-50.10	-13.00	37.10	270
3	5725.5	-53.93	5.42	12.65	Horizontal	-46.70	-13.00	33.70	180
4	7634.0	-49.95	6.70	13.85	Horizontal	-42.80	-13.00	29.80	225
5	9542.5	-45.84	7.01	14.75	Horizontal	-38.10	-13.00	25.10	45
6	11451.0	-45.87	7.48	15.95	Horizontal	-37.40	-13.00	24.40	90
7	13359.5	-45.94	7.51	16.55	Horizontal	-36.90	-13.00	23.90	180
8	15268.0	-43.51	8.24	15.35	Horizontal	-36.40	-13.00	23.40	270
9	17176.5	-42.04	8.41	14.95	Horizontal	-35.50	-13.00	22.50	135
10	19085.0	-41.51	8.54	15.45	Horizontal	-34.60	-13.00	21.60	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3705.0	-55.75	5.10	11.05	Horizontal	-49.80	-13.00	36.80	225
3	5557.5	-54.03	5.42	12.65	Horizontal	-46.80	-13.00	33.80	45
4	7410.0	-49.65	6.70	13.85	Horizontal	-42.50	-13.00	29.50	90
5	9262.5	-46.94	7.01	14.75	Horizontal	-39.20	-13.00	26.20	180
6	11115.0	-47.17	7.48	15.95	Horizontal	-38.70	-13.00	25.70	270
7	12967.5	-47.44	7.51	16.55	Horizontal	-38.40	-13.00	25.40	180
8	14820.0	-43.61	8.24	15.35	Horizontal	-36.50	-13.00	23.50	225
9	16672.5	-43.34	8.41	14.95	Horizontal	-36.80	-13.00	23.80	45
10	18525.0	-42.31	8.54	15.45	Horizontal	-35.40	-13.00	22.40	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 5MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-48.45	5.10	11.05	Horizontal	-42.50	-13.00	29.50	180
3	5640.0	-47.93	5.42	12.65	Horizontal	-40.70	-13.00	27.70	135
4	7520.0	-50.25	6.70	13.85	Horizontal	-43.10	-13.00	30.10	270
5	9400.0	-46.14	7.01	14.75	Horizontal	-38.40	-13.00	25.40	180
6	11280.0	-46.27	7.48	15.95	Horizontal	-37.80	-13.00	24.80	225
7	13160.0	-45.54	7.51	16.55	Horizontal	-36.50	-13.00	23.50	45
8	15040.0	-42.81	8.24	15.35	Horizontal	-35.70	-13.00	22.70	90
9	16920.0	-41.74	8.41	14.95	Horizontal	-35.20	-13.00	22.20	270
10	18800.0	-41.81	8.54	15.45	Horizontal	-34.90	-13.00	21.90	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 5MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3815.0	-56.05	5.10	11.05	Horizontal	-50.10	-13.00	37.10	225
3	5722.5	-54.53	5.42	12.65	Horizontal	-47.30	-13.00	34.30	45
4	7630.0	-50.45	6.70	13.85	Horizontal	-43.30	-13.00	30.30	135
5	9537.5	-47.54	7.01	14.75	Horizontal	-39.80	-13.00	26.80	180
6	11445.0	-46.87	7.48	15.95	Horizontal	-38.40	-13.00	25.40	225
7	13352.5	-46.54	7.51	16.55	Horizontal	-37.50	-13.00	24.50	45
8	15260.0	-44.31	8.24	15.35	Horizontal	-37.20	-13.00	24.20	90
9	17167.5	-42.64	8.41	14.95	Horizontal	-36.10	-13.00	23.10	270
10	19075.0	-42.41	8.54	15.45	Horizontal	-35.50	-13.00	22.50	180

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.



LTE Band 2 10MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3710.0	-45.55	5.10	11.05	Horizontal	-39.60	-13.00	26.60	225
3	5565.0	-47.83	5.42	12.65	Horizontal	-40.60	-13.00	27.60	45
4	7420.0	-49.55	6.70	13.85	Horizontal	-42.40	-13.00	29.40	90
5	9275.0	-47.14	7.01	14.75	Horizontal	-39.40	-13.00	26.40	180
6	11130.0	-47.07	7.48	15.95	Horizontal	-38.60	-13.00	25.60	270
7	12985.0	-46.84	7.51	16.55	Horizontal	-37.80	-13.00	24.80	135
8	14840.0	-43.51	8.24	15.35	Horizontal	-36.40	-13.00	23.40	180
9	16695.0	-42.34	8.41	14.95	Horizontal	-35.80	-13.00	22.80	225
10	18550.0	-42.41	8.54	15.45	Horizontal	-35.50	-13.00	22.50	45

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 10MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-47.25	5.10	11.05	Horizontal	-41.30	-13.00	28.30	90
3	5640.0	-46.83	5.42	12.65	Horizontal	-39.60	-13.00	26.60	180
4	7520.0	-49.15	6.70	13.85	Horizontal	-42.00	-13.00	29.00	270
5	9400.0	-47.14	7.01	14.75	Horizontal	-39.40	-13.00	26.40	180
6	11280.0	-47.07	7.48	15.95	Horizontal	-38.60	-13.00	25.60	225
7	13160.0	-46.74	7.51	16.55	Horizontal	-37.70	-13.00	24.70	45
8	15040.0	-44.51	8.24	15.35	Horizontal	-37.40	-13.00	24.40	90
9	16920.0	-43.04	8.41	14.95	Horizontal	-36.50	-13.00	23.50	180
10	18800.0	-42.81	8.54	15.45	Horizontal	-35.90	-13.00	22.90	135

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 2 10MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3810.0	-55.45	5.10	11.05	Horizontal	-49.50	-13.00	36.50	270
3	5715.0	-53.73	5.42	12.65	Horizontal	-46.50	-13.00	33.50	180
4	7620.0	34.15	6.70	13.85	Horizontal	41.30	-13.00	-54.30	225
5	9525.0	-47.44	7.01	14.75	Horizontal	-39.70	-13.00	26.70	45
6	11430.0	-46.97	7.48	15.95	Horizontal	-38.50	-13.00	25.50	90
7	13335.0	-46.64	7.51	16.55	Horizontal	-37.60	-13.00	24.60	180
8	15240.0	-43.91	8.24	15.35	Horizontal	-36.80	-13.00	23.80	270
9	17145.0	-42.94	8.41	14.95	Horizontal	-36.40	-13.00	23.40	45
10	19050.0	-42.61	8.54	15.45	Horizontal	-35.70	-13.00	22.70	135
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 2 15MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3715.0	-45.45	5.10	11.05	Horizontal	-39.50	-13.00	26.50	45
3	5572.5	-53.93	5.42	12.65	Horizontal	-46.70	-13.00	33.70	90
4	7430.0	-47.45	6.70	13.85	Horizontal	-40.30	-13.00	27.30	90
5	9287.5	-47.14	7.01	14.75	Horizontal	-39.40	-13.00	26.40	45
6	11145.0	-47.17	7.48	15.95	Horizontal	-38.70	-13.00	25.70	135
7	13002.5	-46.54	7.51	16.55	Horizontal	-37.50	-13.00	24.50	225
8	14860.0	-44.21	8.24	15.35	Horizontal	-37.10	-13.00	24.10	45
9	16717.5	-43.34	8.41	14.95	Horizontal	-36.80	-13.00	23.80	90
10	18575.0	-42.31	8.54	15.45	Horizontal	-35.40	-13.00	22.40	135
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 2 15MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-47.75	5.10	11.05	Horizontal	-41.80	-13.00	28.80	135
3	5640.0	-51.73	5.42	12.65	Horizontal	-44.50	-13.00	31.50	45
4	7520.0	-49.75	6.70	13.85	Horizontal	-42.60	-13.00	29.60	90
5	9400.0	-47.54	7.01	14.75	Horizontal	-39.80	-13.00	26.80	180
6	11280.0	-46.87	7.48	15.95	Horizontal	-38.40	-13.00	25.40	270
7	13160.0	-46.94	7.51	16.55	Horizontal	-37.90	-13.00	24.90	225
8	15040.0	-44.31	8.24	15.35	Horizontal	-37.20	-13.00	24.20	135
9	16920.0	-43.34	8.41	14.95	Horizontal	-36.80	-13.00	23.80	225
10	18800.0	-42.31	8.54	15.45	Horizontal	-35.40	-13.00	22.40	45
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 2 15MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3805.0	-34.45	5.10	11.05	Horizontal	-28.50	-13.00	15.50	90
3	5707.5	-52.93	5.42	12.65	Horizontal	-45.70	-13.00	32.70	135
4	7610.0	-49.05	6.70	13.85	Horizontal	-41.90	-13.00	28.90	225
5	9512.5	-47.44	7.01	14.75	Horizontal	-39.70	-13.00	26.70	45
6	11415.0	-47.07	7.48	15.95	Horizontal	-38.60	-13.00	25.60	90
7	13317.5	-47.24	7.51	16.55	Horizontal	-38.20	-13.00	25.20	135
8	15220.0	-44.51	8.24	15.35	Horizontal	-37.40	-13.00	24.40	135
9	17122.5	-43.14	8.41	14.95	Horizontal	-36.60	-13.00	23.60	90
10	19025.0	-42.81	8.54	15.45	Horizontal	-35.90	-13.00	22.90	225
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 2 20MHz CH-Low

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3720.0	-44.25	5.10	11.05	Horizontal	-38.30	-13.00	25.30	135
3	5580.0	-53.93	5.42	12.65	Horizontal	-46.70	-13.00	33.70	90
4	7440.0	-49.35	6.70	13.85	Horizontal	-42.20	-13.00	29.20	45
5	9300.0	-47.14	7.01	14.75	Horizontal	-39.40	-13.00	26.40	90
6	11160.0	-47.07	7.48	15.95	Horizontal	-38.60	-13.00	25.60	90
7	13020.0	-46.84	7.51	16.55	Horizontal	-37.80	-13.00	24.80	135
8	14880.0	-43.41	8.24	15.35	Horizontal	-36.30	-13.00	23.30	225
9	16740.0	-42.24	8.41	14.95	Horizontal	-35.70	-13.00	22.70	135
10	18600.0	-42.11	8.54	15.45	Horizontal	-35.20	-13.00	22.20	90
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

LTE Band 2 20MHz CH-Middle

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3760.0	-46.45	5.10	11.05	Horizontal	-40.50	-13.00	27.50	90
3	5640.0	-50.03	5.42	12.65	Horizontal	-42.80	-13.00	29.80	45
4	7520.0	-49.25	6.70	13.85	Horizontal	-42.10	-13.00	29.10	45
5	9400.0	-47.84	7.01	14.75	Horizontal	-40.10	-13.00	27.10	180
6	11280.0	-47.17	7.48	15.95	Horizontal	-38.70	-13.00	25.70	270
7	13160.0	-47.54	7.51	16.55	Horizontal	-38.50	-13.00	25.50	225
8	15040.0	-44.71	8.24	15.35	Horizontal	-37.60	-13.00	24.60	135
9	16920.0	-43.34	8.41	14.95	Horizontal	-36.80	-13.00	23.80	180
10	18800.0	-42.11	8.54	15.45	Horizontal	-35.20	-13.00	22.20	225
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									



LTE Band 2 20MHz CH-High

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	3800.0	-46.95	5.10	11.05	Horizontal	-41.00	-13.00	28.00	45
3	5700.0	-48.93	5.42	12.65	Horizontal	-41.70	-13.00	28.70	225
4	7600.0	-49.45	6.70	13.85	Horizontal	-42.30	-13.00	29.30	135
5	9500.0	-47.54	7.01	14.75	Horizontal	-39.80	-13.00	26.80	90
6	11400.0	-46.97	7.48	15.95	Horizontal	-38.50	-13.00	25.50	45
7	13300.0	-46.64	7.51	16.55	Horizontal	-37.60	-13.00	24.60	90
8	15200.0	-44.31	8.24	15.35	Horizontal	-37.20	-13.00	24.20	45
9	17100.0	-42.94	8.41	14.95	Horizontal	-36.40	-13.00	23.40	135
10	19000.0	-42.01	8.54	15.45	Horizontal	-35.10	-13.00	22.10	90

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

6. Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113645	2017-05-14	2018-05-13
Universal Radio Communication Tester	Agilent	E5515C	MY48367192	2017-05-20	2018-05-19
Signal Analyzer	R&S	FSV30	100815	2016-12-16	2017-12-15
Trilog Antenna	SCHWARZBEC K	VUBL 9163	9163-201	2014-12-06	2017-12-05
Horn Antenna	R&S	HF907	100126	2014-12-06	2017-12-05


*****END OF REPORT *****

ANNEX A: EUT Appearance and Test Setup

A.1 EUT Appearance



Front Side

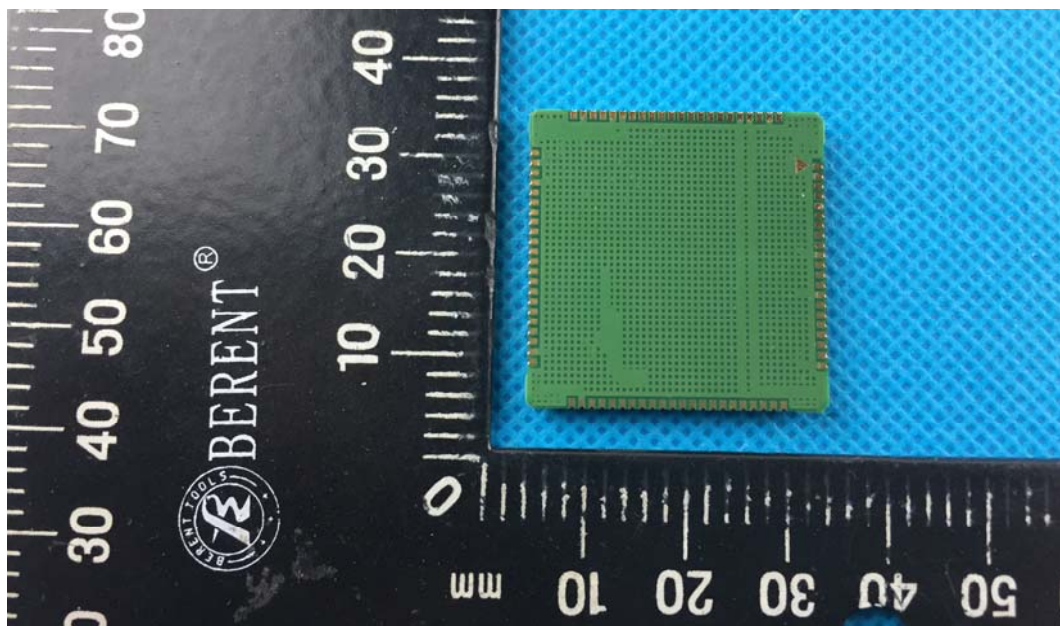

Back Side

a: EUT

Picture 1 EUT and Accessory

A.2 Test Setup



Picture 2: Radiated Spurious Emissions Test setup