



TEST REPORT

Product Name: Smart phone
FCC ID: 2ANMU-C37
Trademark: OUKITEL
Model Number: C37, C37 S, C37 Pro, C37 Ultra
Prepared For: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address: A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL ZONE, GUANLAN, LONGHUA, SHENZHEN, 518XXX China
Manufacturer: SHENZHEN YUNJI INTELLIGENT TECHNOLOGY CO.,LTD
Address: A2 2F BUILDING ENET NEW INDUSTRIAL PARK, DAFU INDUSTRIAL ZONE, GUANLAN, LONGHUA, SHENZHEN, 518XXX China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Dec. 07, 2023
Sample tested Date: Dec. 07, 2023 to Dec. 15, 2023
Issue Date: Dec. 15, 2023
Report No.: CTB231215008RFX
Test Standards: FCC Part 22H & 24E
Test Results: PASS
Remark: This is GSM radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	8
4.3 Support Equipment	8
4.4 Channel List	8
4.5 Test Mode	9
4.6 Test Environment	9
5. TEST FACILITY AND TEST INSTRUMENT USED	10
5.1 Test Facility	10
5.2 Test Instrument Used	10
6. RF OUTPUT POWER	12
6.1 Standard Applicable	12
6.2 Test Procedure	12
6.3 Environmental Conditions	12
6.4 Summary of Test Results/Plots	13
7. PEAK-TO-AVERAGE RATIO(PAR) OF TRANSMITTER	20
7.1 Standard Applicable	20
7.2 Test Procedure	20
7.3 Environmental Conditions	20
7.4 Summary of Test Results	21
8. EMISSION BANDWIDTH	23
8.1 Standard Applicable	23
8.2 Test Procedure	23
8.3 Environmental Conditions	23
8.4 Summary of Test Results/Plots	24
9. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL	38
9.1 Standard Applicable	38
9.2 Test Procedure	38
9.3 Environmental Conditions	38
9.4 Summary of Test Results/Plots	38
10. SPURIOUS RADIATED EMISSIONS	63
10.1 Standard Applicable	63
10.2 Test Procedure	63
10.3 Environmental Conditions	63
10.4 Summary of Test Results/Plots	64
11. FREQUENCY STABILITY	68
11.1 Standard Applicable	68
11.2 Test Procedure	68



11.3	Environmental Conditions	68
11.4	Summary of Test Results/Plots	69
12.	EUT TEST PHOTO	80

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB231215008RFX	Dec. 15, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

FCC Rules	Description of Test Item	Result
§1.1307, §2.1091	RF Exposure	Compliant
§22.913 (a), §24.232 (c)	RF Output Power	Compliant
§24.51	Peak-to-average Ratio(PAR) of Transmitter	Compliant
§22.917 (b), §24.238 (b)	Emission Bandwidth	Compliant
§22.917 (a), §24.238 (a)	Spurious Emissions at Antenna Terminal	Compliant
§22.917 (a), §24.238 (a)	Spurious Radiation Emissions	Compliant
§22.917 (a), §24.238 (a)	Out of Band Emissions	Compliant
§22.355, §24.235	Frequency Stability	Compliant

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
Receiver Reference Sensitivity level	1.9dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	C37, C37 S, C37 Pro, C37 Ultra
Model Description:	All the model are the same circuit and RF module, only different for model name. Test sample model: C37
Hardware Version:	M617-MUB-V2
Software Version:	OUKITEL_C37_EEA_V03
Operation Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz WCDMA Band 2: 1850~1910MHz WCDMA Band 5: 824~849MHz
Max. RF output power:	GSM850: 32.47dBm GSM1900: 29.44dBm WCDMA Band 2: 23.58dBm WCDMA Band 5: 22.71dBm
Type of Modulation:	GMSK, BPSK
Antenna installation:	Internal antenna
Antenna Gain:	GSM850: -2.33dBi, GSM1900: -1.02dBi WCDMA Band 2: -1.02dBi WCDMA Band 5: -2.33dBi
Ratings:	DC 5V charging from adapter DC 3.87V from battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538
Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.			

4.5 Test Mode

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 2	Low, Middle, High Channels
TM11	HSDPA Band 2	Low, Middle, High Channels
TM12	HSUPA Band 2	Low, Middle, High Channels

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.87
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	2024.07.05
4	Communication test set	R&S	CMW500	108058	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2024.07.05
18	Amplifier	HP	8447E	2945A02747	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2024.07.08



21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2024.07.08
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.07.05

6. RF OUTPUT POWER


6.1 Standard Applicable

According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

6.2 Test Procedure

Conducted output power test method:



Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

6.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

6.4 Summary of Test Results/Plots

Max. Radiated Power

ERP For GSM Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	32.09	1.5	0	H	1.5	-2.33	28.26	38.45
824.2	32.29	1.5	0	V	1.5	-2.33	28.46	38.45
Middle Channel								
836.6	32.17	1.5	0	H	1.5	-2.33	28.34	38.45
836.6	32.08	1.5	0	V	1.5	-2.33	28.25	38.45
High Channel								
848.8	32.33	1.5	0	H	1.5	-2.33	28.50	38.45
848.8	31.79	1.5	0	V	1.5	-2.33	27.96	38.45

EIRP For GSM Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	28.12	1.5	0	H	1.9	-1.02	25.20	33
1850.2	28.78	1.5	0	V	1.9	-1.02	25.86	33
Middle Channel								
1880	29.26	1.5	0	H	1.9	-1.02	26.34	33
1880	29.02	1.5	0	V	1.9	-1.02	26.10	33
High Channel								
1909.8	29.07	1.5	0	H	1.9	-1.02	26.15	33
1909.8	29.37	1.5	0	V	1.9	-1.02	26.45	33

ERP For GPRS Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	32.39	1.5	0	H	1.5	-2.33	28.56	38.45
824.2	31.82	1.5	0	V	1.5	-2.33	27.99	38.45
Middle Channel								
836.6	31.52	1.5	0	H	1.5	-2.33	27.69	38.45
836.6	31.65	1.5	0	V	1.5	-2.33	27.82	38.45
High Channel								
848.8	32.19	1.5	0	H	1.5	-2.33	28.36	38.45
848.8	32.51	1.5	0	V	1.5	-2.33	28.68	38.45

EIRP For GPRS Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	28.32	1.5	0	H	1.9	-1.02	25.40	33
1850.2	28.75	1.5	0	V	1.9	-1.02	25.83	33
Middle Channel								
1880	28.48	1.5	0	H	1.9	-1.02	25.56	33
1880	28.79	1.5	0	V	1.9	-1.02	25.87	33
High Channel								
1909.8	28.84	1.5	0	H	1.9	-1.02	25.92	33
1909.8	28.68	1.5	0	V	1.9	-1.02	25.76	33

ERP For EDGE Mode GSM850

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
824.2	26.73	1.5	0	H	1.5	-2.33	22.90	38.45
824.2	26.27	1.5	0	V	1.5	-2.33	22.44	38.45
Middle Channel								
836.6	26.03	1.5	0	H	1.5	-2.33	22.20	38.45
836.6	26.50	1.5	0	V	1.5	-2.33	22.67	38.45
High Channel								
848.8	26.68	1.5	0	H	1.5	-2.33	22.85	38.45
848.8	26.77	1.5	0	V	1.5	-2.33	22.94	38.45

EIRP For EDGE Mode PCS1900

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1850.2	25.03	1.5	0	H	1.9	-1.02	22.11	33
1850.2	25.12	1.5	0	V	1.9	-1.02	22.20	33
Middle Channel								
1880	25.31	1.5	0	H	1.9	-1.02	22.39	33
1880	25.08	1.5	0	V	1.9	-1.02	22.16	33
High Channel								
1909.8	24.52	1.5	0	H	1.9	-1.02	21.60	33
1909.8	25.27	1.5	0	V	1.9	-1.02	22.35	33

ERP For WCDMA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	23.10	1.5	0	H	1.5	-2.33	19.27	38.45
826.4	23.11	1.5	0	V	1.5	-2.33	19.28	38.45
Middle Channel								
836.6	22.56	1.5	0	H	1.5	-2.33	18.73	38.45
836.6	23.14	1.5	0	V	1.5	-2.33	19.31	38.45
High Channel								
846.6	23.02	1.5	0	H	1.5	-2.33	19.19	38.45
846.6	23.03	1.5	0	V	1.5	-2.33	19.20	38.45

ERP For HSDPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	21.56	1.5	0	H	1.5	-2.33	17.73	38.45
826.4	21.42	1.5	0	V	1.5	-2.33	17.59	38.45
Middle Channel								
836.6	22.50	1.5	0	H	1.5	-2.33	18.67	38.45
836.6	22.22	1.5	0	V	1.5	-2.33	18.39	38.45
High Channel								
846.6	21.83	1.5	0	H	1.5	-2.33	18.00	38.45
846.6	22.11	1.5	0	V	1.5	-2.33	18.28	38.45

ERP For HSUPA Mode Band 5

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 22H Limit
MHz	dBm	Meter	Degree	H / V	dB	dBd	dBm	dBm
Low Channel								
826.4	21.16	1.5	0	H	1.5	-2.33	17.33	38.45
826.4	20.91	1.5	0	V	1.5	-2.33	17.08	38.45
Middle Channel								
836.6	21.46	1.5	0	H	1.5	-2.33	17.63	38.45
836.6	21.90	1.5	0	V	1.5	-2.33	18.07	38.45
High Channel								
846.6	21.77	1.5	0	H	1.5	-2.33	17.94	38.45
846.6	21.78	1.5	0	V	1.5	-2.33	17.95	38.45

EIRP For WCDMA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	21.72	1.5	0	H	1.9	-1.02	18.80	33
1852.4	22.45	1.5	0	V	1.9	-1.02	19.53	33
Middle Channel								
1880	22.80	1.5	0	H	1.9	-1.02	19.88	33
1880	22.90	1.5	0	V	1.9	-1.02	19.98	33
High Channel								
1907.6	23.23	1.5	0	H	1.9	-1.02	20.31	33
1907.6	22.31	1.5	0	V	1.9	-1.02	19.39	33

EIRP For HSDPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	21.39	1.5	0	H	1.9	-1.02	18.47	33
1852.4	20.95	1.5	0	V	1.9	-1.02	18.03	33
Middle Channel								
1880	22.54	1.5	0	H	1.9	-1.02	19.62	33
1880	22.34	1.5	0	V	1.9	-1.02	19.42	33
High Channel								
1907.6	21.57	1.5	0	H	1.9	-1.02	18.65	33
1907.6	22.43	1.5	0	V	1.9	-1.02	19.51	33

EIRP For HSUPA Mode Band 2

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Result	FCC Part 24E Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
Low Channel								
1852.4	20.52	1.5	0	H	1.9	-1.02	17.60	33
1852.4	20.33	1.5	0	V	1.9	-1.02	17.41	33
Middle Channel								
1880	21.53	1.5	0	H	1.9	-1.02	18.61	33
1880	21.46	1.5	0	V	1.9	-1.02	18.54	33
High Channel								
1907.6	21.88	1.5	0	H	1.9	-1.02	18.96	33
1907.6	20.72	1.5	0	V	1.9	-1.02	17.80	33

Note: Result = Substitute - Cable loss + Antenna Gain

Max. Conducted Output Power

For Cellular Band (GSM850)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
GSM	Low Channel	824.2	32.33	38.45
	Middle Channel	836.6	32.29	38.45
	High Channel	848.8	32.47	38.45
GPRS(1 Slot)	Low Channel	824.2	32.43	38.45
	Middle Channel	836.6	32.37	38.45
	High Channel	848.8	32.57	38.45
EDGE(1 Slot)	Low Channel	824.2	26.78	38.45
	Middle Channel	836.6	26.74	38.45
	High Channel	848.8	26.97	38.45

For PCS Band (GSM1900)

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
GSM	Low Channel	1850.2	28.79	33.0
	Middle Channel	1880.0	29.36	33.0
	High Channel	1909.8	29.44	33.0
GPRS(1 Slot)	Low Channel	1850.2	28.80	33.0
	Middle Channel	1880.0	29.35	33.0
	High Channel	1909.8	29.44	33.0
EDGE(1 Slot)	Low Channel	1850.2	25.31	33.0
	Middle Channel	1880.0	25.71	33.0
	High Channel	1909.8	25.45	33.0

For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 22.913 Limit (dBm)
WCDMA	Low Channel	826.4	23.36	38.45
	Middle Channel	836.6	23.47	38.45
	High Channel	846.6	23.58	38.45
HSDPA	Low Channel	826.4	22.38	38.45
	Middle Channel	836.6	22.53	38.45
	High Channel	846.6	22.62	38.45
HSUPA	Low Channel	826.4	21.69	38.45
	Middle Channel	836.6	22.36	38.45
	High Channel	846.6	22.51	38.45

For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	Average Power (dBm)	FCC Part 24.232 Limit (dBm)
WCDMA	Low Channel	1852.4	22.05	33.00
	Middle Channel	1880.0	22.68	33.00
	High Channel	1907.6	22.71	33.00
HSDPA	Low Channel	1852.4	21.09	33.00
	Middle Channel	1880.0	21.72	33.00
	High Channel	1907.6	21.77	33.00
HSUPA	Low Channel	1852.4	20.29	33.00
	Middle Channel	1880.0	21.51	33.00
	High Channel	1907.6	21.59	33.00

7. PEAK-TO-AVERAGE RATIO(PAR) OF TRANSMITTER


7.1 Standard Applicable

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 30kHz and the peak-to-average ratio (PAR) of the transmission was recorded. Record the maximum PAPR level associated with a probability of 0.1%.

Test Configuration for the emission bandwidth testing:

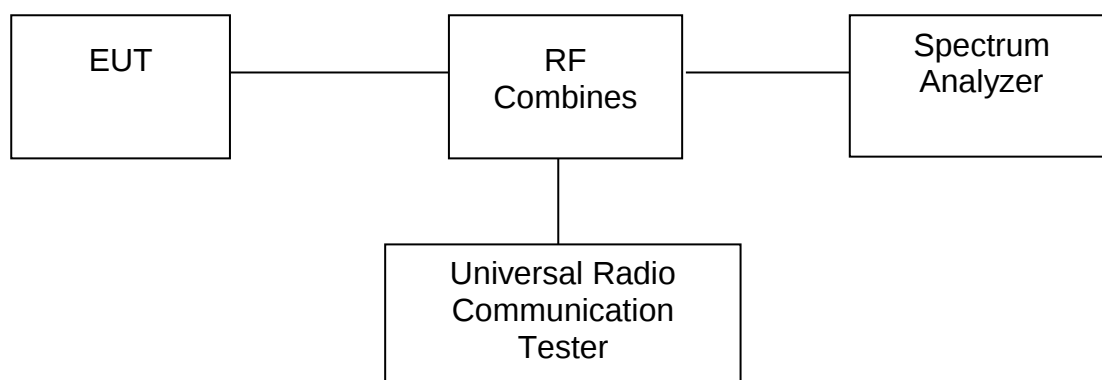

7.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

7.4 Summary of Test Results

Only the worst case was selected to record
For GSM850

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	190	836.6	2.75	13
GPRS(1 Slot)	190	836.6	2.79	13
EDGE(1 Slot)	190	836.6	8.20	13

For PCS 1900

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	512	1850.2	2.83	13
GPRS(1 Slot)	512	1850.2	2.87	13
EDGE(1 Slot)	512	1850.2	6.45	13


For WCDMA Band 5

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	4182	836.4	3.08	13
HSDPA	4182	836.4	4.75	13
HSUPA	4182	836.4	4.26	13


For WCDMA Band 2

Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	3.03	13
HSDPA	9400	1852.4	4.63	13
HSUPA	9400	1852.4	4.19	13

GSM :

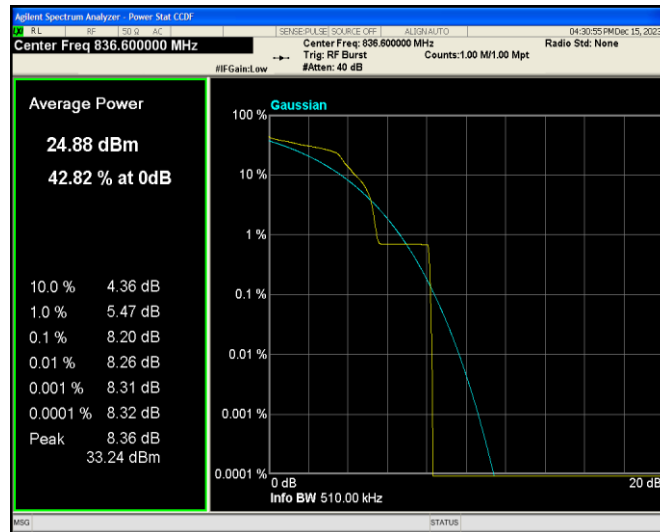

WCDMA:

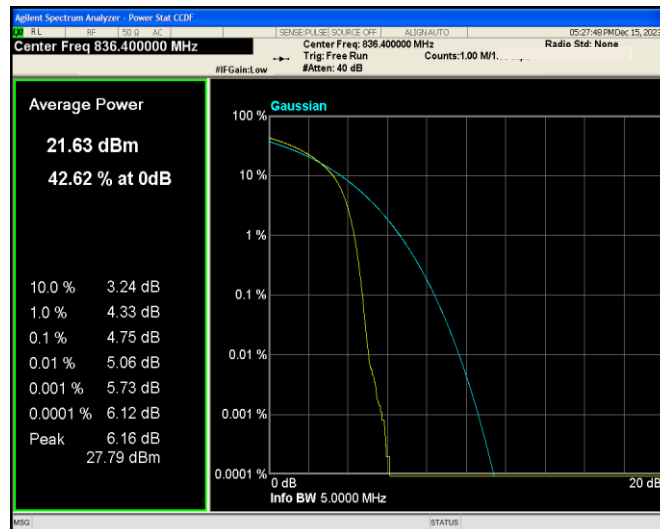

8. EMISSION BANDWIDTH

8.1 Standard Applicable


According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

8.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

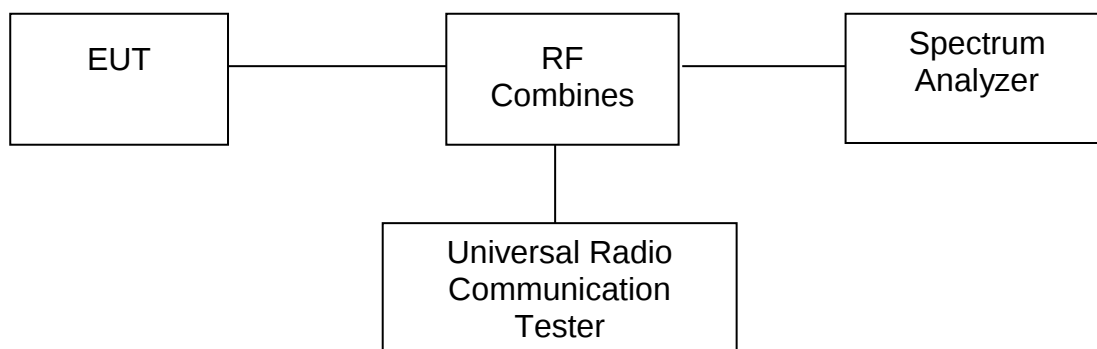

8.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

8.4 Summary of Test Results/Plots

For Cellular Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	128	824.2	246.988	315.515
	190	836.6	249.232	322.804
	251	848.8	244.425	313.412
GPRS	128	824.2	244.327	322.834
	190	836.6	244.630	318.098
	251	848.8	244.069	316.013
EDGE	128	824.2	240.428	299.404
	190	836.6	243.423	315.062
	251	848.8	248.627	309.958

For PCS Band

Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
GSM	512	1850.2	248.410	325.302
	661	1880.0	251.116	315.911
	810	1909.8	252.979	323.163
GPRS	512	1850.2	245.822	315.159
	661	1880.0	243.012	320.298
	810	1909.8	243.985	316.816
EDGE	512	1850.2	243.821	310.268
	661	1880.0	249.160	310.546
	810	1909.8	243.677	310.307

For Band 5


Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
WCDMA	4132	826.4	4165.647	4693.684
	4183	836.6	4171.502	4700.718
	4233	846.6	4179.356	4687.751
HSDPA	4132	826.4	4192.087	4717.144
	4183	836.6	4186.314	4689.129
	4233	846.6	4179.591	4704.746
HSUPA	4132	826.4	4203.581	4693.715
	4183	836.6	4163.457	4709.417
	4233	846.6	4182.651	4657.920

For Band 2


Test Mode	Channel	Frequency (MHz)	99% Emission Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)
WCDMA	9262	1852.4	4169.548	4700.575
	9400	1880.0	4153.352	4712.656
	9538	1907.6	4170.202	4716.729
HSDPA	9262	1852.4	4179.295	4700.272
	9400	1880.0	4194.760	4682.344
	9538	1907.6	4174.268	4703.710
HSUPA	9262	1852.4	4160.703	4720.802
	9400	1880.0	4168.457	4663.201
	9538	1907.6	4192.179	4698.714

For Cellular Band


GSM Low Channel

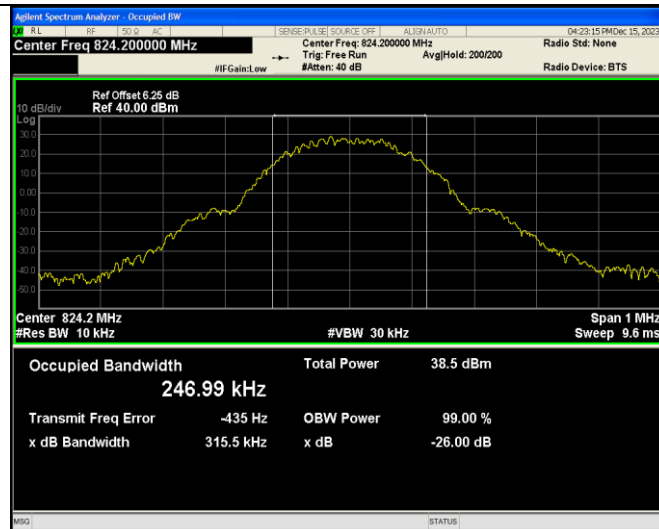


GSM Middle Channel

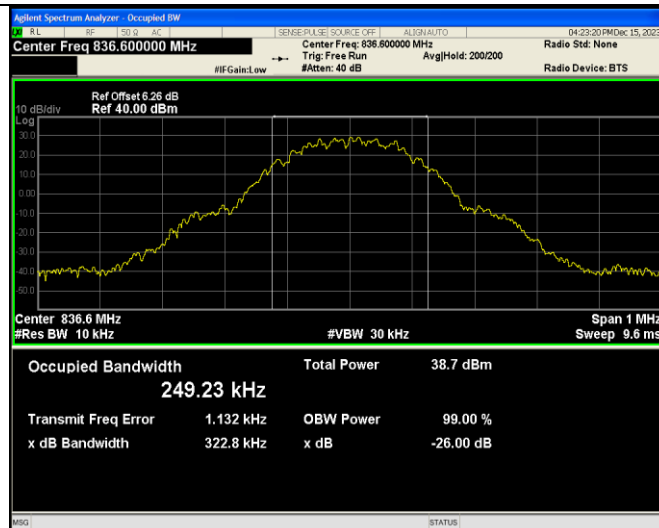


GSM High Channel

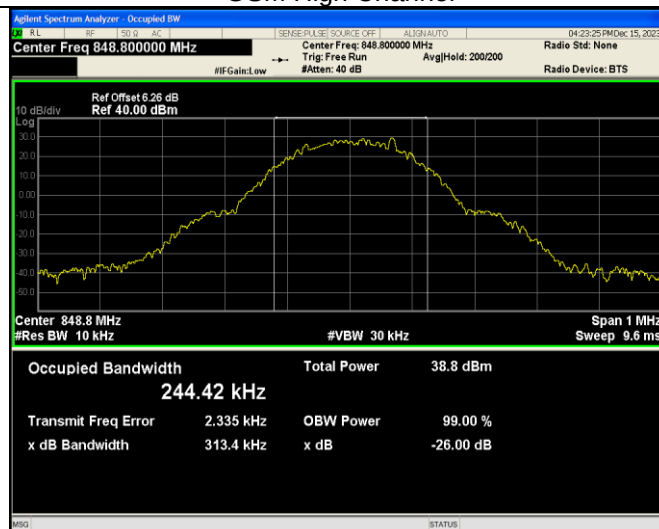


GPRS Low Channel

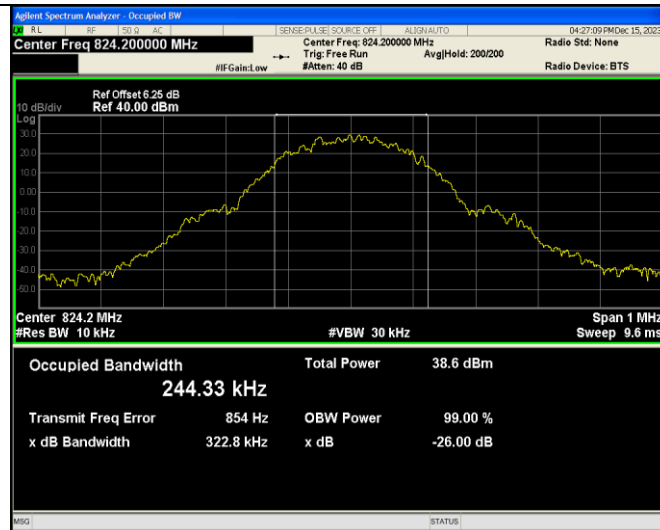


GPRS Middle Channel

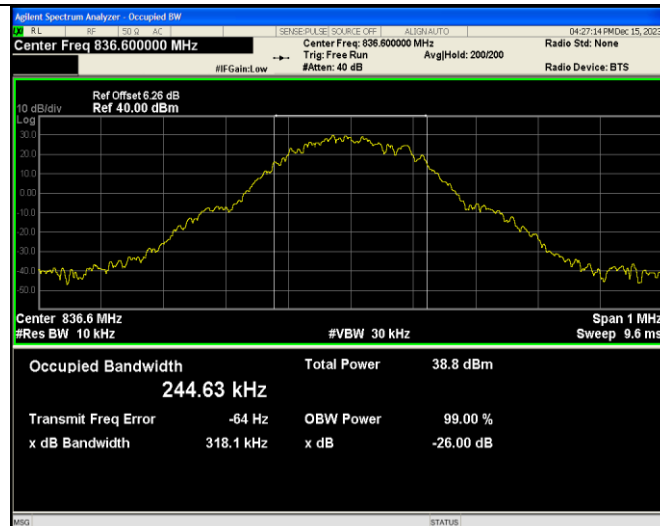


GPRS High Channel

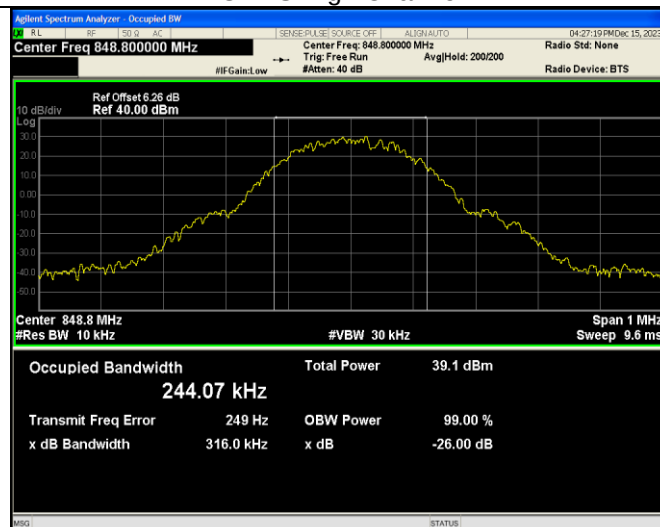


EDGE Low Channel

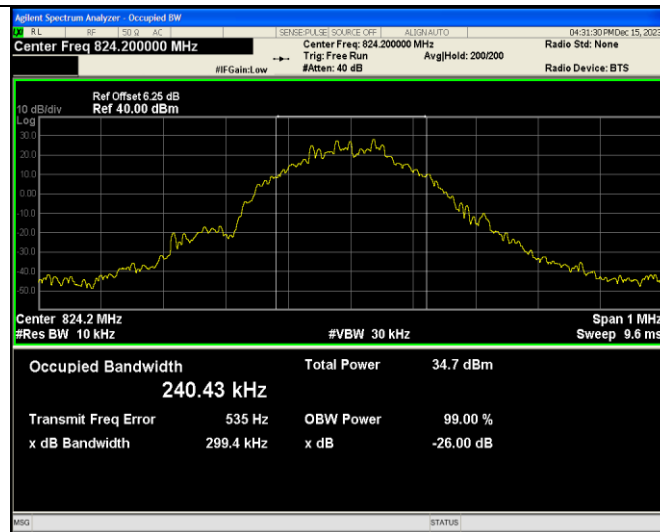

EDGE Middle Channel

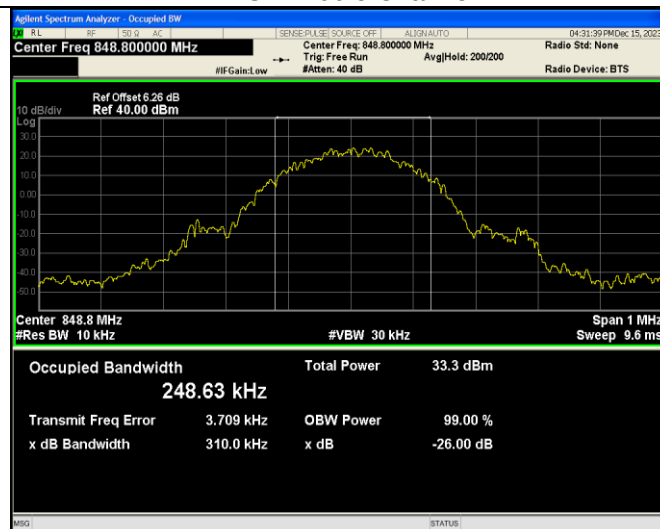


EDGE High Channel

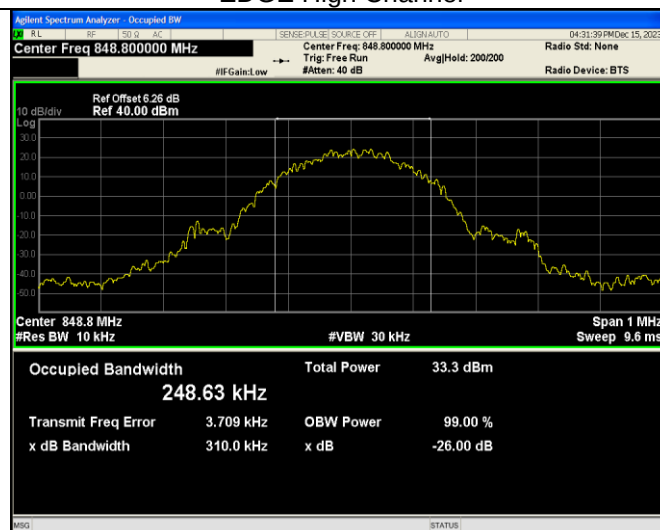


For PCS Band


GSM Low Channel

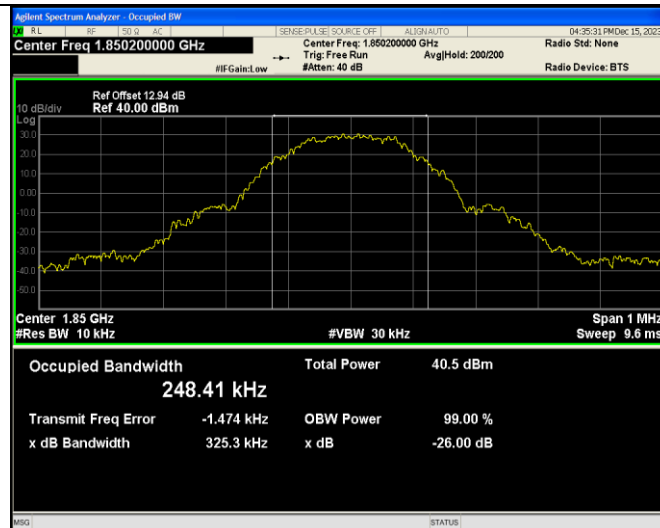


GPRS Middle Channel

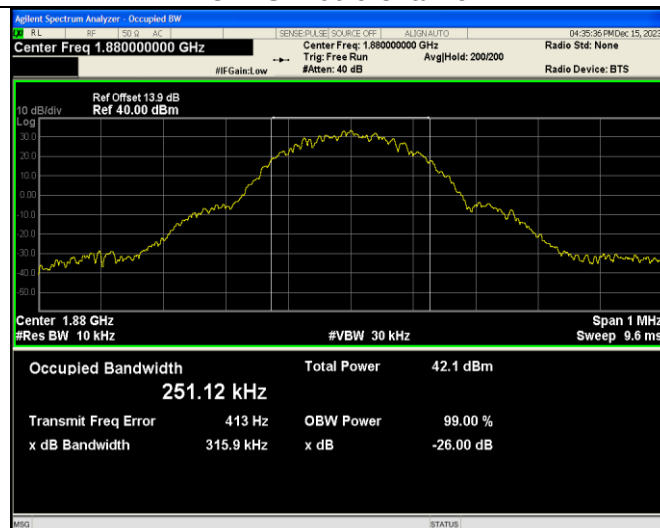


GPRS High Channel

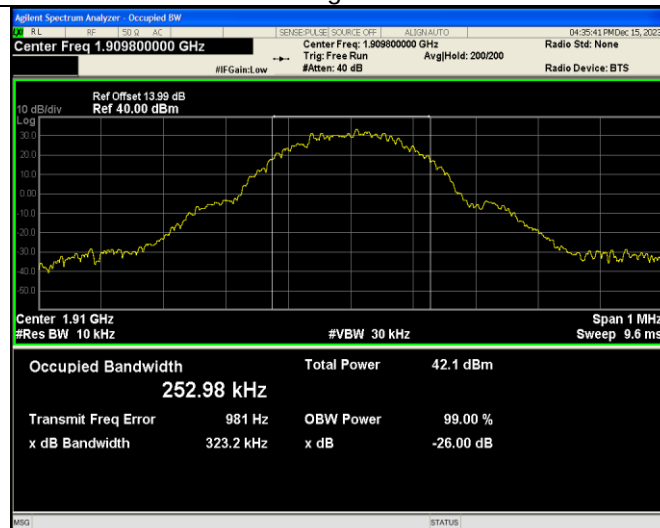


GPRS Low Channel

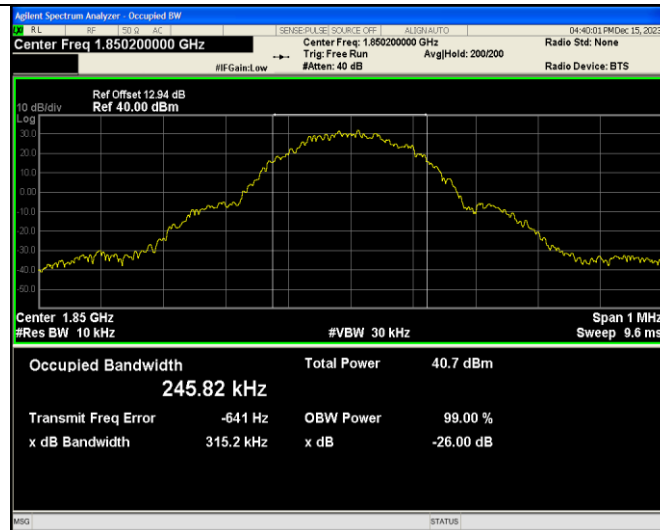


GPRS Middle Channel

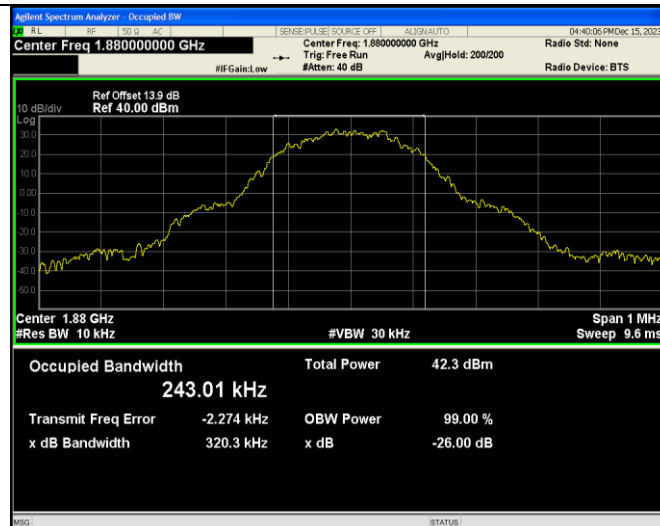


GPRS High Channel

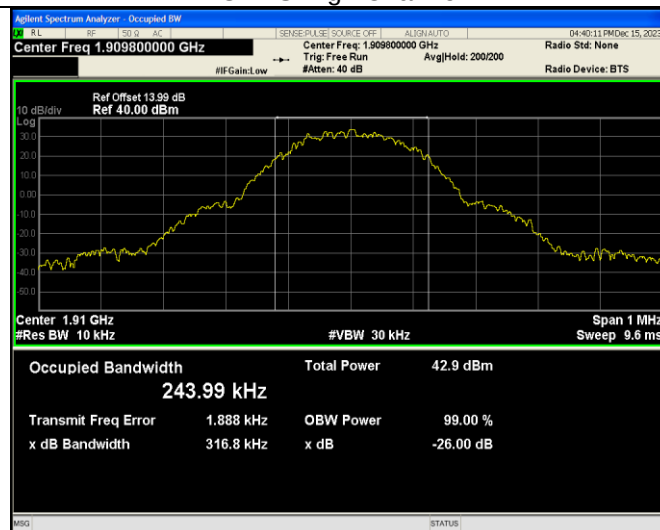


EDGE Low Channel

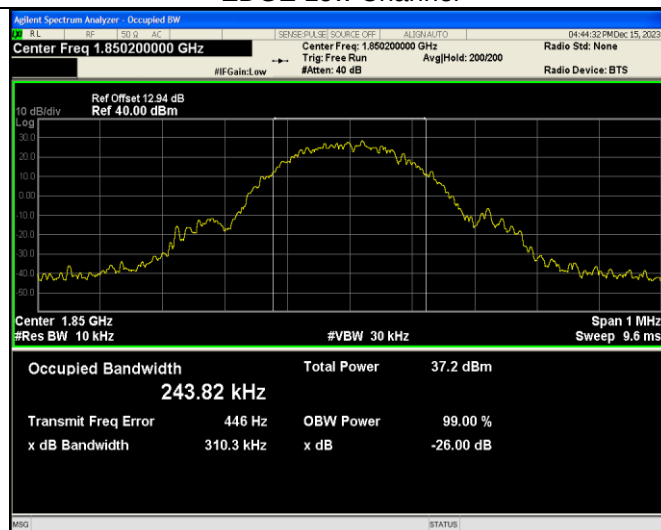

EDGE Middle Channel

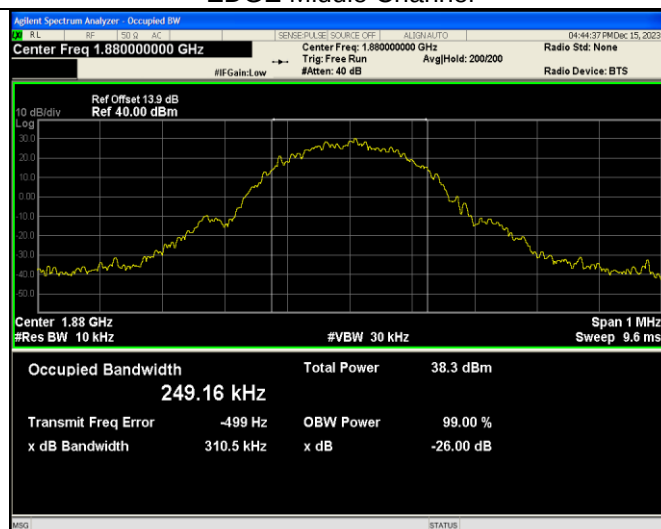


EDGE High Channel

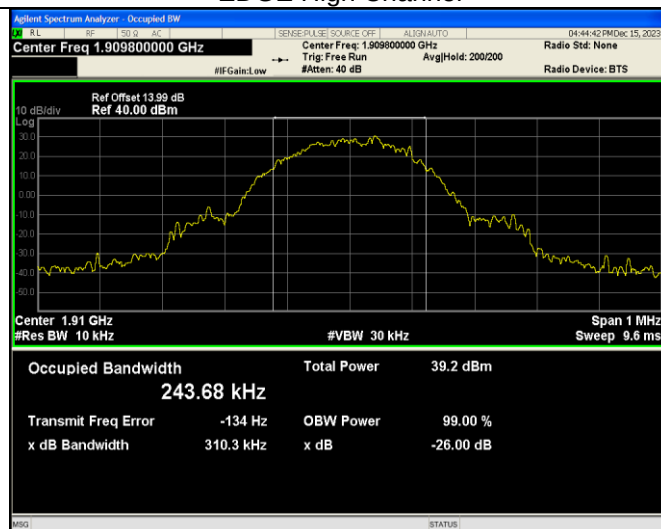


For Band V


WCDMA Low Channel

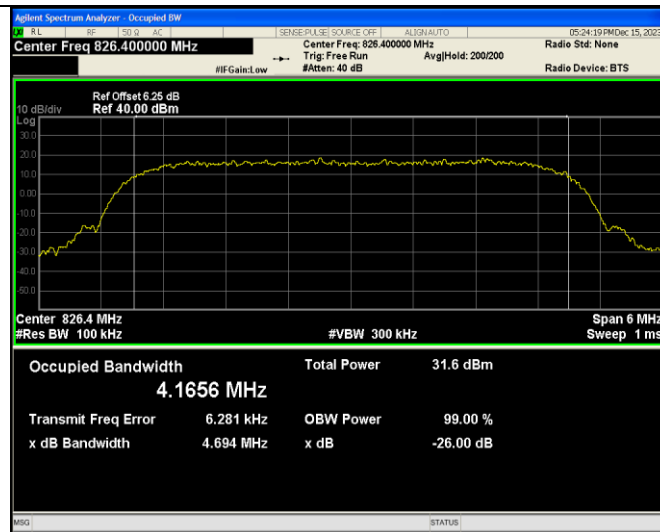


WCDMA Middle Channel

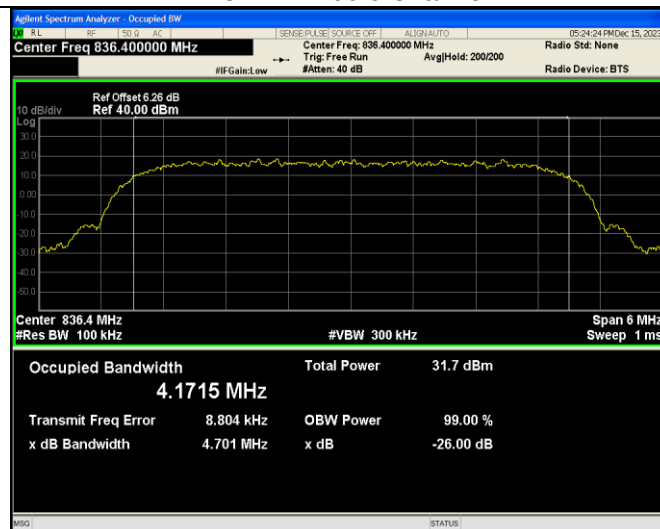


WCDMA High Channel

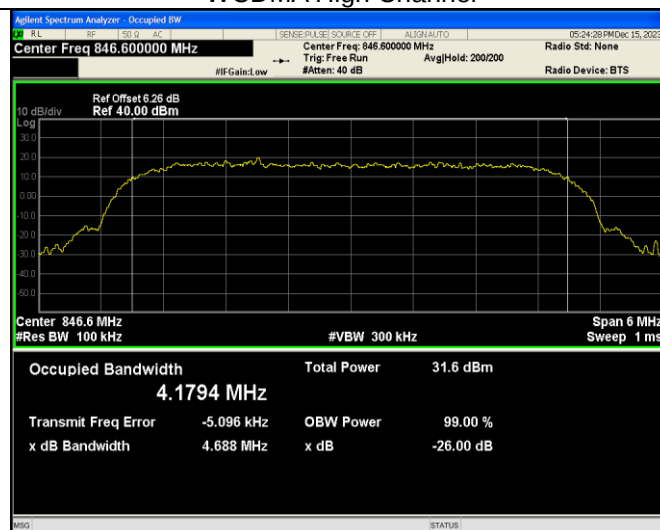


HSDPA Low Channel

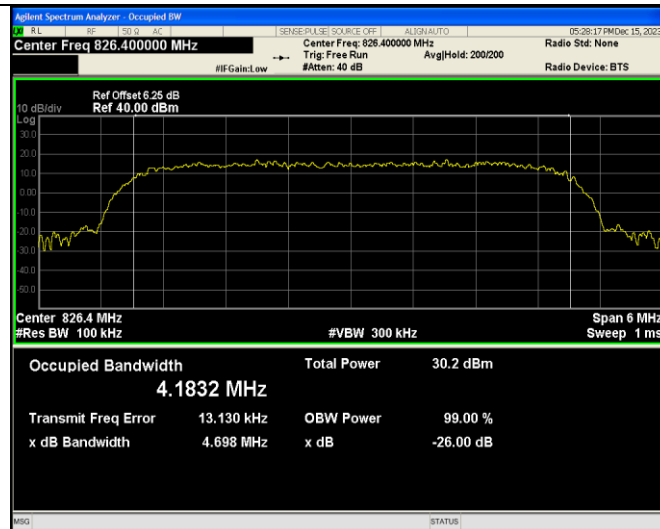


HSDPA Middle Channel

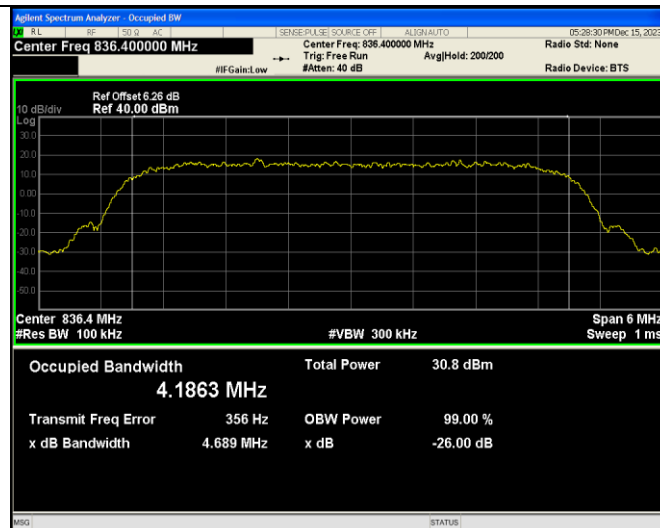


HSDPA High Channel

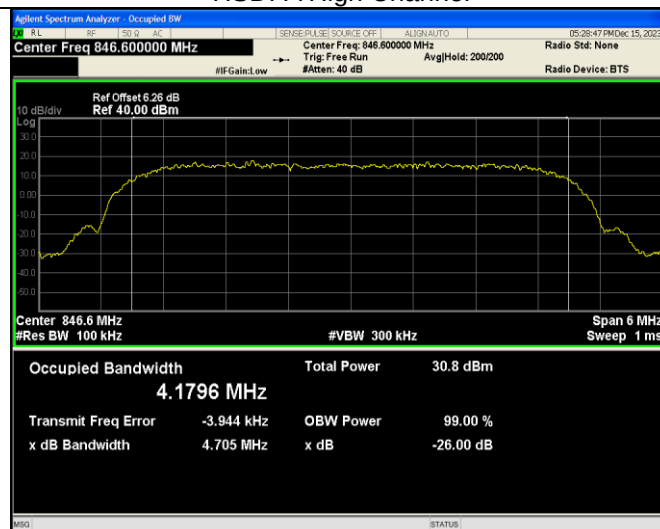


HSUPA Low Channel

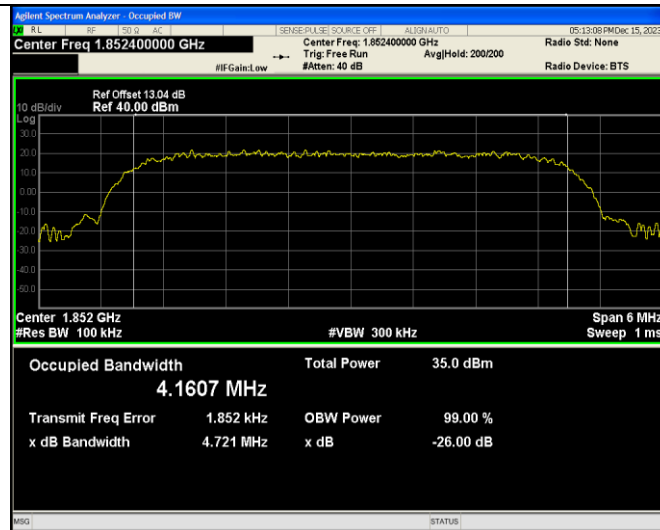


HSUPA Middle Channel

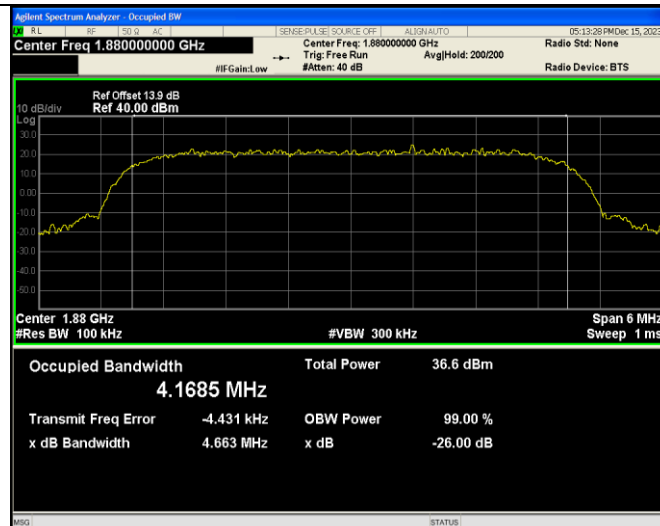


HSUPA High Channel

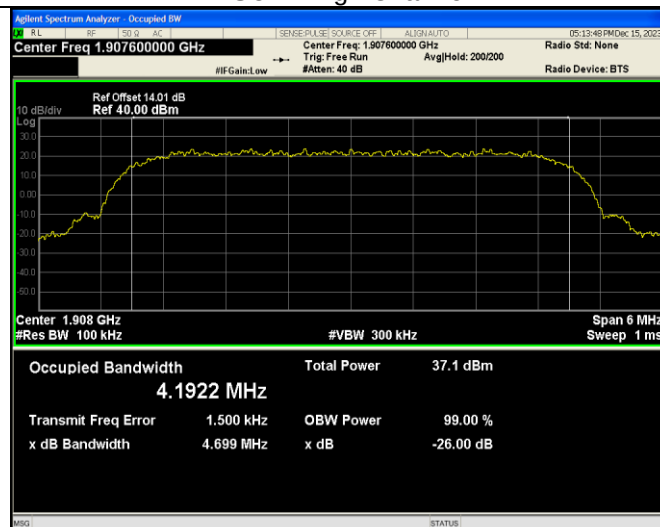


For Band II

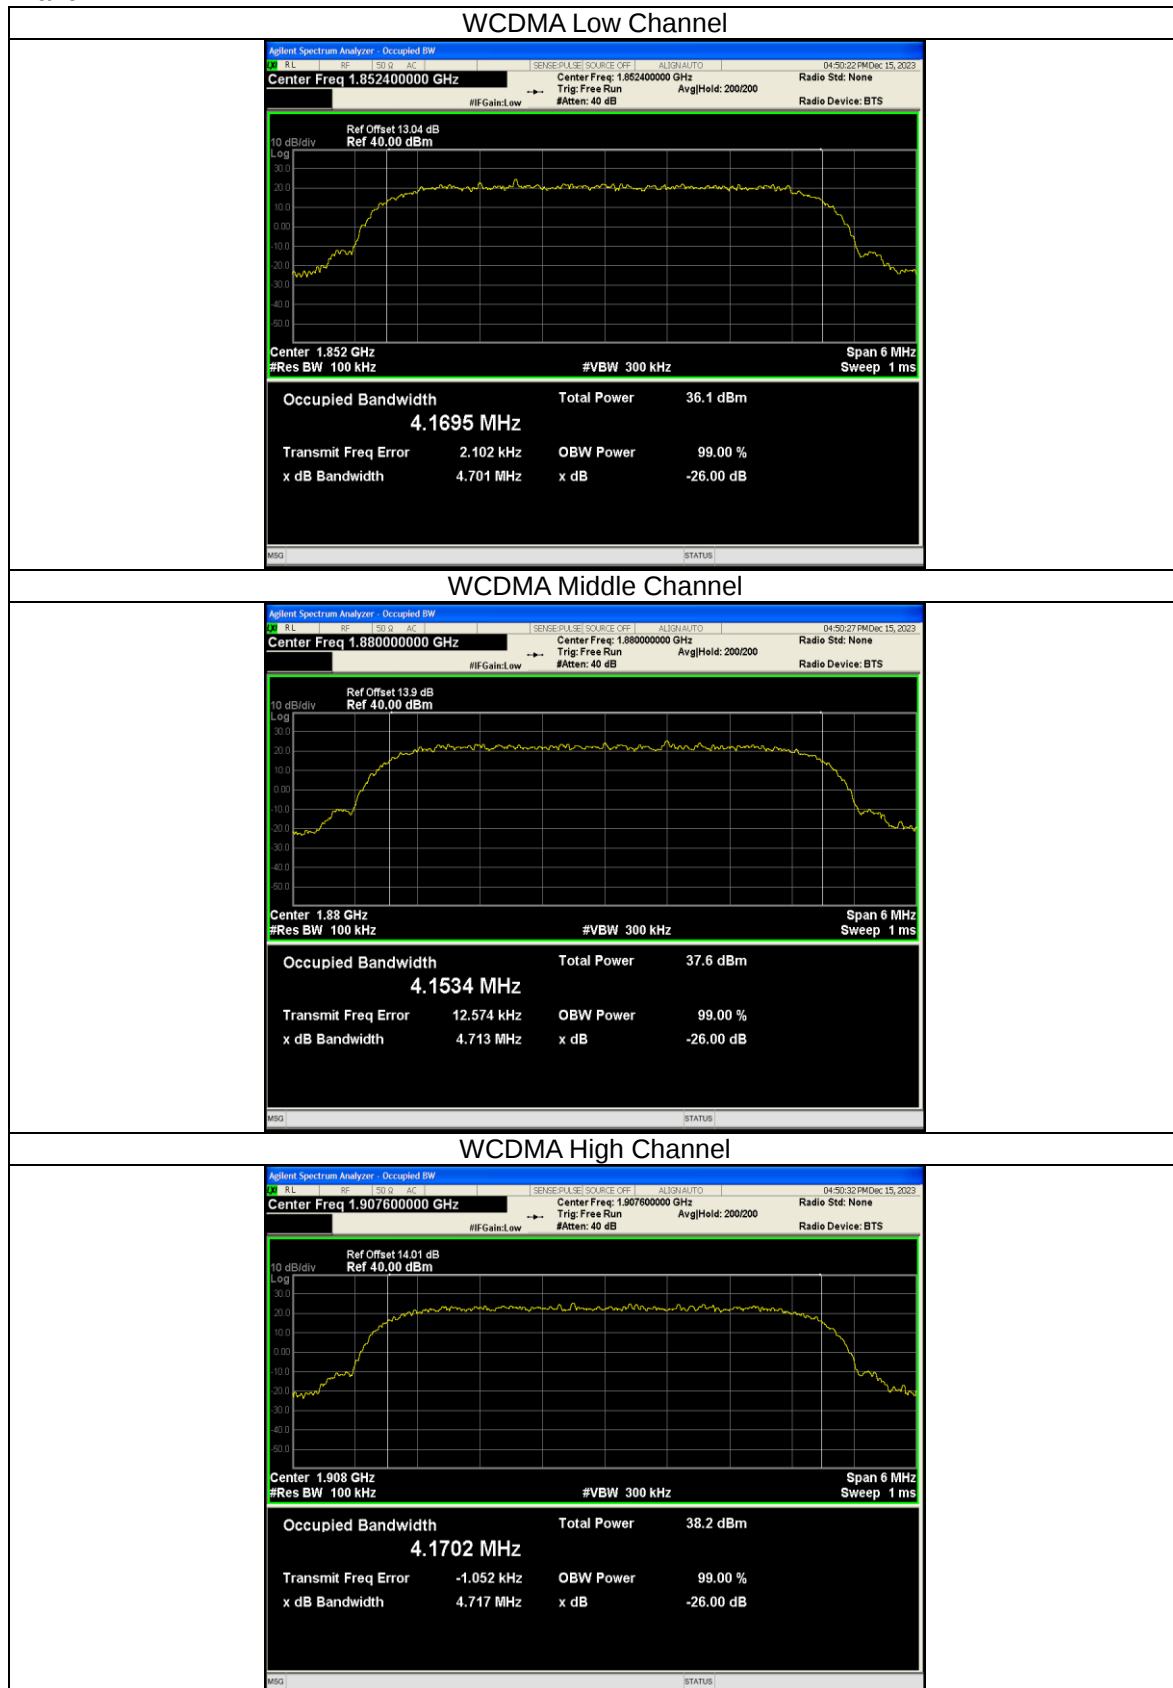


HSUPA Low Channel

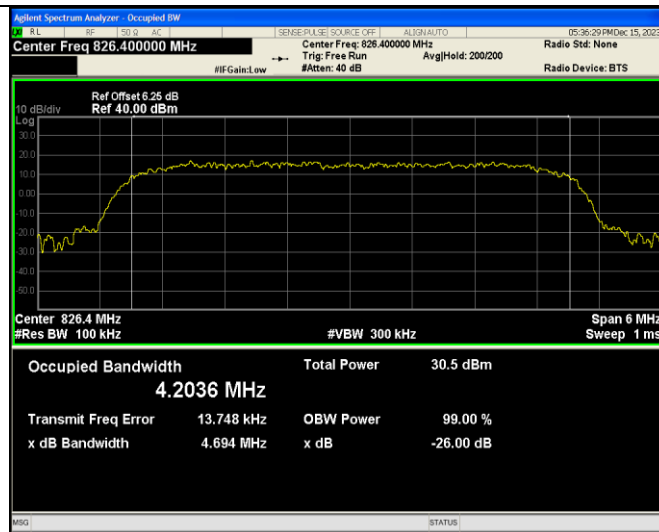

HSUPA Middle Channel

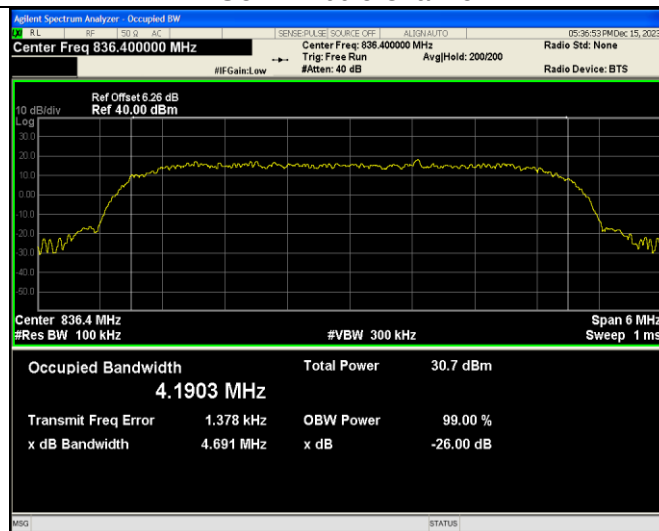

HSUPA High Channel

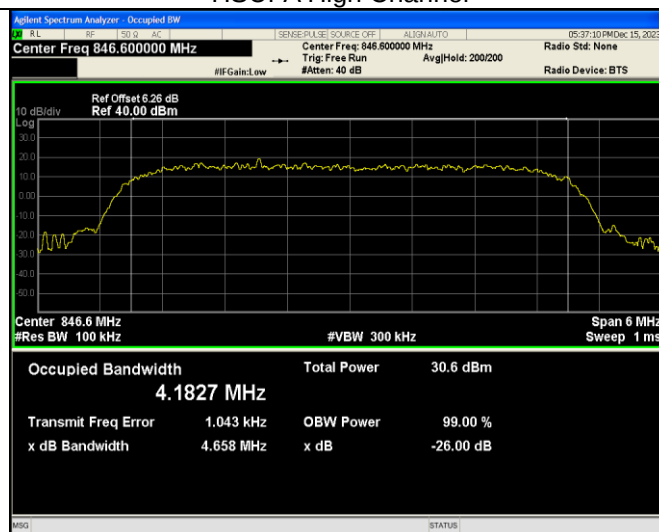

9. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL

9.1 Standard Applicable


According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

9.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10th harmonic.

Test Configuration for the out of band emissions testing:



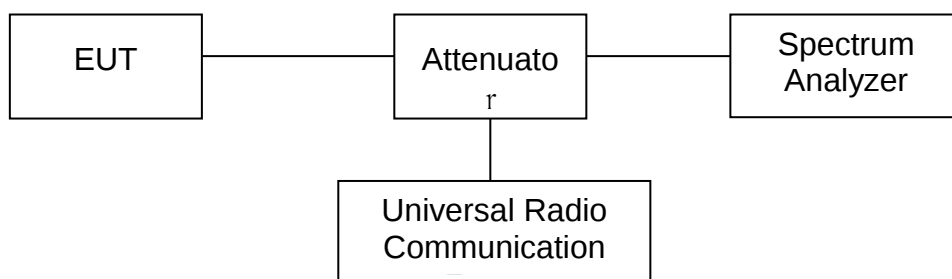


9.3 Environmental Conditions


Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	1010 mbar

9.4 Summary of Test Results/Plots


Please refer to the following test plots
For Cellular Band

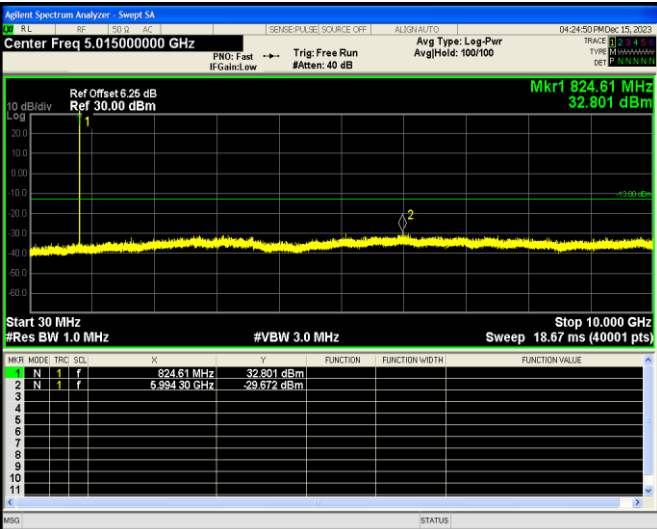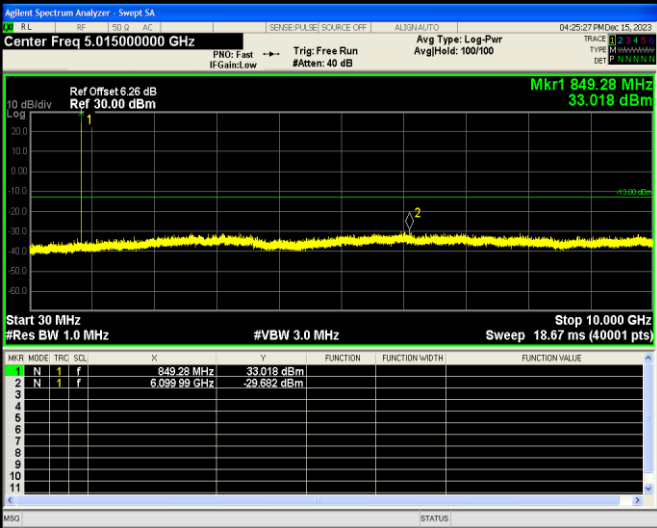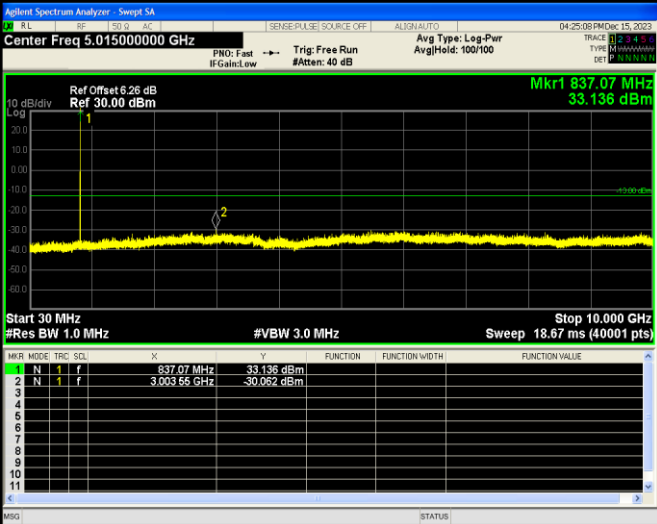GSM Low Channel	
GSM Middle Channel	
GSM High Channel	

GSM
Low
Band
Emission

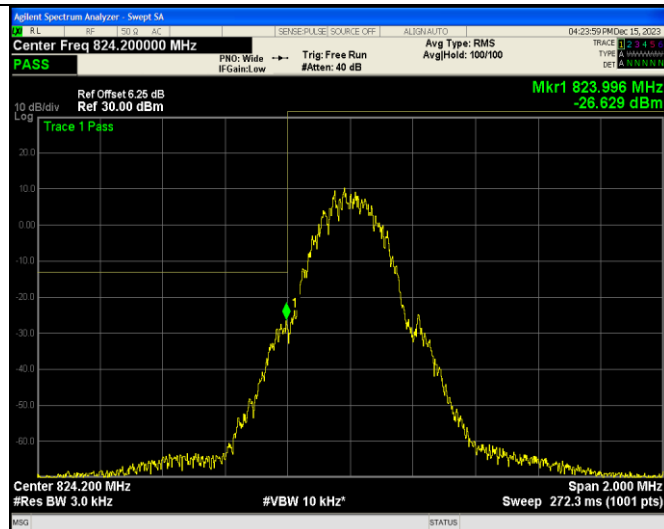


GSM
High
Band
Emission

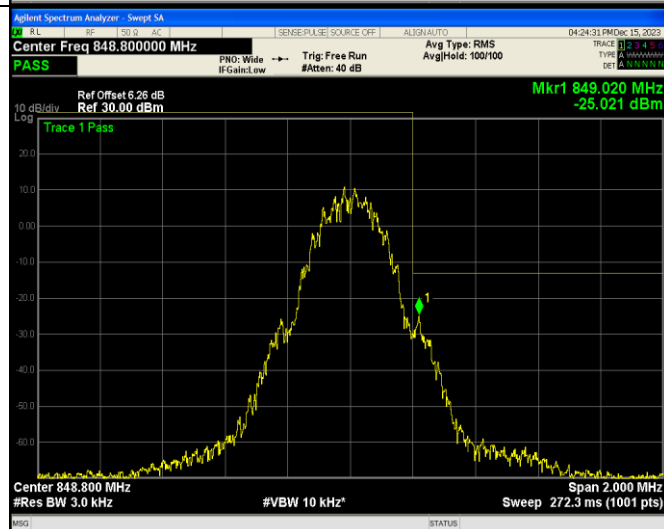





GPRS Low Channel	
GPRS Middle Channel	
GPRS High Channel	

GPRS
Low
Band
Emission

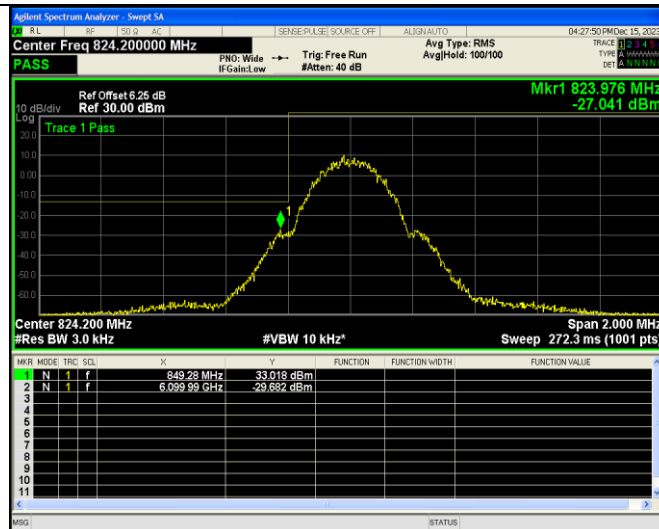


GPRS
High
Band
Emission

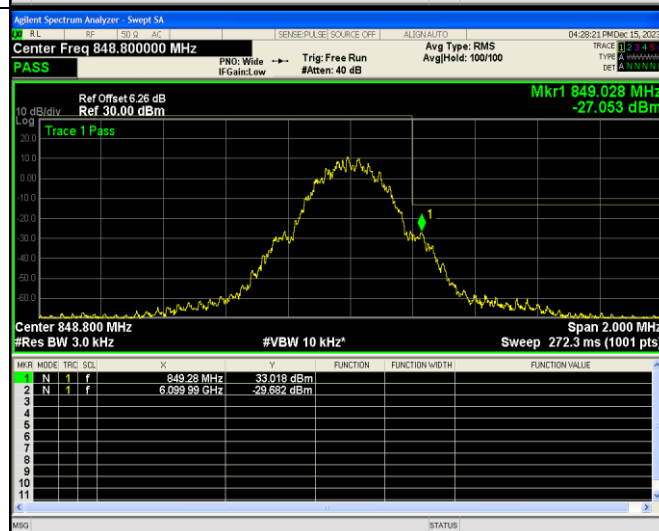


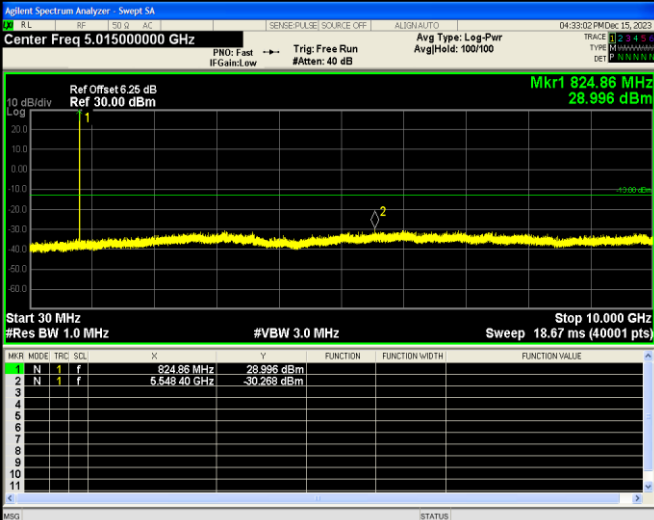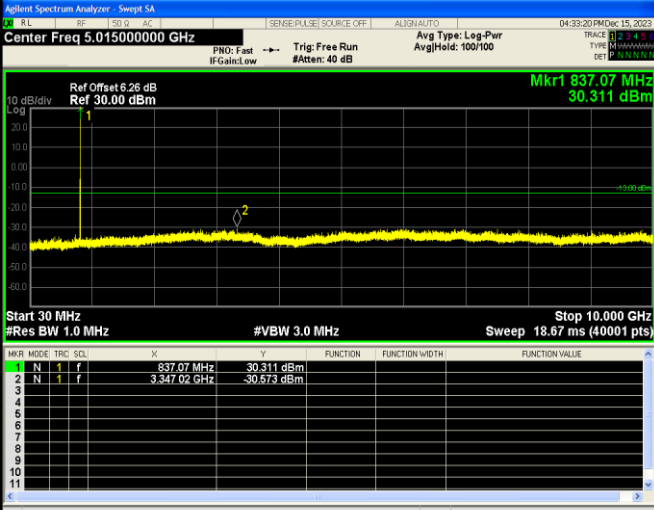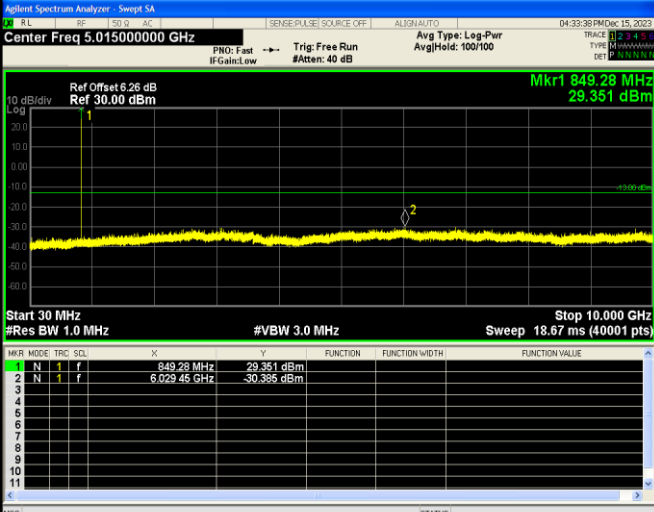EDGE Low Channel		
EDGE Middle Channel		
EDGE High Channel		




EDGE
Low
Band
Emission

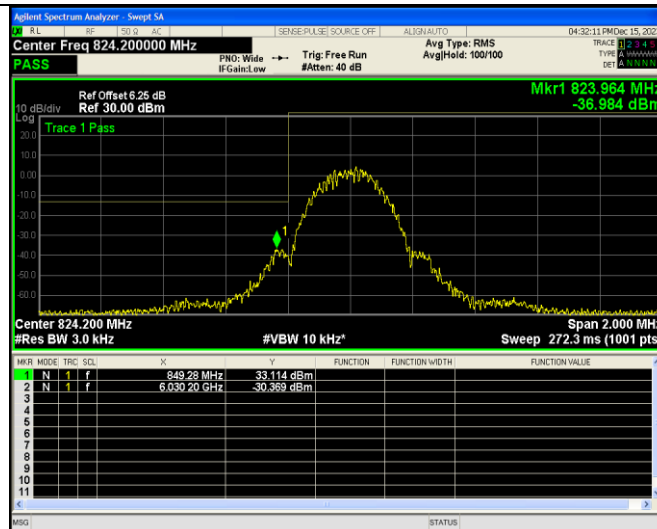


EDGE
High
Band
Emission

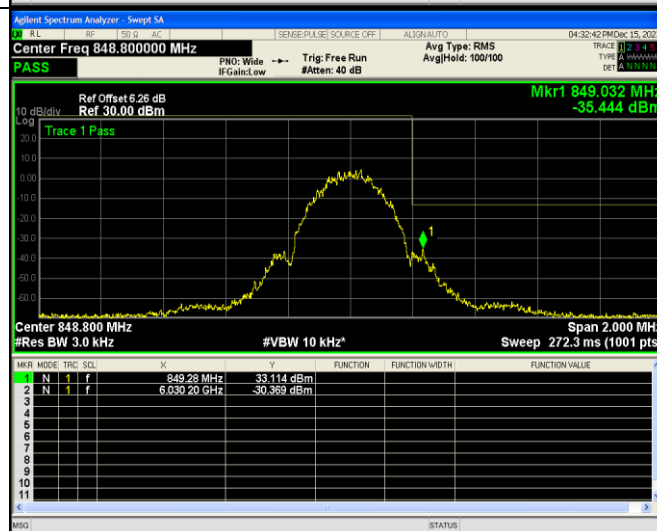


For PCS Band

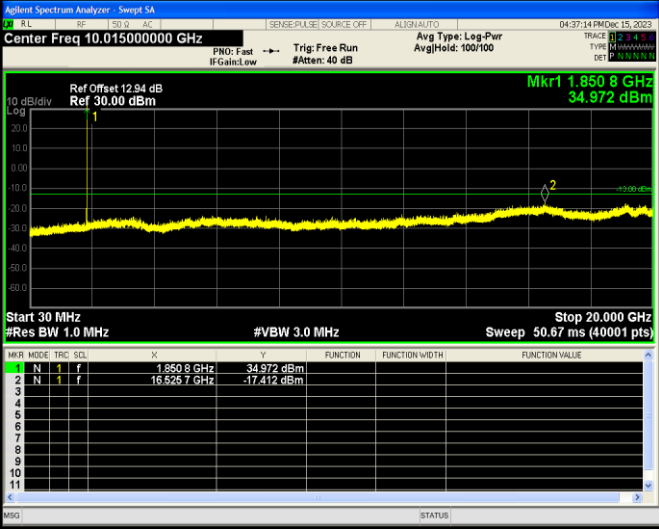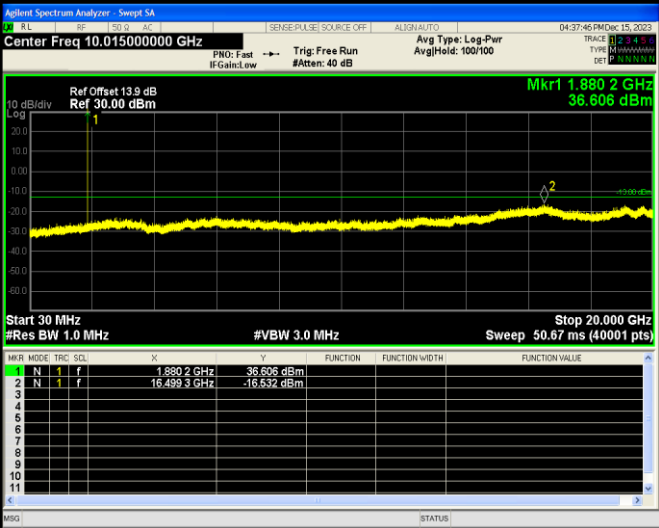
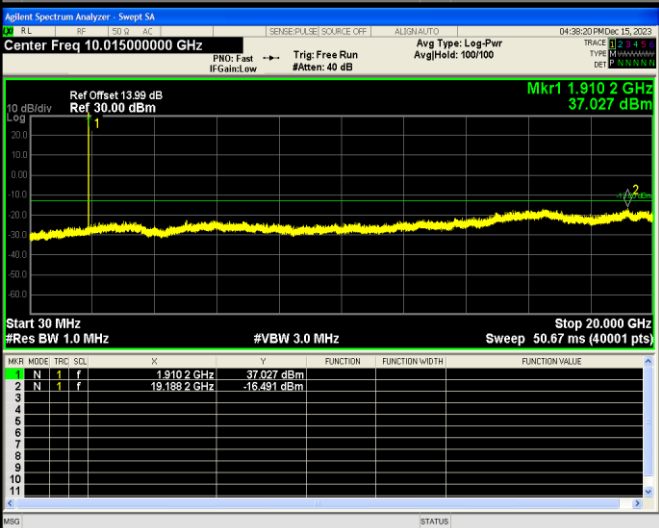
GSM Low Channel	
GSM Middle Channel	
GSM High Channel	

GSM
Low
Band
Emission

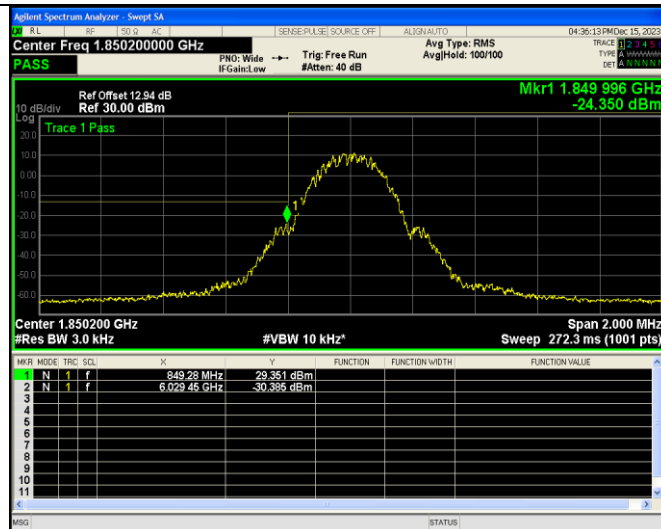


GSM
High
Band
Emission

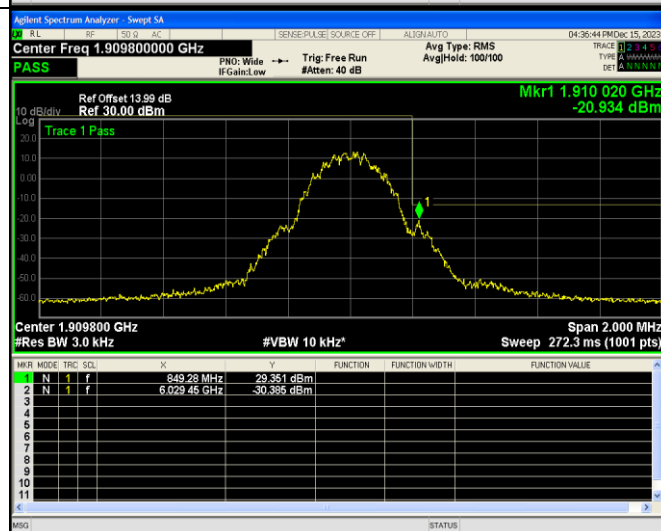



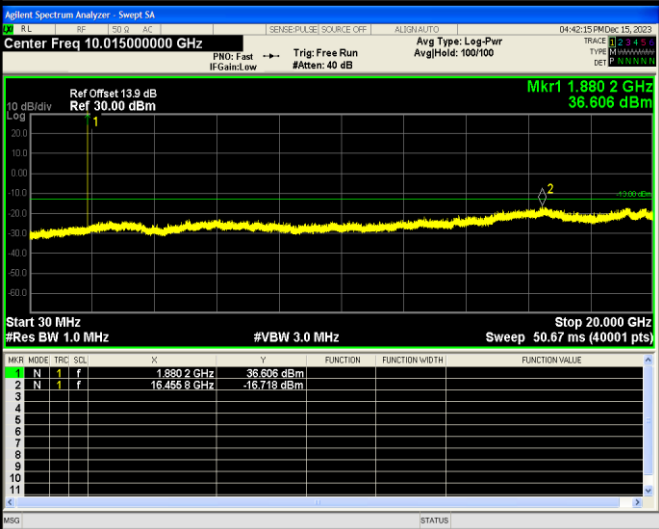
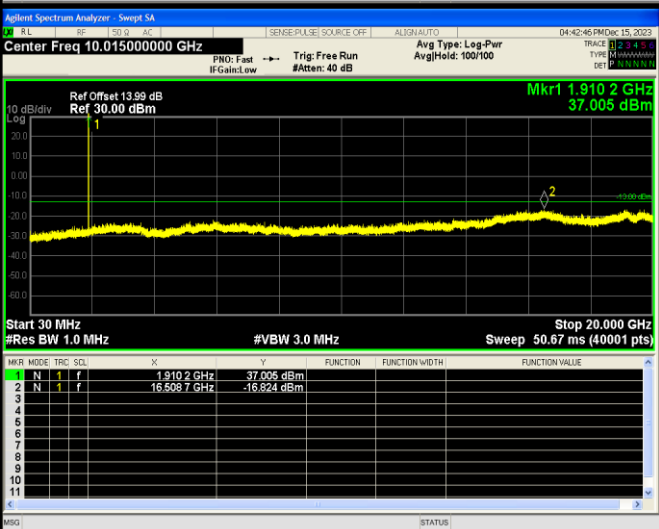
GPRS Low Channel	
GPRS Middle Channel	
GPRS High Channel	

GPRS
Low
Band
Emission

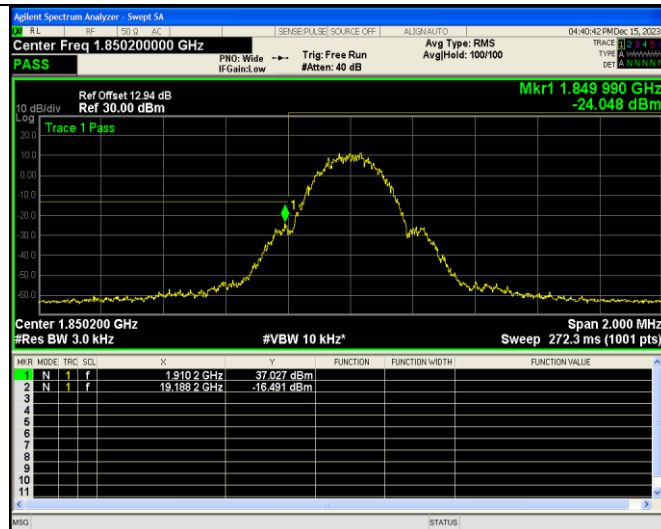


GPRS
High
Band
Emission

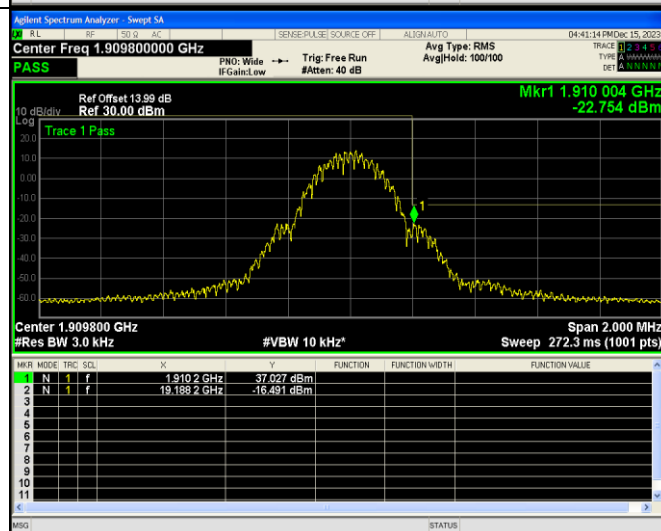


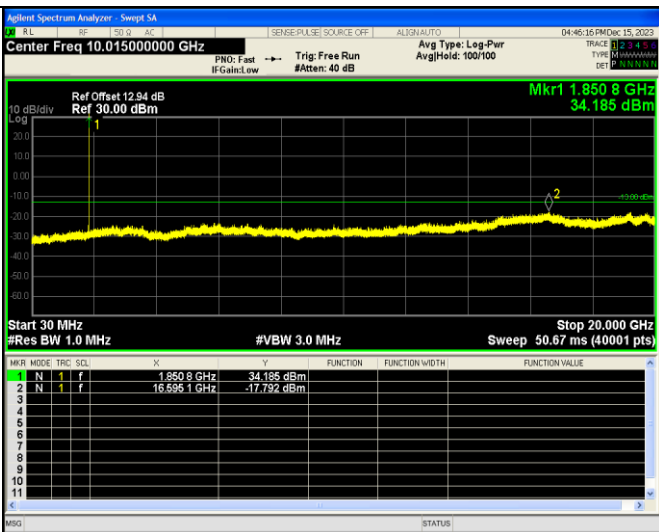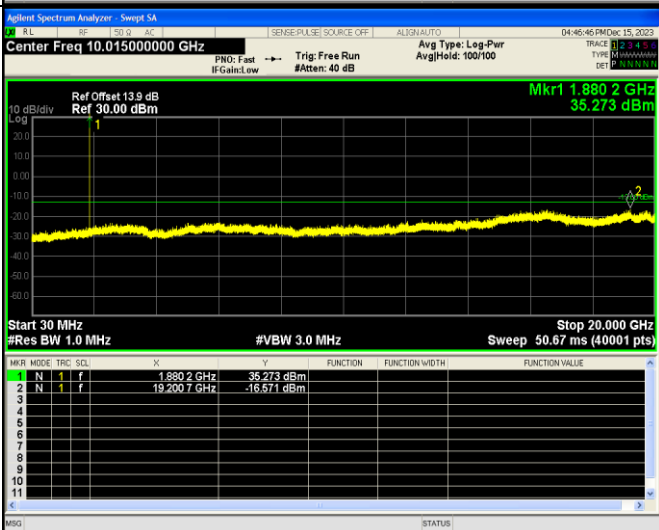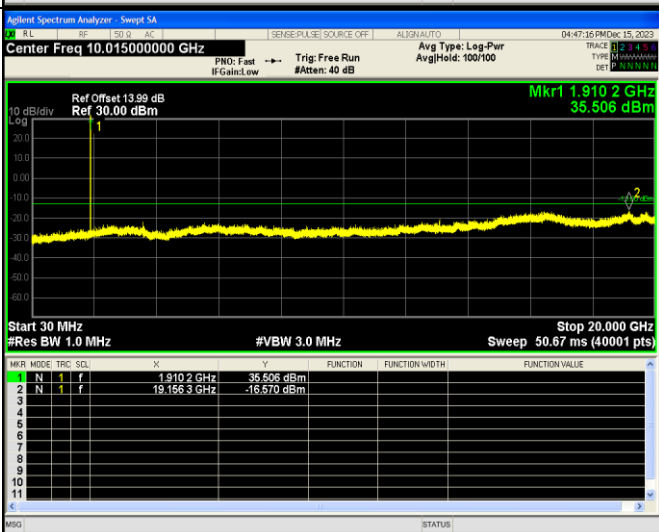EDGE Low Channel	 Agilent Spectrum Analyzer - Sweep SA Center Freq 10.015000000 GHz Ref Offset 12.94 dB Ref 30.00 dBm Mkr1 1.850 8 GHz 34.185 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 20.000 GHz Sweep 50.67 ms (40001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>1.850 8 GHz</td><td>34.185 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>16.595 1 GHz</td><td>-17.792 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.850 8 GHz	34.185 dBm				2	N	1	f	16.595 1 GHz	-17.792 dBm				
MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.850 8 GHz	34.185 dBm																								
2	N	1	f	16.595 1 GHz	-17.792 dBm																								
EDGE Middle Channel	 Agilent Spectrum Analyzer - Sweep SA Center Freq 10.015000000 GHz Ref Offset 13.9 dB Ref 30.00 dBm Mkr1 1.880 2 GHz 35.273 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 20.000 GHz Sweep 50.67 ms (40001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>1.880 2 GHz</td><td>35.273 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>19.200 7 GHz</td><td>-16.571 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.880 2 GHz	35.273 dBm				2	N	1	f	19.200 7 GHz	-16.571 dBm				
MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.880 2 GHz	35.273 dBm																								
2	N	1	f	19.200 7 GHz	-16.571 dBm																								
EDGE High Channel	 Agilent Spectrum Analyzer - Sweep SA Center Freq 10.015000000 GHz Ref Offset 13.98 dB Ref 30.00 dBm Mkr1 1.910 2 GHz 35.506 dBm Start 30 MHz #Res BW 1.0 MHz #VBW 3.0 MHz Stop 20.000 GHz Sweep 50.67 ms (40001 pts) <table><tr><th>MKR</th><th>MODE</th><th>TRIG</th><th>SOL</th><th>X</th><th>Y</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>1.910 2 GHz</td><td>35.506 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>19.156 3 GHz</td><td>-16.570 dBm</td><td></td><td></td><td></td></tr></table>	MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	1.910 2 GHz	35.506 dBm				2	N	1	f	19.156 3 GHz	-16.570 dBm				
MKR	MODE	TRIG	SOL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	1.910 2 GHz	35.506 dBm																								
2	N	1	f	19.156 3 GHz	-16.570 dBm																								




EDGE
Low
Band
Emission

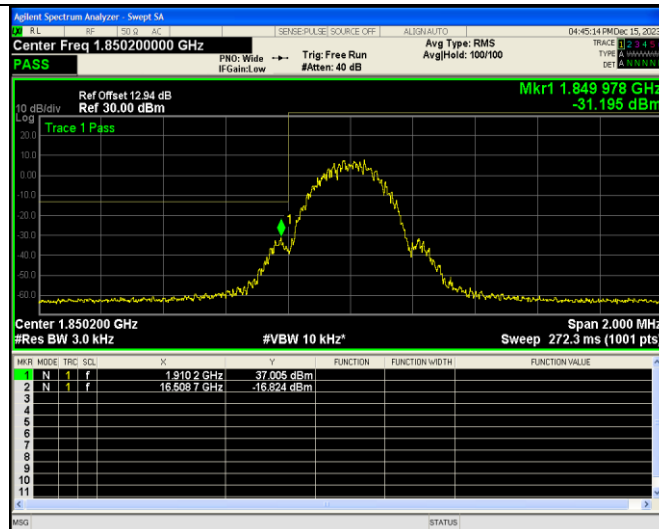


EDGE
High
Band
Emission

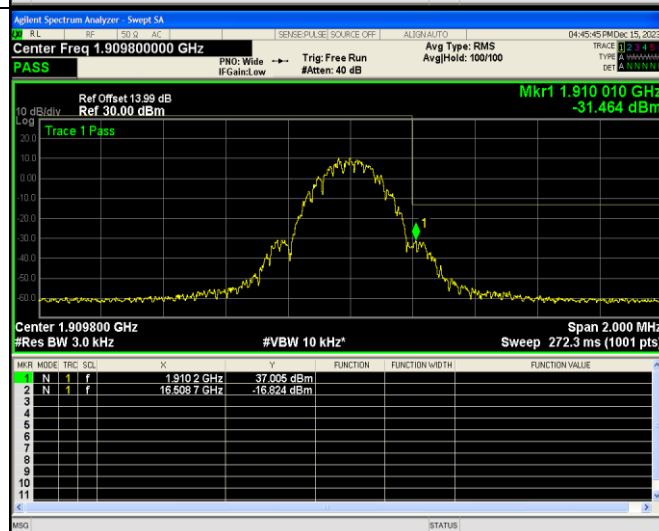

For Band V

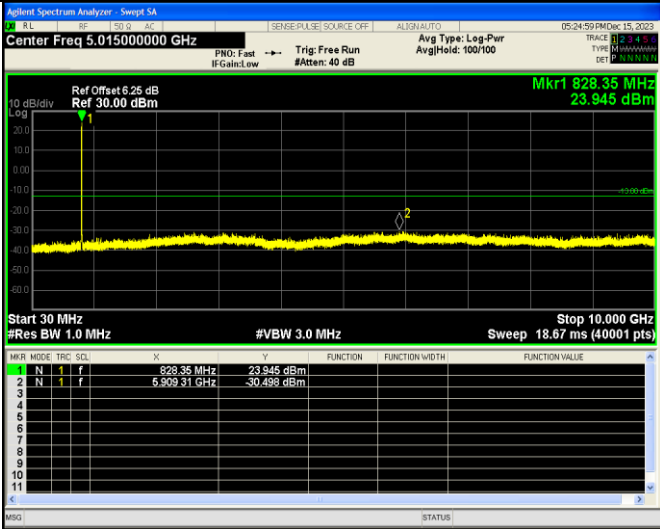
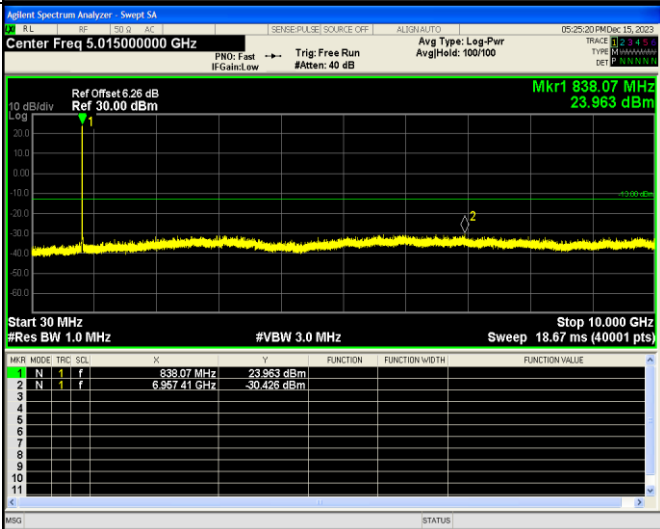
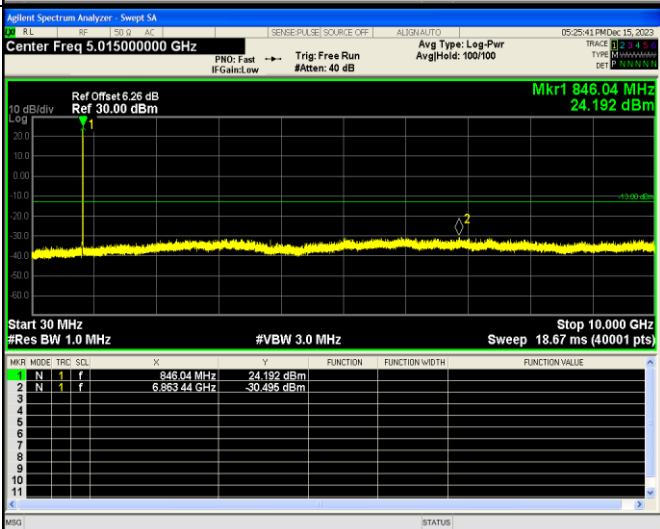
WCDMA Low Channel		
WCDMA Middle Channel		
WCDMA High Channel		

WCDMA
Low
Band
Spurious
Emission

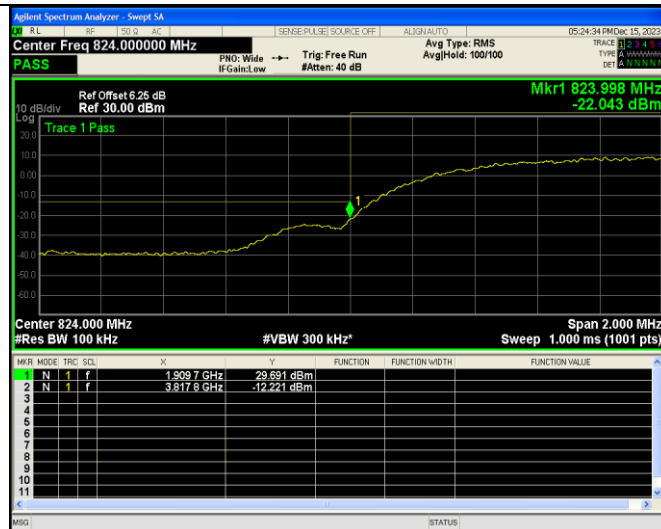


WCDMA
High
Band
Spurious
Emission

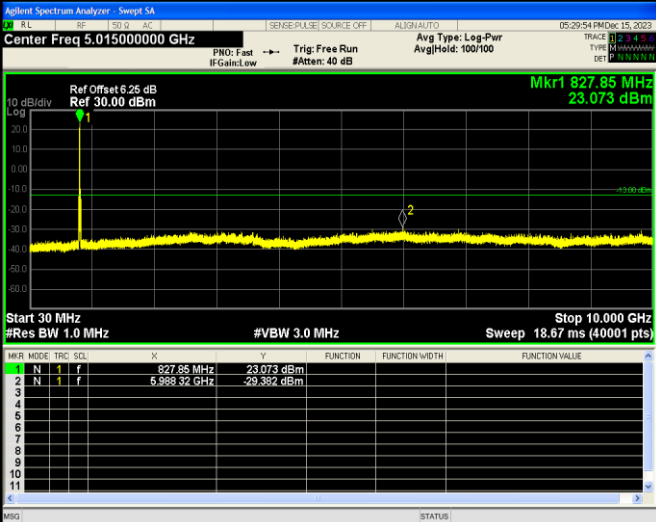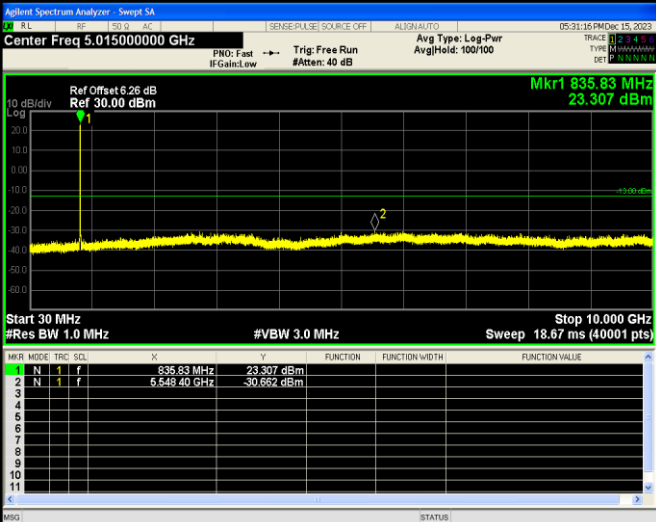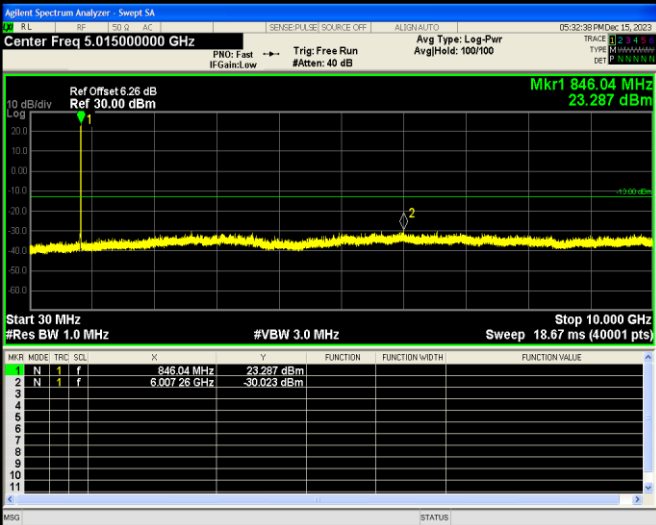




HSDPA Low Channel		
HSDPA Middle Channel		
HSDPA High Channel		

HSDPA
Low
Band
Spurious
Emission

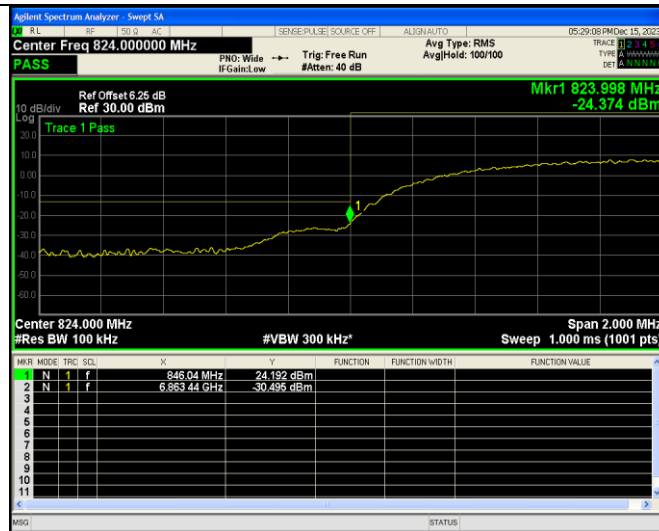


HSDPA
High
Band
Spurious
Emission

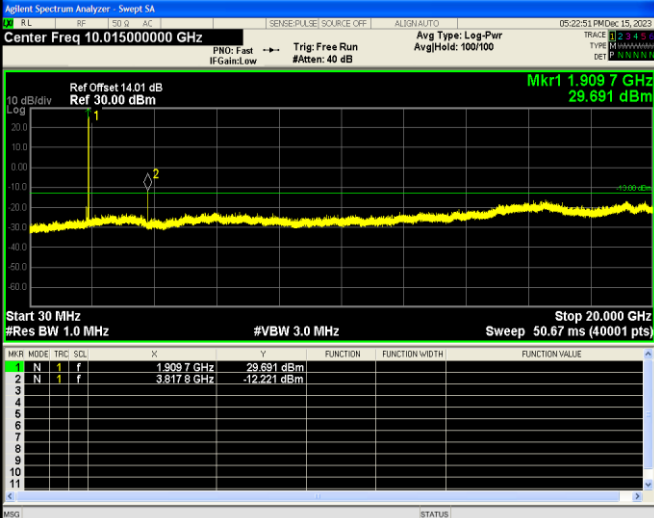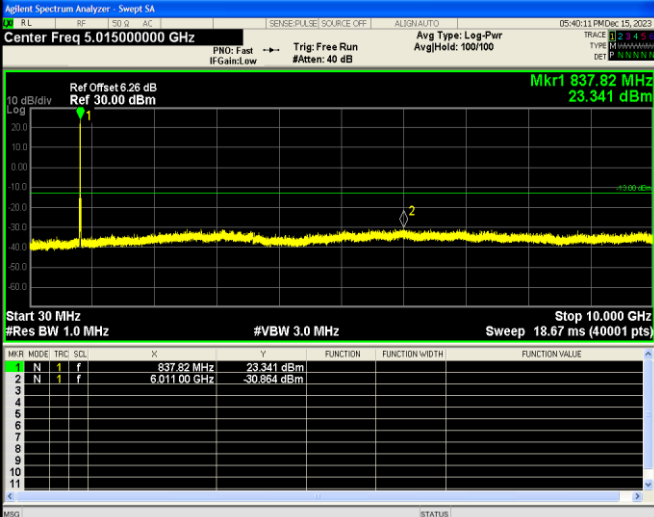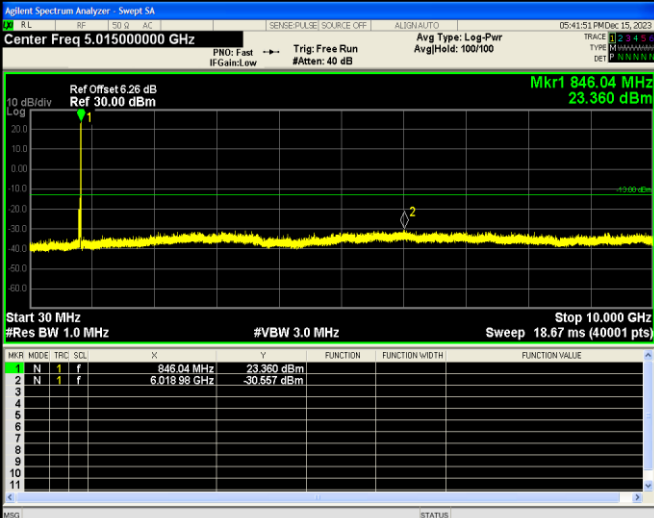

HSUPA Low Channel		
HSUPA Middle Channel		
HSUPA High Channel		




HSUPA
Low
Band
Spurious
Emission

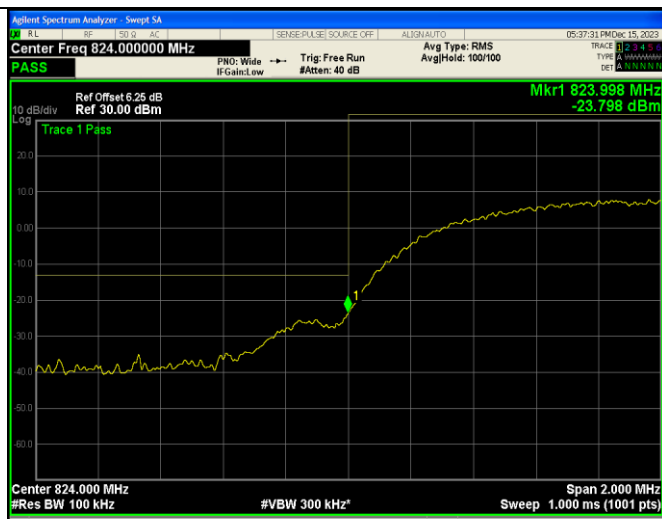


HSUPA
High
Band
Spurious
Emission



For Band II

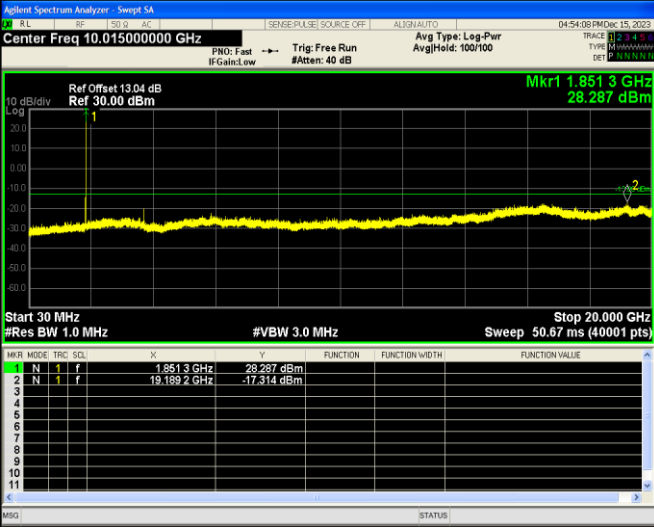
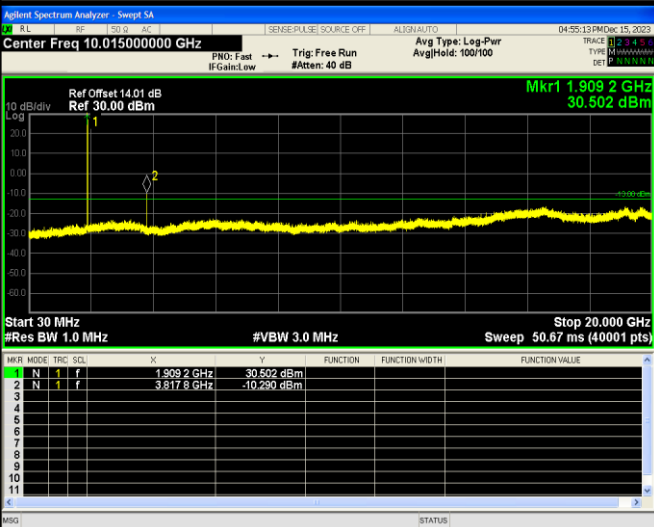
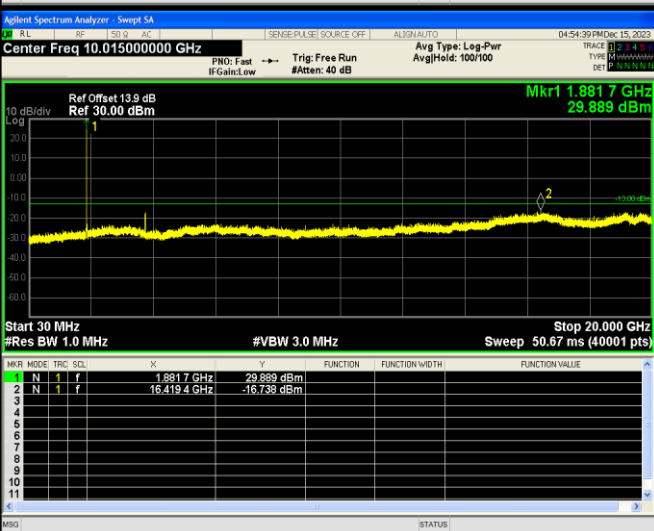
WCDMA Low Channel		
WCDMA Middle Channel		
WCDMA High Channel		


WCDMA
Low
Band
Spurious
Emission



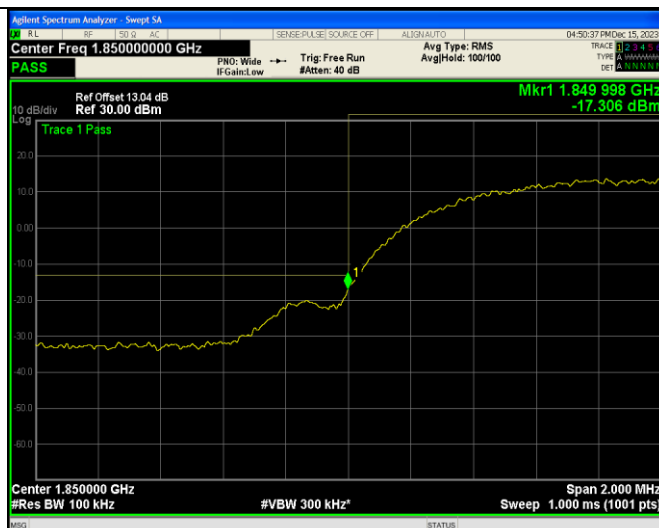


WCDMA
High
Band
Spurious
Emission

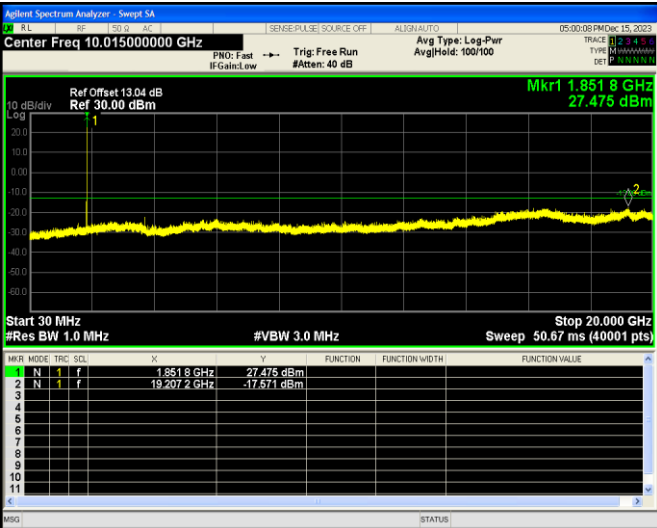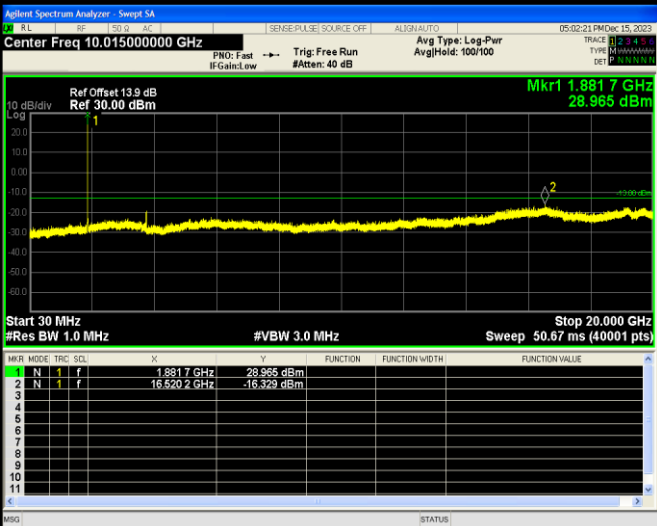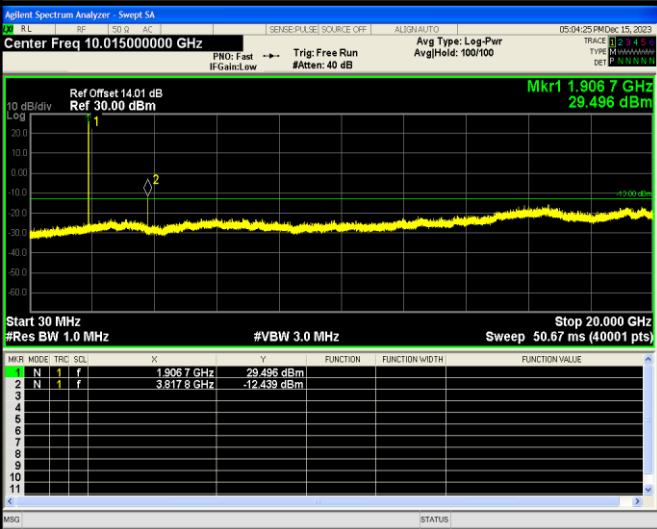


HSDPA Low Channel		
HSDPA Middle Channel		
HSDPA High Channel		

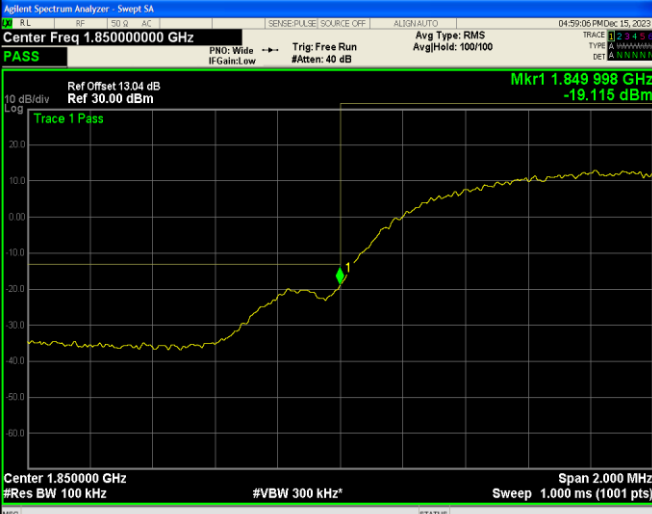HSDPA Low Band Spurious Emission		 Agilent Spectrum Analyzer - Sweep SA Center Freq 1.85000000 GHz Ref Offset 13.04 dB Ref 30.00 dBm Mkr1 1.849 998 GHz -19.115 dBm Trace 1 Pass Center 1.850000 GHz #Res BW 100 kHz #VBW 300 kHz Span 2.000 MHz Sweep 1.000 ms (1001 pts)	
HSDPA High Band Spurious Emission		 Agilent Spectrum Analyzer - Sweep SA Center Freq 1.91000000 GHz Ref Offset 14.01 dB Ref 30.00 dBm Mkr1 1.910 002 GHz -16.711 dBm Trace 1 Pass Center 1.910000 GHz #Res BW 100 kHz #VBW 300 kHz Span 2.000 MHz Sweep 1.000 ms (1001 pts)	

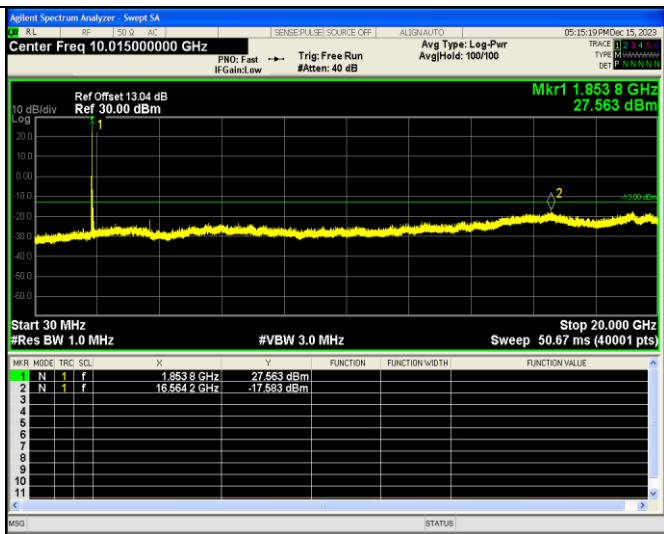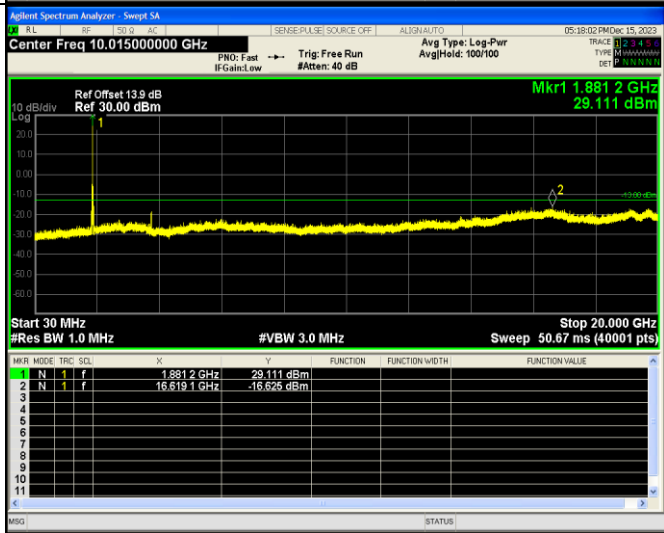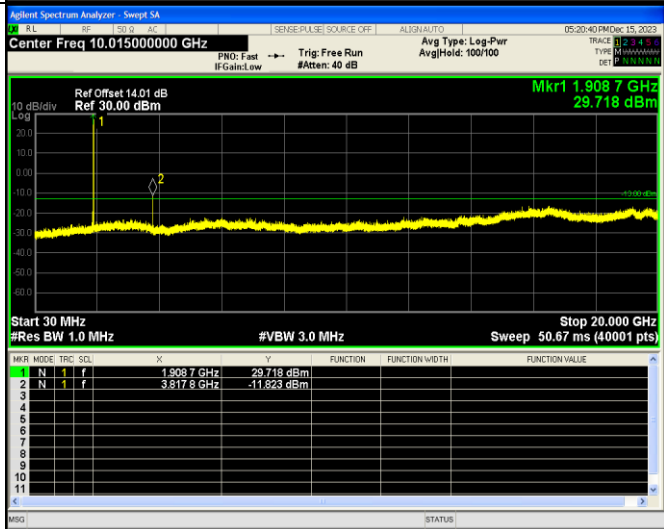HSUPA Low Channel		
HSUPA Middle Channel		
HSUPA High Channel		

HSUPA
Low
Band
Spurious
Emission

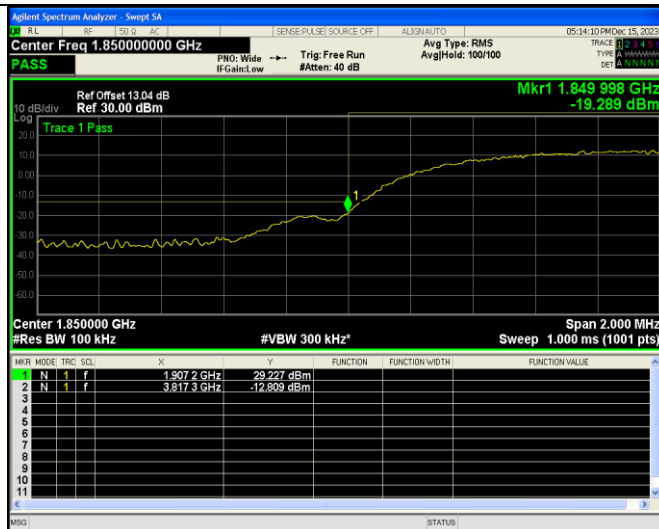

HSUPA
High
Band
Spurious
Emission



10. SPURIOUS RADIATED EMISSIONS

10.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

10.2 Test Procedure

- 1.The setup of EUT is according with per ANSI/TIA Standard 603D and ANSI C63.4-2014 measurement procedure.
- 2.The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
- 3.The frequency range up to tenth harmonic of the fundamental frequency was investigated.
- 4.Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB = $43 + 10 \log_{10}$ (power out in Watts)

10.3 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	54%
ATM Pressure:	101 kPa
Test Voltage	DC6.4V

10.4 Summary of Test Results/Plots

According to the data below, the FCC Part22.917 and 24.238 standards, and had the worst margin of:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

All test modes are performed, but only the worst case is recorded in this report.

For Cellular Band GSM850 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (824.2MHz)						
45.26	-69.99	3.9	-66.09	-13	-53.09	H
1639.89	-56.49	4.83	-51.66	-13	-38.66	H
2471.21	-56.95	8.08	-48.87	-13	-35.87	H
38.90	-74.55	4.02	-70.53	-13	-57.53	V
1644.24	-50.90	4.48	-46.42	-13	-33.42	V
2468.42	-53.69	8.2	-45.49	-13	-32.49	V
Middle Channel (836.6MHz)						
45.74	-74.28	3.84	-70.44	-13	-57.44	H
1665.58	-51.33	4.62	-46.71	-13	-33.71	H
2507.53	-52.31	8.25	-44.06	-13	-31.06	H
46.06	-68.83	4.25	-64.58	-13	-51.58	V
1666.22	-50.44	4.54	-45.90	-13	-32.90	V
2504.49	-52.79	8.35	-44.44	-13	-29.75	V
High Channel (848.8MHz)						
41.57	-73.86	4.22	-78.08	-13	-65.08	H
1692.30	-60.63	4.87	-65.50	-13	-52.50	H
2539.63	-56.42	8.38	-64.80	-13	-51.80	H
43.10	-67.50	4.02	-71.52	-13	-58.52	V
1692.36	-49.67	4.56	-54.23	-13	-41.23	V
2542.77	-56.24	8.41	-64.65	-13	-51.65	V

For PCS Band GSM1900 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1850.2MHz)						
41.59	-70.30	4.34	-65.96	-13	-52.96	H
3696.53	-50.15	10.54	-39.61	-13	-26.61	H
5548.55	-55.10	13.37	-41.73	-13	-28.73	H
37.26	-72.32	4.34	-67.98	-13	-54.98	V
3700.26	-50.95	10.54	-40.41	-13	-27.41	V
5548.18	-59.06	13.37	-45.69	-13	-32.69	V
Middle Channel (1880MHz)						
37.85	-71.92	4.02	-67.90	-13	-54.90	H
3752.07	-51.23	10.71	-40.52	-13	-27.52	H
5633.94	-53.78	13.73	-40.05	-13	-27.05	H
42.22	-64.66	4.14	-60.52	-13	-47.52	V
3752.06	-54.91	10.22	-44.69	-13	-31.69	V
5631.90	-58.77	13.16	-45.61	-13	-32.61	V
High Channel (1909.8MHz)						
42.42	-67.74	4.02	-63.72	-13	-50.72	H
3810.06	-58.99	4.9	-54.09	-13	-41.09	H
5728.26	-45.36	8.09	-37.27	-13	-24.27	H
43.90	-58.25	4.25	-54.00	-13	-41.00	V
3817.29	-60.74	4.93	-55.81	-13	-42.81	V
5728.26	-61.88	8.43	-53.45	-13	-40.45	V

For Band 5 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (826.4MHz)						
43.82	-72.17	3.91	-68.26	-13	-55.26	H
1647.16	-50.38	10.56	-39.82	-13	-26.82	H
2473.64	-59.01	13.5	-45.51	-13	-32.51	H
45.55	-67.14	3.93	-63.21	-13	-50.21	V
1643.16	-49.97	10.41	-39.56	-13	-26.56	V
2470.62	-60.37	13.16	-47.21	-13	-34.21	V
Middle Channel (836.6MHz)						
44.73	-66.83	4.02	-62.81	-13	-49.81	H
1666.62	-56.64	4.66	-51.98	-13	-38.98	H
2502.50	-41.61	8.34	-33.27	-13	-20.27	H
40.15	-61.20	4.17	-57.03	-13	-44.03	V
1667.83	-56.45	4.94	-51.51	-13	-38.51	V
2503.54	-61.84	8.19	-53.65	-13	-40.65	V
High Channel (846.6MHz)						
43.53	-67.21	3.87	-63.34	-13	-50.34	H
1689.98	-60.11	4.89	-55.22	-13	-42.22	H
2535.43	-49.46	8.42	-41.04	-13	-28.04	H
39.44	-62.19	3.95	-58.24	-13	-45.24	V
1684.10	-62.51	4.99	-57.52	-13	-44.52	V
2538.46	-59.63	8.12	-51.51	-13	-38.51	V

For Band 2 Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
37.39	-72.35	4.22	-68.13	-13	-55.13	H
1644.01	-52.43	10.7	-41.73	-13	-28.73	H
2470.55	-55.54	13.73	-41.81	-13	-28.81	H
44.01	-72.61	3.93	-68.68	-13	-55.68	V
1648.90	-54.58	10.09	-44.49	-13	-31.49	V
2472.99	-59.15	13.11	-46.04	-13	-33.04	V
Middle Channel (1880MHz)						
43.89	-72.30	4.26	-68.04	-13	-55.04	H
1664.41	-59.25	4.76	-54.49	-13	-41.49	H
2507.27	-40.85	8.37	-32.48	-13	-19.48	H
36.76	-62.39	3.96	-58.43	-13	-45.43	V
1663.39	-58.72	4.63	-54.09	-13	-41.09	V
2507.75	-64.89	8.1	-56.79	-13	-43.79	V
High Channel (1907.6MHz)						
38.76	-66.41	4.26	-62.15	-13	-49.15	H
1689.97	-57.81	4.76	-53.05	-13	-40.05	H
2530.81	-49.17	8.37	-40.80	-13	-27.80	H
40.95	-58.42	3.96	-54.46	-13	-41.46	V
1685.27	-58.76	4.63	-54.13	-13	-41.13	V
2530.77	-56.92	8.1	-48.82	-13	-35.82	V

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

11. FREQUENCY STABILITY

11.1 Standard Applicable

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Cellular Band

Frequency range (MHz)	Base, fixed (ppm)	Mobile >3 watts (ppm)	Mobile ≤3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929	5.0	N/A	N/A
929 to 960	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

According to §27.54 The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

11.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

11.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	101kPa

11.4 Summary of Test Results/Plots

For Cellular Band GSM Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	8.52	0.01019
40	NV	9.24	0.01105
30	NV	9.57	0.01144
20	NV	9.09	0.01086
10	NV	9.80	0.01172
0	NV	10.74	0.01283
-10	NV	10.78	0.01288
-20	NV	10.93	0.01307
-30	NV	10.80	0.01291

For PCS Band GSM Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	12.06	0.00642
40	NV	12.54	0.00667
30	NV	12.56	0.00668
20	NV	12.78	0.00680
10	NV	13.37	0.00711
0	NV	13.19	0.00702
-10	NV	14.31	0.00761
-20	NV	14.39	0.00765
-30	NV	14.87	0.00791

For Cellular Band GPRS Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	8.58	0.01025
40	NV	9.16	0.01095
30	NV	9.90	0.01183
20	NV	9.32	0.01114
10	NV	10.20	0.01220
0	NV	10.54	0.01260
-10	NV	10.31	0.01232
-20	NV	11.05	0.01321
-30	NV	11.31	0.01352

For PCS Band GPRS Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	12.45	0.00662
40	NV	13.10	0.00697
30	NV	13.16	0.00700
20	NV	12.55	0.00668
10	NV	13.48	0.00717
0	NV	13.77	0.00733
-10	NV	13.58	0.00722
-20	NV	14.43	0.00767
-30	NV	14.78	0.00786

For Cellular Band EDGE Mode

Reference Frequency(Middle Channel): 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	10.79	0.01290
40	NV	11.81	0.01412
30	NV	11.27	0.01348
20	NV	12.02	0.01436
10	NV	11.81	0.01412
0	NV	12.09	0.01446
-10	NV	12.59	0.01505
-20	NV	12.72	0.01521
-30	NV	12.72	0.01520

For PCS Band EDGE Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	-10.68	-0.00568
40	NV	-9.96	-0.00530
30	NV	-9.92	-0.00528
20	NV	-9.19	-0.00489
10	NV	-8.92	-0.00474
0	NV	-9.27	-0.00493
-10	NV	-8.93	-0.00475
-20	NV	-8.20	-0.00436
-30	NV	-7.59	-0.00404

For WCDMA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	0.43	0.00052
40	NV	-0.38	-0.00045
30	NV	0.69	0.00083
20	NV	0.88	0.00105
10	NV	0.57	0.00068
0	NV	1.24	0.00148
-10	NV	1.00	0.00120
-20	NV	0.68	0.00082
-30	NV	1.04	0.00125

For WCDMA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	0.06	0.00003
40	NV	-0.29	-0.00016
30	NV	0.18	0.00010
20	NV	0.13	0.00007
10	NV	1.23	0.00065
0	NV	0.55	0.00029
-10	NV	1.78	0.00095
-20	NV	2.09	0.00111
-30	NV	2.02	0.00107

For HSDPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	-0.59	-0.00070
40	NV	0.32	0.00039
30	NV	0.53	0.00064
20	NV	0.25	0.00030
10	NV	0.57	0.00068
0	NV	1.02	0.00122
-10	NV	1.40	0.00167
-20	NV	1.42	0.00169
-30	NV	1.65	0.00198

For HSDPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	5.09	0.00271
40	NV	5.23	0.00278
30	NV	5.09	0.00271
20	NV	6.17	0.00328
10	NV	5.67	0.00301
0	NV	6.40	0.00340
-10	NV	6.64	0.00353
-20	NV	6.42	0.00342
-30	NV	6.51	0.00346

For HSUPA Band 5 Mode

Reference Frequency(Middle Channel): 836.6 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	0.10	0.00012
40	NV	0.51	0.00061
30	NV	1.09	0.00130
20	NV	0.56	0.00067
10	NV	1.59	0.00190
0	NV	1.12	0.00134
-10	NV	1.75	0.00210
-20	NV	1.89	0.00226
-30	NV	2.60	0.00311

For HSUPA Band 2 Mode

Reference Frequency(Middle Channel): 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		MCF (Hz)	Error (ppm)
50	NV	5.98	0.00318
40	NV	6.98	0.00371
30	NV	6.95	0.00370
20	NV	6.88	0.00366
10	NV	7.80	0.00415
0	NV	7.90	0.00420
-10	NV	8.36	0.00445
-20	NV	8.64	0.00460
-30	NV	9.03	0.00480

So, Frequency Stability Versus Input Voltage is:

Reference Frequency(Middle Channel): GSM 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	10.92	0.01306
	NV	10.82	0.01294
	HV	12.03	0.01438
Reference Frequency(Middle Channel): GSM 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	14.59	0.00776
	NV	14.94	0.00795
	HV	14.96	0.00796

Reference Frequency(Middle Channel): GPRS 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	11.36	0.01358
	NV	10.97	0.01311
	HV	12.04	0.01439
Reference Frequency(Middle Channel): GPRS 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	14.21	0.00756
	NV	14.29	0.00760
	HV	14.65	0.00779


Reference Frequency(Middle Channel): EDGE 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	13.22	0.01580
	NV	12.41	0.01483
	HV	13.76	0.01644
Reference Frequency(Middle Channel): EDGE 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	-7.56	-0.00402
	NV	-7.74	-0.00412
	HV	-7.80	-0.00415
Reference Frequency(Middle Channel): WCDMA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	1.33	0.00159
	NV	1.63	0.00194
	HV	1.77	0.00211
Reference Frequency(Middle Channel): WCDMA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	1.65	0.00095
	NV	0.32	0.00019
	HV	1.71	0.00099
Reference Frequency(Middle Channel): WCDMA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	2.04	0.00109
	NV	2.24	0.00119
	HV	2.70	0.00144

Reference Frequency(Middle Channel): HSDPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	1.80	0.00215
	NV	2.10	0.00252
	HV	1.65	0.00197
Reference Frequency(Middle Channel): HSDPA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	6.16	0.00356
	NV	5.99	0.00346
	HV	6.86	0.00396
Reference Frequency(Middle Channel): HSDPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	6.94	0.00369
	NV	7.41	0.00394
	HV	7.54	0.00401
Reference Frequency(Middle Channel): HSUPA 836.6MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	2.47	0.00295
	NV	3.29	0.00393
	HV	3.09	0.00369
Reference Frequency(Middle Channel): HSUPA 1732.4MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	5.07	0.00293
	NV	5.99	0.00346
	HV	6.30	0.00364

Reference Frequency(Middle Channel): HSUPA 1880 MHz, Limit: 2.5ppm			
Environment Temperature (°C)	Power Supplied (VDC)	Frequency Measure with Time Elapsed	
		Frequency (Hz)	Error (ppm)
20	LV	8.86	0.00472
	NV	8.74	0.00465
	HV	8.98	0.00477

12. EUT TEST PHOTO

Radiated Emission

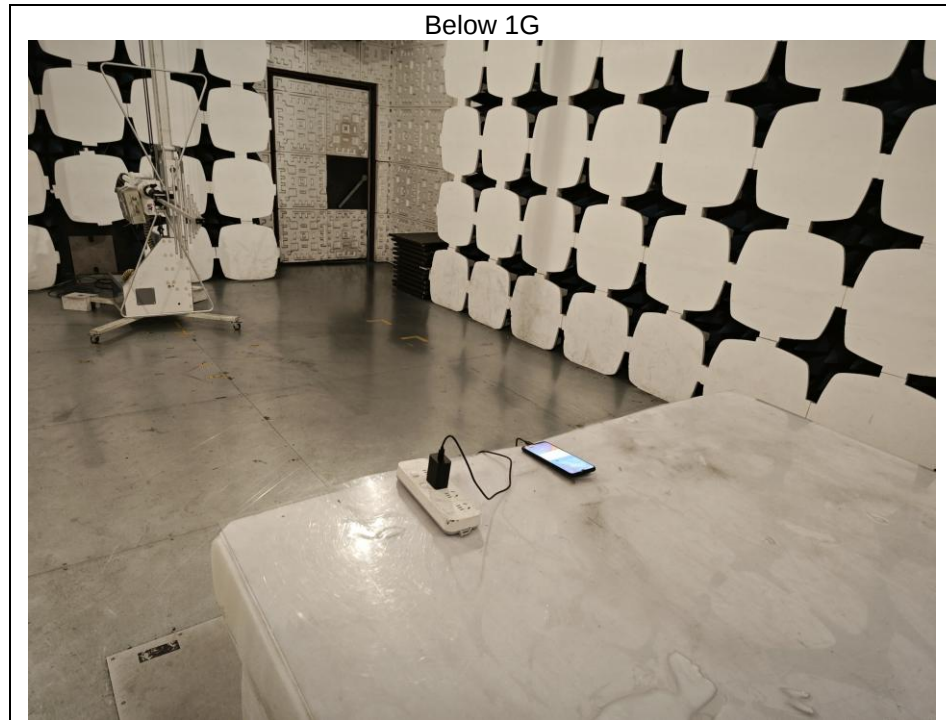

***** END OF REPORT *****