

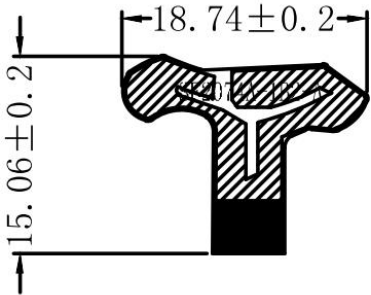


Manufacturer	Shenzhen Suo Ward Communication Technology Co., Ltd.
Product	SF2074A-1B2-A
Specification	
Frequency Range	2400-2500 MHz
V.S.W.R	≤ 2.0
Impedance	50 Ω
Gain	≥ -4.5
Azimuth	Omni-directional
Polarization	Linear
Azimuth Beam width	Omni-directional
Dimension (mm)	
	
Performance	


2400.000MHz




2400.000MHz H




2400.000MHz E1




2400.000MHz E2




2450.000MHz




2450.000MHz H




2450.000MHz E1




2450.000MHz E2




2500.000MHz



2500.000MHz H

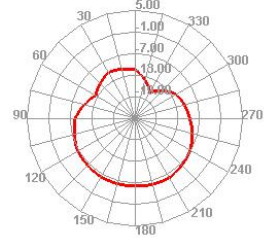

2500.000MHz E1



2500.000MHz E2

