

FCC Test Report

Report No.: AGC00429240803FR02

FCC ID	:	2BDUR-3304442
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Bluetooth Headphone
BRAND NAME	:	RadioShack
MODEL NAME	:	3304442, 3304443, 3304444, WD-PM02D
APPLICANT	:	RADIOSHACK WORLDWIDE CORP.
DATE OF ISSUE	:	Aug. 29, 2024
STANDARD(S)	:	FCC Part 15 Subpart C §15.247
REPORT VERSION	:	V1.0







Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 29, 2024	Valid	Initial Release



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Test Frequency List	
2.3 Related Submittal(S) / Grant (S)	7
2.4 Test Methodology	7
2.5 Special Accessories	7
2.6 Equipment Modifications	7
2.7 Antenna Requirement	7
3. Test Environment	
3.1 Address of the Test Laboratory	
3.2 Test Facility	
3.3 Environmental Conditions	9
3.4 Measurement Uncertainty	9
3.5 List of Equipment Use	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	14
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Results	
9. Power Spectral Density Measurement	
9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Results	
10. Conducted Band Edge and Out-of-Band Emissions	



10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Results	
11. Radiated Spurious Emission	
11.1 Measurement Limit	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission Test	
12.1 Measurement Limit	
12.2 Measurement Setup (Block Diagram of Configuration)	
12.3 Preliminary Procedure of Line Conducted Emission Test	67
12.4 Final Procedure of Line Conducted Emission Test	
12.5 Measurement Results	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of Test EUT	



1. General Information

Applicant	RADIOSHACK WORLDWIDE CORP.			
Address	Millennium Tower, 18th floor Paseo General Escalon Number 3675 Col. Escalon, San Salvador, El Salvador			
Manufacturer	Huizhou Weide Electronics Co., Ltd.			
Address	Jimadi Industrial Area, Boluo County, Huizhou, Guangdong, China			
Factory	Huizhou Weide Electronics Co., Ltd.			
Address	Jimadi Industrial Area, Boluo County, Huizhou, Guangdong, China			
Product Designation	Bluetooth Headphone			
Brand Name	RadioShack			
Test Model	3304442			
Series Model(s)	3304443, 3304444, WD-PM02D			
Difference Description	All the same except for the model name and appearance color.			
Date of receipt of test item	Aug. 12, 2024			
Date of Test	Aug. 12, 2024~Aug. 29, 2024			
Deviation from Standard	No any deviation from the test method			
Condition of Test Sample	Normal			
Test Result	Pass			
Test Report Form No	AGCER-FCC-BLE-V1			

Note: The test results of this report relate only to the tested sample identified in this report.

Bibo zhang Prepared By Bibo Zhang Aug. 29, 2024 (Project Engineer) **Reviewed By** nn Calvin Liu Aug. 29, 2024 (Reviewer)

Approved By

Max Zhan Max Zhang

Authorized Officer

Aug. 29, 2024



2. Product Information

2.1 Product Technical Description

Frequency Band	2400MHz-2483.5MHz
Operation Frequency Range	2402MHz-2480MHz
Bluetooth Version	V5.4
Modulation Type	BLE GFSK 1Mbps GFSK 2Mbps
Number of channels	40
Carrier Frequency of Each Channel	40 Channels (37 Data channels + 3 advertising channels)
Channel Separation	2 MHz
Maximum Transmitter Power	-2.114dBm
Hardware Version	Rev3.0
Software Version	V1.0
Antenna Designation	PCB Antenna
Antenna Gain	-0.58dBi
Power Supply	DC 3.7V by battery

2.2 Test Frequency List

Frequency Band	Channel Number	Frequency		
	0	2402 MHz		
	1	2404 MHz		
2400~2483.5MHz	:	:		
	19	2440MHz		
	:	:		
	38	2478 MHz		
	39	2480 MHz		
Note: f = 2402 + 2*k MHz, k = 0,, 39 f is the operating frequency (MHz); k is the operating channel.				



2.3 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: **2BDUR-3304442**, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.4 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on Digital Transmission Systems, Frequency Hopping Spread Spectrum system, and Hybrid system devices operating under Section 15.247 of the FCC rules

2.5 Special Accessories

Not available for this EUT intended for grant.

2.6 Equipment Modifications

Not available for this EUT intended for grant.

2.7 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is -0.58 dBi.



3. Test Environment

3.1 Address of the Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106
Power supply	DC 3.7V

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard

uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	U _c = ±2 %
Uncertainty of Occupied Channel Bandwidth	U _c = ±2 %



3.5 List of Equipment Use

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2024-02-01	2025-01-31	
\boxtimes	AGC-ER-A001	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-09-21	2025-09-20	
	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22	
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2024-02-01	2025-01-31	
	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2024-03-31	2025-03-30	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08	

• A	AC Power Line Conducted Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27	
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08	
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27	



• Tes	Test Software							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information			
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71			
\boxtimes	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A			
	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6			
	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0			



4.System Test Configuration

4.1 EUT Configuration


The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

Radiated Emission Configure:



4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

☐ Test Accessories Come From The Laboratory

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable		
1	Control Box		USB-TTL				
	Test Accessories Come From The Manufacturer						
No.	Equipment	Manufacturer	Model No.	Specification Information	Cable		
1							



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(3)	RF Output Power	Pass
3	§15.247 (a)(2)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.209	Radiated Emission& Band Edge	Pass
7	§15.207	AC Power Line Conducted Emission	Not applicable

Note: The BT function cannot transmit when charging.



5. Description of Test Modes

	Summ	ary Table of Test Cases				
		Data Rate / Modulation				
Test Item		Bluetooth – LE(1Mbps/2Mbps) / GFSK				
	Mode 1: Blu	uetooth Tx CH00_2402 MHz_1Mbps(Battery powered)				
	Mode 2: Blu	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps(Battery powered)				
Radiated & Conducted	Mode 3: Blu	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps(Battery powered)				
Test Cases	Mode 4: Blu	uetooth Tx CH00_2402 MHz_2Mbps(Battery powered)				
	Mode 5: Blu	uetooth Tx CH19_2440 MHz_2Mbps(Battery powered)				
	Mode 6: Blu	uetooth Tx CH39_2480 MHz_2Mbps(Battery powered)				
AC Conducted Emission		N/A				
Note:						
 FCC A 帮助(L) 串口说 串口 波特率 数据位 校验位 停止位 	Softwassist 1.0.2.2	antenna connector is provided by the manufacture. ware Setting Diagram - □ × Command_Type: EN_TX_TEST_CMD ch_index: (0 - 2402) len_of_test_data: 0x0 Package_Payload: PRBS9 PHY: LE 2M PHY reply data: 04 0E 04 01 34 20 00 return status: 0x0 发送成功:				
BR/ED C len_o Pack	E NoFlow 美田 本田 R BLE ommand_Type EM_TX_TEST_CMD oh_index (39 - 2460) f_test_data Ox0 Face_Payload PRES9 PHY LE 2M PHY ation_Index standard Sand configuration	周三 8月 14 09:11:31 2024 TEST BLE Command_Type: EN_TX_TEST_CMD ch_index: (19 - 2440) len_of_test_data: 0x0 Package_Payload: PRBS9 PHY: LE 2M PHY reply data: 04 0E 04 01 34 20 00 return status: 0x0 发送成功! 周三 8月 14 09:12:33 2024 TEST BLE Command_Type: EN_TX_TEST_CMD ch_index: (39 - 2480) len_of_test_data: 0x0 Package_Payload: PRBS9 PHY: LE 2M PHY reply data: 04 0E 04 01 34 20 00 return status: 0x0 发送成功!				
		清除日志				




6. Duty Cycle Measurement

The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	T(µs)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)
BLE_1Mbps	89.2	14.42	8.41	0.01
BLE_2Mbps	57.2	9.15	10.39	0.02

Remark:

2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value

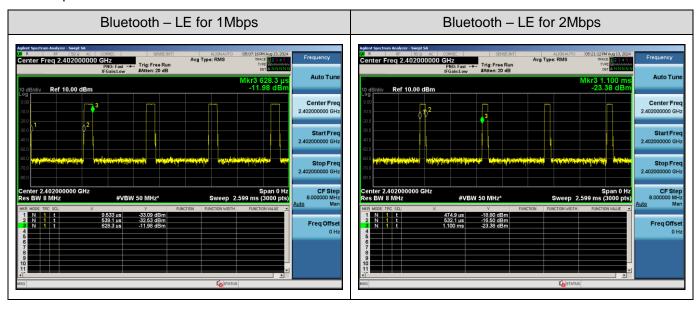

The test plots as follows:

^{1.} Duty Cycle factor = 10 * log (1/ Duty cycle)



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.


7.2 Measurement Procedure

For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.1 Method Max peak power:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the RBW > DTS bandwidth
- 3. Set the VBW \geq [3 x RBW].
- 4. Span≥[3 x RBW].
- 5. Sweep= auto couple.
- 6. Detector Function= Peak.
- 7. Trace mode= Max hold.
- 8. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- For Average power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G:
- 1. The RF output of EUT was connected to the power meter by RF cable and attenuator.
- 2. The path loss was compensated to the results for each measurement.
- 3. Set to the maximum power setting and enable the EUT transmit continuously.
- 4. Measure the conducted output power and record the results in the test report.


7.3 Measurement Setup (Block Diagram of Configuration)

For Average power test setup

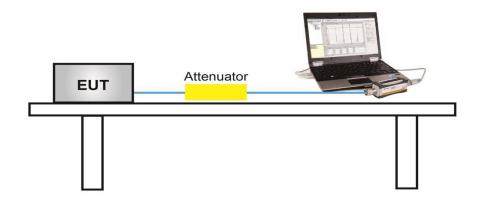




For peak power test setup

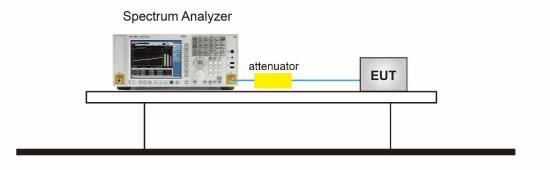

7.4 Measurement Result


Test Data of Conducted Output Power						
Test Mode	Test Frequency (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail		
	2402	-3.087	≪30	Pass		
GFSK_1Mbps	2440	-2.538	≪30	Pass		
	2480	-2.201	≪30	Pass		
	2402	-3.075	≪30	Pass		
GFSK_2Mbps	2440	-2.519	≪30	Pass		
	2480	-2.114	≤30	Pass		



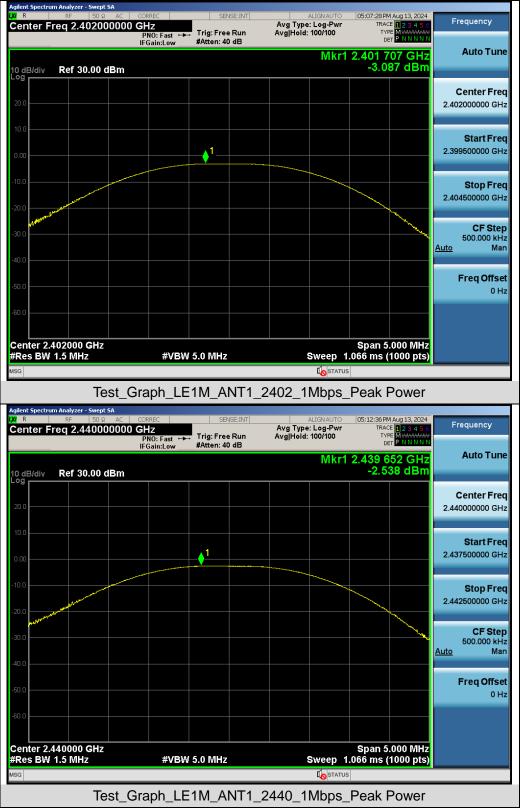


Test Graphs of Conducted Output Power



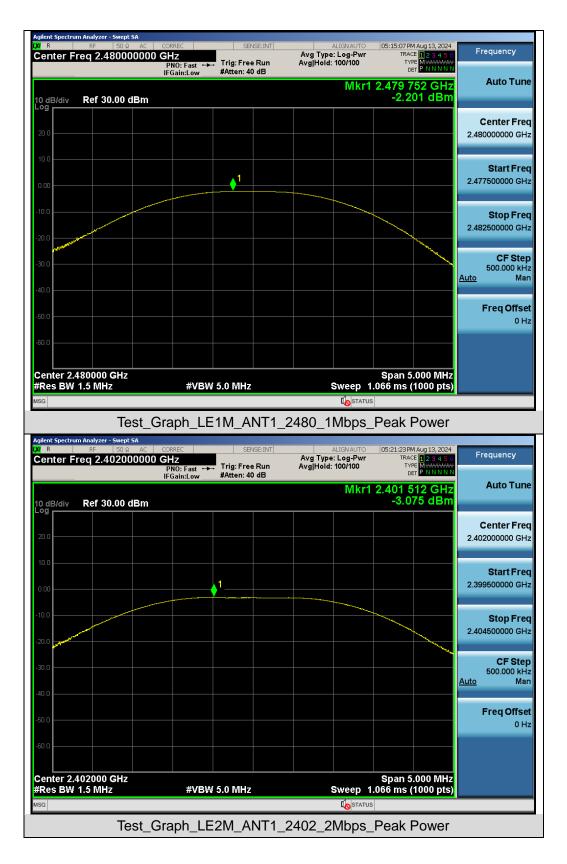



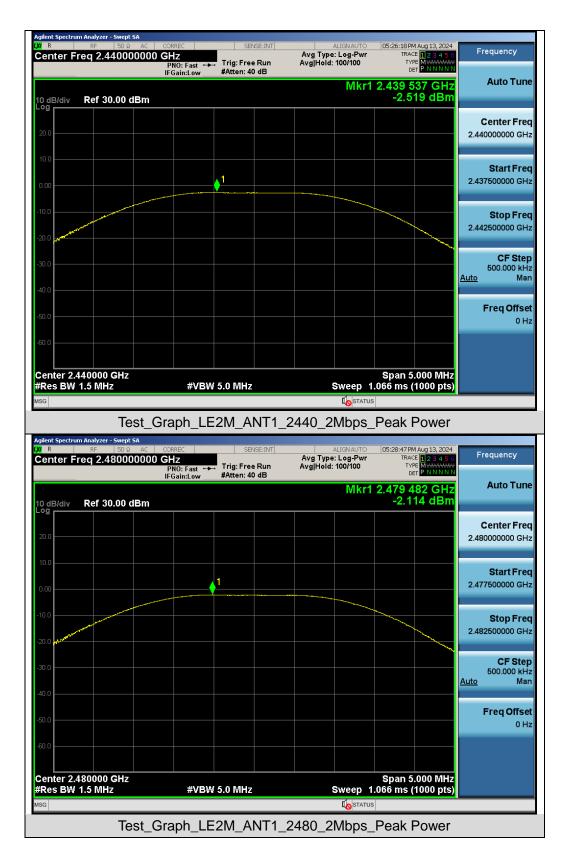



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

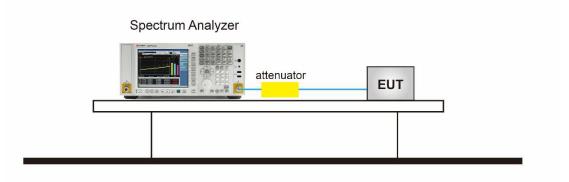




8.4 Measurement Results

Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Frequency (MHz)	Occupied Bandwidth (MHz)	DTS BW (MHz)	DTS BW Limits	Pass or Fail		
	2402	1.024	0.505	≥0.5	Pass		
GFSK_1Mbps	2440	1.025	0.508	≥0.5	Pass		
	2480	1.026	0.506	≥0.5	Pass		
GFSK_2Mbps	2402	2.046	0.874	≥0.5	Pass		
	2440	2.063	0.874	≥0.5	Pass		
	2480	2.047	0.875	≥0.5	Pass		

Test Graphs of Occupied Bandwidth

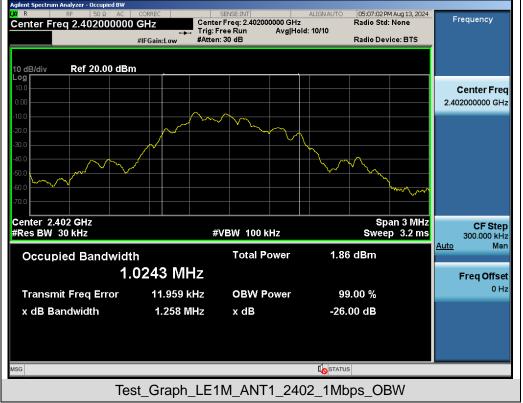















Test_Graph_LE1M_ANT1_2402_1Mbps_DTSBW




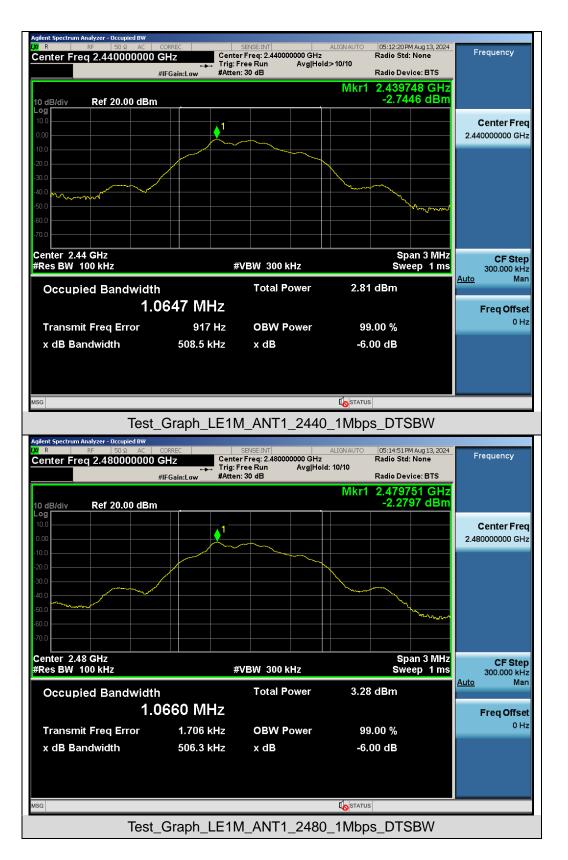



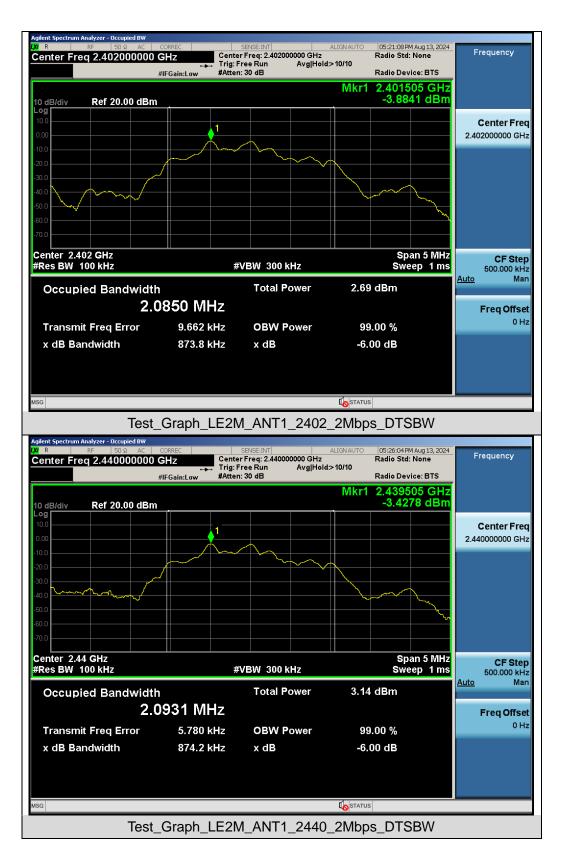



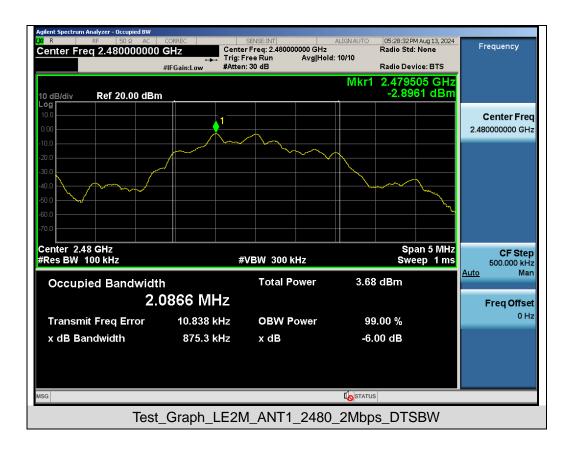



9. Power Spectral Density Measurement

9.1 Provisions Applicable


The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz in order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
- 4. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
- 5. Measure and record the results in the test report.
- 6. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

9.3 Measurement Setup (Block Diagram of Configuration)

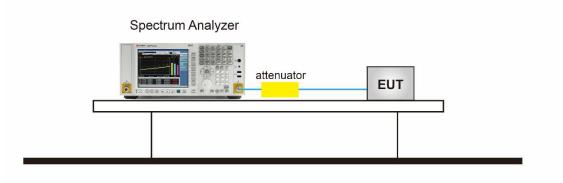





9.4 Measurement Results

Test Data of Conducted Output Power Spectral Density						
Test Mode	Test Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
	2402	-22.470	≪8	Pass		
GFSK_1Mbps	2440	-22.040	≪8	Pass		
	2480	-21.531	≪8	Pass		
	2402	-25.593	≪8	Pass		
GFSK_2Mbps	2440	-25.090	≪8	Pass		
	2480	-24.601	≪8	Pass		


Test Graphs of Conducted Output Power Spectral Density

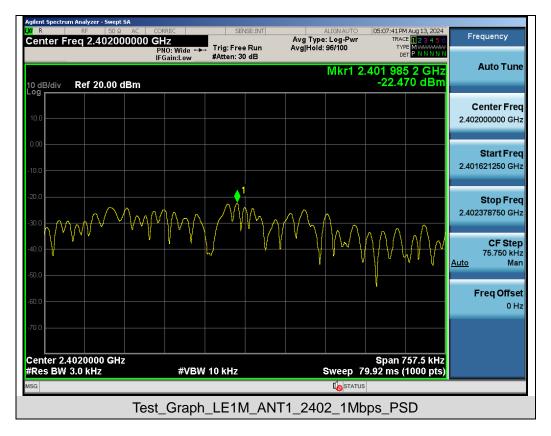




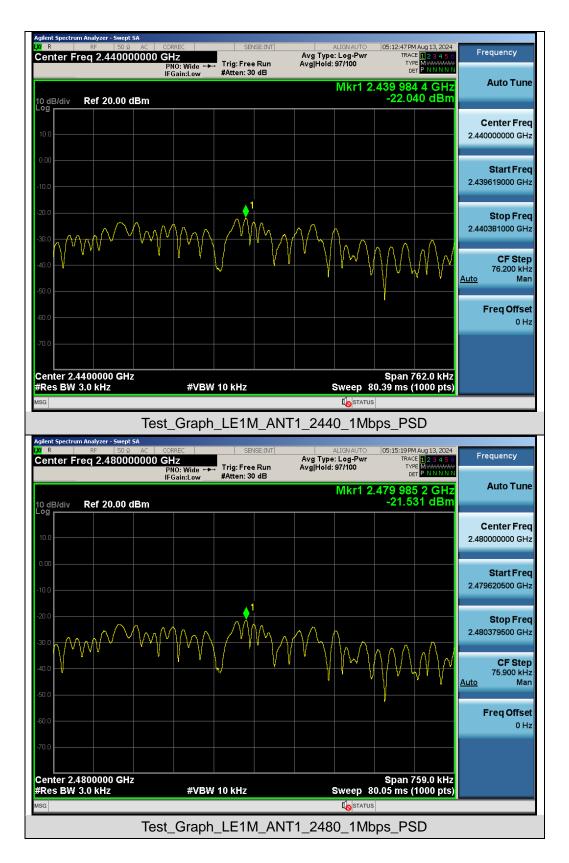




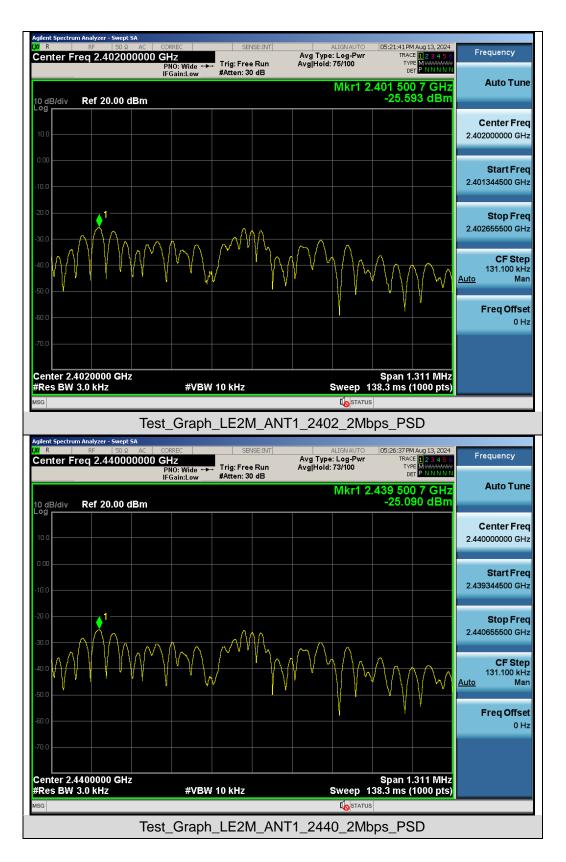



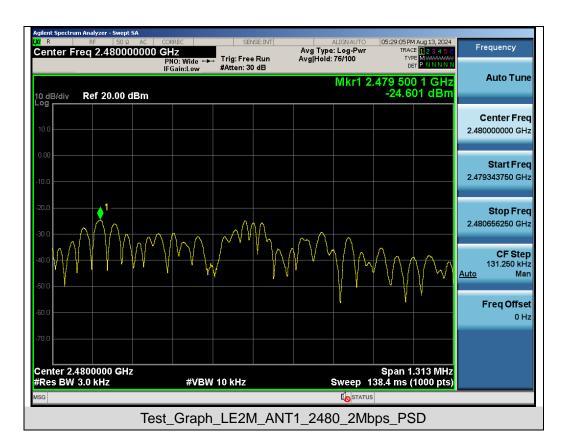





10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable


The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100kHz bandwidth per the PSD procedure.

10.2 Measurement Procedure

- Reference level measurement
- 1. Set instrument center frequency to DTS channel center frequency
- 2. Set the span to \geq 1.5 times the DTS bandwidth
- 3. Set the RBW = 100 kHz
- 4. Set the VBW \geq 3 x RBW
- 5. Detector = peak
- 6. Sweep time = auto couple
- 7. Trace mode = max hold
- 8. Allow trace to fully stabilize
- Emission level measurement
- 1. Set the center frequency and span to encompass frequency range to be measured
- 2. RBW = 100kHz
- 3. VBW = 300kHz
- 4. Detector = Peak
- 5. Trace mode = max hold
- 6. Sweep time = auto couple
- 7. The trace was allowed to stabilize

10.3 Measurement Setup (Block Diagram of Configuration)

Spectrum Analyzer

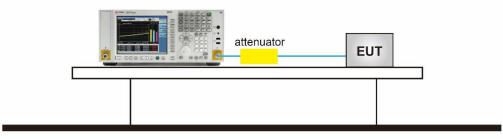




10.4 Measurement Results




Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



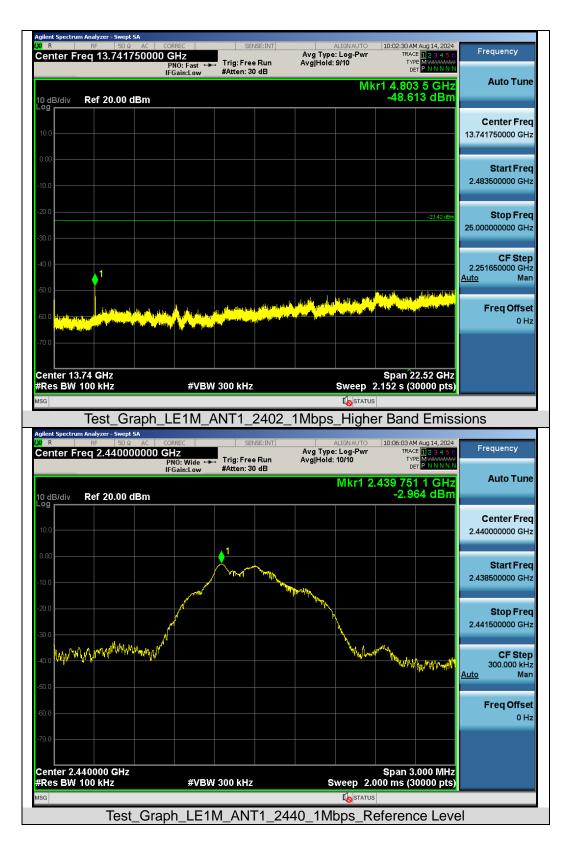



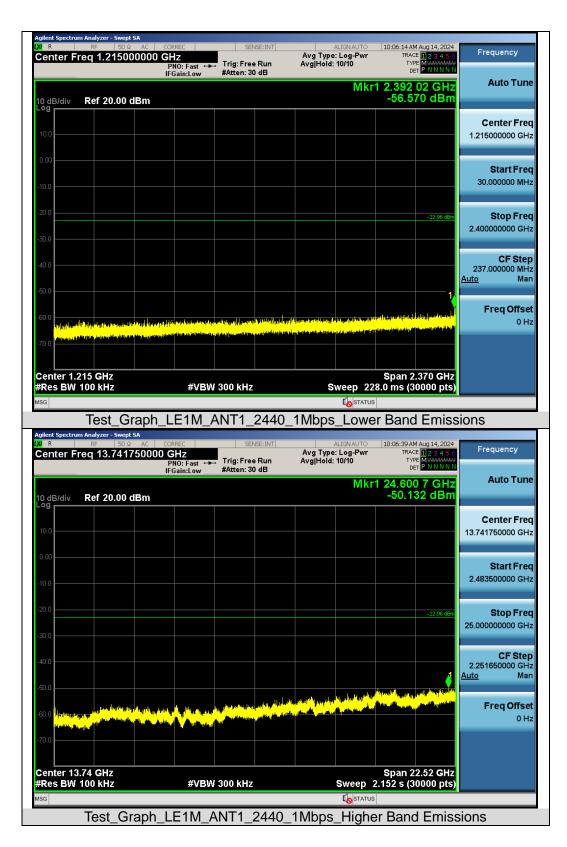












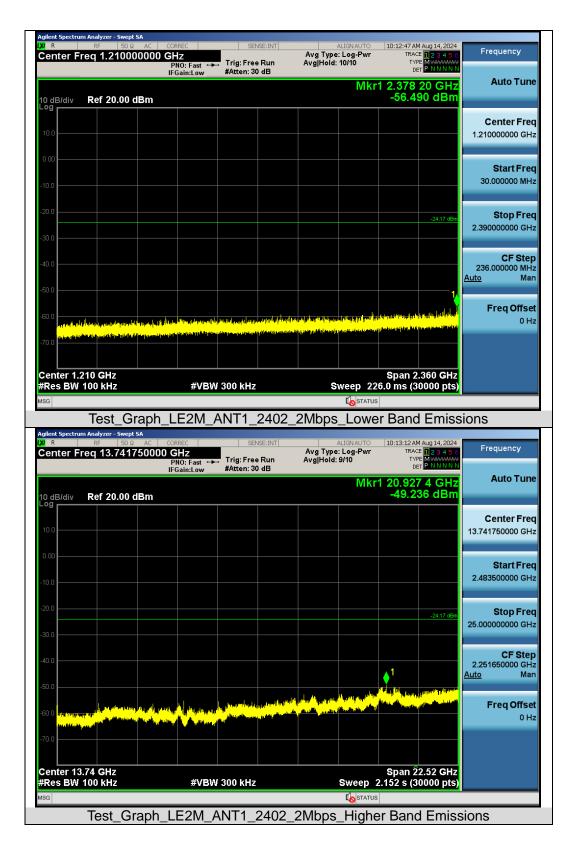












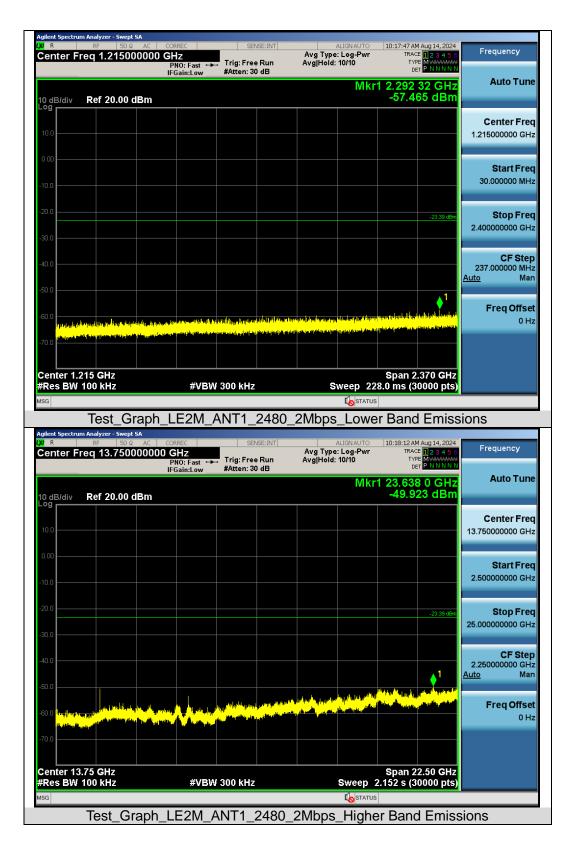





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands







11. Radiated Spurious Emission

11.1 Measurement Limit

FCC Part 15.209 Limit in the below table to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.



pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 9. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 10. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 11. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.

Spectrum ParameterSettingStart ~Stop Frequency9kHz~150kHz/RB 200Hz for QPStart ~Stop Frequency150kHz~30MHz/RB 9kHz for QPStart ~Stop Frequency30MHz~1000MHz/RB 120kHz for QPStart ~Stop Frequency1GHz~26.5GHzStart ~Stop Frequency1MHz/3MHz for Peak, 1MHz/3MHz for Average

The following table is the setting of spectrum analyzer and receiver.

Receiver Parameter	Setting
Start ~Stop Frequency	9kHz~150kHz/RB 200Hz for QP
Start ~Stop Frequency	150kHz~30MHz/RB 9kHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120kHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


<u>Average Measurements above 1GHz</u>

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW ≥ [3 × RBW]
- 4. Detector = Power averaging (rms)
- 5. Averaging type = power (i.e., rms)
- 6. Sweep time = auto
- 7. Perform a trace average of at least 100 traces.
- 8. The applicable correction factor is [10*log (1 / D)], where D is the duty cycle. The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




11.3 Measurement Setup (Block Diagram of Configuration)




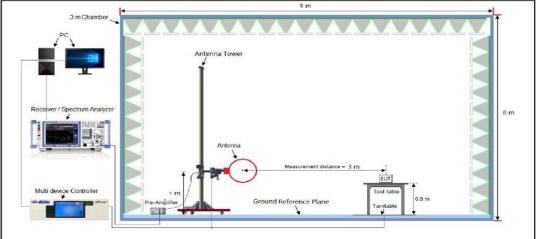

Radiated Emission Test Setup 30MHz-1000MHz

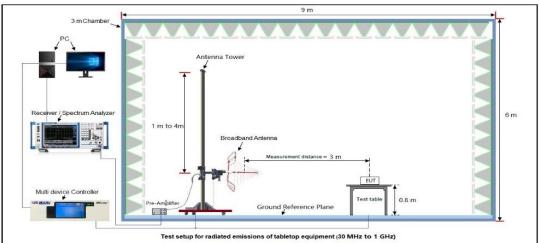

Radiated Emission Test Setup Above 1000MHz

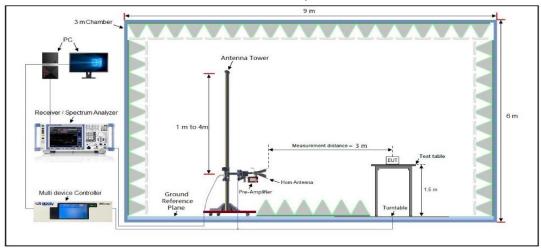

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com




11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

EUT Name Temperature Pressure Test Mode			h Heac	lphor	ne		Mode	Namo	33	304442
Pressure	23			Bluetooth Headphone Model Name						004442
	23.4 ℃						Relat	Relative Humidity		6.7 %
Toot Mode	960hPa Test Voltage						D	C 3.7V by batter		
lest mode	Mc	ode 6					Anter	nna Polari	ty Ho	orizontal
72.0	dBuV/n	n					•			
									Limit: Margin	κ <u> </u>
										r
						2 X				
					┙┼┼╴		haven when his had	2	4	5 6
32						1 X		. Ĭ~	pressionally	/ ^M
						many 1		helpen and		
dite	Marsh Holen	Manualingu	Mennandhaffer	hypologenet	March Martine	Mar Marian Maria	for the for an allow the second			
-8										
30.00	0 4	40 50	0 60	70 80		(MHz)	300		500 600 701	D 1 000.000
ľ	lo. I	Mk.	Frec		Readir Level	-	Measure ment	- Limit	Over	
			MHz	·	dBuV		dBuV/m	dBuV/m	d B	Detector
	1	18	0.016	5	17.12	2 12.20	29.32	43.50	-14.18	peak
	2	* 19	1.745	0	27.40) 13.55	40.95	43.50	-2.55	QP
	3	43	2.545	7	7.13	3 23.50	30.63	46.00	-15.37	peak
	4	61	8.536	8	6.63	3 25.19	31.82	46.00	-14.18	peak
	5	80	14.602	8	7.85	5 26.78	34.63	46.00	-11.37	peak
			0.147		4.64	31.78	36.42	46.00	-9.58	peak





			Ra	adia	ted Emiss	ion lest Re	sults at 30M	Hz-1GH	Z			
EUT Name	Blueto	ooth H	Head	dphc	one		Model	Name	3	304442		
Temperature	23.4	°C					Relativ	Relative Humidity 56.				
Pressure	960hPa Test Voltage						C	DC 3.7V by ba	attery			
Test Mode	Mode	6					Antenn	a Polari	ty 🕔	Vertical		
72.0 d	dBuV/m											
32								4		it: rgin:		
Kathéw	,	Andrews an	kurina a	nduliya	under and a start of the		Martin and a start and a start and a start and a start a start and a start a start a start a start a start a st					
-8 30.000		50	60		20 20	(MHz)	944 minute - Marine - Marine - Marine -	400	500 600	700 1000.000		
-8 30.000		50		70								
-8 30.000	0 40	50	60	70	Reading	(MHz) Correct	эю Measure-	400	500 600 Over			
-8 30.000	0 40	50	60 Fre	70	eeading Level	(MHz) Correct Factor	300 Measure- ment	400 Limit	500 600 Over	Detector		
-8 30.000	0 40	50	60 Fre	70 19. z	Reading Level	(MH≥) Correct Factor dB	300 Measure- ment dBuV/m	400 Limit dBuV/n	500 600 Over n dB	Detector 3 peak		
-8 30.000	0 40 No. Mk	50	60 Fre MH2 .600	70 rq. z DO	Reading Level dBuV 6.98	(MHz) Correct Factor dB 16.93	300 Measure- ment dBuV/m 23.91	400 Limit dBuV/n 40.00	500 600 Over n dB -16.09	Detector 9 peak 5 peak		
-8 30.000	0 40 No. Mk	50 (. 42 63	60 Fre MH: .600 .758	70 q. z DO 88 50	Reading Level dBuV 6.98 8.09	(MHz) Correct Factor dB 16.93 17.06	300 Measure- ment dBuV/m 23.91 25.15	400 Limit dBuV/n 40.00	500 600 Over n dB -16.09 -14.85	Detector 9 peak 5 peak 2 peak		
-8 30.000	0 40 No. Mk	50 (. 42 63 191	60 Fre MH; .600 .758 .745	70 q. z D0 88 50 25	Reading Level 6.98 8.09 9.73	(MHz) Correct Factor dB 16.93 17.06 18.15	300 Measure- ment dBuV/m 23.91 25.15 27.88	400 Limit dBuV/n 40.00 40.00 43.50	500 600 Over n dB -16.09 -14.85 -15.62	Detector 9 peak 5 peak 2 peak 1 peak		

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



EUT Name		Bluetooth He	eadphone		Model Name		3304442		
Temperature		23.4 ℃			Relative	Humidity	56.7 %		
Pressure		960hPa			Test Volt	Voltage DC 3.7V by		y battery	
Test Mode		Mode 1			Antenna	Polarity Horizontal			
		•							
Frequency	Me	eter Reading	Factor	Emis	sion Level	Limits	Margin		
(MHz)		(dBµV)	(dB)	(dl	BµV/m)	(dBµV/m)	(dB)	Value Type	
4804.000		46.21	0.08	4	46.29	74	-27.71	peak	
4804.000		37.55	0.08	3	37.63	54	-16.37	AVG	
7206.000		41.82	2.21	4	44.03	74	-29.97	peak	
7206.000		32.23	2.21	3	34.44	54	-19.56	AVG	
Factor = Anten	nna F	actor + Cable	e Loss – Pre-	amplifie	r.				
Factor = Anten	na F	actor + Cable Bluetooth He		amplifie	r. Model Na	ame	3304442		
EUT Name	na F	1		amplifie	Model Na	ame Humidity	3304442 56.7 %		
	nna F	Bluetooth He		amplifie	Model Na	Humidity		attery	
EUT Name Temperature	nna F	Bluetooth He		amplifie	Model Na Relative	Humidity	56.7 %	attery	
EUT Name Temperature Pressure Test Mode		Bluetooth He 23.4 °C 960hPa Mode 1	eadphone		Model Na Relative Test Volt Antenna	Humidity age Polarity	56.7 % DC 3.7V by ba Vertical		
EUT Name Temperature Pressure Test Mode		Bluetooth He 23.4 ℃ 960hPa Mode 1	eadphone	Emiss	Model Na Relative Test Volt Antenna	Humidity age Polarity Limits	56.7 % DC 3.7V by ba Vertical	attery Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz)		Bluetooth He 23.4 °C 960hPa Mode 1 eter Reading (dBµV)	Factor (dB)	Emiss (dl	Model Na Relative Test Volt Antenna	Humidity age Polarity Limits (dBµV/m)	56.7 % DC 3.7V by ba Vertical Margin (dB)	- Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000		Bluetooth He 23.4 °C 960hPa Mode 1 eter Reading (dBµV) 46.51	Factor (dB) 0.08	Emiss (dl	Model Na Relative Test Volt Antenna sion Level BµV/m) 46.59	Humidity age Polarity Limits	56.7 % DC 3.7V by ba Vertical Margin (dB) -27.41		
EUT Name Temperature Pressure Test Mode Frequency (MHz)		Bluetooth He 23.4 °C 960hPa Mode 1 eter Reading (dBµV)	Factor (dB)	Emiss (df	Model Na Relative Test Volt Antenna	Humidity age Polarity Limits (dBµV/m) 74	56.7 % DC 3.7V by ba Vertical Margin (dB)	- Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000		Bluetooth He 23.4 ℃ 960hPa Mode 1 eter Reading (dBµV) 46.51 37.53	Factor (dB) 0.08 0.08	Emiss (df	Model Na Relative Test Volt Antenna sion Level BµV/m) 46.59 37.61	Humidity age Polarity Limits (dBµV/m) 74 54	56.7 % DC 3.7V by ba Vertical Margin (dB) -27.41 -16.39	- Value Type peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000		Bluetooth He 23.4 ℃ 960hPa Mode 1 eter Reading (dBµV) 46.51 37.53 41.21	Factor (dB) 0.08 0.08 2.21	Emiss (df	Model Na Relative Test Volt Antenna sion Level BµV/m) 46.59 37.61 43.42	Humidity age Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V by ba Vertical Margin (dB) -27.41 -16.39 -30.58	- Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000		Bluetooth He 23.4 °C 960hPa Mode 1 eter Reading (dBμV) 46.51 37.53 41.21 32.96	Eadphone Factor (dB) 0.08 0.08 2.21 2.21	Emiss (df	Model Na Relative Test Volt Antenna sion Level BµV/m) 46.59 37.61 43.42 35.17	Humidity age Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V by ba Vertical Margin (dB) -27.41 -16.39 -30.58	- Value Type peak AVG peak	

RESULT: Pass



EUT Name		Bluetooth H	leadphone		Model Name		3304442	3304442	
Temperature		23.4 ℃				e Humidity	56.7 %		
Pressure		960hPa					DC 3.7V by battery		
					Test Voltage				
Test Mode		Mode 2			Anteni	na Polarity	Horizontal	Horizontal	
Frequency	Me	ter Reading	Factor	Emissio	n Level	Limits	Margin	Value Type	
(MHz)		(dBµV)	(dB)	(dBµ\	V/m)	(dBµV/m)	(dB)	value Type	
4880.000		46.95	0.08	47.0	03	74	-26.97	peak	
4880.000		37.36	0.08	37.4	44	54	-16.56	AVG	
7320.000		41.36	2.21	43.	57	74	-30.43	peak	
7320.000		32.09	2.21	34.3	30	54	-19.70	AVG	
Remark:									
	_								
+actor = Anter	nna F	actor + Cable	e Loss – Pre-	amplifier.			-		
	nna F			amplifier.					
		actor + Cable Bluetooth F		amplifier.	Model	Name	3304442		
Factor = Anter EUT Name Temperature				amplifier.		Name /e Humidity	3304442 56.7 %		
EUT Name		Bluetooth H		amplifier.		e Humidity		y battery	
EUT Name Temperature		Bluetooth H 23.4 °C		amplifier.	Relativ Test Ve	e Humidity	56.7 %	y battery	
EUT Name Femperature Pressure Fest Mode		Bluetooth H 23.4 °C 960hPa Mode 2	leadphone		Relativ Test Vo Anteni	ve Humidity oltage na Polarity	56.7 % DC 3.7V by Vertical	y battery	
EUT Name Femperature Pressure Fest Mode		Bluetooth ⊢ 23.4 ℃ 960hPa Mode 2 ter Reading	leadphone Factor	Emissio	Relativ Test Ve Antenn	ve Humidity oltage na Polarity Limits	56.7 % DC 3.7V by Vertical Margin	1	
EUT Name Temperature Pressure Test Mode Frequency (MHz)		Bluetooth ⊢ 23.4 °C 960hPa Mode 2 ter Reading (dBµV)	leadphone Factor (dB)	Emissio	Relativ Test Vo Anteni n Level V/m)	ve Humidity oltage na Polarity Limits (dBµV/m)	56.7 % DC 3.7V by Vertical Margin (dB)	- Value Type	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000		Bluetooth H 23.4 °C 960hPa Mode 2 ter Reading (dBµV) 46.21	leadphone Factor (dB) 0.08	Emissio (dBµ\ 46.2	Relativ Test Vo Antenn n Level V/m) 29	ve Humidity oltage na Polarity Limits (dBµV/m) 74	56.7 % DC 3.7V by Vertical Margin (dB) -27.71	- Value Type peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000		Bluetooth H 23.4 °C 960hPa Mode 2 ter Reading (dBµV) 46.21 37.23	Factor (dB) 0.08 0.08	Emissio (dBµ\ 46.3 37.5	Relativ Test Vo Anteni n Level V/m) 29 31	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54	56.7 % DC 3.7V by Vertical Margin (dB) -27.71 -16.69	- Value Type peak AVG	
EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4880.000 4880.000 7320.000		Bluetooth H 23.4 °C 960hPa Mode 2 ter Reading (dBµV) 46.21 37.23 41.38	Factor (dB) 0.08 0.08 2.21	Emissio (dBµ\ 46.3 37.3 43.4	Relativ Test Vo Antenn n Level V/m) 29 31 59	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V by Vertical Margin (dB) -27.71 -16.69 -30.41	Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000		Bluetooth H 23.4 °C 960hPa Mode 2 ter Reading (dBµV) 46.21 37.23	Factor (dB) 0.08 0.08	Emissio (dBµ\ 46.3 37.5	Relativ Test Vo Antenn n Level V/m) 29 31 59	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54	56.7 % DC 3.7V by Vertical Margin (dB) -27.71 -16.69	- Value Type peak AVG	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000 7320.000 7320.000		Bluetooth H 23.4 °C 960hPa Mode 2 ter Reading (dBµV) 46.21 37.23 41.38	Factor (dB) 0.08 0.08 2.21	Emissio (dBµ\ 46.3 37.3 43.4	Relativ Test Vo Antenn n Level V/m) 29 31 59	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V by Vertical Margin (dB) -27.71 -16.69 -30.41	Value Type peak AVG peak	
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4880.000 4880.000 7320.000	Me	Bluetooth Η 23.4 °C 960hPa Mode 2 ter Reading (dBμV) 46.21 37.23 41.38 32.68	Factor (dB) 0.08 0.08 2.21 2.21	Emissio (dBµ\ 46.: 37.: 43.: 34.:	Relativ Test Vo Antenn n Level V/m) 29 31 59	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V by Vertical Margin (dB) -27.71 -16.69 -30.41	Value Type peak AVG peak	

RESULT: Pass



EUT Name		Bluetooth H	eadphone		Model Name		3304442	3304442	
Temperature		23.4 °C			Relativ	Relative Humidity			
Pressure		960hPa Test Voltage DC 3.7V b			by battery				
Test Mode		Mode 3			Antenn	a Polarity	Horizonta	al	
Frequency	Mete	ter Reading Factor Emis			ion Level	Limits	Margin		
(MHz)		(dBµV)	(dB)	(dB	μV/m)	(dBµV/m)	(dB)	Value Typ	
4960.000		46.15	0.08	46	5.23	74	-27.77	peak	
4960.000		37.60	0.08	37	7.68	54	-16.32	AVG	
7440.000		41.34	2.21	43	3.55	74	-30.45	peak	
7440.000		32.40	2.21	34	4.61	54	-19.39	AVG	
Remark:									
		otor L Coble	Looo Dro	omplifior					
Factor = Anten	na Fa	actor + Cable	e Loss – Pre-	amplifier.					
	na Fa	actor + Cable	e Loss – Pre-	amplifier.					
Factor = Anteni	na Fa	actor + Cable Bluetooth H		amplifier.	Model	Name	3304442		
Factor = Anteni EUT Name	na Fa			amplifier.	Model	Name e Humidity	3304442 56.7 %		
Factor = Anteni EUT Name	na Fa	Bluetooth H		amplifier.	Model	e Humidity	56.7 %	by battery	
Factor = Anteni EUT Name Temperature Pressure	na Fa	Bluetooth H 23.4 ℃		amplifier.	Model Relativ Test Vo	e Humidity	56.7 %		
Factor = Anteni EUT Name Temperature Pressure Test Mode		Bluetooth H 23.4 °C 960hPa Mode 3	eadphone		Model Relativ Test Vo Antenn	e Humidity oltage na Polarity	56.7 % DC 3.7V Vertical		
Factor = Anteni EUT Name Temperature Pressure Test Mode		Bluetooth H 23.4 ℃ 960hPa Mode 3	eadphone Factor	Emissio	Model I Relativ Test Vo Antenn	e Humidity oltage na Polarity Limits	56.7 % DC 3.7V Vertical Margin		
Factor = Anteni EUT Name Temperature Pressure Test Mode		Bluetooth H 23.4 ℃ 960hPa Mode 3 //eter Reading (dBµV)	eadphone Factor (dB)	Emissio (dBµ	Model Relativ Test Vo Antenn	e Humidity oltage ha Polarity Limits (dBµV/m)	56.7 % DC 3.7V Vertical Margin (dB)	by battery Value Type	
Factor = Antenne EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000		Bluetooth H 23.4 ℃ 960hPa Mode 3 //eter Reading (dBµV) 46.19	eadphone Factor (dB) 0.08	Emissic (dBµ 46	Model Relativ Test Vo Antenn on Level V/m) .27	Limits (dBµV/m) 74	56.7 % DC 3.7V Vertical Margin (dB) -27.73	by battery Value Type peak	
Factor = Anteni EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000		Bluetooth H 23.4 ℃ 960hPa Mode 3 /eter Reading (dBµV) 46.19 37.72	eadphone Factor (dB) 0.08 0.08	Emissio (dBµ 46 37	Model Relativ Test Vo Antenn Dn Level IV/m) .27 .80	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54	56.7 % DC 3.7V Vertical Margin (dB) -27.73 -16.20	by battery Value Type peak AVG	
Factor = Anteni EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000		Bluetooth H 23.4 °C 960hPa Mode 3 //eter Reading (dBμV) 46.19 37.72 41.79	eadphone Factor (dB) 0.08 0.08 2.21	Emissic (dBµ 46 37 44	Model Relativ Test Vo Antenn Dn Level IV/m) .27 .80 .00	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V Vertical Margin (dB) -27.73 -16.20 -30.00	by battery Value Type peak AVG peak	
Factor = Anteni EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000		Bluetooth H 23.4 ℃ 960hPa Mode 3 /eter Reading (dBµV) 46.19 37.72	eadphone Factor (dB) 0.08 0.08	Emissic (dBµ 46 37 44	Model Relativ Test Vo Antenn Dn Level IV/m) .27 .80	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54	56.7 % DC 3.7V Vertical Margin (dB) -27.73 -16.20	by battery Value Type peak AVG	
Factor = Antenn EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000 7440.000		Bluetooth H 23.4 °C 960hPa Mode 3 //eter Reading (dBμV) 46.19 37.72 41.79	eadphone Factor (dB) 0.08 0.08 2.21	Emissic (dBµ 46 37 44	Model Relativ Test Vo Antenn Dn Level IV/m) .27 .80 .00	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V Vertical Margin (dB) -27.73 -16.20 -30.00	by battery Value Type peak AVG peak	
Factor = Anteni EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000 7440.000		Bluetooth H 23.4 ℃ 960hPa Mode 3 //eter Reading (dBµV) 46.19 37.72 41.79 32.20	eadphone Factor (dB) 0.08 0.08 2.21	Emissic (dBµ 46 37 44 34	Model Relativ Test Vo Antenn Dn Level IV/m) .27 .80 .00	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V Vertical Margin (dB) -27.73 -16.20 -30.00	by battery Value Type peak AVG peak	

RESULT: Pass



EUT Name		Bluetooth He	eadphone		Model Na	ame	3304442	
Temperature		23.4 °C			Relative	e Humidity 56.7 %		
Pressure		960hPa			Test Voltage		DC 3.7V by battery	
Test Mode		Mode 4			Antenna	Polarity	Horizontal	
Frequency	Me	ter Reading	Factor	Emiss	sion Level	Limits	Margin	Value Typ
(MHz)		(dBµV)	(dB)	(dE	3μV/m)	(dBµV/m)	(dB)	value i yp
4804.000		46.39	0.08	4	6.47	74	-27.53	peak
4804.000		37.88	0.08	3	37.96	54	-16.04	AVG
7206.000		41.27	2.21	4	13.48	74	-30.52	peak
7206.000		32.40	2.21	3	34.61	54	-19.39	AVG
Remark:								
	nna F	1		amplifie			1	
Factor = Anter EUT Name	na F	Bluetooth He		amplifie	Model Na	ame	3304442	
EUT Name	nna F	1		amplifie	Model Na	ame Humidity	3304442 56.7 %	
EUT Name Temperature	nna F	Bluetooth He		amplifie	Model Na	Humidity		attery
EUT Name Femperature Pressure	nna F	Bluetooth He		amplifie	Model Na Relative	Humidity age	56.7 %	attery
EUT Name Femperature Pressure Fest Mode		Bluetooth He 23.4 °C 960hPa Mode 4	eadphone		Model Na Relative Test Volt Antenna	Humidity age Polarity	56.7 % DC 3.7V by ba	1
EUT Name Femperature Pressure Fest Mode		Bluetooth He 23.4 ℃ 960hPa Mode 4		Emiss	Model Na Relative Test Volt Antenna	Humidity age Polarity Limits	56.7 % DC 3.7V by ba Vertical	attery Value Typ
EUT Name Femperature Pressure Fest Mode		Bluetooth He 23.4 °C 960hPa Mode 4	eadphone	Emiss (dE	Model Na Relative Test Volt Antenna	Humidity age Polarity	56.7 % DC 3.7V by ba	1
EUT Name Temperature Pressure Test Mode Frequency (MHz)		Bluetooth He 23.4 ℃ 960hPa Mode 4 ter Reading (dBµV)	eadphone Factor (dB)	Emiss (dE	Model Na Relative Test Volt Antenna	Humidity age Polarity Limits (dBµV/m)	56.7 % DC 3.7V by ba Vertical Margin (dB)	- Value Typ
EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4804.000		Bluetooth He 23.4 °C 960hPa Mode 4 ter Reading (dBµV) 46.86	Factor (dB) 0.08	Emiss (dB	Model Na Relative Test Volt Antenna sion Level BµV/m) 6.94	Humidity age Polarity Limits (dBµV/m) 74	56.7 % DC 3.7V by ba Vertical Margin (dB) -27.06	- Value Typ peak
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000		Bluetooth He 23.4 ℃ 960hPa Mode 4 ter Reading (dBµV) 46.86 37.62	Factor (dB) 0.08 0.08	Emiss (dE	Model Na Relative Test Volt Antenna sion Level BµV/m) 16.94 87.70	Humidity age Polarity Limits (dBµV/m) 74 54	56.7 % DC 3.7V by ba Vertical Margin (dB) -27.06 -16.30	- Value Typ peak AVG
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000		Bluetooth He 23.4 ℃ 960hPa Mode 4 ter Reading (dBµV) 46.86 37.62 41.06	Factor (dB) 0.08 0.08 2.21	Emiss (dE	Model Na Relative Test Volt Antenna sion Level 3µV/m) 6.94 37.70 3.27	Humidity age Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V by ba Vertical Margin (dB) -27.06 -16.30 -30.73	- Value Typ peak AVG peak
EUT Name Temperature Pressure Test Mode Frequency (MHz) 4804.000 4804.000 7206.000	Me	Bluetooth He 23.4 ℃ 960hPa Mode 4 ter Reading (dBµV) 46.86 37.62 41.06 32.40	Factor (dB) 0.08 0.08 2.21 2.21	Emiss (dE 3 4 3	Model Na Relative Test Volt Antenna sion Level 3µV/m) 46.94 37.70 43.27 34.61	Humidity age Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V by ba Vertical Margin (dB) -27.06 -16.30 -30.73	- Value Typ peak AVG peak

RESULT: Pass



EUT Name		Bluetooth H	leadphone		Model Name		3304442	3304442	
Temperature		23.4 ℃			Relativ	e Humidity	56.7 %		
Pressure		960hPa Test Vo			oltage	DC 3.7V b	DC 3.7V by battery		
Test Mode		Mode 5			Anten	na Polarity	Horizontal	Horizontal	
Frequency	Me	ter Reading	Factor	Emissio	n Level	Limits	Margin) (alua Tura	
(MHz)		(dBµV)	(dB)	(dBµ\	V/m)	(dBµV/m)	(dB)	Value Type	
4880.000		46.64	0.08	46.7	72	74	-27.28	peak	
4880.000		37.57	0.08	37.6	65	54	-16.35	AVG	
7320.000		41.89	2.21	44.1	10	74	-29.90	peak	
7320.000		32.27	2.21	34.4	48	54	-19.52	AVG	
Domork									
Remark: Factor - Anter	na E	actor + Cable	aloss Dra	amplifier					
Remark: Factor = Anter	nna F	actor + Cable	e Loss – Pre-	amplifier.					
	nna F	actor + Cable	e Loss – Pre-	amplifier.					
	nna F	actor + Cable Bluetooth F		amplifier.	Model	Name	3304442		
Factor = Anter	nna F			amplifier.		Name /e Humidity	3304442 56.7 %		
Factor = Anter EUT Name	nna F	Bluetooth H		amplifier.		ve Humidity		y battery	
Factor = Anter EUT Name Femperature	nna F	Bluetooth ⊢ 23.4 ℃		amplifier.	Relativ Test Ve	ve Humidity	56.7 %	y battery	
Factor = Anter EUT Name Femperature Pressure Fest Mode		Bluetooth F 23.4 ℃ 960hPa Mode 5	leadphone		Relativ Test Vo Anteni	ve Humidity oltage na Polarity	56.7 % DC 3.7V by Vertical	y battery	
Factor = Anter EUT Name Femperature Pressure Fest Mode		Bluetooth ⊢ 23.4 ℃ 960hPa Mode 5 ter Reading	leadphone Factor	Emissio	Relativ Test Ve Antenn	ve Humidity oltage na Polarity Limits	56.7 % DC 3.7V by Vertical Margin	1	
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz)		Bluetooth H 23.4 °C 960hPa Mode 5 ter Reading (dBµV)	leadphone Factor (dB)	Emissio	Relativ Test Vo Antenn n Level V/m)	ve Humidity oltage na Polarity Limits (dBµV/m)	56.7 % DC 3.7V by Vertical Margin (dB)	– Value Type	
Factor = Anter EUT Name Femperature Pressure Frest Mode Frequency (MHz) 4880.000		Bluetooth H 23.4 °C 960hPa Mode 5 ter Reading (dBµV) 46.87	Factor (dB) 0.08	Emissio (dBµ\ 46.5	Relativ Test Vo Antenn n Level V/m) 95	ve Humidity oltage na Polarity Limits (dBµV/m) 74	56.7 % DC 3.7V by Vertical Margin (dB) -27.05	– Value Type peak	
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4880.000 4880.000		Bluetooth H 23.4 °C 960hPa Mode 5 ter Reading (dBµV) 46.87 37.49	Factor (dB) 0.08 0.08	Emissio (dBµ\ 46.5 37.5	Relativ Test Vo Antenn n Level V/m) 95 57	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54	56.7 % DC 3.7V by Vertical Margin (dB) -27.05 -16.43	– Value Type peak AVG	
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4880.000 4880.000 7320.000		Bluetooth H 23.4 °C 960hPa Mode 5 ter Reading (dBµV) 46.87 37.49 41.53	Factor (dB) 0.08 0.08 2.21	Emissio (dBµ\ 46.9 37.9 43.7	Relativ Test Vo Antenn n Level V/m) 95 57 74	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V by Vertical Margin (dB) -27.05 -16.43 -30.26	Value Type peak AVG peak	
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4880.000 4880.000		Bluetooth H 23.4 °C 960hPa Mode 5 ter Reading (dBµV) 46.87 37.49	Factor (dB) 0.08 0.08	Emissio (dBµ\ 46.5 37.5	Relativ Test Vo Antenn n Level V/m) 95 57 74	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54	56.7 % DC 3.7V by Vertical Margin (dB) -27.05 -16.43	– Value Type peak AVG	
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4880.000 4880.000 7320.000		Bluetooth H 23.4 °C 960hPa Mode 5 ter Reading (dBµV) 46.87 37.49 41.53	Factor (dB) 0.08 0.08 2.21	Emissio (dBµ\ 46.9 37.9 43.7	Relativ Test Vo Antenn n Level V/m) 95 57 74	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V by Vertical Margin (dB) -27.05 -16.43 -30.26	Value Type peak AVG peak	
Factor = Anter EUT Name Femperature Pressure Fest Mode Frequency (MHz) 4880.000 4880.000 7320.000		Bluetooth H 23.4 °C 960hPa Mode 5 ter Reading (dBµV) 46.87 37.49 41.53	Factor (dB) 0.08 0.08 2.21	Emissio (dBµ\ 46.9 37.9 43.7	Relativ Test Vo Antenn n Level V/m) 95 57 74	ve Humidity oltage na Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V by Vertical Margin (dB) -27.05 -16.43 -30.26	Value Type peak AVG peak	

RESULT: Pass



EUT Name	Bluetooth	Headphone		Model	Name	3304442		
Temperature	23.4 ℃			Relativ	elative Humidity 56.7 %			
Pressure	960hPa			Test Vo	oltage	DC 3.7V	DC 3.7V by battery	
Test Mode	Mode 6	Mode 6			a Polarity	Horizonta	al	
Frequency	Meter Reading	ter Reading Factor Emiss			Limits	Margin	Value T	
(MHz)	(dBµV)	(dB)	(dBµ	uV/m)	(dBµV/m)	(dB)	Value T	pe
4960.000	46.42	0.08	46	6.50	74	-27.50	peak	
4960.000	37.30	0.08	37	.38	54	-16.62	AVG	
7440.000	41.01	2.21	43	3.22	74	-30.78	peak	
7440.000	32.42	2.21	34	.63	54	-19.37	AVG	
Remark:		-	-		-	-	-	
	a Factor + Cab	le Loss – Pre-	amplifier.					
Factor = Antenr EUT Name	Bluetooth	le Loss – Pre- Headphone	amplifier.	Model		3304442		
Factor = Antenr EUT Name			amplifier.	Model	Name e Humidity	3304442 56.7 %		
	Bluetooth		amplifier.	Model	e Humidity	56.7 %	by battery	
Factor = Antenr EUT Name Temperature Pressure	Bluetooth 23.4 ℃		amplifier.	Model Relativ Test Vo	e Humidity	56.7 %		
Factor = Antenr EUT Name Temperature Pressure Test Mode	Bluetooth 23.4 ℃ 960hPa Mode 6		amplifier.	Model Relativ Test Vo Antenn	e Humidity oltage	56.7 % DC 3.7V Vertical	by battery	
Factor = Antenr EUT Name Temperature Pressure	Bluetooth 23.4 ℃ 960hPa	Headphone		Model I Relativ Test Vo Antenn	e Humidity oltage na Polarity	56.7 % DC 3.7V		
Factor = Antenr EUT Name Temperature Pressure Test Mode	Bluetooth 23.4 °C 960hPa Mode 6 Meter Reading	Headphone Factor	Emissio	Model Relativ Test Vo Antenn	e Humidity oltage na Polarity Limits	56.7 % DC 3.7V Vertical	by battery	
Factor = Antenr EUT Name Temperature Pressure Test Mode Frequency (MHz)	Bluetooth 23.4 °C 960hPa Mode 6 Meter Reading (dBµV)	Headphone Factor (dB)	Emissio (dBµ	Model Relativ Test Vo Antenn on Level V/m) 82	e Humidity oltage ha Polarity Limits (dBµV/m)	56.7 % DC 3.7V Vertical Margin (dB)	by battery Value Type	
Factor = Antenr EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000	Bluetooth 23.4 °C 960hPa Mode 6 Meter Reading (dBµV) 46.74	Headphone Factor (dB) 0.08	Emissio (dBµ) 46.	Model Relativ Test Vc Antenn on Level V/m) 82 09	Limits (dBµV/m) 74	56.7 % DC 3.7V Vertical Margin (dB) -27.18	by battery Value Type peak	
Factor = Antenr EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000	Bluetooth 23.4 °C 960hPa Mode 6 Meter Reading (dBµV) 46.74 37.01	Headphone Factor (dB) 0.08 0.08	Emissio (dBµ 46. 37.	Model Relativ Test Vo Antenn on Level V/m) 82 09 38	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54	56.7 % DC 3.7V Vertical Margin (dB) -27.18 -16.91	by battery Value Type peak AVG	
Factor = Antenr EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 4960.000 7440.000	Bluetooth 23.4 °C 960hPa Mode 6 Meter Reading (dBµV) 46.74 37.01 41.17	Headphone Factor (dB) 0.08 0.08 2.21	Emissio (dBµ 46. 37. 43.	Model Relativ Test Vo Antenn on Level V/m) 82 09 38	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V Vertical Margin (dB) -27.18 -16.91 -30.62	by battery Value Type peak AVG peak	
Factor = Antenn EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000 7440.000	Bluetooth 23.4 °C 960hPa Mode 6 Meter Reading (dBµV) 46.74 37.01 41.17	Headphone Factor (dB) 0.08 0.08 2.21	Emissio (dBµ 46. 37. 43.	Model Relativ Test Vo Antenn on Level V/m) 82 09 38	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V Vertical Margin (dB) -27.18 -16.91 -30.62	by battery Value Type peak AVG peak	
Factor = Antenr EUT Name Temperature Pressure Test Mode Frequency (MHz) 4960.000 7440.000 7440.000	Bluetooth 23.4 °C 960hPa Mode 6 Meter Reading (dBµV) 46.74 37.01 41.17	Factor (dB) 0.08 2.21 2.21	Emissio (dBµ ¹ 46. 37. 43. 35.	Model Relativ Test Vo Antenn on Level V/m) 82 09 38	e Humidity oltage ha Polarity Limits (dBµV/m) 74 54 74	56.7 % DC 3.7V Vertical Margin (dB) -27.18 -16.91 -30.62	by battery Value Type peak AVG peak	

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.
- 3. The "Factor" value can be calculated automatically by software of measurement system.



EUT Name	Bluetooth Headphone	Model Name	3304442
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 1	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass



EUT Name	Bluetooth Headphone	Model Name	3304442
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: Pass



EUT Name	Bluetooth Headphone	Model Name	3304442
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 3	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

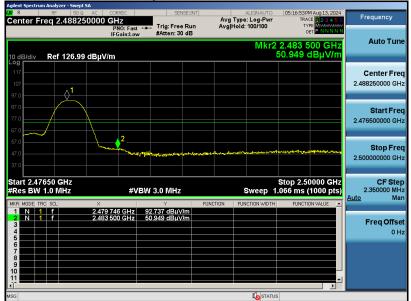

Test Graph for Average Measurement




RESULT: Pass



EUT Name	Bluetooth Headphone	Model Name	3304442
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

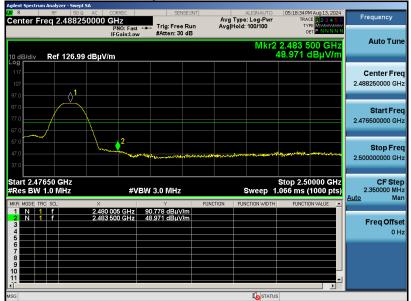

Test Graph for Average Measurement



RESULT: Pass



EUT Name	Bluetooth Headphone	Model Name	3304442
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement




RESULT: Pass




EUT Name	Bluetooth Headphone	Model Name	3304442
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 4	Antenna Polarity	Vertical

Test Graph for Peak Measurement

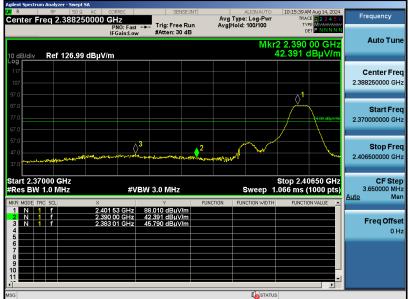

Test Graph for Average Measurement

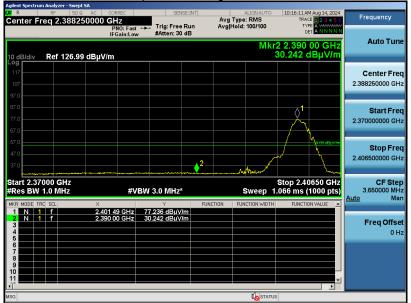


RESULT: Pass



EUT Name	Bluetooth Headphone	Model Name	3304442
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 6	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

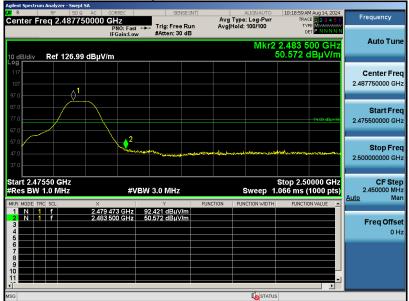

Test Graph for Average Measurement




RESULT: Pass



EUT Name	Bluetooth Headphone	Model Name	3304442
Temperature	25 ℃	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	DC 3.7V by battery
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement

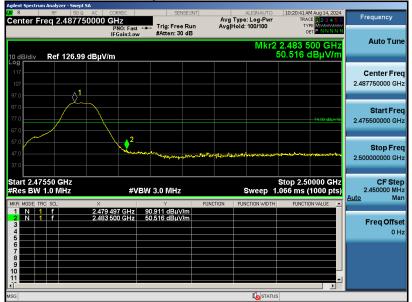

Test Graph for Average Measurement



<u>**RESULT: Pass</u>** Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.</u>



12. AC Power Line Conducted Emission Test

12.1 Measurement Limit


Framman	Maximum RF Line Voltage		
Frequency	Q.P. (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

12.2 Measurement Setup (Block Diagram of Configuration)

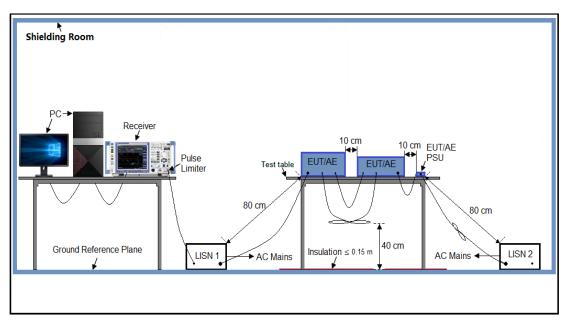



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

12.5 Measurement Results

N/A

Note: The BT function cannot transmit when charging



Report No.: AGC00429240803FR02 Page 68 of 68

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC00429240803AP01

Appendix II: Photographs of Test EUT

Refer to the Report No.: AGC00429240803AP02

-----End of Report-----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.