



FCC ID: RRK-ARSSA07
Report No.: T201202W01-RP

Page 1 / 116
Rev. 01

FCC 47 CFR PART 95 SUBPART M

TEST REPORT

For

Radar (UART), Radar (CAN)

Model: ARS-SA07

Trade Name: ALPHA

Issued to

Alpha Networks Inc.

No.8, Li-shing 7th Rd., Science-based Industrial Park, Hsinchu, 300, Taiwan

Issued by

Compliance Certification Services Inc.

Wugu Laboratory

**No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City, Taiwan. (R.O.C.)**

Issued Date: February 04, 2021

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com.tw/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com.tw/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of client's instruction, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T201202W01-RP

Page 2 / 116

Rev. 01

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	January 28, 2021	Initial Issue	ALL	Mita Wu
01	February 04, 2021	See the following note Rev.(01)	P.4, 7, 15-16, 23-24, 31-32, 52-59, 62-69, 72-79, 81-116	Mita Wu

Rev.(01)

1. Added standard ANSI C63.26:2015 and KDB 653005.
2. Modify test data in section 8.1 and 8.2.
3. Added test data for OBW in section 8.3



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	4
2. EUT DESCRIPTION.....	5
3. TEST SUMMARY	6
4. TEST METHODOLOGY.....	7
4.1 EUT CONFIGURATION	7
4.2 EUT EXERCISE	7
4.3 GENERAL TEST PROCEDURES.....	7
4.4 DESCRIPTION OF TEST MODES.....	8
5. INSTRUMENT CALIBRATION	9
5.1 MEASURING INSTRUMENT CALIBRATION	9
5.2 MEASUREMENT EQUIPMENT USED	9
5.3 MEASUREMENT UNCERTAINTY	11
6. FACILITIES AND ACCREDITATIONS	12
6.1 FACILITIES	12
6.2 EQUIPMENT	12
7. SETUP OF EQUIPMENT UNDER TEST	13
7.1 SETUP CONFIGURATION OF EUT	13
7.2 SUPPORT EQUIPMENT	13
8. TEST REQUIREMENTS	14
8.1 EQUIVALENT ISOTROPICALLY RADIATED POWER (EIRP).....	14
8.2 SPURIOUS EMISSIONS.....	39
8.3 FREQUENCY STABILITY	80
APPENDIX I PHOTOGRAPHS OF TEST SETUP.....	A-1
APPENDIX 1 - PHOTOGRAPHS OF EUT	

1. TEST RESULT CERTIFICATION

Applicant: Alpha Networks Inc.
No.8, Li-shing 7th Rd., Science-based Industrial Park, Hsinchu,
300, Taiwan

Manufacturer: Alpha Networks Inc.
No.8, Li-shing 7th Rd., Science-based Industrial Park, Hsinchu,
300, Taiwan

Equipment Under Test: Radar (UART), Radar (CAN)

Trade Name: ALPHA

Model: ARS-SA07

Date of Test: January 15 ~ February 03, 2021

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 95 Subpart M	No non-compliance noted
Statements of Conformity	
Determination of compliance is based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.	

We hereby certify that:

All test results conform to above mentioned standards.

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013, ANSI C63.26: 2015 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 95.3367 and 95.3379 and FCC KDB 653005 D01.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:



Kevin Tsai
Deputy Manager

2. EUT DESCRIPTION

Product	Radar (UART), Radar (CAN)
Trade Name	ALPHA
Model Number	ARS-SA07
Model Discrepancy	In the PCB port part, there are two interfaces, UART and CAN, according to the interface of different cars. The difference on the motherboard is only that CAN has 1 IC and 2 Components. Difference of the model numbers (list on this report) is just for marketing purpose only.
Received Date	December 02, 2020
Power Supply	Power from host device. (DC 12V)
Frequency Band	77.1 ~ 80.88 GHz
Modulation	FMCW
Number of Channel	1
Antenna Designation	Patch antenna / Gain:12.71dBi
Temperature Range	-40°C to +85 °C

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. Disclaimer: Antenna information is provided by the applicant, test results of this report are applicable to the sample EUT received.
3. Disclaimer: The variant model numbers / trademarks are assessed as identical in hardware and software to each other, hence all variants are fully covered by the test results in this test report without further verification test.

3. TEST SUMMARY

Report Section	FCC Standard Section	Test Item	Result
8.1	95.3367	Equivalent Isotropically Radiated Power (EIRP)	Pass
8.2	95.3379(a)	Radiated spurious emissions	Pass
8.3	95.3379(b)	Frequency stability	Pass

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013, ANSI 63.4 2014, ANSI C63.26:2015 and FCC CFR 47 Part 95.3367, 95.3379, FCC KDB 653005 D01.

4.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

4.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in ANSI C63.10: 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2013.

4.4 DESCRIPTION OF TEST MODES

The EUT (model: ARS-SA07) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed. The worst case data rate is determined as the data rate with highest output power.

The product does not transmits in stop condition.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

Radiated Emission Measurement Above 1G	
Test Condition	Radiated Emission Above 1G
Power supply Mode	Mode 1: EUT power by DC 12V (UART) Mode 2: EUT power by DC 12V (CAN)
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☐ Placed in fixed position at X-Plane (E2-Plane) ☐ Placed in fixed position at Y-Plane (E1-Plane) ☒ Placed in fixed position at Z-Plane (H-Plane)

Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Power supply Mode	Mode 1: EUT power by DC 12V (UART) Mode 2: EUT power by DC 12V (CAN)
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in axis Y and two polarity, for radiated measurement. The worst case(Z-Plane) were recorded in this report

5. INSTRUMENT CALIBRATION

5.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

5.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal Due
Coaxial Cable	Woken	WC12	CC001	06/29/2020	06/28/2021
Coaxial Cable	Woken	WC12	CC003	06/29/2020	06/28/2021
Horn Antenna / Harmonic Mixer	ROHDE&SCHWARZ	FH-PP-110 / FS-Z110	10003 / 100096	12/09/2019	12/08/2021
Horn Antenna / Harmonic Mixer	A-INFOMW / ROHDE&SCHWARZ	LB-19-20-A / FS-Z60	J202020872 / 100142	12/09/2019	12/08/2021
Horn Antenna / Harmonic Mixer	ROHDE&SCHWARZ	FH-PP-75 / FS-Z75	10001 / 100162	12/09/2019	12/08/2021
Signal Analyzer	R&S	FSV 40	101073	09/17/2020	09/16/2021
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	09/24/2020	09/23/2021
Software	N/A				

3M 966 Chamber Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Cal Date	Cal Due
Band Reject Filters	MICRO TRONICS	BRM 50702	120	02/25/2020	02/24/2021
Bilog Antenna	Sunol Sciences	JB3	A030105	07/24/2020	07/23/2021
Coaxial Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	02/25/2020	02/24/2021
Coaxial Cable	EMCI	EMC105	190914+327 109/4	09/19/2020	09/18/2021
Horn Antenna / Harmonic Mixer	ROHDE&SCHWARZ	FH-PP-110 / FS-Z110	10003 / 100096	12/09/2019	12/08/2021
Horn Antenna / Harmonic Mixer	A-INFOMW / ROHDE&SCHWARZ	LB-19-20-A / FS-Z60	J202020872 / 100142	12/09/2019	12/08/2021
Horn Antenna / Harmonic Mixer	ROHDE&SCHWARZ	FH-PP-75 / FS-Z75	10001 / 100162	12/09/2019	12/08/2021
Horn Antenna / Spectrum Analyzer Mixer	Radiometer Physics GmbH	FH-PP-170 / SAM-170	10003 / 20011	12/09/2019	12/08/2021
Horn Antenna / Spectrum Analyzer Mixer	Radiometer Physics GmbH	FH-PP-220 / SAM-220	10003 / 20013	12/09/2019	12/08/2021
Digital Thermo-Hygro Meter	WISEWIND	1206	D07	01/06/2021	01/05/2022
double Ridged Guide Horn Antenna	ETC	MCTD 1209	DRH13M02003	09/30/2020	09/29/2021
Coaxial Cable	Woken	WC12	CC001	06/29/2020	06/28/2021
Coaxial Cable	Woken	WC12	CC003	06/29/2020	06/28/2021
Signal Analyzer	R&S	FSV 40	101073	09/17/2020	09/16/2021
K Type Cable	Huber+Suhner	SUCOFLEX 102	29406/2	12/09/2020	12/08/2021
K Type Cable	Huber+Suhner	SUCOFLEX 102	22470/2	12/09/2020	12/08/2021
Loop Ant	COM-POWER	AL-130	121051	03/27/2020	03/26/2021
Pre-Amplifier	EMEC	EM330	060609	02/25/2020	02/24/2021
Pre-Amplifier	EMEC	EM01G26G	060570	06/29/2020	06/28/2021
Pre-Amplifier	MITEQ	AMF-6F-18004000-37-8P	985646	09/02/2020	09/01/2021
PSA Series Spectrum Analyzer	Agilent	E4446A	MY46180323	07/24/2020	07/23/2021
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Software	e3 6.11-20180413				

5.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 6dB bandwidth	+/- 0.0014
RF output power, conducted	+/- 1.14
Power density, conducted	+/- 1.40
3M Semi Anechoic Chamber / 30M~200M	+/- 4.12
3M Semi Anechoic Chamber / 200M~1000M	+/- 4.68
3M Semi Anechoic Chamber / 1G~8G	+/- 5.18
3M Semi Anechoic Chamber / 8G~18G	+/- 5.47
3M Semi Anechoic Chamber / 18G~26G	+/- 3.81
3M Semi Anechoic Chamber / 26G~40G	+/- 3.87
3M Semi Anechoic Chamber / 40G~60G	+/- 4.62
3M Semi Anechoic Chamber / 60G~75G	+/- 3.59
3M Semi Anechoic Chamber / 75G~110G	+/- 4.34
3M Semi Anechoic Chamber / 110G~170G	+/- 4.67
3M Semi Anechoic Chamber / 170G~220G	+/- 5.01
3M Semi Anechoic Chamber / 220G~325G	+/- 5.88

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

6. FACILITIES AND ACCREDITATIONS

6.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Dist., New Taipei City, Taiwan. (R.O.C.)

Tel: 886-2-2299-9720 / Fax: 886-2-2299-9721

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

6.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



Report No.: T201202W01-RP

Page 13 / 116
Rev. 01

7. SETUP OF EQUIPMENT UNDER TEST

7.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

7.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1.	NB(J)	TOSHIBA	PT345T-00L002	N/A	PD97260H

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8. TEST REQUIREMENTS

8.1 EQUIVALENT ISOTROPICALLY RADIATED POWER (EIRP)

LIMIT


The fundamental radiated emission limits within the 76-81 GHz band are expressed in terms of Equivalent Isotropically Radiated Power (EIRP) and are as follows:

According to FCC 95.3367.

The maximum power (EIRP) within the 76-81 GHz band shall not exceed 50 dBm based on measurements employing a power averaging detector with a 1 MHz Resolution Bandwidth (RBW).

The maximum peak power (EIRP) within the 76-81 GHz band shall not exceed 55 dBm based on measurements employing a peak detector with a 1 MHz RBW.

Test Configuration



TEST RESULTS

No non-compliance noted.

240MHz**Temperature:** 16.9°C**Test date:** January 15, 2021**Humidity:** 59% RH**Tested by:** Jerry Chang

25°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1158	51.04	46.28	1	97.32	-7.48	50	RMS

-40°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1252	49.22	46.28	1	95.50	-9.30	50	RMS

85°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1252	49.41	46.28	1	95.69	-9.11	50	RMS

25°C / 13.8V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1158	49.41	46.28	1	95.69	-9.11	50	RMS

25°C / 10.2V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1252	49.86	46.28	1	96.14	-8.66	50	RMS

*dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)



Report No.: T201202W01-RP

Page 16 / 116

Rev. 01

Temperature: 16.9°C

Test date: January 15, 2021

Humidity: 59% RH

Tested by: Jerry Chang

25°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.144	81.93	46.28	1	128.21	23.41	55	Peak

-40°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1346	81.41	46.28	1	127.69	22.89	55	Peak

85°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1158	81.52	46.28	1	127.80	23.00	55	Peak

25°C / 13.8V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1252	80.68	46.28	1	126.96	22.16	55	Peak

25°C / 10.2V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1064	80.34	46.28	1	126.62	21.82	55	Peak

*dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)



Report No.: T201202W01-RP

Page 17 / 116


Rev. 01

Test Data

240MHz


Peak Power

25°C / 12V

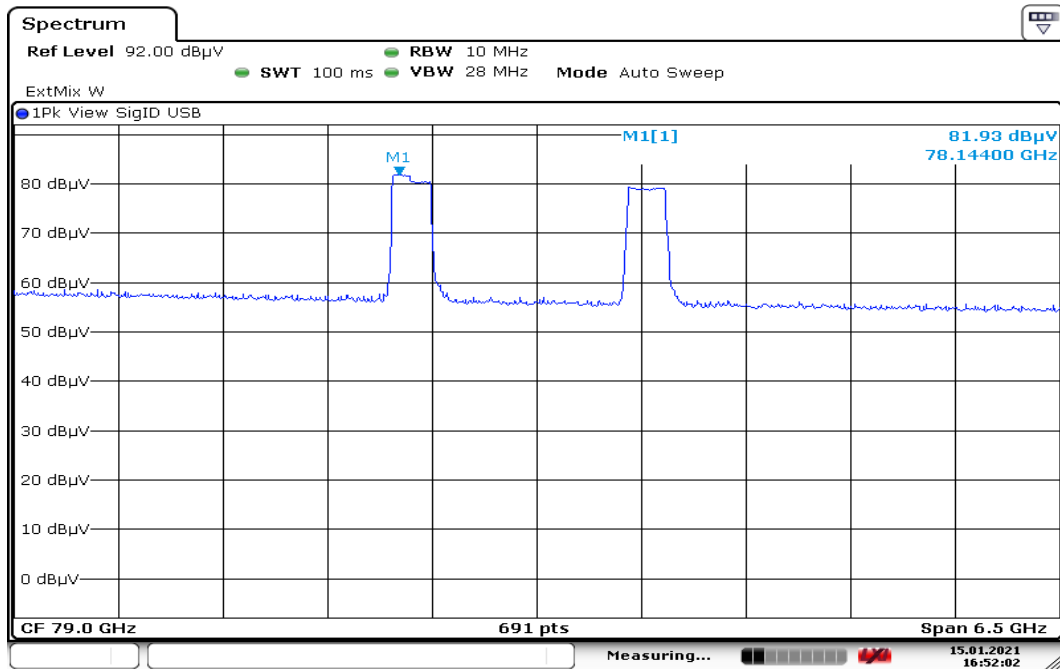


Date: 15.JAN.2021 16:52:02

-40°C / 12V

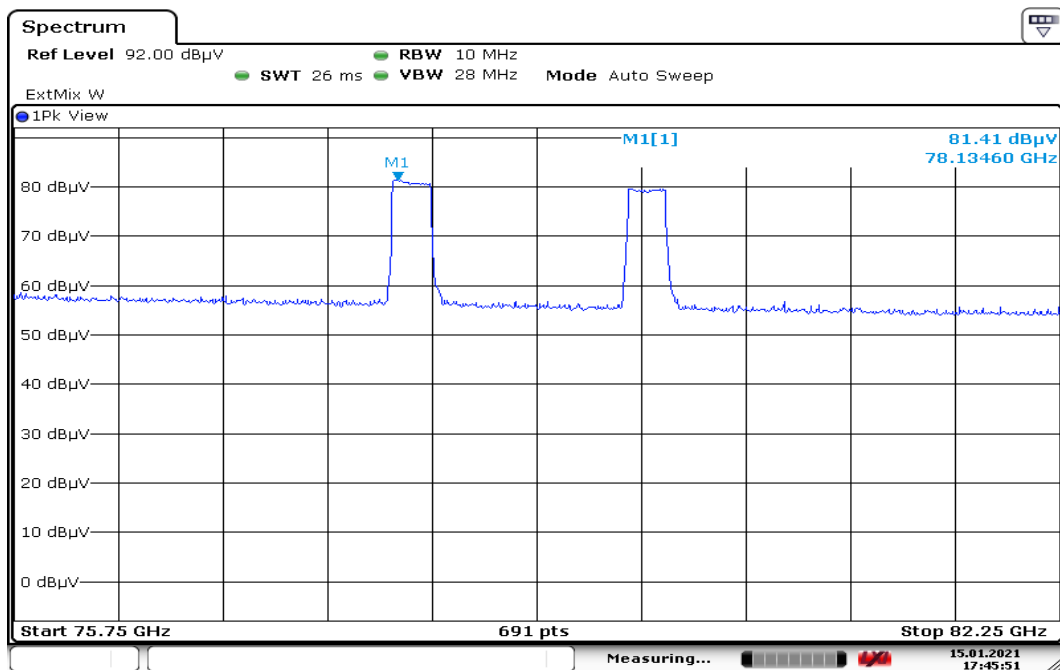


Date: 15.JAN.2021 17:45:52

85°C / 12V

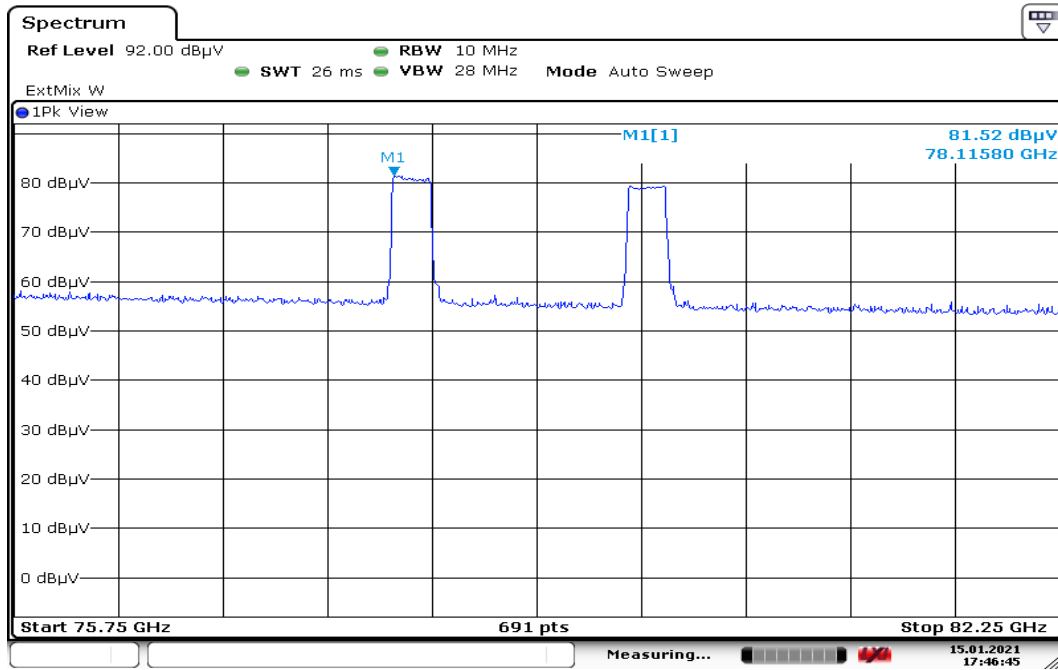

Date: 15.JAN.2021 17:46:46

25°C / 13.8V

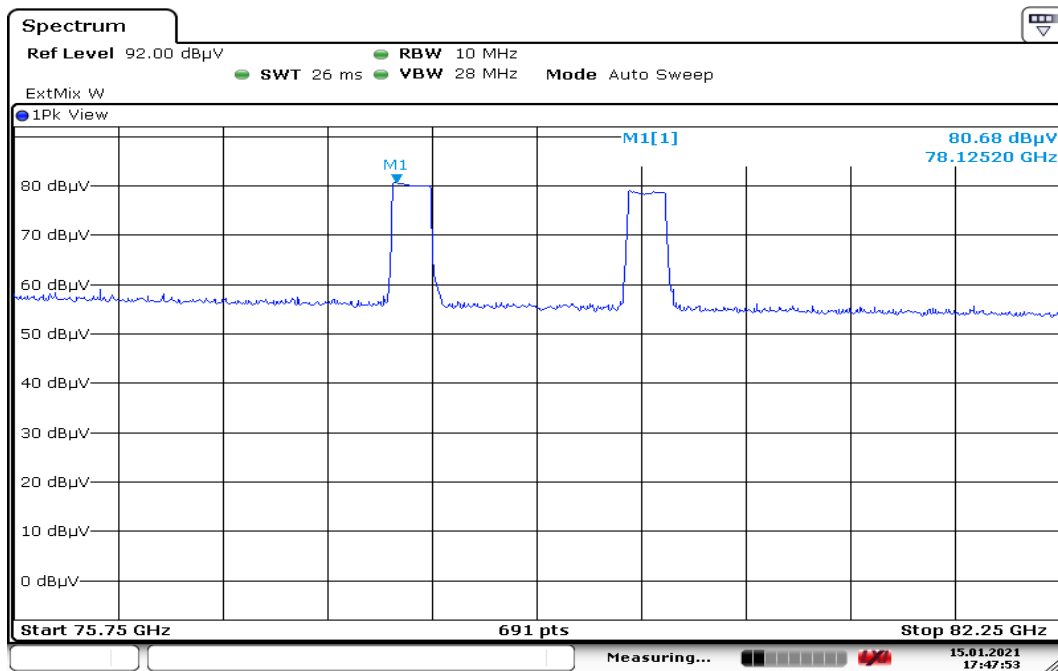

Date: 15.JAN.2021 17:47:53




Report No.: T201202W01-RP

Page 19 / 116

Rev. 01


25°C / 10.2V

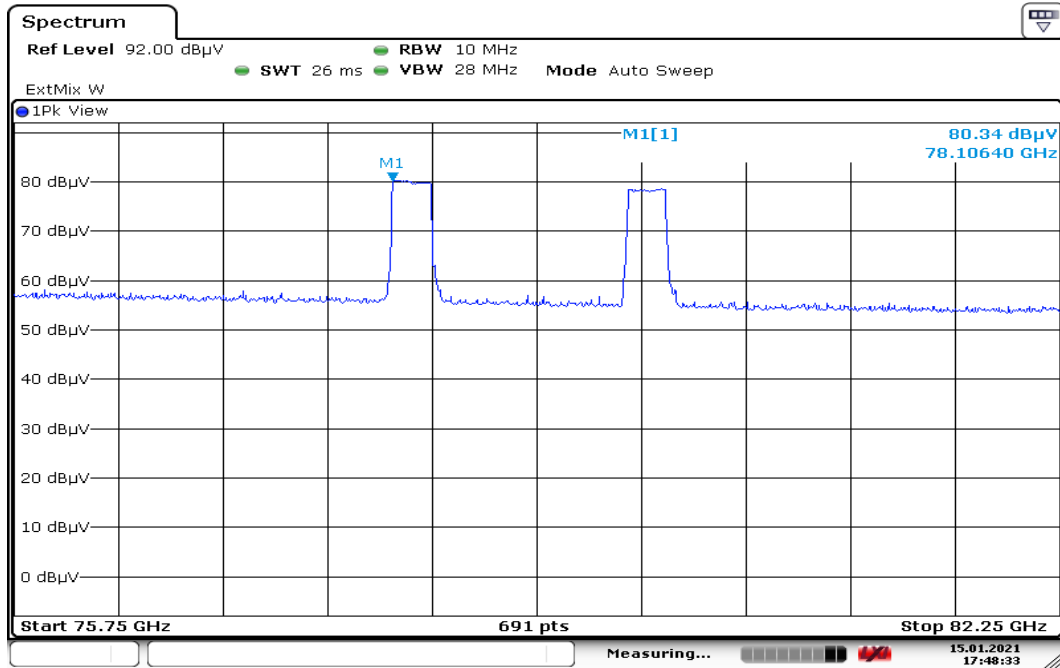

Date: 15.JAN.2021 17:48:33


Average Power

25°C / 12V

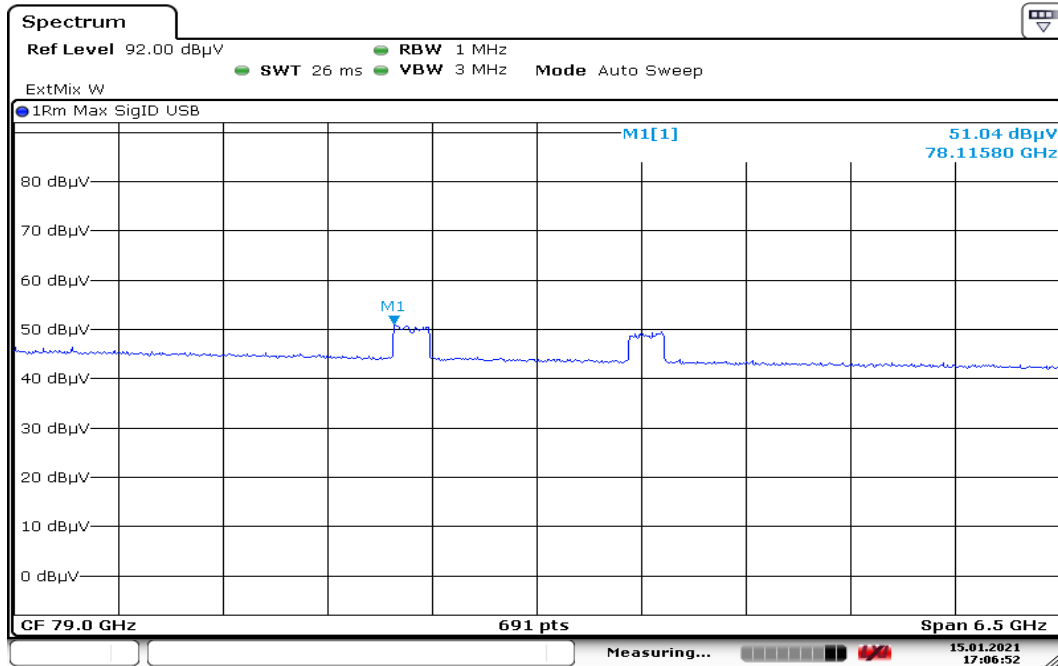


Date: 15.JAN.2021 17:06:52

-40°C / 12V

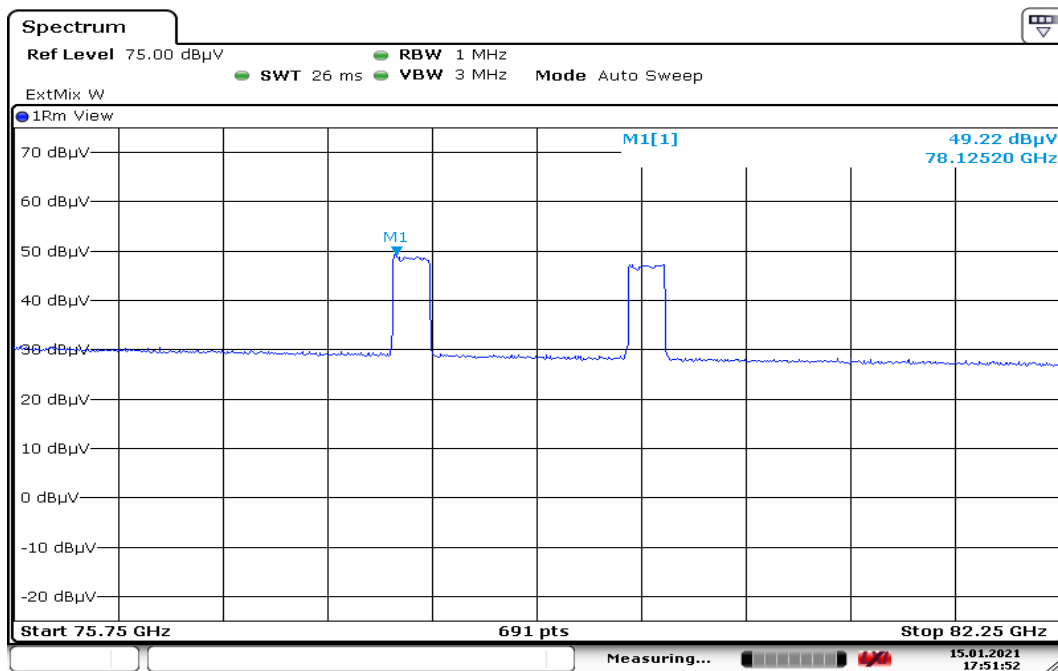


Date: 15.JAN.2021 17:51:52

85°C / 12V

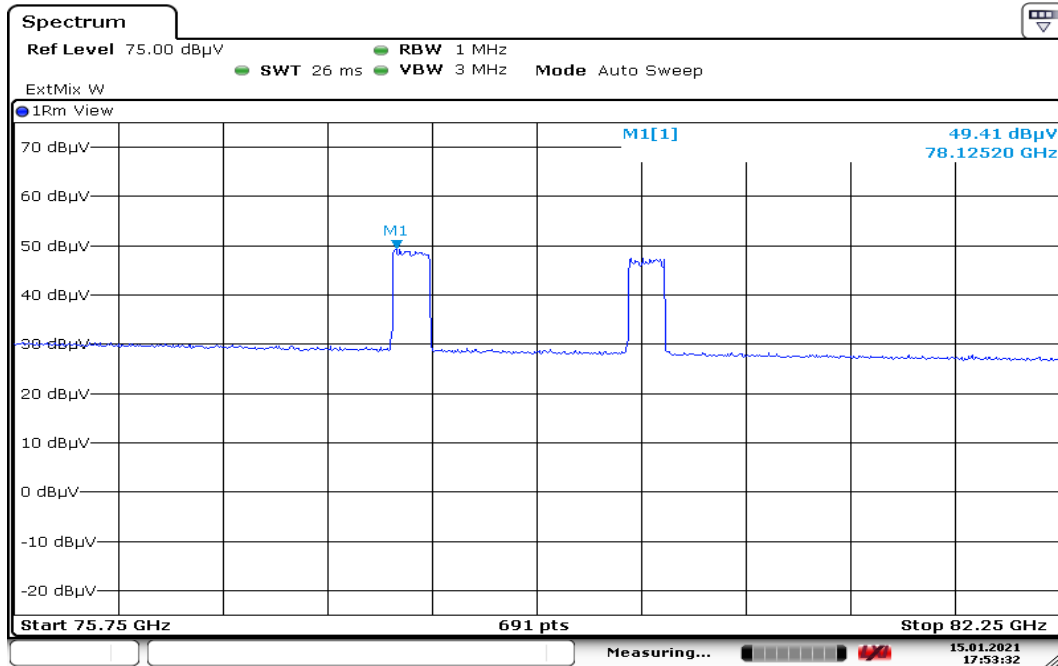

Date: 15.JAN.2021 17:53:32

25°C / 13.8V

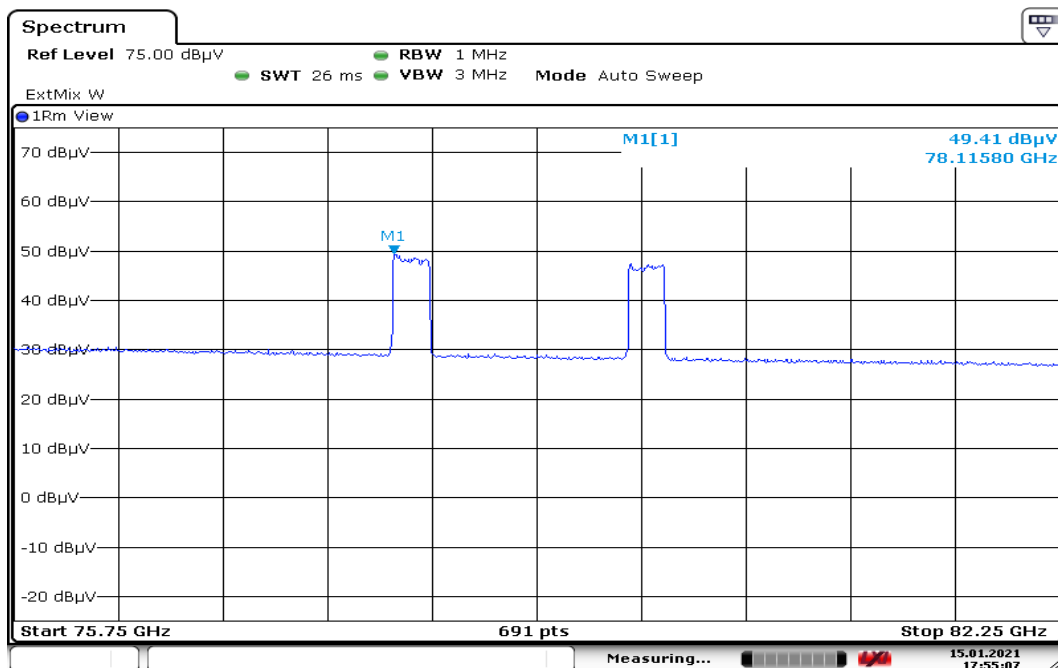


Date: 15.JAN.2021 17:55:08



Report No.: T201202W01-RP

Page 22 / 116
Rev. 01

25°C / 10.2V

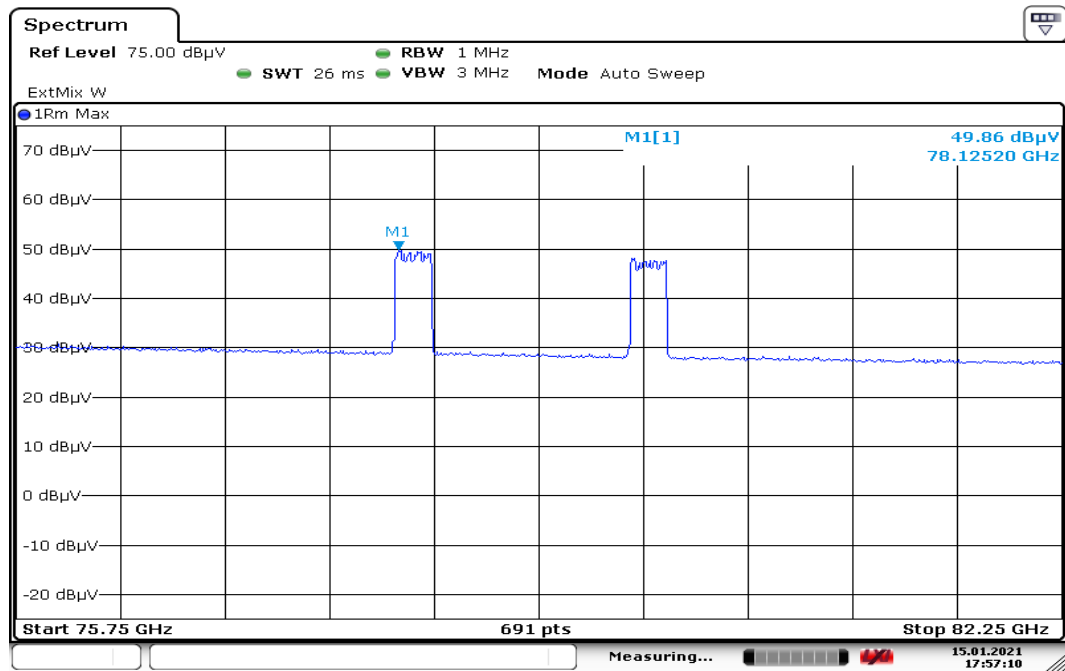

Date: 15.JAN.2021 17:57:10

480MHz**Temperature:** 16.9°C**Test date:** January 15, 2021**Humidity:** 59% RH**Tested by:** Jerry Chang

25°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.2569	45.04	46.29	1	91.33	-13.47	50	RMS

-40°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.2663	45.03	46.29	1	91.32	-13.48	50	RMS

85°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1252	45.83	46.28	1	92.11	-12.69	50	RMS

25°C / 13.8V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.2004	44.04	46.28	1	90.32	-14.48	50	RMS

25°C / 10.2V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1252	44.5	46.28	1	90.78	-14.02	50	RMS

*dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

Temperature: 16.9°C

Test date: January 15, 2021

Humidity: 59% RH

Tested by: Jerry Chang

25°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1158	80.57	46.28	1	126.85	22.05	55	Peak


-40°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1252	79.99	46.28	1	126.27	21.47	55	Peak

85°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1158	80.04	46.28	1	126.32	21.52	55	Peak


25°C / 13.8V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1722	79.27	46.28	1	125.55	20.75	55	Peak

25°C / 10.2V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1252	80.1	46.28	1	126.38	21.58	55	Peak

*dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

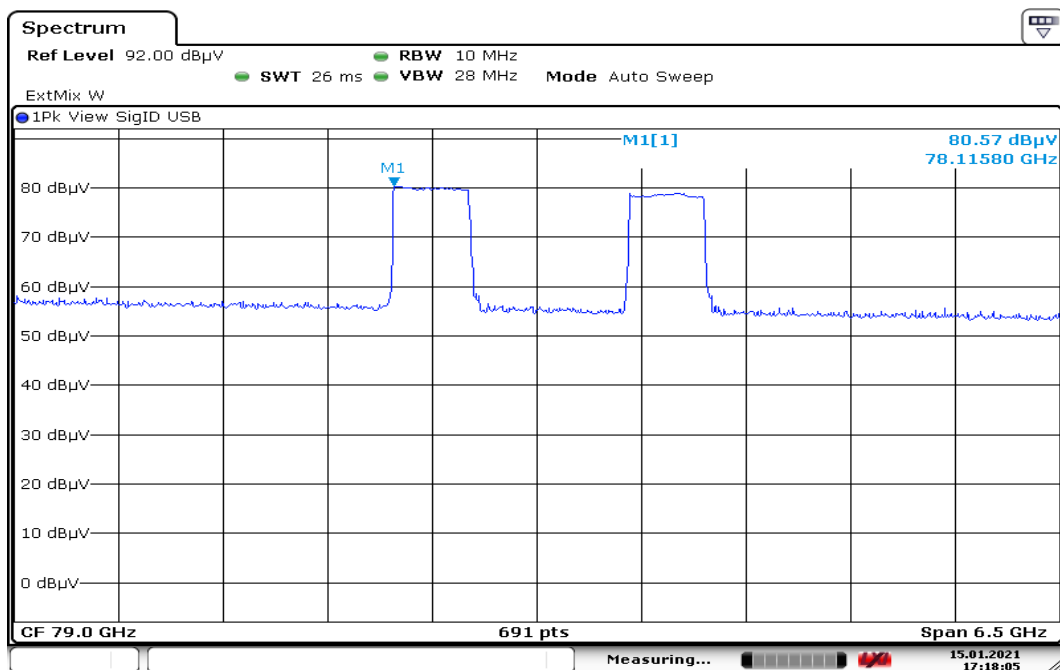
Test Data**480MHz****Peak Power****25°C / 12V**

Date: 15.JAN.2021 17:18:06

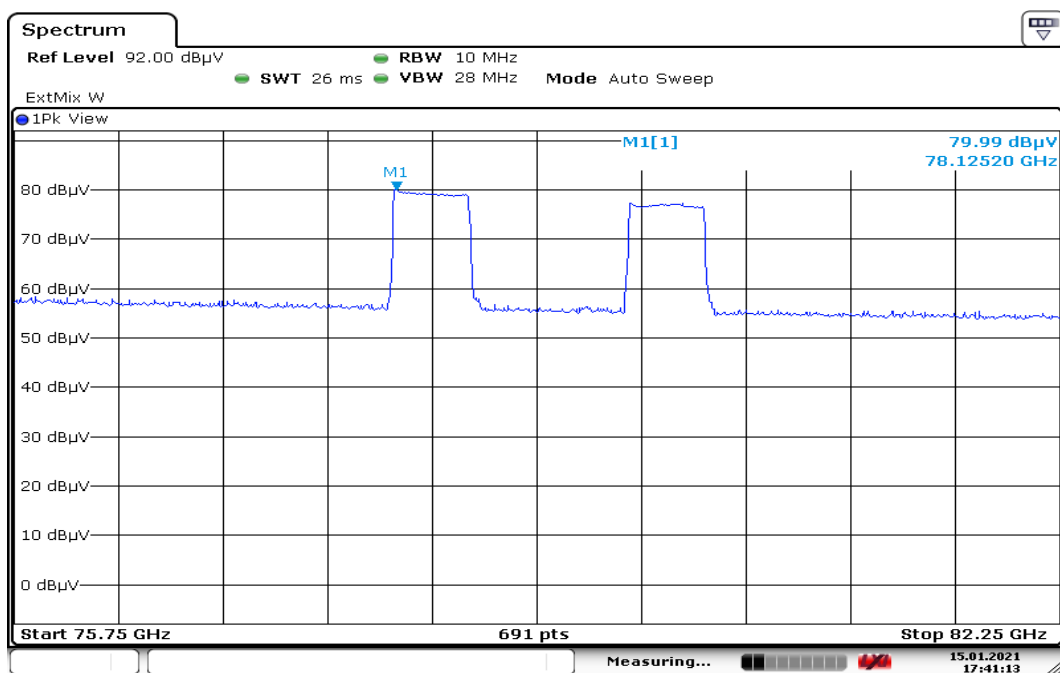-40°C / 12V


Date: 15.JAN.2021 17:41:13

85°C / 12V

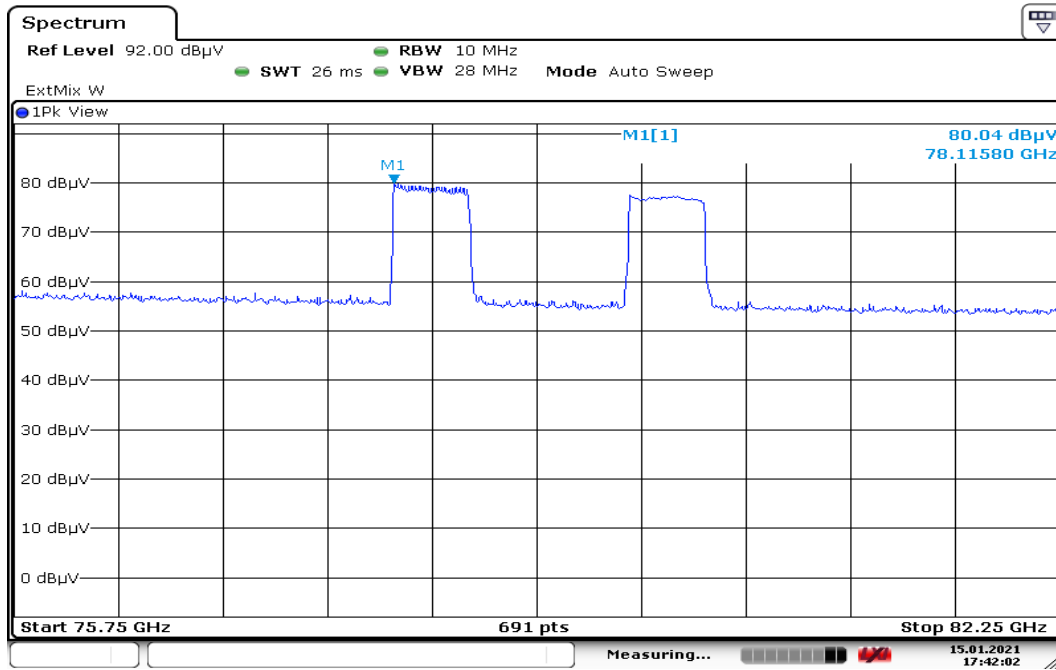

Date: 15.JAN.2021 17:42:02

25°C / 13.8V

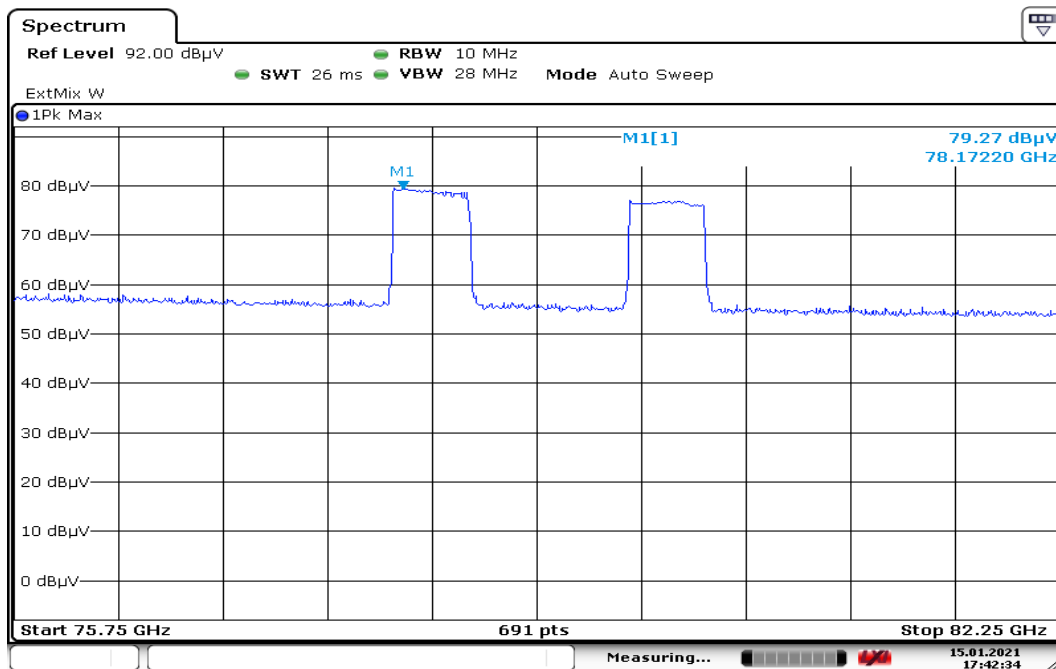


Date: 15.JAN.2021 17:42:35



Report No.: T201202W01-RP

Page 27 / 116
Rev. 01


25°C / 10.2V

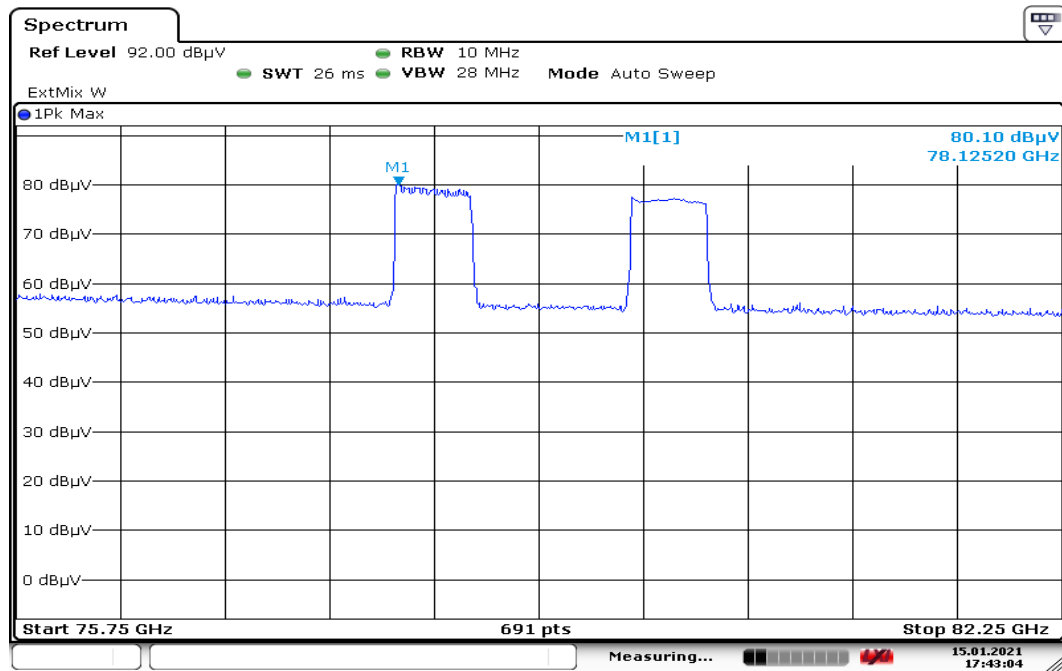

Date: 15.JAN.2021 17:43:04


Average Power

25°C / 12V

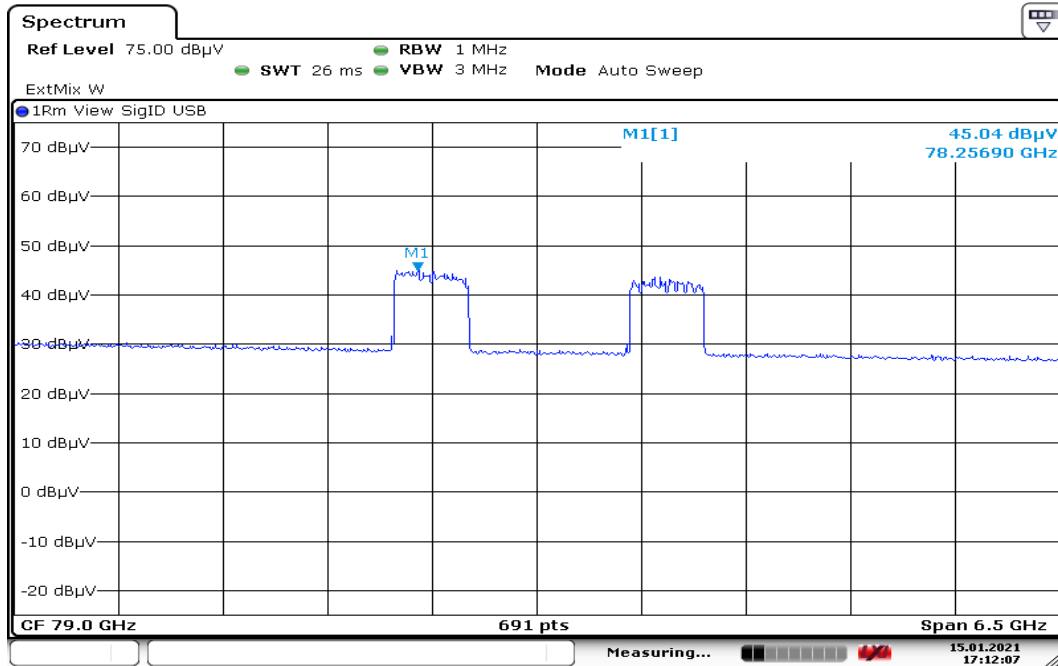


Date: 15.JAN.2021 17:12:07

-40°C / 12V

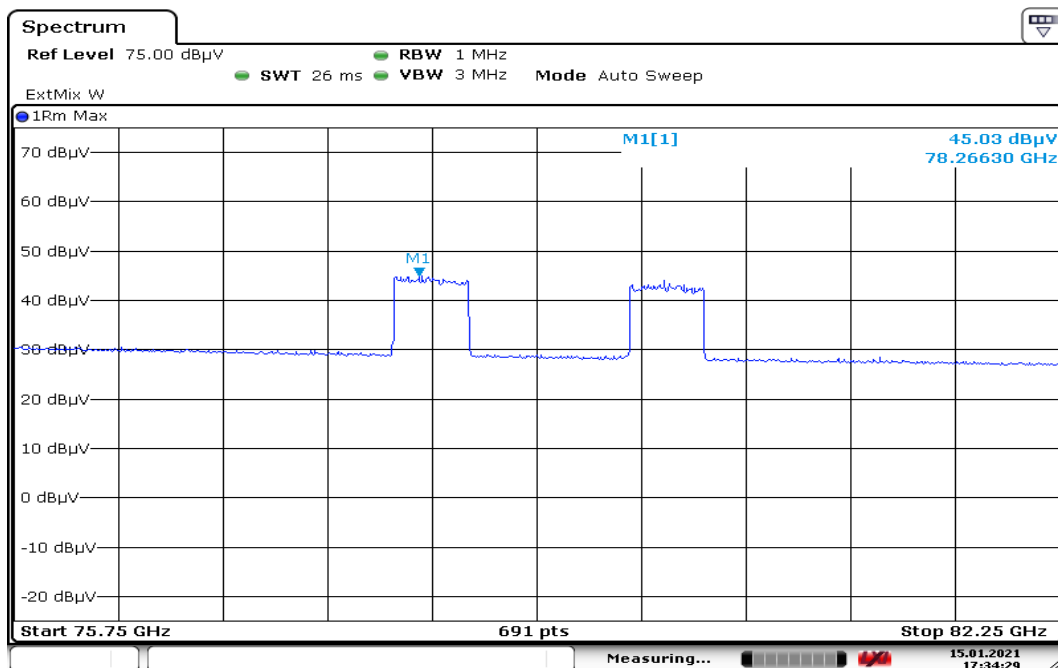


Date: 15.JAN.2021 17:34:30

85°C / 12V

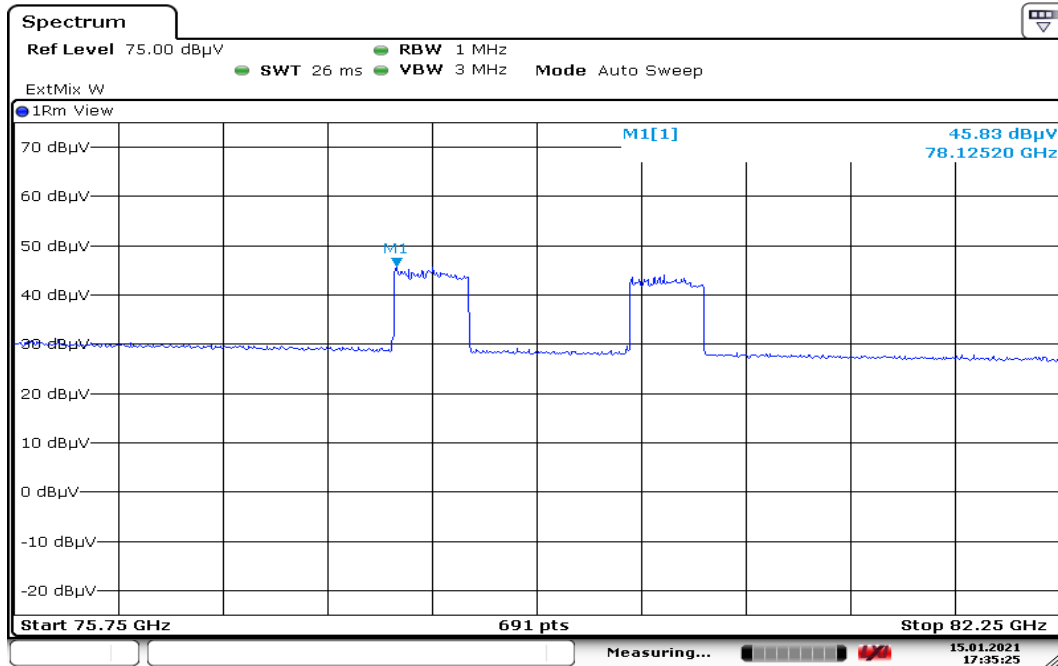

Date: 15.JAN.2021 17:35:26

25°C / 13.8V

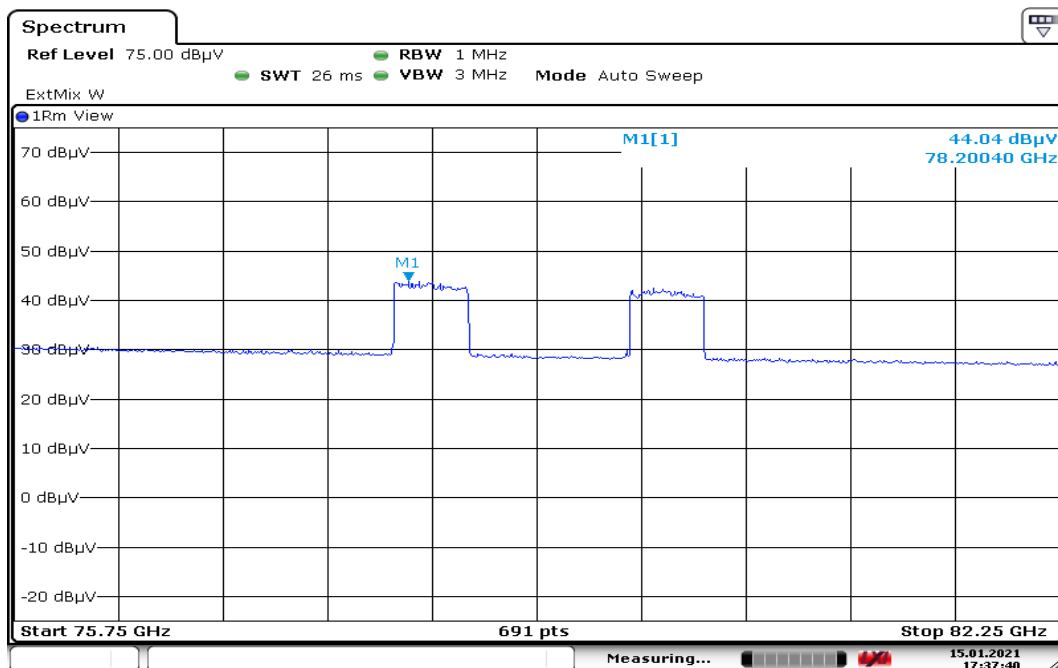


Date: 15.JAN.2021 17:37:41



Report No.: T201202W01-RP

Page 30 / 116
Rev. 01

25°C / 10.2V

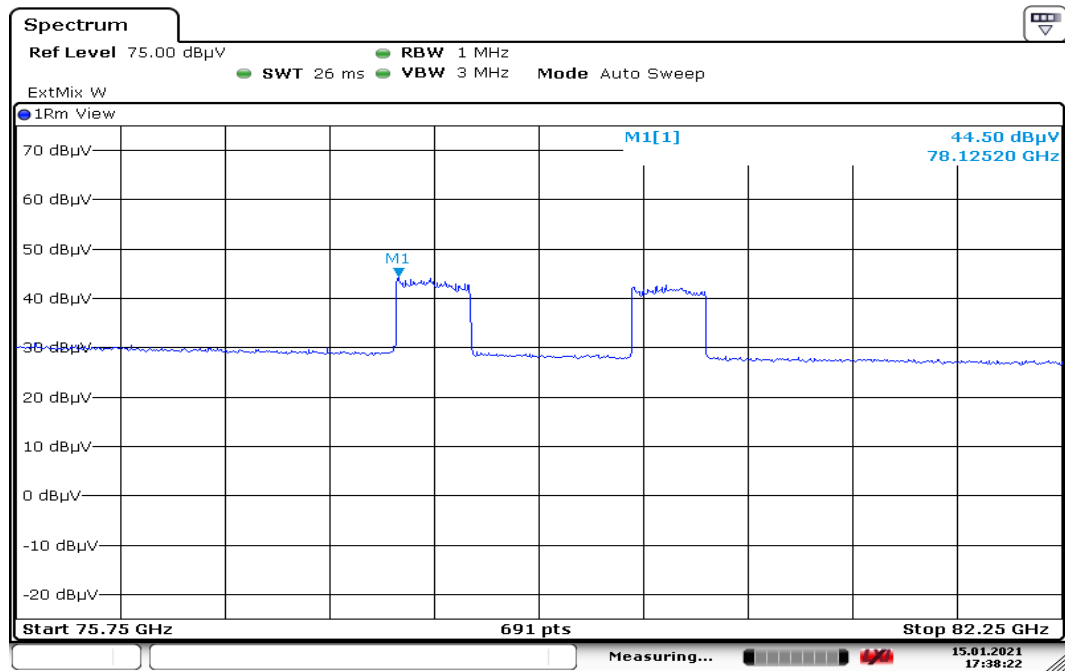

Date: 15.JAN.2021 17:38:22

1680MHz**Temperature:** 16.9°C**Test date:** January 15, 2021**Humidity:** 59% RH**Tested by:** Jerry Chang

25°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.3509	41.35	46.30	1	87.65	-17.15	50	RMS

-40°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.6802	40.94	46.33	1	87.27	-17.53	50	RMS

85°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
79.7243	40.85	46.42	1	87.27	-17.53	50	RMS

25°C / 13.8V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
79.7619	41.86	46.42	1	88.28	-16.52	50	RMS

25°C / 10.2V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
79.6114	41.05	46.41	1	87.46	-17.34	50	RMS

*dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

Temperature: 16.9°C

Test date: January 15, 2021

Humidity: 59% RH

Tested by: Jerry Chang

25°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.144	80.77	46.28	1	127.05	22.25	55	Peak


-40°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.2287	80.45	46.29	1	126.74	21.94	55	Peak

85°C / 12V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1346	80.44	46.28	1	126.72	21.92	55	Peak


25°C / 13.8V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.1816	79.89	46.28	1	126.17	21.37	55	Peak

25°C / 10.2V							
Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	E.I.R.P. (dBm)	Limit (dBm)	Detector
78.3603	80.49	46.30	1	126.79	21.99	55	Peak

*dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

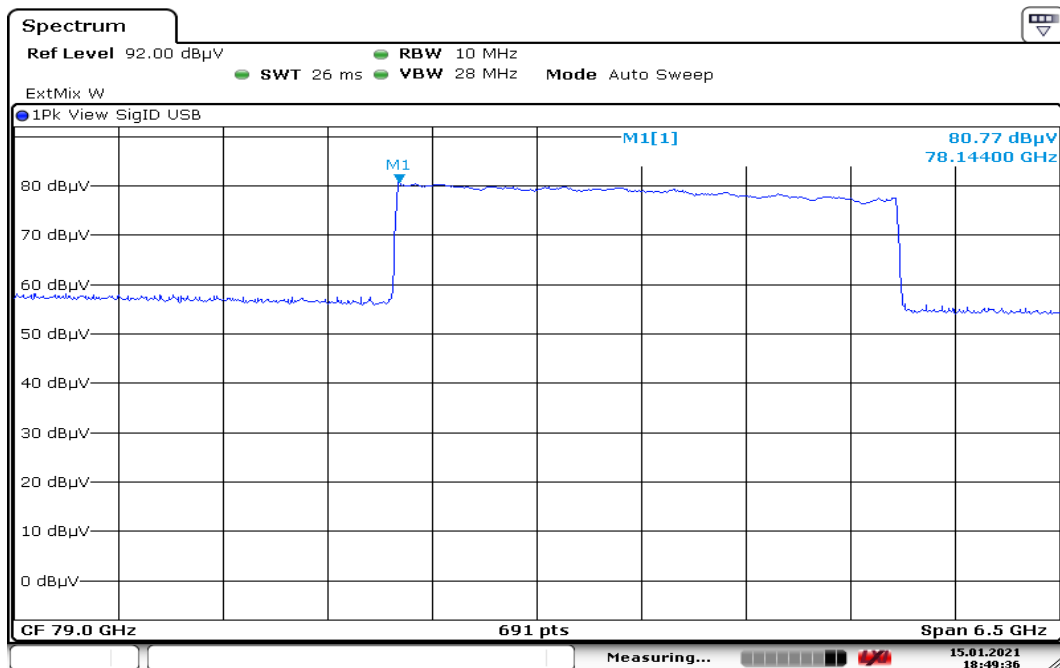Test Data**1680MHz****Peak Power****25°C / 12V**

Date: 15.JAN.2021 18:49:36

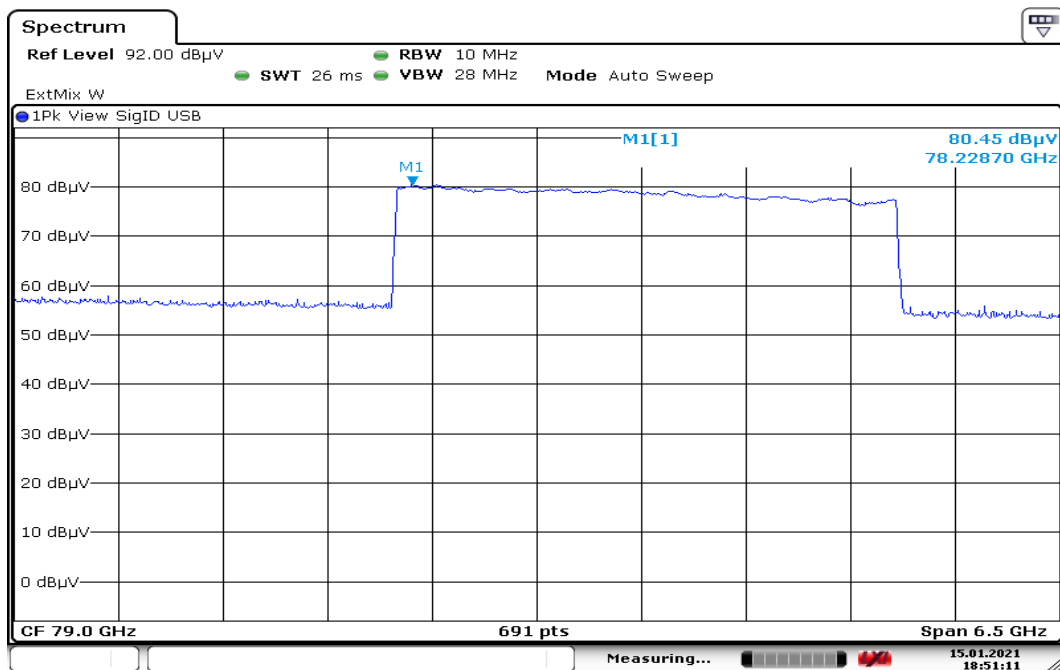-40°C / 12V


Date: 15.JAN.2021 18:51:11



Report No.: T201202W01-RP


Page 34 / 116
Rev. 01

85°C / 12V

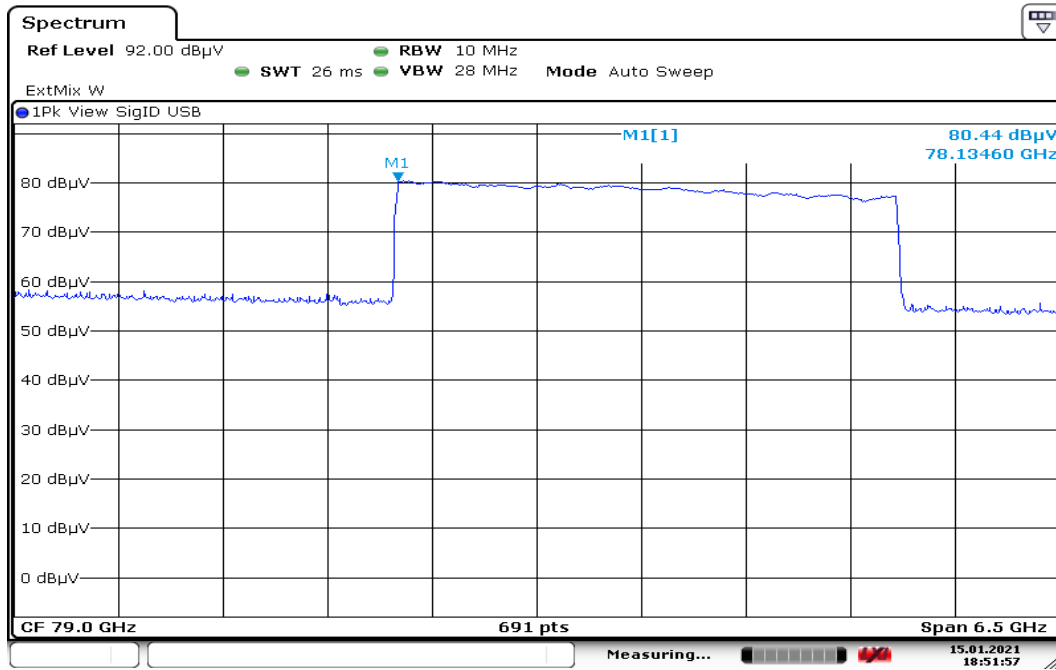


Date: 15.JAN.2021 18:51:57

25°C / 13.8V

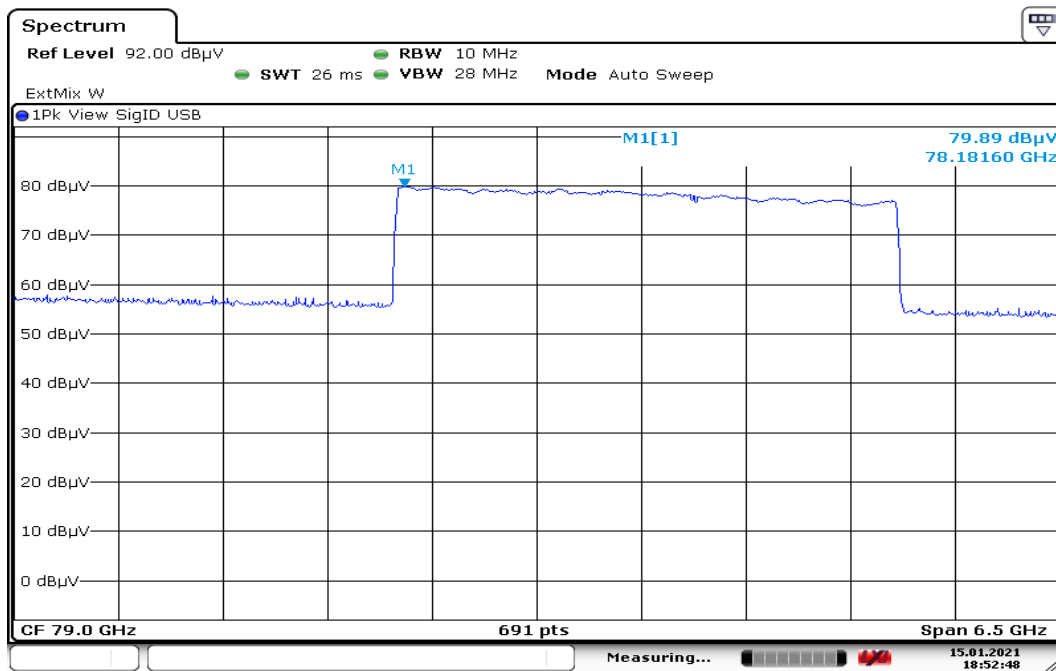

Date: 15.JAN.2021 18:52:48

25°C / 10.2V

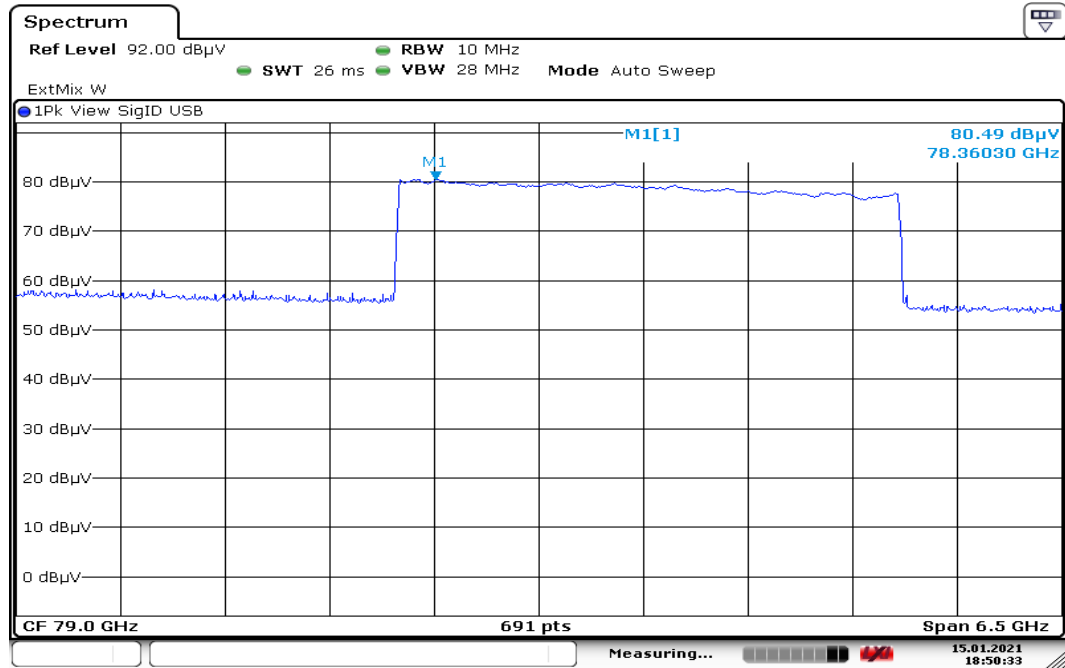

Date: 15.JAN.2021 18:50:34




Report No.: T201202W01-RP

Page 36 / 116
Rev. 01


Average Power

25°C / 12V

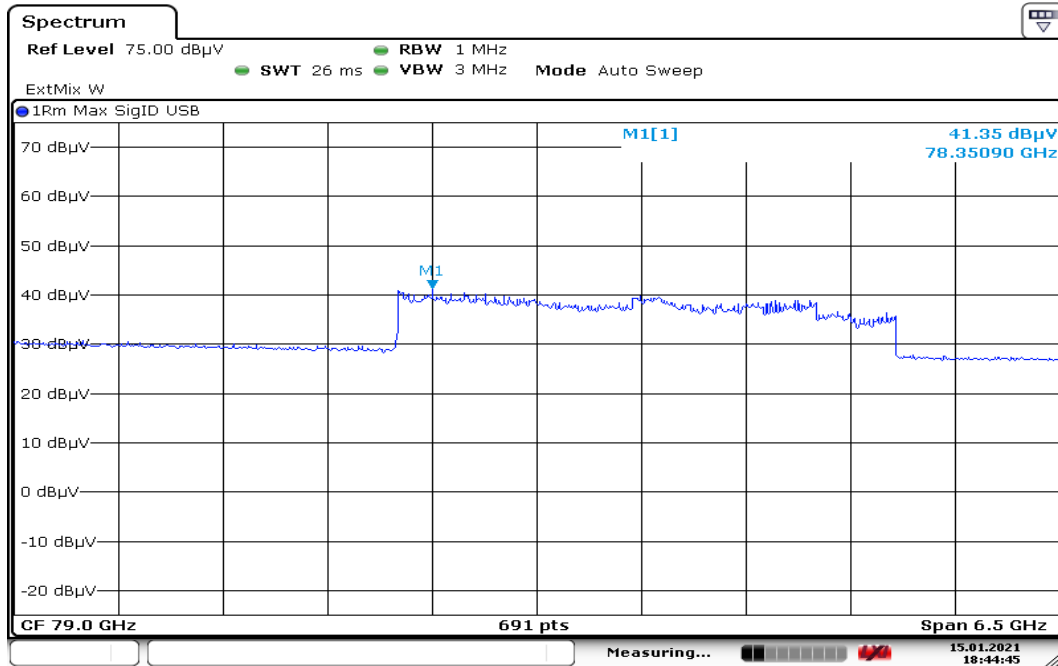

Date: 15.JAN.2021 18:44:45

-40°C / 12V

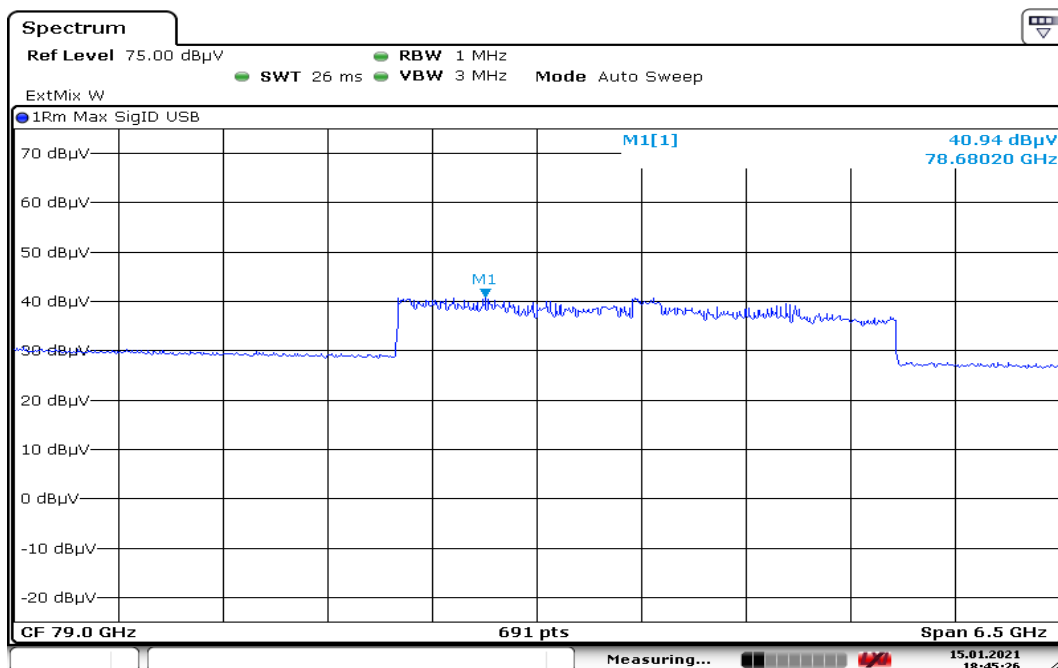


Date: 15.JAN.2021 18:45:26



Report No.: T201202W01-RP


Page 37 / 116
Rev. 01

85°C / 12V

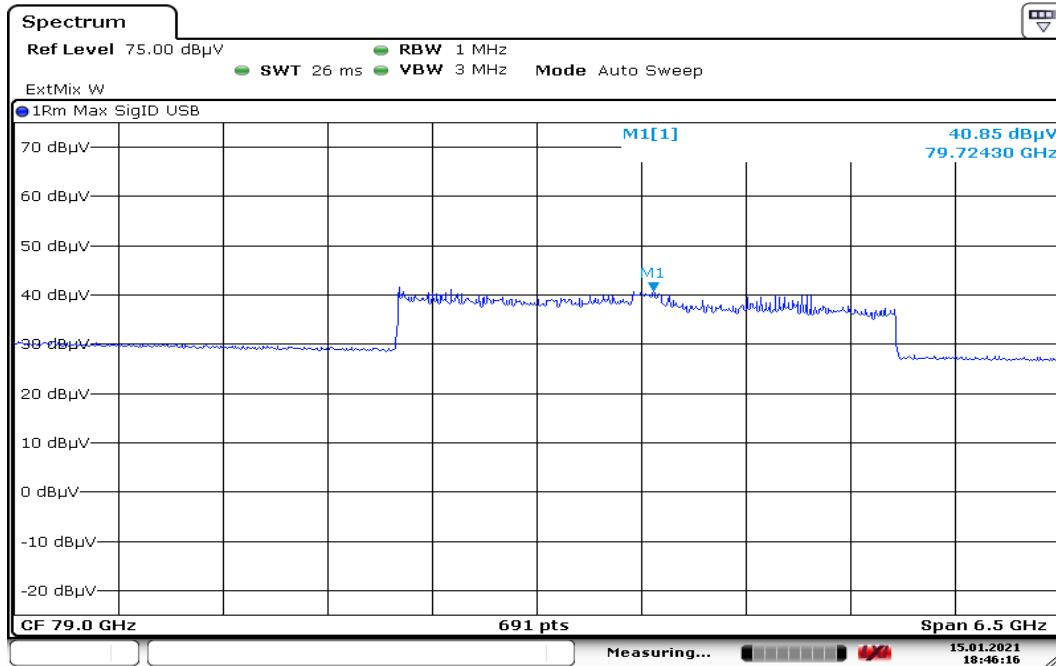

Date: 15.JAN.2021 18:46:17

25°C / 13.8V

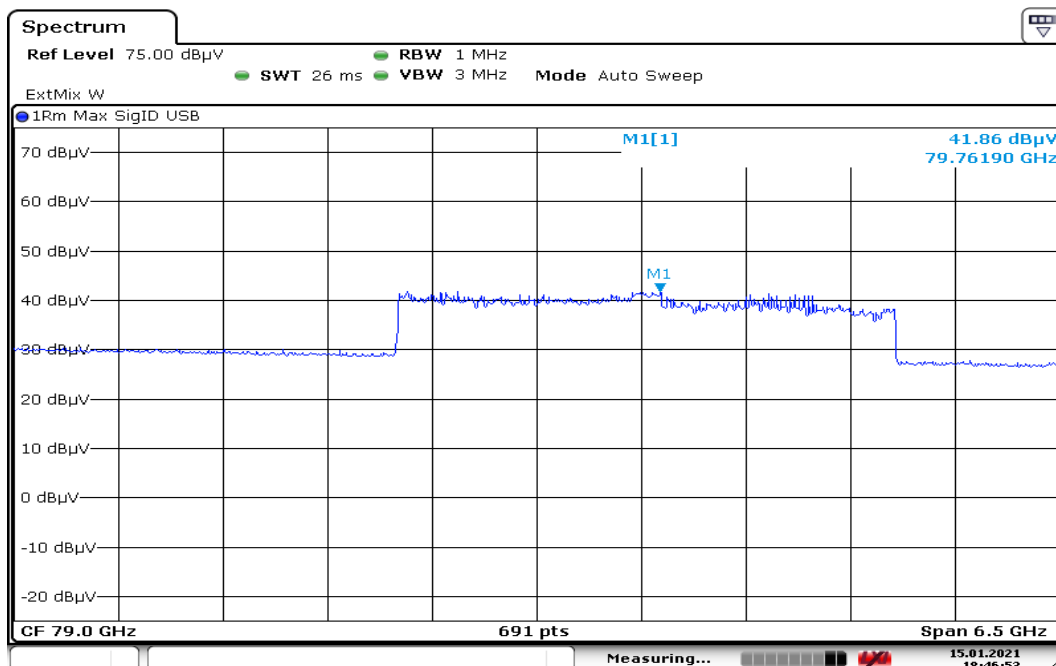


Date: 15.JAN.2021 18:46:54



Report No.: T201202W01-RP

Page 38 / 116
Rev. 01

25°C / 10.2V

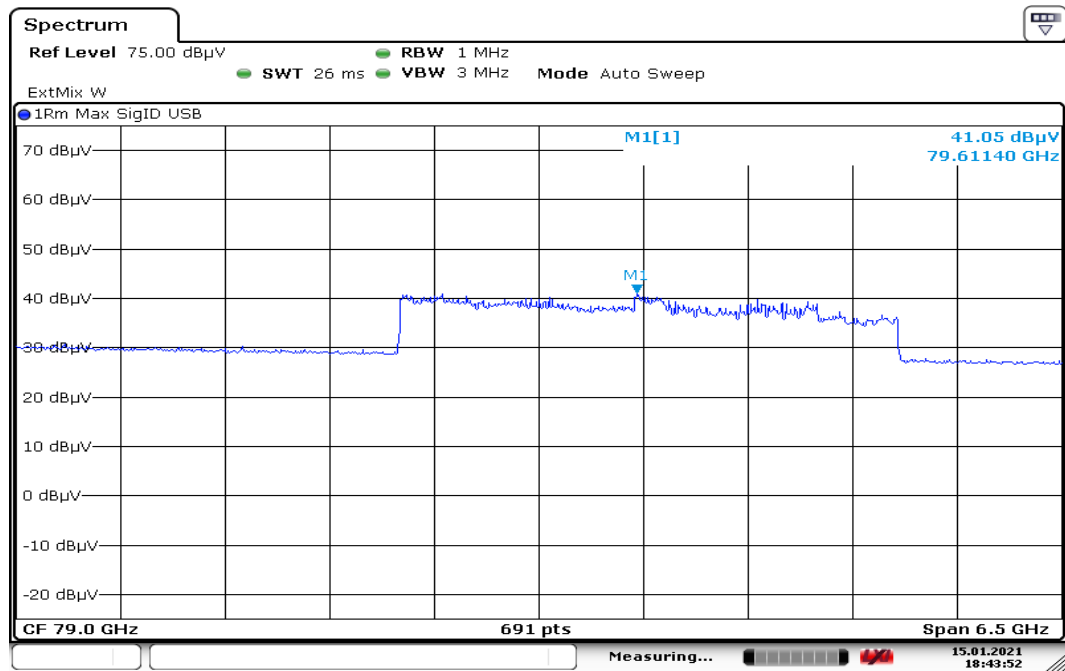

Date: 15.JAN.2021 18:43:53

8.2 SPURIOUS EMISSIONS

8.2.1 Radiated Emissions

LIMIT

1. According to FCC PART 95.3379(a), Radiated emissions below 40 GHz shall not exceed the field strength as shown in the following emissions table.

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

2. For radiated emissions outside the 76-81 GHz band between 40 GHz and 200 GHz from field disturbance sensors and radar systems operating in the 76-81 GHz band: 600 pW/cm² at a distance of 3 meters from the exterior surface of the radiating structure.
3. For radiated emissions above 200 GHz from field disturbance sensors and radar systems operating in the 76-81 GHz band: 1000 pW/cm² at a distance of 3 meters from the exterior surface of the radiating structure.

Notes:

$$P(\text{mW}) = \text{Power density (mW/m}^2) \times 4\pi(r)^2$$

$$600 \text{ pW/cm}^2 = -1.7\text{dBm @ 3m} = 7.84 \text{ dBm @ 1m}$$


$$1000 \text{ pW/cm}^2 = 0.5 \text{ dBm @ 3m} = 10.04 \text{ dBm @ 1m}$$

P: Power


r: measurement distance(m)

Test Configuration


9kHz ~ 30MHz

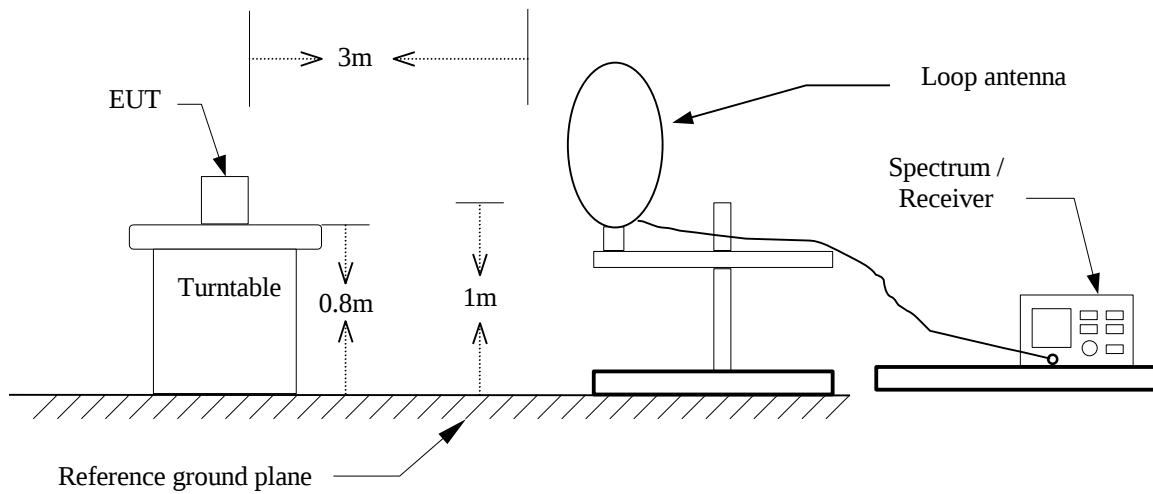


30MHz ~ 1 GHz

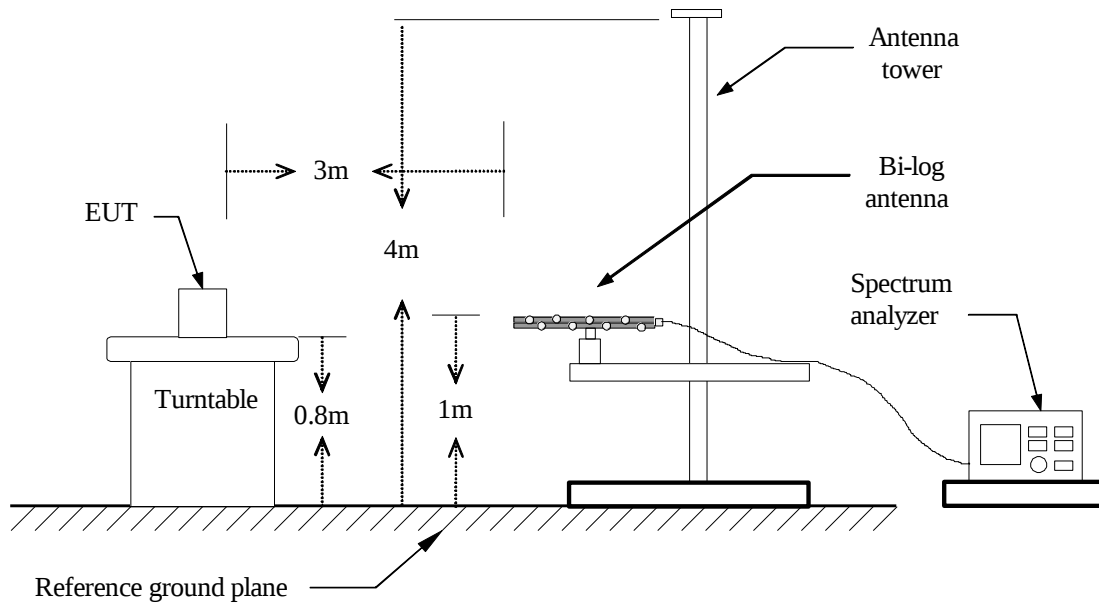


Above 1 GHz ~ 18GHz

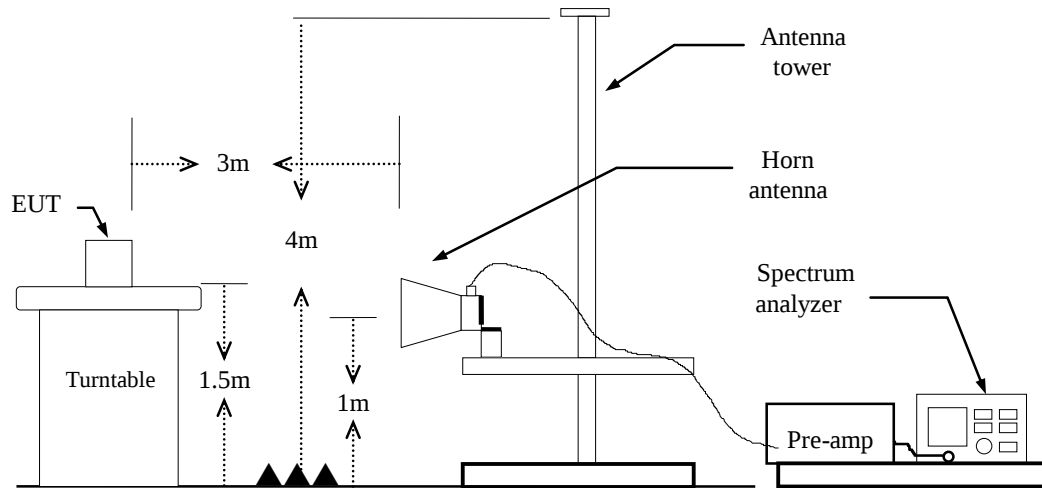

18GHz ~ 40GHz

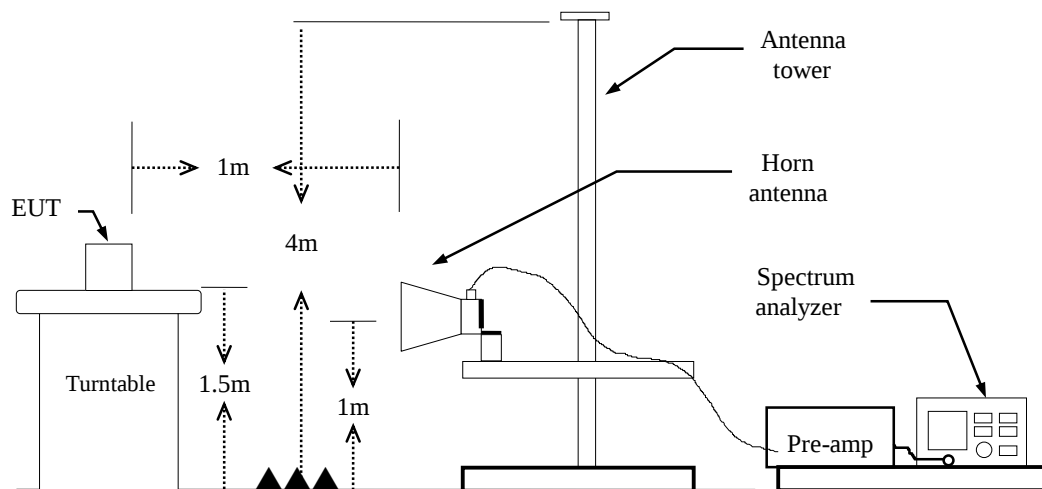

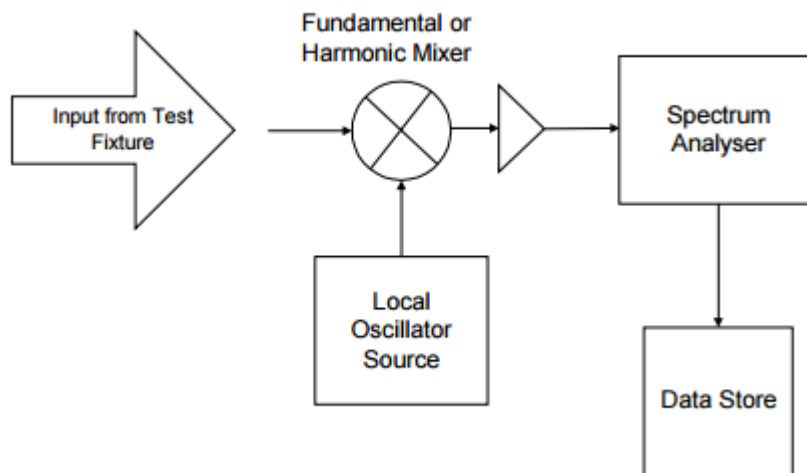Above 40 GHz

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a)PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b)AVERAGE: RBW=1MHz,

Above 40GHz:

RBW = 1 MHz, VBW= 3 MHz,

Detector = Peak, Trace mode = max hold, Sweep = AUTO.

7. Repeat above procedures until the measurements for all frequencies are complete.

240MHz
Below 1 GHz


Operation Mode: TX CH Mid **Polarity:** Ver. / Hor.
Temperature: 21.9°C **Tested by:** Ray Li
Humidity: 54% RH **Test Date:** 2021/01/20

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB	Ant. Pol. (H/V)
39.70	Peak	34.39	-9.65	24.74	40.00	-15.26	V
139.61	Peak	28.97	-9.78	19.19	43.50	-24.31	V
362.71	Peak	26.85	-6.68	20.17	46.00	-25.83	V
500.45	Peak	26.59	-3.30	23.29	46.00	-22.71	V
849.65	Peak	30.59	2.52	33.11	46.00	-12.89	V
861.29	Peak	30.27	2.39	32.66	46.00	-13.34	V
97.90	Peak	36.05	-13.54	22.51	43.50	-20.99	H
139.61	Peak	33.54	-9.78	23.76	43.50	-19.74	H
388.90	Peak	26.56	-6.34	20.22	46.00	-25.78	H
493.66	Peak	26.30	-3.30	23.00	46.00	-23.00	H
773.99	Peak	28.86	1.28	30.14	46.00	-15.86	H
862.26	Peak	28.49	2.41	30.90	46.00	-15.10	H


Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

Polarity : Vertical

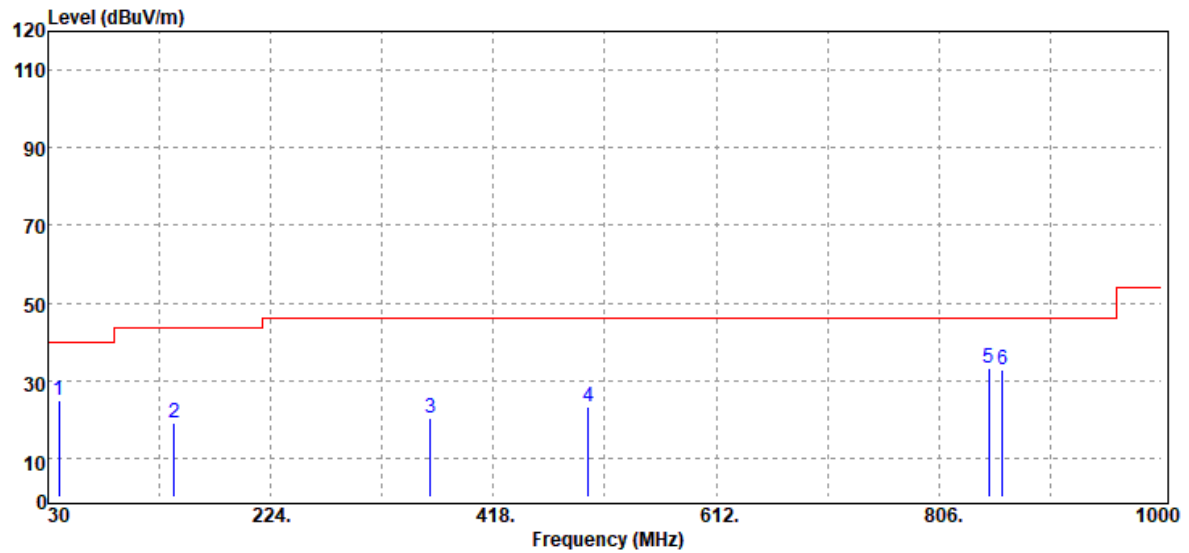

Polarity : Horizontal

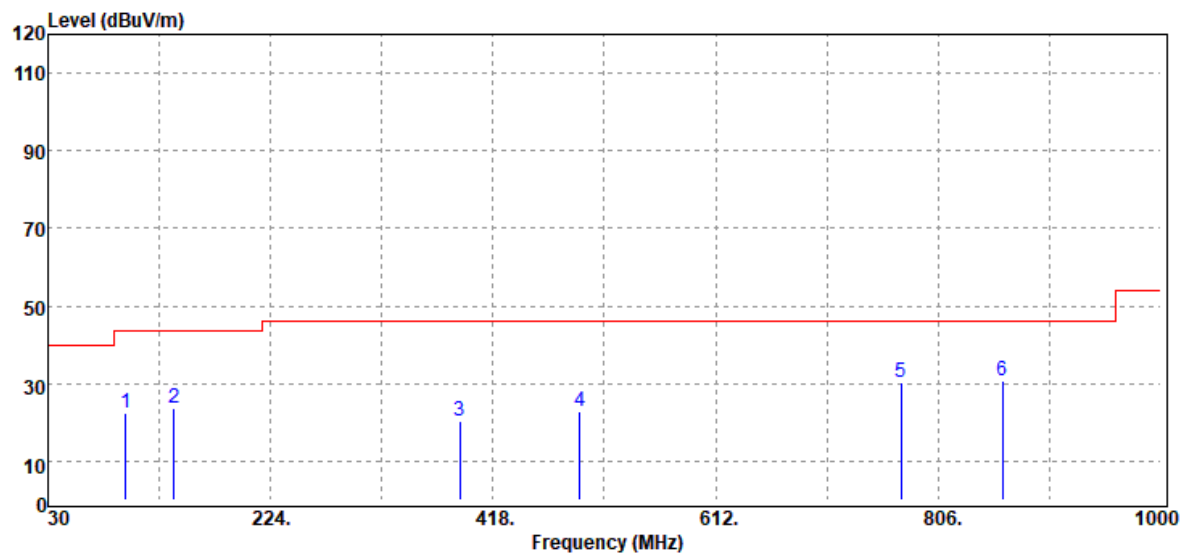

480MHz


Operation Mode: TX CH Mid **Polarity:** Ver. / Hor.
Temperature: 21.9°C **Tested by:** Ray Li
Humidity: 54% RH **Test Date:** 2021/01/20

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB	Ant. Pol. (H/V)
46.49	Peak	50.69	-13.90	36.79	40.00	-3.21	V
121.18	Peak	28.33	-9.22	19.11	43.50	-24.39	V
389.87	Peak	26.96	-6.33	20.63	46.00	-25.37	V
482.99	Peak	26.66	-3.38	23.28	46.00	-22.72	V
841.89	Peak	31.00	2.36	33.36	46.00	-12.64	V
866.14	Peak	30.88	2.48	33.36	46.00	-12.64	V
97.90	Peak	36.35	-13.54	22.81	43.50	-20.69	H
139.61	Peak	33.64	-9.78	23.86	43.50	-19.64	H
353.01	Peak	27.79	-7.13	20.66	46.00	-25.34	H
500.45	Peak	26.45	-3.30	23.15	46.00	-22.85	H
838.01	Peak	27.90	2.23	30.13	46.00	-15.87	H
862.26	Peak	27.86	2.41	30.27	46.00	-15.73	H


Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

Polarity : Vertical

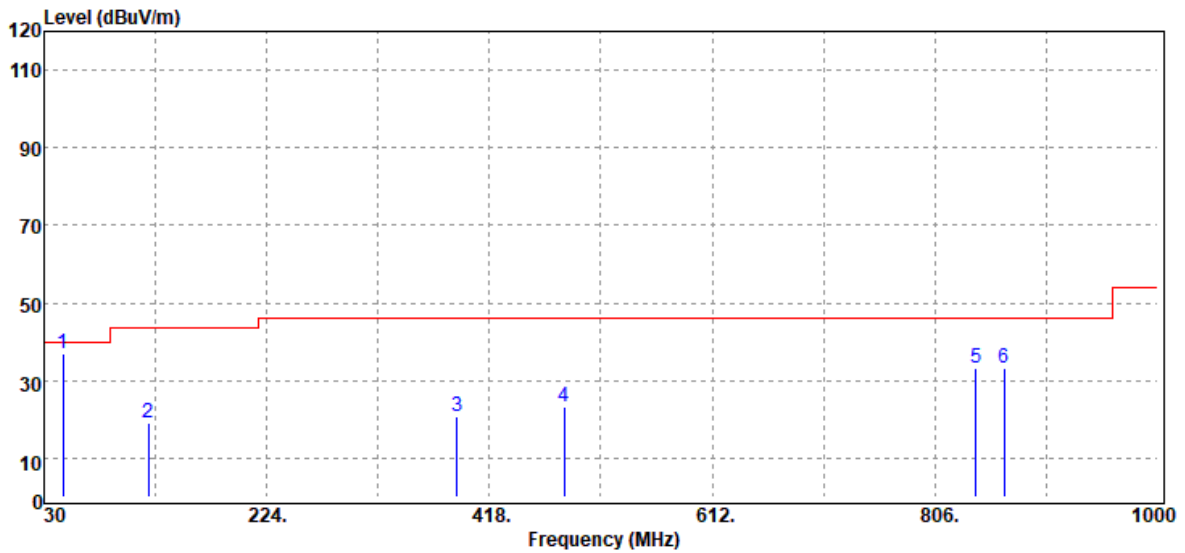

Polarity : Horizontal

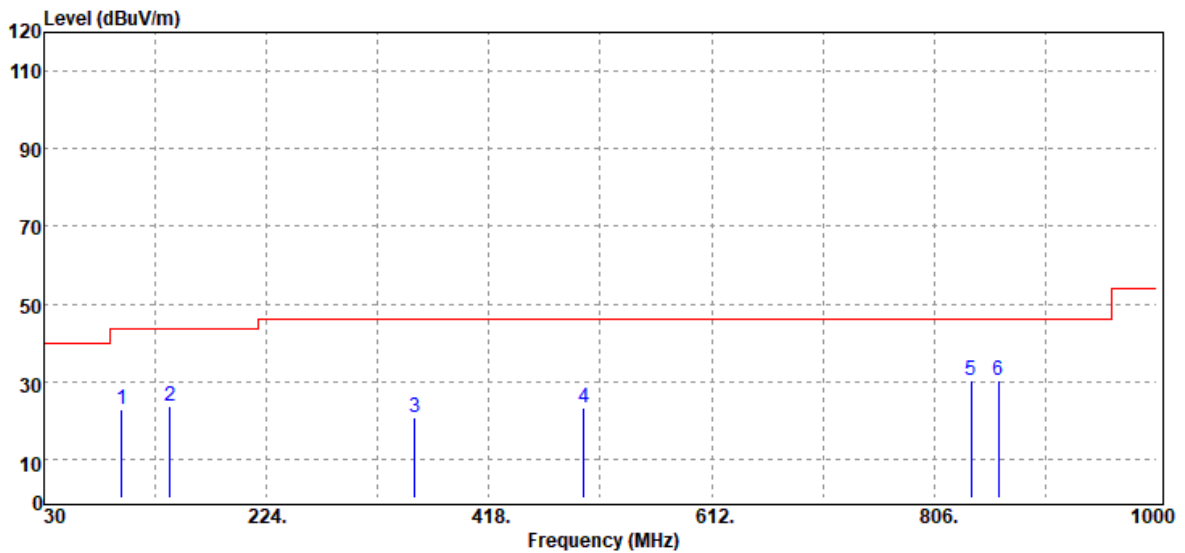

1680MHz


Operation Mode: TX CH Mid **Polarity:** Ver. / Hor.
Temperature: 21.9°C **Tested by:** Ray Li
Humidity: 54% RH **Test Date:** 2021/01/20

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB	Ant. Pol. (H/V)
54.25	Peak	45.56	-16.26	29.30	40.00	-10.70	V
124.09	Peak	28.56	-9.06	19.50	43.50	-24.00	V
362.71	Peak	26.85	-6.68	20.17	46.00	-25.83	V
473.29	Peak	26.28	-3.55	22.73	46.00	-23.27	V
841.89	Peak	30.53	2.36	32.89	46.00	-13.11	V
862.26	Peak	29.98	2.41	32.39	46.00	-13.61	V
95.96	Peak	38.06	-14.22	23.84	43.50	-19.66	H
138.64	Peak	33.55	-9.76	23.79	43.50	-19.71	H
361.74	Peak	27.81	-6.72	21.09	46.00	-24.91	H
492.69	Peak	26.59	-3.31	23.28	46.00	-22.72	H
841.89	Peak	27.87	2.36	30.23	46.00	-15.77	H
890.39	Peak	27.61	2.65	30.26	46.00	-15.74	H


Remark:

1. No emission found between lowest internal used/generated frequency to 30MHz (9kHz~30MHz).
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

Polarity : Vertical

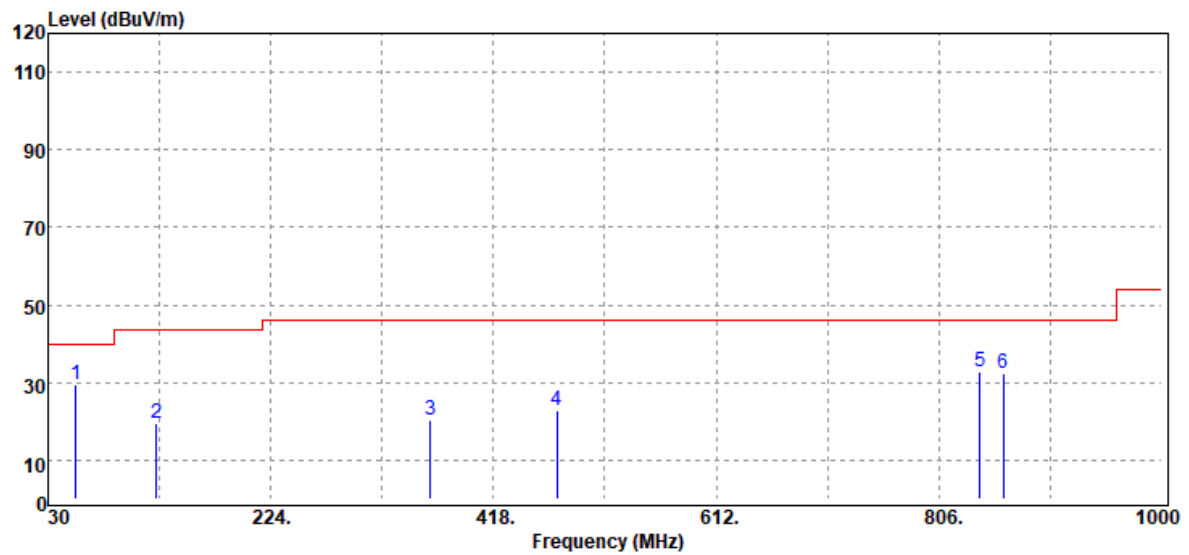

Polarity : Horizontal

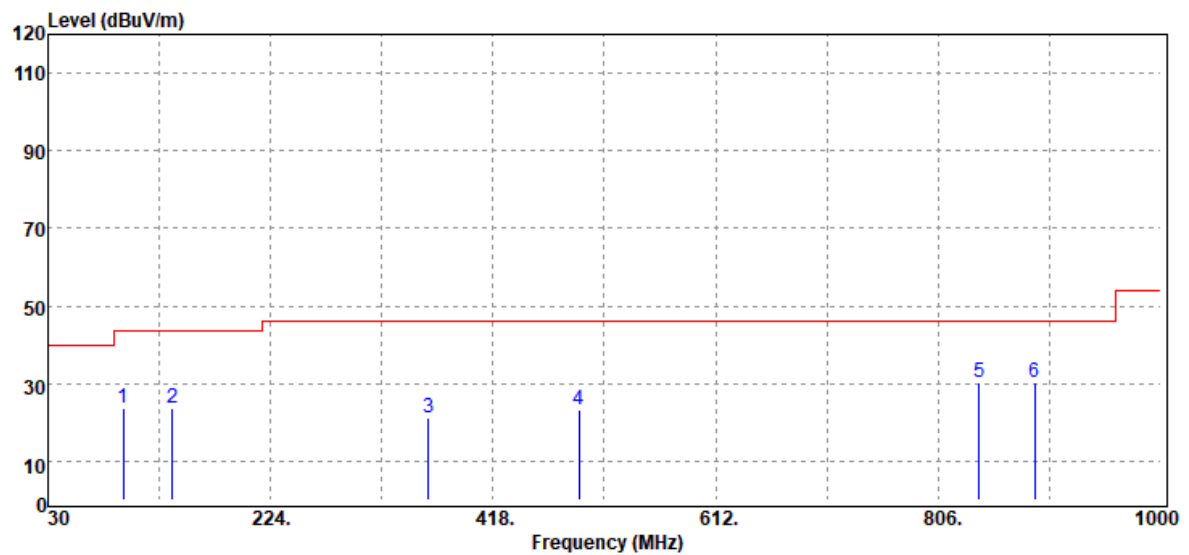


240MHz**Above 1 GHz****Operation Mode:** TX CH Mid**Polarity:** Ver. / Hor.**Temperature:** 21.9°C**Tested by:** Ray Li**Humidity:** 54% RH**Test Date:** 2021/01/20

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB	Ant. Pol. (H/V)
3754.80	Peak	35.38	9.53	44.91	74.00	-29.09	V
N/A							
3747.70	Peak	34.84	9.65	44.49	74.00	-29.51	H
N/A							


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Polarity : Vertical

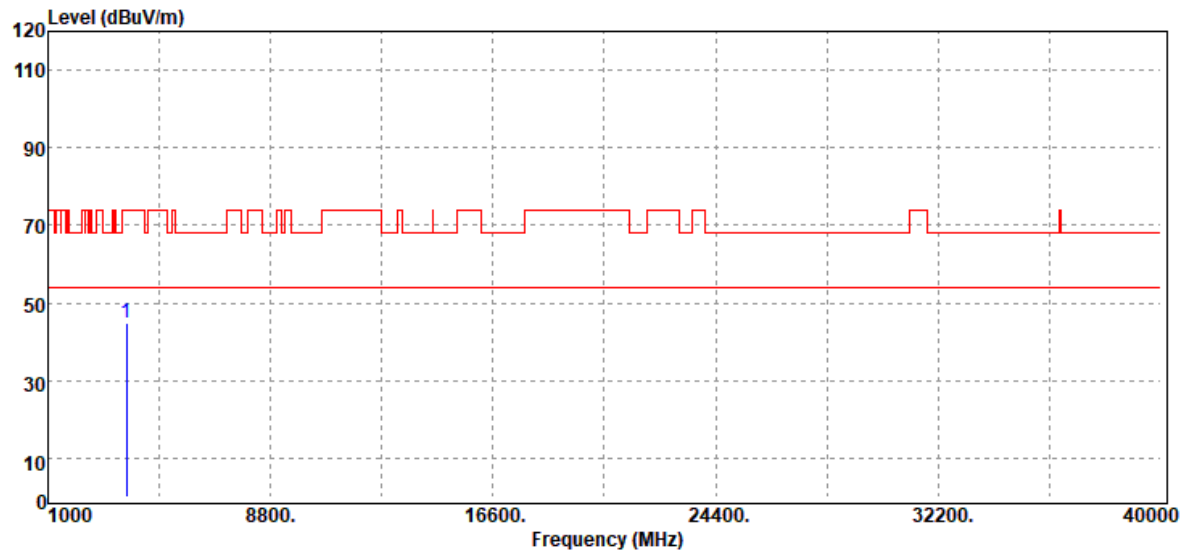

Polarity : Horizontal

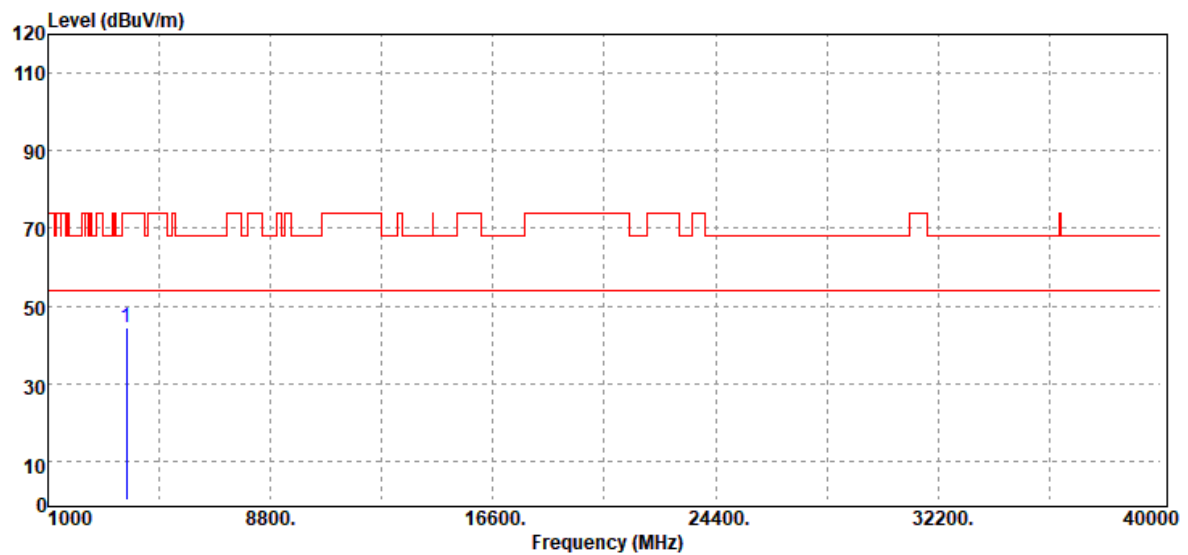

40G-50G


Operation Mode: Test Mode

Temperature: 23.4°C

Test Date: January 15, 2021

Humidity: 55.3% RH

Tested by: Ray Li

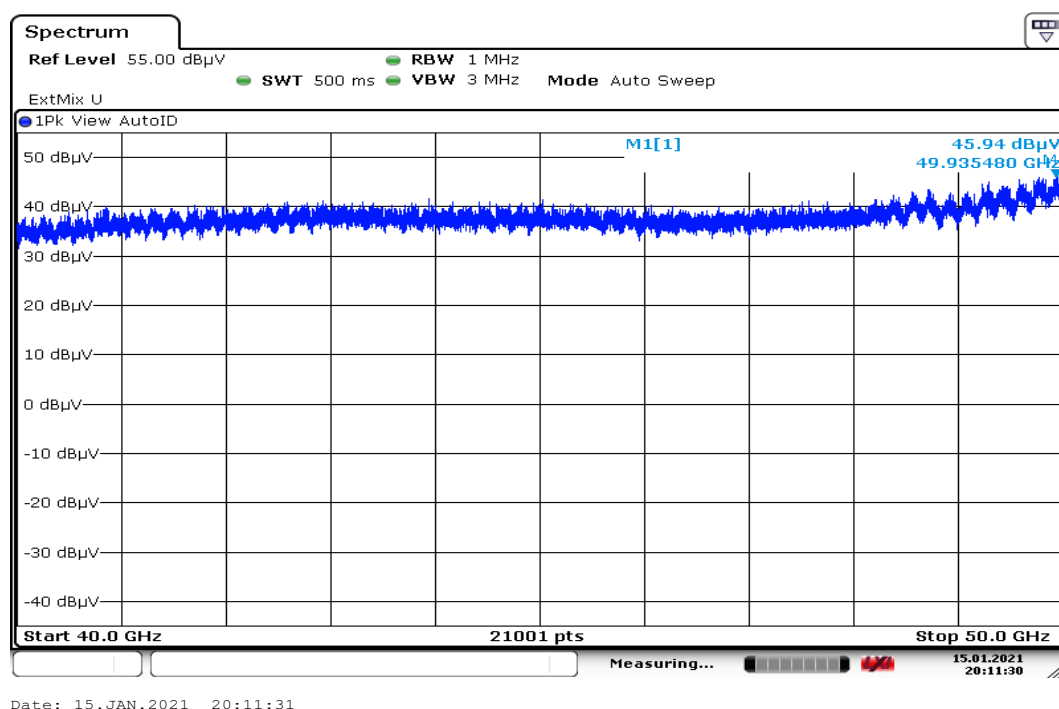

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
49.93548	45.94	42.89	0.1	88.83	123.08	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \}$ = 93.54dBuV/m


@ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5)$ = 109.1dBuV/m

@ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2)$ = 117.06dBuV/m

@ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1)$ = 123.08dBuV/m

@ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05)$ = 152.62dBuV/m

@ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03)$ = 173.54dBuV/m

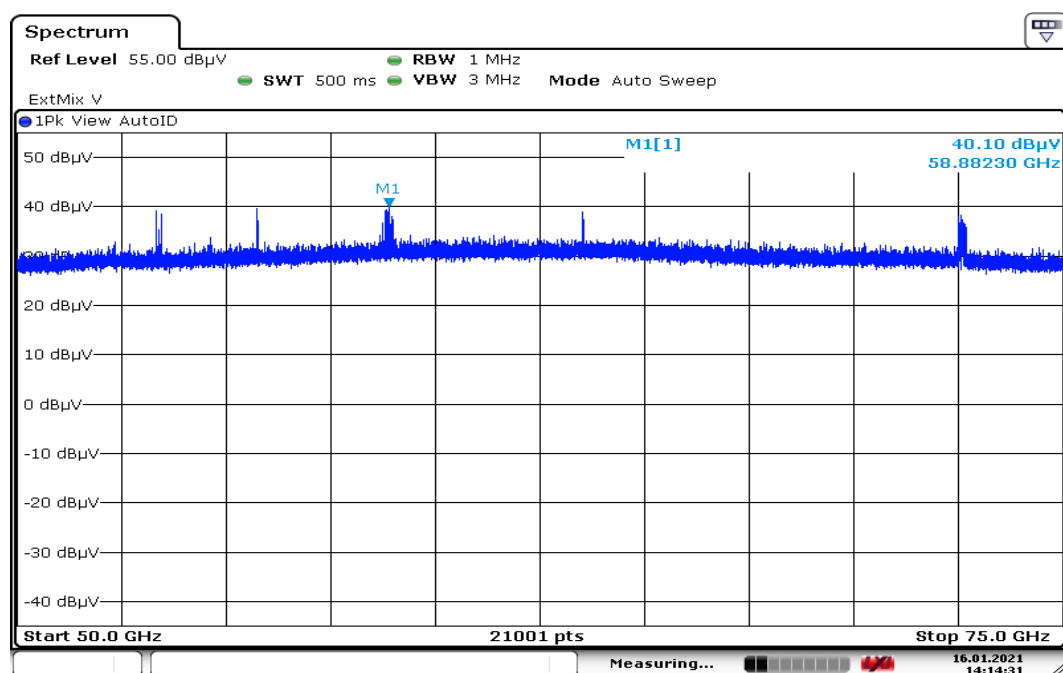50G-75G**Operation Mode:** Test Mode**Temperature:** 22.5°C**Test Date:** January 16, 2021**Humidity:** 55.8% RH**Tested by:** Ray Li

Date: 16.JAN.2021 14:14:31

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
58.8823	40.1	45.62	0.2	85.72	117.06	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \} = 93.54 \text{ dBuV/m}$ @ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5) = 109.1 \text{ dBuV/m}$ @ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2) = 117.06 \text{ dBuV/m}$ @ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1) = 123.08 \text{ dBuV/m}$ @ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05) = 152.62 \text{ dBuV/m}$ @ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03) = 173.54 \text{ dBuV/m}$

75G-100G


Operation Mode: Test Mode

Temperature: 23.4°C

Test Date: January 15, 2021

Humidity: 55.3% RH

Tested by: Ray Li

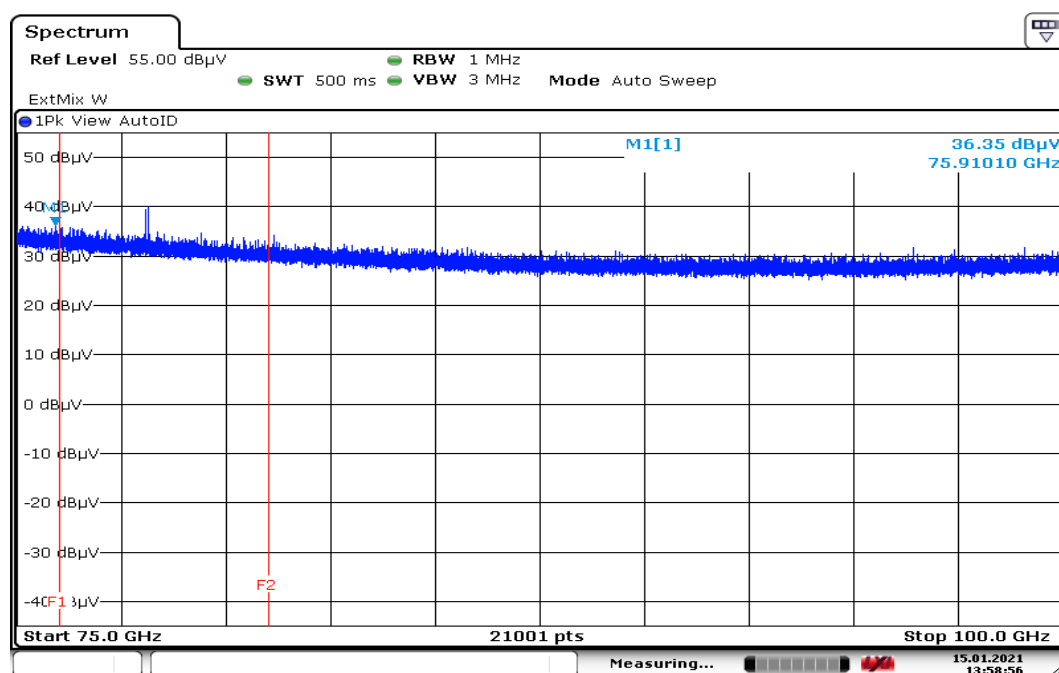

Date: 15.JAN.2021 13:58:56

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
75.9101	36.35	47.05	0.2	83.40	117.06	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \times \log \{ (0.000006 \times 377)^{0.5} \times 1000000 \} = 93.54 \text{ dBuV/m}$

@ 0.5m Limit = $93.54 + 20 \times \log (3/0.5) = 109.1 \text{ dBuV/m}$

@ 0.2m Limit = $93.54 + 20 \times \log (3/0.2) = 117.06 \text{ dBuV/m}$

@ 0.1m Limit = $93.54 + 20 \times \log (3/0.1) = 123.08 \text{ dBuV/m}$

@ 0.05m Limit = $93.54 + 20 \times \log (3/0.05) = 152.62 \text{ dBuV/m}$

@ 0.03m Limit = $93.54 + 20 \times \log (3/0.03) = 173.54 \text{ dBuV/m}$

100G-110G


Operation Mode: Test Mode

Temperature: 23.4°C

Test Date: January 15, 2021

Humidity: 55.3% RH

Tested by: Ray Li

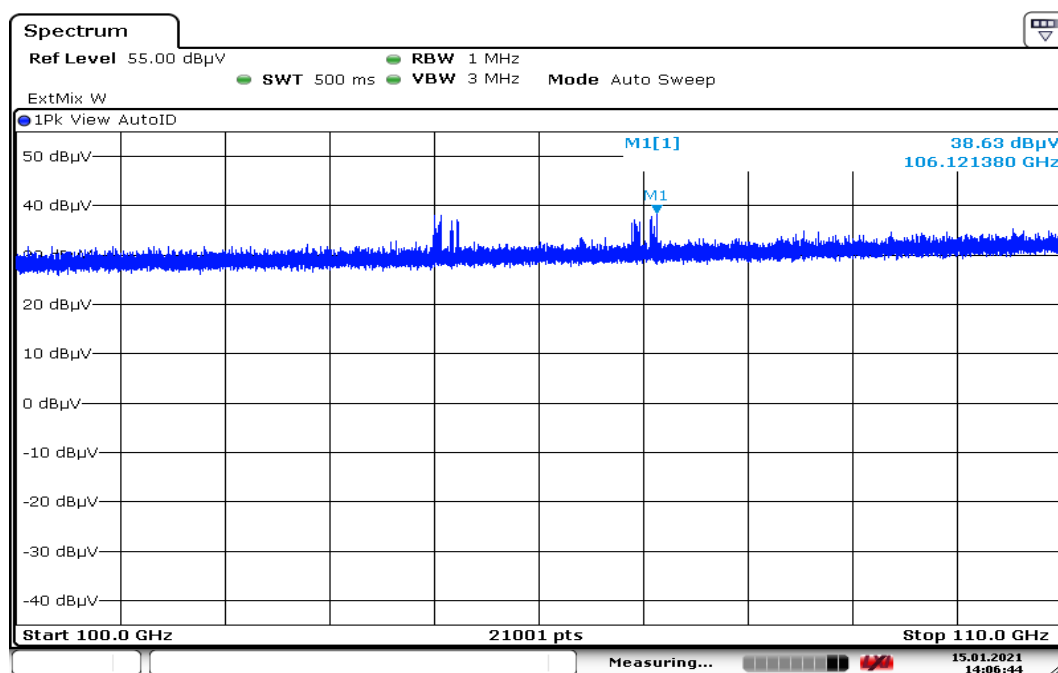

Date: 15.JAN.2021 14:06:45

Frequency (GHz)	Spectrum Reading (dBμV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
106.12138	38.63	48.63	0.05	87.26	152.62	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBμV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \times \log \{ (0.000006 \times 377)^{0.5} \times 1000000 \}$ = 93.54dBuV/m


@ 0.5m Limit = $93.54 + 20 \times \log (3/0.5)$ = 109.1dBuV/m

@ 0.2m Limit = $93.54 + 20 \times \log (3/0.2)$ = 117.06dBuV/m

@ 0.1m Limit = $93.54 + 20 \times \log (3/0.1)$ = 123.08dBuV/m

@ 0.05m Limit = $93.54 + 20 \times \log (3/0.05)$ = 152.62dBuV/m

@ 0.03m Limit = $93.54 + 20 \times \log (3/0.03)$ = 173.54dBuV/m

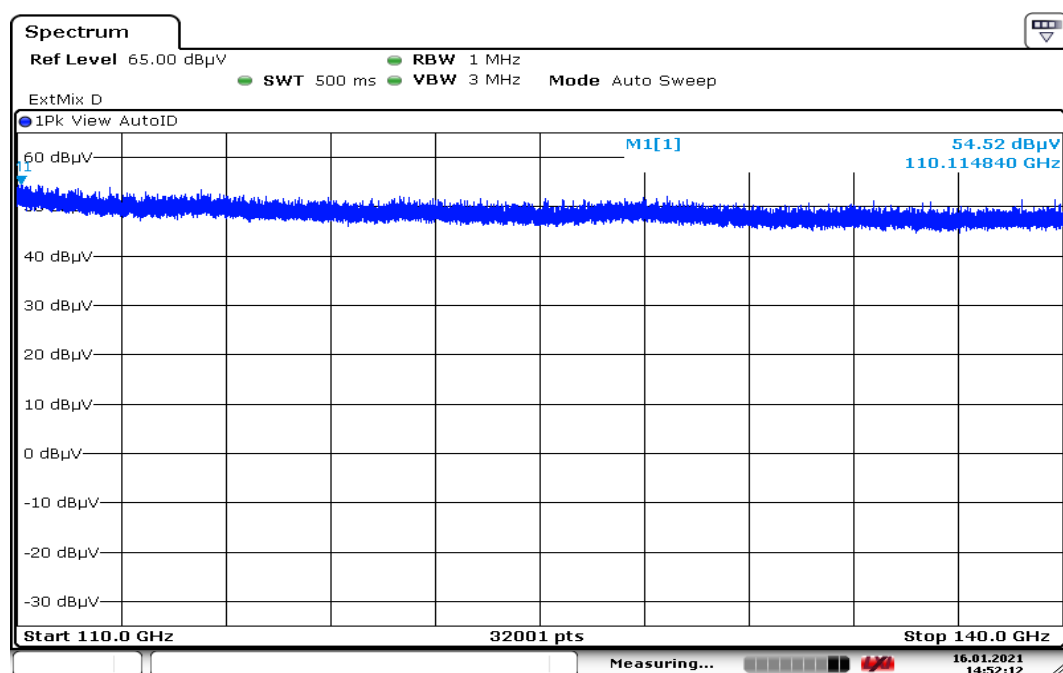110G-140G**Operation Mode:** Test Mode**Temperature:** 23.4°C**Test Date:** January 15, 2021**Humidity:** 55.3% RH**Tested by:** Ray Li

Date: 16.JAN.2021 14:52:12


Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
110.11484	54.52	50.40	0.05	104.92	152.62	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \} = 93.54 \text{ dBuV/m}$ @ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5) = 109.1 \text{ dBuV/m}$ @ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2) = 117.06 \text{ dBuV/m}$ @ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1) = 123.08 \text{ dBuV/m}$ @ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05) = 152.62 \text{ dBuV/m}$ @ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03) = 173.54 \text{ dBuV/m}$

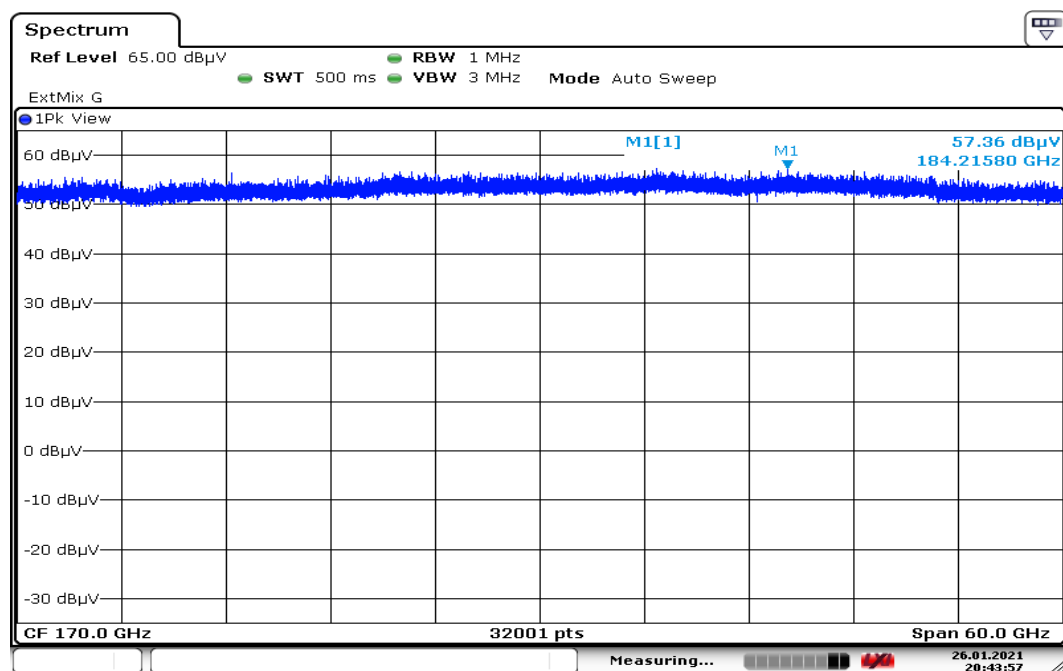140G-200G**Operation Mode:** Test Mode**Temperature:** 22.8°C**Test Date:** January 26, 2021**Humidity:** 58.5% RH**Tested by:** Ray Li

Date: 26.JAN.2021 20:43:57


Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
184.2158	57.36	54.57	0.03	111.93	173.54	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \} = 93.54 \text{ dBuV/m}$ @ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5) = 109.1 \text{ dBuV/m}$ @ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2) = 117.06 \text{ dBuV/m}$ @ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1) = 123.08 \text{ dBuV/m}$ @ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05) = 152.62 \text{ dBuV/m}$ @ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03) = 173.54 \text{ dBuV/m}$

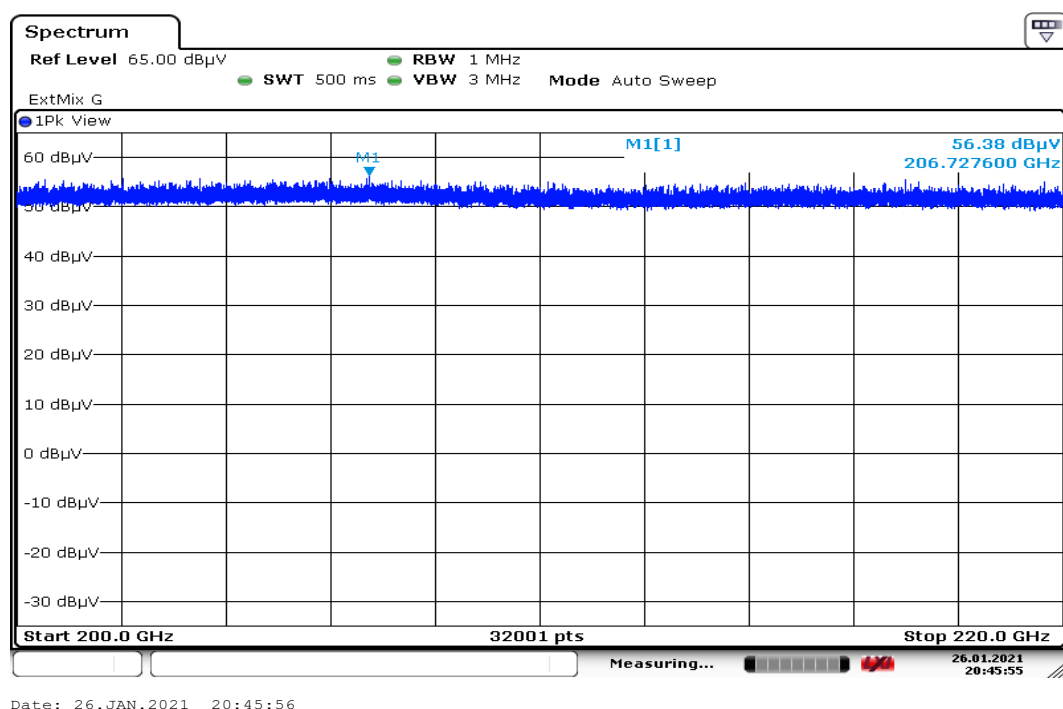200G-220G**Operation Mode:** Test Mode**Temperature:** 22.8°C**Test Date:** January 26, 2021**Humidity:** 58.5% RH**Tested by:** Ray Li

Date: 26.JAN.2021 20:45:56

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
206.7276	56.38	54.23	0.2	110.61	119.28	Peak


Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. Above 200GHz Limit :

$$@ 3m \text{ Limit} = 20 * \text{Log} \{ (0.00001 * 377)^{0.5} * 1000000 \} = 95.76 \text{ dBuV/m}$$

$$@ 0.2m \text{ Limit} = 95.76 + 20 * \text{Log} (3/0.2) = 119.28 \text{ dBuV/m}$$

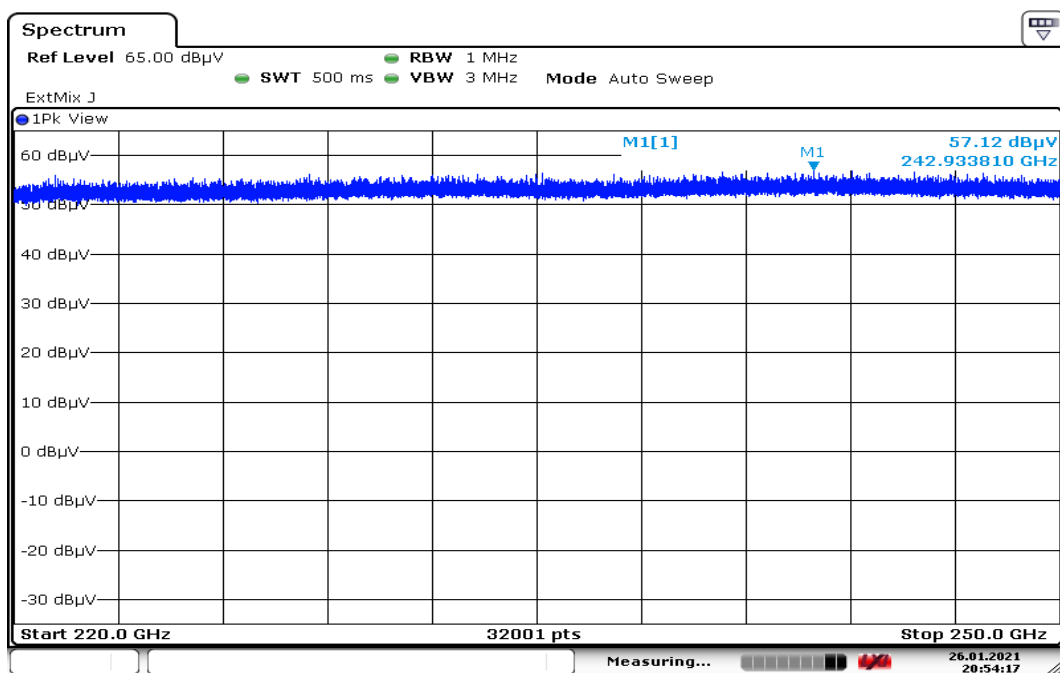220G-250G**Operation Mode:** Test Mode**Temperature:** 22.8°C**Test Date:** January 26, 2021**Humidity:** 58.5% RH**Tested by:** Ray Li

Date: 26.JAN.2021 20:54:18

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
242.93381	57.12	54.85	0.2	111.97	119.28	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. Above 200GHz Limit :

$$@ 3m \text{ Limit} = 20 * \text{Log} \{ (0.00001 * 377)^{0.5} * 1000000 \} = 95.76 \text{ dBuV/m}$$

$$@ 0.2m \text{ Limit} = 95.76 + 20 * \text{Log} (3/0.2) = 119.28 \text{ dBuV/m}$$

480MHz


Operation Mode: TX CH Mid **Polarity:** Ver. / Hor.
Temperature: 21.9°C **Tested by:** Ray Li
Humidity: 54% RH **Test Date:** 2021/01/20

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB	Ant. Pol. (H/V)
3747.70	Peak	34.57	9.65	44.22	74.00	-29.78	V
N/A							
3754.80	Peak	34.51	9.53	44.04	74.00	-29.96	H
N/A							


Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Polarity : Vertical

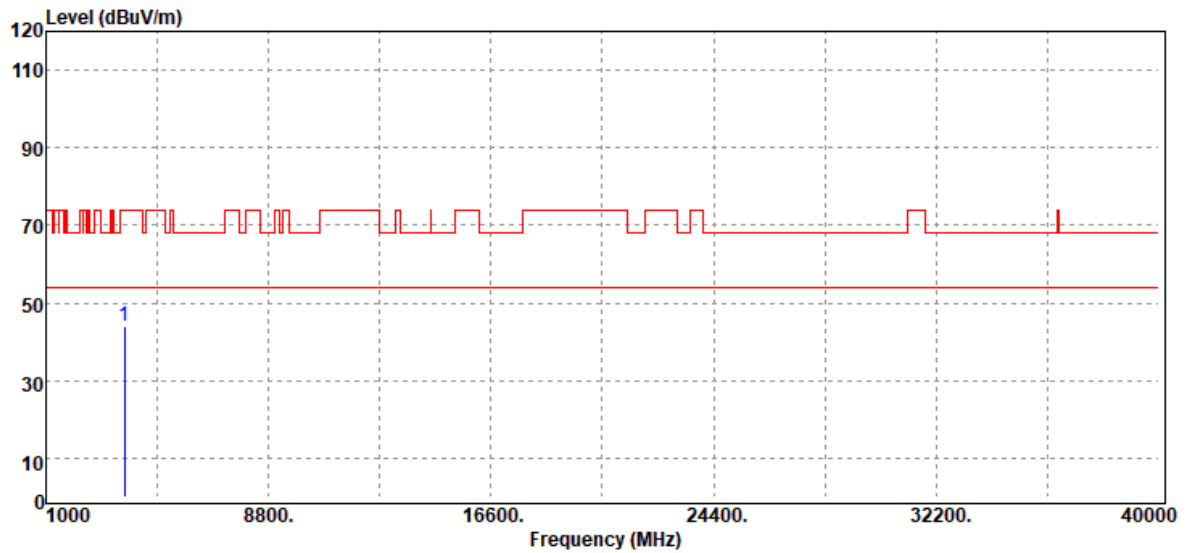

Polarity : Horizontal

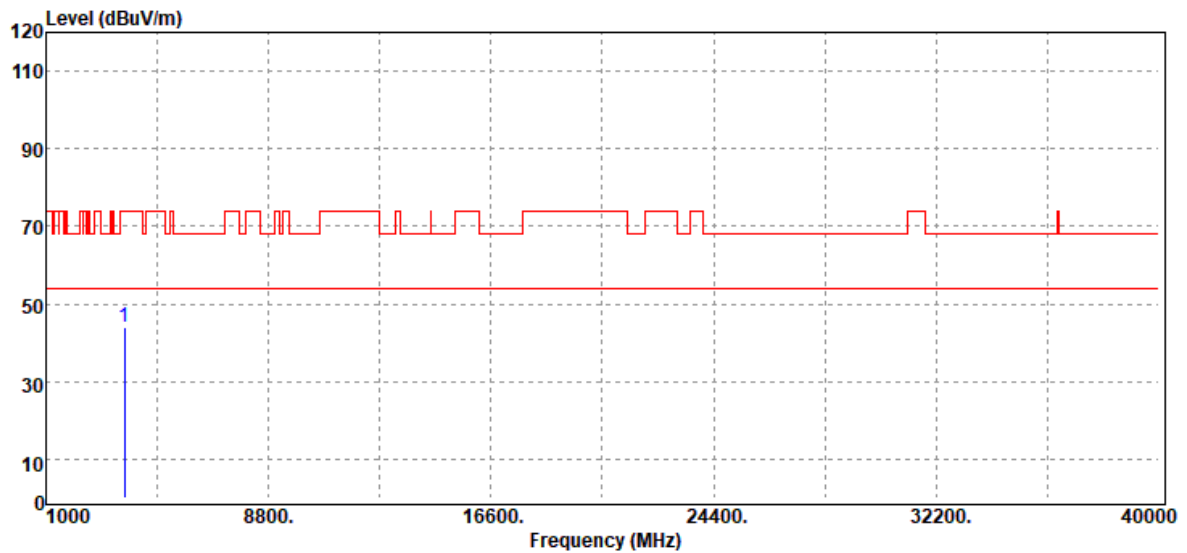

40G-50G


Operation Mode: Test Mode

Temperature: 23.4°C

Test Date: January 15, 2021

Humidity: 55.3% RH

Tested by: Ray Li

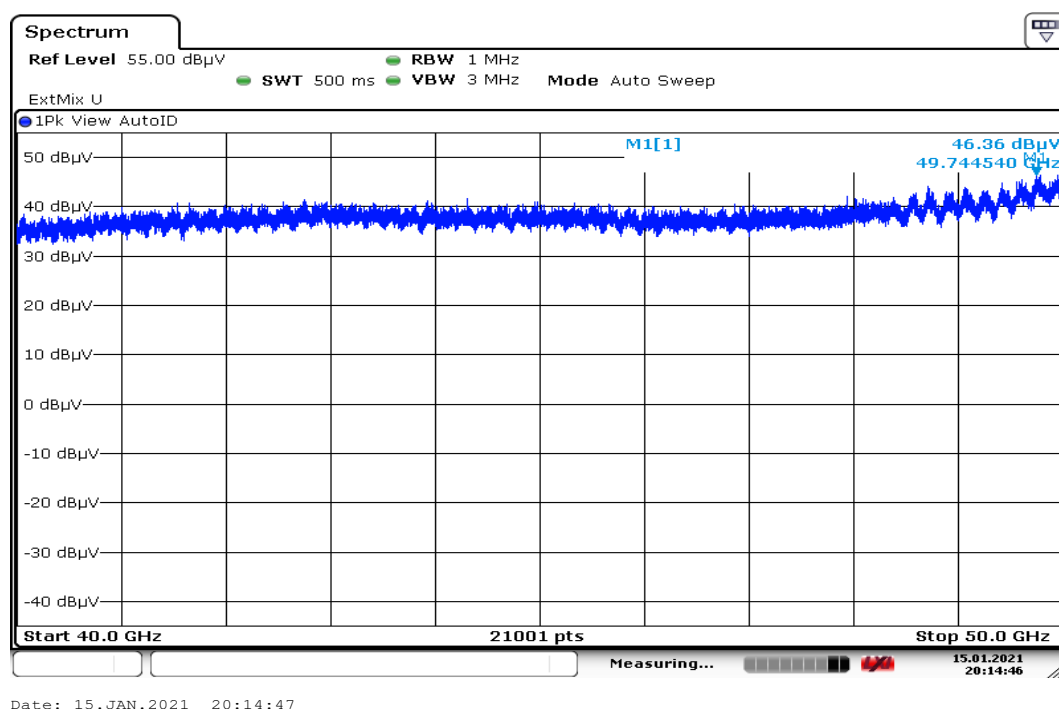

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
49.74454	46.36	42.88	0.1	89.24	123.08	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \}$ = 93.54dBuV/m


@ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5)$ = 109.1dBuV/m

@ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2)$ = 117.06dBuV/m

@ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1)$ = 123.08dBuV/m

@ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05)$ = 152.62dBuV/m

@ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03)$ = 173.54dBuV/m

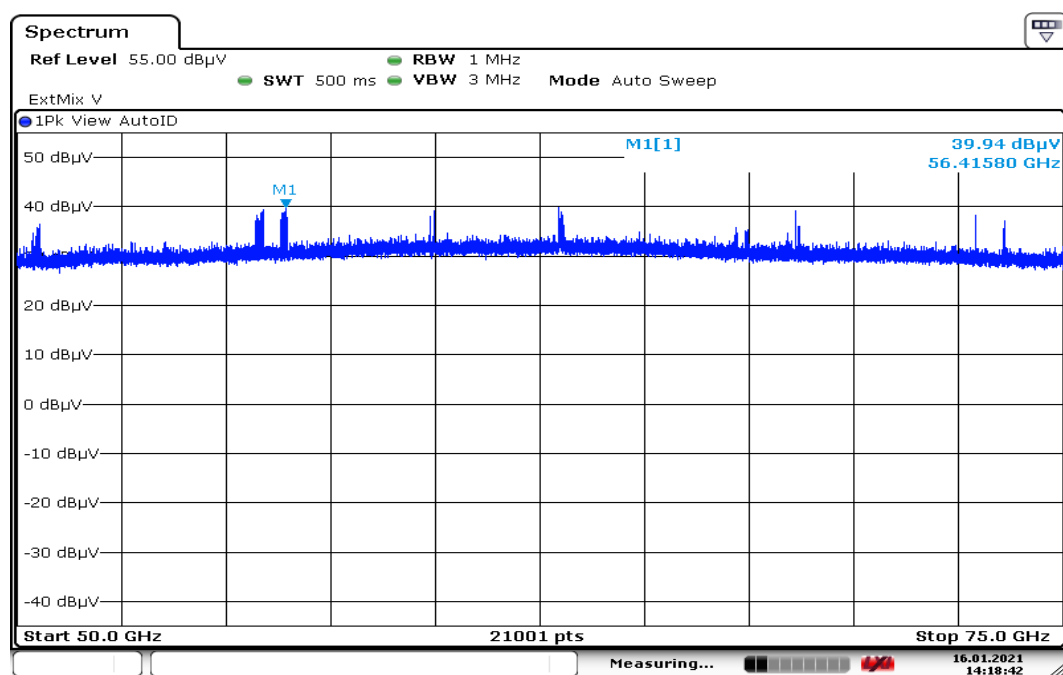50G-75G**Operation Mode:** Test Mode**Temperature:** 22.5°C**Test Date:** January 16, 2021**Humidity:** 55.8% RH**Tested by:** Ray Li

Date: 16.JAN.2021 14:18:42


Frequency (GHz)	Spectrum Reading (dBμV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
56.4158	39.94	45.09	0.2	85.03	117.06	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBμV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \} = 93.54 \text{ dBuV/m}$ @ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5) = 109.1 \text{ dBuV/m}$ @ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2) = 117.06 \text{ dBuV/m}$ @ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1) = 123.08 \text{ dBuV/m}$ @ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05) = 152.62 \text{ dBuV/m}$ @ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03) = 173.54 \text{ dBuV/m}$

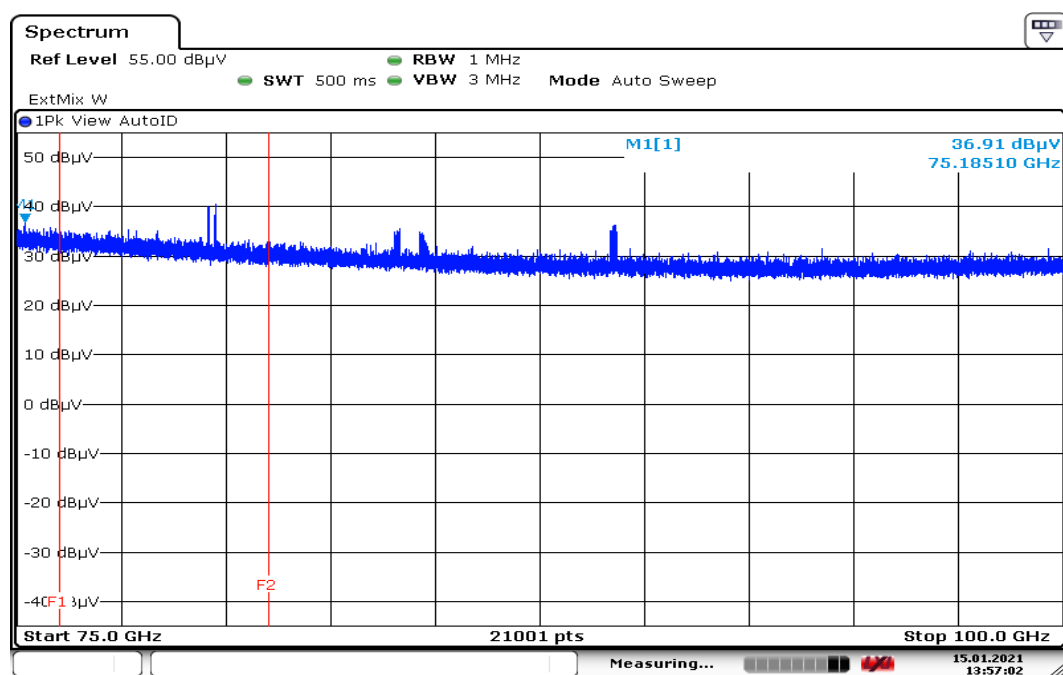75G-100G**Operation Mode:** Test Mode**Temperature:** 23.4°C**Test Date:** January 15, 2021**Humidity:** 55.3% RH**Tested by:** Ray Li

Date: 15.JAN.2021 13:57:03

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
75.1851	36.91	47.01	0.2	83.92	117.06	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \times \log \{ (0.000006 \times 377)^{0.5} \times 1000000 \} = 93.54 \text{ dBuV/m}$ @ 0.5m Limit = $93.54 + 20 \times \log (3/0.5) = 109.1 \text{ dBuV/m}$ @ 0.2m Limit = $93.54 + 20 \times \log (3/0.2) = 117.06 \text{ dBuV/m}$ @ 0.1m Limit = $93.54 + 20 \times \log (3/0.1) = 123.08 \text{ dBuV/m}$ @ 0.05m Limit = $93.54 + 20 \times \log (3/0.05) = 152.62 \text{ dBuV/m}$ @ 0.03m Limit = $93.54 + 20 \times \log (3/0.03) = 173.54 \text{ dBuV/m}$

100G-110G


Operation Mode: Test Mode

Temperature: 23.4°C

Test Date: January 15, 2021

Humidity: 55.3% RH

Tested by: Ray Li

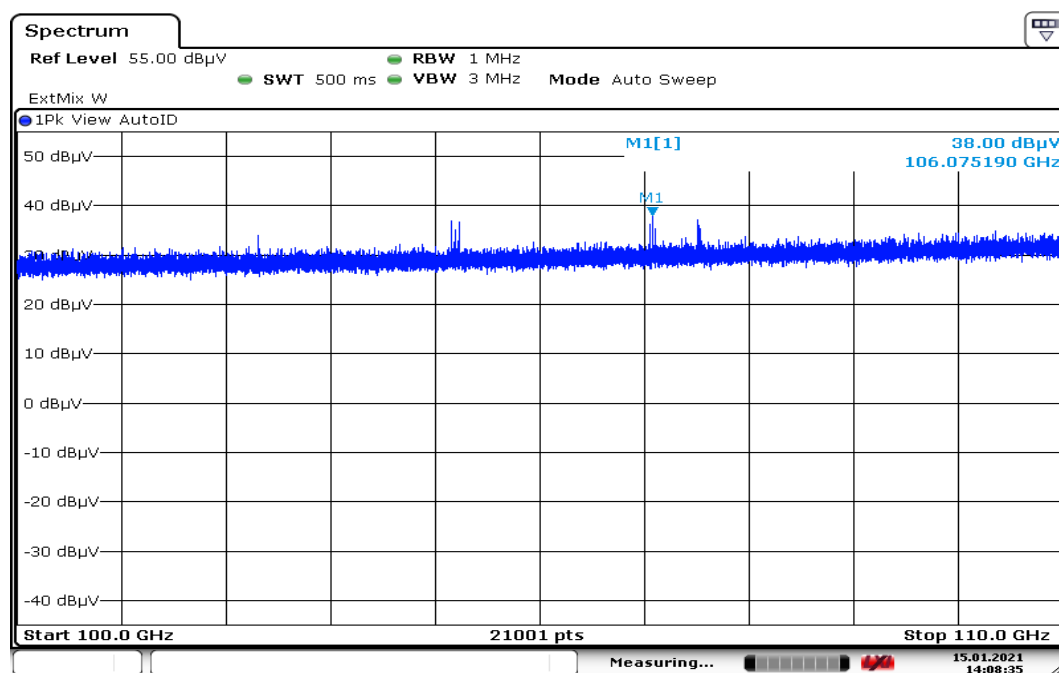

Date: 15.JAN.2021 14:08:36

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
106.07519	38	48.63	0.05	86.63	152.62	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 * \log \{ (0.000006 * 377)^{0.5} * 1000000 \}$ = 93.54dBuV/m

@ 0.5m Limit = $93.54 + 20 * \log (3/0.5)$ = 109.1dBuV/m

@ 0.2m Limit = $93.54 + 20 * \log (3/0.2)$ = 117.06dBuV/m

@ 0.1m Limit = $93.54 + 20 * \log (3/0.1)$ = 123.08dBuV/m

@ 0.05m Limit = $93.54 + 20 * \log (3/0.05)$ = 152.62dBuV/m

@ 0.03m Limit = $93.54 + 20 * \log (3/0.03)$ = 173.54dBuV/m

110G-140G


Operation Mode: Test Mode

Temperature: 22.5°C

Test Date: January 16, 2021

Humidity: 55.8% RH

Tested by: Ray Li

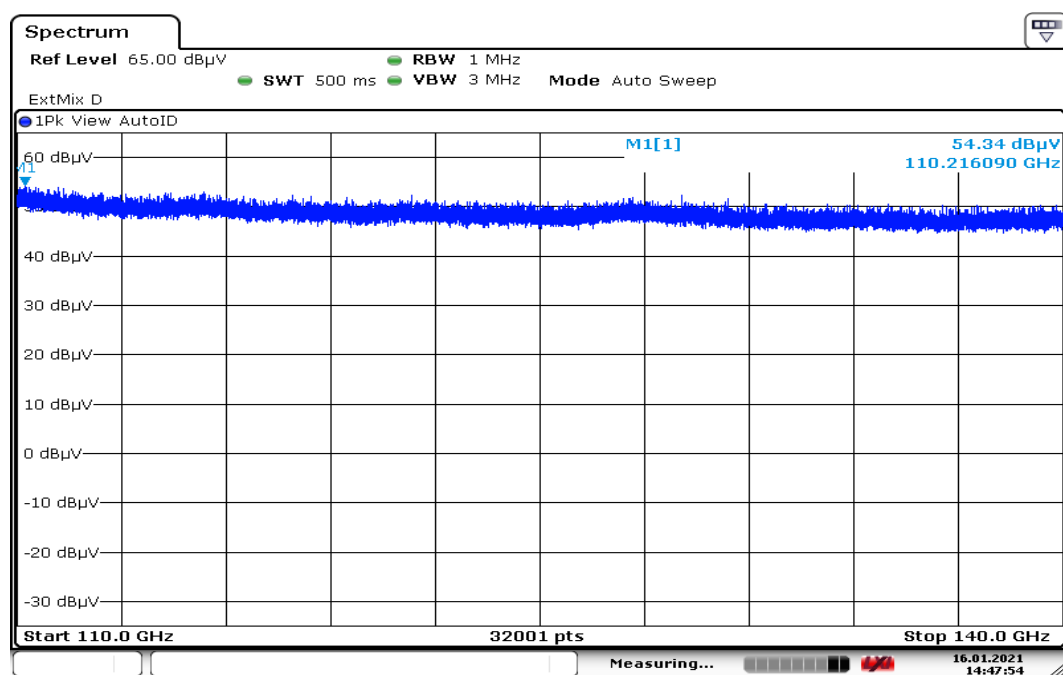

Date: 16.JAN.2021 14:47:54

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
110.21609	54.34	50.40	0.05	104.74	152.62	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \} = 93.54 \text{ dBuV/m}$


@ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5) = 109.1 \text{ dBuV/m}$

@ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2) = 117.06 \text{ dBuV/m}$

@ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1) = 123.08 \text{ dBuV/m}$

@ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05) = 152.62 \text{ dBuV/m}$

@ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03) = 173.54 \text{ dBuV/m}$

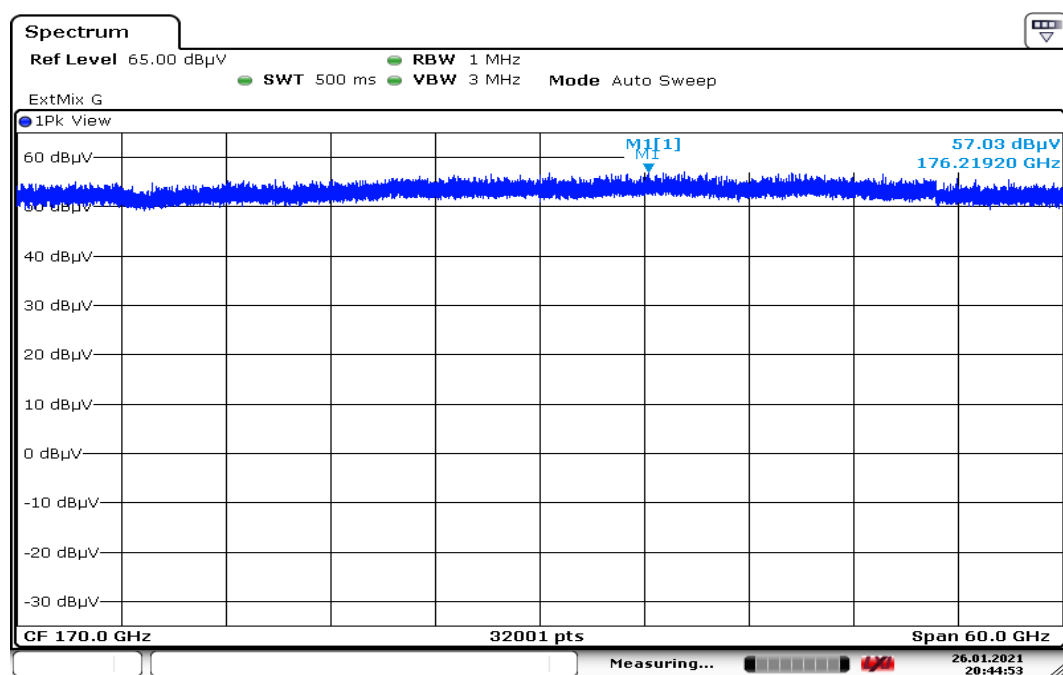140G-200G**Operation Mode:** Test Mode**Temperature:** 22.8°C**Test Date:** January 26, 2021**Humidity:** 58.5% RH**Tested by:** Ray Li

Date: 26.JAN.2021 20:44:54

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
176.2192	57.03	54.05	0.03	111.08	173.54	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \} = 93.54 \text{ dBuV/m}$ @ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5) = 109.1 \text{ dBuV/m}$ @ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2) = 117.06 \text{ dBuV/m}$ @ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1) = 123.08 \text{ dBuV/m}$ @ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05) = 152.62 \text{ dBuV/m}$ @ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03) = 173.54 \text{ dBuV/m}$

200G-220G


Operation Mode: Test Mode

Temperature: 22.8°C

Test Date: January 26, 2021

Humidity: 58.5% RH

Tested by: Ray Li

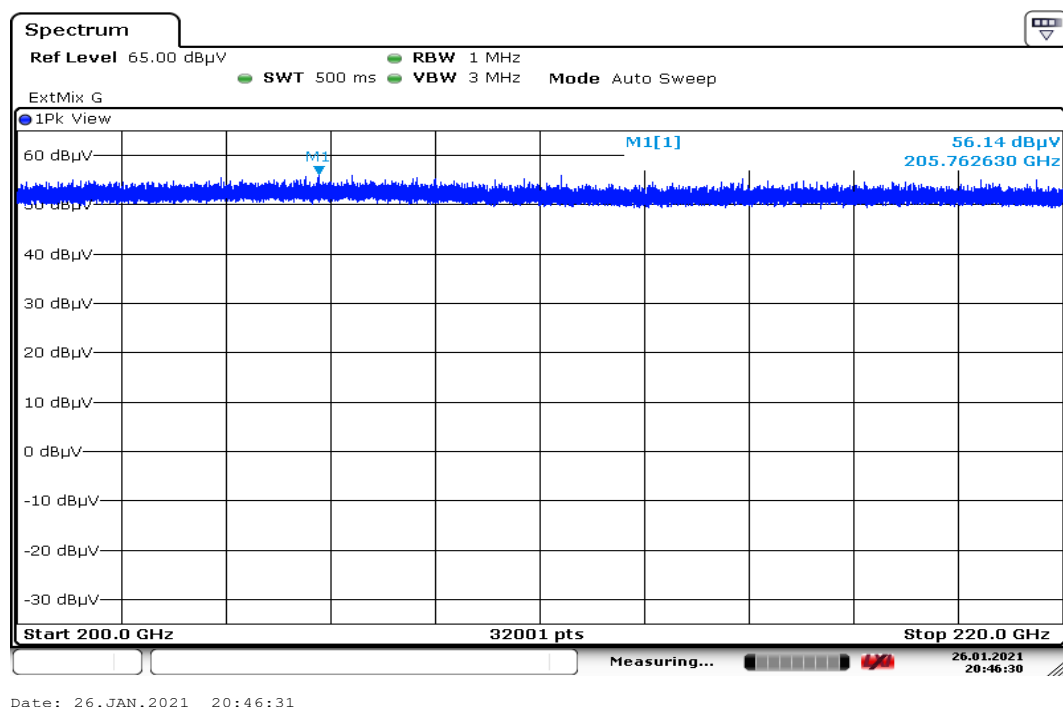

Date: 26.JAN.2021 20:46:31

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
205.76263	56.14	54.24	0.2	110.38	119.28	Peak


Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. Above 200GHz Limit :

$$@ 3m \text{ Limit} = 20 * \text{Log} \{ (0.00001 * 377)^{0.5} * 1000000 \} = 95.76 \text{ dBuV/m}$$

$$@ 0.2m \text{ Limit} = 95.76 + 20 * \text{Log} (3/0.2) = 119.28 \text{ dBuV/m}$$

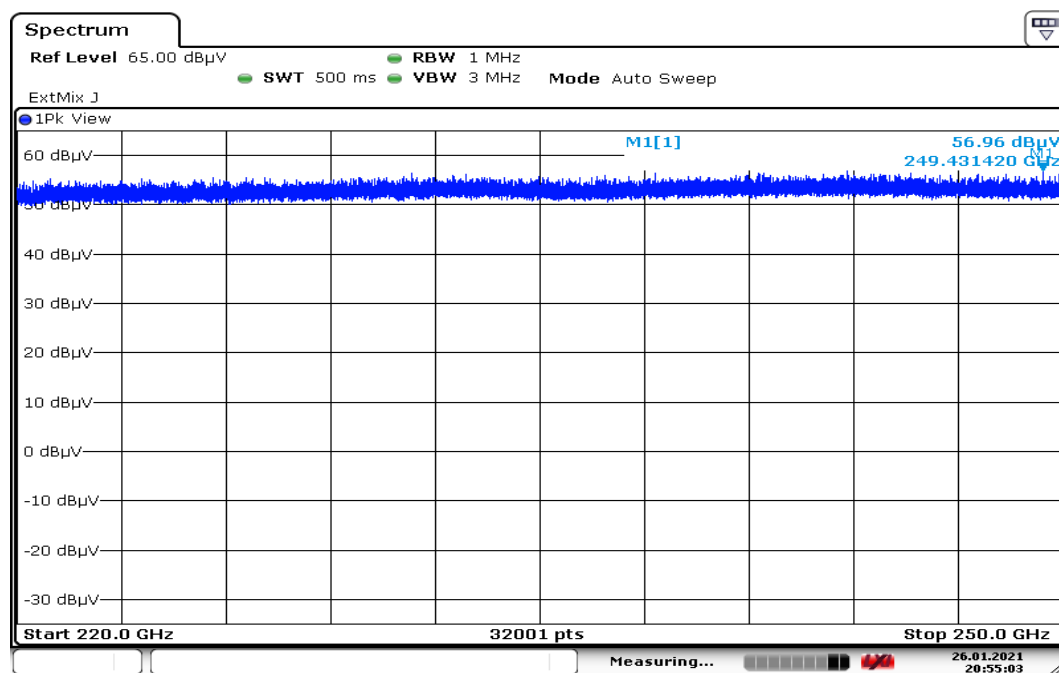220G-250G**Operation Mode:** Test Mode**Temperature:** 22.8°C**Test Date:** January 26, 2021**Humidity:** 58.5% RH**Tested by:** Ray Li

Date: 26.JAN.2021 20:55:04

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
249.43142	56.96	55.04	0.2	112.00	119.28	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. Above 200GHz Limit :

$$@ 3m \text{ Limit} = 20 * \text{Log} \{ (0.00001 * 377)^{0.5} * 1000000 \} = 95.76 \text{ dBuV/m}$$

$$@ 0.2m \text{ Limit} = 95.76 + 20 * \text{Log} (3/0.2) = 119.28 \text{ dBuV/m}$$

1680MHz


Operation Mode: TX CH Mid **Polarity:** Ver. / Hor.
Temperature: 21.9°C **Tested by:** Ray Li
Humidity: 54% RH **Test Date:** 2021/01/20

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Reading Level dBμV	Factor dB	Actual FS dBμV/m	Limit @3m dBμV/m	Margin dB	Ant. Pol. (H/V)
3733.50	Peak	35.20	8.97	44.17	74.00	-29.83	V
N/A							
3747.70	Peak	34.93	9.65	44.58	74.00	-29.42	H
N/A							


Remark:


1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

Polarity : Vertical

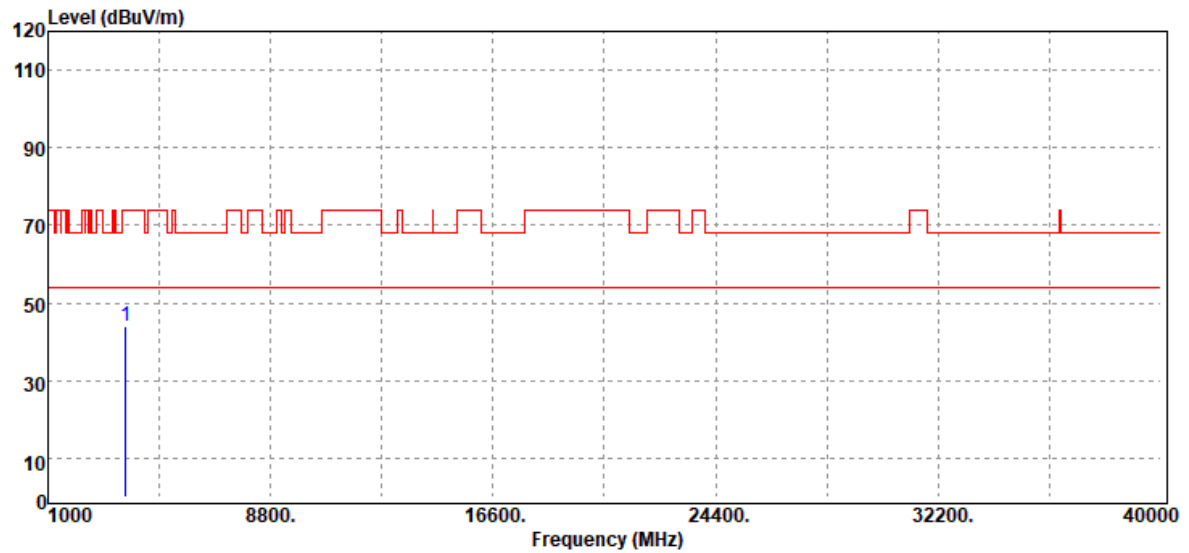

Polarity : Horizontal

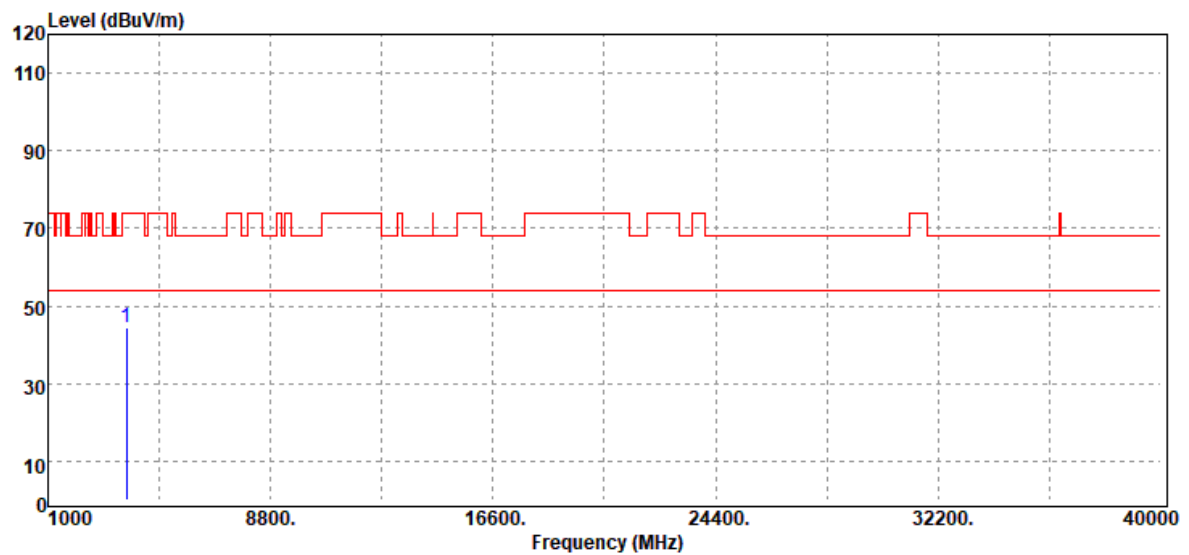

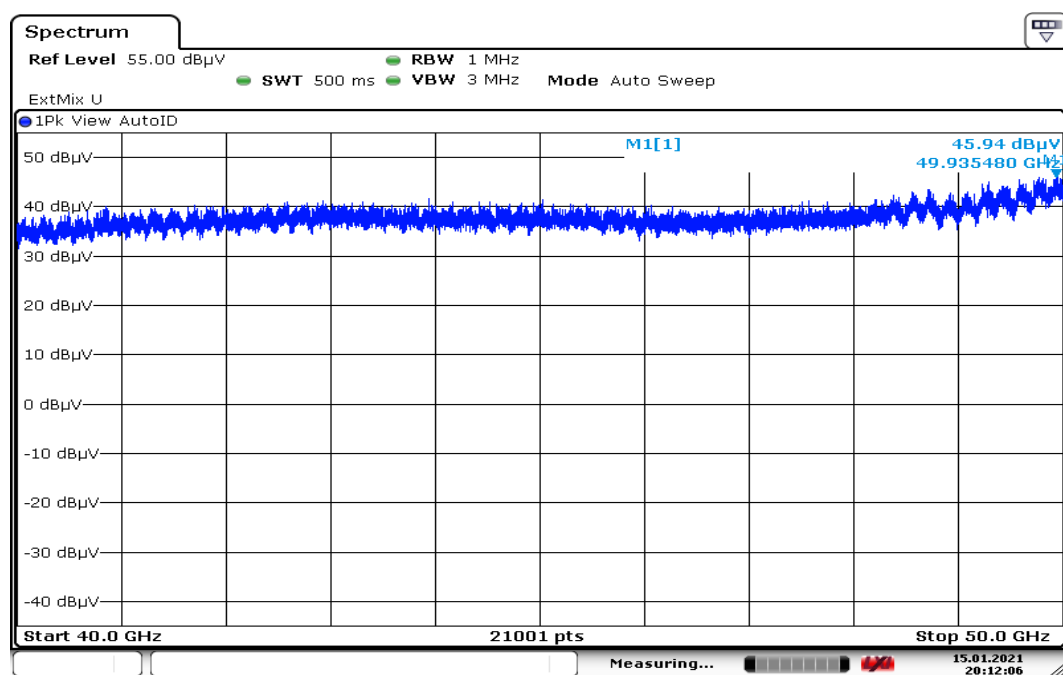40G-50G**Operation Mode:** Test Mode**Temperature:** 23.4°C**Test Date:** January 15, 2021**Humidity:** 55.3% RH**Tested by:** Ray Li

Date: 15.JAN.2021 20:12:06


Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
49.93548	45.94	42.89	0.1	88.83	123.08	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \}$ = 93.54dBuV/m@ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5)$ = 109.1dBuV/m@ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2)$ = 117.06dBuV/m@ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1)$ = 123.08dBuV/m@ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05)$ = 152.62dBuV/m@ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03)$ = 173.54dBuV/m

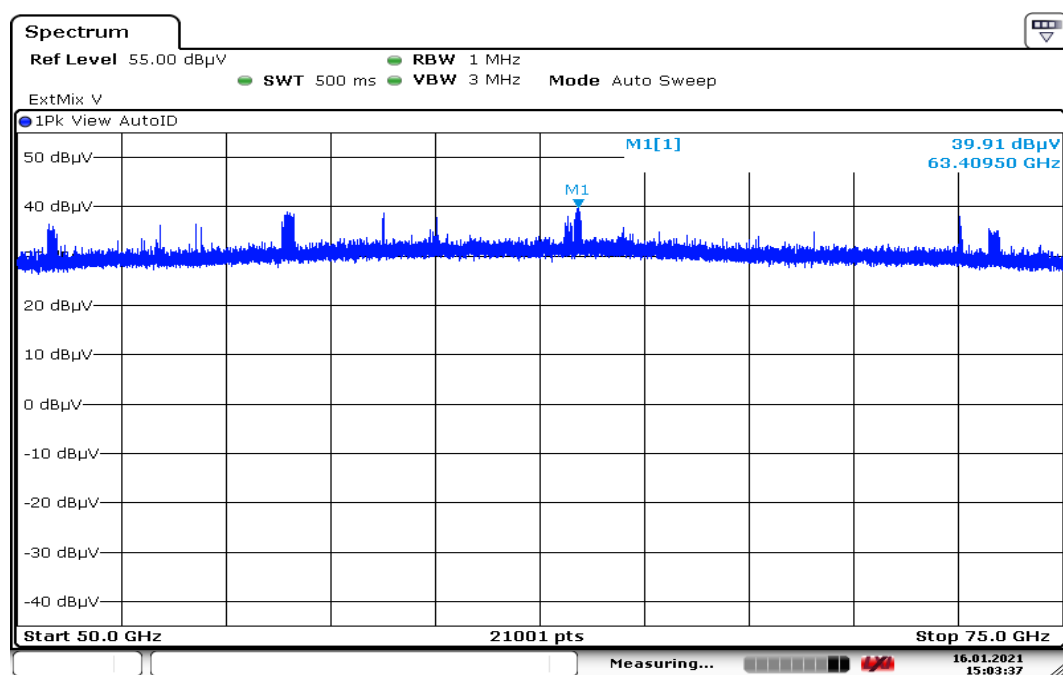50G-75G**Operation Mode:** Test Mode**Temperature:** 22.5°C**Test Date:** January 16, 2021**Humidity:** 55.8% RH**Tested by:** Ray Li

Date: 16.JAN.2021 15:03:37


Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
63.4095	39.91	46.60	0.2	86.51	117.06	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \} = 93.54 \text{ dBuV/m}$ @ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5) = 109.1 \text{ dBuV/m}$ @ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2) = 117.06 \text{ dBuV/m}$ @ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1) = 123.08 \text{ dBuV/m}$ @ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05) = 152.62 \text{ dBuV/m}$ @ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03) = 173.54 \text{ dBuV/m}$

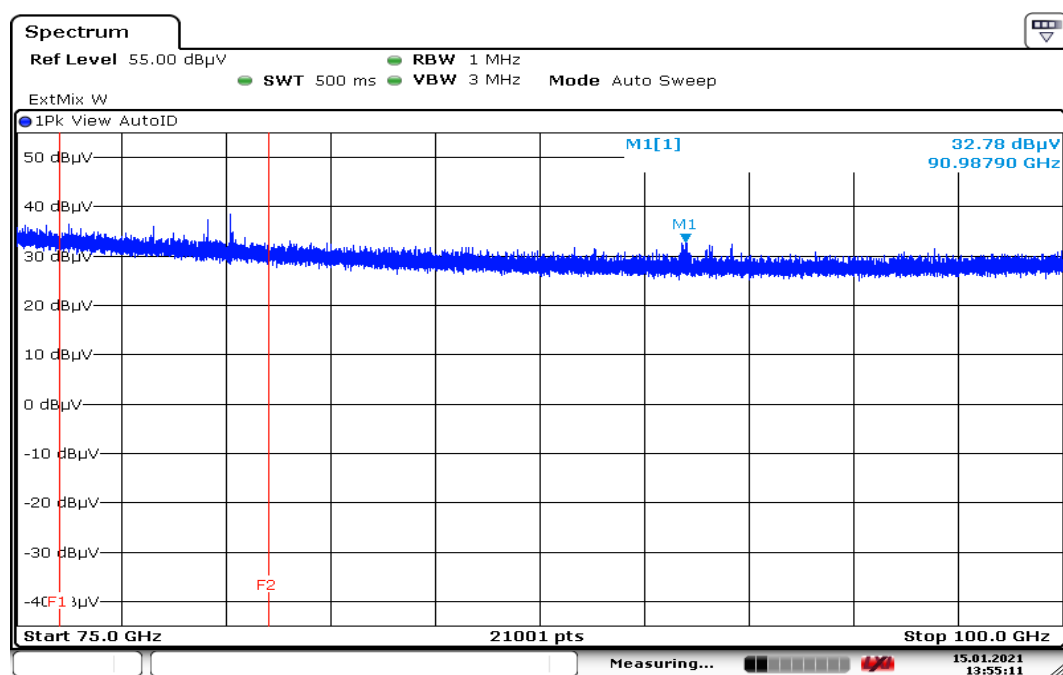75G-100G**Operation Mode:** Test Mode**Temperature:** 23.4°C**Test Date:** January 16, 2021**Humidity:** 55.3% RH**Tested by:** Ray Li

Date: 15.JAN.2021 13:55:11

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
90.9879	32.78	47.96	0.2	80.74	117.06	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \cdot \log \{ (0.000006 \cdot 377)^{0.5} \cdot 1000000 \} = 93.54 \text{ dBuV/m}$ @ 0.5m Limit = $93.54 + 20 \cdot \log (3/0.5) = 109.1 \text{ dBuV/m}$ @ 0.2m Limit = $93.54 + 20 \cdot \log (3/0.2) = 117.06 \text{ dBuV/m}$ @ 0.1m Limit = $93.54 + 20 \cdot \log (3/0.1) = 123.08 \text{ dBuV/m}$ @ 0.05m Limit = $93.54 + 20 \cdot \log (3/0.05) = 152.62 \text{ dBuV/m}$ @ 0.03m Limit = $93.54 + 20 \cdot \log (3/0.03) = 173.54 \text{ dBuV/m}$

100G-110G


Operation Mode: Test Mode

Temperature: 23.4°C

Test Date: January 16, 2021

Humidity: 55.3% RH

Tested by: Ray Li

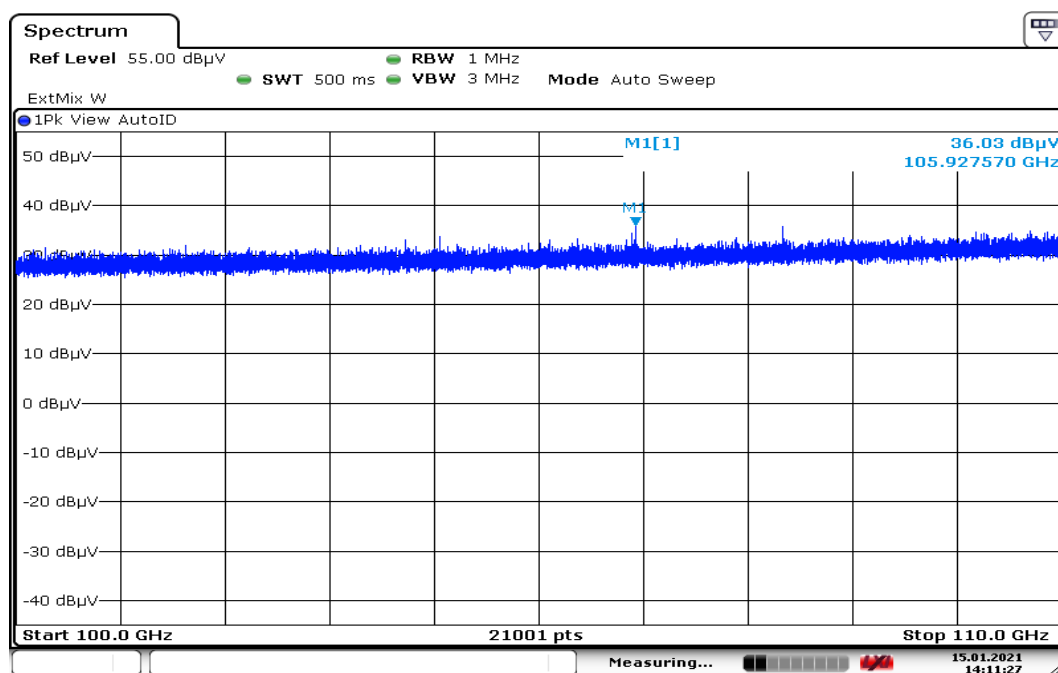

Date: 15.JAN.2021 14:11:27

Frequency (GHz)	Spectrum Reading (dBμV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
105.92757	36.03	48.61	0.05	84.64	152.62	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 * \log \{ (0.000006 * 377)^{0.5} * 1000000 \}$ = 93.54dBuV/m


@ 0.5m Limit = $93.54 + 20 * \log (3/0.5)$ = 109.1dBuV/m

@ 0.2m Limit = $93.54 + 20 * \log (3/0.2)$ = 117.06dBuV/m

@ 0.1m Limit = $93.54 + 20 * \log (3/0.1)$ = 123.08dBuV/m

@ 0.05m Limit = $93.54 + 20 * \log (3/0.05)$ = 152.62dBuV/m

@ 0.03m Limit = $93.54 + 20 * \log (3/0.03)$ = 173.54dBuV/m

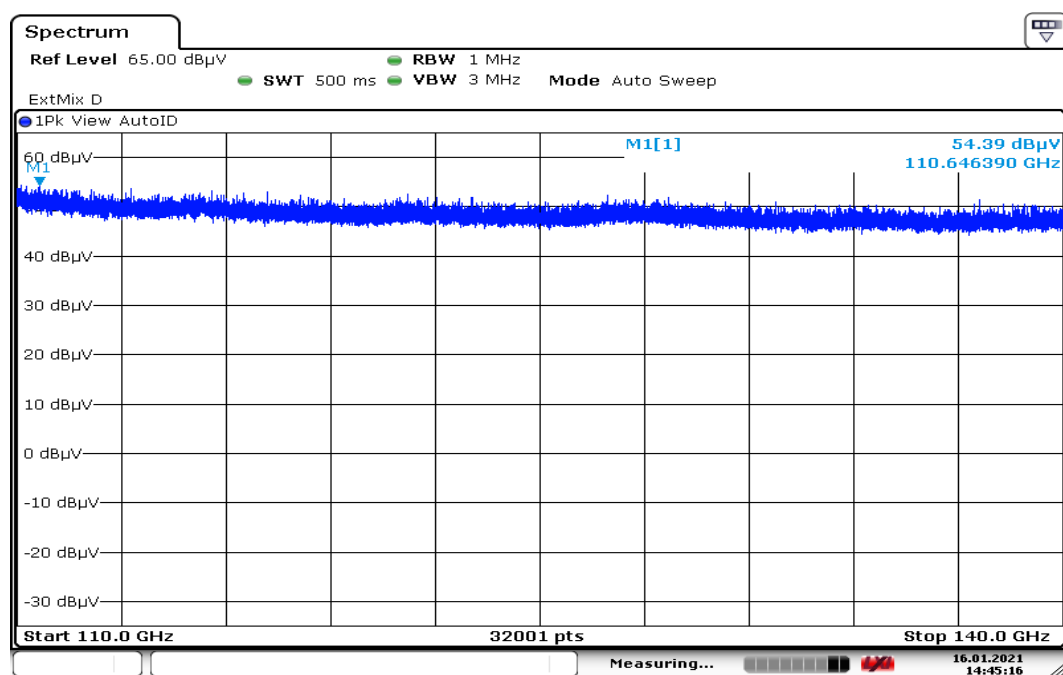110G-140G**Operation Mode:** Test Mode**Temperature:** 22.5°C**Test Date:** January 16, 2021**Humidity:** 55.8% RH**Tested by:** Ray Li

Date: 16.JAN.2021 14:45:16


Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
110.64639	54.39	50.40	0.05	104.79	152.62	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \times \log \{ (0.000006 \times 377)^{0.5} \times 1000000 \}$ = 93.54dBuV/m@ 0.5m Limit = $93.54 + 20 \times \log (3/0.5)$ = 109.1dBuV/m@ 0.2m Limit = $93.54 + 20 \times \log (3/0.2)$ = 117.06dBuV/m@ 0.1m Limit = $93.54 + 20 \times \log (3/0.1)$ = 123.08dBuV/m@ 0.05m Limit = $93.54 + 20 \times \log (3/0.05)$ = 152.62dBuV/m@ 0.03m Limit = $93.54 + 20 \times \log (3/0.03)$ = 173.54dBuV/m

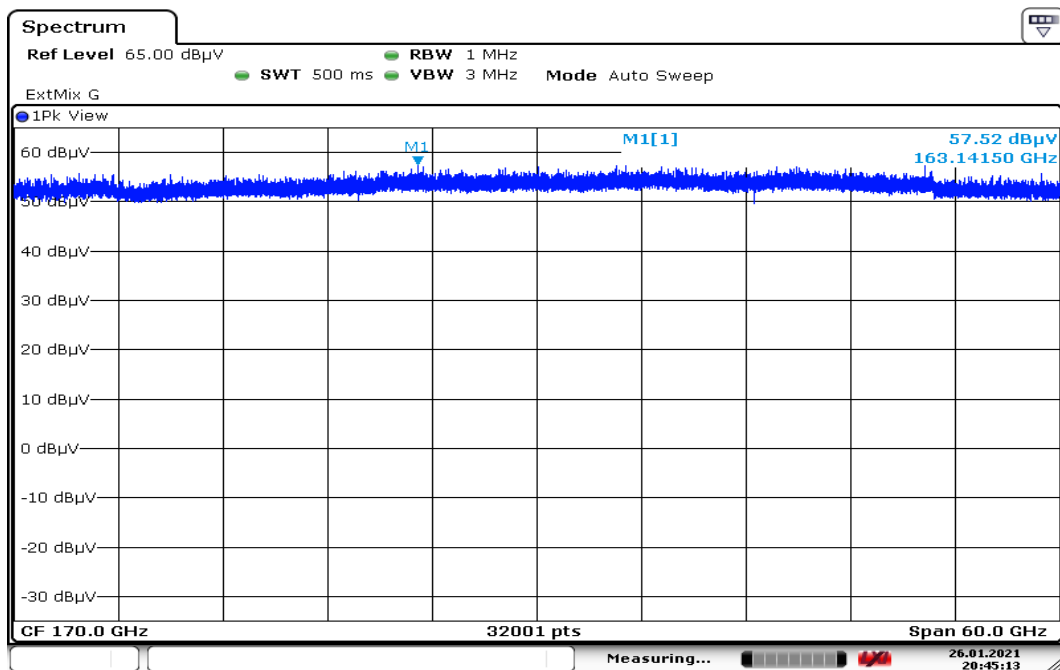140G-200G**Operation Mode:** Test Mode**Temperature:** 22.8°C**Test Date:** January 26, 2021**Humidity:** 58.5% RH**Tested by:** Ray Li

Date: 26.JAN.2021 20:45:14


Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
163.1415	57.52	53.20	0.03	110.72	173.54	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. 40GHz~200GHz Limit :

@ 3m Limit = $20 \times \log \{ (0.000006 \times 377)^{0.5} \times 1000000 \} = 93.54 \text{ dBuV/m}$ @ 0.5m Limit = $93.54 + 20 \times \log (3/0.5) = 109.1 \text{ dBuV/m}$ @ 0.2m Limit = $93.54 + 20 \times \log (3/0.2) = 117.06 \text{ dBuV/m}$ @ 0.1m Limit = $93.54 + 20 \times \log (3/0.1) = 123.08 \text{ dBuV/m}$ @ 0.05m Limit = $93.54 + 20 \times \log (3/0.05) = 152.62 \text{ dBuV/m}$ @ 0.03m Limit = $93.54 + 20 \times \log (3/0.03) = 173.54 \text{ dBuV/m}$

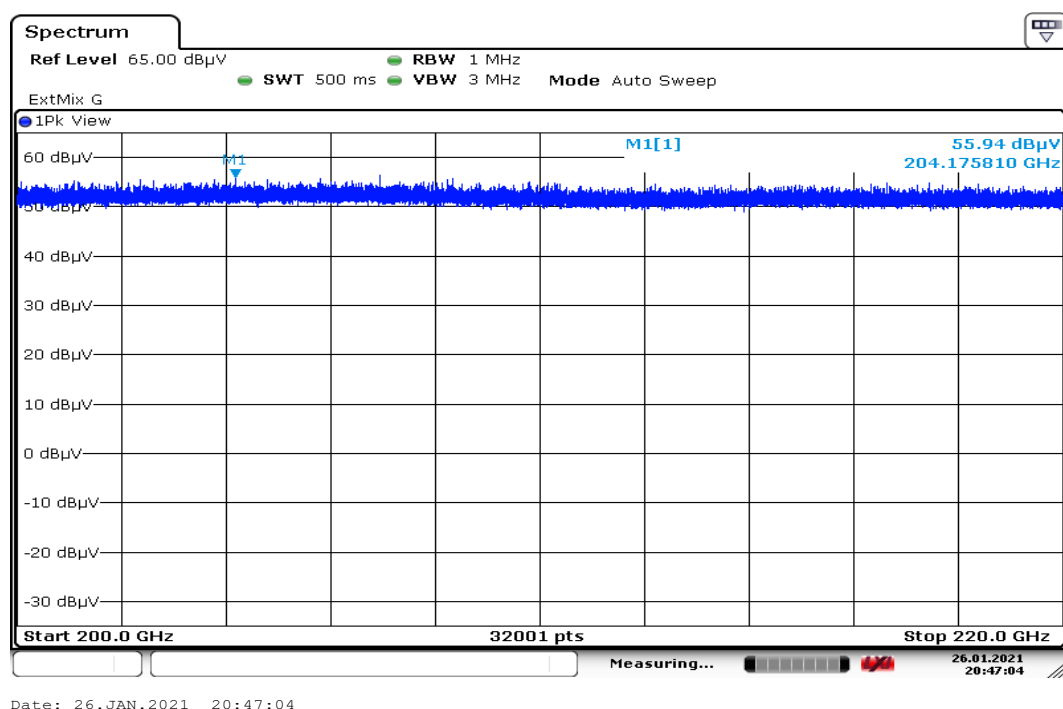200G-220G**Operation Mode:** Test Mode**Temperature:** 22.8°C**Test Date:** January 26, 2021**Humidity:** 58.5% RH**Tested by:** Ray Li

Date: 26.JAN.2021 20:47:04

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
204.17581	55.94	54.24	0.2	110.18	119.28	Peak


Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. Above 200GHz Limit :

$$@ 3m \text{ Limit} = 20 * \text{Log} \{ (0.00001 * 377)^{0.5} * 1000000 \} = 95.76 \text{ dBuV/m}$$

$$@ 0.2m \text{ Limit} = 95.76 + 20 * \text{Log} (3/0.2) = 119.28 \text{ dBuV/m}$$

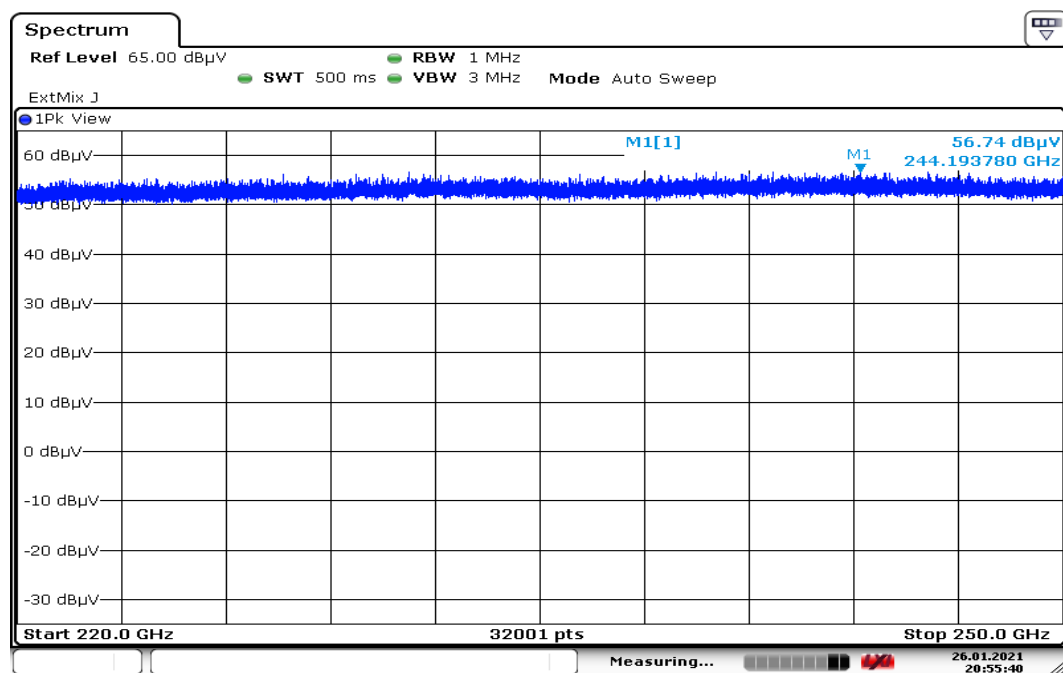220G-250G**Operation Mode:** Test Mode**Temperature:** 22.8°C**Test Date:** January 26, 2021**Humidity:** 58.5% RH**Tested by:** Ray Li

Date: 26.JAN.2021 20:55:40

Frequency (GHz)	Spectrum Reading (dBuV)	Antenna Factor (dB/m)	Distance (m)	dBuV/m	Limit (dBuV/m)	Detector
244.19378	56.74	54.89	0.2	111.63	119.28	Peak

Remark:

1. dBuV/m = Spectrum Reading (dBuV) + Antenna Factor (dB/m)

2. Above 200GHz Limit :

$$@ 3m \text{ Limit} = 20 * \text{Log} \{ (0.00001 * 377)^{0.5} * 1000000 \} = 95.76 \text{ dBuV/m}$$


$$@ 0.2m \text{ Limit} = 95.76 + 20 * \text{Log} (3/0.2) = 119.28 \text{ dBuV/m}$$

8.3 FREQUENCY STABILITY

LIMIT

According to FCC 95.3379(b), Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to $+50$ degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

Test Configuration

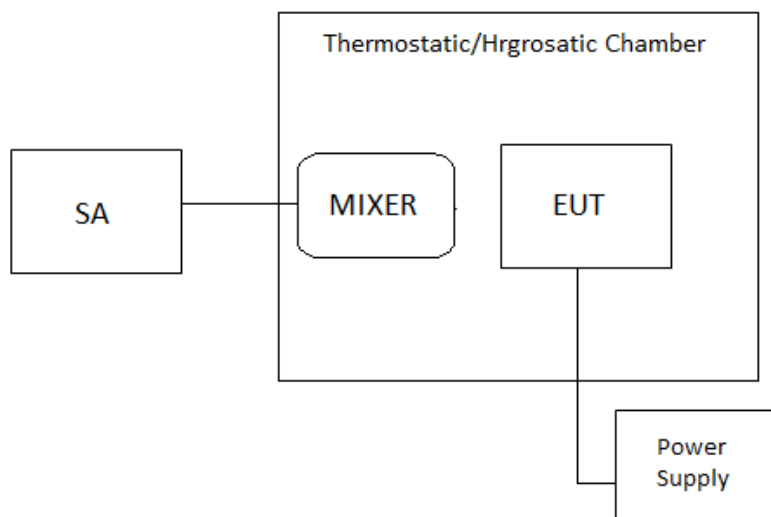

TEST PROCEDURE

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C . After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of $+50^{\circ}\text{C}$ reached.



Report No.: T201202W01-RP

Page 81 / 116

Rev. 01

TEST RESULTS

No non-compliance noted.

99%

Temperature: 16.9°C **Test date:** January 15, 2021
Humidity: 59% RH **Tested by:** Jerry Chang

Temperature: 23.8°C **Test date:** January 20, 2021
Humidity: 56.1% RH **Tested by:** Jerry Chang

240MHz

Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
85	12	78.105673	78.335051	76-81	Pass
80		78.105673	78.335051		Pass
70		78.106397	78.335051		Pass
60		78.106397	78.335051		Pass
50		78.106397	78.335051		Pass
40		78.105673	78.335051		Pass
30		78.105673	78.335051		Pass
20		78.106397	78.335051		Pass
10		78.106397	78.335051		Pass
0		78.104949	78.335051		Pass
-10		78.106397	78.335051		Pass
-20		78.106397	78.334327		Pass
-30		78.105673	78.335051		Pass
-40		78.106397	78.334327		Pass

Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
20	10.2	78.106397	78.335051	76-81	Pass
	12	78.102779	78.337221		Pass
	13.8	78.105673	78.334327		Pass



Report No.: T201202W01-RP

Page 82 / 116

Rev. 01

OBW: 26dB

Temperature: 21.5°C

Test date: February 03, 2021

Humidity: 55.2% RH

Tested by: Jerry Chang

240MHz

Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
85	12	79.5486	79.8119	76-81	Pass
80		79.5510	79.8138		Pass
70		79.5486	79.8094		Pass
60		79.5480	79.8137		Pass
50		79.5495	79.8138		Pass
40		79.5485	79.8137		Pass
30		79.5485	79.8133		Pass
20		79.5480	79.8142		Pass
10		79.5500	80.1148		Pass
0		79.5485	79.8137		Pass
-10		79.5480	79.8142		Pass
-20		79.5485	79.8142		Pass
-30		79.5485	79.8137		Pass
-40		79.5481	79.8138		Pass

Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
20	10.2	79.55001	79.8138	76-81	Pass
	12	79.54851	79.8137		Pass
	13.8	79.54901	79.8142		Pass


Report No.: T201202W01-RP

Test Plot


99%

Voltage: 12V


Environment Temperature: 85°C

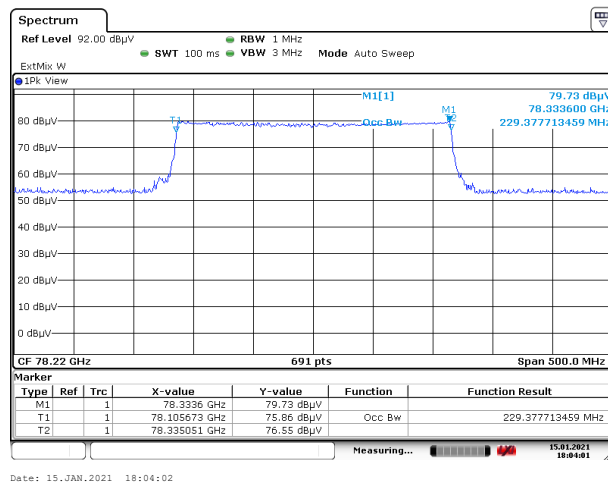


Environment Temperature: 80°C

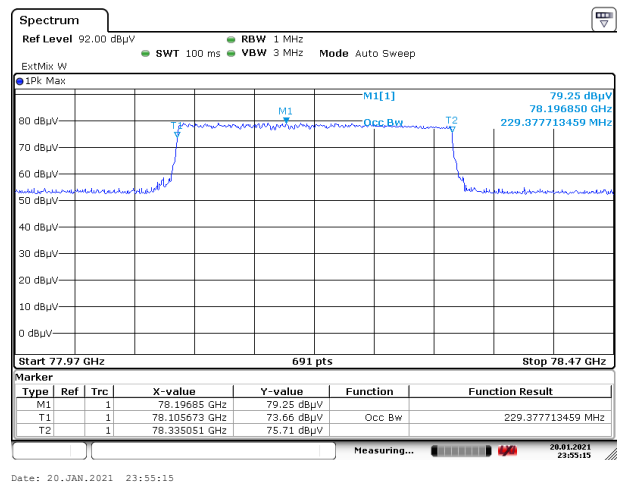



Environment Temperature: 70°C

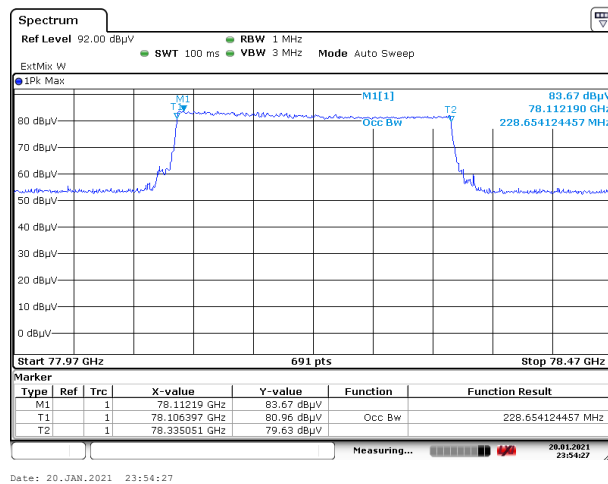



Environment Temperature: 60°C

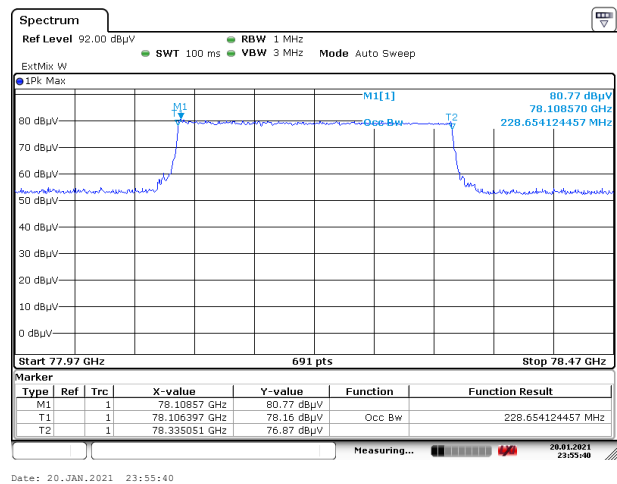


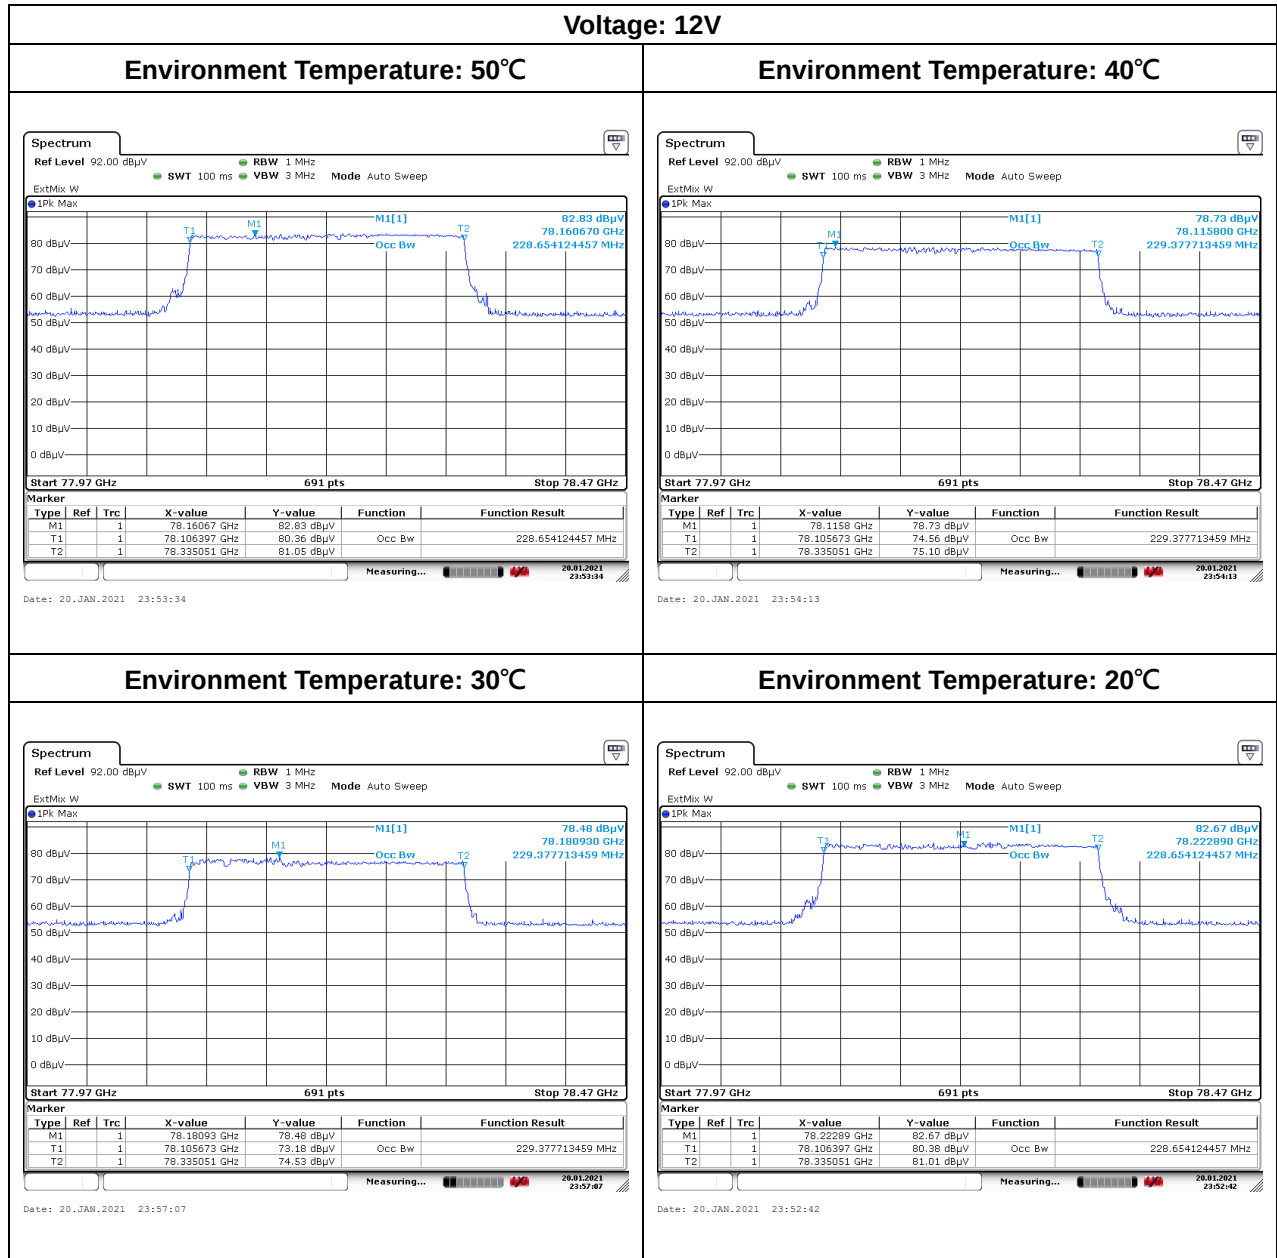


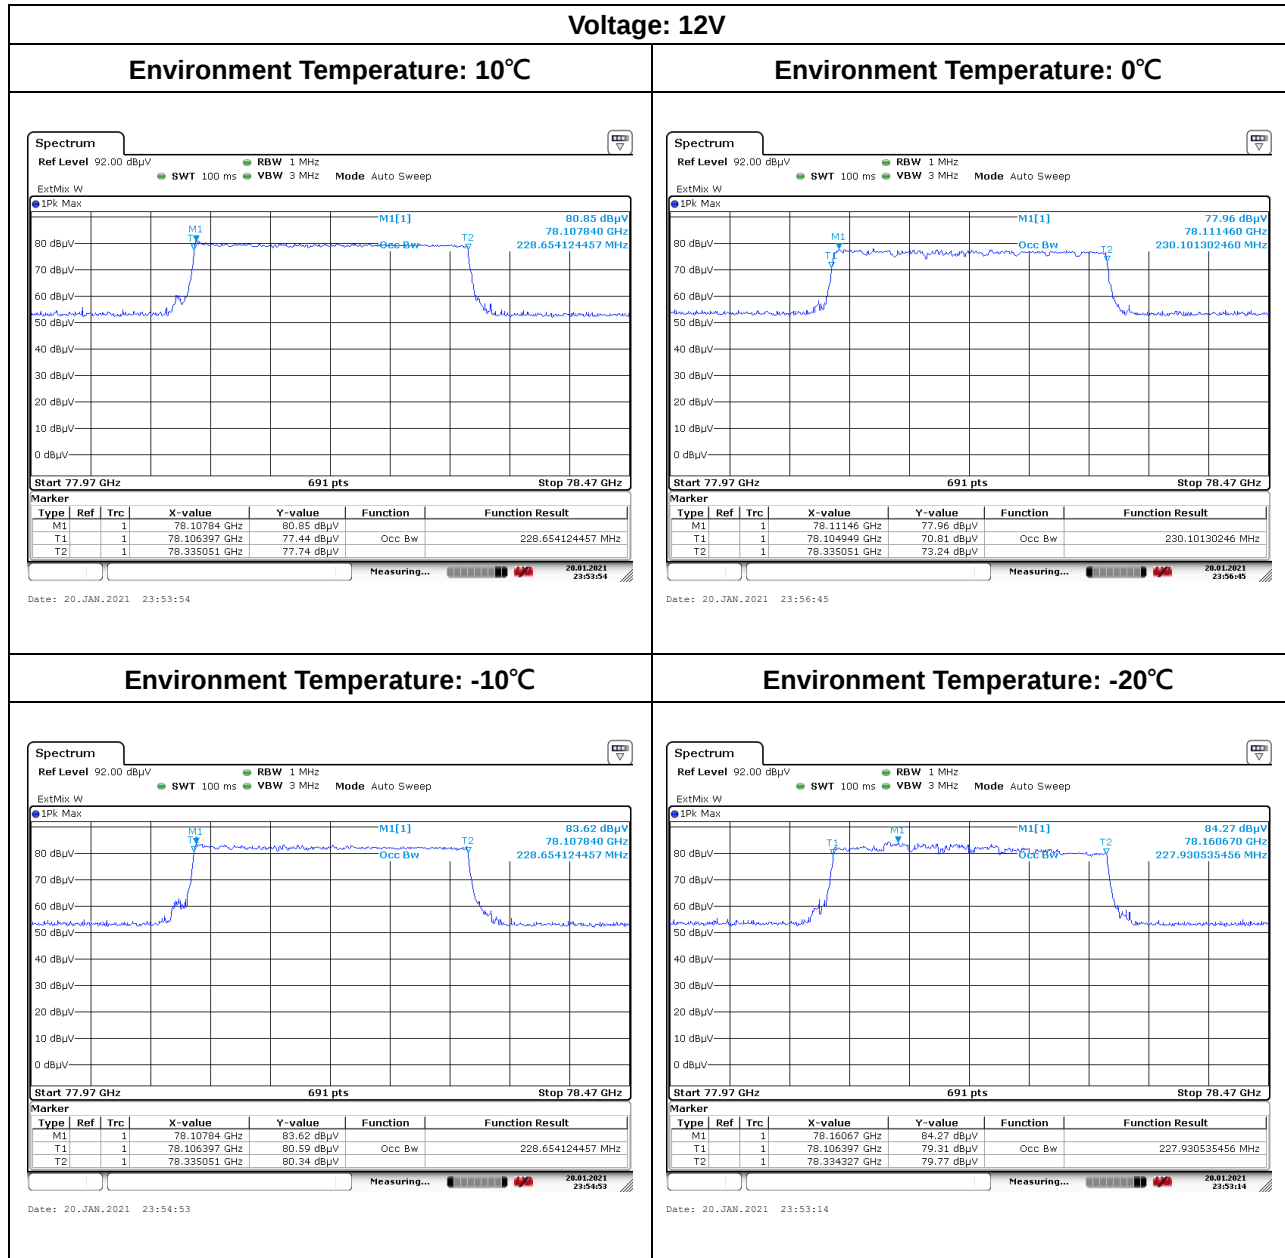


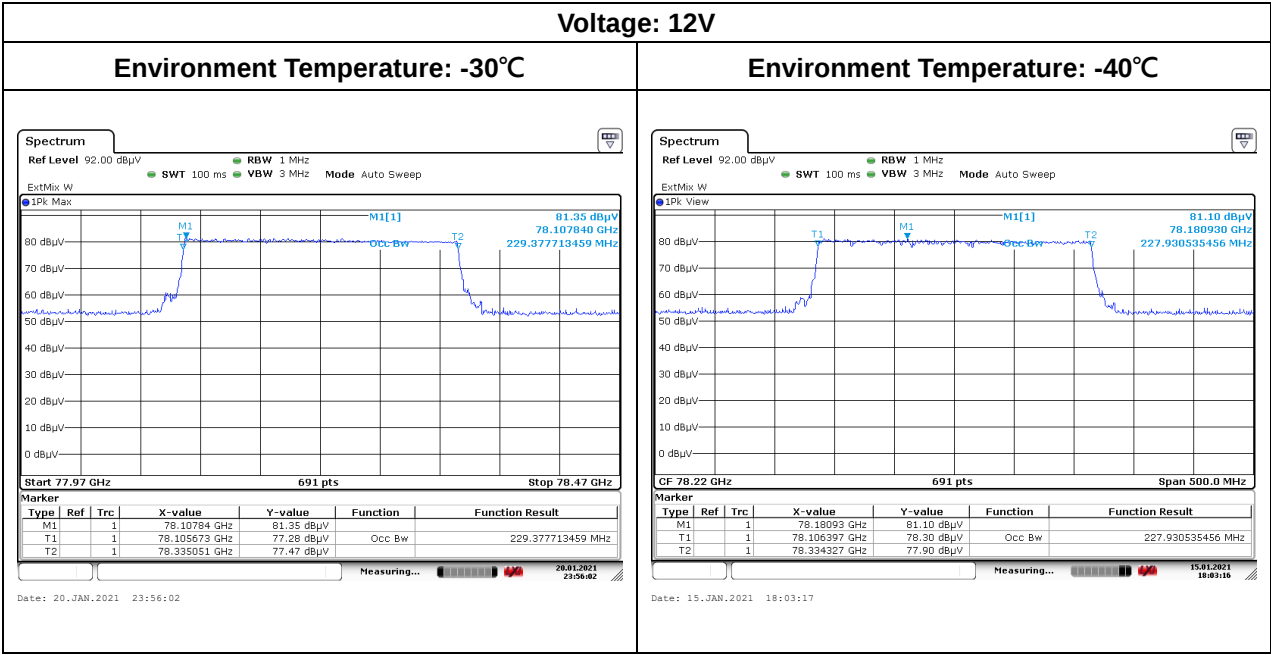


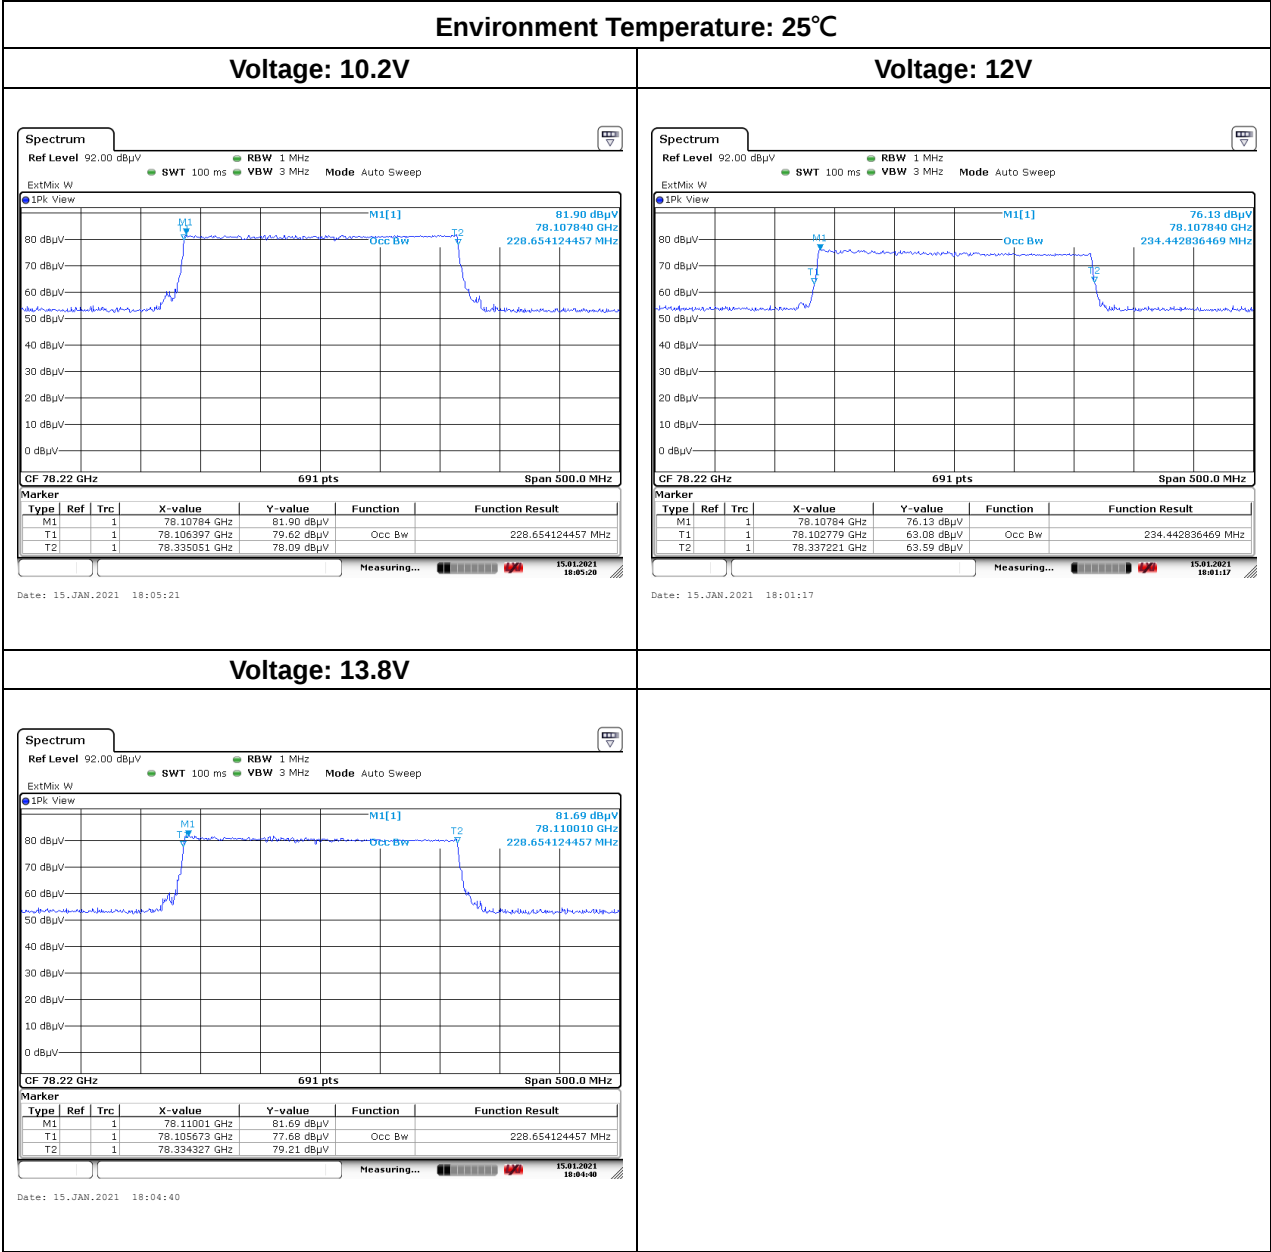


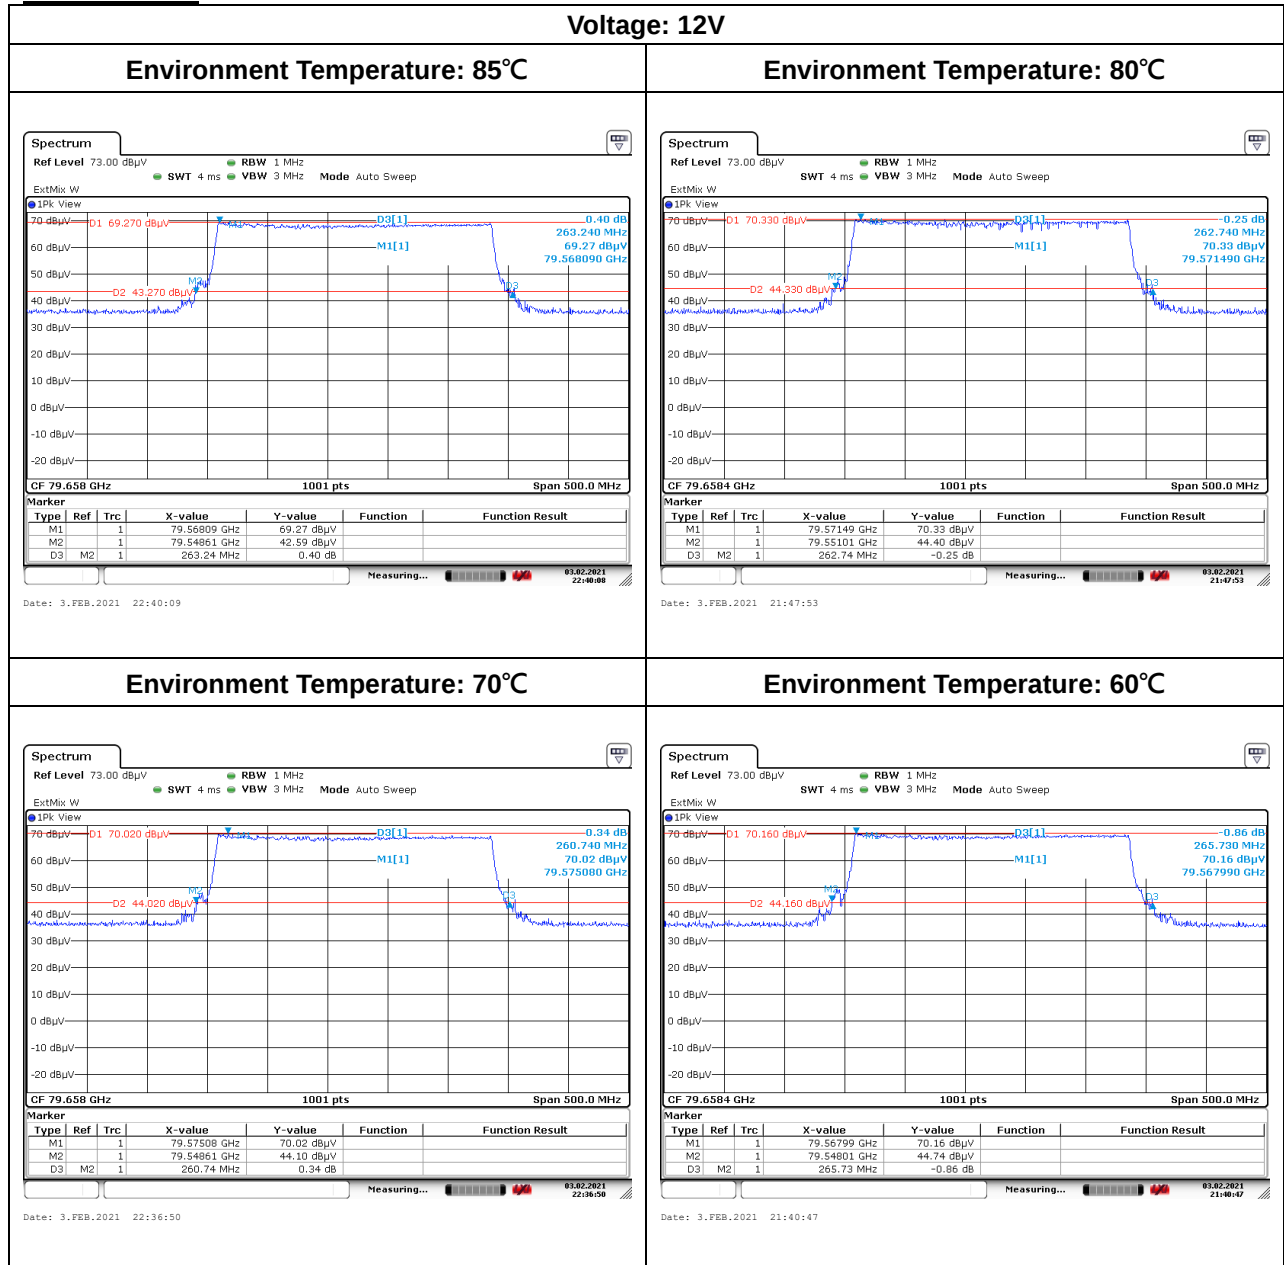OBW: 26dB

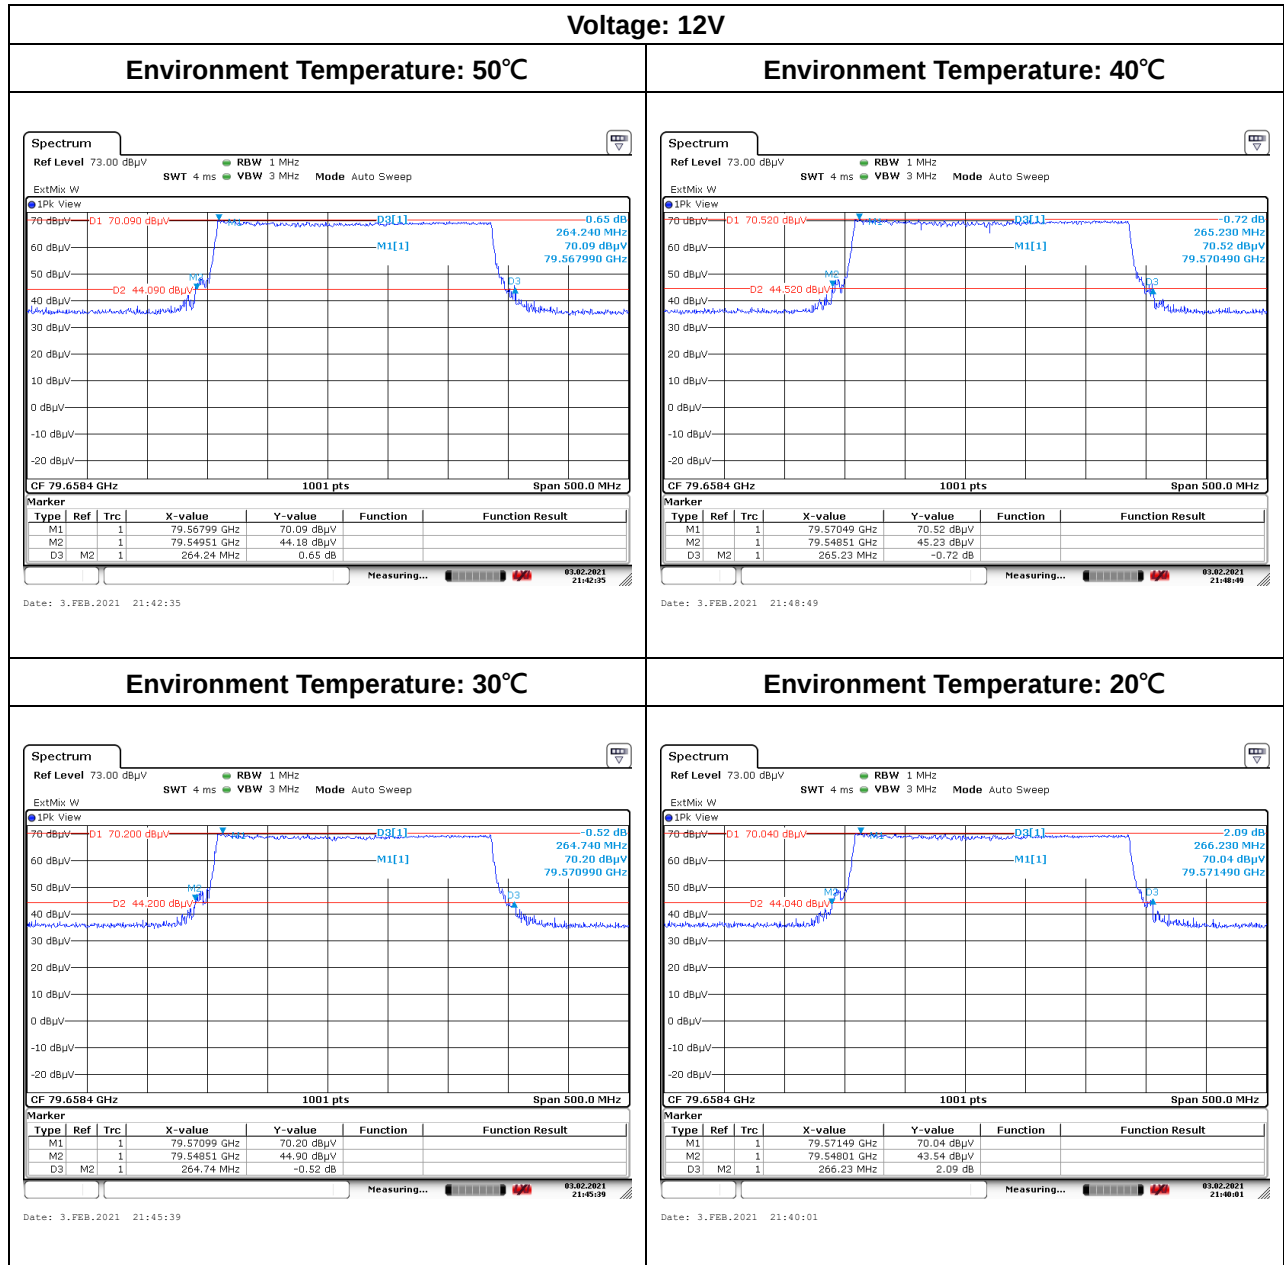

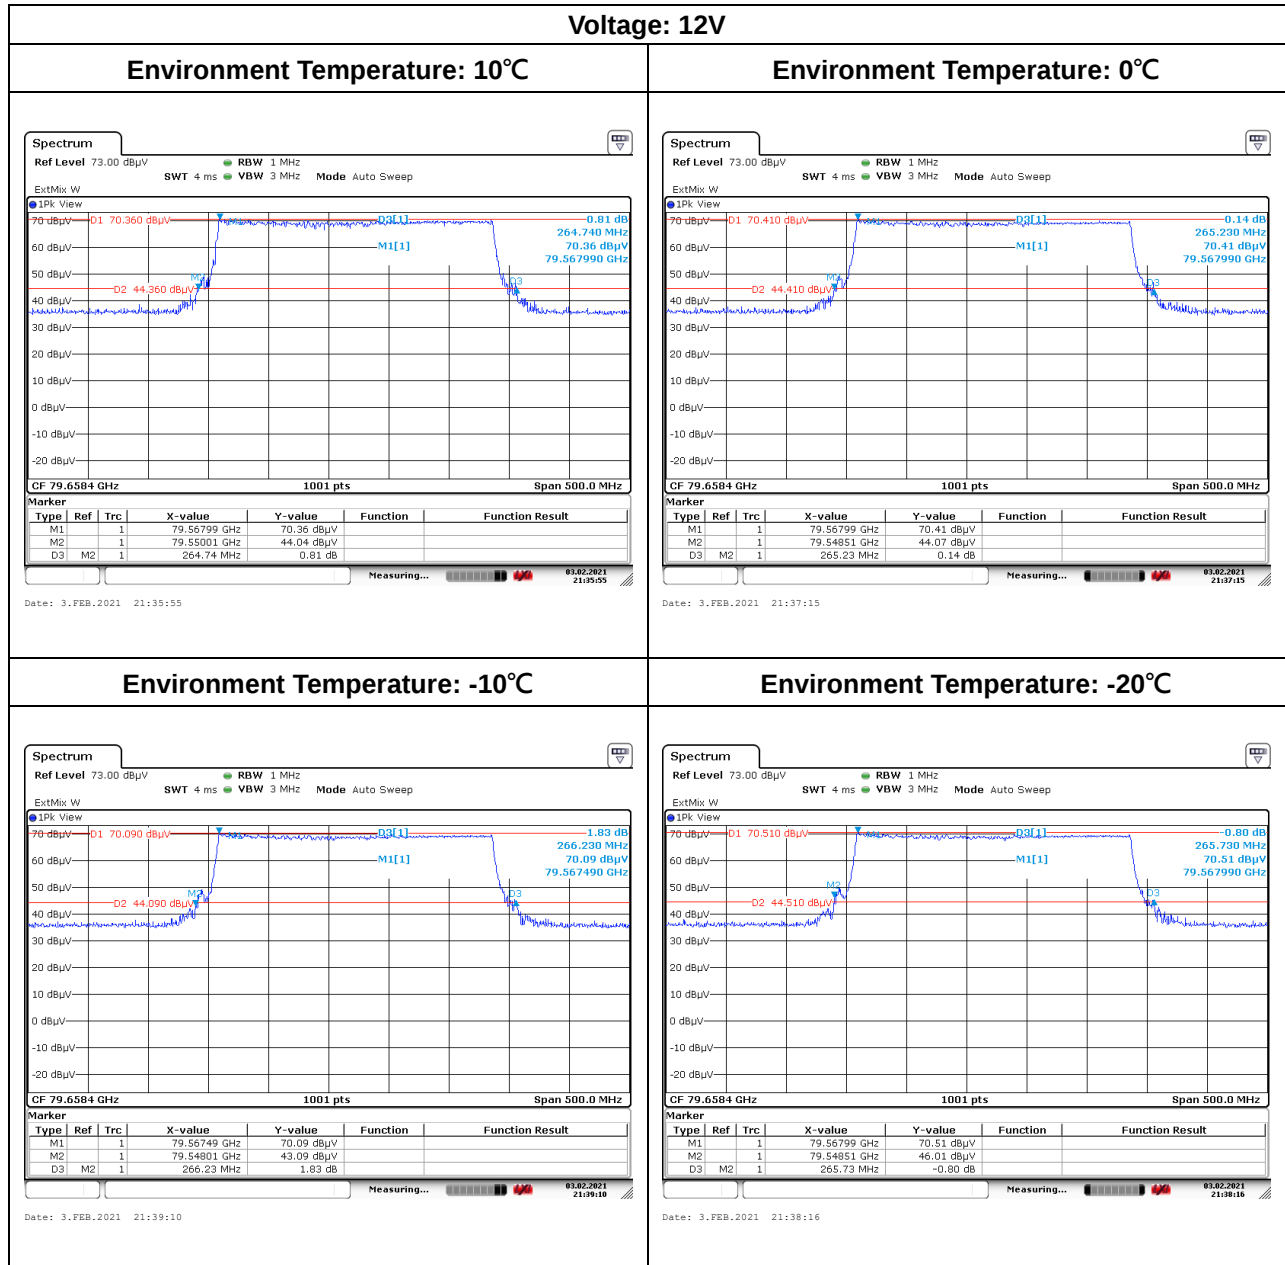

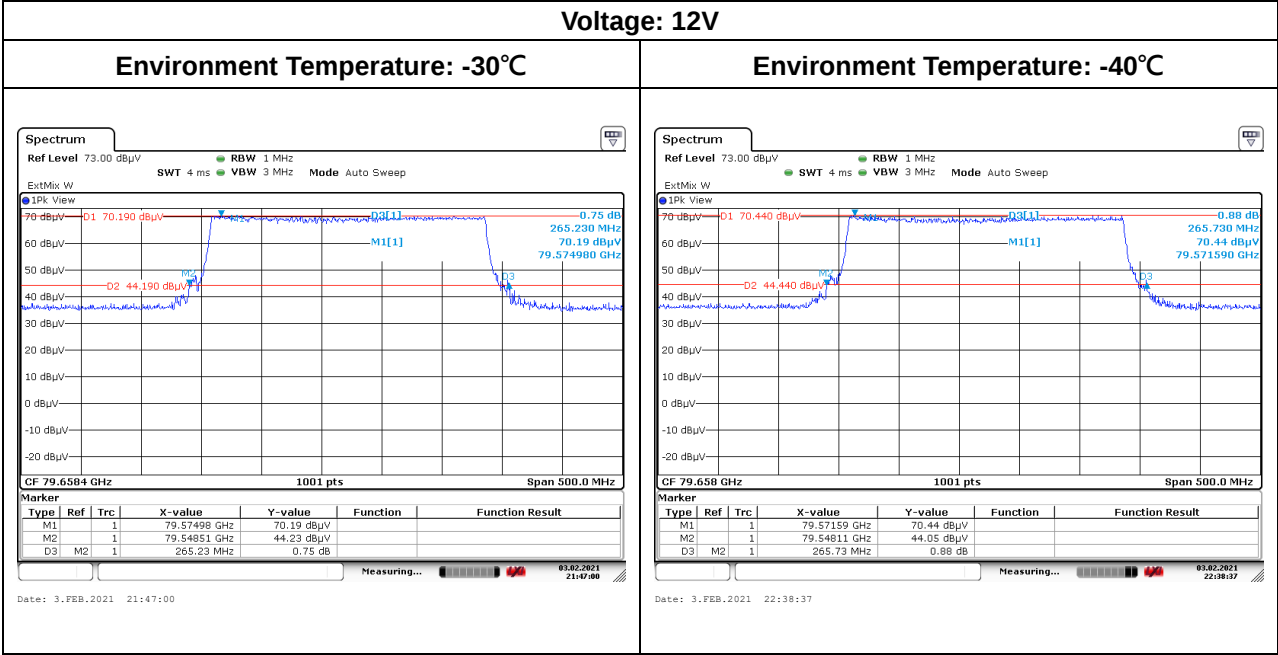

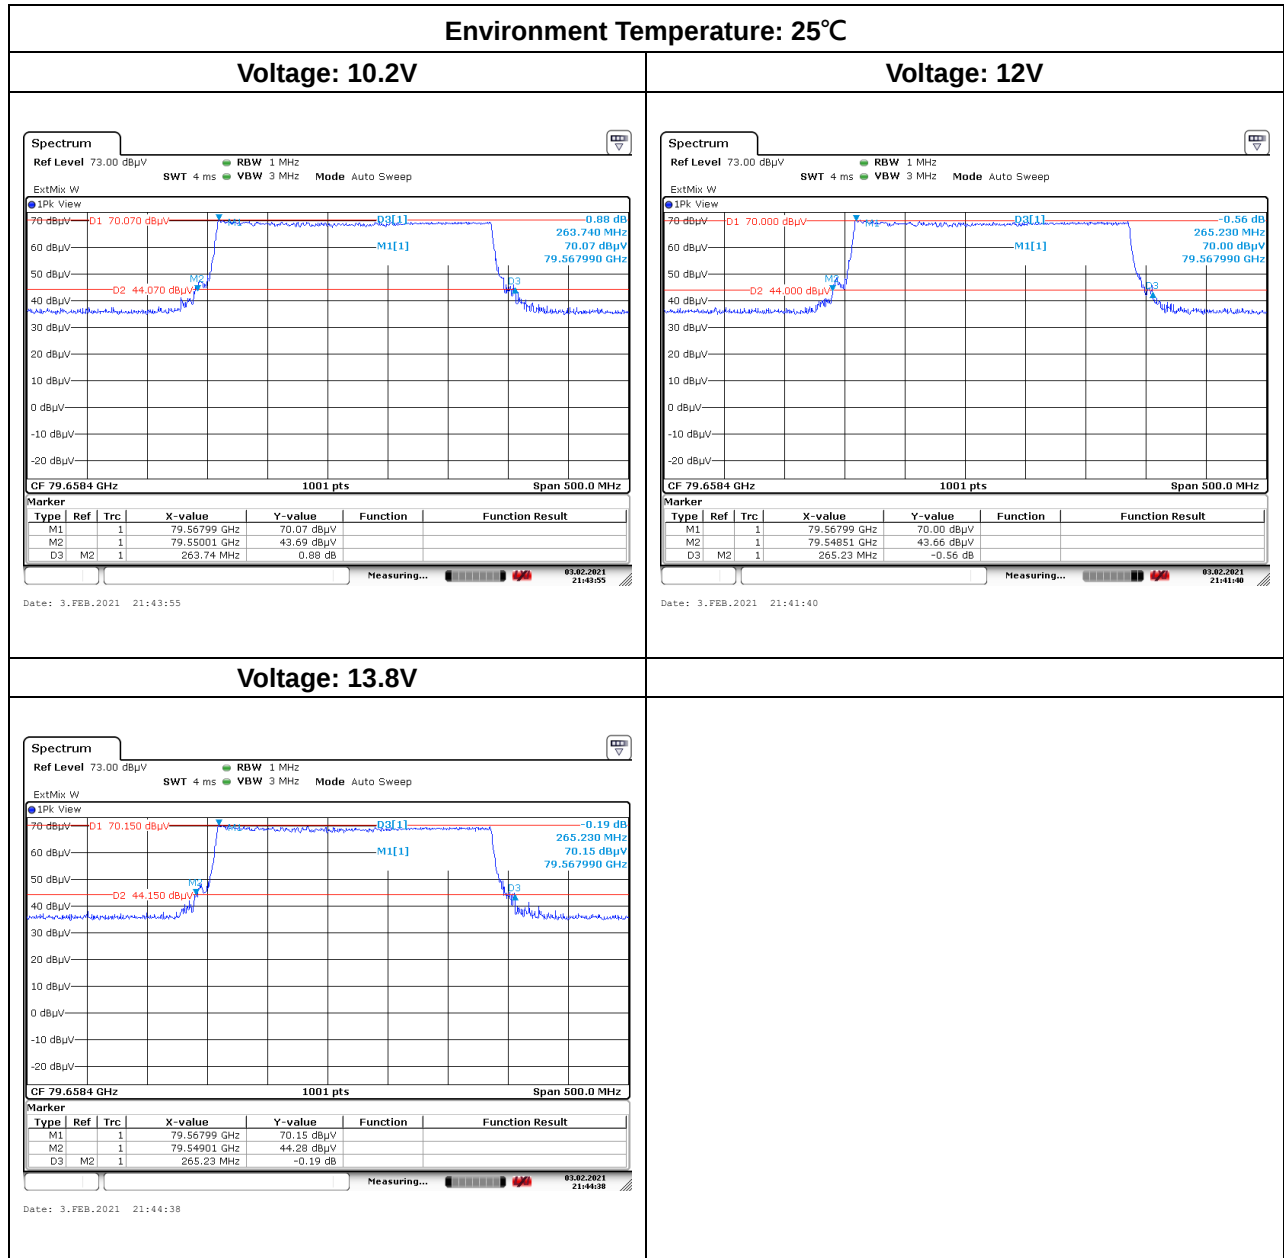




Report No.: T201202W01-RP

Page 93 / 116
Rev. 01

99%

Temperature: 16.9°C **Test date:** January 15, 2021
Humidity: 59% RH **Tested by:** Jerry Chang

Temperature: 23.8°C **Test date:** January 20, 2021
Humidity: 56.1% RH **Tested by:** Jerry Chang

480MHz

Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
85	12	79.57411	80.03581	76-81	Pass
80		79.57466	80.03544		Pass
70		79.57234	80.03544		Pass
60		79.57234	80.03544		Pass
50		79.57234	80.03544		Pass
40		79.57234	80.03544		Pass
30		79.57466	80.03544		Pass
20		79.57234	80.03544		Pass
10		79.57234	80.03544		Pass
0		79.57466	80.03544		Pass
-10		79.57234	80.03544		Pass
-20		79.57234	80.03544		Pass
-30		79.57234	80.03544		Pass
-40		79.57411	80.03335		Pass

Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
20	10.2	79.57411	80.03581	76-81	Pass
	12	79.57411	80.03581		Pass
	13.8	79.57411	80.03581		Pass

OBW: 26dB**Temperature:** 21.5°C**Test date:** February 03, 2021**Humidity:** 55.2% RH**Tested by:** Jerry Chang**480MHz**

Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
85	12	79.5530	80.0565	76-81	Pass
80		79.5546	80.0549		Pass
70		79.5514	80.0573		Pass
60		79.5522	80.0581		Pass
50		79.5490	80.0581		Pass
40		79.5522	80.0565		Pass
30		79.5522	80.0573		Pass
20		79.5530	80.0557		Pass
10		79.5578	80.0581		Pass
0		79.5570	80.0573		Pass
-10		79.5514	80.0589		Pass
-20		79.5522	80.0565		Pass
-30		79.5538	80.0557		Pass
-40		79.5506	80.0597		Pass

Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
20	10.2	79.55461	80.0581	76-81	Pass
	12	79.55222	80.0549		Pass
	13.8	79.55461	80.0557		Pass





Report No.: T201202W01-RP


Page 95 / 116
Rev. 01


Test Plot

99%

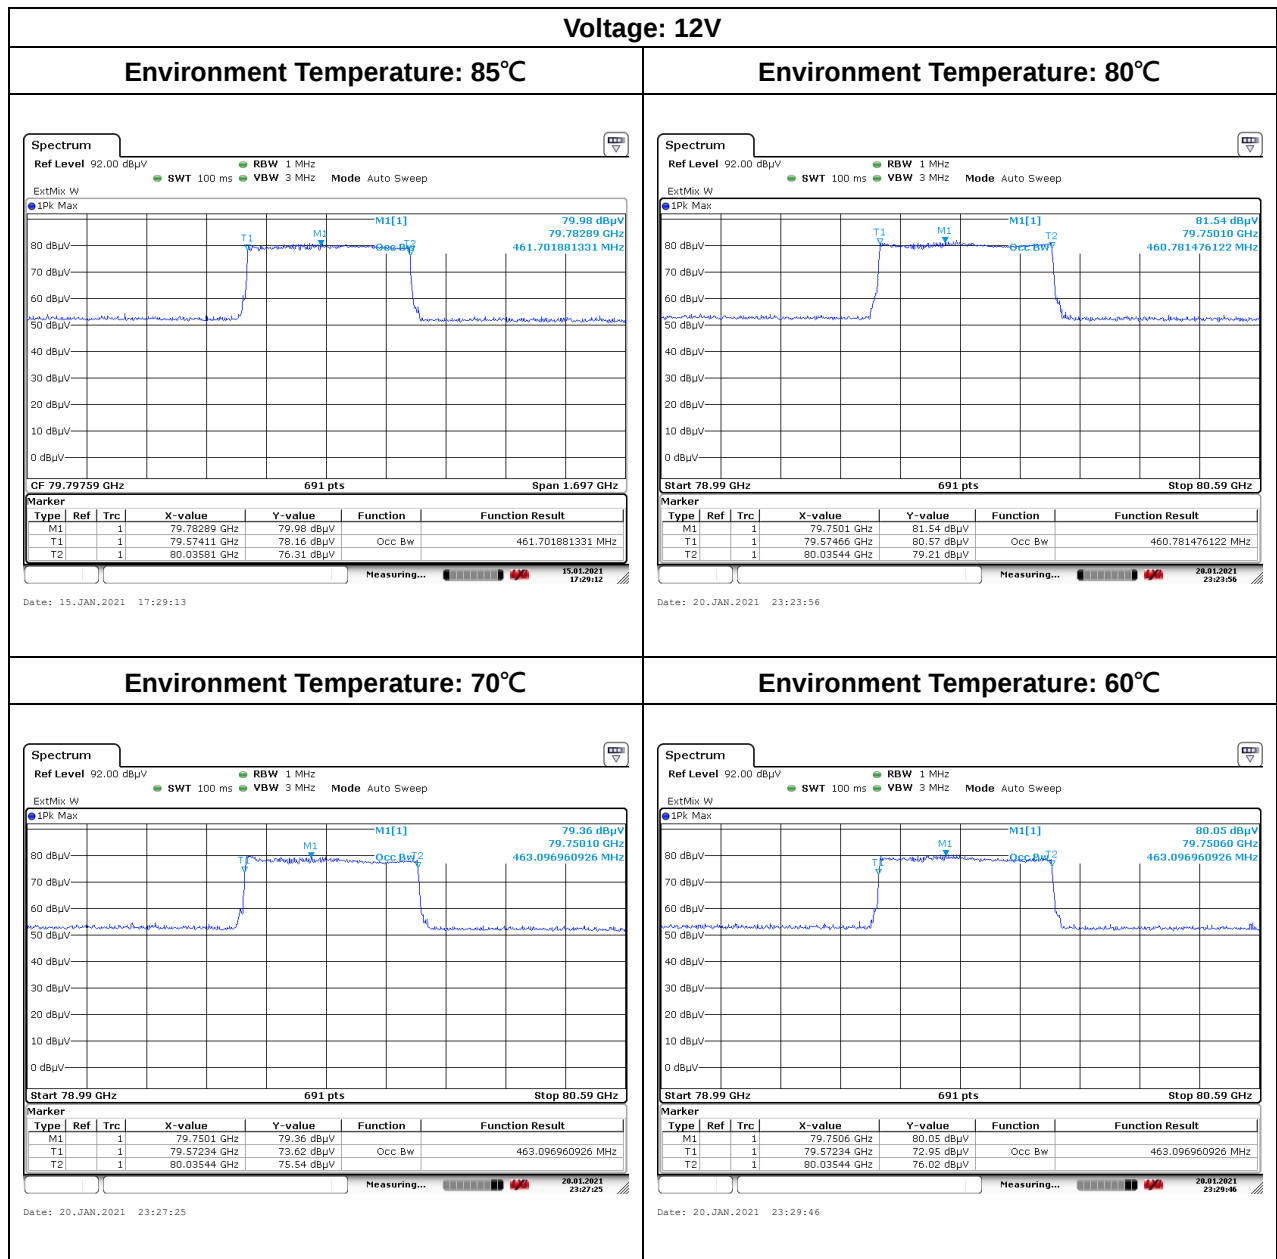

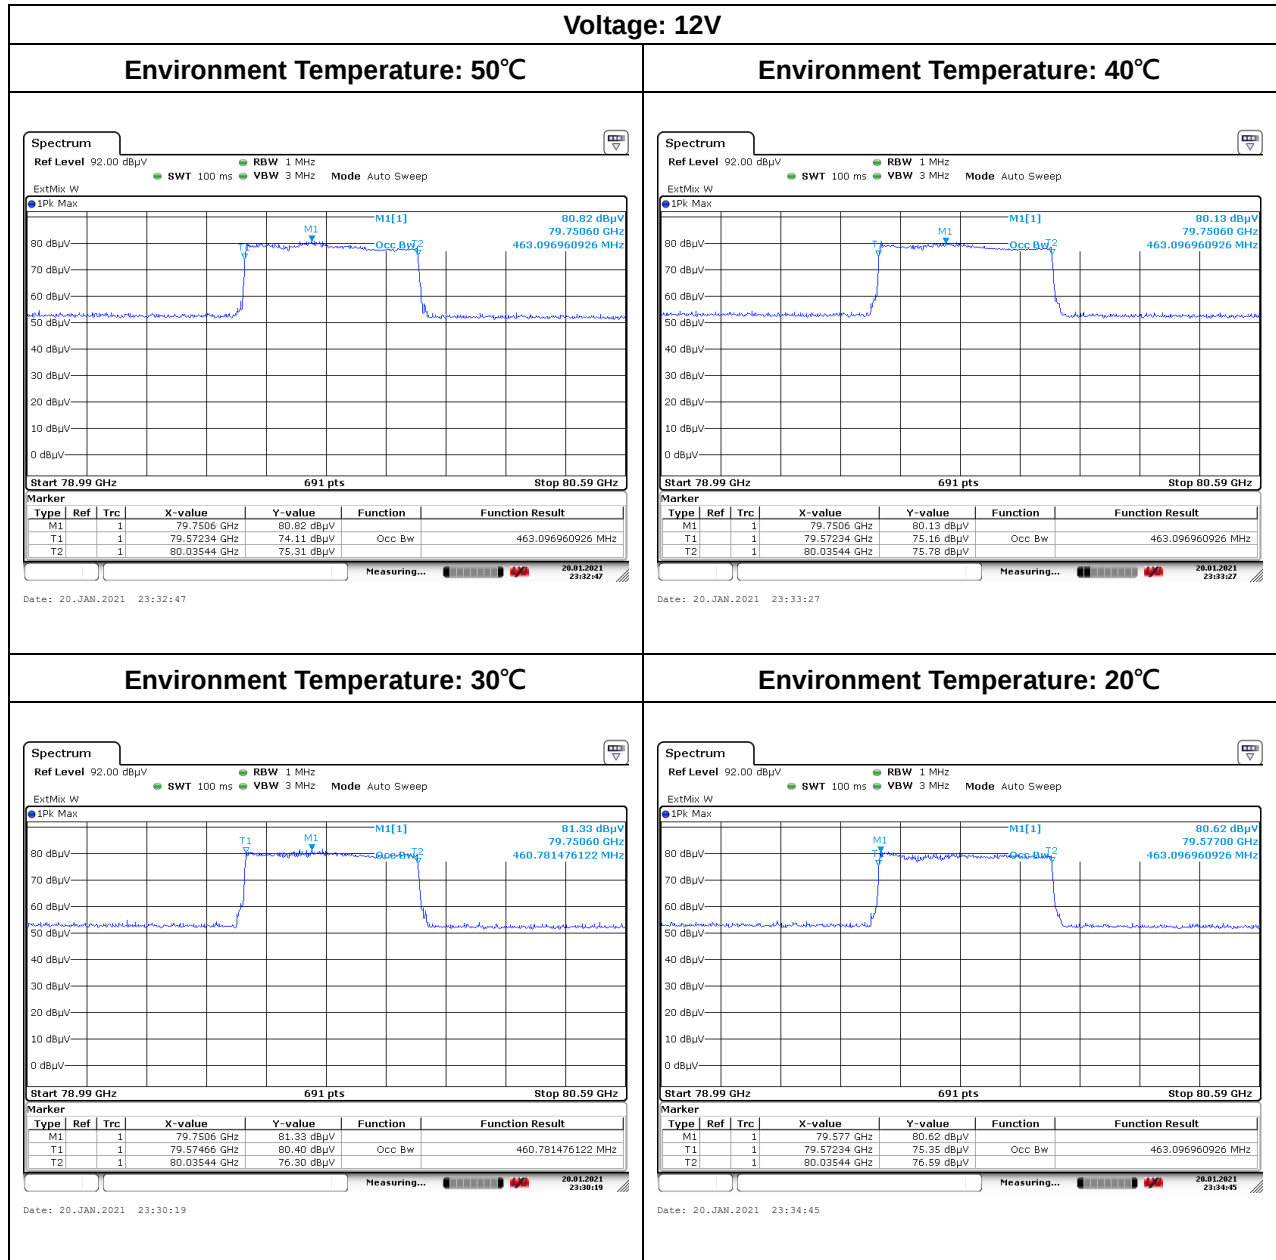


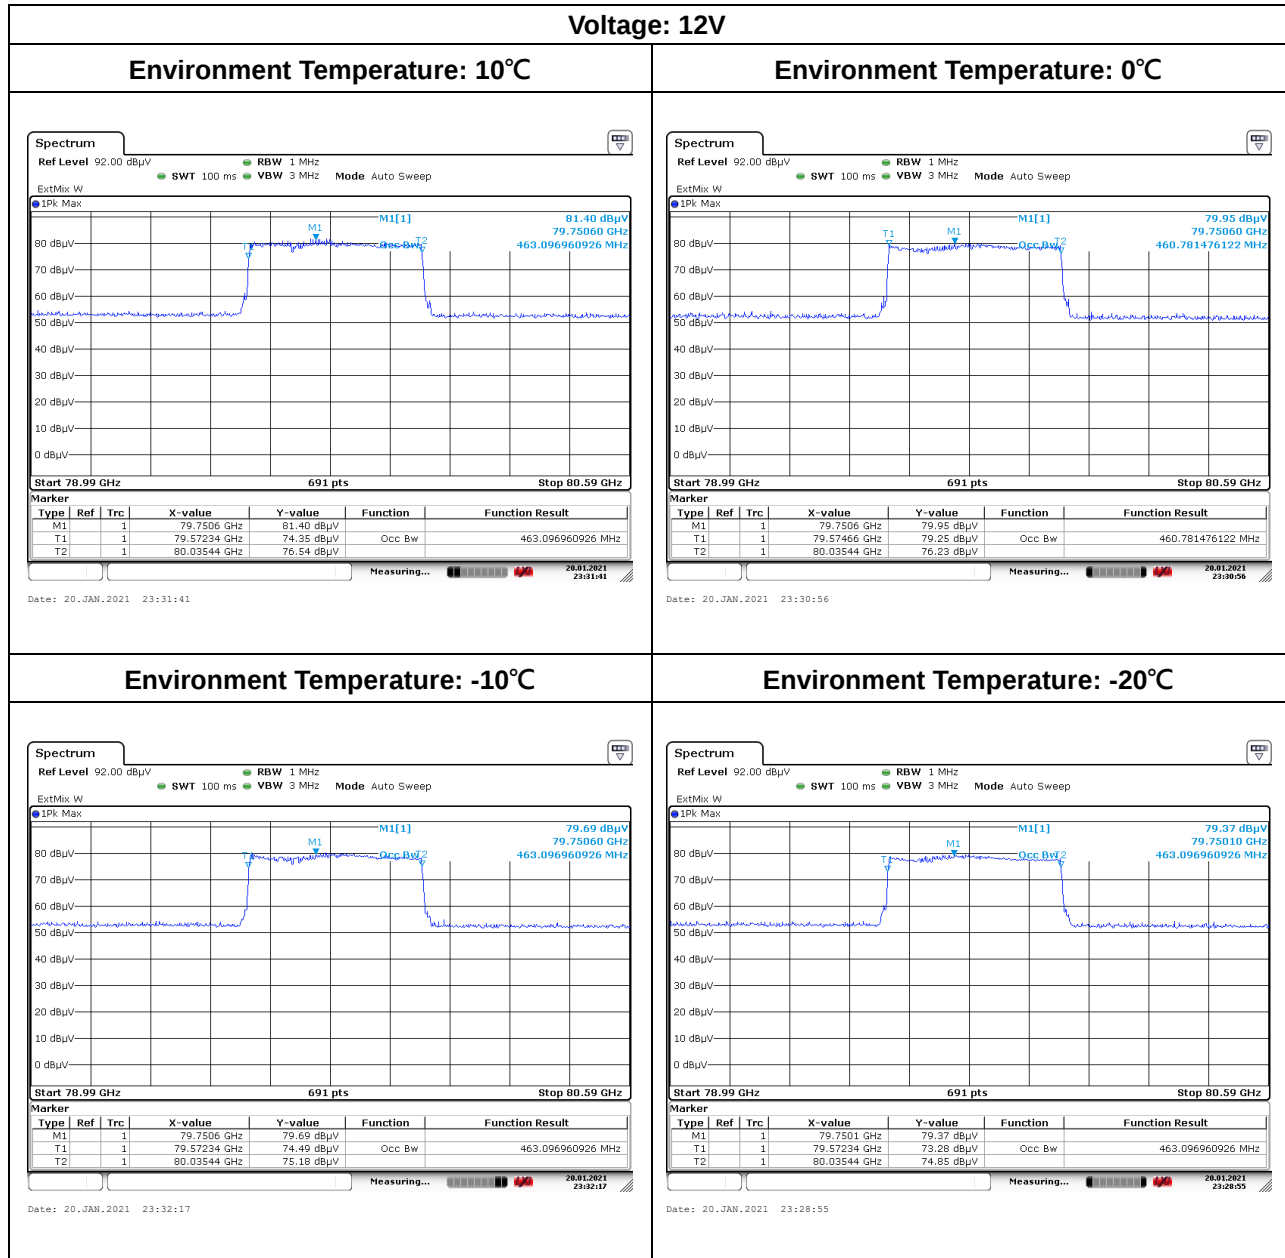

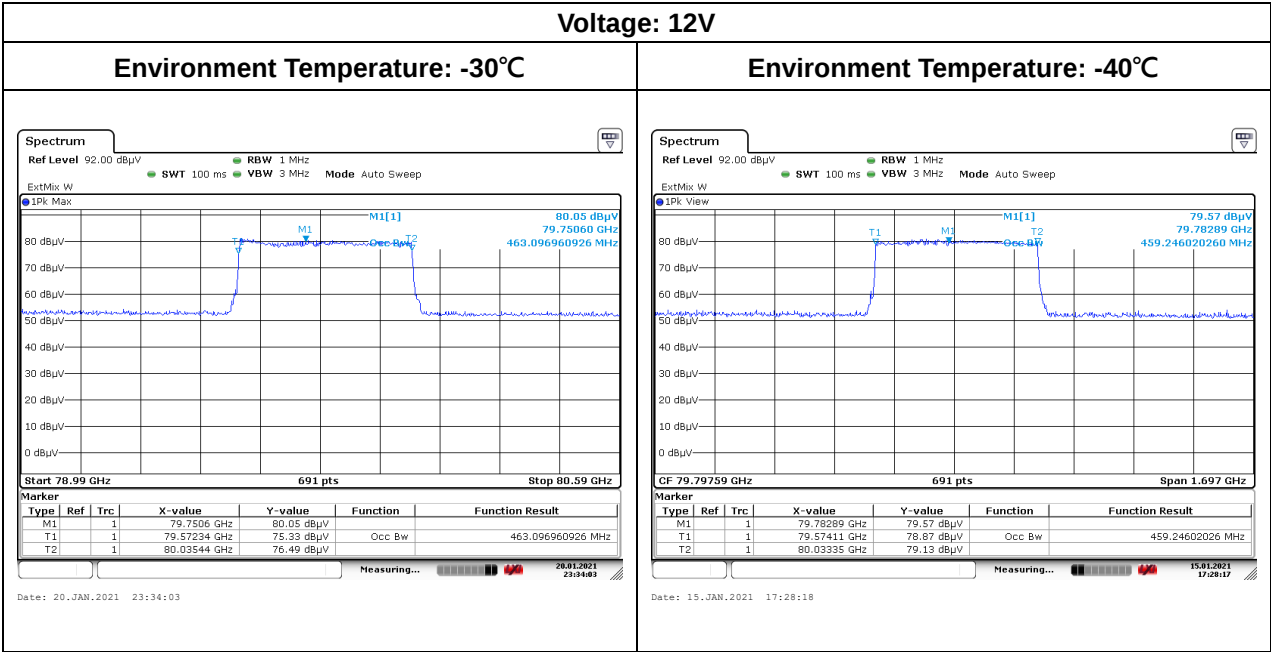


Environment Temperature: 25°C


Voltage: 10.2V

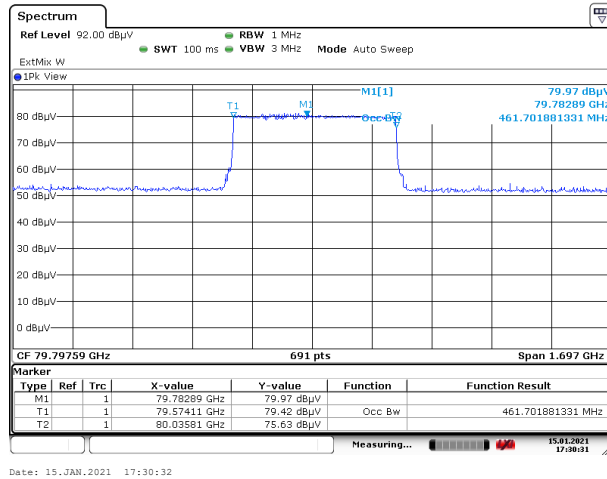



Voltage: 12V

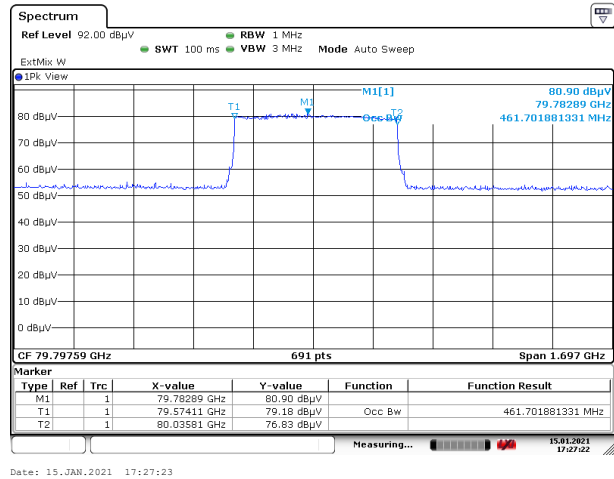


Voltage: 13.8V

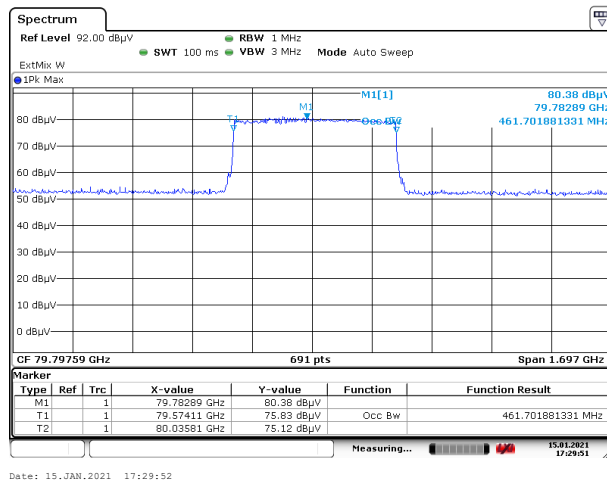

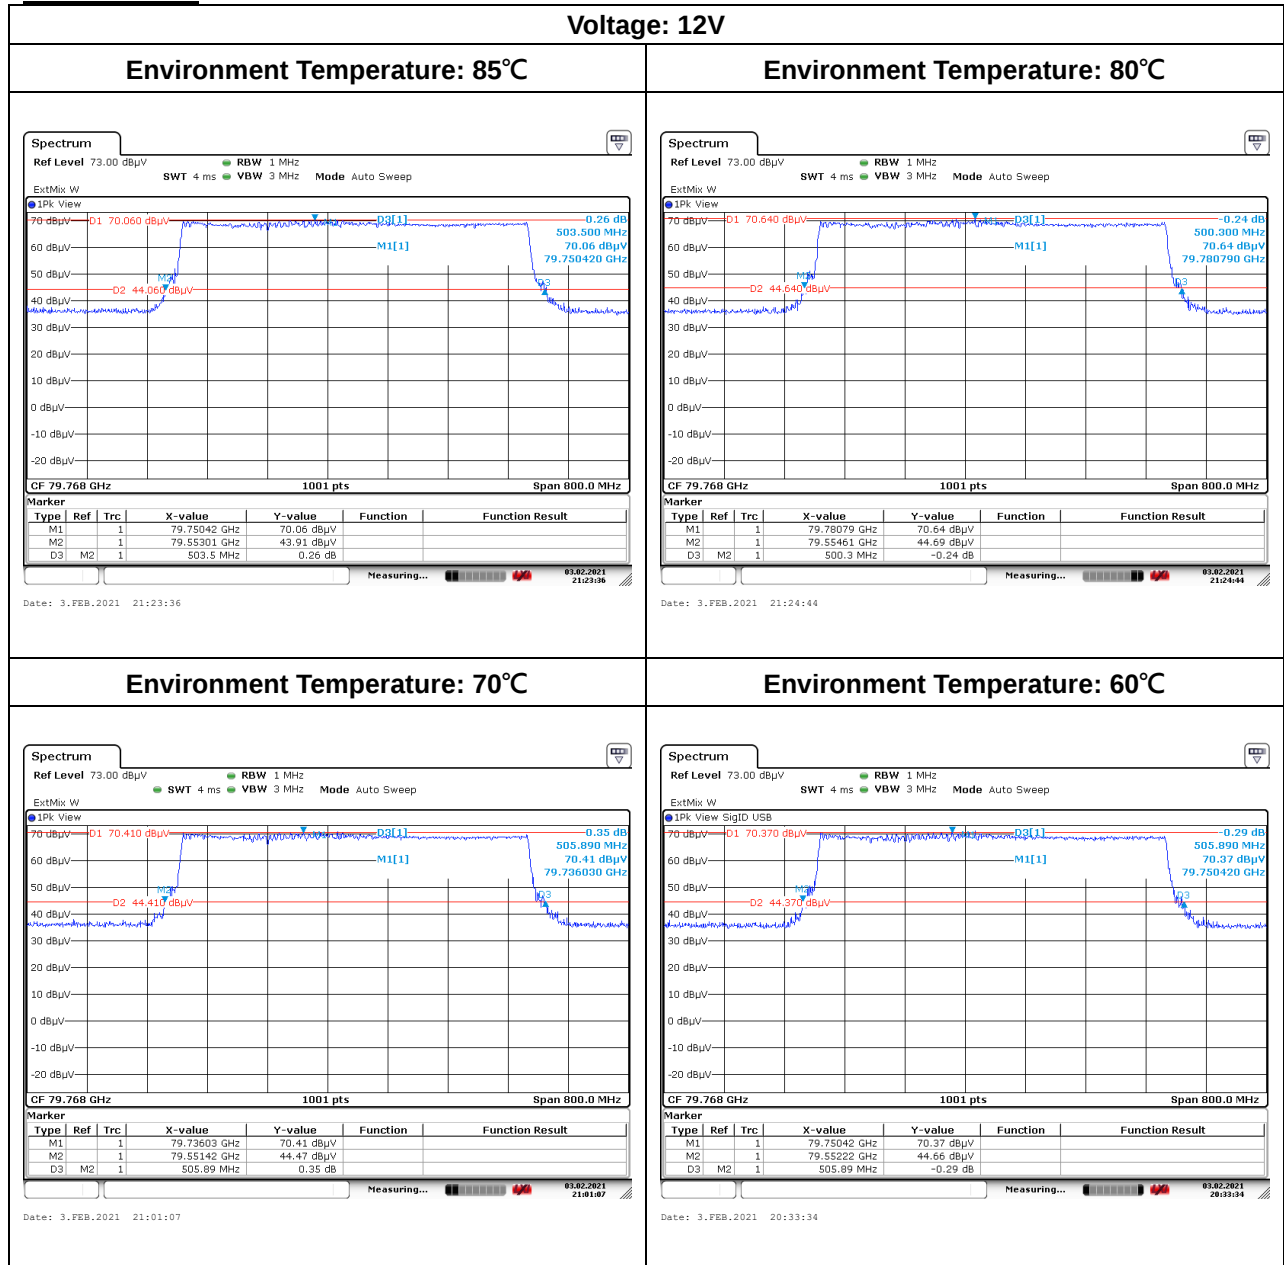OBW: 26dB

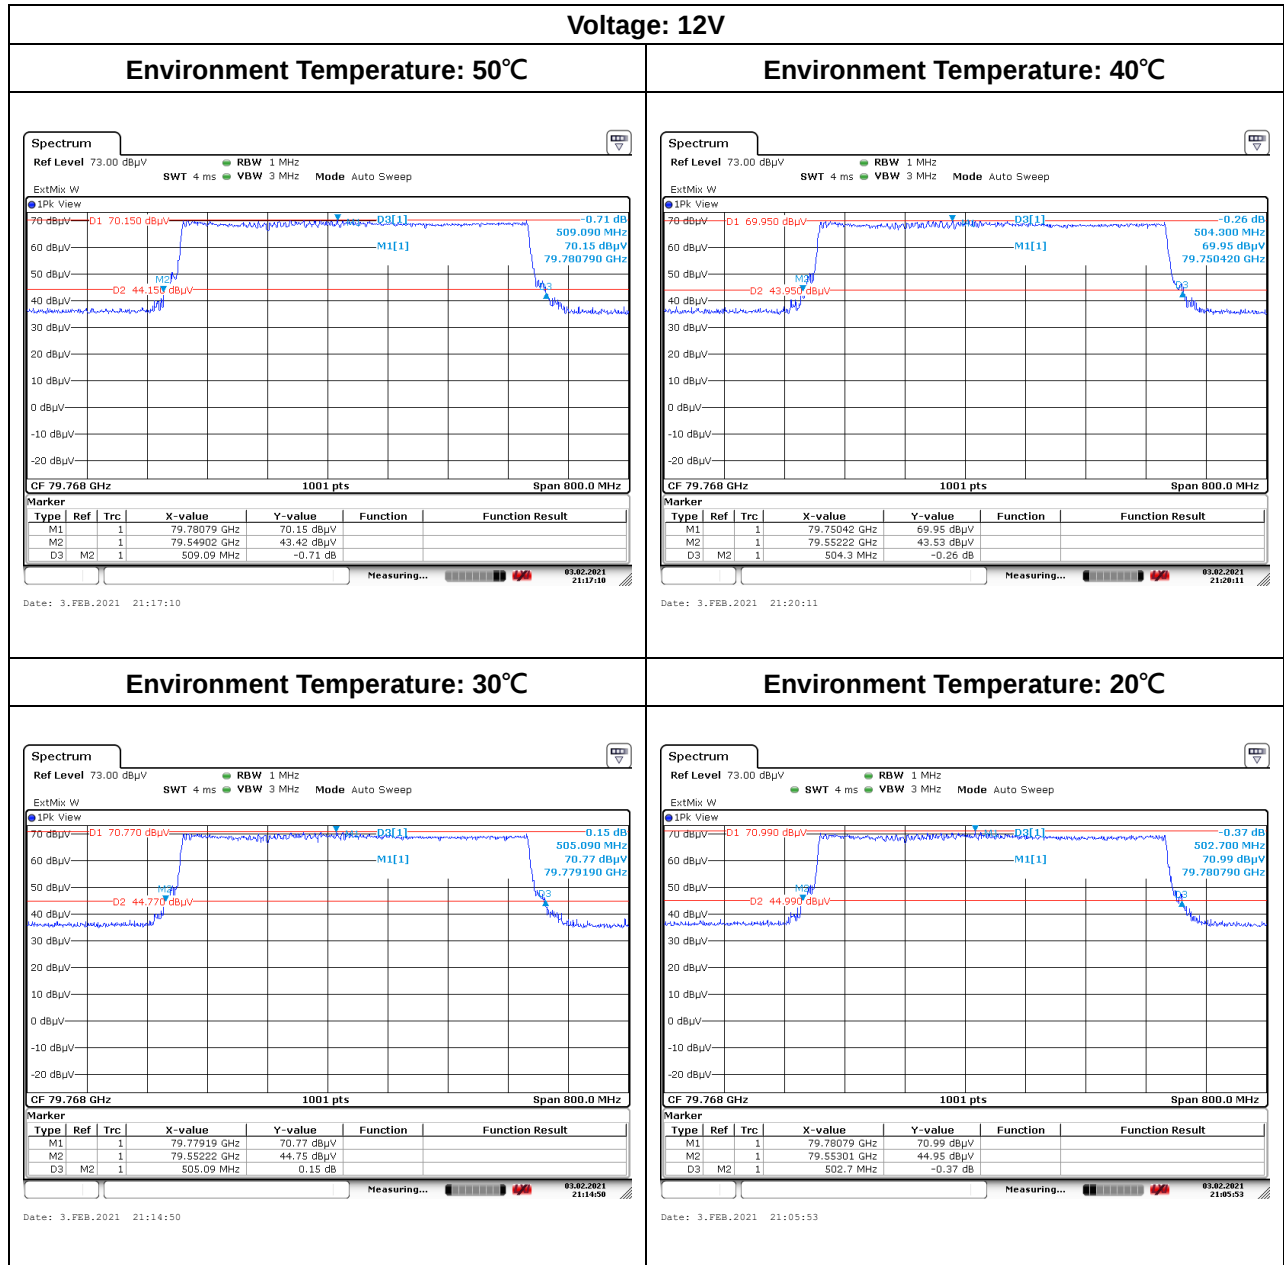
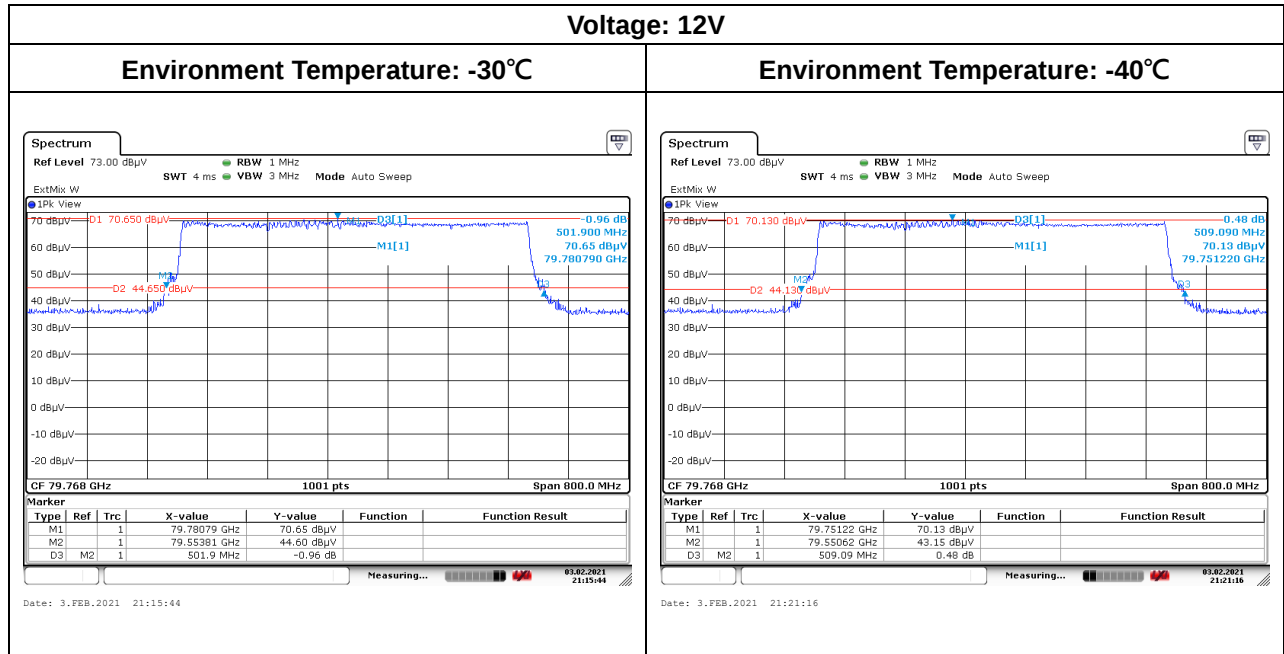


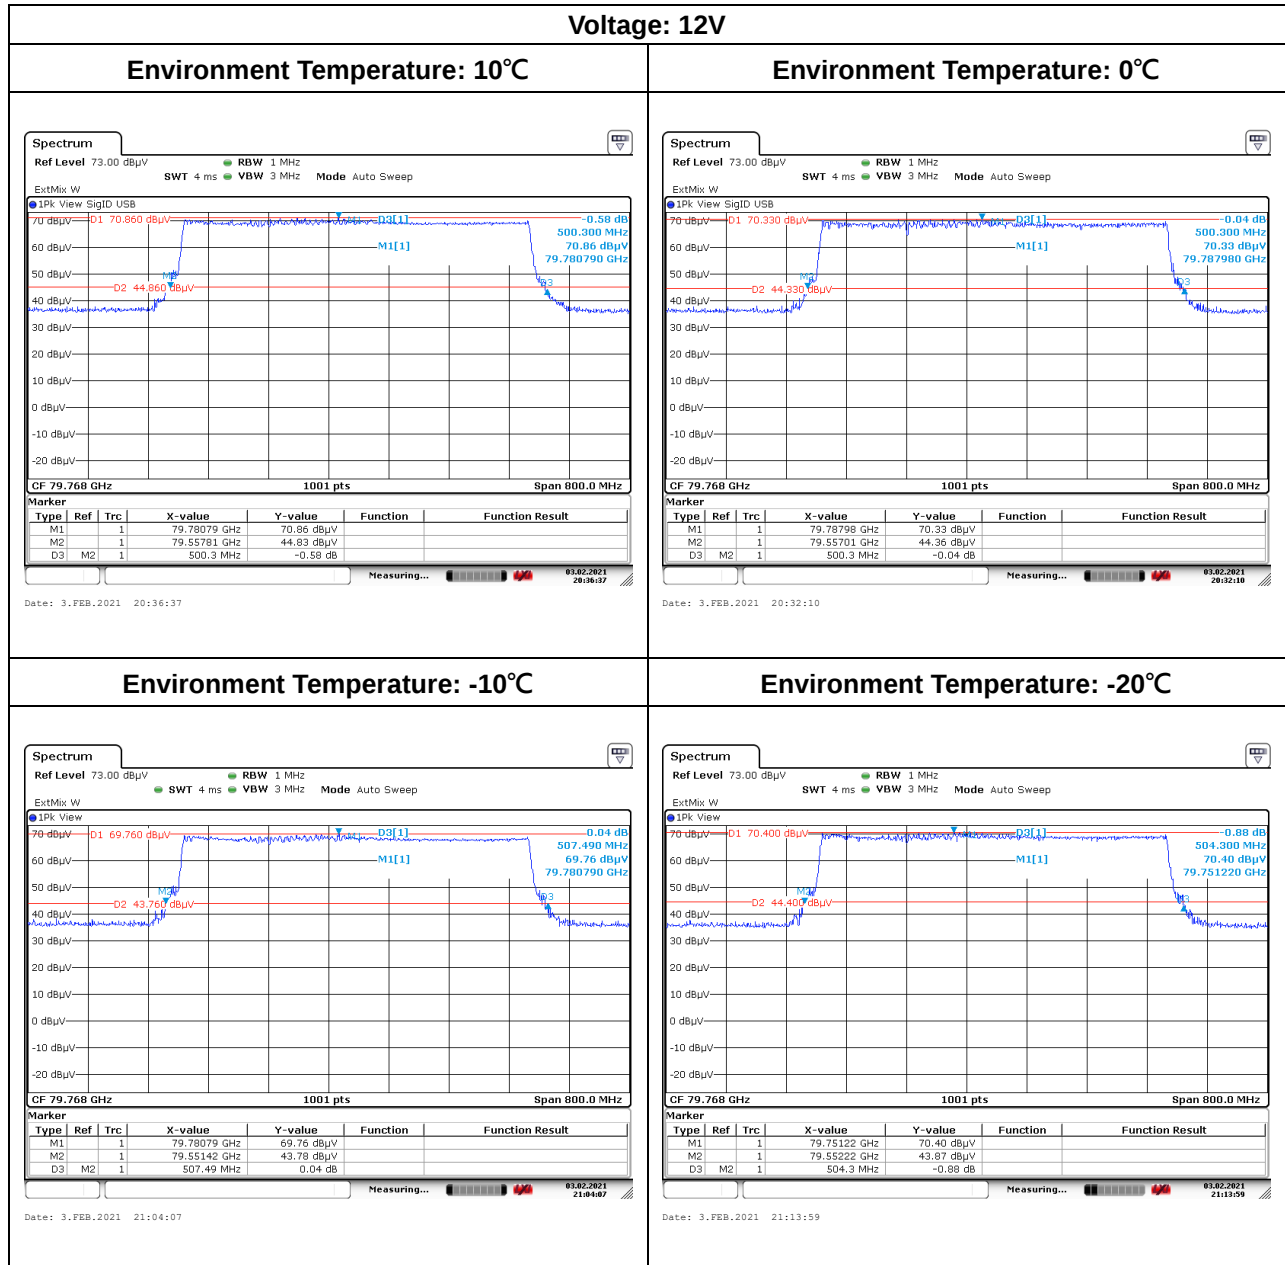




Report No.: T201202W01-RP

Page 103 / 116
Rev. 01



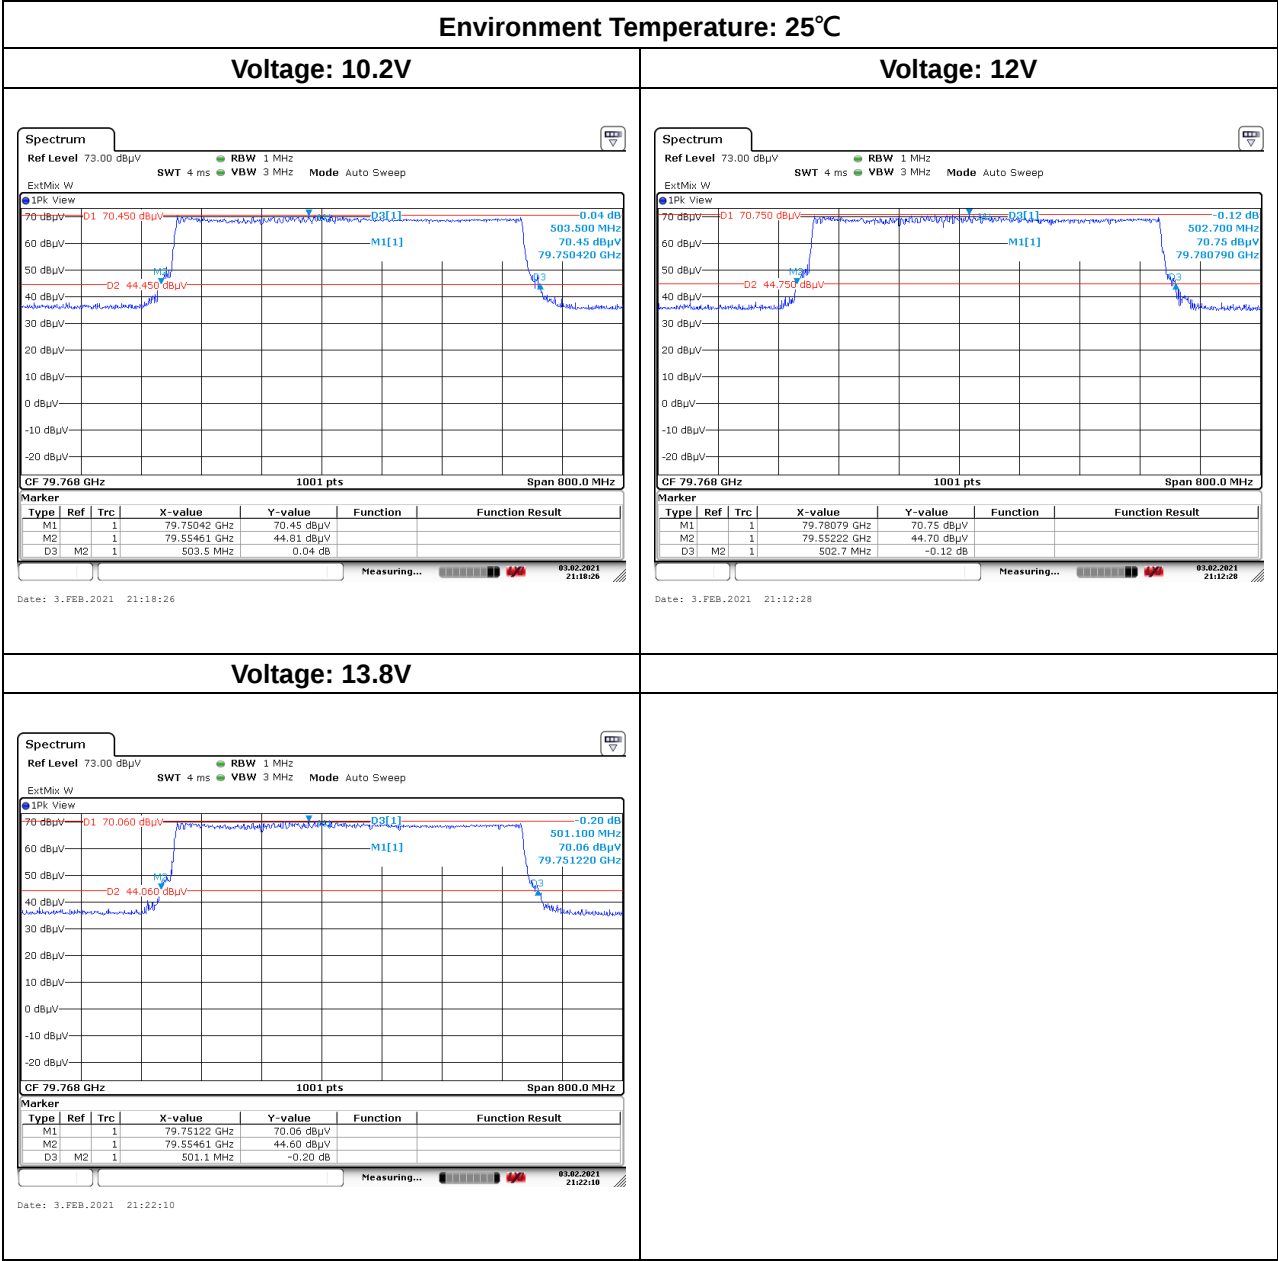



Report No.: T201202W01-RP

Page 105 / 116
Rev. 01

99%

Temperature: 16.9°C **Test date:** January 15, 2021
Humidity: 59% RH **Tested by:** Jerry Chang

Temperature: 23.8°C **Test date:** January 20, 2021
Humidity: 56.1% RH **Tested by:** Jerry Chang

1680MHz

Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
85	12	78.132	79.7702	76-81	Pass
80		78.1317	79.7702		Pass
70		78.1317	79.7702		Pass
60		78.1317	79.7702		Pass
50		78.1317	79.7702		Pass
40		78.1317	79.7702		Pass
30		78.1317	79.7702		Pass
20		78.1317	79.7702		Pass
10		78.1317	79.7702		Pass
0		78.1317	79.7702		Pass
-10		78.1317	79.7702		Pass
-20		78.1317	79.7702		Pass
-30		78.1317	79.7702		Pass
-40		78.132	79.7702		Pass

Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
20	10.2	78.132	79.7702	76-81	Pass
	12	78.132	79.7702		Pass
	13.8	78.132	79.7702		Pass



Report No.: T201202W01-RP

Page 106 / 116

Rev. 01

OBW: 26dB

Temperature: 21.5°C

Test date: February 03, 2021

Humidity: 55.2% RH

Tested by: Jerry Chang

1680MHz


Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
85	12	78.1068	79.7871	76-81	Pass
80		78.1088	79.7931		Pass
70		78.1088	79.7931		Pass
60		78.1108	79.7911		Pass
50		78.1088	79.7911		Pass
40		78.1028	79.7911		Pass
30		78.1088	79.7911		Pass
20		78.1148	79.7911		Pass
10		78.1039	79.7911		Pass
0		78.1039	79.7911		Pass
-10		78.1039	79.7891		Pass
-20		78.1048	79.7931		Pass
-30		78.1108	79.7951		Pass
-40		78.1108	79.7931		Pass


Operating Frequency					
Environment Temperature(°C)	Voltage (V)	FL (GHz)	FH (GHz)	Limit Range(GHz)	Test Result
20	10.2	78.1048	79.7871	76-81	Pass
	12	78.1068	79.7871		Pass
	13.8	78.1048	79.7911		Pass


Test Plot

99%

Voltage: 12V

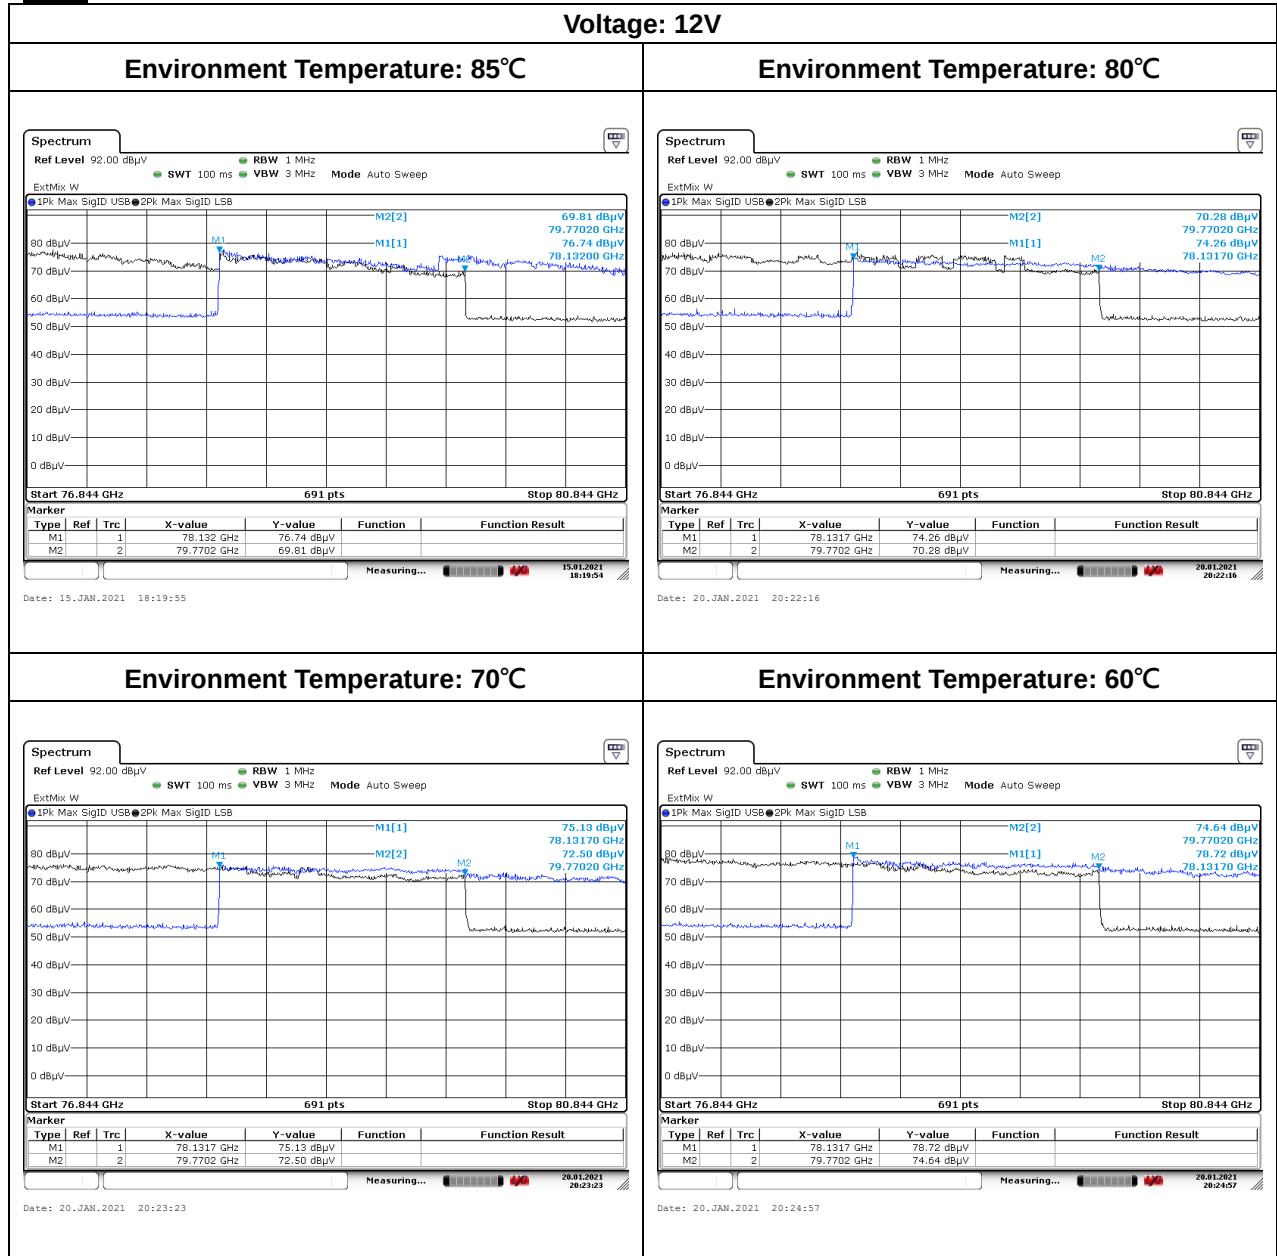

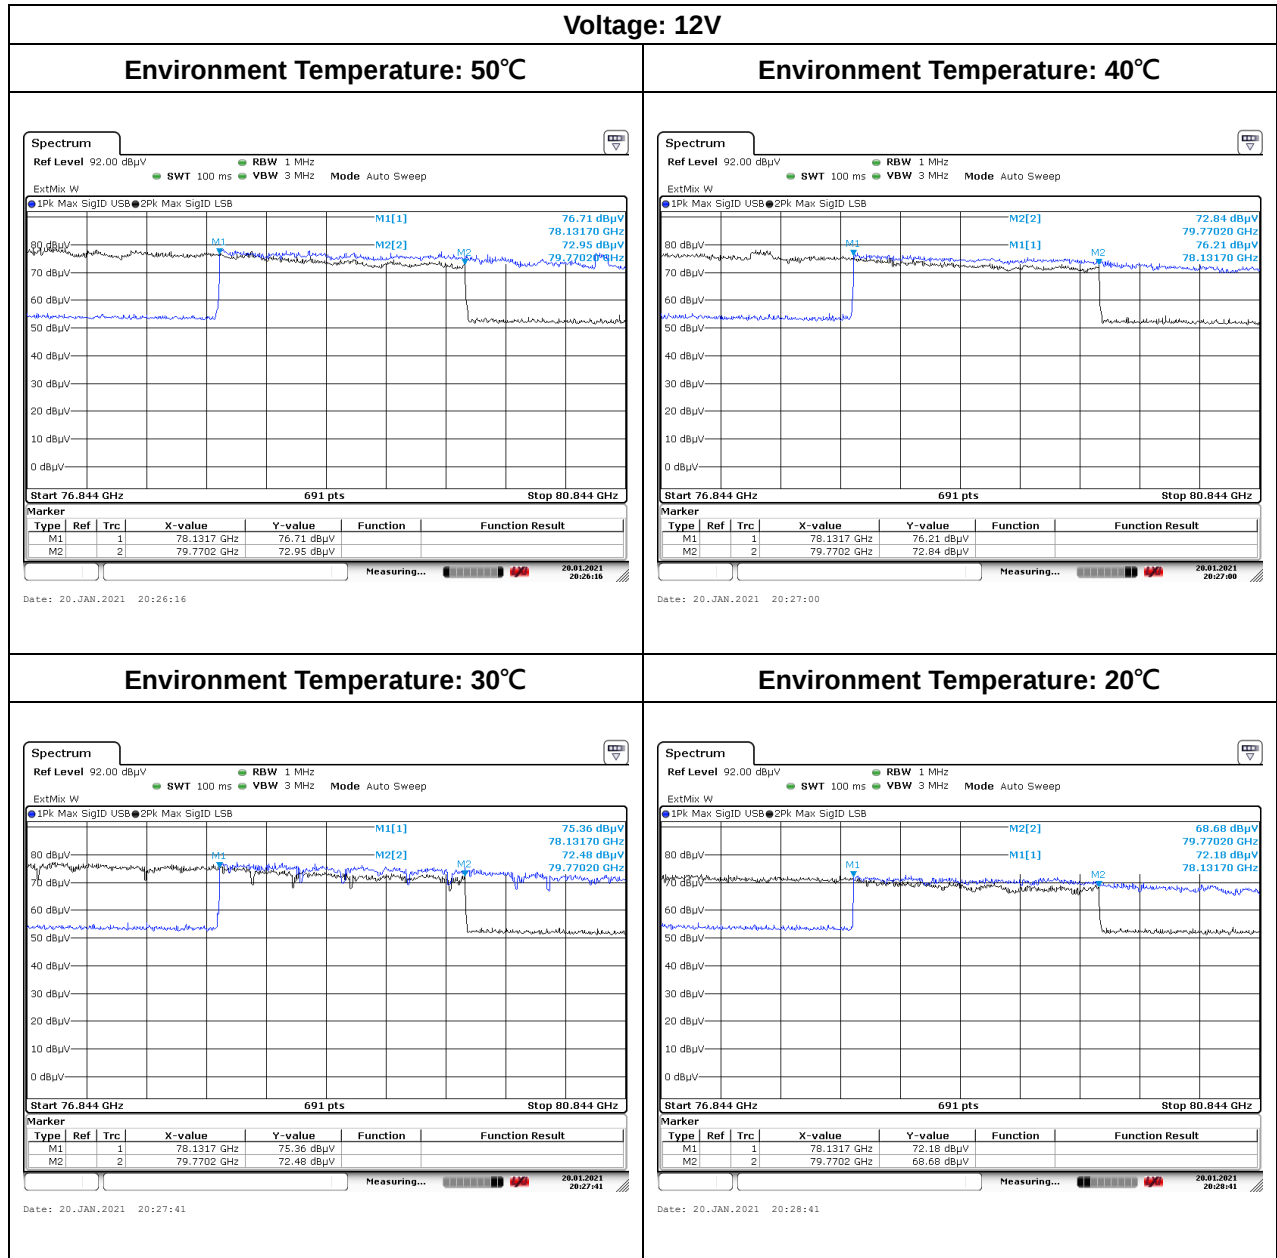


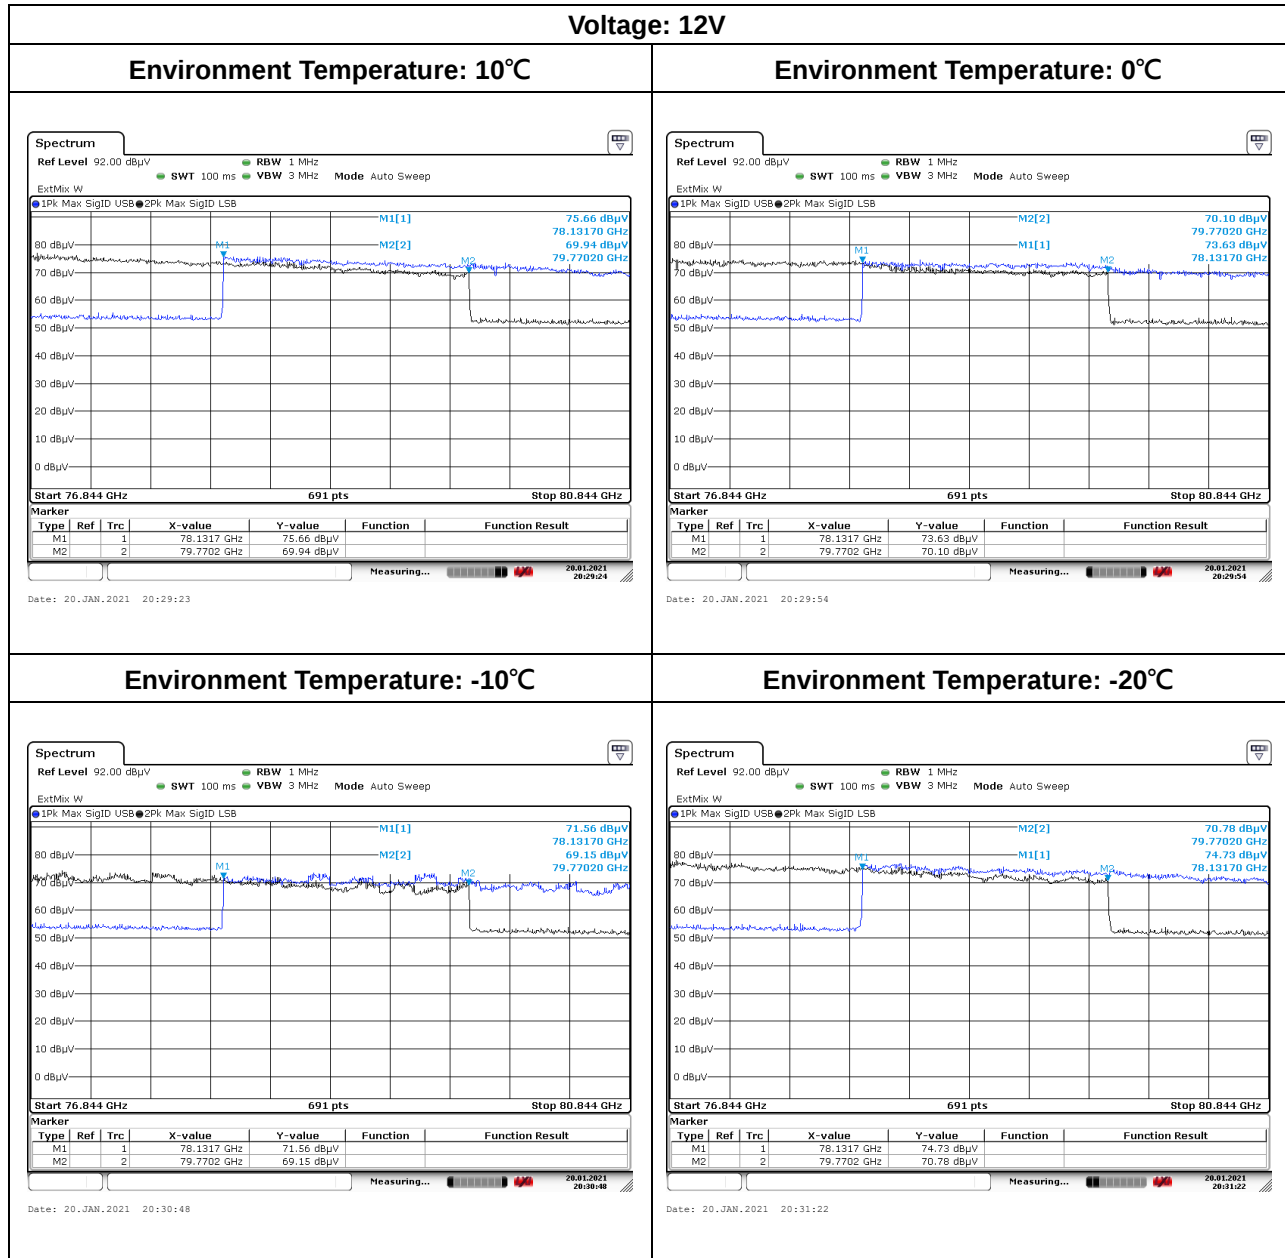






Report No.: T201202W01-RP


Page 110 / 116
Rev. 01

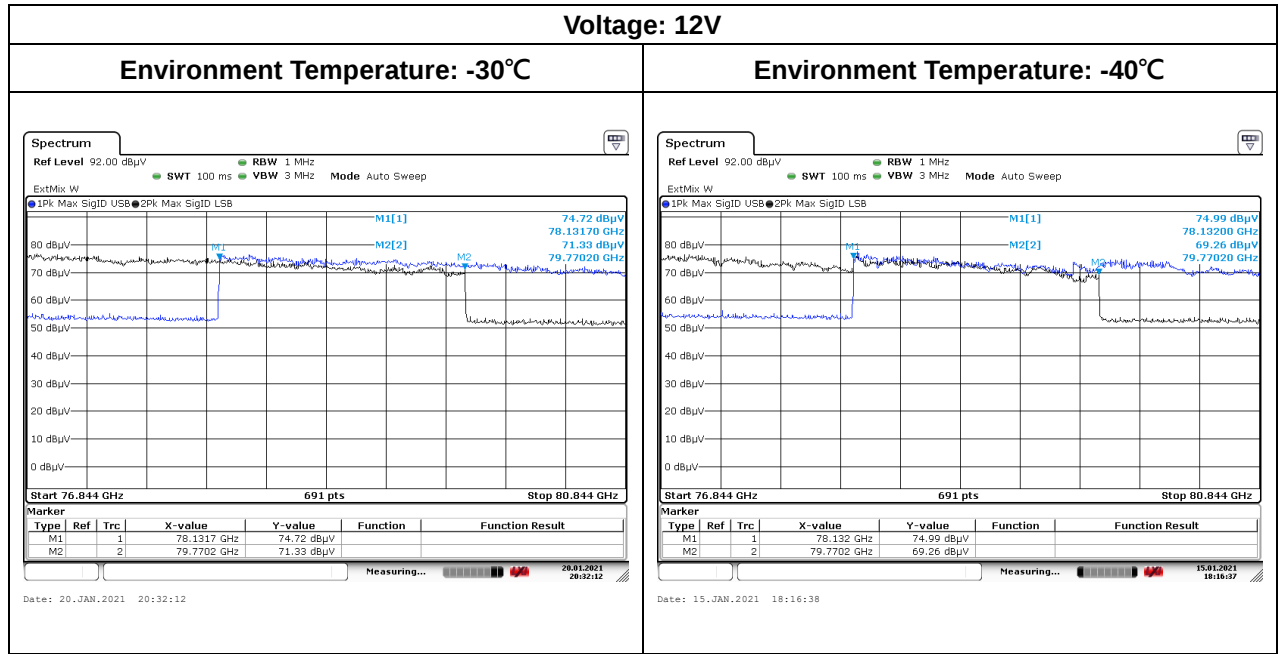


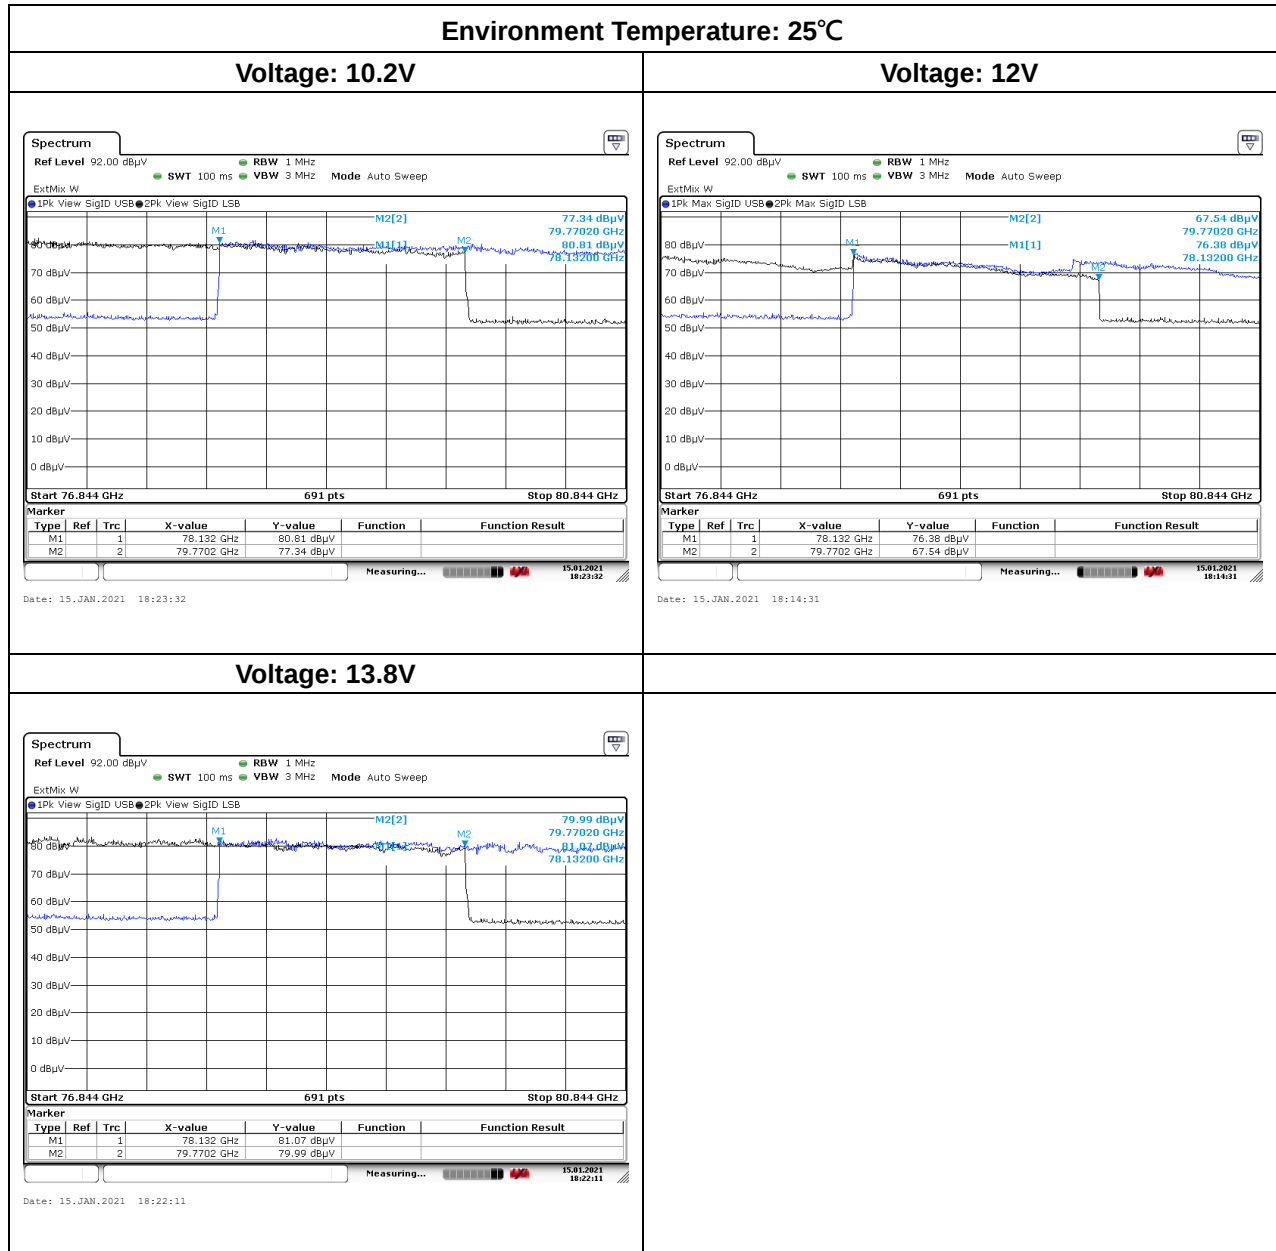


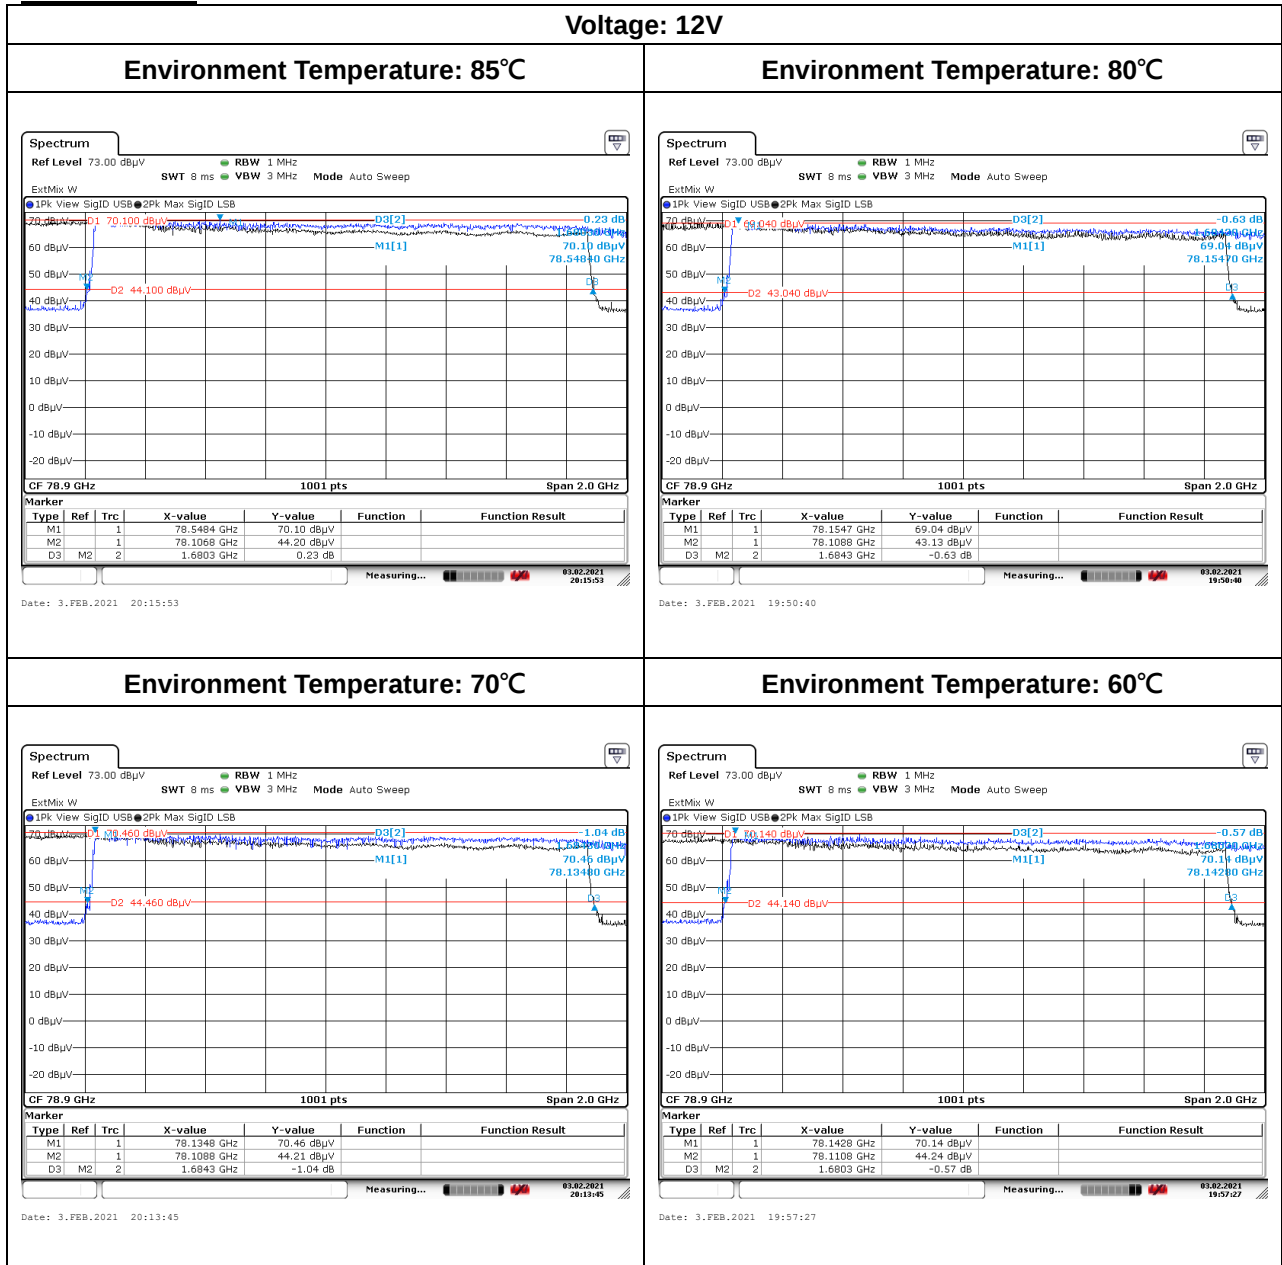OBW: 26dB

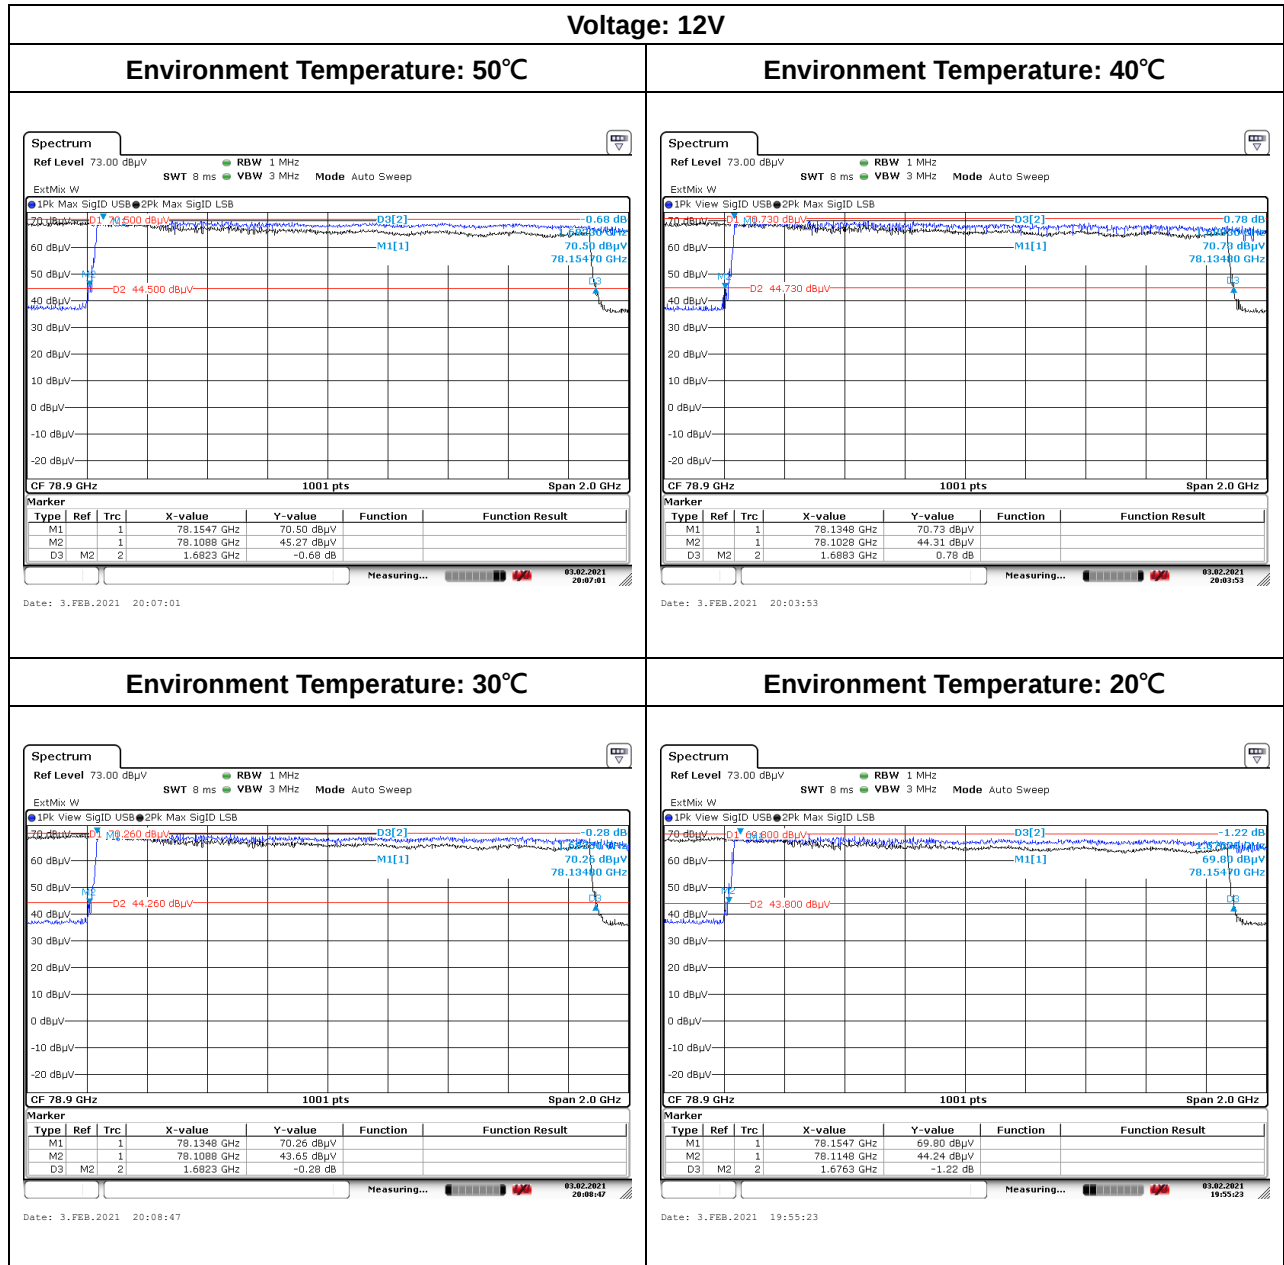

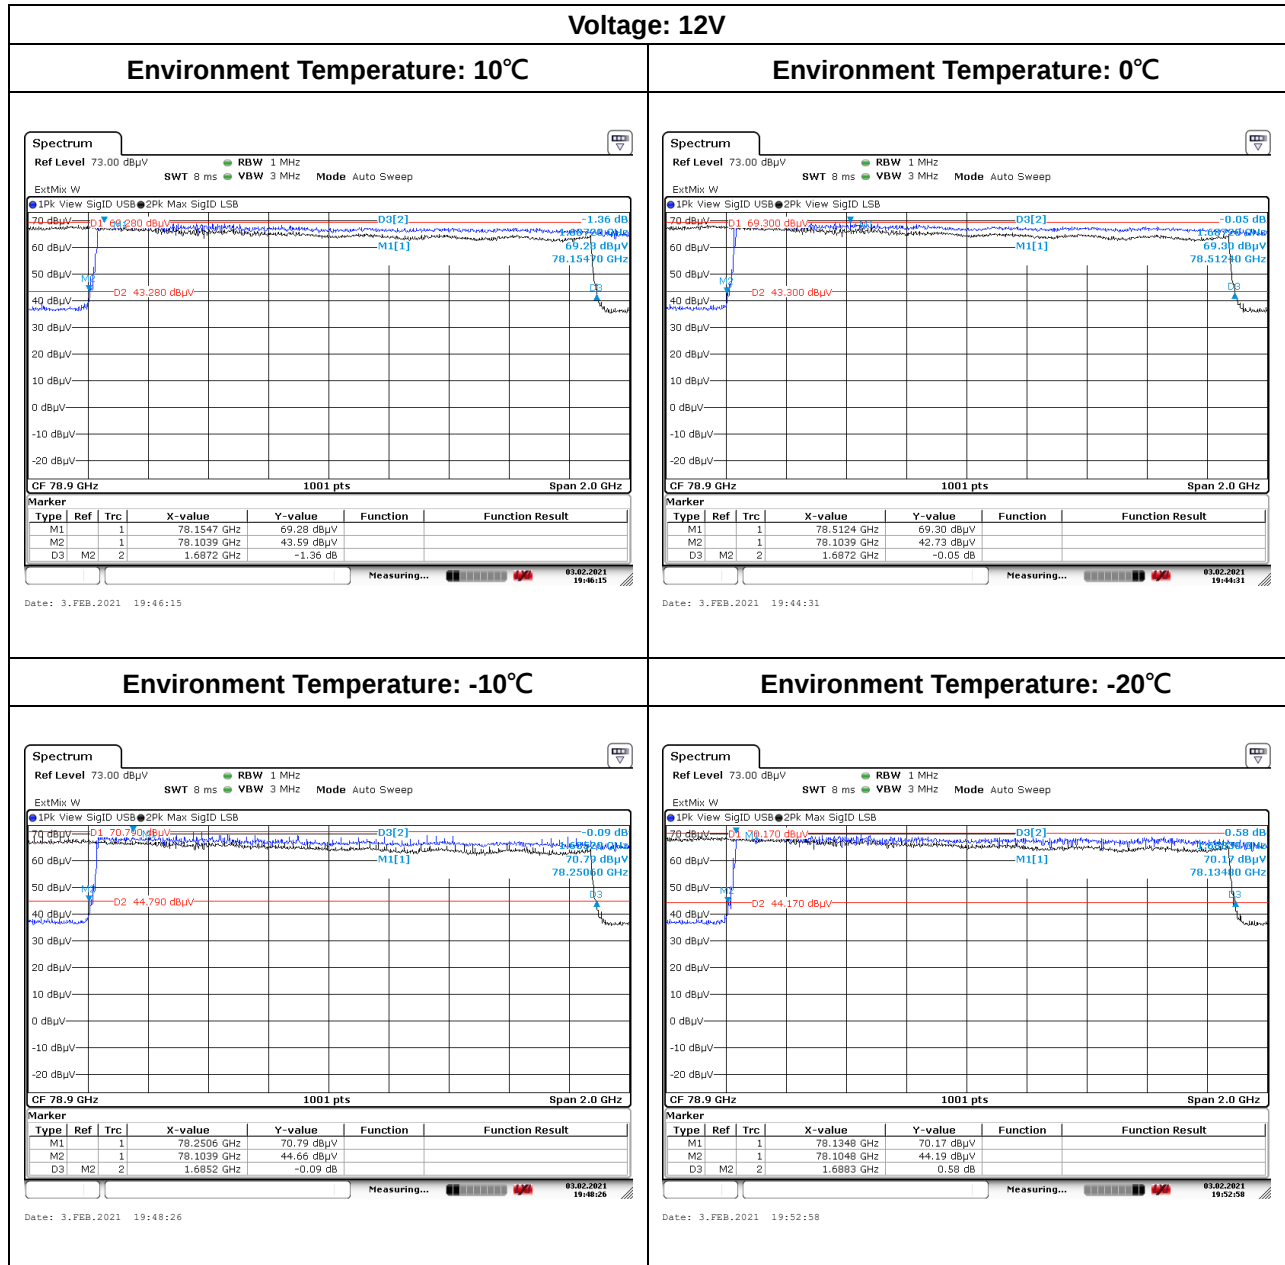

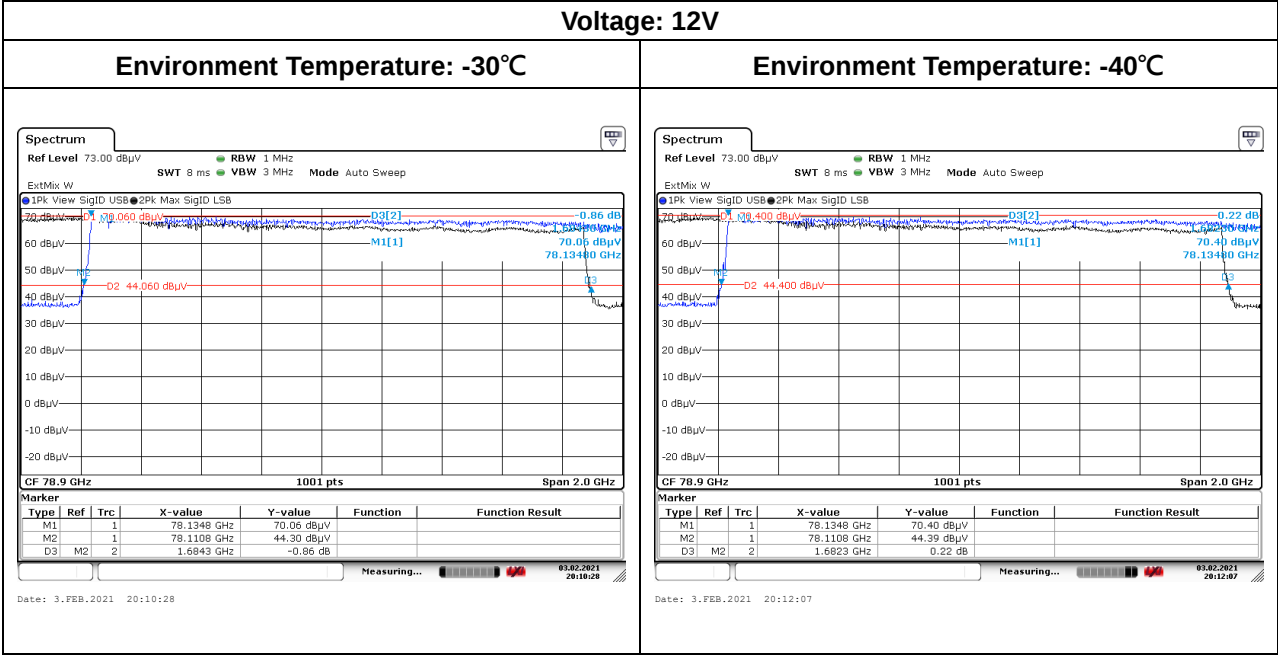

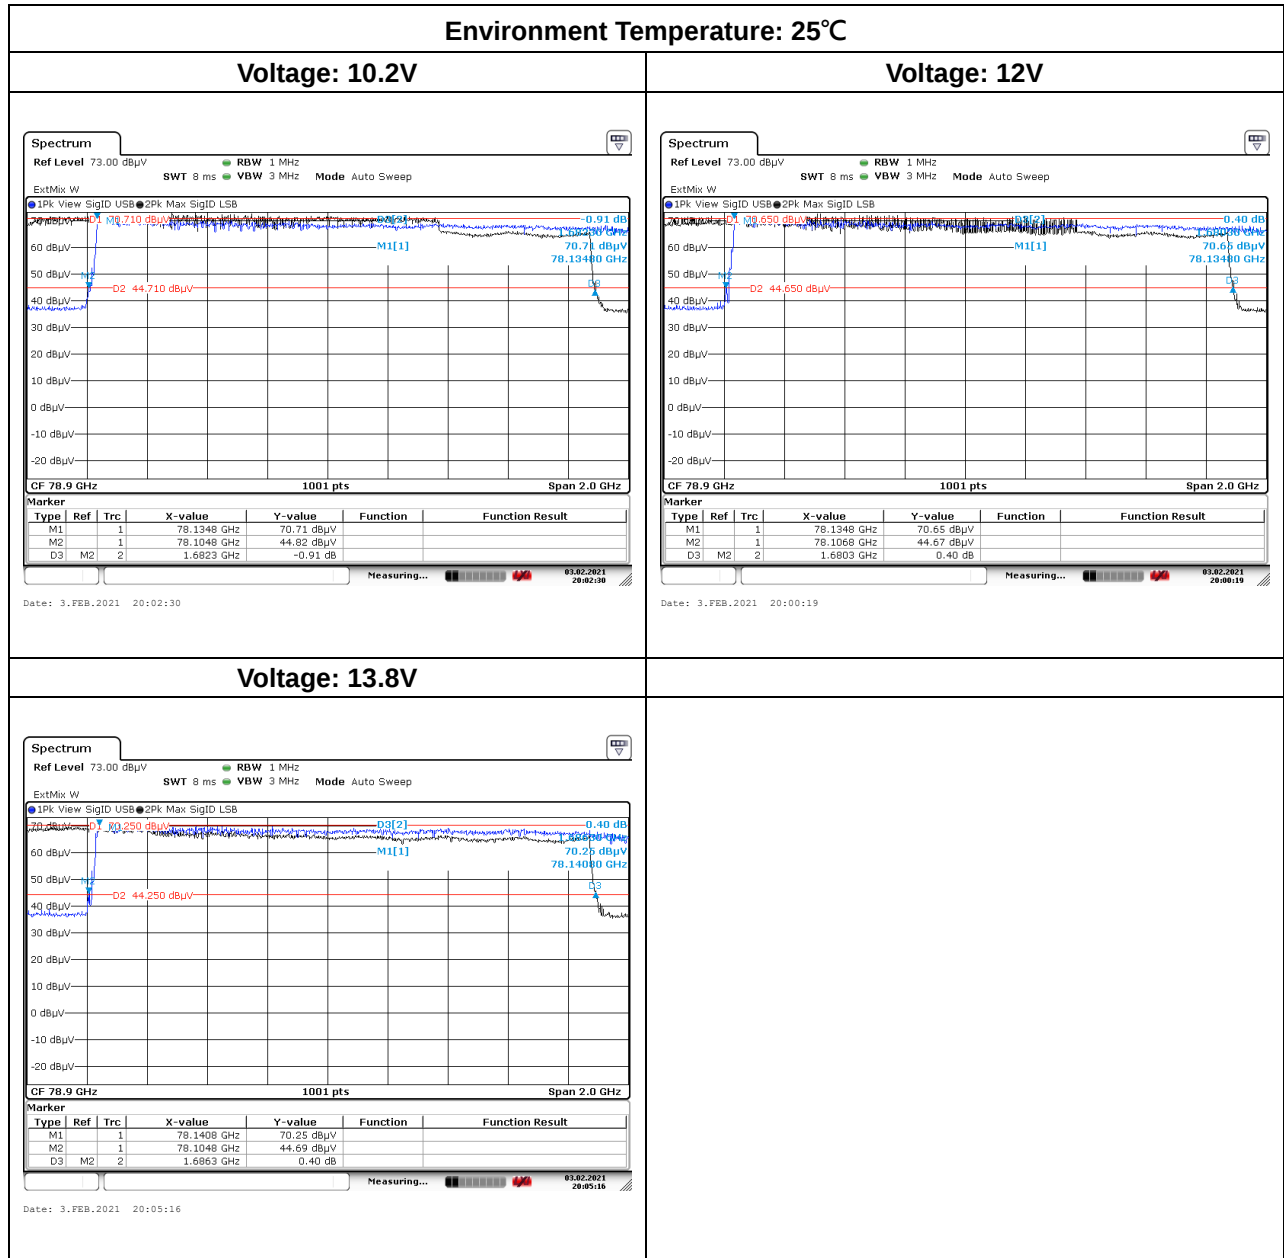


- End of Test Report -