

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Report No.: RFBEIH-WTW-P24070284-1

FCC ID: P27XER10

Product: Comcast Xfinity WiFi 7 Tri-band Router

Brand: Comcast, Rogers, Cox, Sky

Model No.: XER10

Series Model: XER10xxxxxxx, SCER11BELxxxxxxx (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, a to z, "blank" or "-" , for marketing purpose)

Received Date: 2024/7/10

Test Date: 2024/8/1 ~ 2025/2/21

Issued Date: 2025/3/5

Applicant: Sercomm Corporation

Address: 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

FCC Registration / 198487 / TW2021

Designation Number:

Approved by:

Jeremy Lin

Jeremy Lin / Project Engineer

Date:

2025/3/5

This test report consists of 60 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Annie Chang / Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Supplementary Information	6
3 General Information	7
3.1 General Description	7
3.2 Antenna Description of EUT	8
3.3 Channel List	8
3.4 Test Mode Applicability and Tested Channel Detail	9
3.5 Duty Cycle of Test Signal	10
3.6 Test Program Used and Operation Descriptions	12
3.7 Connection Diagram of EUT and Peripheral Devices	12
3.8 Configuration of Peripheral Devices and Cable Connections	12
4 Test Instruments	13
4.1 RF Output Power	13
4.2 Power Spectral Density	13
4.3 6 dB Bandwidth	13
4.4 Conducted Out of Band Emissions	13
4.5 AC Power Conducted Emissions	14
4.6 Unwanted Emissions below 1 GHz	15
4.7 Unwanted Emissions above 1 GHz	16
5 Limits of Test Items.....	17
5.1 RF Output Power	17
5.2 Power Spectral Density	17
5.3 6 dB Bandwidth	17
5.4 Conducted Out of Band Emissions	17
5.5 AC Power Conducted Emissions	17
5.6 Unwanted Emissions below 1 GHz	17
5.7 Unwanted Emissions above 1 GHz	18
6 Test Arrangements	19
6.1 RF Output Power	19
6.1.1 Test Setup	19
6.1.2 Test Procedure	19
6.2 Power Spectral Density	19
6.2.1 Test Setup	19
6.2.2 Test Procedure	19
6.3 6 dB Bandwidth	20
6.3.1 Test Setup	20
6.3.2 Test Procedure	20
6.4 Conducted Out of Band Emissions	20
6.4.1 Test Setup	20
6.4.2 Test Procedure	20
6.5 AC Power Conducted Emissions	21
6.5.1 Test Setup	21
6.5.2 Test Procedure	21
6.6 Unwanted Emissions below 1 GHz	22
6.6.1 Test Setup	22
6.6.2 Test Procedure	23
6.7 Unwanted Emissions above 1 GHz	24
6.7.1 Test Setup	24
6.7.2 Test Procedure	24
7 Test Results of Test Item	25

7.1	RF Output Power.....	25
7.2	Power Spectral Density	27
7.3	6 dB Bandwidth	29
7.4	Conducted Out of Band Emissions	31
7.5	AC Power Conducted Emissions	35
7.6	Unwanted Emissions below 1 GHz	37
7.7	Unwanted Emissions above 1 GHz.....	39
8	Pictures of Test Arrangements	59
9	Information of the Testing Laboratories	60

Release Control Record

Issue No.	Description	Date Issued
RFBEIH-WTW-P24070284-1	Original release.	2025/3/5

1 Certificate

Product: Comcast Xfinity WiFi 7 Tri-band Router

Brand: Comcast, Rogers, Cox, Sky

Test Model: XER10

Series Model: XER10xxxxxxx, SCER11BELxxxxxxx (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, a to z, "blank" or "-", for marketing purpose)

Sample Status: Engineering sample

Applicant: Sercomm Corporation

Test Date: 2024/8/1 ~ 2025/2/21

Standard: 47 CFR FCC Part 15, Subpart C (Section 15.247)

Measurement ANSI C63.10-2013

procedure: KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.247)			
Standard / Clause	Test Item	Result	Remark
15.247(b)	RF Output Power	Pass	Meet the requirement of limit.
15.247(e)	Power Spectral Density	Pass	Meet the requirement of limit.
15.247(a)(2)	6 dB Bandwidth	Pass	Meet the requirement of limit.
15.247(d)	Conducted Out of Band Emissions	Pass	Meet the requirement of limit.
15.207	AC Power Conducted Emissions	Pass	Minimum passing margin is -2.82 dB at 0.49375 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions below 1 GHz	Pass	Minimum passing margin is -13.6 dB at 576.26 MHz
15.205 / 15.209 / 15.247(d)	Unwanted Emissions above 1 GHz	Pass	Minimum passing margin is -4.5 dB at 2483.50 MHz
15.203	Antenna Requirement	Pass	No antenna connector is used.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)
RF Output Power	-	1.1 dB
Power Spectral Density	-	1.3 dB
6 dB Bandwidth	-	960 Hz
Conducted Out of Band Emissions	9 kHz ~ 40 GHz	2.7 dB
AC Power Conducted Emissions	9 kHz ~ 30 MHz	2.90 dB
Unwanted Emissions below 1 GHz	9 kHz ~ 30 MHz	2.85 dB
	30 MHz ~ 1 GHz	5.7 dB
Unwanted Emissions above 1 GHz	1 GHz ~ 6 GHz	3.06 dB
	6 GHz ~ 18 GHz	3.06 dB
	18 GHz ~ 40 GHz	3.29 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description

Product	Comcast Xfinity WiFi 7 Tri-band Router
Brand	Comcast, Rogers, Cox, Sky
Test Model	XER10
Series Model	XER10xxxxxxx, SCER11BELxxxxxxx (the 1st x should be "blank" or "-"; the rest x could be 0 to 9, A to Z, a to z, "blank" or "-", for marketing purpose)
Model Difference	Marketing Differentiation
Status of EUT	Engineering sample
Power Supply Rating	12Vdc from Adapter
Modulation Type	GFSK
Modulation Technology	DTS
Transfer Rate	125k, 500k, 1M, 2M
Operating Frequency	2.402 GHz ~ 2.48 GHz
Number of Channel	40
Output Power	10.351 mW (10.15 dBm)

Note:

1. The EUT uses following accessories.

Item	Brand	Model	Specification
AC Adapter 1	LEADER	ML55-3120460-A1	AC I/P: 100-120V, 50/60Hz, 1.5A DC O/P: 12.0V, 4.6A Non-shielded DC cable (1.8m)
AC Adapter 2	Netbit	NBC56B120460VU	AC I/P: 120V, 60Hz, 1.5A DC O/P: 12.0V, 4.6A Non-shielded DC cable (1.8m)

2. There are Bluetooth, Zigbee, Matter and WLAN (2.4 GHz & 5 GHz & 6 GHz) technology used for the EUT.

3. Simultaneously transmission combination.

Combination	Technology		
1	WLAN (2.4 GHz)	WLAN (5 GHz)	WLAN (6 GHz)

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 Antenna Description of EUT

The antenna information is listed as below.

Antenna NO.	RF Chain NO.	Brand	Model	Antenna Gain(dBi)	Frequency range (GHz)	Antenna Type	Connector Type
11	BT	-	-	3.9	2.4~2.5	PIFA	none

* Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

3.3 Channel List

40 channels are provided for BT-LE:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	10	2422	20	2442	30	2462
1	2404	11	2424	21	2444	31	2464
2	2406	12	2426	22	2446	32	2466
3	2408	13	2428	23	2448	33	2468
4	2410	14	2430	24	2450	34	2470
5	2412	15	2432	25	2452	35	2472
6	2414	16	2434	26	2454	36	2474
7	2416	17	2436	27	2456	37	2476
8	2418	18	2438	28	2458	38	2478
9	2420	19	2440	29	2460	39	2480

3.4 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT has Adapter1(LEADER)/ Adapter2(Netbit). Pre-scan these adapter and find the worst case as a representative test condition.
Worst Case:	1. Adapter1(LEADER)/ Adapter2(Netbit) Worst Condition: Adapter1(LEADER).

Following channel(s) was (were) selected for the final test as listed below:

Test Item	Mode	Tested Channel	Modulation	Data Rate Parameter
RF Output Power	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
	BT-LE 2M	0, 19, 39	GFSK	2Mb/s
	BT-LE 125k	0, 19, 39	GFSK	125kb/s
	BT-LE 500k	0, 19, 39	GFSK	500kb/s
Power Spectral Density	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
	BT-LE 2M	0, 19, 39	GFSK	2Mb/s
	BT-LE 125k	0, 19, 39	GFSK	125kb/s
	BT-LE 500k	0, 19, 39	GFSK	500kb/s
6 dB Bandwidth / Conducted Out of Band Emissions	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
	BT-LE 2M	0, 19, 39	GFSK	2Mb/s
	BT-LE 125k	0, 19, 39	GFSK	125kb/s
	BT-LE 500k	0, 19, 39	GFSK	500kb/s
AC Power Conducted Emissions	BT-LE 125k	39	GFSK	125kb/s
Unwanted Emissions below 1 GHz	BT-LE 125k	39	GFSK	125kb/s
Unwanted Emissions above 1 GHz	BT-LE 1M	0, 19, 39	GFSK	1Mb/s
	BT-LE 2M	0, 19, 39	GFSK	2Mb/s
	BT-LE 125k	0, 19, 39	GFSK	125kb/s
	BT-LE 500k	0, 19, 39	GFSK	500kb/s


3.5 Duty Cycle of Test Signal

BT-LE 1M: Duty cycle = $0.394 \text{ ms} / 0.625 \text{ ms} \times 100\% = 63.0\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 2.00 \text{ dB}$


BT-LE 2M: Duty cycle = $0.209 \text{ ms} / 0.625 \text{ ms} \times 100\% = 33.4\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 4.76 \text{ dB}$

BT-LE 125k: Duty cycle = $3.108 \text{ ms} / 3.748 \text{ ms} \times 100\% = 82.9\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 0.81 \text{ dB}$


BT-LE 500k: Duty cycle = $1.072 \text{ ms} / 1.875 \text{ ms} \times 100\% = 57.2\%$, duty factor = $10 * \log (1/\text{Duty cycle}) = 2.43 \text{ dB}$

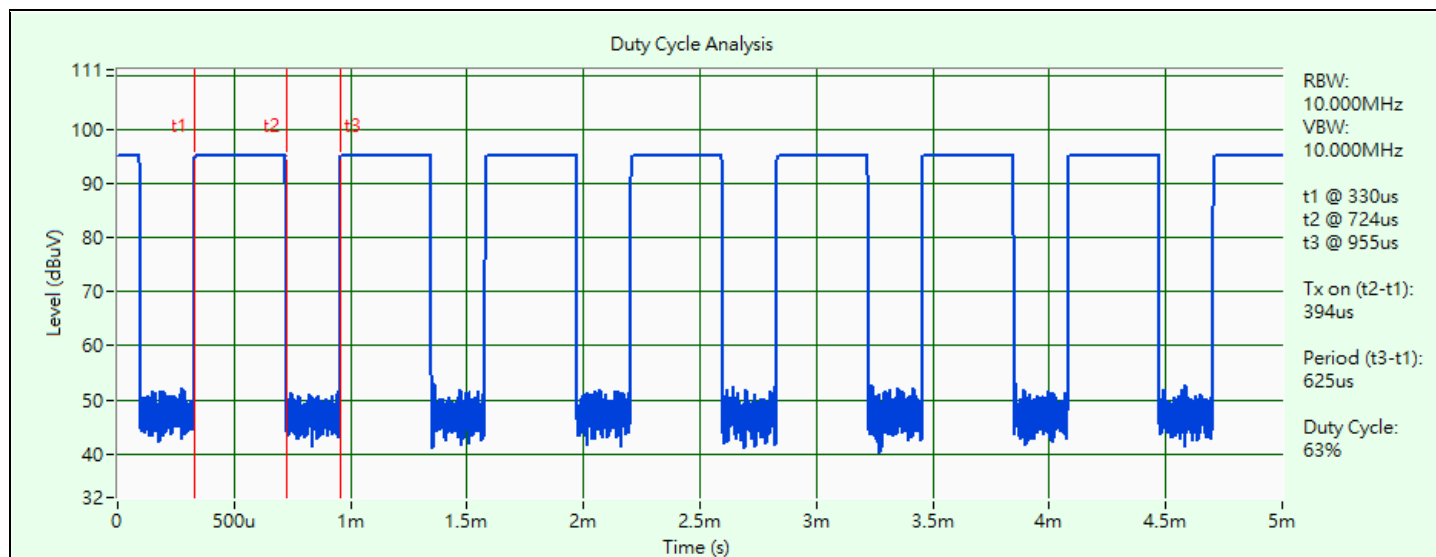


BT-LE 1M

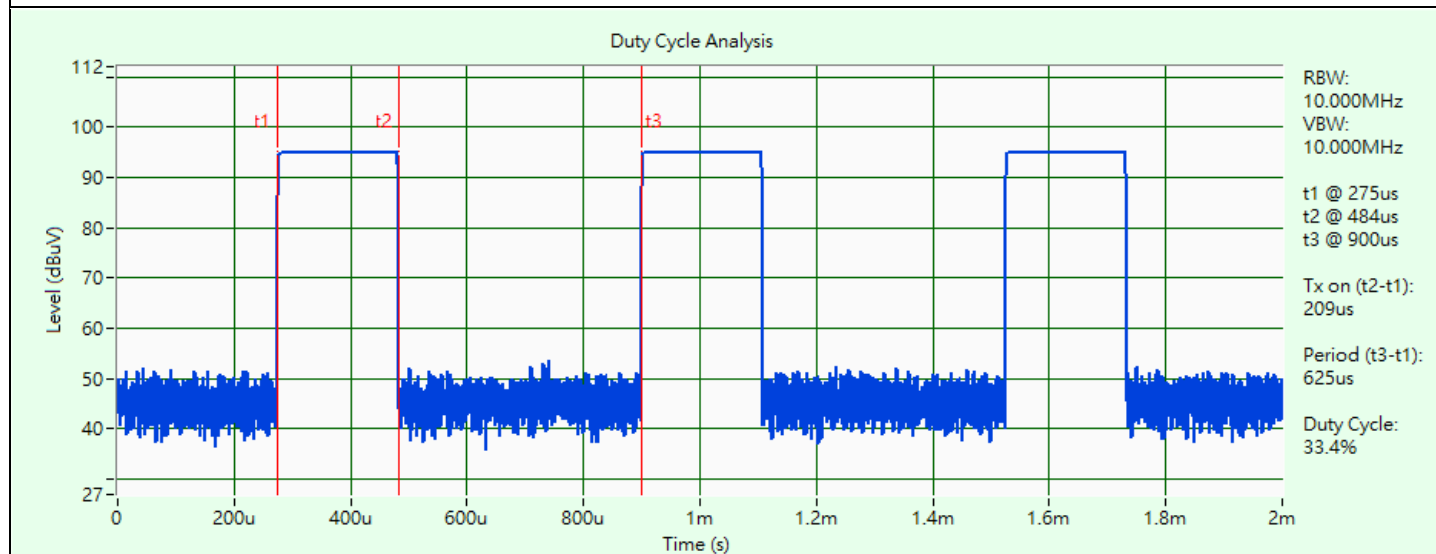

BT-LE 2M

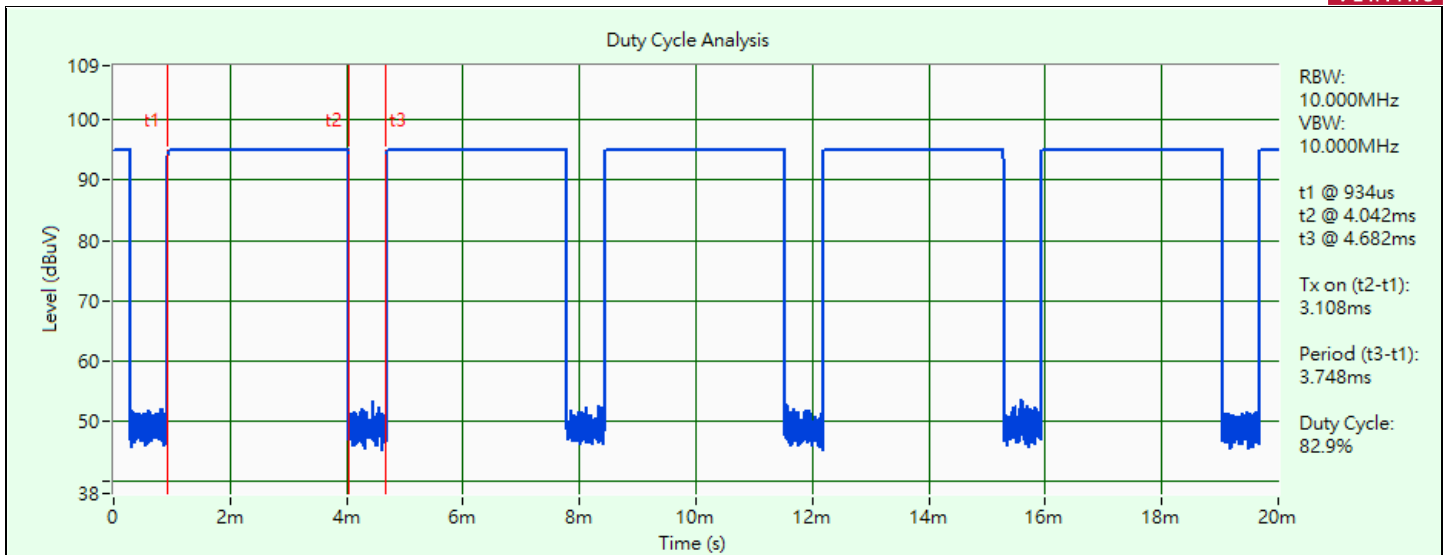

BT-LE 125k

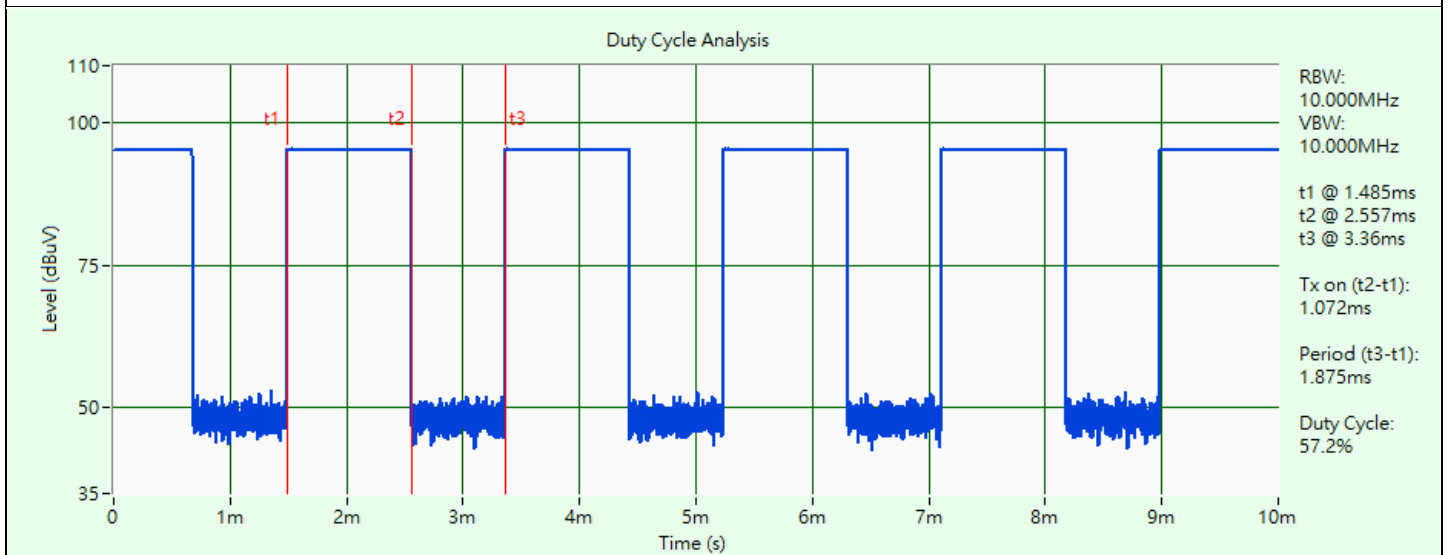


BT-LE 500k

3.6 Test Program Used and Operation Descriptions

Controlling software (accessMTool 3.3.0.8) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

3.7 Connection Diagram of EUT and Peripheral Devices

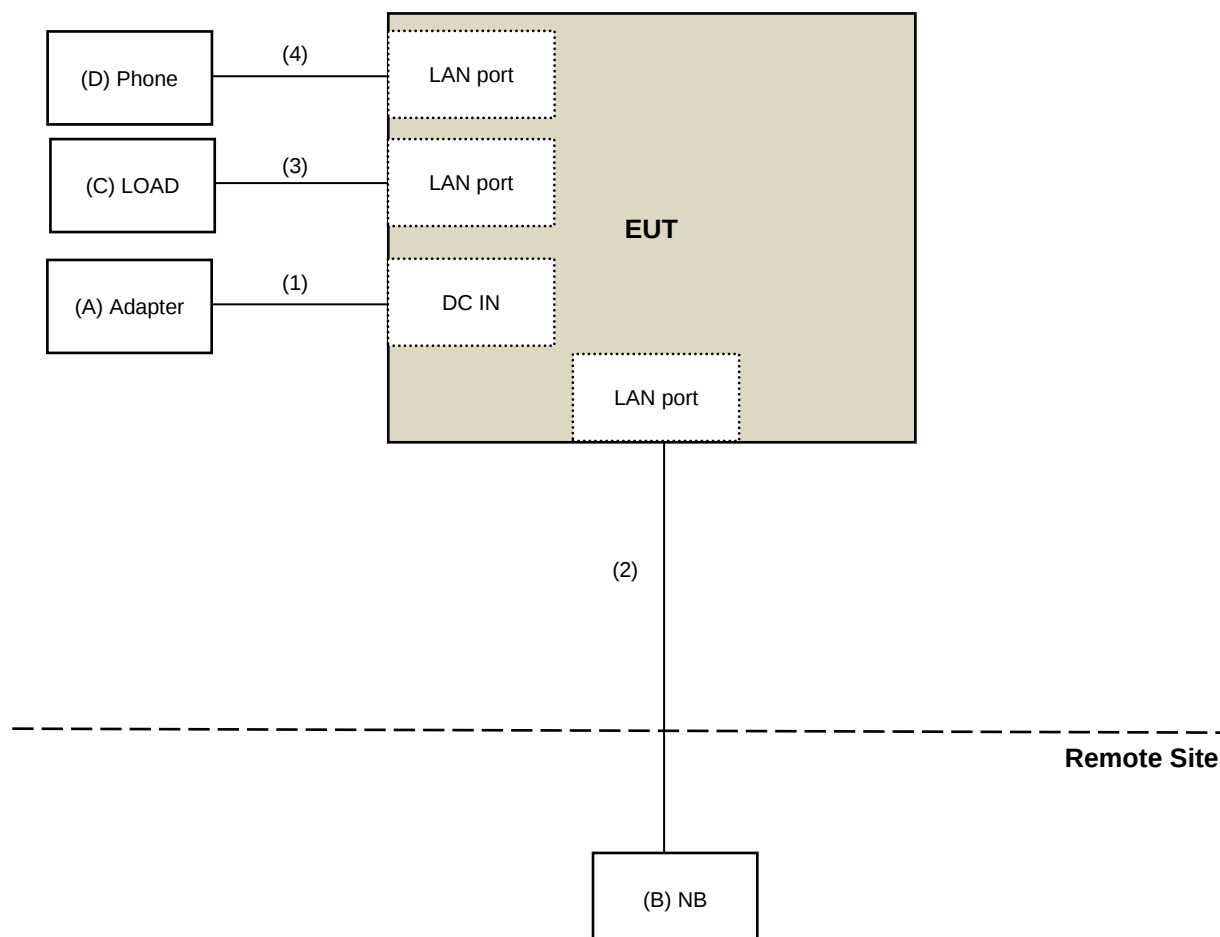

3.8 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Adapter	LEADER	ML55-3120460-A1	N/A	N/A	Supplied by applicant
B	NB	DELL	LA65NS2-01	N/A	N/A	Provided by Lab
C	LOAD	BV	BV	N/A	N/A	Provided by Lab
D	Phone	ISit0	IS-333	N/A	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	DC cable	1	1.8	N	0	Supplied by applicant
2	LAN cable	1	10	N	0	Provided by Lab
3	LAN cable	4	1.5	N	0	Provided by Lab
4	LAN cable	1	2.17	N	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 RF Output Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Pulse Power Sensor Anritsu	MA2411B	0738404	2024/5/13	2025/5/12
RF Power Meter Anritsu	ML2495A	0842014	2024/5/13	2025/5/12
USB Wideband Power Sensor Keysight	U2021XA	U2021XA_001	2024/6/7	2025/6/6

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2025/2/21

4.2 Power Spectral Density

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030A	MY54490260	2024/7/17	2025/7/16
Signal Analyzer R&S	FSV40	101042	2023/9/5	2024/9/4
Software	ADT_RF Test Software V6.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in LK - Oven
2. Tested Date: 2024/8/1

4.3 6 dB Bandwidth

Refer to section 4.2 to get the tested date and information of the instruments.

4.4 Conducted Out of Band Emissions

Refer to section 4.2 to get the tested date and information of the instruments.

4.5 AC Power Conducted Emissions

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance LYNICS	0900510	E1-011285	2023/9/21	2024/9/20
		E1-011286	2023/9/21	2024/9/20
50 ohm terminal resistance SUHNER	65BNC-5001	E1-010789	2024/6/20	2025/6/19
EMI Test Receiver R&S	ESCI	100412	2023/8/23	2024/8/22
	ESCS 30	100288	2023/12/28	2024/12/27
Fixed Attenuator STI	STI02-2200-10	NO.1	2023/9/13	2024/9/12
LISN R&S	ENV216	100024	2023/9/6	2024/9/5
		101197	2024/7/11	2025/7/10
LISN Schwarzbeck	NNLK 8121	8121-731	2024/6/12	2025/6/11
		8121-00759	2023/8/21	2024/8/20
		8121-808	2024/4/26	2025/4/25
	NNLK 8129	8129229	2024/6/14	2025/6/13
RF Coaxial Cable PEWC	5D-FB	Cable-CO10-01	2024/2/7	2025/2/6
Software BVADT	Cond_V7.4.1.0	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Conduction 10.
2. Tested Date: 2024/8/10

4.6 Unwanted Emissions below 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Bi_Log Antenna Schwarzbeck	VULB 9168	137	2023/10/13	2024/10/12
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2024/5/28	2025/5/27
	CDNE-M3	00091	2024/5/28	2025/5/27
Loop Antenna TESEQ	HLA 6121	64095	2023/9/23	2024/9/22
MXE EMI Receiver Agilent	N9038A	MY51210129	2024/3/22	2025/3/21
Preamplifier Agilent	8447D	2944A11064	2024/2/15	2025/2/14
Preamplifier EMCI	EMC001340	980269	2024/6/25	2025/6/24
RF Coaxial Cable Pacific	8D-FB	Cable-CH6-02	2024/6/25	2025/6/24
Signal Analyzer R&S	FSV40	101544	2024/6/20	2025/6/19
Software BVADT	Radiated_V8.7.08	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 6 (CH 6).
2. Tested Date: 2024/8/30

4.7 Unwanted Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Boresight antenna tower fixture BV	BAF-02	6	N/A	N/A
High Pass Filter Wainwright	WHK 3.1/18G-10SS	SN 8	2024/5/24	2025/5/23
Horn Antenna EMCO	3115	00028257	2023/11/12	2024/11/11
Horn Antenna ETS-Lindgren	3117-PA	00215857	2023/11/12	2024/11/11
Horn Antenna Schwarzbeck	BBHA 9170	212	2023/10/16	2024/10/15
		BBHA9170241	2023/10/16	2024/10/15
MXE EMI Receiver Agilent	N9038A	MY51210129	2024/3/22	2025/3/21
Notch Filter Micro-Tronics	BRC50703-01	010	2024/5/24	2025/5/23
	BRM17690	005	2024/5/24	2025/5/23
Preamplifier EMCI	EMC0126545	980076	2024/2/15	2025/2/14
	EMC184045B	980175	2023/9/2	2024/9/1
		980235	2024/2/15	2025/2/14
Preamplifier HP	8449B	3008A01201	2024/2/15	2025/2/14
RF Coaxial Cable EMCI	EMC104	190801	2024/7/5	2025/7/4
		190804	2024/7/5	2025/7/4
RF Coaxial Cable EMEC	EM102-KMKM-100	02	2024/7/5	2025/7/4
RF Coaxial Cable HUBER+SUHNER	SF-104	Cable-CH6-01	2024/7/5	2025/7/4
Signal Analyzer R&S	FSV40	101042	2023/9/5	2024/9/4
		101544	2024/6/20	2025/6/19
Software BVADT	Radiated_V7.7.1.1.1	N/A	N/A	N/A
Tower ADT	AT100	0306	N/A	N/A
Turn Table ADT	TT100	0306	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 6 (CH 6).
2. Tested Date: 2024/8/13 ~ 2024/8/14

5 Limits of Test Items

5.1 RF Output Power

For systems using digital modulation in the 2400–2483.5 MHz bands: 1 Watt (30 dBm)

5.2 Power Spectral Density

The Maximum of Power Spectral Density Measurement is 8 dBm in any 3 kHz.

5.3 6 dB Bandwidth

The minimum of 6 dB Bandwidth Measurement is 0.5 MHz.

5.4 Conducted Out of Band Emissions

Below 20 dB of the highest emission level of operating band (in 100 kHz Resolution Bandwidth).

5.5 AC Power Conducted Emissions

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Notes:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

5.6 Unwanted Emissions below 1 GHz

Radiated emissions up to 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

5.7 Unwanted Emissions above 1 GHz

Radiated emissions above 1 GHz which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
Above 960	500	3


Notes:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

6 Test Arrangements

6.1 RF Output Power

6.1.1 Test Setup



6.1.2 Test Procedure

Peak Power:


A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

Average Power:

Average power sensor was used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

6.2 Power Spectral Density

6.2.1 Test Setup




6.2.2 Test Procedure

- Set analyzer center frequency to DTS channel center frequency.
- Set the span to 1.5 times the DTS bandwidth.
- Set the RBW to: 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.

6.3 6 dB Bandwidth

6.3.1 Test Setup




6.3.2 Test Procedure

- Set resolution bandwidth (RBW) = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4 Conducted Out of Band Emissions

6.4.1 Test Setup



6.4.2 Test Procedure

MEASUREMENT PROCEDURE REF


- Set the RBW = 100 kHz.
- Set the VBW ≥ 300 kHz.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.

MEASUREMENT PROCEDURE OOBE

- Set RBW = 100 kHz.
- Set VBW ≥ 300 kHz.
- Detector = peak.
- Sweep = auto couple.
- Trace Mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

6.5 AC Power Conducted Emissions

6.5.1 Test Setup

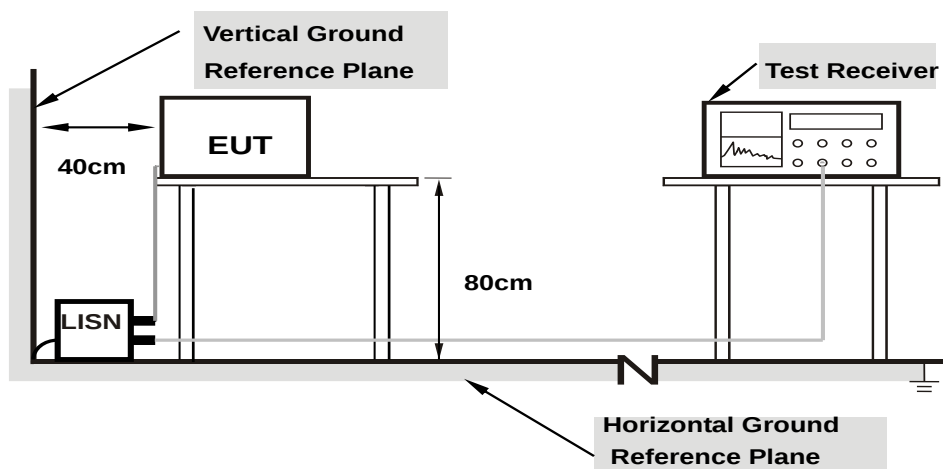

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.5.2 Test Procedure


- The EUT was placed on a 0.8 meter to the top of table and placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50 uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20 dB) was not recorded.

Note: The resolution bandwidth and video bandwidth of test receiver is 9 kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15 MHz-30 MHz.


6.6 Unwanted Emissions below 1 GHz

6.6.1 Test Setup

For Radiated emission below 30 MHz

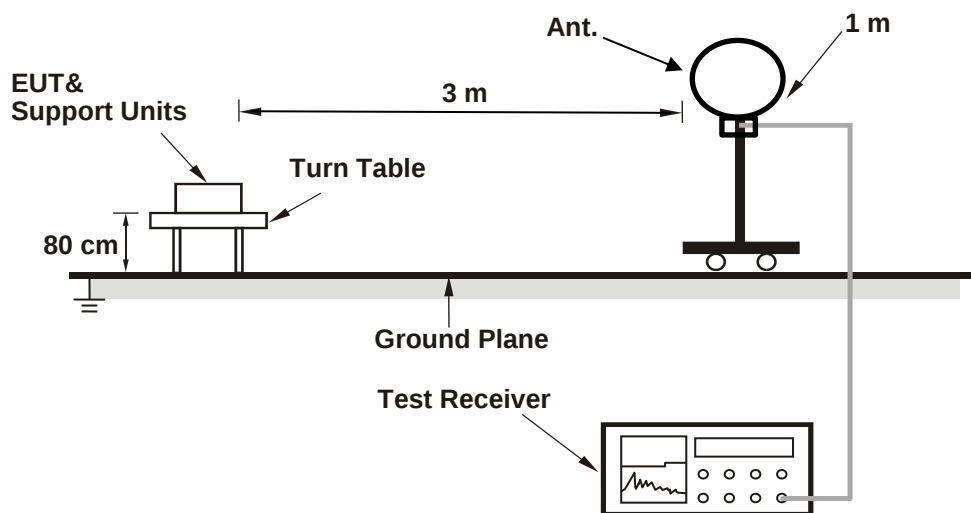

For Radiated emission above 30 MHz

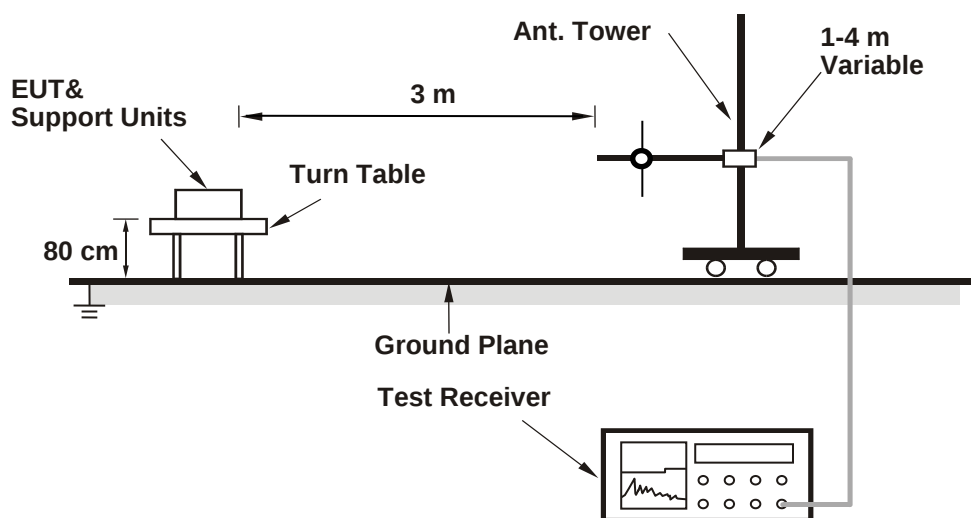

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

For Radiated emission below 30 MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9 kHz to 90 kHz and 110 kHz to 490 kHz) set to average detect function and peak detect function.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency (150 kHz to 30 MHz).
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30 MHz


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Notes:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

6.7 Unwanted Emissions above 1 GHz

6.7.1 Test Setup

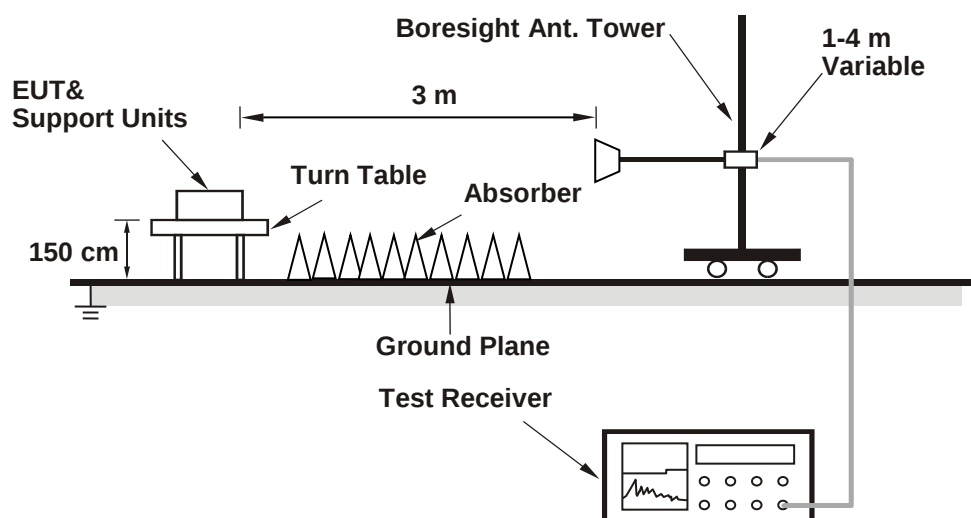

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver/spectrum analyzer was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Notes:

- The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) and Average detection (AV) at frequency above 1 GHz.
- For harmonic signal measurement, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
- All modes of operation were investigated and the worst-case emissions are reported.

7 Test Results of Test Item

7.1 RF Output Power

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

For Peak Power

BT-LE 1M

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	9.462	9.76	30	Pass
19	2440	9.954	9.98	30	Pass
39	2480	10.328	10.14	30	Pass

Note: The antenna gain is 3.9 dBi < 6 dBi, so the output power limit shall not be reduced.

BT-LE 2M

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	9.462	9.76	30	Pass
19	2440	9.954	9.98	30	Pass
39	2480	10.351	10.15	30	Pass

Note: The antenna gain is 3.9 dBi < 6 dBi, so the output power limit shall not be reduced.

BT-LE 125k

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	9.528	9.79	30	Pass
19	2440	10	10.00	30	Pass
39	2480	10.351	10.15	30	Pass

Note: The antenna gain is 3.9 dBi < 6 dBi, so the output power limit shall not be reduced.

BT-LE 500k

Chan.	Chan. Freq. (MHz)	Peak Power (mW)	Peak Power (dBm)	Power Limit (dBm)	Test Result
0	2402	9.397	9.73	30	Pass
19	2440	9.977	9.99	30	Pass
39	2480	10.351	10.15	30	Pass

Note: The antenna gain is 3.9 dBi < 6 dBi, so the output power limit shall not be reduced.

For Average Power

BT-LE 1M

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	9.311	9.69
19	2440	9.817	9.92
39	2480	10.186	10.08

BT-LE 2M

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	9.354	9.71
19	2440	9.817	9.92
39	2480	10.186	10.08

BT-LE 125k

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	9.354	9.71
19	2440	9.795	9.91
39	2480	10.186	10.08

BT-LE 500k

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
0	2402	9.268	9.67
19	2440	9.795	9.91
39	2480	10.186	10.08

7.2 Power Spectral Density

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

BT-LE 1M

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
0	2402	-4.95	8	Pass
19	2440	-4.41	8	Pass
39	2480	-4.15	8	Pass

Note: The antenna gain is 3.9 dBi < 6 dBi, so the power density limit shall not be reduced.

BT-LE 2M

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
0	2402	-6.02	8	Pass
19	2440	-5.53	8	Pass
39	2480	-5.34	8	Pass

Note: The antenna gain is 3.9 dBi < 6 dBi, so the power density limit shall not be reduced.

BT-LE 125k

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
0	2402	4.08	8	Pass
19	2440	4.52	8	Pass
39	2480	4.68	8	Pass





Note: The antenna gain is 3.9 dBi < 6 dBi, so the power density limit shall not be reduced.

BT-LE 500k

Channel	Freq. (MHz)	PSD (dBm/3kHz)	PSD Limit (dBm/3kHz)	Pass / Fail
0	2402	3.82	8	Pass
19	2440	4.26	8	Pass
39	2480	4.42	8	Pass

Note: The antenna gain is 3.9 dBi < 6 dBi, so the power density limit shall not be reduced.

Spectrum Plot of Maximum Value

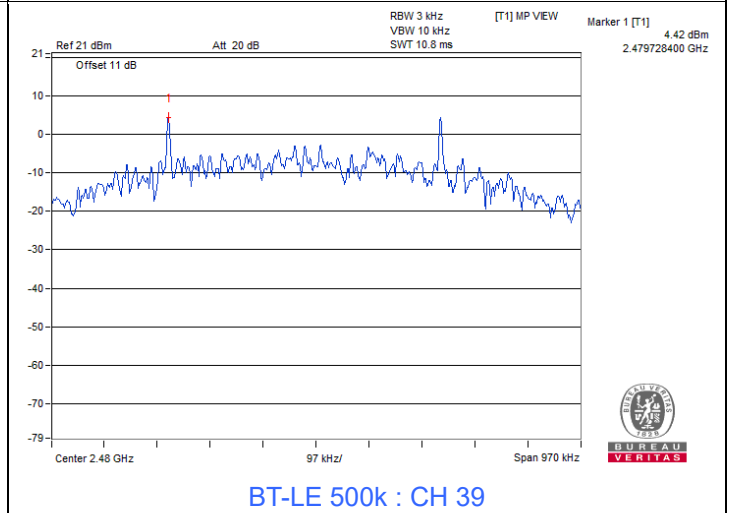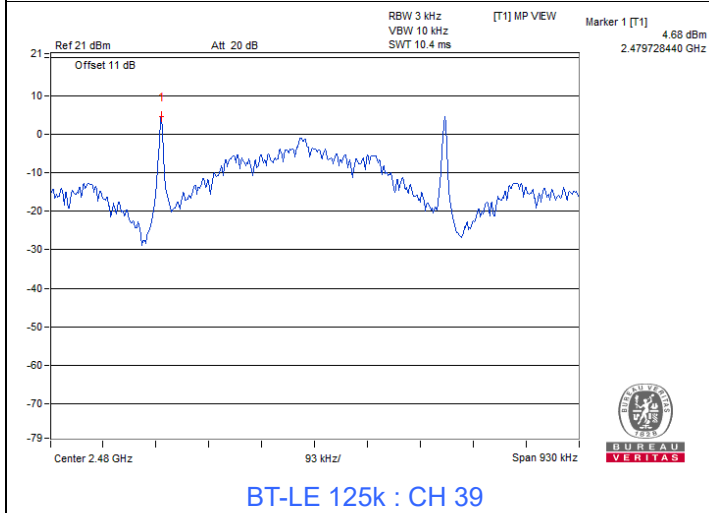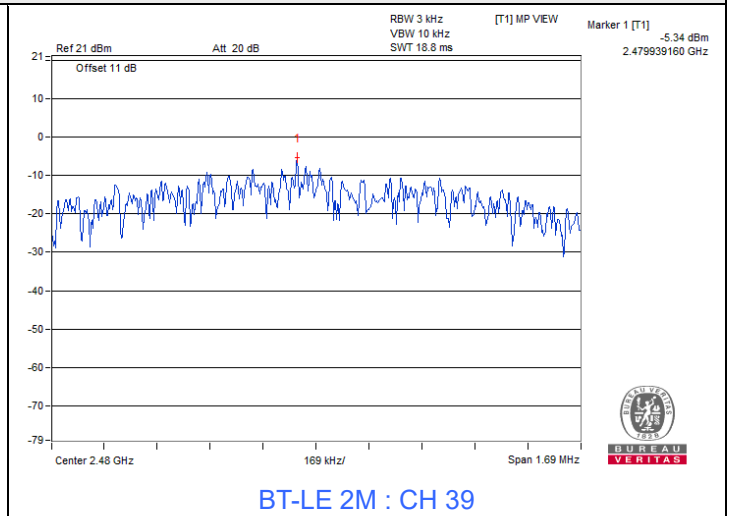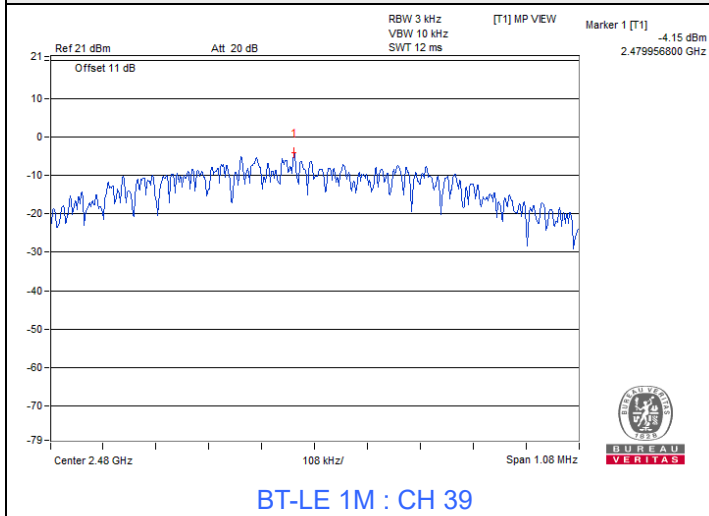

7.3 6 dB Bandwidth

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------

BT-LE 1M

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
0	2402	0.72	0.5	Pass
19	2440	0.72	0.5	Pass
39	2480	0.72	0.5	Pass

BT-LE 2M

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
0	2402	1.13	0.5	Pass
19	2440	1.13	0.5	Pass
39	2480	1.13	0.5	Pass





BT-LE 125k

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
0	2402	0.62	0.5	Pass
19	2440	0.62	0.5	Pass
39	2480	0.62	0.5	Pass

BT-LE 500k

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)	Test Result
0	2402	0.65	0.5	Pass
19	2440	0.65	0.5	Pass
39	2480	0.65	0.5	Pass


Spectrum Plot of Minimum Value

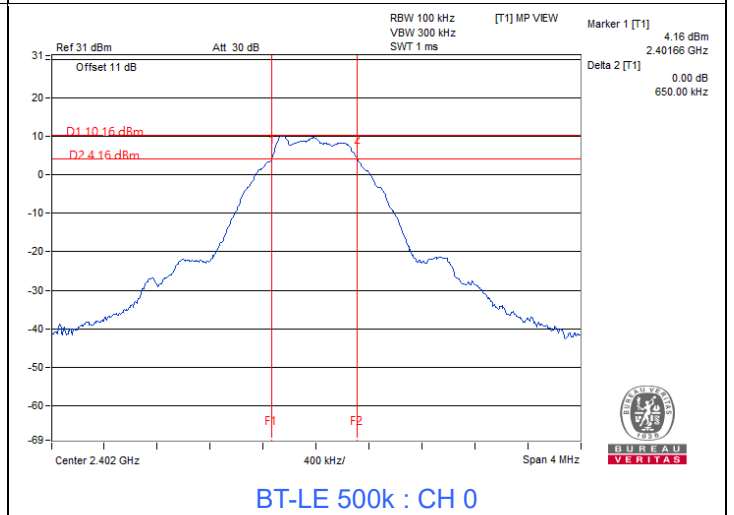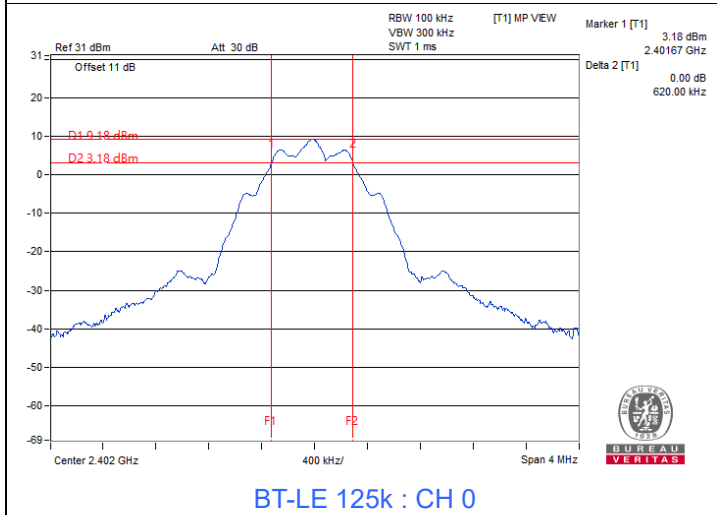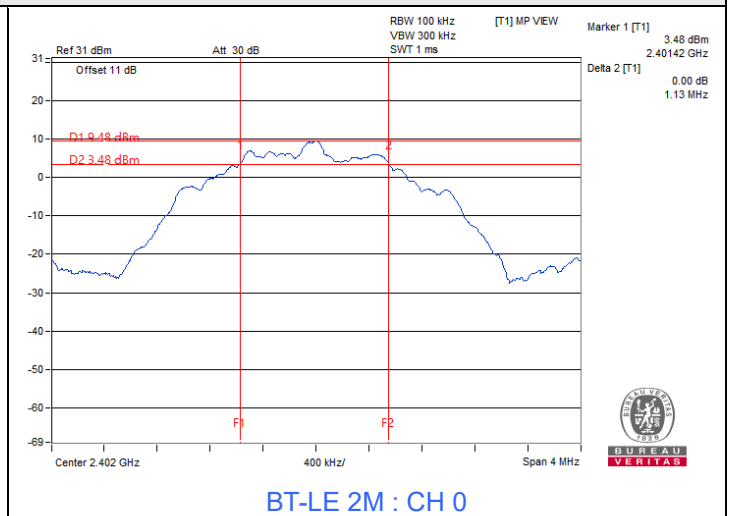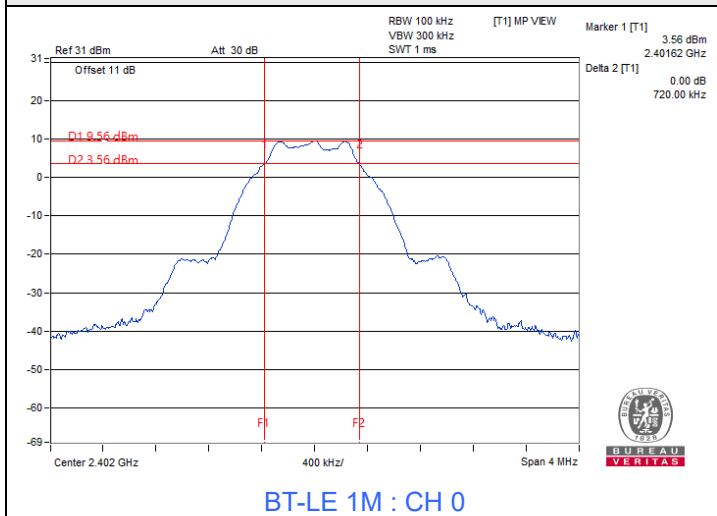


7.4 Conducted Out of Band Emissions

Input Power:	120 Vac, 60 Hz	Environmental Conditions:	25°C, 76% RH	Tested By:	Waydi Tuan
--------------	----------------	---------------------------	--------------	------------	------------


BT-LE 1M

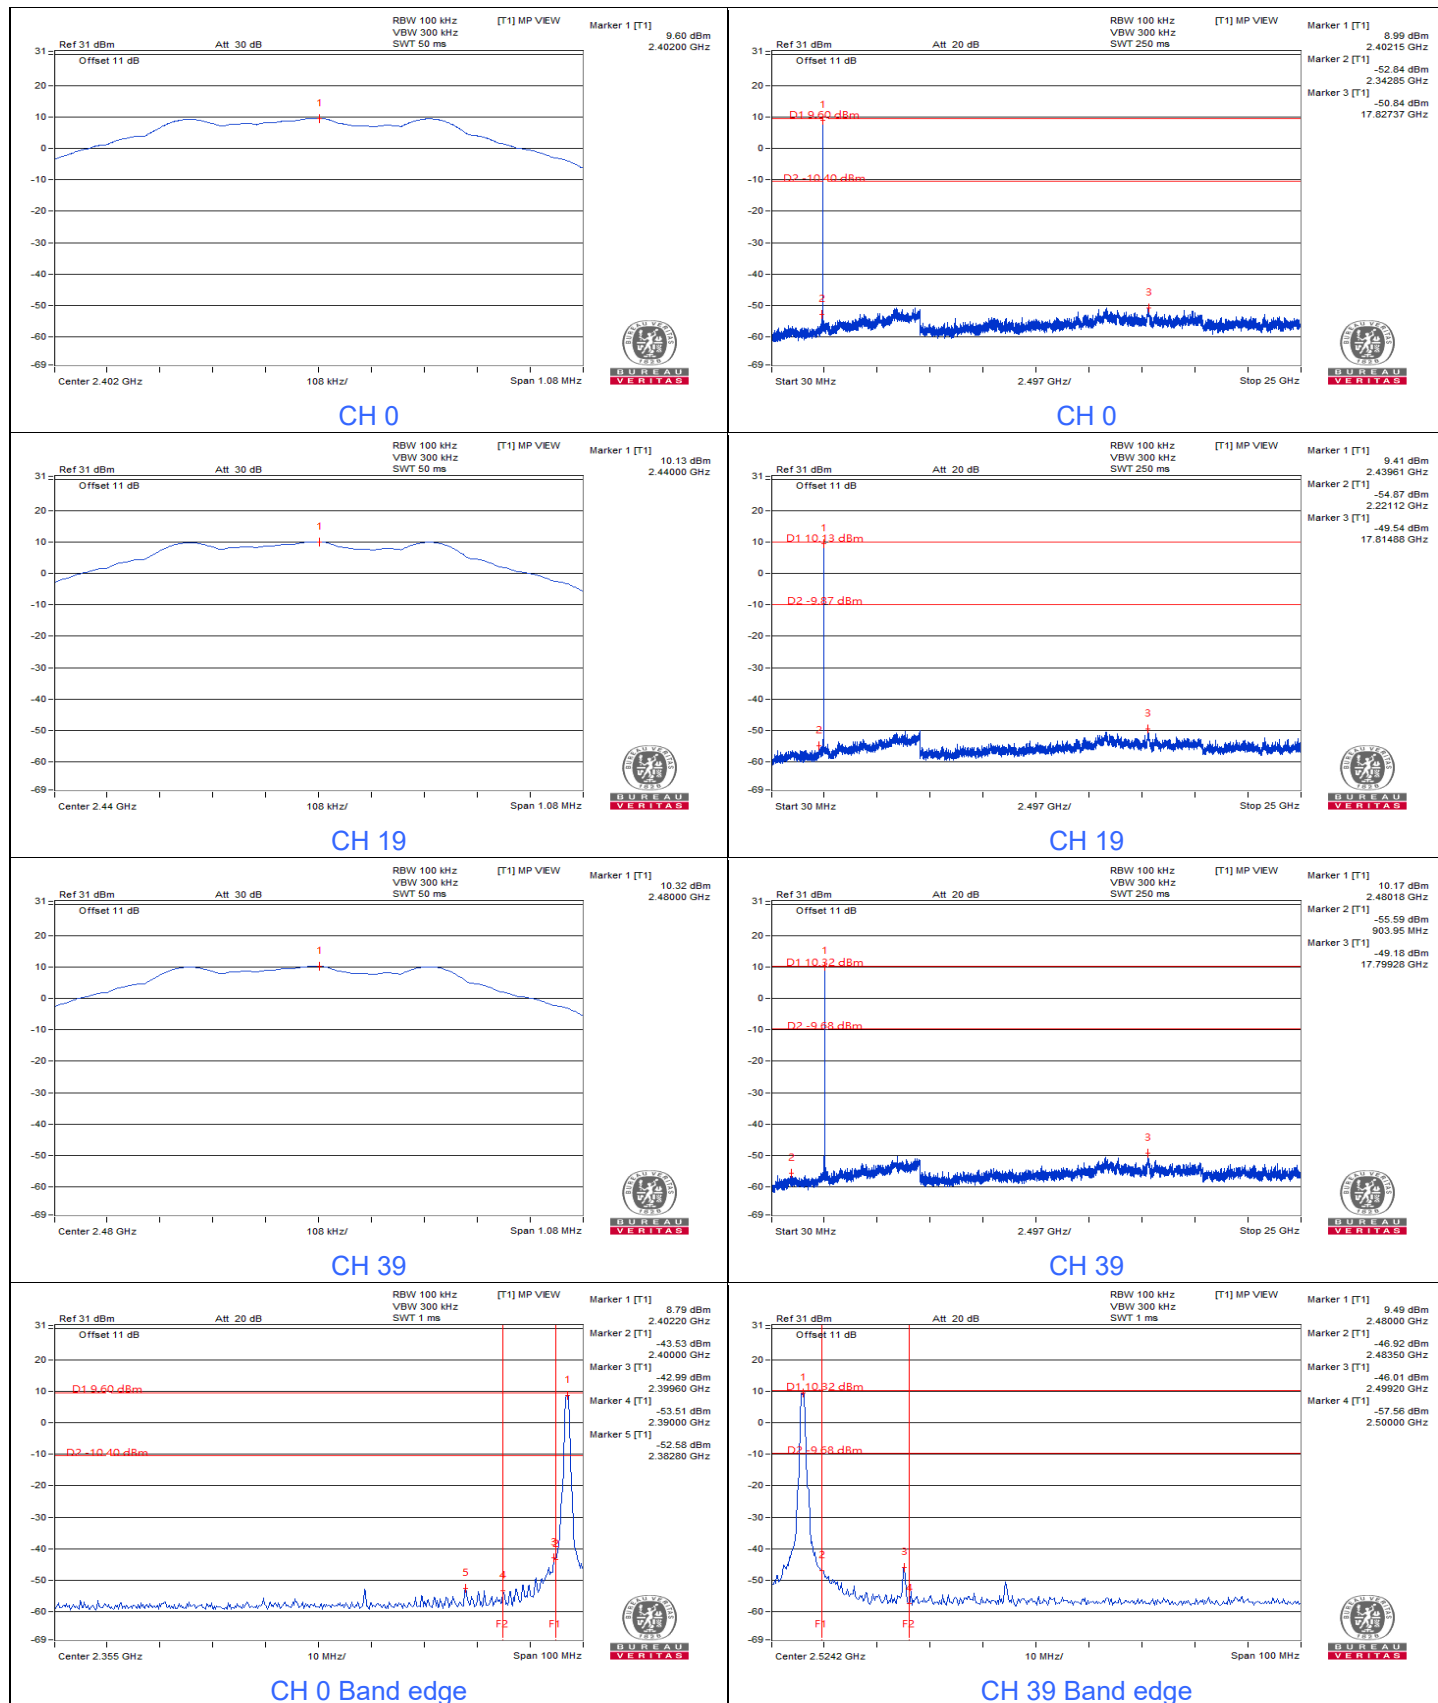


BT-LE 2M

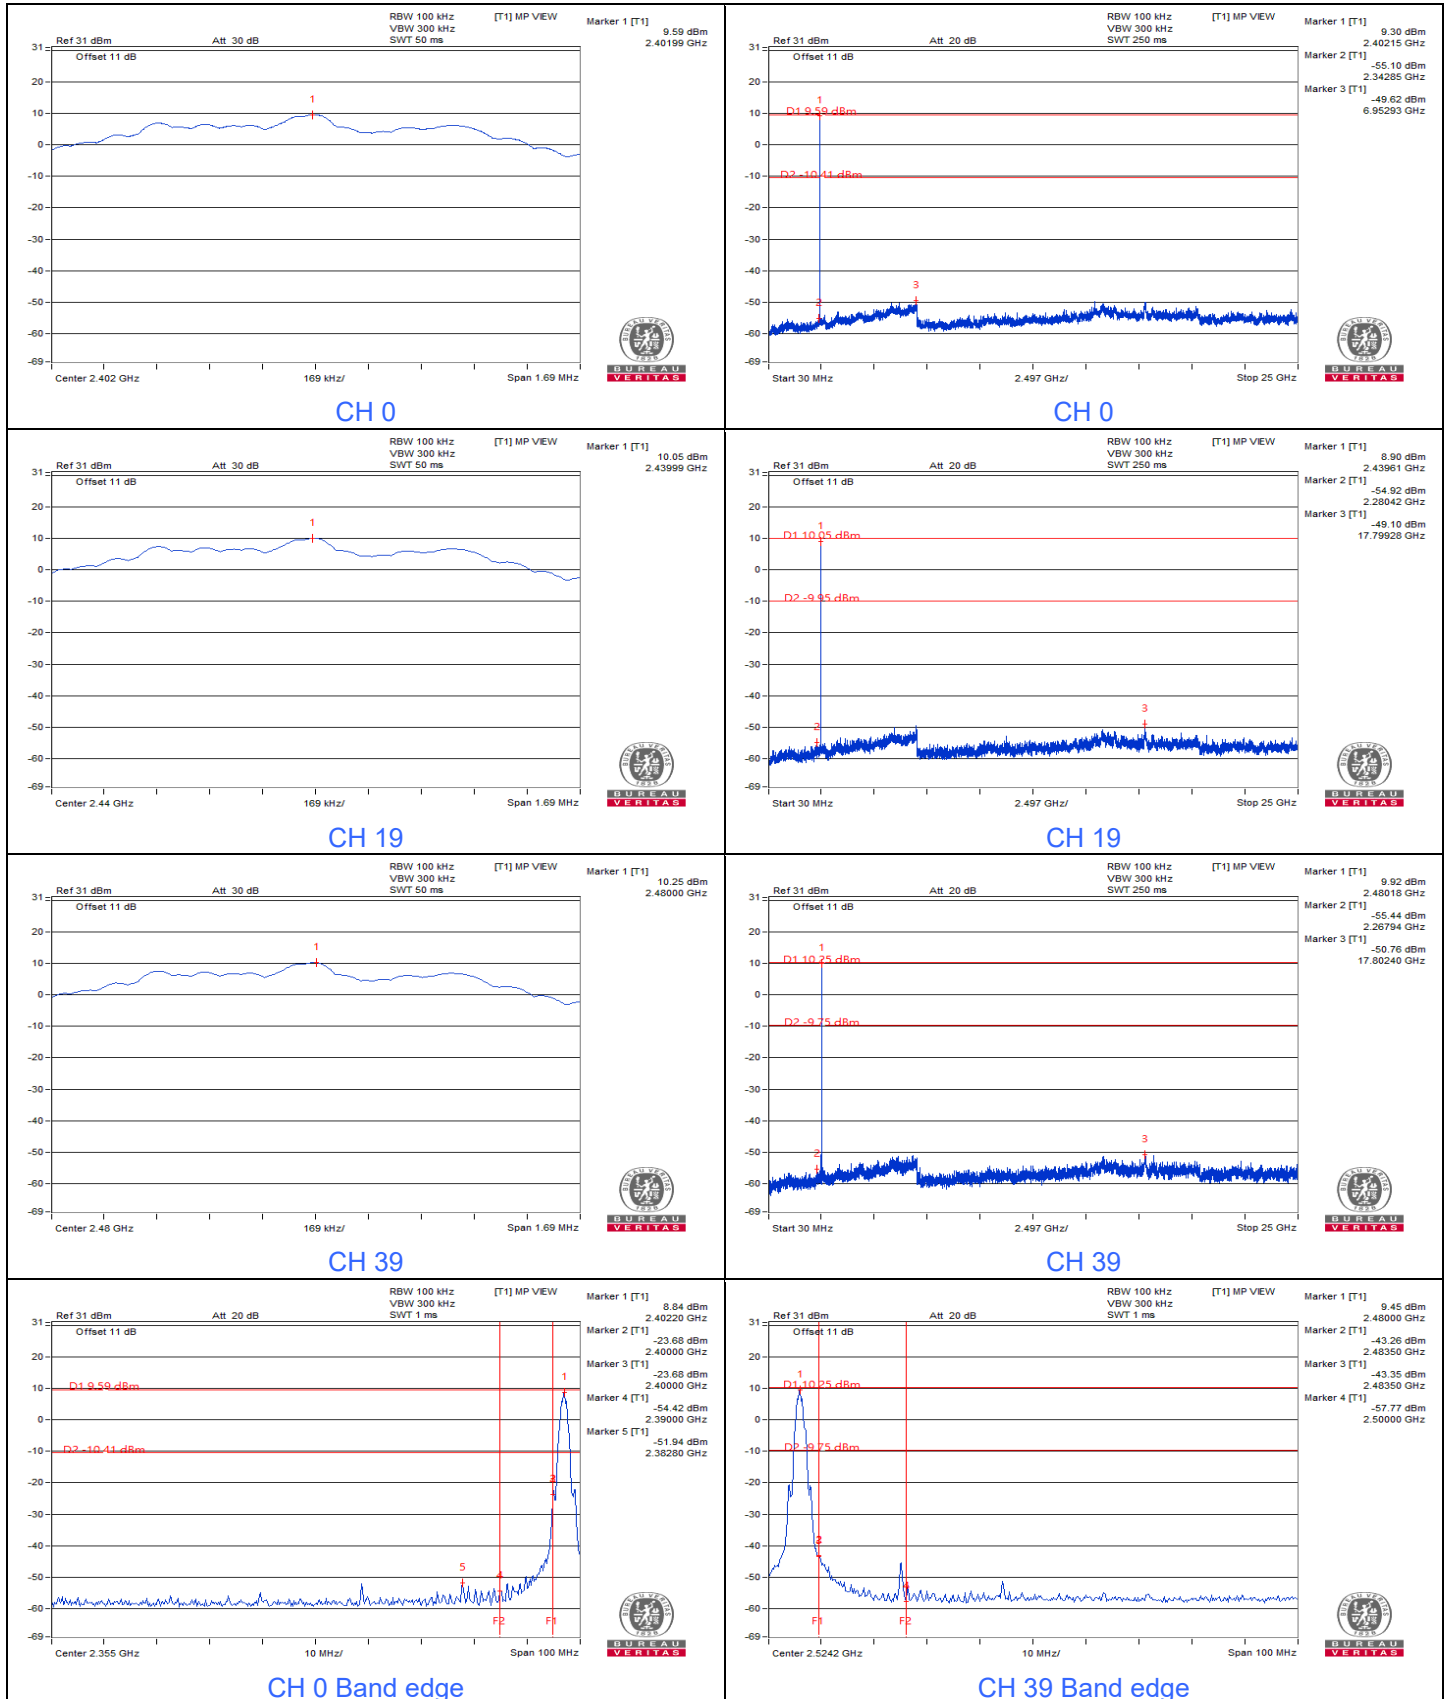

BT-LE 125k

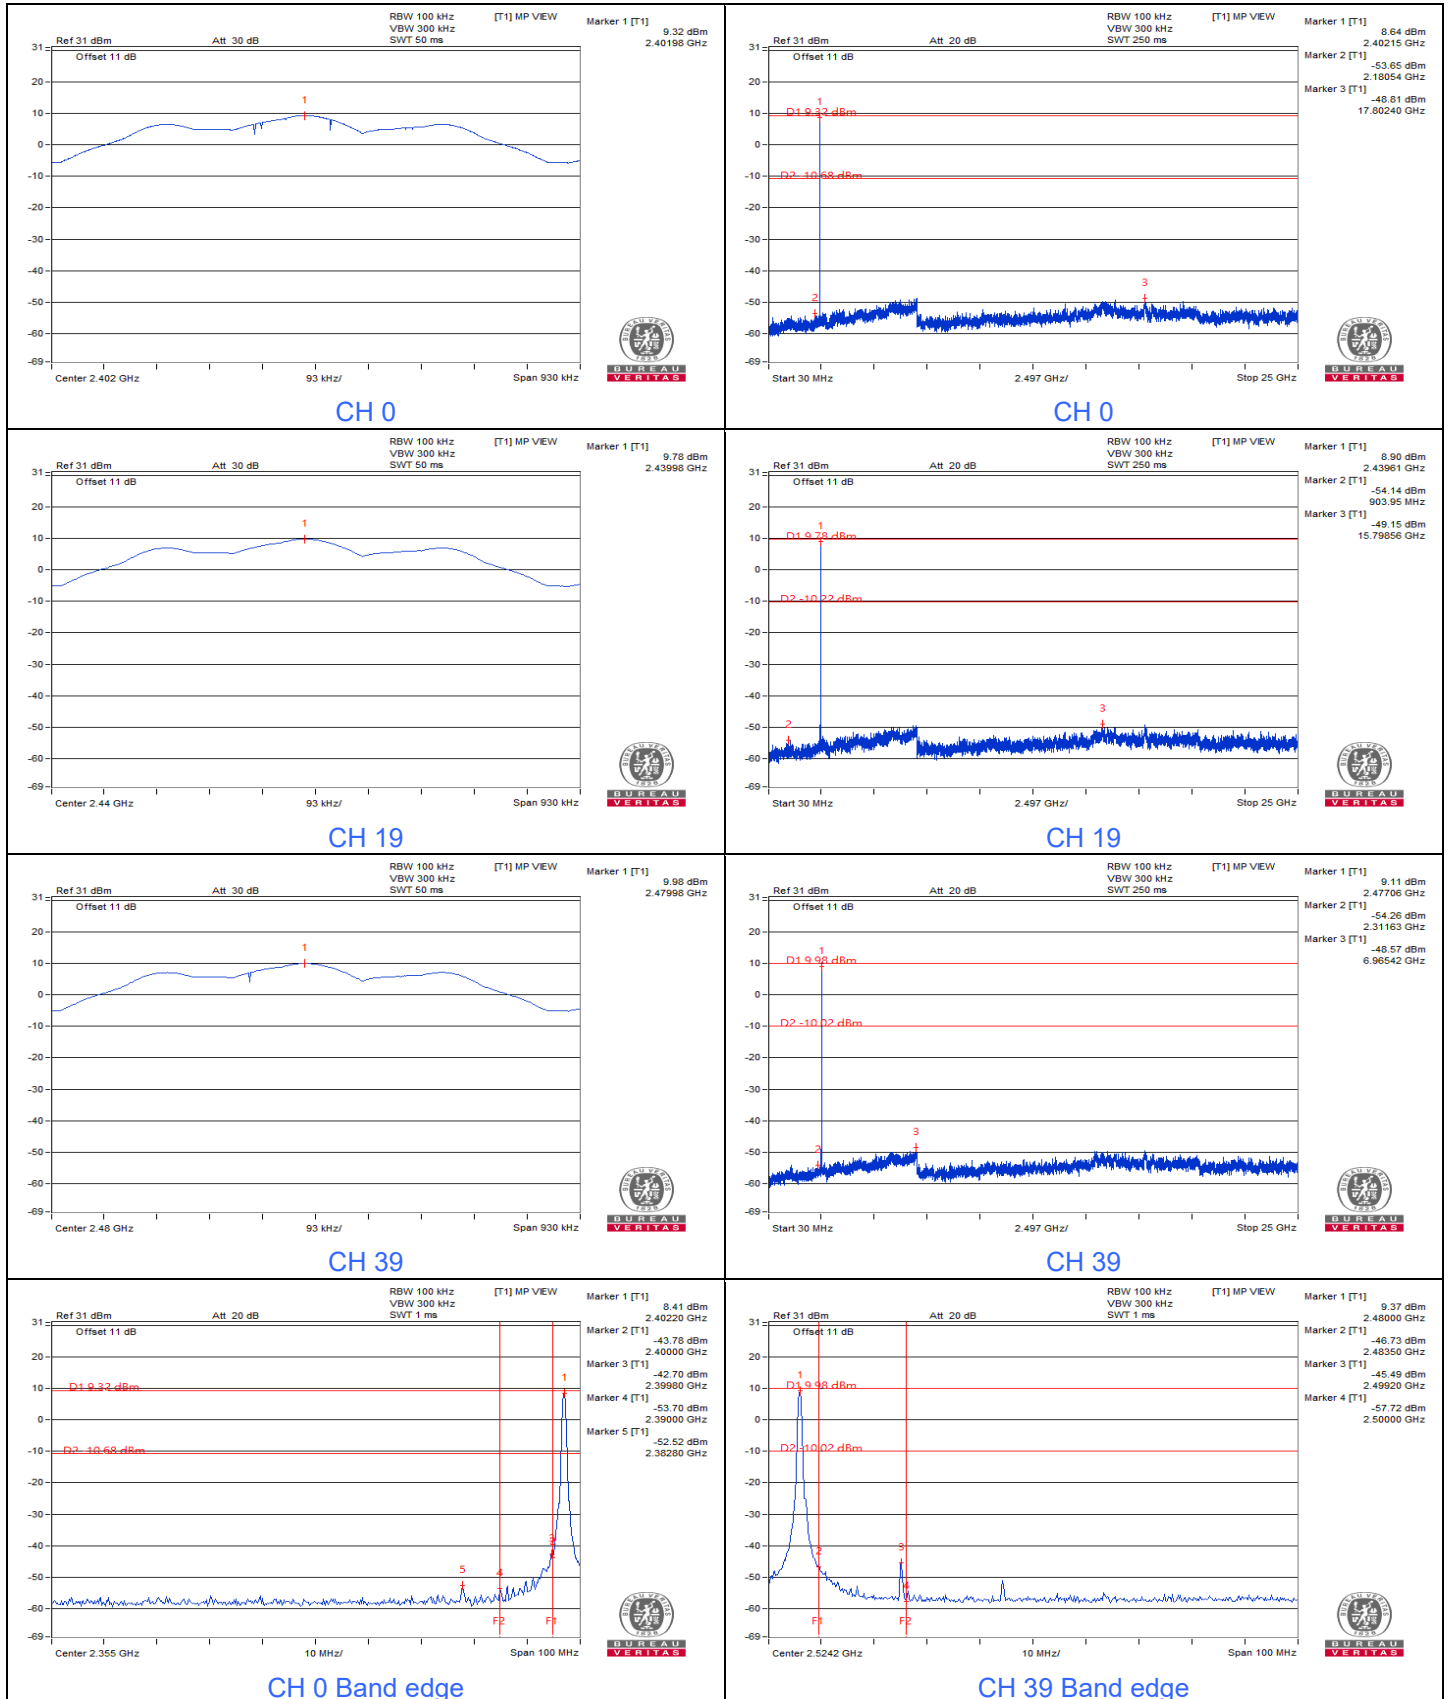

BT-LE 500k

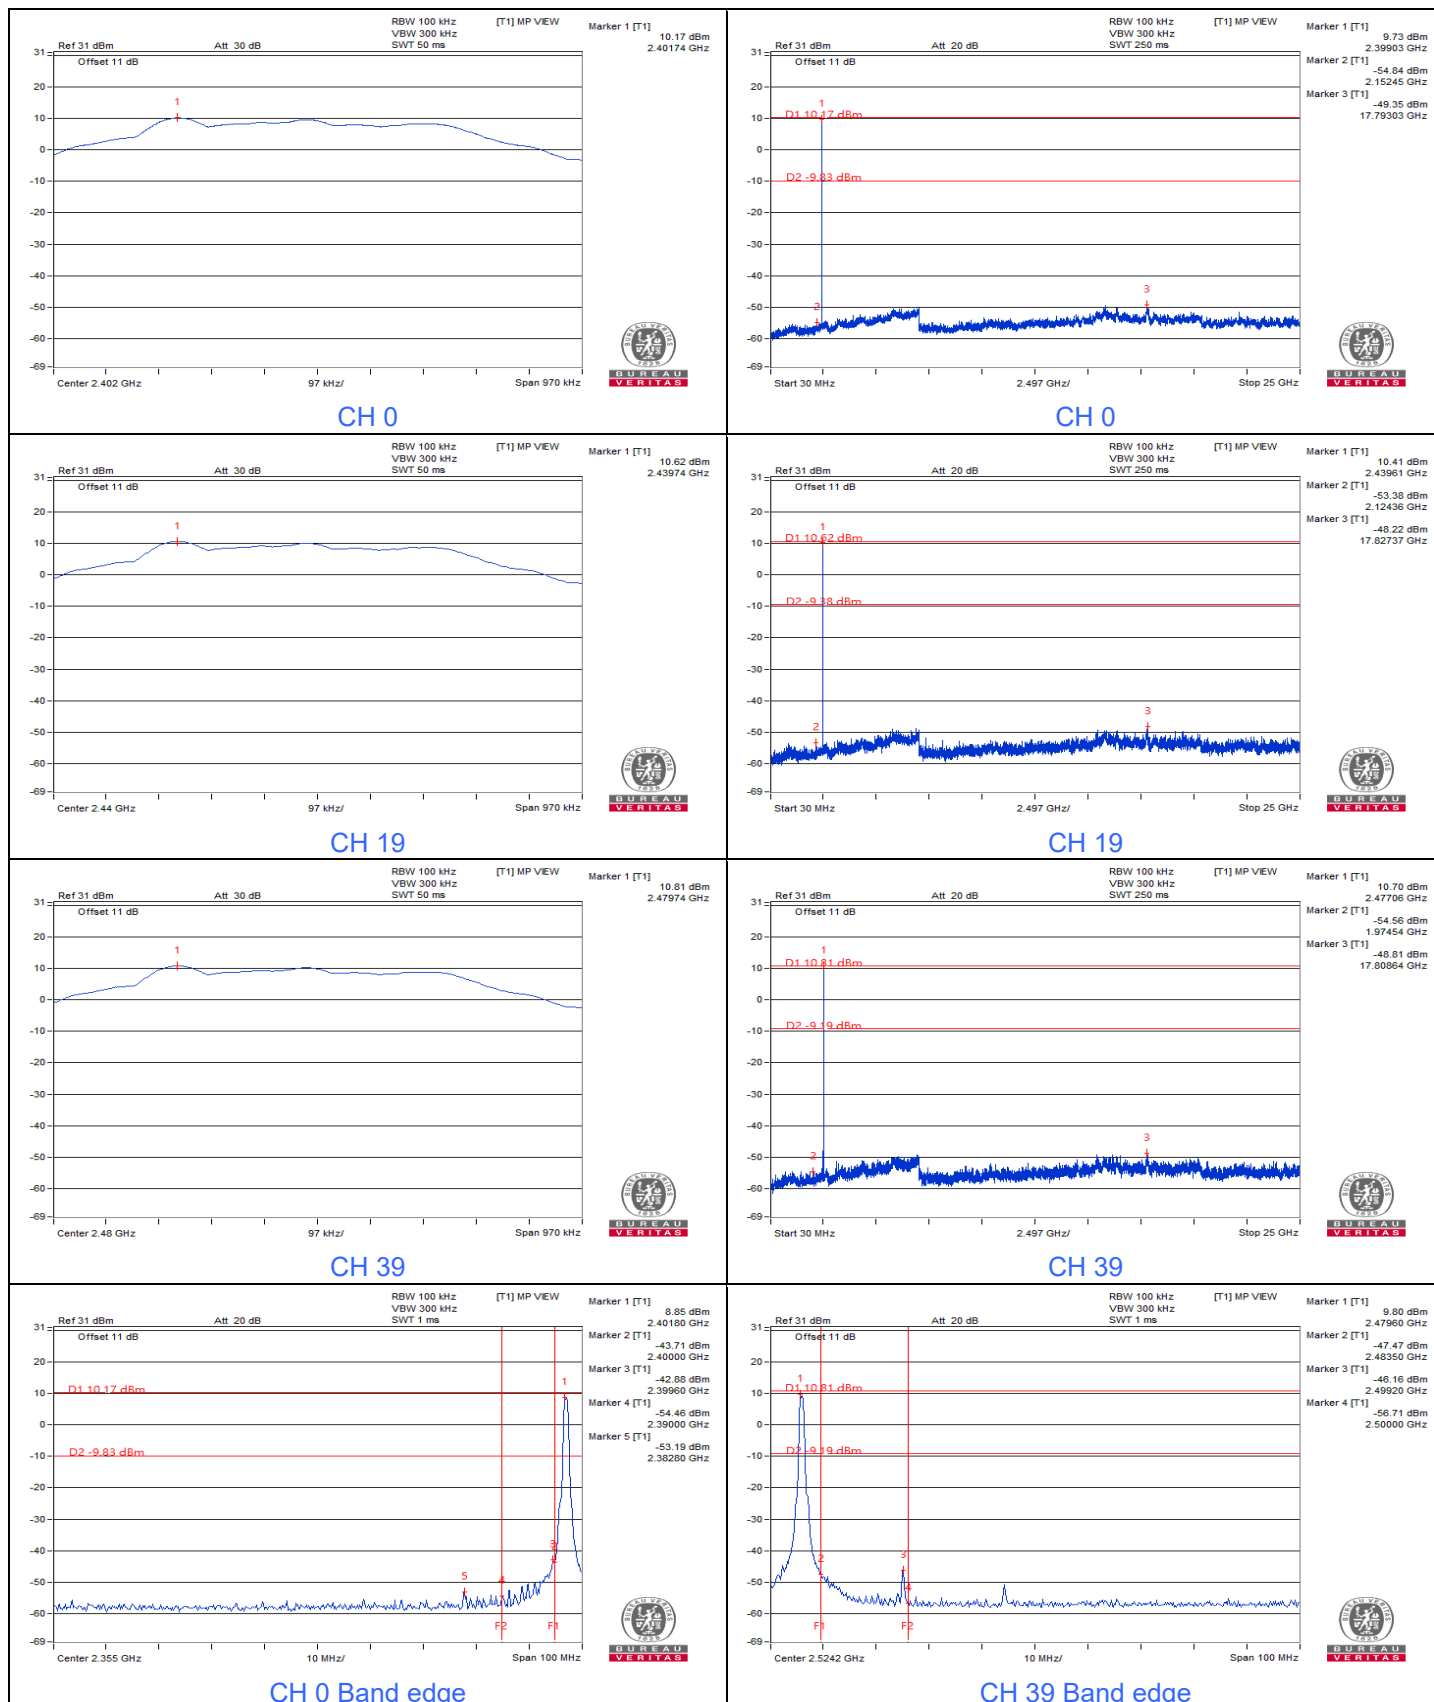


7.5 AC Power Conducted Emissions

RF Mode	BT-LE 125K	Channel	CH 39 : 2480 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.64	52.26	33.25	61.90	42.89	66.00	56.00	-4.10	-13.11
2	0.23594	9.63	44.80	29.79	54.43	39.42	62.24	52.24	-7.81	-12.82
3	0.27109	9.63	41.29	31.30	50.92	40.93	61.08	51.08	-10.16	-10.15
4	0.49375	9.64	38.33	33.64	47.97	43.28	56.10	46.10	-8.13	-2.82
5	0.95078	9.65	23.92	14.65	33.57	24.30	56.00	46.00	-22.43	-21.70
6	6.66016	9.92	23.37	14.33	33.29	24.25	60.00	50.00	-26.71	-25.75

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

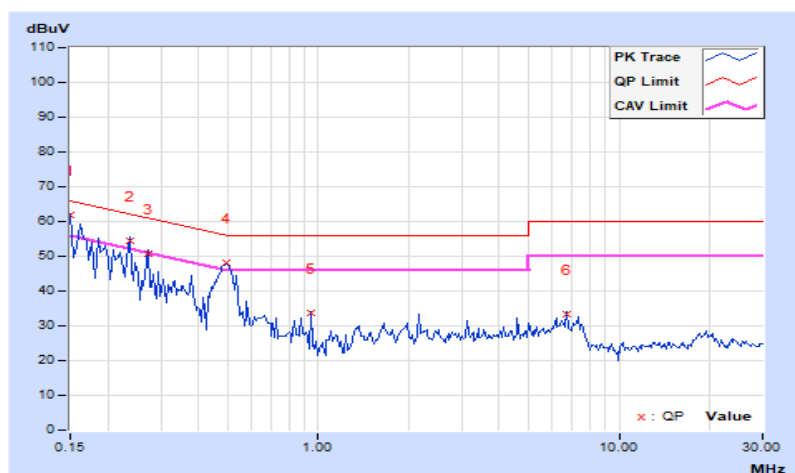


RF Mode	BT-LE 125K	Channel	CH 39 : 2480 MHz
Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.63	50.33	32.07	59.96	41.70	65.79	55.79	-5.83	-14.09
2	0.19687	9.61	43.73	29.73	53.34	39.34	63.74	53.74	-10.40	-14.40
3	0.50547	9.62	37.83	26.43	47.45	36.05	56.00	46.00	-8.55	-9.95
4	1.88672	9.69	23.50	16.51	33.19	26.20	56.00	46.00	-22.81	-19.80
5	3.98438	9.78	20.16	13.34	29.94	23.12	56.00	46.00	-26.06	-22.88
6	6.91016	9.92	22.56	13.56	32.48	23.48	60.00	50.00	-27.52	-26.52

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

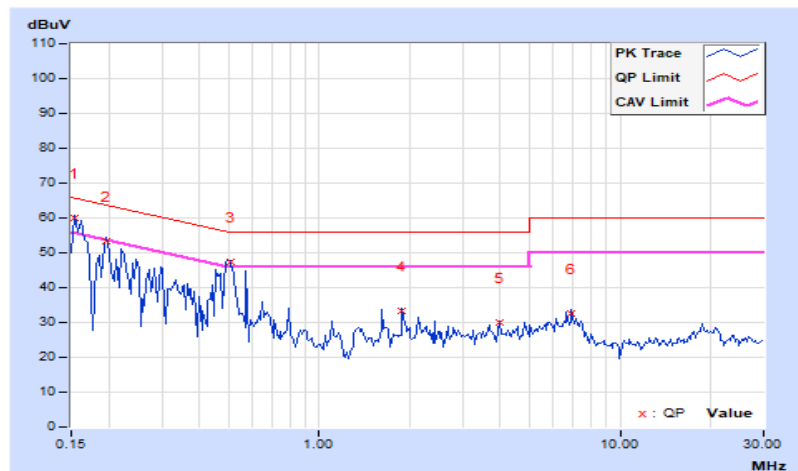


7.6 Unwanted Emissions below 1 GHz

RF Mode	BT-LE 125K	Channel	CH 39 : 2480 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.74	23.4 QP	40.0	-16.6	1.24 H	129	32.2	-8.8
2	132.82	22.3 QP	43.5	-21.2	1.78 H	241	31.1	-8.8
3	284.33	31.4 QP	46.0	-14.6	1.89 H	142	37.1	-5.7
4	401.56	31.7 QP	46.0	-14.3	1.36 H	229	35.0	-3.3
5	475.96	28.8 QP	46.0	-17.2	1.58 H	129	30.1	-1.3
6	654.78	30.9 QP	46.0	-15.1	1.69 H	132	28.3	2.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

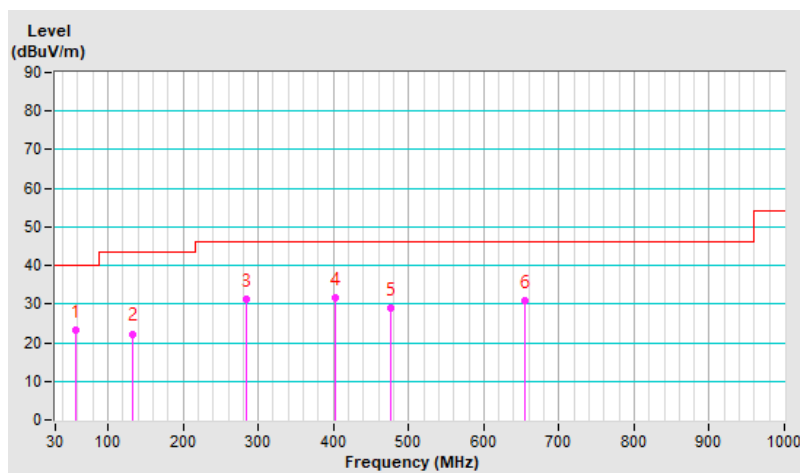


RF Mode	BT-LE 125K	Channel	CH 39 : 2480 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	QP: RB=120kHz, DET=Quasi-Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	25 °C, 75 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	64.92	26.2 QP	40.0	-13.8	1.45 V	231	36.0	-9.8
2	189.23	24.8 QP	43.5	-18.7	1.27 V	21	34.6	-9.8
3	278.90	26.8 QP	46.0	-19.2	1.86 V	170	32.7	-5.9
4	348.31	26.6 QP	46.0	-19.4	1.93 V	29	30.9	-4.3
5	419.84	30.3 QP	46.0	-15.7	1.20 V	190	32.9	-2.6
6	576.26	32.4 QP	46.0	-13.6	1.18 V	127	31.4	1.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

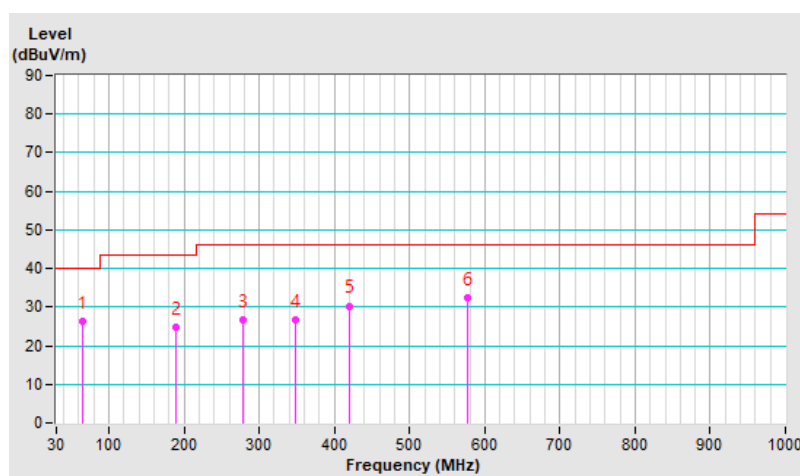

7.7 Unwanted Emissions above 1 GHz

RF Mode	BT-LE 1M	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.3 PK	74.0	-19.7	1.99 H	248	54.7	-0.4
2	2390.00	40.3 AV	54.0	-13.7	1.99 H	248	40.7	-0.4
3	*2402.00	103.7 PK			1.99 H	248	104.1	-0.4
4	*2402.00	102.6 AV			1.99 H	248	103.0	-0.4
5	4804.00	49.7 PK	74.0	-24.3	1.76 H	234	41.9	7.8
6	4804.00	36.5 AV	54.0	-17.5	1.76 H	234	28.7	7.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.9 PK	74.0	-20.1	1.94 V	150	54.3	-0.4
2	2390.00	39.9 AV	54.0	-14.1	1.94 V	150	40.3	-0.4
3	*2402.00	102.3 PK			1.94 V	150	102.7	-0.4
4	*2402.00	101.1 AV			1.94 V	150	101.5	-0.4
5	4804.00	49.3 PK	74.0	-24.7	2.14 V	133	41.5	7.8
6	4804.00	36.1 AV	54.0	-17.9	2.14 V	133	28.3	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 1M	Channel	CH 19 : 2440 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	104.4 PK			1.89 H	235	104.6	-0.2
2	*2440.00	103.3 AV			1.89 H	235	103.5	-0.2
3	4880.00	50.1 PK	74.0	-23.9	1.66 H	221	42.0	8.1
4	4880.00	36.9 AV	54.0	-17.1	1.66 H	221	28.8	8.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	103.0 PK			2.04 V	128	103.2	-0.2
2	*2440.00	101.8 AV			2.04 V	128	102.0	-0.2
3	4880.00	49.7 PK	74.0	-24.3	2.24 V	109	41.6	8.1
4	4880.00	36.5 AV	54.0	-17.5	2.24 V	109	28.4	8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 1M	Channel	CH 39 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	104.8 PK			2.53 H	254	104.8	0.0
2	*2480.00	103.7 AV			2.53 H	254	103.7	0.0
3	2483.50	58.6 PK	74.0	-15.4	2.53 H	254	58.6	0.0
4	2483.50	49.1 AV	54.0	-4.9	2.53 H	254	49.1	0.0
5	4960.00	50.5 PK	74.0	-23.5	2.30 H	240	42.3	8.2
6	4960.00	37.3 AV	54.0	-16.7	2.30 H	240	29.1	8.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	103.4 PK			2.48 V	156	103.4	0.0
2	*2480.00	102.2 AV			2.48 V	156	102.2	0.0
3	2483.50	58.1 PK	74.0	-15.9	2.48 V	156	58.1	0.0
4	2483.50	45.6 AV	54.0	-8.4	2.48 V	156	45.6	0.0
5	4960.00	50.1 PK	74.0	-23.9	2.68 V	139	41.9	8.2
6	4960.00	36.9 AV	54.0	-17.1	2.68 V	139	28.7	8.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 2M	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.1 PK	74.0	-19.9	1.98 H	249	54.5	-0.4
2	2390.00	40.1 AV	54.0	-13.9	1.98 H	249	40.5	-0.4
3	*2402.00	103.7 PK			1.98 H	249	104.1	-0.4
4	*2402.00	99.9 AV			1.98 H	249	100.3	-0.4
5	4804.00	49.8 PK	74.0	-24.2	1.75 H	232	42.0	7.8
6	4804.00	36.6 AV	54.0	-17.4	1.75 H	232	28.8	7.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.7 PK	74.0	-20.3	1.93 V	149	54.1	-0.4
2	2390.00	39.6 AV	54.0	-14.4	1.93 V	149	40.0	-0.4
3	*2402.00	102.0 PK			1.93 V	149	102.4	-0.4
4	*2402.00	98.2 AV			1.93 V	149	98.6	-0.4
5	4804.00	49.1 PK	74.0	-24.9	2.11 V	130	41.3	7.8
6	4804.00	35.9 AV	54.0	-18.1	2.11 V	130	28.1	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 2M	Channel	CH 19 : 2440 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	104.3 PK			1.93 H	252	104.5	-0.2
2	*2440.00	100.5 AV			1.93 H	252	100.7	-0.2
3	4880.00	50.1 PK	74.0	-23.9	1.70 H	235	42.0	8.1
4	4880.00	36.9 AV	54.0	-17.1	1.70 H	235	28.8	8.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	102.6 PK			1.87 V	126	102.8	-0.2
2	*2440.00	98.8 AV			1.87 V	126	99.0	-0.2
3	4880.00	49.4 PK	74.0	-24.6	2.06 V	101	41.3	8.1
4	4880.00	36.2 AV	54.0	-17.8	2.06 V	101	28.1	8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 2M	Channel	CH 39 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	105.1 PK			2.53 H	253	105.1	0.0
2	*2480.00	102.5 AV			2.53 H	253	102.5	0.0
3	2483.50	60.5 PK	74.0	-13.5	2.53 H	253	60.5	0.0
4	2483.50	49.5 AV	54.0	-4.5	2.53 H	253	49.5	0.0
5	4960.00	50.8 PK	74.0	-23.2	2.30 H	236	42.6	8.2
6	4960.00	37.6 AV	54.0	-16.4	2.30 H	236	29.4	8.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	103.4 PK			2.49 V	155	103.4	0.0
2	*2480.00	100.8 AV			2.49 V	155	100.8	0.0
3	2483.50	58.4 PK	74.0	-15.6	2.49 V	155	58.4	0.0
4	2483.50	45.9 AV	54.0	-8.1	2.49 V	155	45.9	0.0
5	4960.00	50.4 PK	74.0	-23.6	2.65 V	136	42.2	8.2
6	4960.00	37.2 AV	54.0	-16.8	2.65 V	136	29.0	8.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 125K	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.2 PK	74.0	-19.8	1.99 H	246	54.6	-0.4
2	2390.00	40.1 AV	54.0	-13.9	1.99 H	246	40.5	-0.4
3	*2402.00	103.8 PK			1.99 H	246	104.2	-0.4
4	*2402.00	102.6 AV			1.99 H	246	103.0	-0.4
5	4804.00	49.6 PK	74.0	-24.4	1.75 H	232	41.8	7.8
6	4804.00	36.4 AV	54.0	-17.6	1.75 H	232	28.6	7.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.6 PK	74.0	-20.4	1.94 V	147	54.0	-0.4
2	2390.00	39.5 AV	54.0	-14.5	1.94 V	147	39.9	-0.4
3	*2402.00	102.3 PK			1.94 V	147	102.7	-0.4
4	*2402.00	101.2 AV			1.94 V	147	101.6	-0.4
5	4804.00	49.2 PK	74.0	-24.8	2.13 V	130	41.4	7.8
6	4804.00	36.0 AV	54.0	-18.0	2.13 V	130	28.2	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 125K	Channel	CH 19 : 2440 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	104.5 PK			1.90 H	237	104.7	-0.2
2	*2440.00	103.3 AV			1.90 H	237	103.5	-0.2
3	4880.00	50.2 PK	74.0	-23.8	1.65 H	219	42.1	8.1
4	4880.00	37.0 AV	54.0	-17.0	1.65 H	219	28.9	8.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	103.1 PK			1.94 V	133	103.3	-0.2
2	*2440.00	101.8 AV			1.94 V	133	102.0	-0.2
3	4880.00	49.8 PK	74.0	-24.2	2.13 V	105	41.7	8.1
4	4880.00	36.6 AV	54.0	-17.4	2.13 V	105	28.5	8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 125K	Channel	CH 39 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	105.2 PK			2.52 H	254	105.2	0.0
2	*2480.00	104.0 AV			2.52 H	254	104.0	0.0
3	2483.50	60.0 PK	74.0	-14.0	2.52 H	254	60.0	0.0
4	2483.50	48.2 AV	54.0	-5.8	2.52 H	254	48.2	0.0
5	4960.00	50.9 PK	74.0	-23.1	2.29 H	241	42.7	8.2
6	4960.00	37.7 AV	54.0	-16.3	2.29 H	241	29.5	8.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	103.8 PK			2.47 V	158	103.8	0.0
2	*2480.00	102.7 AV			2.47 V	158	102.7	0.0
3	2483.50	57.0 PK	74.0	-17.0	2.47 V	158	57.0	0.0
4	2483.50	44.3 AV	54.0	-9.7	2.47 V	158	44.3	0.0
5	4960.00	50.5 PK	74.0	-23.5	2.69 V	141	42.3	8.2
6	4960.00	37.3 AV	54.0	-16.7	2.69 V	141	29.1	8.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 500K	Channel	CH 0 : 2402 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.4 PK	74.0	-19.6	1.99 H	248	54.8	-0.4
2	2390.00	40.3 AV	54.0	-13.7	1.99 H	248	40.7	-0.4
3	*2402.00	103.9 PK			1.99 H	248	104.3	-0.4
4	*2402.00	102.8 AV			1.99 H	248	103.2	-0.4
5	4804.00	49.7 PK	74.0	-24.3	1.76 H	234	41.9	7.8
6	4804.00	36.5 AV	54.0	-17.5	1.76 H	234	28.7	7.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	53.8 PK	74.0	-20.2	1.94 V	149	54.2	-0.4
2	2390.00	39.7 AV	54.0	-14.3	1.94 V	149	40.1	-0.4
3	*2402.00	102.4 PK			1.94 V	149	102.8	-0.4
4	*2402.00	101.3 AV			1.94 V	149	101.7	-0.4
5	4804.00	49.4 PK	74.0	-24.6	2.12 V	132	41.6	7.8
6	4804.00	36.2 AV	54.0	-17.8	2.12 V	132	28.4	7.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 500K	Channel	CH 19 : 2440 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	104.6 PK			1.93 H	234	104.8	-0.2
2	*2440.00	103.2 AV			1.93 H	234	103.4	-0.2
3	4880.00	50.4 PK	74.0	-23.6	1.66 H	216	42.3	8.1
4	4880.00	37.2 AV	54.0	-16.8	1.66 H	216	29.1	8.1
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2440.00	103.2 PK			1.96 V	130	103.4	-0.2
2	*2440.00	101.7 AV			1.96 V	130	101.9	-0.2
3	4880.00	50.0 PK	74.0	-24.0	2.15 V	108	41.9	8.1
4	4880.00	36.8 AV	54.0	-17.2	2.15 V	108	28.7	8.1

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency, the limit was restricted at the RF Output Power.

RF Mode	BT-LE 500K	Channel	CH 39 : 2480 MHz
Frequency Range	1 GHz ~ 25 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
Input Power	120 Vac, 60 Hz	Environmental Conditions	23.4 °C, 73.8 % RH
Tested By	Jed Wu		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	105.1 PK			2.52 H	254	105.1	0.0
2	*2480.00	104.0 AV			2.52 H	254	104.0	0.0
3	2483.50	58.1 PK	74.0	-15.9	2.52 H	254	58.1	0.0
4	2483.50	45.2 AV	54.0	-8.8	2.52 H	254	45.2	0.0
5	4960.00	50.8 PK	74.0	-23.2	2.30 H	242	42.6	8.2
6	4960.00	37.6 AV	54.0	-16.4	2.30 H	242	29.4	8.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2480.00	103.7 PK			2.49 V	154	103.7	0.0
2	*2480.00	102.5 AV			2.49 V	154	102.5	0.0
3	2483.50	55.6 PK	74.0	-18.4	2.49 V	154	55.6	0.0
4	2483.50	44.8 AV	54.0	-9.2	2.49 V	154	44.8	0.0
5	4960.00	50.4 PK	74.0	-23.6	2.71 V	139	42.2	8.2
6	4960.00	37.2 AV	54.0	-16.8	2.71 V	139	29.0	8.2


Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency, the limit was restricted at the RF Output Power.

Plot of Band Edge


Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
-----------------	----------------------	-------------------------------	--

BT-LE 1M Channel 0

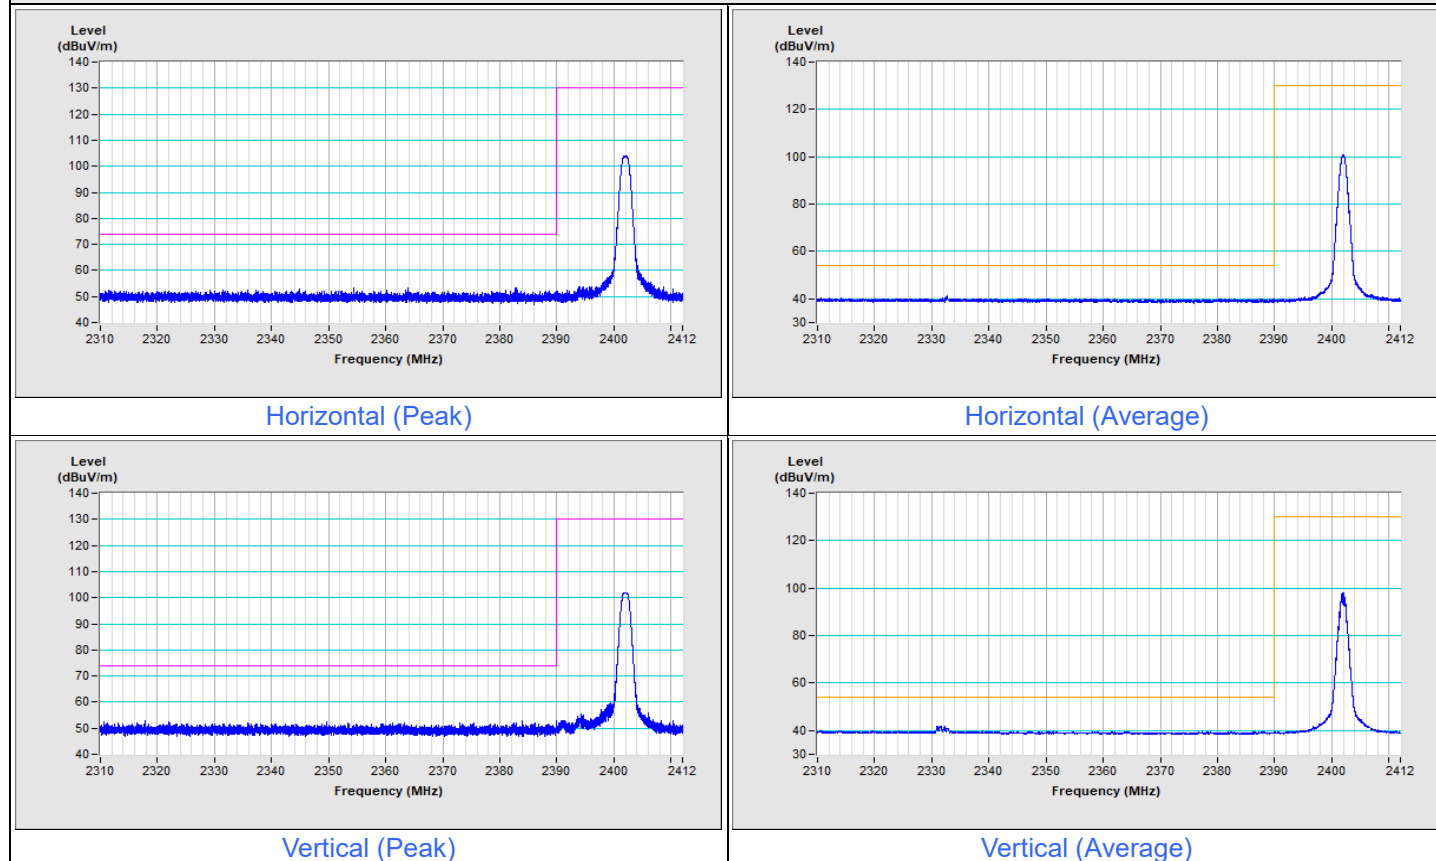


Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=3 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


BT-LE 1M Channel 39

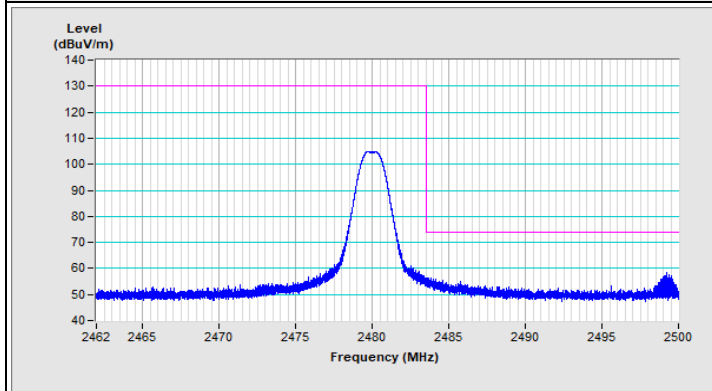


Horizontal (Peak)

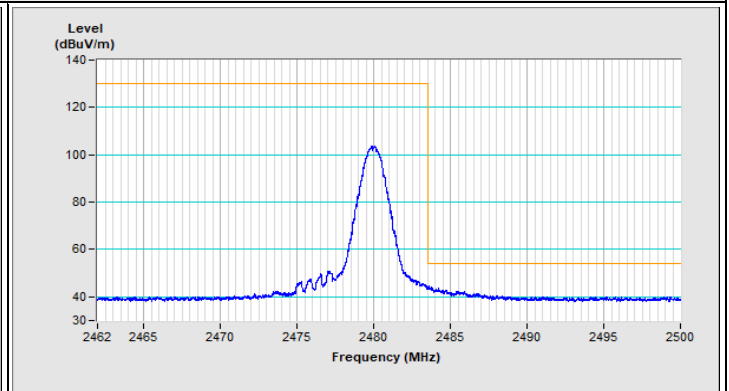

Horizontal (Average)

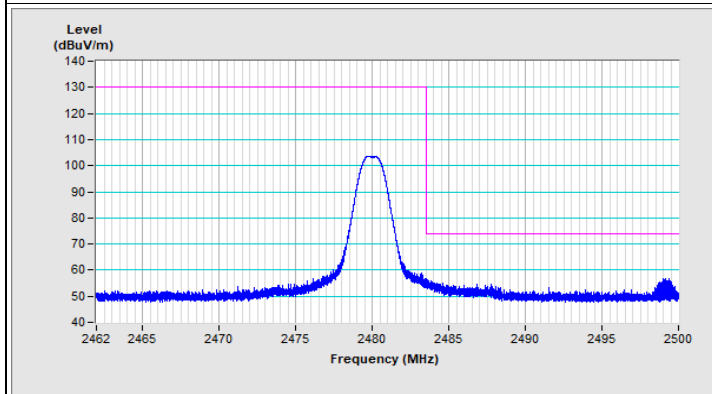


Vertical (Peak)

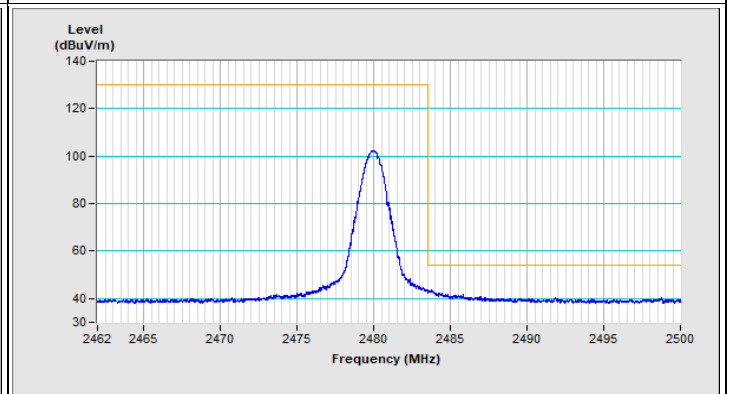


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
-----------------	----------------------	-------------------------------	--


BT-LE 2M Channel 0

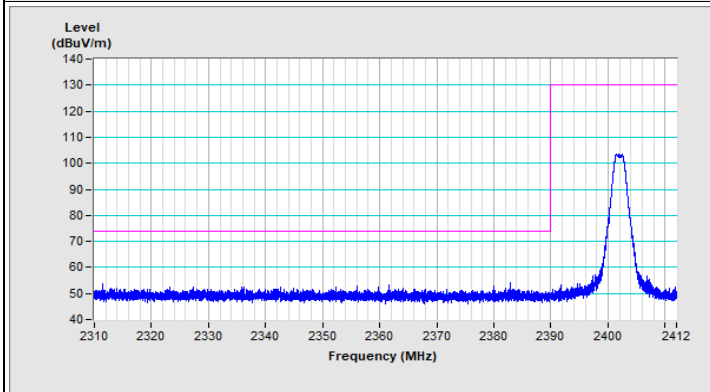


Horizontal (Peak)

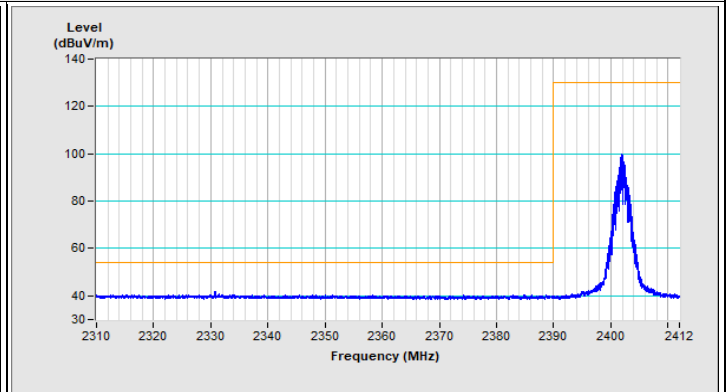

Horizontal (Average)

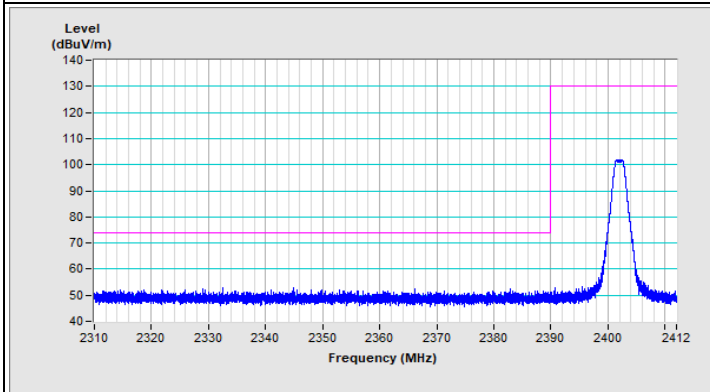


Vertical (Peak)

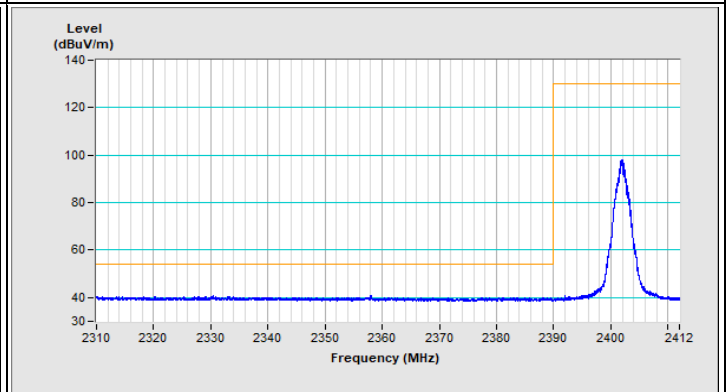


Vertical (Average)

Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=5.1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--


BT-LE 2M Channel 39

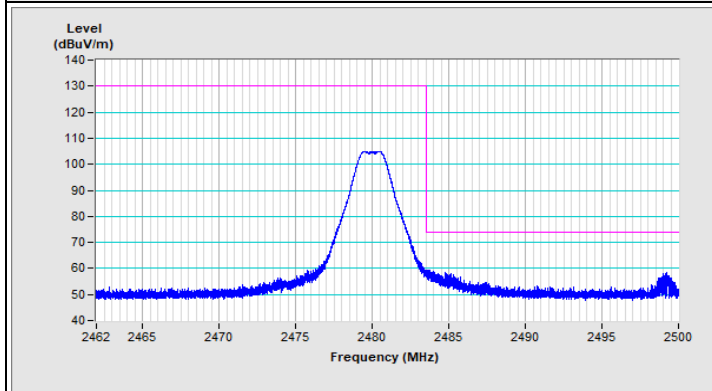


Horizontal (Peak)

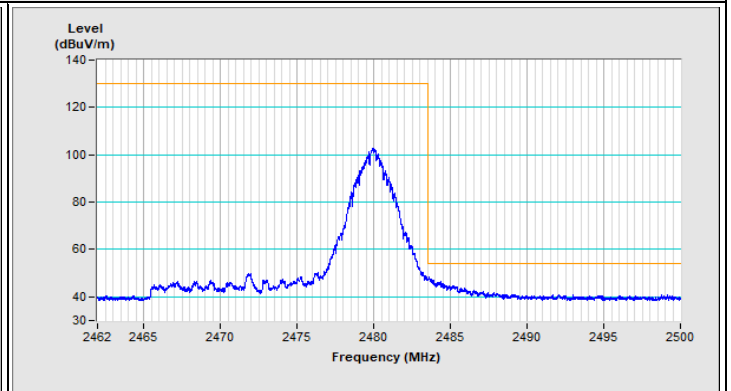

Horizontal (Average)

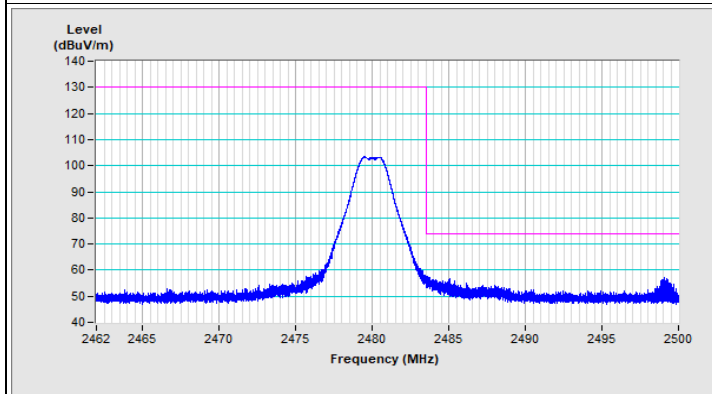


Vertical (Peak)

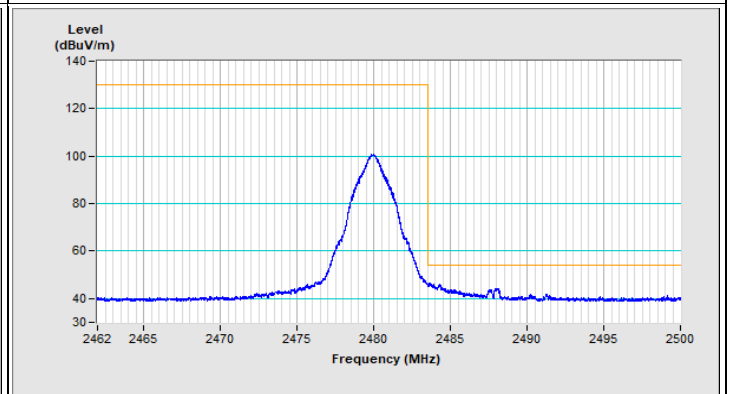


Vertical (Average)

Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	----------------------	-------------------------------	---


BT-LE 125K Channel 0

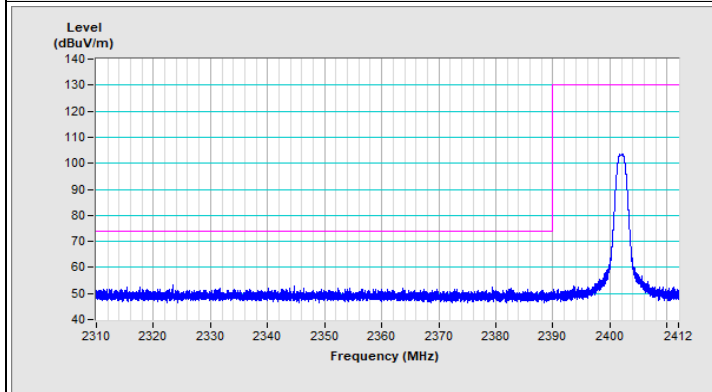


Horizontal (Peak)

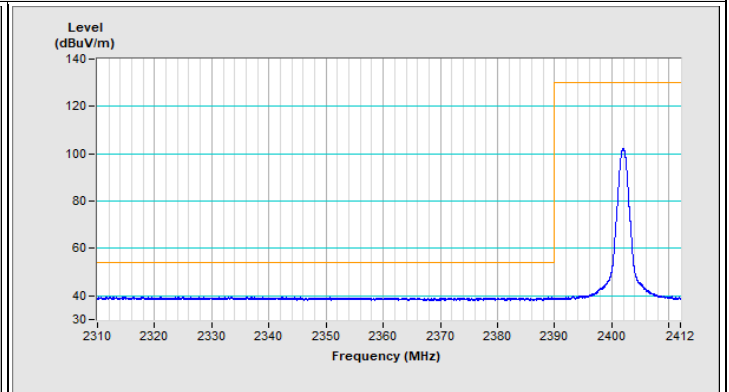

Horizontal (Average)

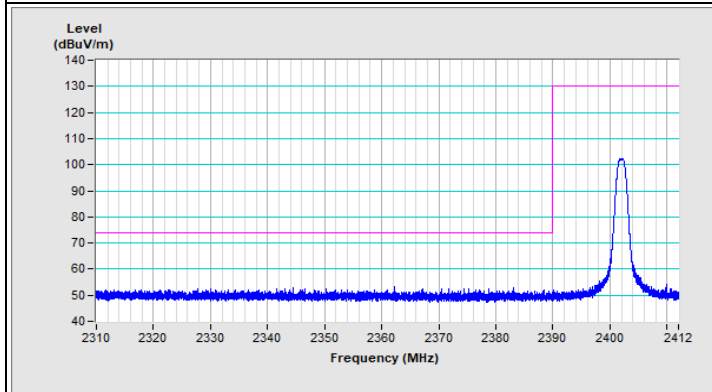


Vertical (Peak)

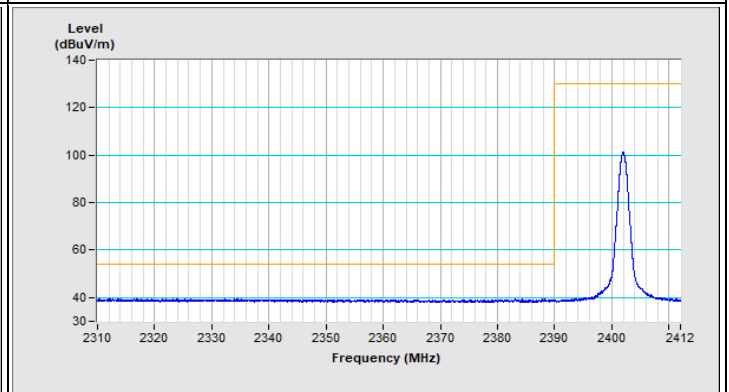

Vertical (Average)


Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=510 Hz, DET=Peak
-----------------	---------------------	-------------------------------	---

BT-LE 125K Channel 39

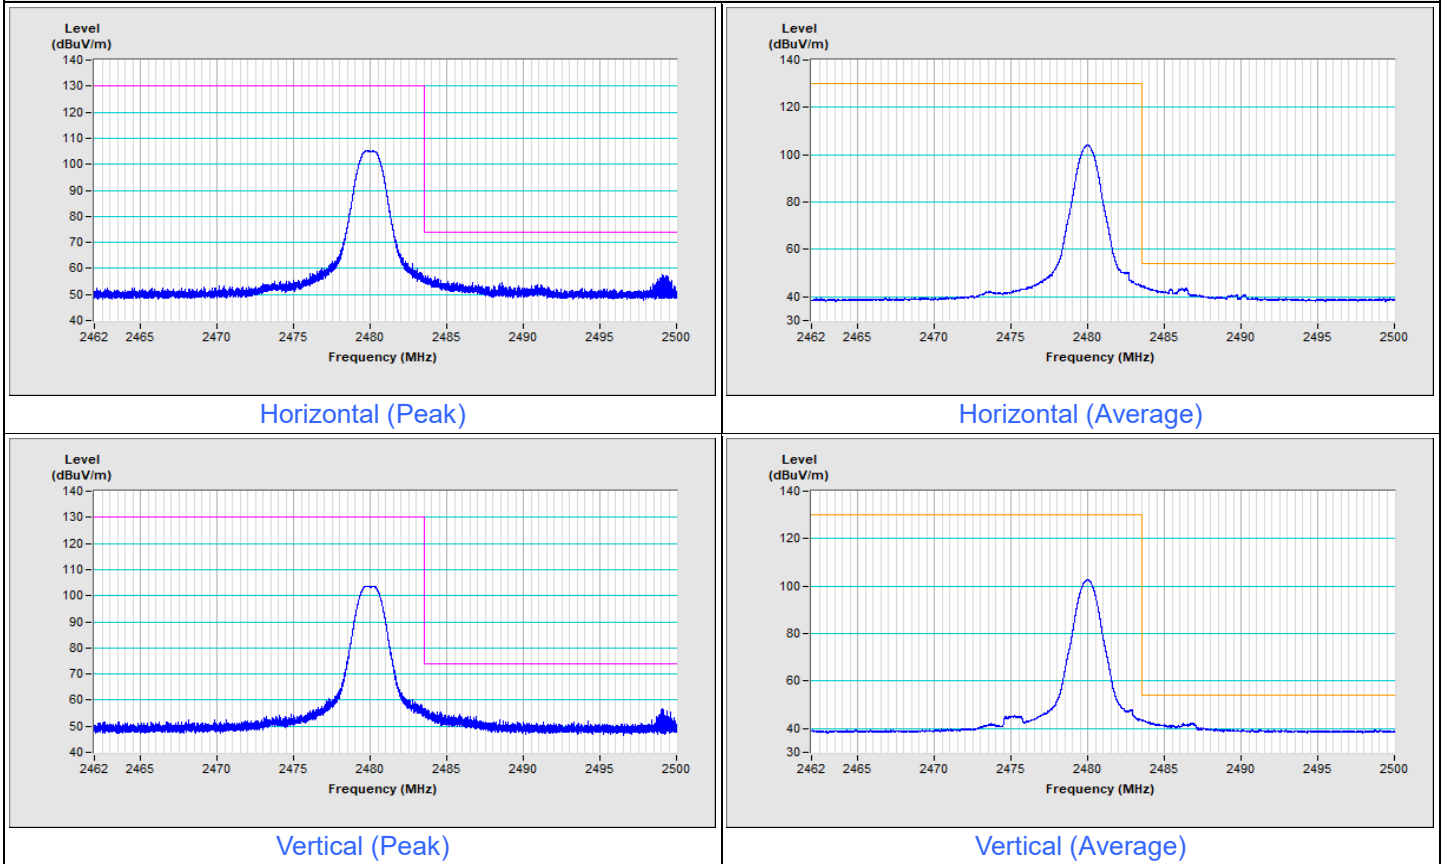


Frequency Range	2.31 GHz ~ 2.412 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	----------------------	-------------------------------	--


BT-LE 500K Channel 0

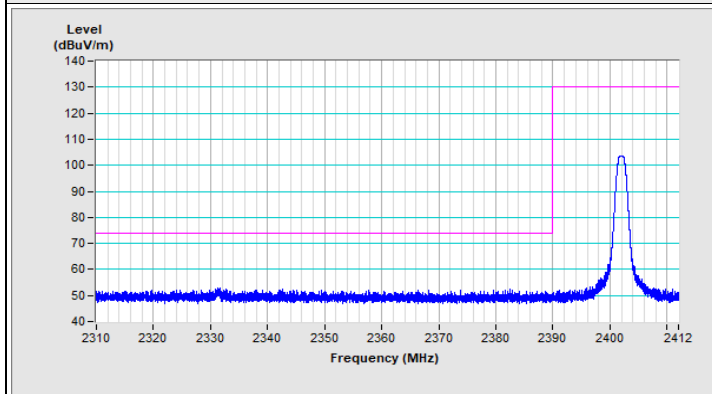


Horizontal (Peak)

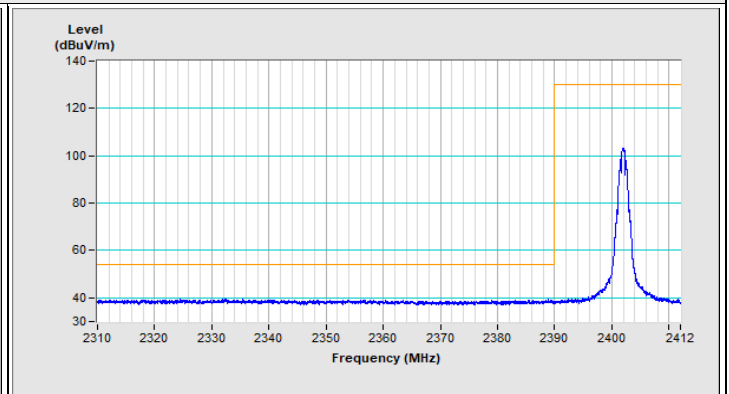

Horizontal (Average)

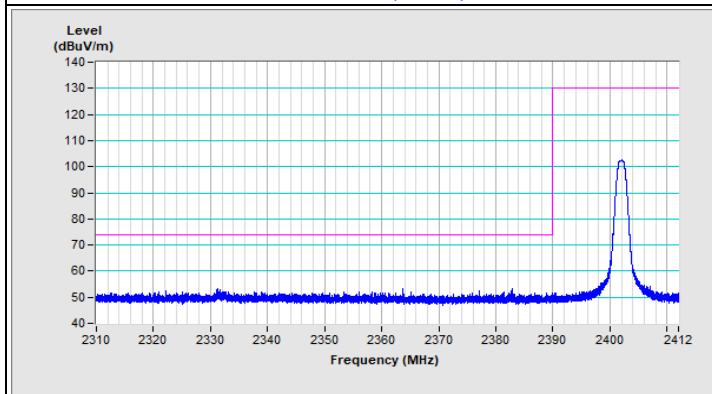


Vertical (Peak)

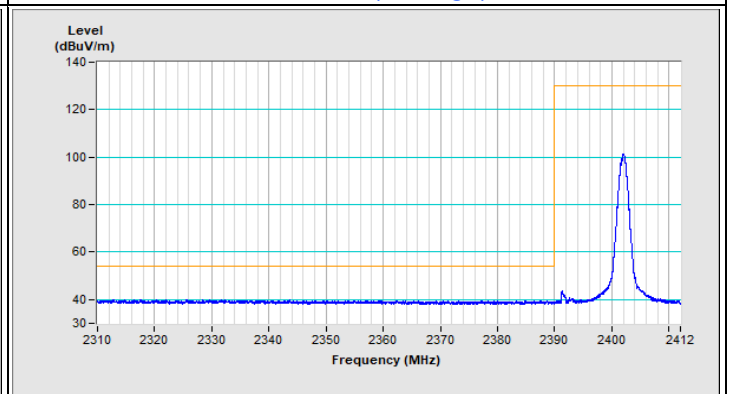

Vertical (Average)

Frequency Range	2.462 GHz ~ 2.5 GHz	Detector Function & Bandwidth	PK: RB=1 MHz, VB=3 MHz, DET=Peak AV: RB=1 MHz, VB=1 kHz, DET=Peak
-----------------	---------------------	-------------------------------	--

BT-LE 500K Channel 39

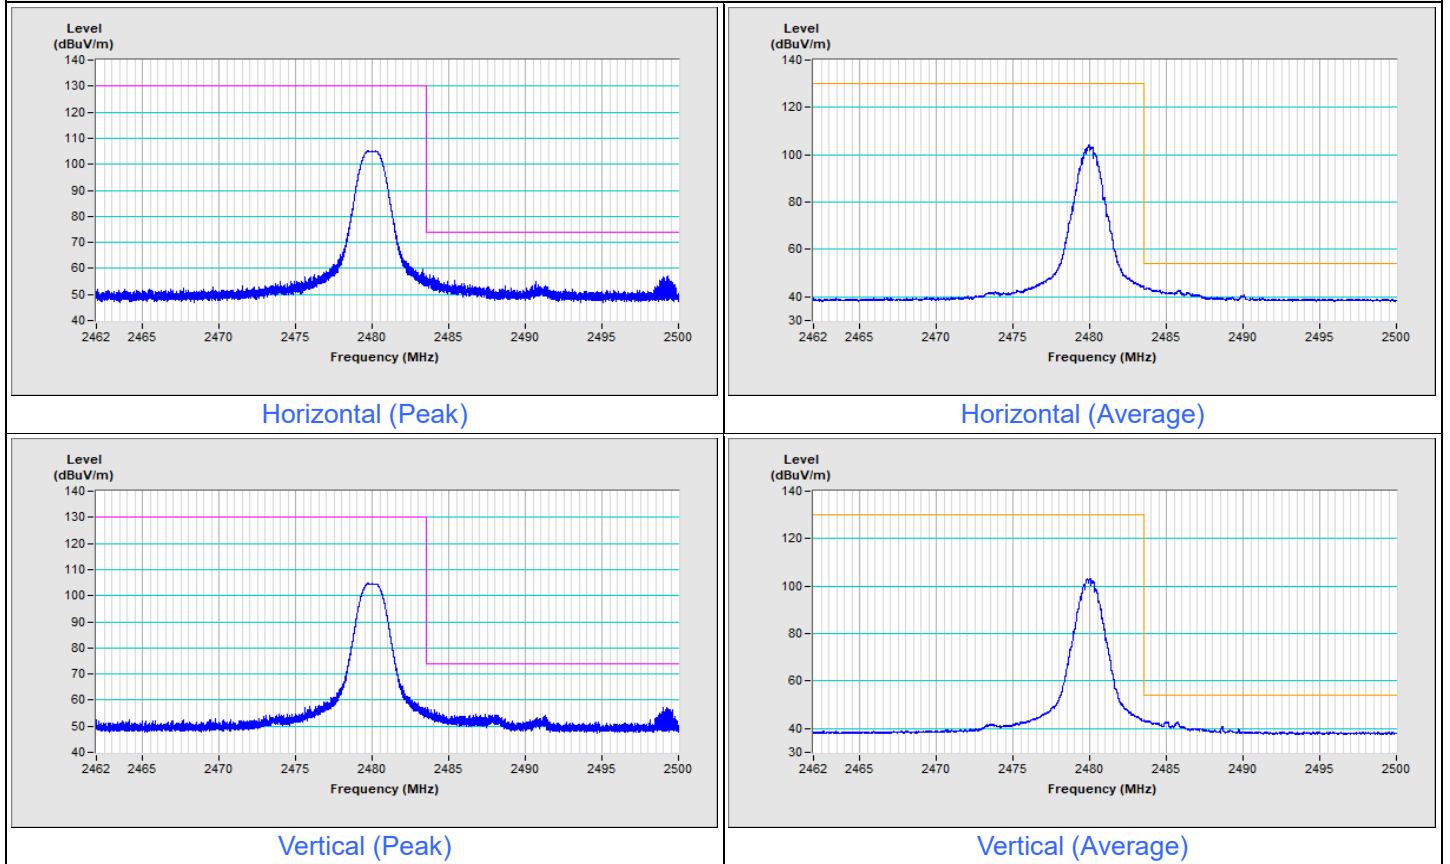

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---