



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



## TEST REPORT

**Applicant: HONG KONG IPRO TECHNOLOGY CO.,LIMITED**

Address: 12/F., San Toi Building 137-139 Connaught Road Central HK

**FCC ID: PQ4IPROY300**

**Product Name: Smart Phone**

**Standard(s): 47 CFR Part 2  
47 CFR Part 22, Subpart H  
47 CFR Part 24, Subpart E  
47 CFR Part 27  
ANSI C63.26-2015  
KDB 971168 D01 Power Meas License Digital Systems  
v03r01**

The above equipment has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number: CR230206153-00E**

**Date Of Issue: 2023/3/28**

**Reviewed By: Sun Zhong**

*Sun Zhong*

Title: Manager

**Test Laboratory: China Certification ICT Co., Ltd (Dongguan)**

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

**Test Facility**

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

**Declarations**

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

# CONTENTS

<b>TEST FACILITY .....</b>	<b>2</b>
<b>DECLARATIONS.....</b>	<b>2</b>
<b>DOCUMENT REVISION HISTORY .....</b>	<b>5</b>
<b>1. GENERAL INFORMATION .....</b>	<b>6</b>
<b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b>	<b>6</b>
<b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>	<b>7</b>
1.2.2 Support Equipment List and Details .....	9
1.2.3 Support Cable List and Details .....	9
1.2.4 Block Diagram of Test Setup .....	10
<b>1.3 MEASUREMENT UNCERTAINTY .....</b>	<b>11</b>
<b>2. SUMMARY OF TEST RESULTS .....</b>	<b>12</b>
<b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>	<b>13</b>
3.1 Applicable Standard For Part 22 Subpart H:.....	13
3.1.1 RF Output Power .....	13
3.1.2 Spurious Emissions.....	13
3.1.3 Frequency stability .....	13
3.2 Applicable Standard For Part 24 Subpart E: .....	15
3.2.1 RF Output Power .....	15
3.2.2 Spurious Emissions.....	15
3.2.3 Frequency stability .....	15
3.3 Applicable Standard For Part 27:.....	16
3.3.1 RF Output Power .....	16
3.3.2 Spurious Emissions.....	16
3.3.3 Frequency stability .....	18
3.4 Test Method: .....	19
3.4.1 RF Output Power .....	19
Test Setup Block:.....	19
3.4.2 Occupied Bandwidth.....	20
Test Setup Block:.....	20
3.4.3 Spurious emissions at antenna terminals.....	21
Test Setup Block:.....	21
3.4.4 Out of band emission .....	22
Test Setup Block:.....	22
3.4.5 Frequency stability .....	23
Test Setup Block:.....	23
3.4.6 Field strength of spurious radiation.....	24
<b>4. Test DATA AND RESULTS .....</b>	<b>26</b>
<b>4.1 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 850 BAND:.....</b>	<b>26</b>
<b>4.2 ANTENNA PORT TEST DATA AND RESULTS FOR GSM 1900 BAND:.....</b>	<b>32</b>
<b>4.3 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 2:.....</b>	<b>38</b>

<b>4.4 ANTENNA PORT TEST DATA AND RESULTS FOR WCDMA BAND 5:</b>	<b>45</b>
<b>4.5 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 2:</b>	<b>52</b>
<b>4.6 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 4:</b>	<b>73</b>
<b>4.7 ANTENNA PORT TEST DATA AND RESULTS FOR LTE BAND 7:</b>	<b>94</b>
<b>4.8 RADIATED SPURIOUS EMISSIONS:</b>	<b>110</b>

**DOCUMENT REVISION HISTORY**

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230206153-00E	Original Report	2023/3/28

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

#### General:

<b>EUT Name:</b>	Smart Phone
<b>EUT Model:</b>	Y300
<b>Operation Bands and modes:</b>	GSM/GPRS/EDGE: 850/1900 WCDMA: Band 2/5 LTE: Band 2/4/7
<b>Modulation Type:</b>	GMSK, 8PSK, BPSK, QPSK, 16QAM
<b>Rated Input Voltage:</b>	DC 3.8V from battery or DC 5V from adapter
<b>Serial Number:</b>	1WTO-1
<b>EUT Received Date:</b>	2023/2/16
<b>EUT Received Status:</b>	Good

#### Operation Voltage( $V_{DC}$ ) ▲:

Lowest:	3.6	Normal:	3.8	Highest:	4.35
---------	-----	---------	-----	----------	------

#### Antenna Information ▲:

Antenna	Antenna Type	Operation Bands	Antenna Frequency Range (MHz)	Antenna Gain (G <sub>T</sub> ) (dBi)	L <sub>C</sub> (dB)
955CSA4-XW-4G (Main Antenna)	FPC	GSM850	824-849	-0.81	0.2
		WCDMA B5	824-849	-0.81	0.2
		LTE B7	2500-2570	-0.89	0.4
955C-XW-DIV (DIV antenna)	FPC	PCS1900	1850-1910	-0.51	N/A
		WCDMA B2	1850-1910	-0.51	N/A
		LTE B2	1850-1910	-0.51	N/A
		LTE B4	1710-1755	-0.41	N/A

Note:  
Lc= Signal Attenuation in the connecting cable between the transmitter and antenna, in dB.

#### Accessory Information:

Accessory Description	Manufacturer	Model
Adapter	IPO	NTR-S05

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

<b>EUT Operation Mode:</b>	The system was configured for testing in each operation mode.
<b>Equipment Modifications:</b>	No
<b>EUT Exercise Software:</b>	No
<p>The maximum power was configured per 3GPP Standard for each operation modes as below setting:</p> <p><b>GSM/GPRS/EGPRS</b></p> <p>Function: Menu select &gt; GSM Mobile Station &gt; GSM 850/1900            Press Connection control to choose the different menus            Press RESET &gt; choose all the reset all settings            Connection Press Signal Off to turn off the signal and change settings            Network Support &gt; GSM + GPRS or GSM + EGSM            Main Service &gt; Packet Data            Service selection &gt; Test Mode A – Auto Slot Config. off            MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting                &gt; Slot configuration &gt; Uplink/Gamma                &gt; 33 dBm for GPRS 850                &gt; 30 dBm for GPRS 1900                &gt; 27 dBm for EGPRS 850                &gt; 26 dBm for EGPRS 1900            BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel            Frequency Offset &gt; + 0 Hz            Mode &gt; BCCH and TCH</p> <p>BCCH Level &gt; -85 dBm (May need to adjust if link is not stable)            BCCH Channel &gt; choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]</p> <p>Channel Type &gt; Off            P0 &gt; 4 dB            Slot Config &gt; Unchanged (if already set under MS signal)            TCH &gt; choose desired test channel            Hopping &gt; Off            Main Timeslot &gt; 3            Network Coding Scheme &gt; CS4 (GPRS) and MCS5 (EGPRS)</p> <p>Bit Stream &gt; 2E9-1 PSR Bit Stream            AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input            Connection Press Signal on to turn on the signal and change settings</p>	

**WCDMA**

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	<b>Mode</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>	<b>HSUPA</b>
	<b>Subset</b>	<b>1</b>	<b>2</b>		<b>4</b>	<b>5</b>
<b>WCDMA General Settings</b>	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	$\beta$	11/15	6/15	15/15	2/15	15/15
	$\beta_d$	15/15	15/15	9/15	15/15	0
	$\beta_{ec}$	209/225	12/15	30 15	2/15	5/15
	$\beta_c / \beta_d$	11/15	6/15	15/9	2/15	-
	$\beta_{hs}$	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
<b>HSDPA Specific Settings</b>	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
<b>HSUPA Specific Settings</b>	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	A Index	20	12	1	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate k ps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27



**LTE (FDD):**

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3**

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS\_01".

**Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)**

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks ( $N_{RB}$ )	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10, 15, 20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 <sup>1</sup>	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

**1.2.2 Support Equipment List and Details**

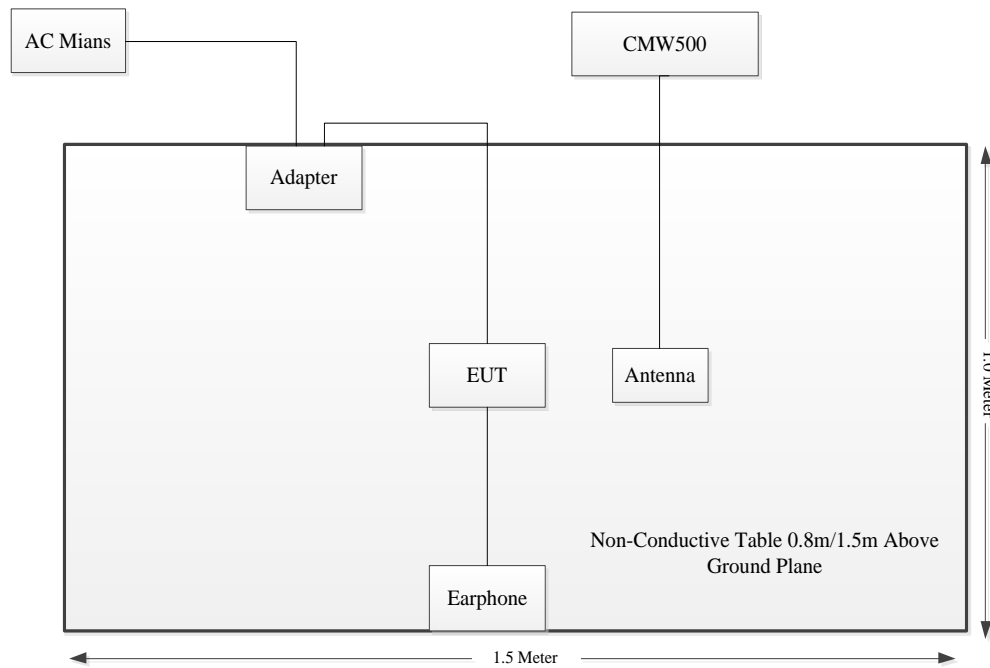
Manufacturer	Description	Model	Serial Number
IPO	Earphone	Phonenix 5.0s	EP221126001

**1.2.3 Support Cable List and Details**

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

### 1.2.4 Block Diagram of Test Setup

Radiation Test:



### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	$\pm 5\%$
RF output power, conducted	$\pm 0.61\text{dB}$
Power Spectral Density, conducted	$\pm 0.61\text{ dB}$
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, conducted	$\pm 1.26\text{ dB}$
Temperature	$\pm 1^\circ\text{C}$
Humidity	$\pm 5\%$
DC and low frequency voltages	$\pm 0.4\%$
Duty Cycle	1%
RF Frequency	$\pm 0.082 \times 10^{-6}$

## 2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §2.1046; § 22.913 (a); § 24.232 (c); §27.50	RF Output Power	Compliant
FCC § 2.1047	Modulation Characteristics	Not Applicable
FCC § 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliant
FCC § 2.1051, § 22.917 (a); § 24.238 (a); §27.53	Spurious Emissions at Antenna Terminal	Compliant
FCC § 22.917 (a); § 24.238 (a); §27.53	Out of band emission, Band Edge	Compliant
FCC § 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliant
FCC § 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Field Strength of Spurious Radiation	Compliant

### 3. REQUIREMENTS AND TEST PROCEDURES

---

#### 3.1 Applicable Standard For Part 22 Subpart H:

##### 3.1.1 RF Output Power

FCC §22.913

(a)(5) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7watts.

(d) *Power measurement.* Measurement of the ERP of Cellular base transmitters and repeaters must be made using an average power measurement technique. The peak-to-average ratio (PAR) of the transmission must not exceed 13 dB. Power measurements for base transmitters and repeaters must be made in accordance with either of the following:

- (1) A Commission-approved average power technique (*see* FCC Laboratory's Knowledge Database); or
- (2) For purposes of this section, peak transmit power must be measured over an interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, *etc.*, so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

##### 3.1.2 Spurious Emissions

FCC §22.917

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a reference bandwidth as follows:

- (1) In the spectrum below 1 GHz, instrumentation should employ a reference bandwidth of 100 kHz or greater. In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy, provided that the measured power is integrated over the full required reference bandwidth (i.e., 100 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.
- (2) In the spectrum above 1 GHz, instrumentation should employ a reference bandwidth of 1 MHz

##### 3.1.3 Frequency stability

FCC §22.355

Except as otherwise provided in this part, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table C-1 of this section.

Table C-1 - Frequency Tolerance for Transmitters in the Public Mobile Services

<b>Frequency range (MHz)</b>	<b>Base, fixed (ppm)</b>	<b>Mobile &gt;3 watts (ppm)</b>	<b>Mobile ≤3 watts (ppm)</b>
25 to 50	20	20	50
50 to 450	5	5	50
450 to 512	2.5	5	5
821 to 896	1.5	<b>2.5</b>	<b>2.5</b>
928 to 929	5	n/a	n/a
929 to 960	1.5	n/a	n/a
2110 to 2220	10	n/a	n/a

### **3.2 Applicable Standard For Part 24 Subpart E:**

#### **3.2.1 RF Output Power**

FCC §24.232

(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

(d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### **3.2.2 Spurious Emissions**

FCC §24.238

The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

(a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

(b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e. 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

(c) Alternative out of band emission limit. Licensees in this service may establish an alternative out of band emission limit to be used at specified band edge(s) in specified geographical areas, in lieu of that set forth in this section, pursuant to a private contractual arrangement of all affected licensees and applicants. In this event, each party to such contract shall maintain a copy of the contract in their station files and disclose it to prospective assignees or transferees and, upon request, to the FCC.

(d) Interference caused by out of band emissions. If any emission from a transmitter operating in this service results in interference to users of another radio service, the FCC may require a greater attenuation of that emission than specified in this section.

#### **3.2.3 Frequency stability**

FCC §24.235

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 3.3 Applicable Standard For Part 27:

#### 3.3.1 RF Output Power

FCC §27.50

(a)(3) *Mobile and portable stations.*

(i) For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

(ii) Mobile and portable stations are not permitted to transmit in the 2315-2320 MHz and 2345-2350 MHz bands.

(iii) *Automatic transmit power control.* Mobile and portable stations transmitting in the 2305-2315 MHz band or in the 2350-2360 MHz band must employ automatic transmit power control when operating so the stations operate with the minimum power necessary for successful communications.

(iv) *Prohibition on external vehicle-mounted antennas.* The use of external vehicle-mounted antennas for mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band is prohibited.

(b)(10) Portable stations (hand-held devices) transmitting in the 746-757 MHz, 776-788 MHz, and 805-806 MHz bands are limited to 3 watts ERP.

(c)(10) Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

(d)(4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(h) The following power limits shall apply in the BRS and EBS:

(2) Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

#### 3.3.2 Spurious Emissions

FCC §27.53

(a) For operations in the 2305-2320 MHz band and the 2345-2360 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power P (with averaging performed only during periods of transmission) within the licensed band(s) of operation, in watts, by the following amounts:

(4) For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than:  $43 + 10 \log (P)$  dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than  $55 + 10 \log (P)$  dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than  $61 + 10 \log (P)$  dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than  $67 + 10 \log (P)$  dB on all frequencies between 2328 and 2337 MHz;



(ii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2300 and 2305 MHz,  $55 + 10 \log (P)$  dB on all frequencies between 2296 and 2300 MHz,  $61 + 10 \log (P)$  dB on all frequencies between 2292 and 2296 MHz,  $67 + 10 \log (P)$  dB on all frequencies between 2288 and 2292 MHz, and  $70 + 10 \log (P)$  dB below 2288 MHz;

(iii) By a factor of not less than  $43 + 10 \log (P)$  dB on all frequencies between 2360 and 2365 MHz, and not less than  $70 + 10 \log (P)$  dB above 2365 MHz.

(c) For operations in the 746-758 MHz band and the 776-788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

(1) On any frequency outside the 746-758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(2) On any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB;

(3) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $76 + 10 \log (P)$  dB in a 6.25 kHz band segment, for base and fixed stations;

(4) On all frequencies between 763-775 MHz and 793-805 MHz, by a factor not less than  $65 + 10 \log (P)$  dB in a 6.25 kHz band segment, for mobile and portable stations;

(5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;

(6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to  $-70$  dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and  $-80$  dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

(g) For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

(h) AWS emission limits

(1) **General protection levels.** Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10} (P)$  dB.

(m)(4) For mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### 3.3.3 Frequency stability

FCC §27.54

The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

### 3.4 Test Method:

#### 3.4.1 RF Output Power

According to CFR Part 2.1046, ANSI C63.26-2015 Section 5.2.5.5 and KDB 971168 D01 Power Meas License Digital Systems v03r01:

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:

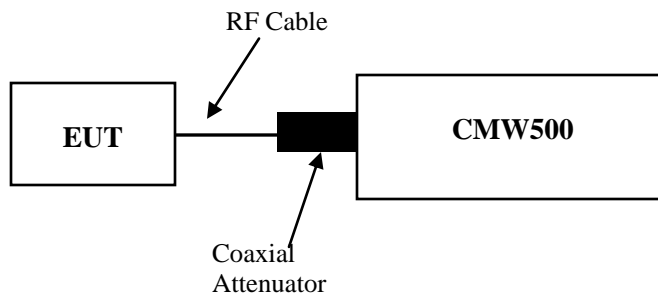
ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

$G_T$  = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

#### Test Setup Block:



Note: The Insertion loss of the RF cable and coaxial Attenuator was offset into the Reading of CMW500.

### 3.4.2 Occupied Bandwidth

According to CFR Part 2.1049, ANSI C63.26-2015 Section 5.4.4

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of  $1.5 \times \text{OBW}$  is sufficient).

b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .

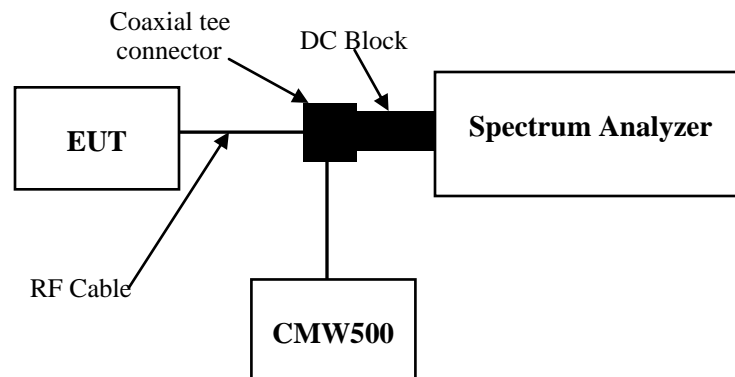
c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.  
NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

d) Set the detection mode to peak, and the trace mode to max-hold.

e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

#### Test Setup Block:




### 3.4.3 Spurious emissions at antenna terminals

According to CFR Part 2.1051, 22.917(a), 24.238(a) and/or 27.53, ANSI C63.26-2015 Section 5.7.4, KDB 971168 D01 Power Meas License Digital Systems v03r01:

the applicable rule part specifies the reference bandwidth for measuring unwanted emission levels (typically, 100 kHz if the authorized frequency band/block is at or below 1 GHz and 1 MHz if the authorized frequency band/block is above 1 GHz),8 effectively depicting the unwanted emission limit in terms of a power spectral density. In those cases where no reference bandwidth is explicitly specified, the values in the preceding sentence should be used.
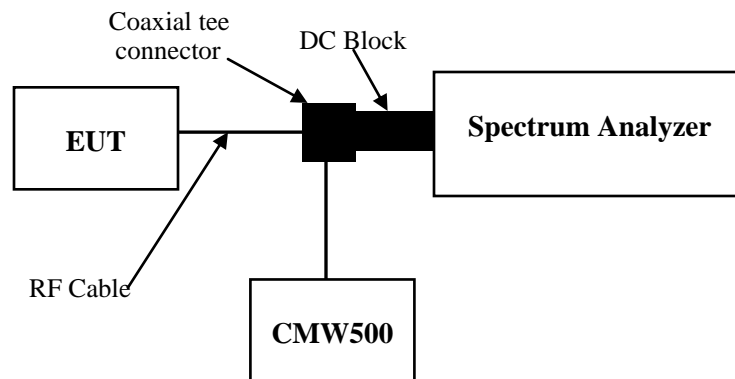
#### Test Setup Block:




### 3.4.4 Out of band emission

According to CFR Part 2.1051, 22.917(a), 24.238(a), 27.53, ANSI C63.26-2015 Section 5.7.3, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Typically, a measurement (resolution) bandwidth smaller than the reference bandwidth is allowed for measurements within a specified frequency range at the edge of the authorized frequency block/band (e.g., within the first Y MHz outside of the authorized frequency band/block, where the value of Y is specified in the relevant rule part). Some FCC out-of-band emission rules permit the use of a narrower RBW (typically limited to a minimum RBW of 1 % of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth. Beyond the specified frequency range in which this relaxation of the uniform reference bandwidth is permitted, it typically is also acceptable to use a narrower RBW (again limited to a minimum of 1 % of OBW) to increase accuracy, but the measurement result must subsequently be integrated over the full reference bandwidth.
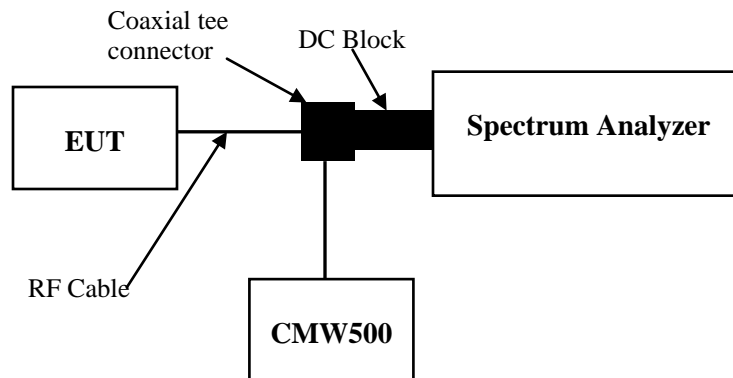
#### Test Setup Block:



### 3.4.5 Frequency stability

According to CFR Part 2.1055, ANSI C63.26-2015 Section 5.6, KDB 971168 D01 Power Meas License Digital Systems v03r01:

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage.

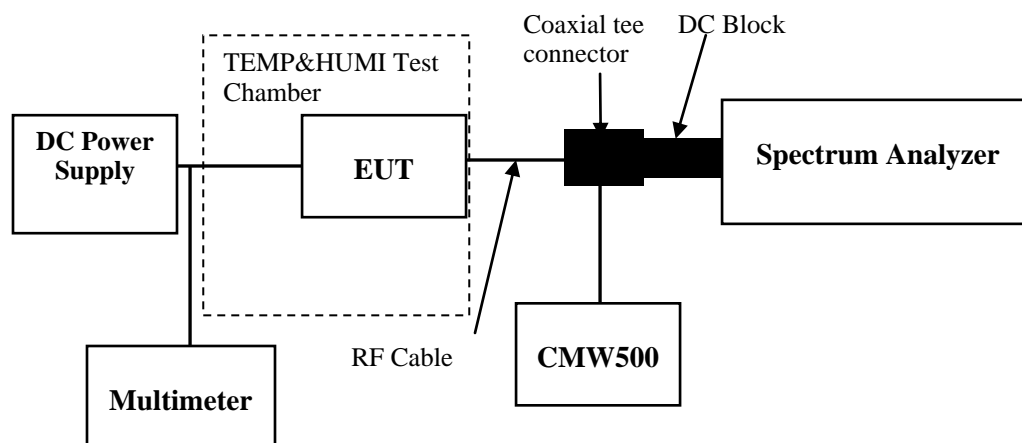
The operating carrier frequency shall be set up in accordance with the manufacturer's published operation and instruction manual prior to the commencement of these tests. No adjustment of any frequency determining circuit element shall be made subsequent to this initial set-up. Frequency stability is tested:

- a) At 10 °C intervals of temperatures between –30 °C and +50 °C at the manufacturer's rated supply voltage, and
- b) At +20 °C temperature and  $\pm 15\%$  supply voltage variations. If a product is specified to operate over a range of input voltage then the –15% variation is applied to the lowermost voltage and the +15% is applied to the uppermost voltage.

During the test all necessary settings, adjustments and control of the EUT have to be performed without disturbing the test environment, i.e., without opening the environmental chamber. The frequency stabilities can be maintained to a lesser temperature range provided that the transmitter is automatically inhibited from operating outside the lesser temperature range. For handheld equipment that is only capable of operating from internal batteries and the supply voltage cannot be varied, the frequency stability tests shall be performed at the nominal battery voltage and the battery end point voltage specified by the manufacturer. An external supply voltage can be used and set at the internal battery nominal voltage, and again at the battery operating end point voltage which shall be specified by the equipment manufacturer.

If an unmodulated carrier is not available, the mean frequency of a modulated carrier can be obtained by using a frequency counter with gating time set to an appropriately large multiple of bit periods (gating time depending on the required accuracy). Full details on the choice of values shall be included in the test report.

#### Test Setup Block:



### 3.4.6 Field strength of spurious radiation

According to CFR Part 2.1053, 22.917(a), 24.238(a) and/or 27.53, ANSI C63.26-2015 Section 5.5.3:

#### Test setup:

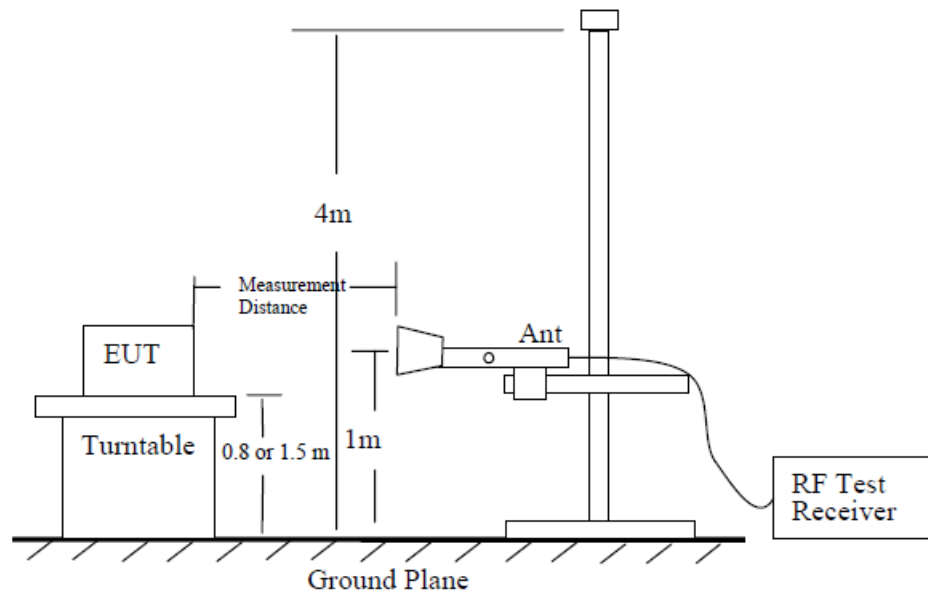


Figure 6—Test site-up for radiated ERP and/or EIRP measurements

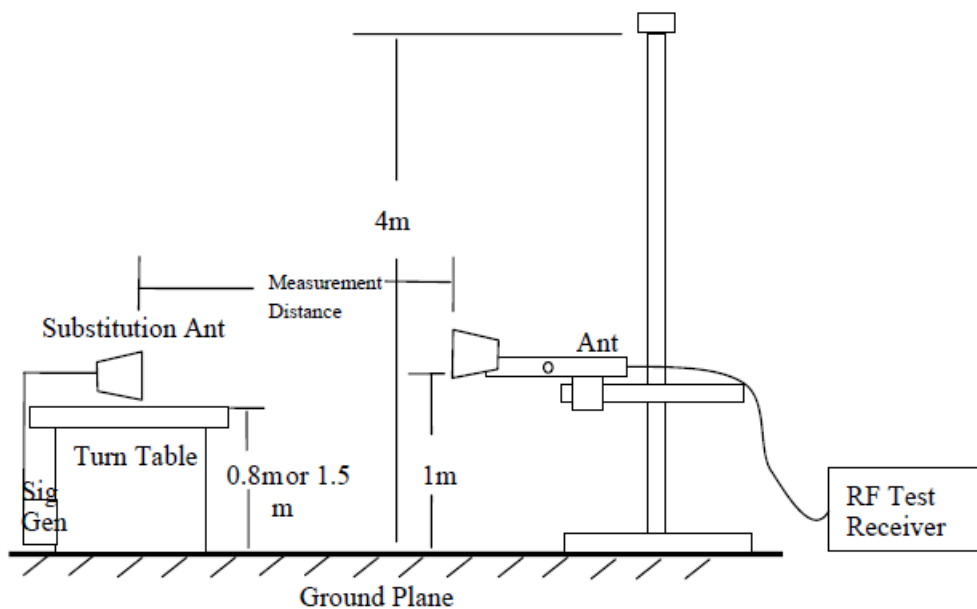


Figure 7—Substitution method set-up for radiated emission



**Test Procedure:**

- a) Place the EUT in the center of the turntable. The EUT shall be configured to transmit into the standard non-radiating load (for measuring radiated spurious emissions), connected with cables of minimal length unless specified otherwise. If the EUT uses an adjustable antenna, the antenna shall be positioned to the length that produces the worst case emission at the fundamental operating frequency.
- b) Each emission under consideration shall be evaluated:
  - 1) Raise and lower the measurement antenna in accordance 5.5.2, as necessary to enable detection of the maximum emission amplitude relative to measurement antenna height.
  - 2) Rotate the EUT through 360° to determine the maximum emission level relative to the axial position.
  - 3) Return the turntable to the azimuth where the highest emission amplitude level was observed.
  - 4) Vary the measurement antenna height again through 1 m to 4 m again to find the height associated with the maximum emission amplitude.
  - 5) Record the measured emission amplitude level and frequency using the appropriate RBW.
- c) Repeat step b) for each emission frequency with the measurement antenna oriented in both the horizontal and vertical polarizations to determine the orientation that gives the maximum emissions amplitude.
- d) Set-up the substitution measurement with the reference point of the substitution antenna located as near as possible to where the center of the EUT radiating element was located during the initial EUT measurement.
- e) Maintain the previous measurement instrument settings and test set-up, with the exception that the EUT is removed and replaced by the substitution antenna.
- f) Connect a signal generator to the substitution antenna; locate the signal generator so as to minimize any potential influences on the measurement results. Set the signal generator to the frequency where emissions are detected, and set an output power level such that the radiated signal can be detected by the measurement instrument, with sufficient dynamic range relative to the noise floor.
- g) For each emission that was detected and measured in the initial test [i.e., in step b) and step c)]:
  - 1) Vary the measurement antenna height between 1 m to 4 m to maximize the received (measured) signal amplitude.
  - 2) Adjust the signal generator output power level until the amplitude detected by the measurement instrument equals the amplitude level of the emission previously measured directly in step b) and step c).
  - 3) Record the output power level of the signal generator when equivalence is achieved in step 2).
- h) Repeat step e) through step g) with the measurement antenna oriented in the opposite polarization.
- i) Calculate the emission power in dBm referenced to a half-wave dipole using the following equation:
 
$$P_e = P_s(\text{dBm}) - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$
 where
 
$$P_e = \text{equivalent emission power in dBm}$$

$$P_s = \text{source (signal generator) power in dBm}$$
 NOTE—dBd refers to the measured antenna gain in decibels relative to a half-wave dipole.
- j) Correct the antenna gain of the substitution antenna if necessary to reference the emission power to a half-wave dipole. When using measurement antennas with the gain specified in dBi, the equivalent dipole-referenced gain can be determined from:  $\text{gain (dBd)} = \text{gain (dBi)} - 2.15 \text{ dB}$ . If necessary, the antenna gain can be calculated from calibrated antenna factor information
- k) Provide the complete measurement results as a part of the test report.

## 4. Test DATA AND RESULTS

### 4.1 Antenna Port Test Data and Results for GSM 850 band:

Serial Number:	1WTO-1	Test Date:	2023/2/22-2023/3/17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	<b>Pass</b>

#### Environmental Conditions:

Temperature: (°C)	23.7-25.6	Relative Humidity: (%)	36-46	ATM Pressure: (kPa)	101.7-102.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

#### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/04/05	2023/04/04
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/07/15	2023/07/14
zhuoxiang	Coaxial Cable	SMA-178	2477/9/11	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	1982/8/11	2022/04/06	2023/04/05
UNI-T	Multimeter	UT39A+	C210582554	2022/09/29	2023/09/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Frequency For Each Mode:

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	824.2	836.6	848.8
GPRS	824.2	836.6	848.8
EDGE	824.2	836.6	848.8

**Test Data:****FCC §2.1046; § 22.913 (a):RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	32.26	32.09	32.08	29.1	38.45
GPRS 1 Slot	32.34	32.15	32.25	29.18	38.45
GPRS 2 Slots	30.16	30.15	30.01	28.99	38.45
GPRS 3 Slots	28.21	28.01	28.05	26.85	38.45
GPRS 4 Slots	25.98	25.09	25.89	24.93	38.45
EDGE 1 Slot	25.94	25.76	25.77	22.78	38.45
EDGE 2 Slots	24.47	24.52	24.45	21.36	38.45
EDGE 3 Slots	21.88	21.83	21.92	18.76	38.45
EDGE 4 Slots	19.31	19.41	19.48	16.32	38.45
Note: ERP= Conducted Power(dBm) - Lc(dB) + Gr(dBd) Gr(dBd)=Gr(dBi)-2.15					
				<b>Result:</b>	<b>Pass</b>

**FCC §2.1049, §22.917, §22.905:Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.240	0.236	0.24	0.264	0.264	0.283
EDGE	0.246	0.244	0.248	0.316	0.313	0.316
Note: The test plots please refer to the Plots of Occupied Bandwidth						

**FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>
----------------	--

**FCC §2.1051, §22.917(a):Out of band emission, Band Edge**

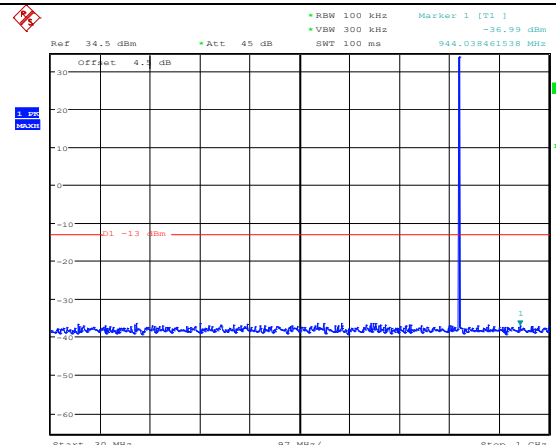
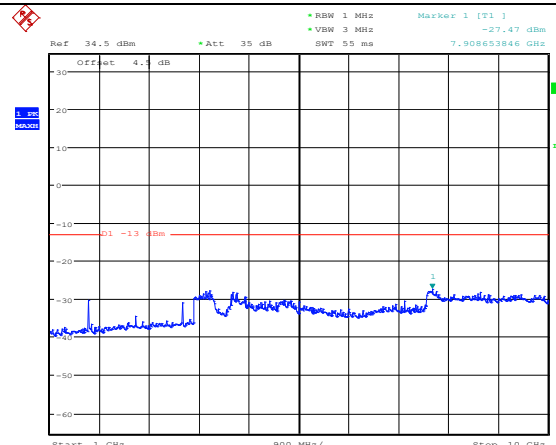
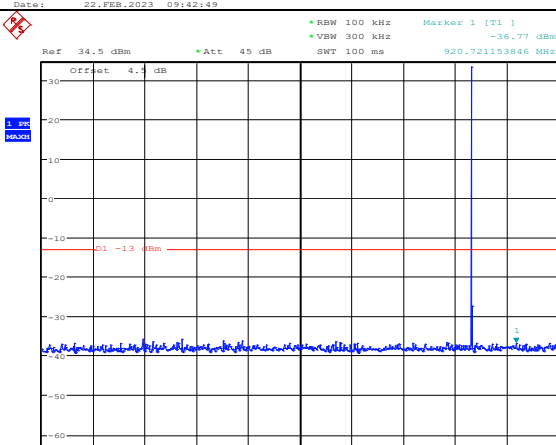
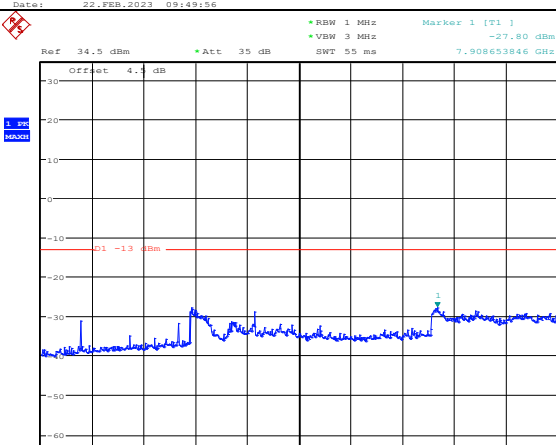
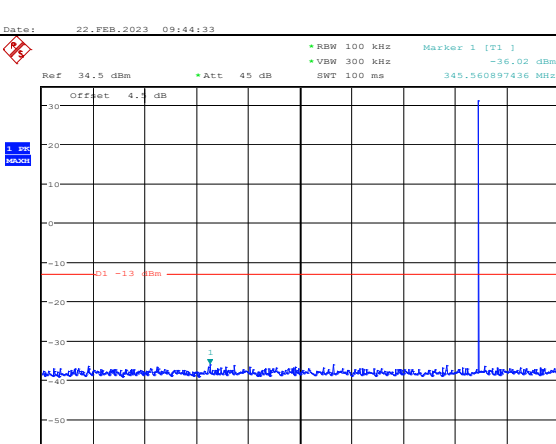
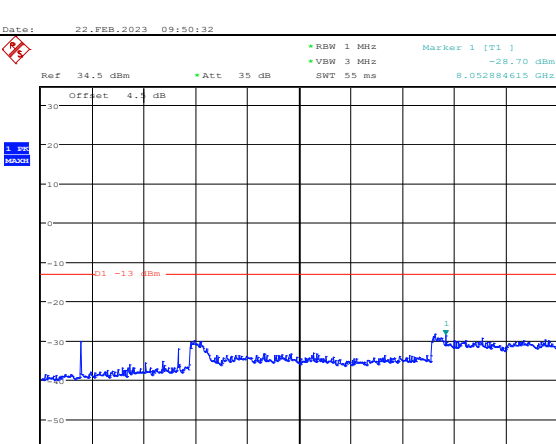
<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>
----------------	---

<b>FCC §2.1055, §22.355: Frequency Stability</b>					
Test Modulation:	GMSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	18	0.022	2.5
	-20	3.8	1	0.001	2.5
	-10	3.8	17	0.020	2.5
	0	3.8	9	0.011	2.5
	10	3.8	25	0.030	2.5
	20	3.8	34	0.041	2.5
	30	3.8	57	0.068	2.5
	40	3.8	32	0.038	2.5
	50	3.8	10	0.012	2.5
Frequency Stability vs. Voltage	20	3.6	57	0.068	2.5
	20	4.35	23	0.027	2.5
				<b>Result:</b>	<b>Pass</b>


Test Modulation:	8PSK		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	26	0.031	2.5
	-20	3.8	42	0.050	2.5
	-10	3.8	12	0.014	2.5
	0	3.8	13	0.016	2.5
	10	3.8	16	0.019	2.5
	20	3.8	41	0.049	2.5
	30	3.8	15	0.018	2.5
	40	3.8	9	0.011	2.5
	50	3.8	3	0.004	2.5
Frequency Stability vs. Voltage	20	3.6	51	0.061	2.5
	20	4.35	25	0.030	2.5
				<b>Result:</b>	<b>Pass</b>

[illegible]

## Spurious Emissions at Antenna Terminal

Channel	GSM	
Lowest		
	<p>Ref 34.5 dBm    Att 45 dB    RBW 100 kHz    VSW 300 kHz    SWT 100 ms    Marker 1 [T1]    -36.99 dBm Offset 4.4 dB    D1 -13 dBm Start 30 MHz    97 MHz/    Stop 1 GHz Date: 22.FEB.2023 09:42:49</p>	<p>Ref 34.5 dBm    Att 35 dB    RBW 1 MHz    VSW 3 MHz    SWT 55 ms    Marker 1 [T1]    -27.47 dBm Offset 4.4 dB    D1 -13 dBm Start 1 GHz    900 MHz/    Stop 10 GHz Date: 22.FEB.2023 09:49:56</p>
Middle		
	<p>Ref 34.5 dBm    Att 45 dB    RBW 100 kHz    VSW 300 kHz    SWT 100 ms    Marker 1 [T1]    -36.77 dBm Offset 4.4 dB    D1 -13 dBm Start 30 MHz    97 MHz/    Stop 1 GHz Date: 22.FEB.2023 09:44:33</p>	<p>Ref 34.5 dBm    Att 35 dB    RBW 1 MHz    VSW 3 MHz    SWT 55 ms    Marker 1 [T1]    -27.80 dBm Offset 4.4 dB    D1 -13 dBm Start 1 GHz    900 MHz/    Stop 10 GHz Date: 22.FEB.2023 09:50:32</p>
Highest		
	<p>Ref 34.5 dBm    Att 45 dB    RBW 100 kHz    VSW 300 kHz    SWT 100 ms    Marker 1 [T1]    -36.02 dBm Offset 4.4 dB    D1 -13 dBm Start 30 MHz    97 MHz/    Stop 1 GHz Date: 22.FEB.2023 09:46:01</p>	<p>Ref 34.5 dBm    Att 35 dB    RBW 1 MHz    VSW 3 MHz    SWT 55 ms    Marker 1 [T1]    -28.70 dBm Offset 4.4 dB    D1 -13 dBm Start 1 GHz    900 MHz/    Stop 10 GHz Date: 22.FEB.2023 09:50:56</p>

## Out of band emission, Band Edge

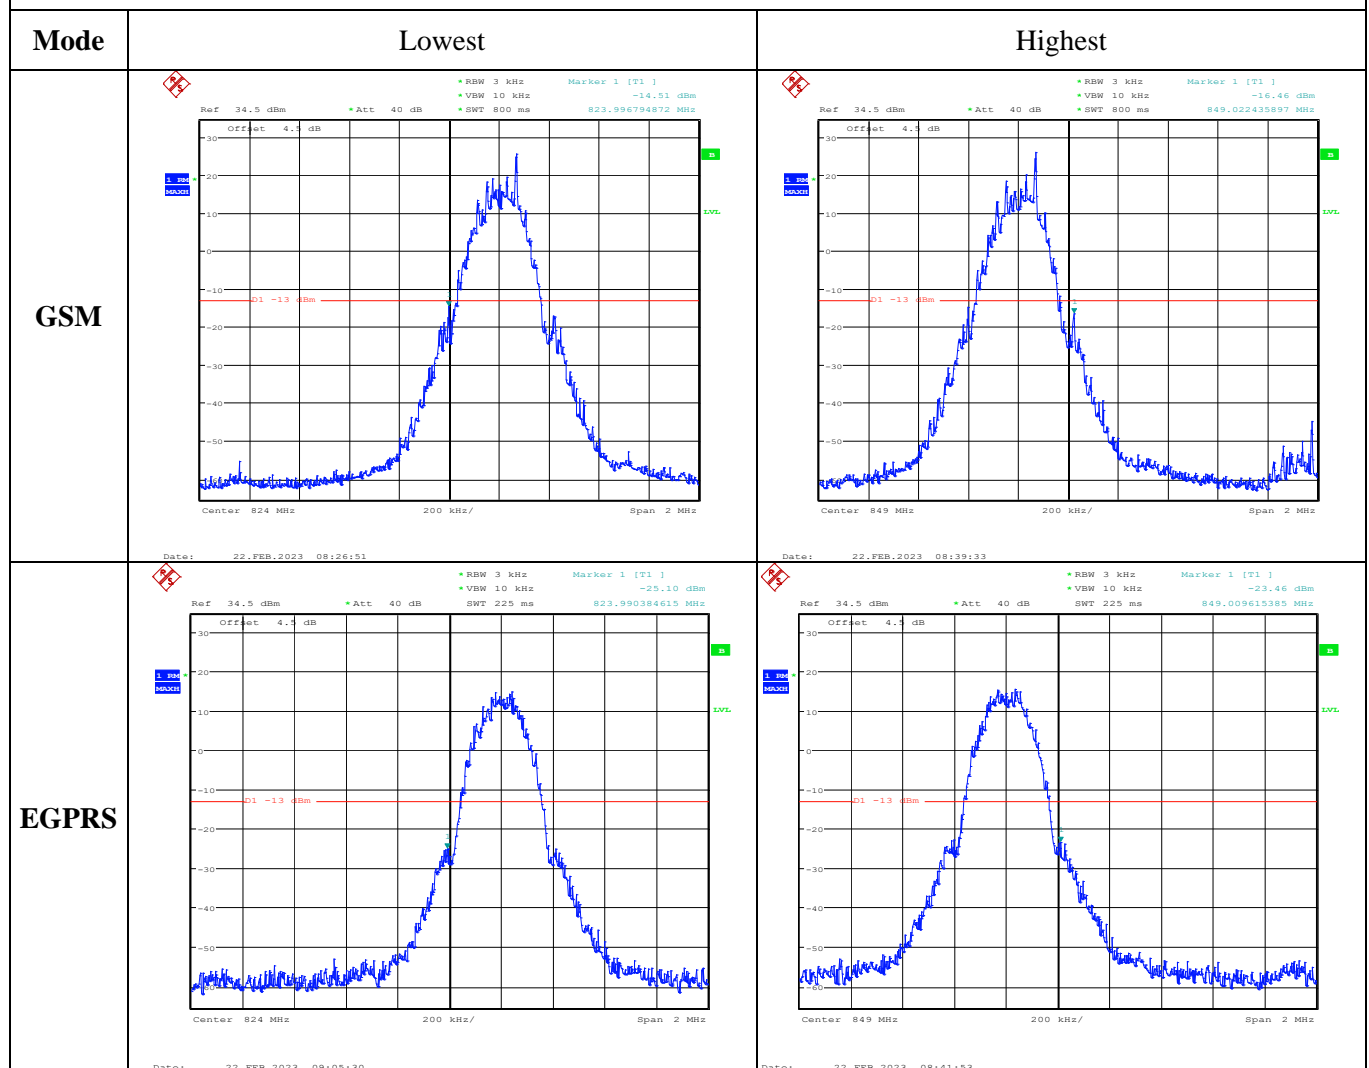

**4.2 Antenna Port Test Data and Results for GSM 1900 band:**

Serial Number:	1WTO-1	Test Date:	2023/2/22-2023/3/28
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	<b>Pass</b>

**Environmental Conditions:**

Temperature: (°C)	23.7-25.6	Relative Humidity: (%)	36-46	ATM Pressure: (kPa)	101.7-102.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Frequency For Each Mode:**

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
GSM	1850.2	1880	1909.8
GPRS	1850.2	1880	1909.8
EDGE	1850.2	1880	1909.8



**Test Data:****FCC §2.1046; § 24.232 (c):RF Output Power**

Test Mode	Conducted Peak Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
GSM	29.14	29.19	29.03	28.68	33
GPRS 1 Slot	29.21	29.17	29.16	28.7	33
GPRS 2 Slots	26.96	26.95	26.93	26.45	33
GPRS 3 Slots	25.37	25.35	25.32	24.86	33
GPRS 4 Slots	23.39	23.37	23.35	22.88	33
EDGE 1 Slot	24.53	24.09	24.25	24.02	33
EDGE 2 Slots	22.89	22.47	22.53	22.38	33
EDGE 3 Slots	20.12	20.01	20.26	19.75	33
EDGE 4 Slots	17.61	17.54	17.48	17.1	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G<sub>T</sub>(dBi)**Result:****Pass****FCC §2.1049, §24.238:Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
GSM	0.238	0.238	0.238	0.268	0.262	0.263
EDGE	0.244	0.242	0.246	0.314	0.315	0.317

Note: The test plots please refer to the Plots of Occupied Bandwidth

**FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>
----------------	--

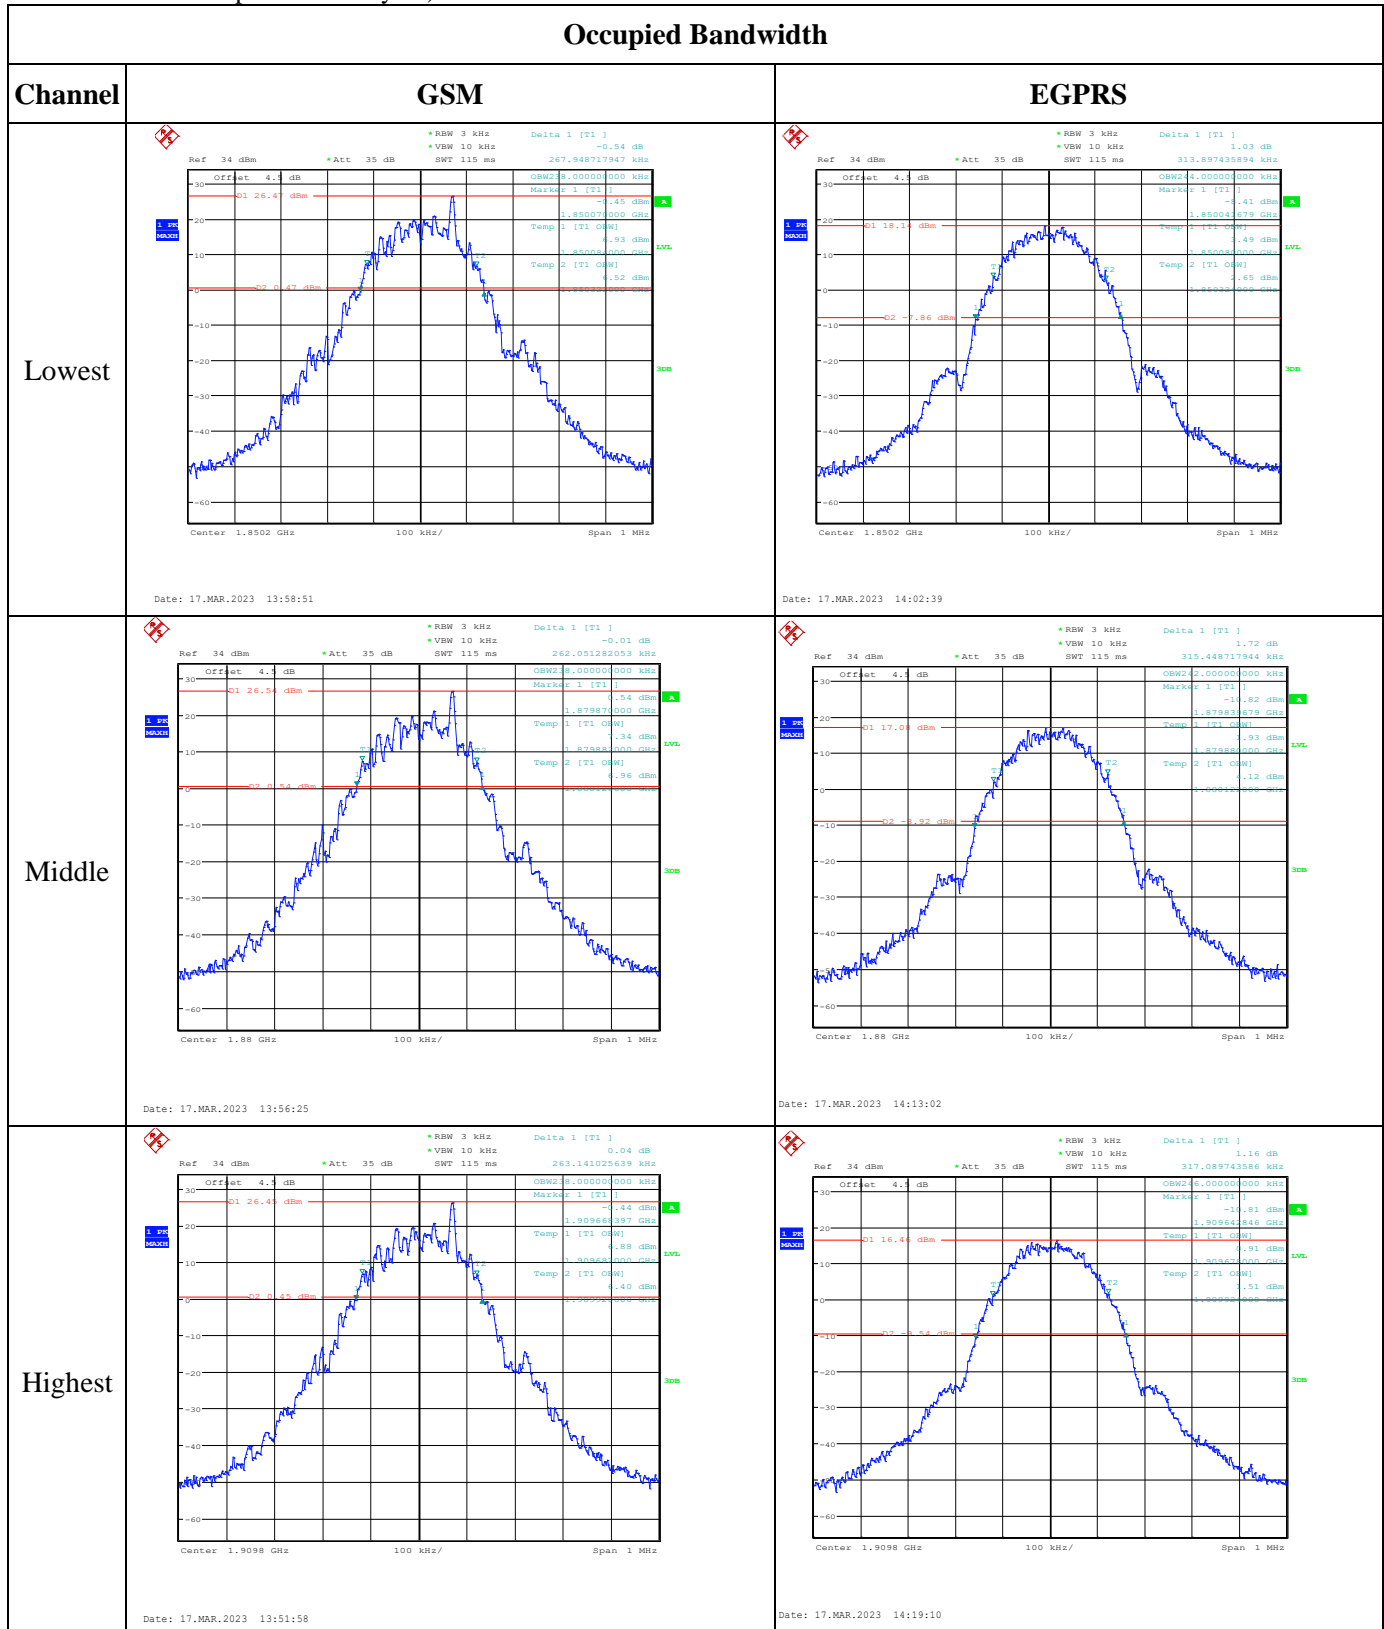
**FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>
----------------	---


<b>FCC §2.1055, §24.235: Frequency Stability</b>						
Test Mode:	GMSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.060	1850.000	1909.892	1910.000
	-20	3.8	1850.058	1850.000	1909.882	1910.000
	-10	3.8	1850.057	1850.000	1909.881	1910.000
	0	3.8	1850.047	1850.000	1909.880	1910.000
	10	3.8	1850.035	1850.000	1909.890	1910.000
	20	3.8	1850.064	1850.000	1909.875	1910.000
	30	3.8	1850.052	1850.000	1909.890	1910.000
	40	3.8	1850.064	1850.000	1909.890	1910.000
	50	3.8	1850.056	1850.000	1909.888	1910.000
Frequency Stability vs. Voltage	20	3.6	1850.056	1850.000	1909.902	1910.000
	20	4.35	1850.040	1850.000	1909.897	1910.000
<b>Result:</b>					<b>Pass</b>	

Test Mode:	8PSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.115	1850.000	1909.906	1910.000
	-20	3.8	1850.107	1850.000	1909.907	1910.000
	-10	3.8	1850.104	1850.000	1909.904	1910.000
	0	3.8	1850.101	1850.000	1909.887	1910.000
	10	3.8	1850.095	1850.000	1909.884	1910.000
	20	3.8	1850.121	1850.000	1909.879	1910.000
	30	3.8	1850.103	1850.000	1909.895	1910.000
	40	3.8	1850.098	1850.000	1909.889	1910.000
	50	3.8	1850.110	1850.000	1909.882	1910.000
Frequency Stability vs. Voltage	20	3.6	1850.097	1850.000	1909.889	1910.000
	20	4.35	1850.099	1850.000	1909.906	1910.000
<b>Result:</b>					<b>Pass</b>	


**Test Plots**(Note: The 4.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):



## Spurious Emissions at Antenna Terminal

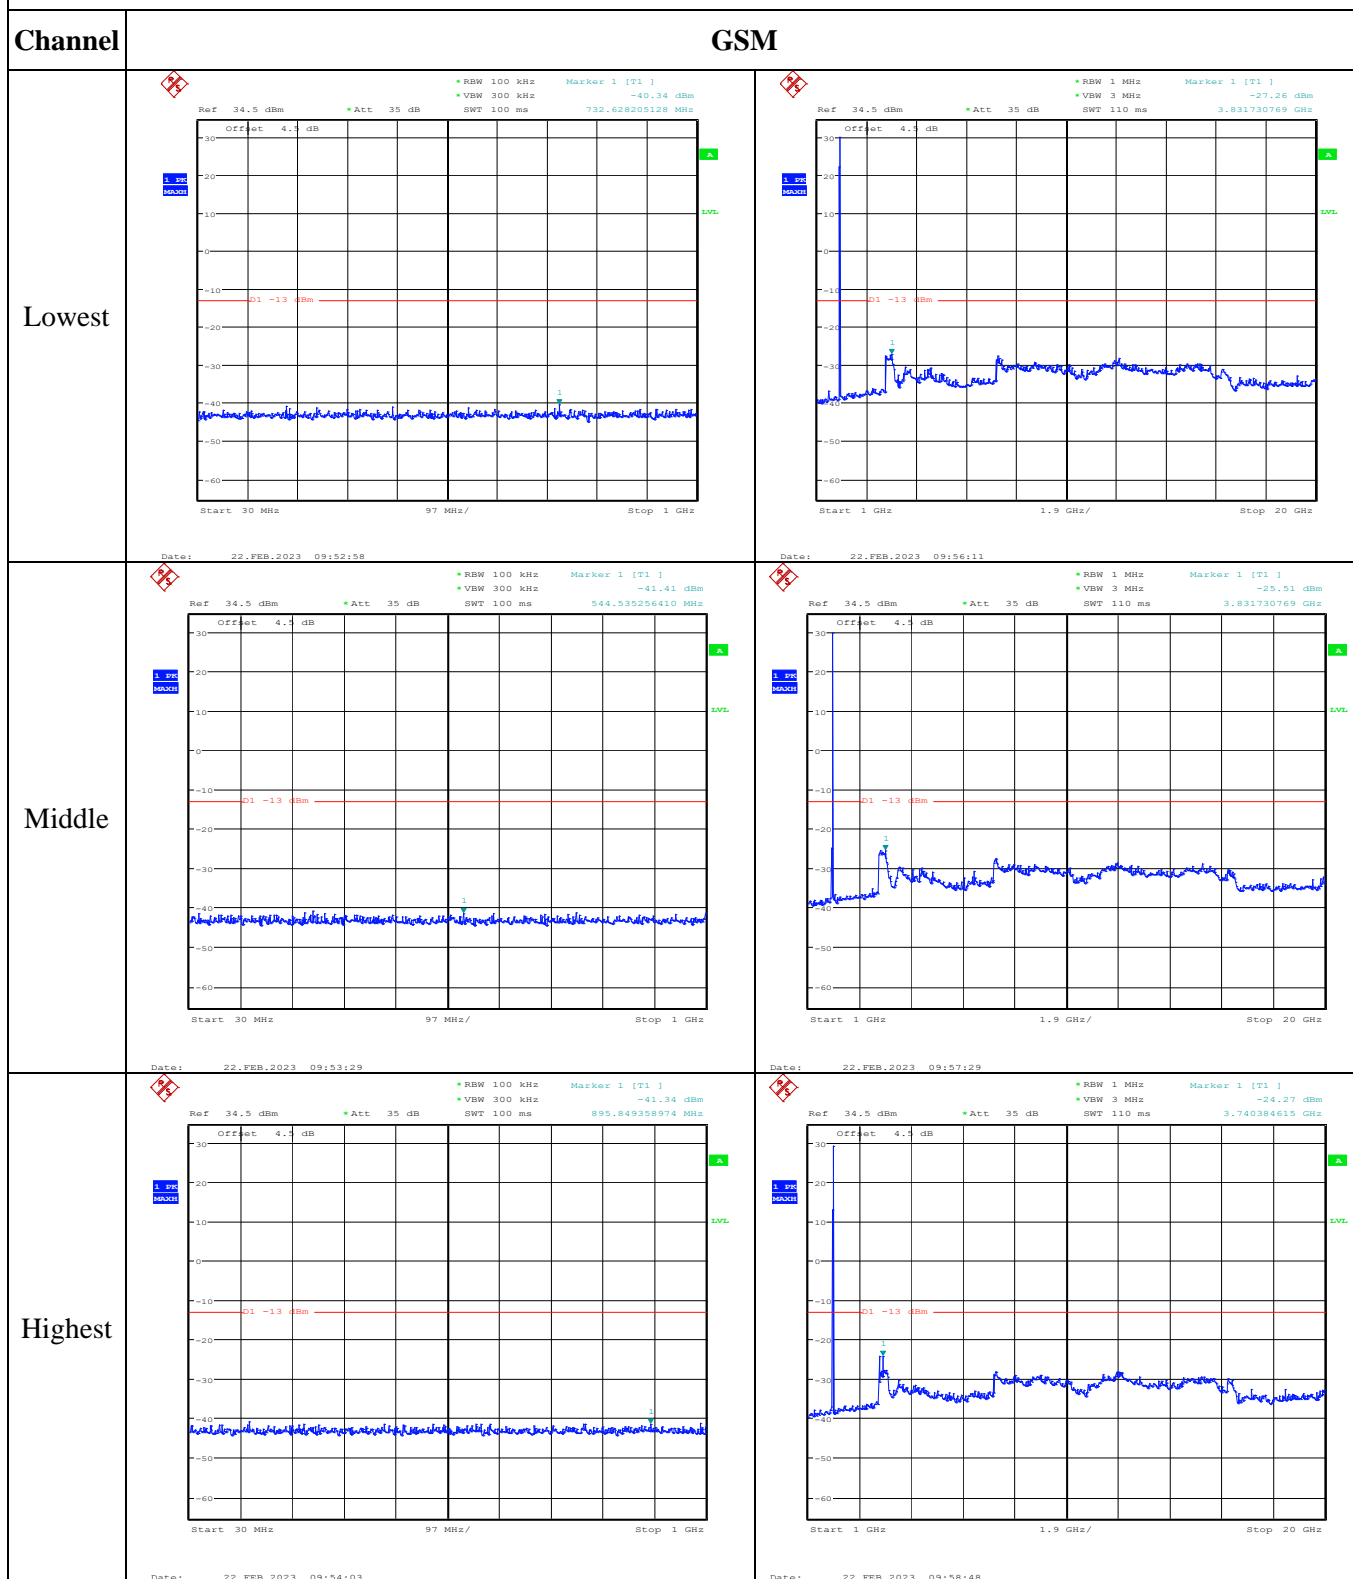

## Out of band emission, Band Edge

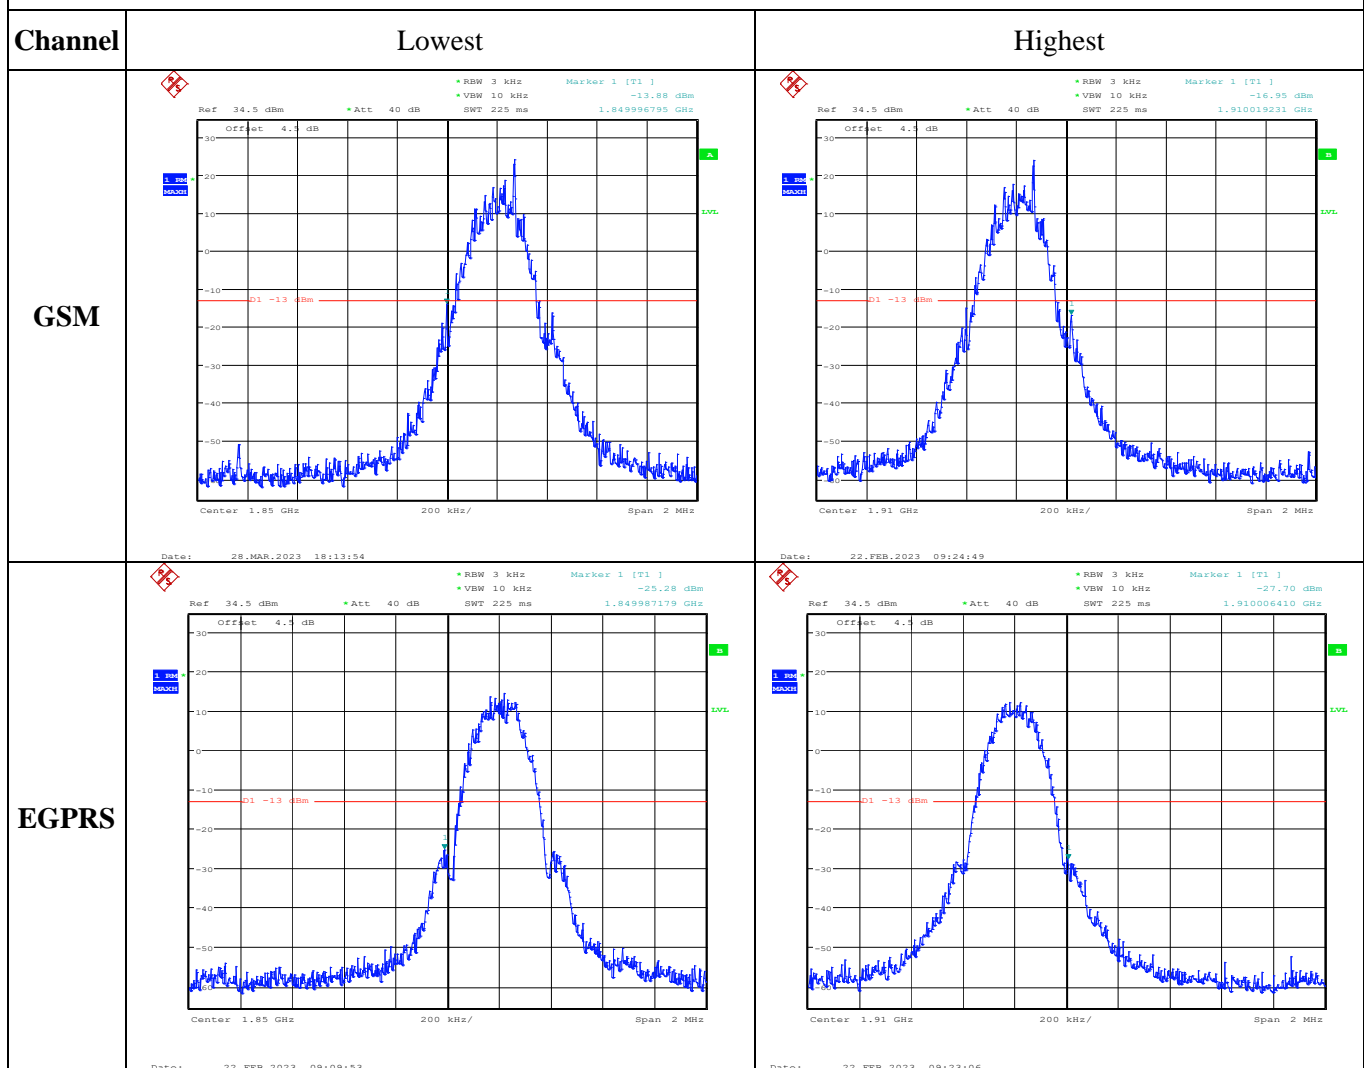

**4.3 Antenna Port Test Data and Results for WCDMA Band 2:**

Serial Number:	1WTO-1	Test Date:	2023/2/22-2023/3/17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	23.7-25.6	Relative Humidity: (%)	36-46	ATM Pressure: (kPa)	101.7-102.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Frequency For Each Mode:**

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	1852.4	1880	1907.6

**Test Data:****FCC §2.1046; § 24.232****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	21.08	21.14	21.19	20.68	33
HSDPA Subtest 1	20.75	20.51	20.09	20.24	33
HSDPA Subtest 2	20.76	20.59	20.07	20.25	33
HSDPA Subtest 3	20.56	20.62	20.09	20.11	33
HSDPA Subtest 4	20.68	20.61	20.09	20.17	33
HSUPA Subtest 1	20.74	20.59	20.11	20.23	33
HSUPA Subtest 2	20.68	20.57	20.1	20.17	33
HSUPA Subtest 3	20.85	20.56	20.05	20.34	33
HSUPA Subtest 4	20.69	20.57	20.06	20.18	33
HSUPA Subtest 5	20.76	20.63	20.07	20.25	33

Note: EIRP=Conducted Power(dBm) - Lc(dB) + Gr(dBi)

**Result:****Pass****Peak-to-average Ratio(PAR)**

Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	3.01	2.98	2.95	13
HSDPA	4.04	3.59	3.81	13
HSUPA	3.72	3.78	3.81	13

**Result:****Pass**

**FCC §2.1049, §24.238:Occupied Bandwidth**

Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.180	4.160	4.160	4.696	4.696	4.688
HSDPA	4.160	4.160	4.180	4.695	4.693	4.696
HSUPA	4.160	4.160	4.180	4.711	4.707	4.705

Note: The test plots please refer to the Plots of Occupied Bandwidth

**FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>
----------------	--

**FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge**

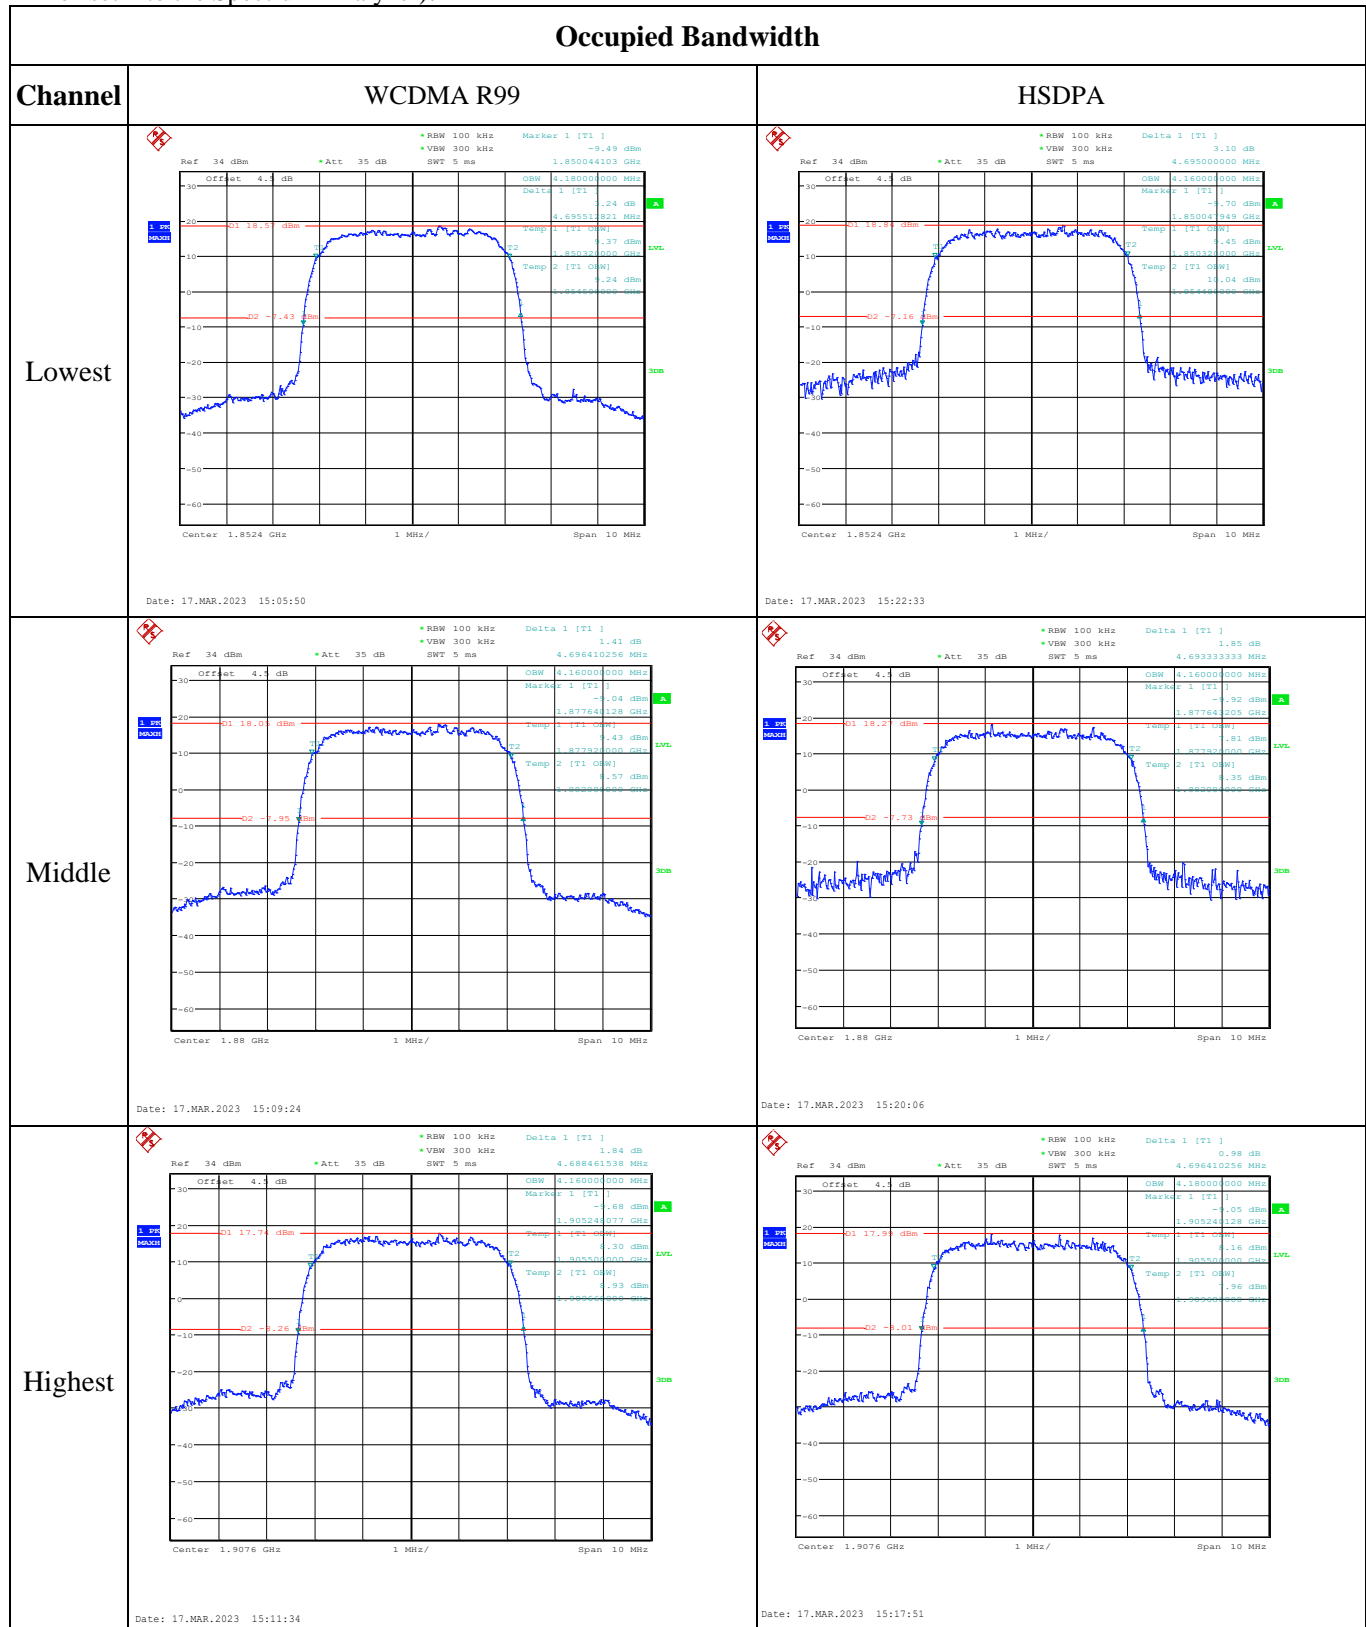
<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>
----------------	---

**FCC §2.1055, §24.235: Frequency Stability**

Test Mode:	WCDMA R99	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1850.706	1850.000	1909.316	1910.000
	-20	3.8	1850.696	1850.000	1909.303	1910.000
	-10	3.8	1850.707	1850.000	1909.322	1910.000
	0	3.8	1850.704	1850.000	1909.313	1910.000
	10	3.8	1850.691	1850.000	1909.309	1910.000
	20	3.8	1850.717	1850.000	1909.299	1910.000
	30	3.8	1850.716	1850.000	1909.301	1910.000
	40	3.8	1850.716	1850.000	1909.301	1910.000
Frequency Stability vs. Voltage	50	3.8	1850.703	1850.000	1909.303	1910.000
	20	3.6	1850.716	1850.000	1909.315	1910.000
	20	4.35	1850.708	1850.000	1909.327	1910.000
					<b>Result:</b>	<b>Pass</b>



**Test Plots**(Note: The 4.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):




## Occupied Bandwidth

Channel


HSUPA

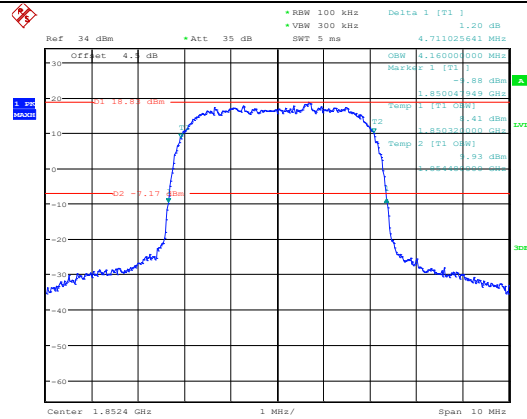Lowest




Date: 17.MAR.2023 15:27:04

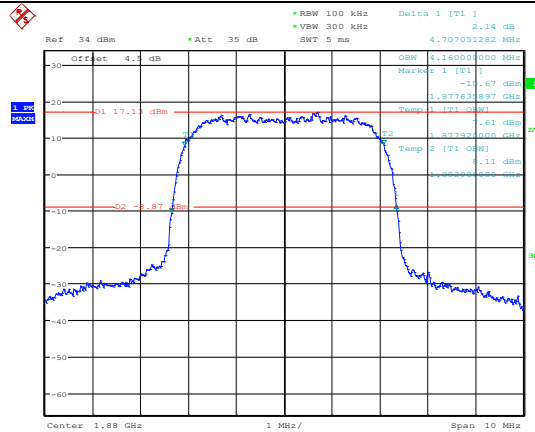Middle




Date: 17.MAR.2023 15:29:37

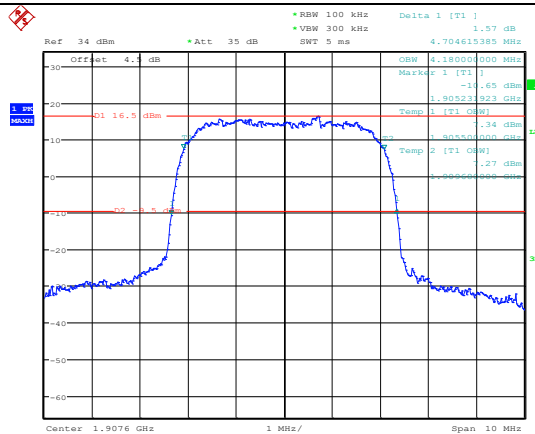Highest









Date: 17.MAR.2023 15:33:58

## Spurious Emissions at Antenna Terminal

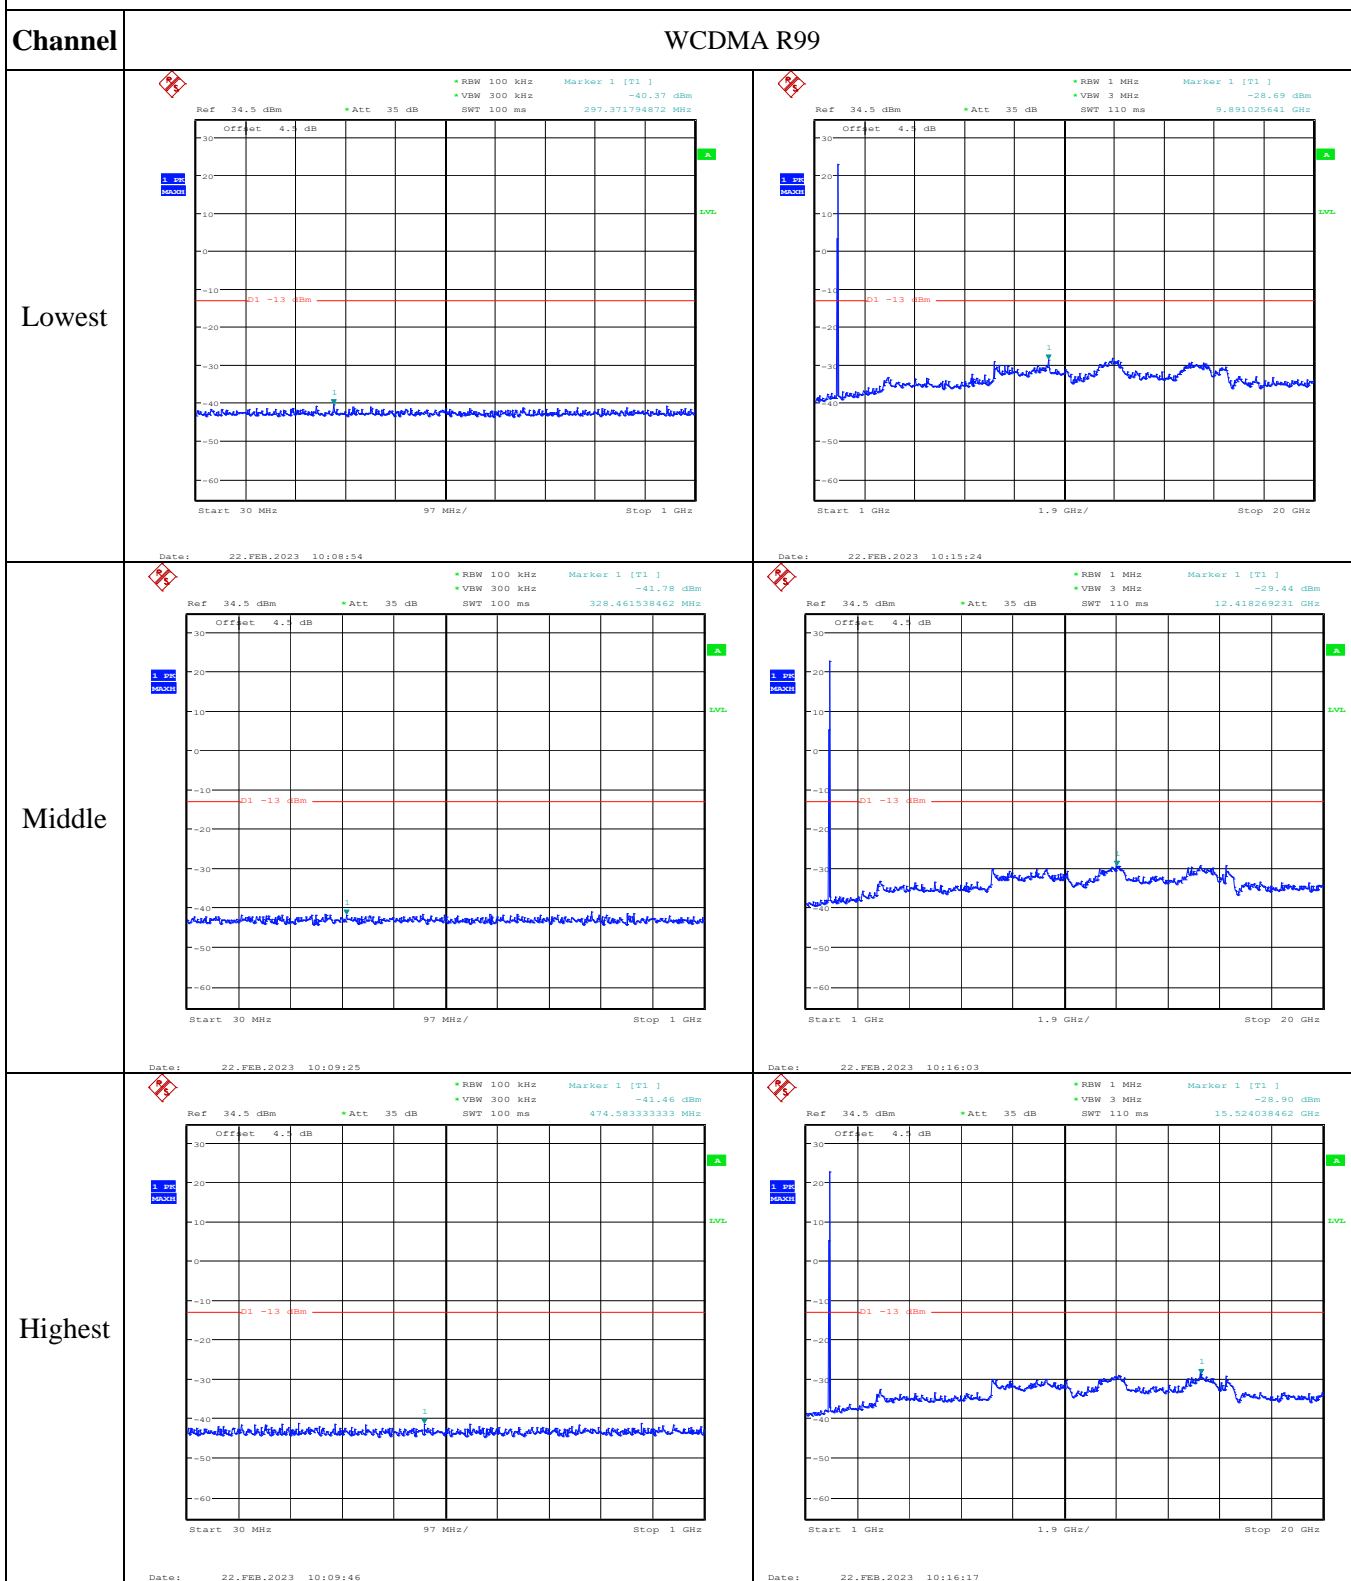

## Out of band emission, Band Edge

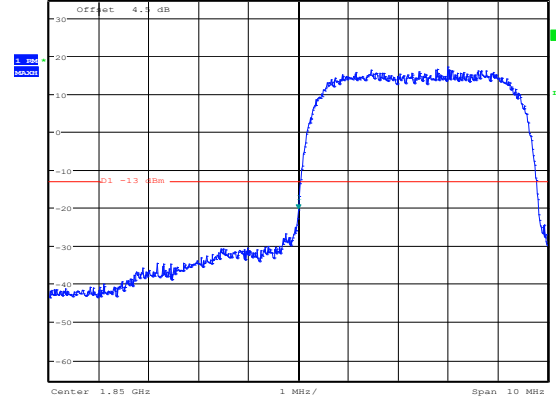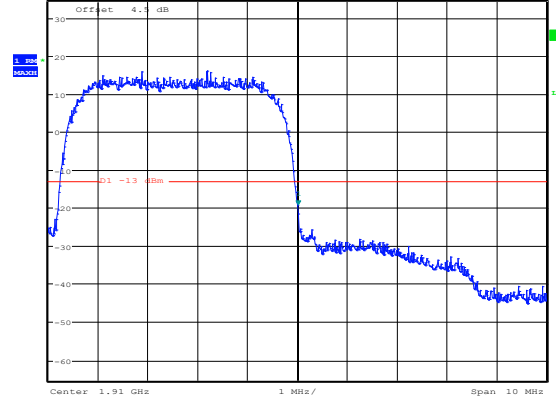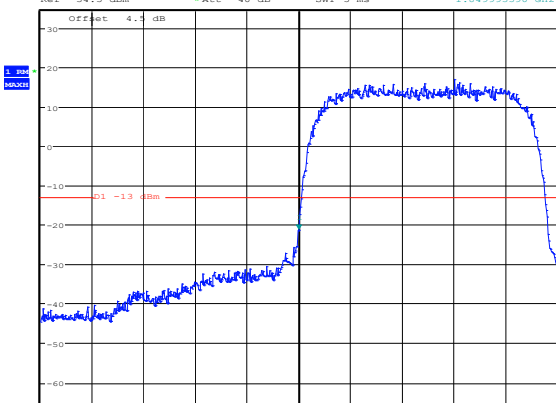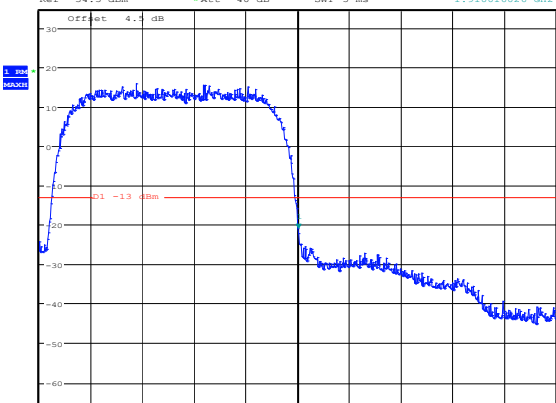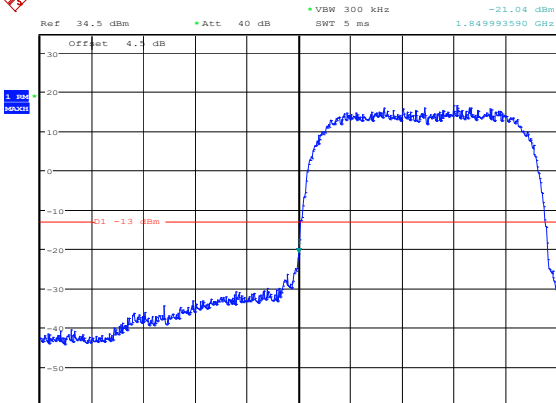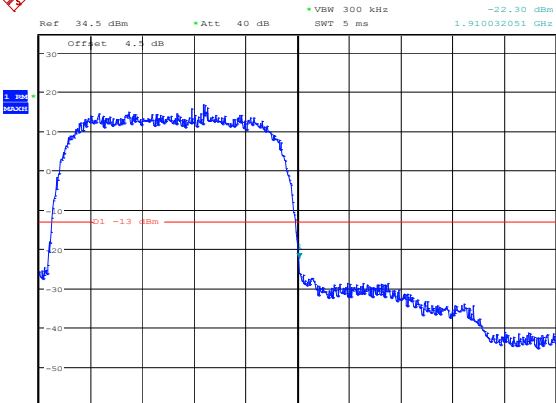Mode	Lowest	Highest
R99	<p>Ref 34.5 dBm *Att 40 dB *RBW 100 kHz *VBW 300 kHz SWT 5 ms Marker 1 [T1] -20.50 dBm 1.849993590 GHz</p>  <p>Offset 4.5 dB Center 1.85 GHz 1 MHz/ Span 10 MHz Date: 22.FEB.2023 10:36:33</p>	<p>Ref 34.5 dBm *Att 40 dB *RBW 100 kHz *VBW 300 kHz SWT 5 ms Marker 1 [T1] -19.45 dBm 1.910016026 GHz</p>  <p>Offset 4.5 dB Center 1.91 GHz 1 MHz/ Span 10 MHz Date: 22.FEB.2023 10:50:37</p>
HSUPA	<p>Ref 34.5 dBm *Att 40 dB *RBW 100 kHz *VBW 300 kHz SWT 5 ms Marker 1 [T1] -21.38 dBm 1.849993590 GHz</p>  <p>Offset 4.5 dB Center 1.85 GHz 1 MHz/ Span 10 MHz Date: 22.FEB.2023 10:37:58</p>	<p>Ref 34.5 dBm *Att 40 dB *RBW 100 kHz *VBW 300 kHz SWT 5 ms Marker 1 [T1] -21.02 dBm 1.910016026 GHz</p>  <p>Offset 4.5 dB Center 1.91 GHz 1 MHz/ Span 10 MHz Date: 22.FEB.2023 10:52:02</p>
HSDPA	<p>Ref 34.5 dBm *Att 40 dB *RBW 100 kHz *VBW 300 kHz SWT 5 ms Marker 1 [T1] -21.04 dBm 1.849993590 GHz</p>  <p>Offset 4.5 dB Center 1.85 GHz 1 MHz/ Span 10 MHz Date: 22.FEB.2023 10:37:23</p>	<p>Ref 34.5 dBm *Att 40 dB *RBW 100 kHz *VBW 300 kHz SWT 5 ms Marker 1 [T1] -22.30 dBm 1.910032051 GHz</p>  <p>Offset 4.5 dB Center 1.91 GHz 1 MHz/ Span 10 MHz Date: 22.FEB.2023 10:51:29</p>

**4.4 Antenna Port Test Data and Results for WCDMA Band 5:**

Serial Number:	1WTO-1	Test Date:	2023/2/22-2023/3/17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	23.7-25.6	Relative Humidity: (%)	36-46	ATM Pressure: (kPa)	101.7-102.3
----------------------	-----------	------------------------------	-------	------------------------	-------------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

*\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

**Test Frequency:**

Operation Modes	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
WCDMA	826.4	836.6	846.6

**Test Data:****FCC §2.1046; § 22.913 (a)****RF Output Power:**

Test Mode	Conducted Average Output Power(dBm)			Maximum ERP (dBm)	ERP Limit (dBm)
	Lowest Channel	Middle Channel	Highest Channel		
WCDMA R99	22.62	22.63	22.61	19.47	38.45
HSDPA Subtest 1	22.12	22.23	22.24	19.08	38.45
HSDPA Subtest 2	22.19	22.26	22.25	19.1	38.45
HSDPA Subtest 3	22.16	22.21	22.29	19.13	38.45
HSDPA Subtest 4	22.18	22.25	22.24	19.09	38.45
HSUPA Subtest 1	22.02	22.15	22.24	19.08	38.45
HSUPA Subtest 2	22.05	22.16	22.26	19.1	38.45
HSUPA Subtest 3	22.06	22.16	22.27	19.11	38.45
HSUPA Subtest 4	22.11	22.14	22.24	19.08	38.45
HSUPA Subtest 5	22.1	22.13	22.19	19.03	38.45
Note: $ERP = \text{Conducted Power(dBm)} - L_c(\text{dB}) + G_T(\text{dBd})$ $G_T(\text{dBd}) = G_T(\text{dBi}) - 2.15$					
				<b>Result:</b>	<b>Pass</b>

Peak-to-average Ratio(PAR)				
Test Mode	Peak-to-average Ratio(dB)			Limit (dB)
	Lowest Channel	Middle Channel	Highest Channel	
WCDMA R99	2.92	3.08	3.17	13
HSDPA	3.81	3.85	4.1	13
HSUPA	3.72	3.81	4.04	13
Result:				Pass

<b>FCC §2.1049, §22.917, §22.905:Occupied Bandwidth</b>						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
WCDMA R99	4.16	4.14	4.16	4.708	4.684	4.701
HSDPA	4.16	4.14	4.16	4.717	4.727	4.692
HSUPA	4.18	4.16	4.18	4.713	4.687	4.707
Note: The test plots please refer to the Plots of Occupied Bandwidth						

<b>FCC §2.1051, §22.917(a):Spurious Emissions at Antenna Terminal</b>	
<b>Result:</b>	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

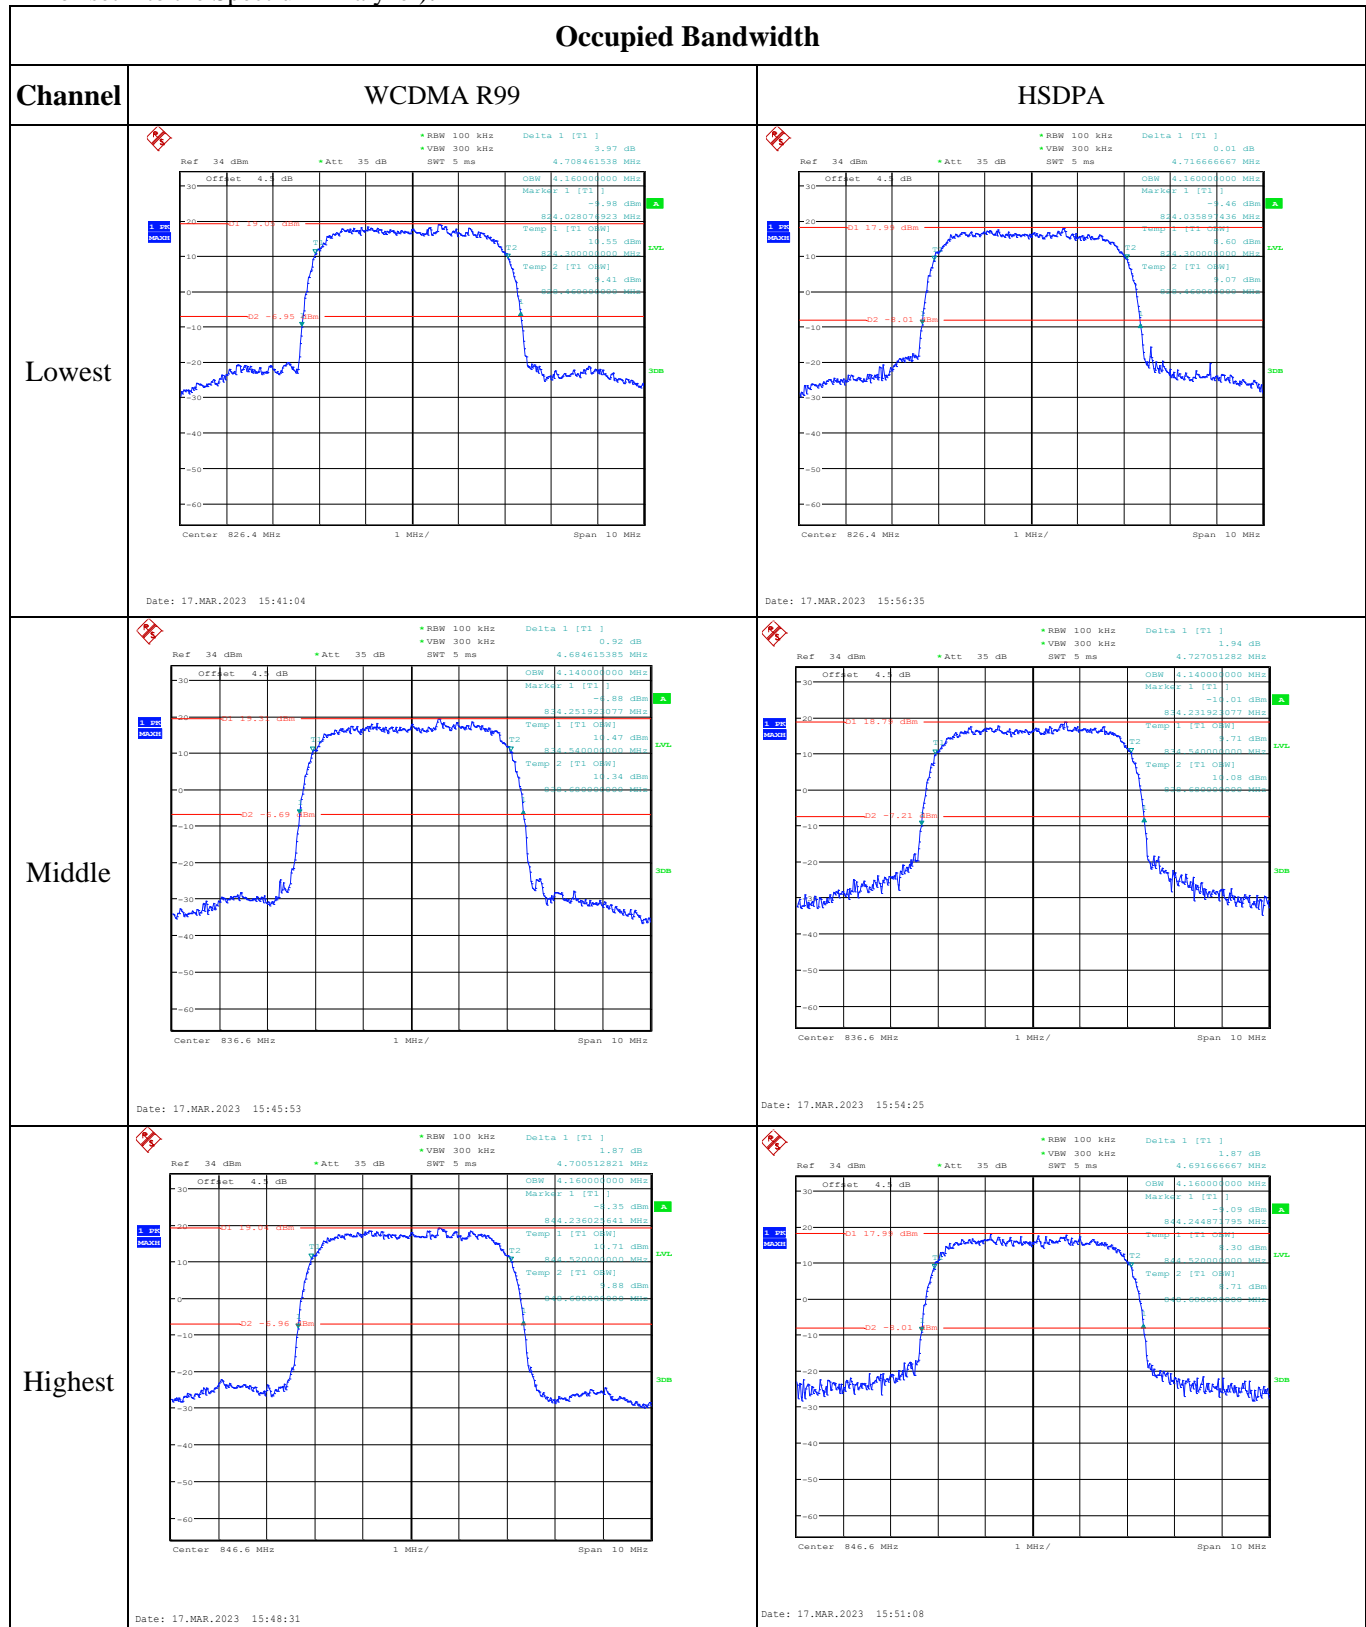
**FCC §2.1051, §22.917(a): Out of band emission, Band Edge**

<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>
----------------	---

**FCC §2.1055, §22.355: Frequency Stability**

Test Modulation:	WCDMA R99		Test Channel:	836.6	MHz
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Frequency Error		Limit
			(Hz)	(ppm)	(ppm)
Frequency Stability vs. Temperature	-30	3.8	8	0.010	2.5
	-20	3.8	1	0.001	2.5
	-10	3.8	25	0.030	2.5
	0	3.8	26	0.031	2.5
	10	3.8	27	0.032	2.5
	20	3.8	27	0.032	2.5
	30	3.8	3	0.004	2.5
	40	3.8	14	0.017	2.5
	50	3.8	57	0.068	2.5
Frequency Stability vs. Voltage	20	3.6	56	0.067	2.5
	20	4.35	35	0.042	2.5
<b>Result:</b>				<b>Pass</b>	

**Test Plots**(Note: The 4.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):






**Channel**


HSUPA

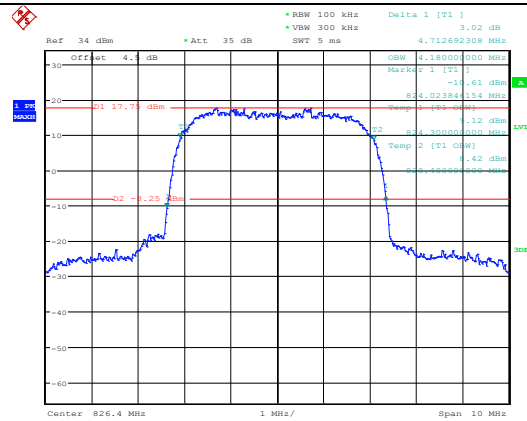Lowest




Date: 17.MAR.2023 15:58:23

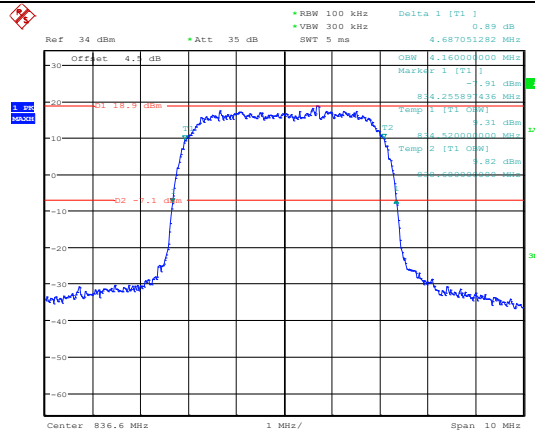Middle













Date: 17.MAR.2023 16:00:20

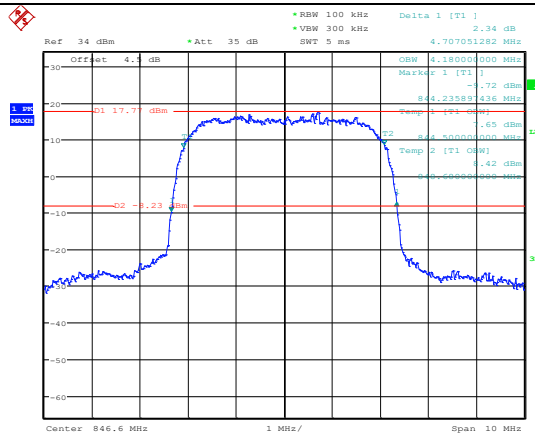Highest




Date: 17.MAR.2023 16:02:03

## Spurious Emissions at Antenna Terminal

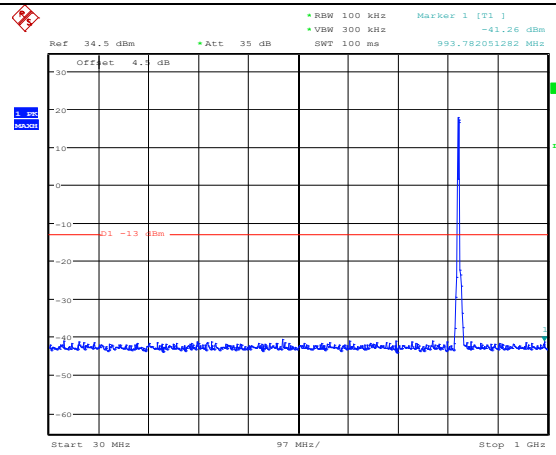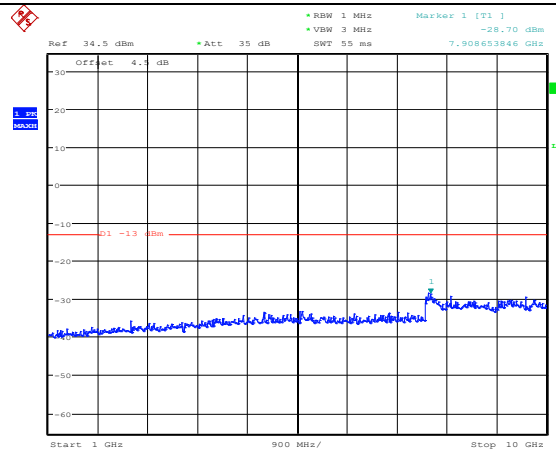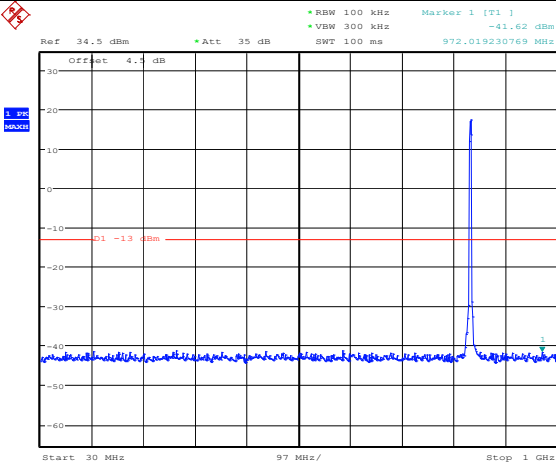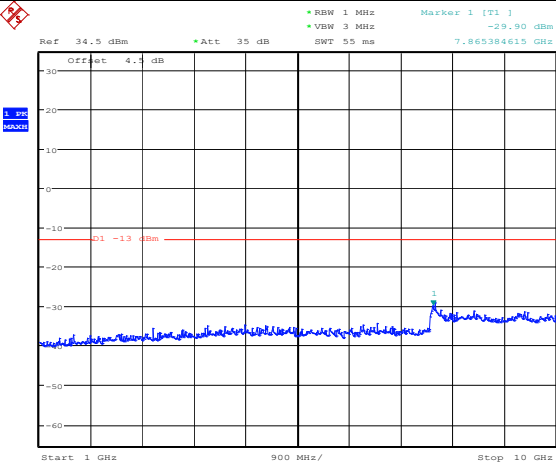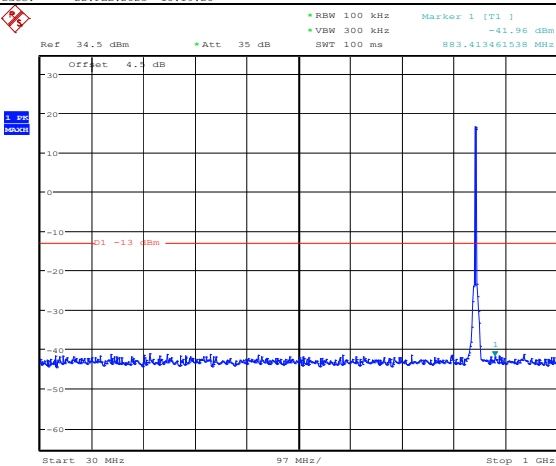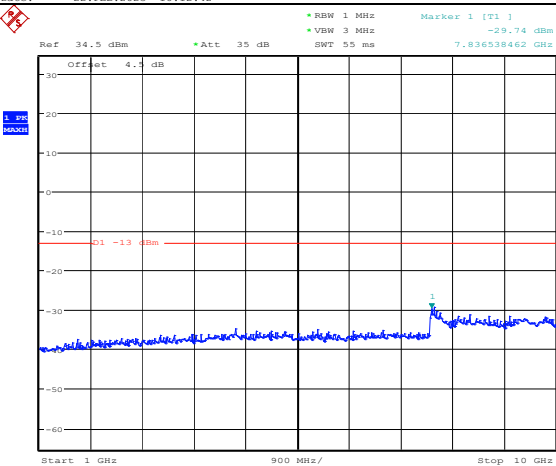Channel	WCDMA R99	
Lowest	 <p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz *VSW 300 kHz SWT 100 ms Marker 1 [T1] -41.26 dBm Offset 4.5 dB Start 30 MHz 97 MHz/ Stop 1 GHz Date: 22.FEB.2023 10:18:23</p>	 <p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz SWT 55 ms Marker 1 [T1] -28.70 dBm Offset 4.5 dB Start 1 GHz 900 MHz/ Stop 10 GHz Date: 22.FEB.2023 10:11:49</p>
	 <p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz *VSW 300 kHz SWT 100 ms Marker 1 [T1] -41.96 dBm Offset 4.5 dB Start 30 MHz 97 MHz/ Stop 1 GHz Date: 22.FEB.2023 10:18:20</p>	 <p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz SWT 55 ms Marker 1 [T1] -29.74 dBm Offset 4.5 dB Start 1 GHz 900 MHz/ Stop 10 GHz Date: 22.FEB.2023 10:12:42</p>
Middle	 <p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz *VSW 300 kHz SWT 100 ms Marker 1 [T1] -41.96 dBm Offset 4.5 dB Start 30 MHz 97 MHz/ Stop 1 GHz Date: 22.FEB.2023 10:19:52</p>	 <p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz SWT 55 ms Marker 1 [T1] -29.74 dBm Offset 4.5 dB Start 1 GHz 900 MHz/ Stop 10 GHz Date: 22.FEB.2023 10:12:53</p>
	 <p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz *VSW 300 kHz SWT 100 ms Marker 1 [T1] -41.96 dBm Offset 4.5 dB Start 30 MHz 97 MHz/ Stop 1 GHz Date: 22.FEB.2023 10:19:52</p>	 <p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz SWT 55 ms Marker 1 [T1] -29.74 dBm Offset 4.5 dB Start 1 GHz 900 MHz/ Stop 10 GHz Date: 22.FEB.2023 10:12:53</p>
Highest	 <p>Ref 34.5 dBm *Att 35 dB *RBW 100 kHz *VSW 300 kHz SWT 100 ms Marker 1 [T1] -41.96 dBm Offset 4.5 dB Start 30 MHz 97 MHz/ Stop 1 GHz Date: 22.FEB.2023 10:19:52</p>	 <p>Ref 34.5 dBm *Att 35 dB *RBW 1 MHz *VSW 3 MHz SWT 55 ms Marker 1 [T1] -29.74 dBm Offset 4.5 dB Start 1 GHz 900 MHz/ Stop 10 GHz Date: 22.FEB.2023 10:12:53</p>

## Out of band emission, Band Edge

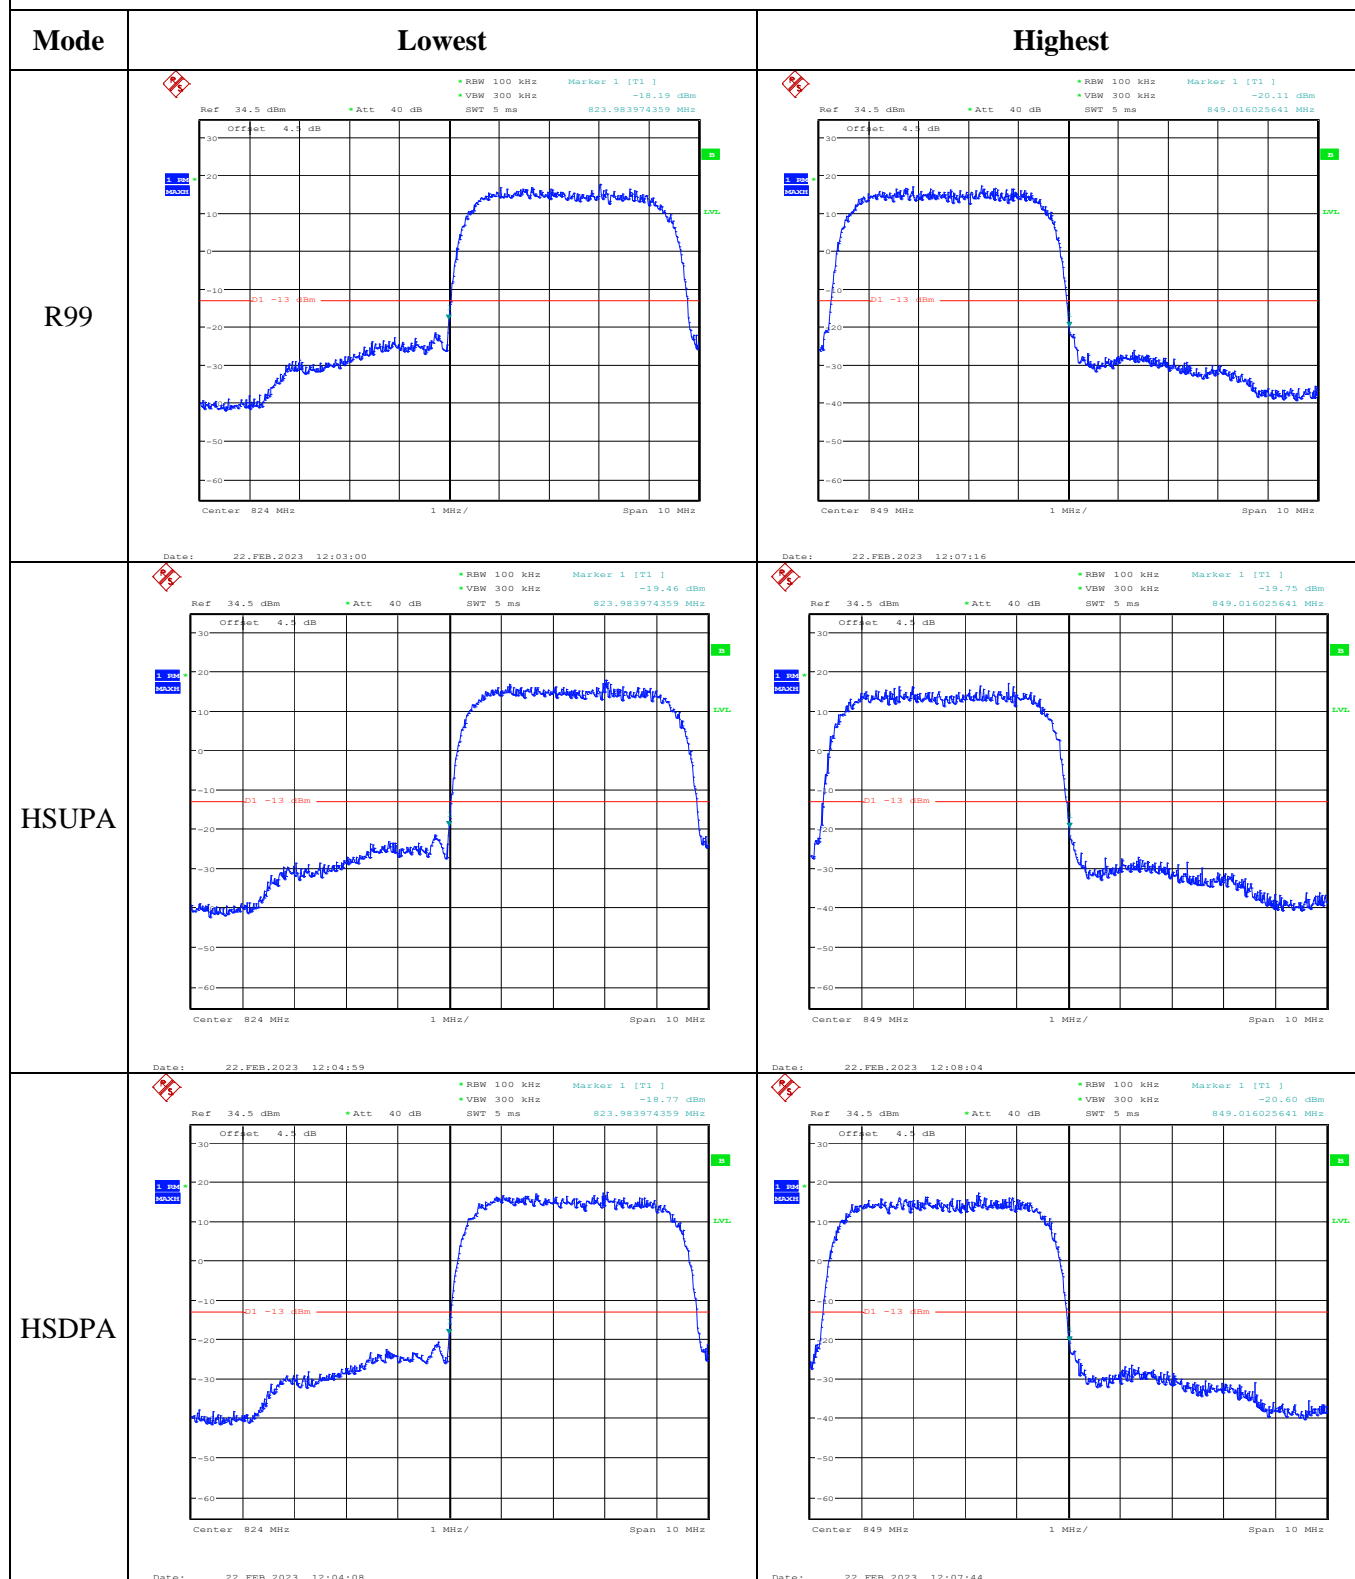

#### 4.5 Antenna Port Test Data and Results for LTE Band 2

Serial Number:	1WTO-1	Test Date:	2023/2/22~2023/2/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

##### Environmental Conditions:

Temperature: (°C)	25.6-24.5	Relative Humidity: (%)	36-42	ATM Pressure: (kPa)	101.7-101.8
----------------------	-----------	------------------------------	-------	------------------------	-------------

##### Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

##### Test Frequency For Each Mode:

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1850.7	1880	1909.3
3MHz	1851.5	1880	1908.5
5MHz	1852.5	1880	1907.5
10MHz	1855	1880	1905
15MHz	1857.5	1880	1902.5
20MHz	1860	1880	1900

**Test Data:****FCC §2.1046; § 24.232****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	21.2	21.11	20.92	20.73	33
	RB1#3	21.23	21.09	20.83		
	RB1#5	21.15	21.03	20.86		
	RB3#0	21.22	21.2	21.1		
	RB3#3	21.24	21.14	21.08		
	RB6#0	20.69	20.68	20.44		
1.4MHz 16QAM	RB1#0	21.6	20.95	20.33	21.09	33
	RB1#3	21.59	21.07	20.38		
	RB1#5	21.55	20.98	20.35		
	RB3#0	20.87	20.86	20.66		
	RB3#3	20.87	20.91	20.66		
	RB6#0	20.15	19.86	19.77		
3MHz QPSK	RB1#0	21.09	20.72	20.73	20.6	33
	RB1#8	21.04	20.71	20.72		
	RB1#14	21.11	20.72	20.73		
	RB6#0	20.7	20.36	20.29		
	RB6#9	20.69	20.24	20.31		
	RB15#0	20.68	20.22	20.38		
3MHz 16QAM	RB1#0	21.39	20.28	20.82	20.88	33
	RB1#8	21.38	20.19	20.83		
	RB1#14	21.3	20.19	20.77		
	RB6#0	19.86	19.47	19.38		
	RB6#9	19.81	19.47	19.33		
	RB15#0	19.75	19.44	19.53		
5MHz QPSK	RB1#0	20.82	20.45	20.89	20.38	33
	RB1#13	20.84	20.3	20.89		
	RB1#24	20.81	20.32	20.83		
	RB15#0	20.25	19.82	20.44		
	RB15#10	20.37	19.8	20.49		
	RB25#0	20.28	19.82	20.37		
5MHz 16QAM	RB1#0	20.54	19.64	19.66	20.03	33
	RB1#13	20.48	19.57	19.59		
	RB1#24	20.54	19.61	19.57		
	RB15#0	19.39	19.07	19.6		
	RB15#10	19.41	19.01	19.57		
	RB25#0	19.46	18.93	19.71		
10MHz QPSK	RB1#0	20.4	21.09	20.9	20.6	33

	RB1#25	20.36	21.11	20.88		
	RB1#49	20.38	21	20.87		
	RB25#0	19.86	20.71	20.54		
	RB25#25	19.7	20.56	20.37		
	RB50#0	19.73	20.59	20.49		
10MHz 16QAM	RB1#0	19.99	20.1	20.81	20.3	33
	RB1#25	19.95	20.04	20.78		
	RB1#49	19.94	20.08	20.72		
	RB25#0	19.04	19.86	19.63		
	RB25#25	19.02	19.83	19.62		
	RB50#0	19.03	19.67	19.64		
15MHz QPSK	RB1#0	21.06	20.66	20.53	20.55	33
	RB1#38	21	20.53	20.52		
	RB1#74	21.01	20.44	20.48		
	RB36#0	20.51	20.12	20.14		
	RB36#39	20.48	20.02	20.11		
	RB75#0	20.56	20.08	20.17		
15MHz 16QAM	RB1#0	20.72	20.56	20.51	20.21	33
	RB1#38	20.68	20.5	20.45		
	RB1#74	20.64	20.51	20.33		
	RB36#0	19.71	19.29	19.35		
	RB36#39	19.7	19.32	19.36		
	RB75#0	19.58	19.27	19.26		
20MHz QPSK	RB1#0	21.1	20.55	20.6	20.6	33
	RB1#50	21.1	20.49	20.56		
	RB1#99	21.11	20.39	20.51		
	RB50#0	20.58	19.9	20.04		
	RB50#50	20.74	19.8	19.82		
	RB100#0	20.61	19.83	19.93		
20MHz 16QAM	RB1#0	21.1	20.74	20.16	20.59	33
	RB1#50	21.04	20.63	20.04		
	RB1#99	21.02	20.69	19.98		
	RB50#0	19.89	19.1	19.21		
	RB50#50	19.84	18.98	19.12		
	RB100#0	19.84	19.04	19.14		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G<sub>T</sub>(dBi)

**Result:**

**Pass**

<b>Peak-to-average Ratio(PAR)</b>					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.67	4.04	5.29	13
	RB100#0	6.47	6.47	6.31	13
20MHz 16QAM	RB1#0	6.38	4.46	5.67	13
	RB100#0	7.12	7.24	7.82	13
				<b>Result:</b>	<b>Pass</b>

<b>FCC §2.1049, §24.238:Occupied Bandwidth</b>						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.11	1.104	1.26	1.26	1.26
1.4MHz 16QAM	1.098	1.11	1.11	1.26	1.266	1.26
3MHz QPSK	2.7	2.688	2.7	3.012	3.024	3
3MHz 16QAM	2.688	2.7	2.687	3	3.024	3.024
5MHz QPSK	4.52	4.52	4.5	5.02	4.98	5
5MHz 16QAM	4.54	4.54	4.52	5.02	5.02	4.98
10MHz QPSK	8.96	8.96	8.96	9.72	9.76	9.76
10MHz 16QAM	9	8.96	8.96	9.8	9.92	9.8
15MHz QPSK	13.5	13.56	13.56	14.94	15.18	15
15MHz 16QAM	13.5	13.56	13.5	15.12	15.06	15
20MHz QPSK	18	18.08	17.92	19.52	19.92	19.52
20MHz 16QAM	18	18.08	18	19.84	19.76	19.68
Note: The test plots please refer to the Plots of Occupied Bandwidth						

<b>FCC §2.1051, § 24.238 (a):Spurious Emissions at Antenna Terminal</b>	
<b>Result:</b>	Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.

<b>FCC §2.1051, § 24.238 (a):Out of band emission, Band Edge</b>	
<b>Result:</b>	Pass, Please refer to the test plots of Out of band emission, Band Edge.

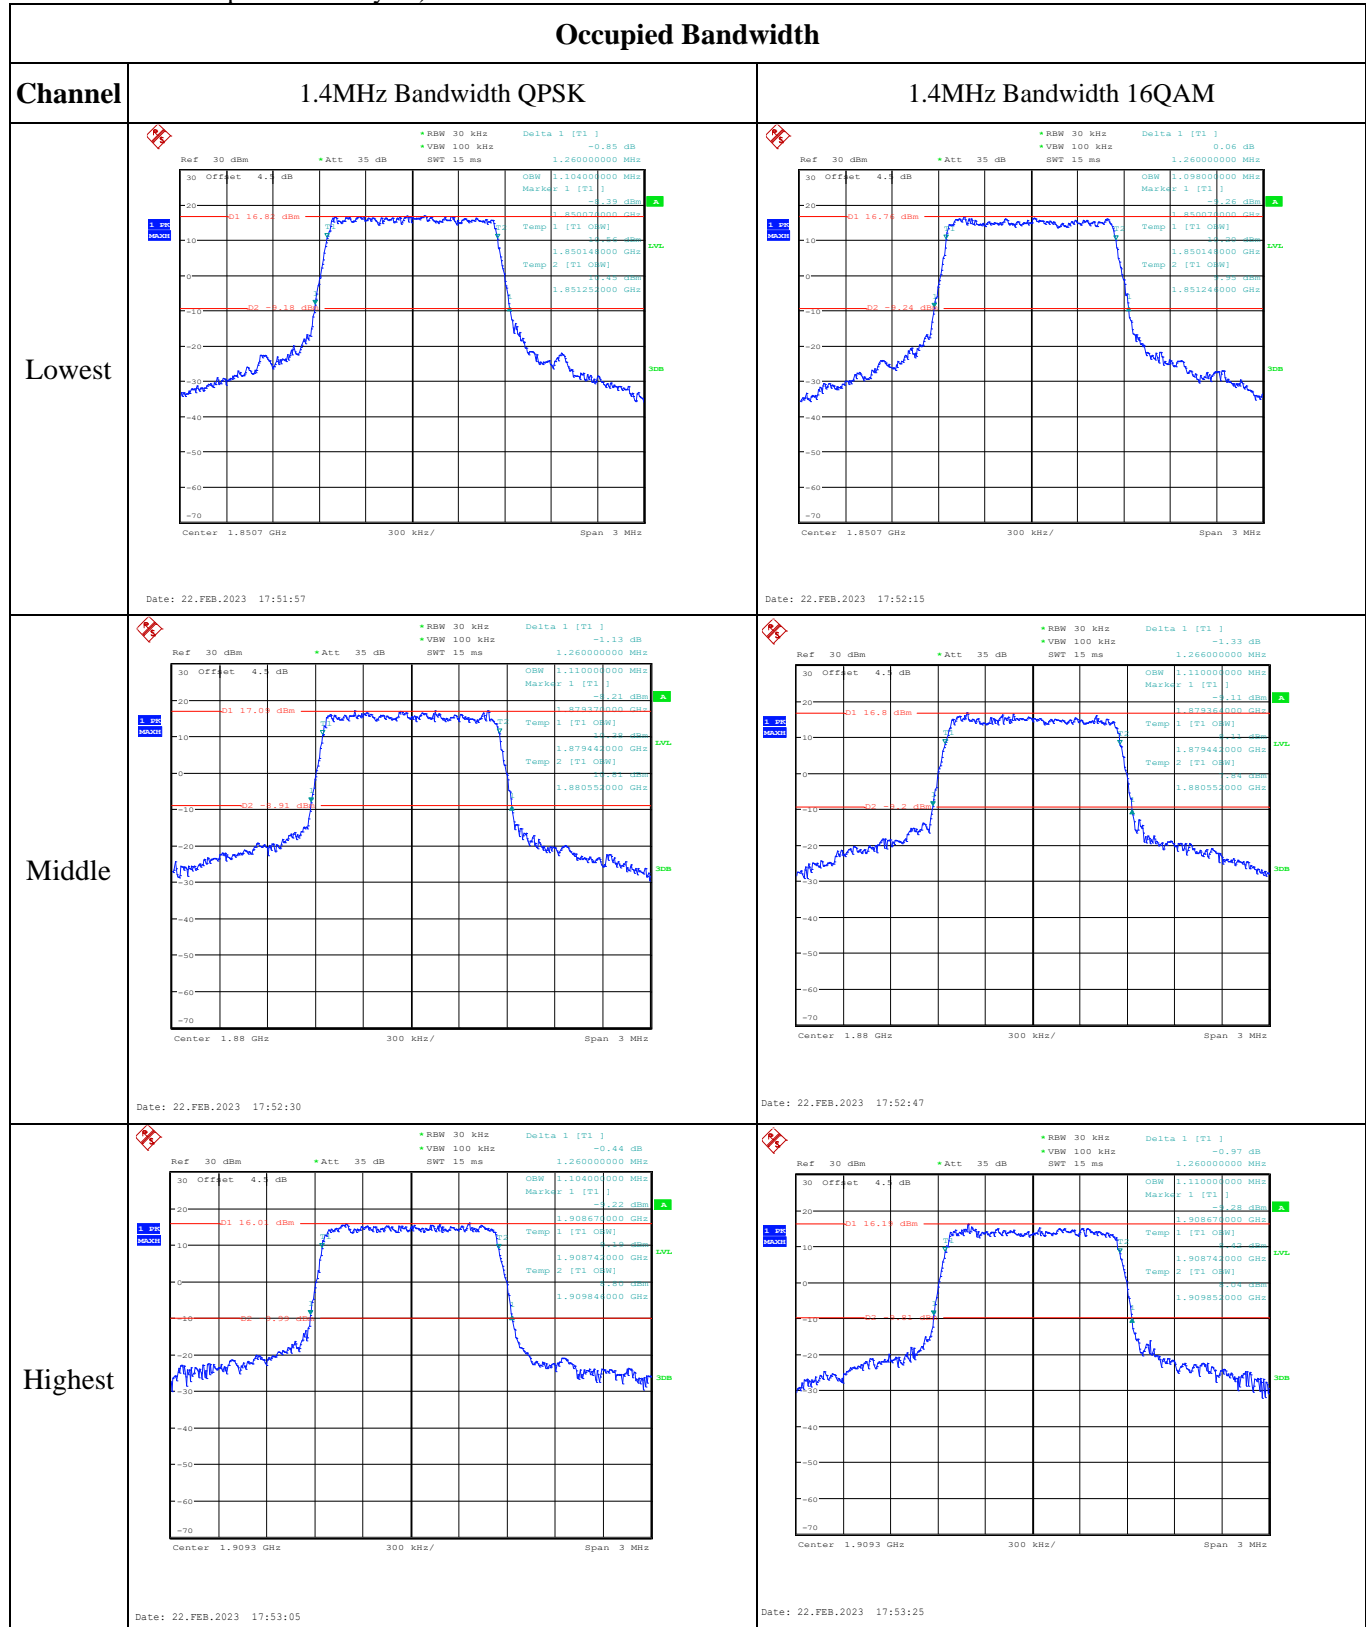
**FCC §2.1055, §24.235: Frequency Stability**

Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1851.037	1850.000	1908.973	1910.000
	-20	3.8	1851.012	1850.000	1908.976	1910.000
	-10	3.8	1851.012	1850.000	1908.969	1910.000
	0	3.8	1851.018	1850.000	1908.978	1910.000
	10	3.8	1851.015	1850.000	1908.972	1910.000
	20	3.8	1851.040	1850.000	1908.960	1910.000
	30	3.8	1851.016	1850.000	1908.970	1910.000
	40	3.8	1851.034	1850.000	1908.976	1910.000
	50	3.8	1851.025	1850.000	1908.970	1910.000
Frequency Stability vs. Voltage	20	3.6	1851.030	1850.000	1908.988	1910.000
	20	4.35	1851.020	1850.000	1908.960	1910.000
					<b>Result:</b>	<b>Pass</b>

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1851.030	1850.000	1909.055	1910.000
	-20	3.8	1851.018	1850.000	1909.049	1910.000
	-10	3.8	1851.015	1850.000	1909.054	1910.000
	0	3.8	1851.024	1850.000	1909.051	1910.000
	10	3.8	1851.013	1850.000	1909.040	1910.000
	20	3.8	1851.040	1850.000	1909.040	1910.000
	30	3.8	1851.019	1850.000	1909.053	1910.000
	40	3.8	1851.028	1850.000	1909.042	1910.000
	50	3.8	1851.019	1850.000	1909.068	1910.000
Frequency Stability vs. Voltage	20	3.6	1851.036	1850.000	1909.062	1910.000
	20	4.35	1851.012	1850.000	1909.059	1910.000
					<b>Result:</b>	<b>Pass</b>









**Test Plots**(Note: The 4.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):









Occupied Bandwidth		
Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	<p>Ref 30 dBm *Att 35 dB Delta 1 [T1] -0.27 dB          *RBW 30 kHz          *VBW 100 kHz          SWT 30 ms 3.012000000 MHz          OSW 2.705000000 MHz          Marker 1 [T1] -14.47 dBm          Temp 1 [T1 QSW] 1.850000000 GHz          Temp 2 [T1 QSW] 1.850134000 GHz          Temp 3 [T1 QSW] 1.852854000 GHz          Center 1.8515 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 22.FEB.2023 17:53:44</p>	<p>Ref 30 dBm *Att 35 dB Delta 1 [T1] 0.71 dB          *RBW 30 kHz          *VBW 100 kHz          SWT 30 ms 3.000000000 MHz          OSW 2.688000000 MHz          Marker 1 [T1] -13.64 dBm          Temp 1 [T1 QSW] 1.850000000 GHz          Temp 2 [T1 QSW] 1.850134000 GHz          Temp 3 [T1 QSW] 1.852844000 GHz          Center 1.8515 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 22.FEB.2023 17:53:58</p>
Middle	<p>Ref 30 dBm *Att 35 dB Delta 1 [T1] -1.16 dB          *RBW 30 kHz          *VBW 100 kHz          SWT 30 ms 3.024000000 MHz          OSW 2.688000000 MHz          Marker 1 [T1] -13.24 dBm          Temp 1 [T1 QSW] 1.878488000 GHz          Temp 2 [T1 QSW] 1.878640000 GHz          Temp 3 [T1 QSW] 1.881344000 GHz          Center 1.88 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 22.FEB.2023 17:54:15</p>	<p>Ref 30 dBm *Att 35 dB Delta 1 [T1] -0.42 dB          *RBW 30 kHz          *VBW 100 kHz          SWT 30 ms 3.024000000 MHz          OSW 2.700000000 MHz          Marker 1 [T1] -13.6 dBm          Temp 1 [T1 QSW] 1.878488000 GHz          Temp 2 [T1 QSW] 1.878640000 GHz          Temp 3 [T1 QSW] 1.881344000 GHz          Center 1.88 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 22.FEB.2023 17:54:32</p>
Highest	<p>Ref 30 dBm *Att 35 dB Delta 1 [T1] -1.05 dB          *RBW 30 kHz          *VBW 100 kHz          SWT 30 ms 3.000000000 MHz          OSW 2.700000000 MHz          Marker 1 [T1] -14.4 dBm          Temp 1 [T1 QSW] 1.907000000 GHz          Temp 2 [T1 QSW] 1.907154000 GHz          Temp 3 [T1 QSW] 1.909854000 GHz          Center 1.9085 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 22.FEB.2023 17:54:47</p>	<p>Ref 30 dBm *Att 35 dB Delta 1 [T1] 0.32 dB          *RBW 30 kHz          *VBW 100 kHz          SWT 30 ms 3.024000000 MHz          OSW 2.688000000 MHz          Marker 1 [T1] -12.54 dBm          Temp 1 [T1 QSW] 1.906988000 GHz          Temp 2 [T1 QSW] 1.907154000 GHz          Temp 3 [T1 QSW] 1.909844000 GHz          Center 1.9085 GHz 600 kHz/ Span 6 MHz</p> <p>Date: 22.FEB.2023 17:55:04</p>

## Occupied Bandwidth

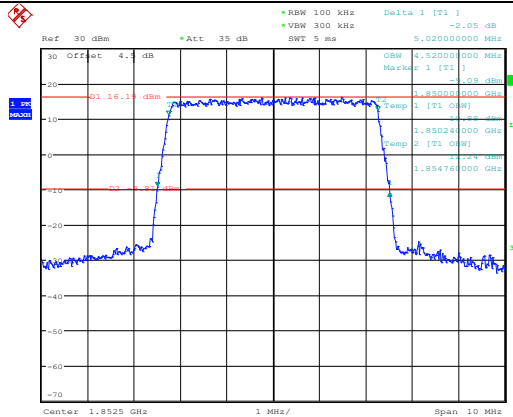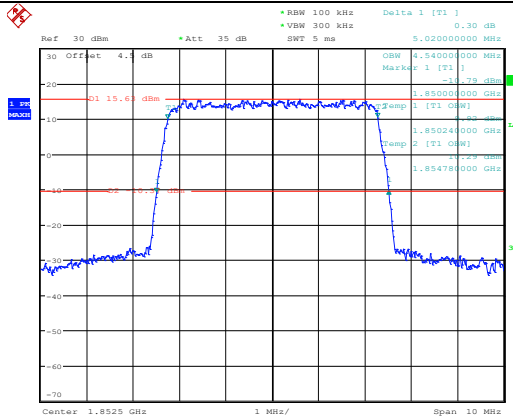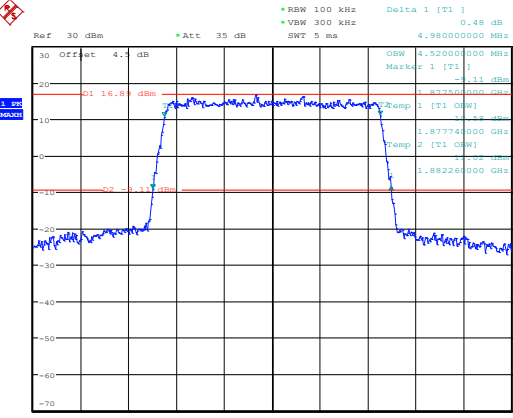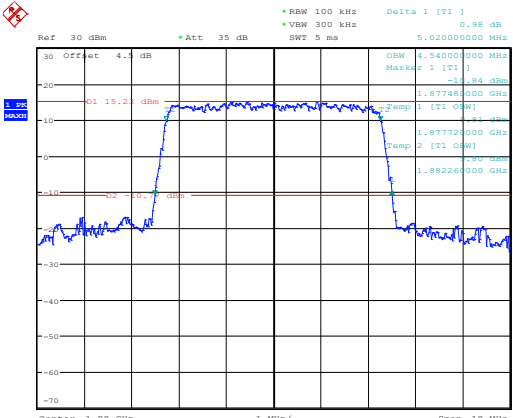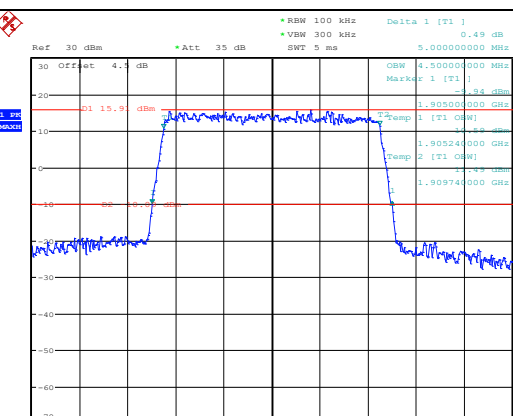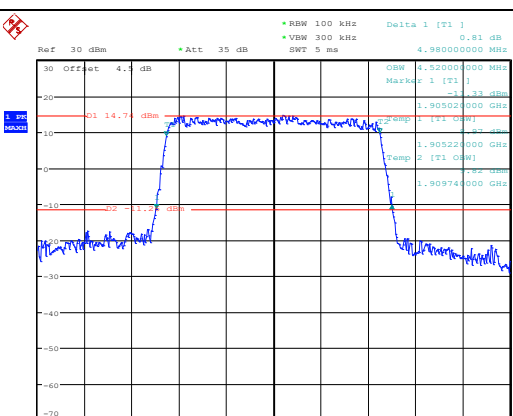Channel	5MHz Bandwidth QPSK	5MHz Bandwidth 16QAM
Lowest	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 100 kHz VSW: 300 kHz SWT: 5 ms Delta: 1 [T1] -2.05 dB Marker: 1 [T1] 4.520000000 MHz -16.19 dBm 1.852000000 GHz 1.850240000 GHz 1.850240000 GHz 1.854760000 GHz</p> <p>Center: 1.8525 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 22.FEB.2023 17:55:27</p>	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 100 kHz VSW: 300 kHz SWT: 5 ms Delta: 1 [T1] 0.30 dB Marker: 1 [T1] 4.540000000 MHz -15.63 dBm 1.850000000 GHz 1.850240000 GHz 1.850240000 GHz 1.854760000 GHz</p> <p>Center: 1.8525 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 22.FEB.2023 17:55:44</p>
Middle	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 100 kHz VSW: 300 kHz SWT: 5 ms Delta: 1 [T1] 0.48 dB Marker: 1 [T1] 4.980000000 MHz -16.81 dBm 1.873000000 GHz 1.877740000 GHz 1.877740000 GHz 1.882260000 GHz</p> <p>Center: 1.88 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 22.FEB.2023 17:55:59</p>	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 100 kHz VSW: 300 kHz SWT: 5 ms Delta: 1 [T1] 0.88 dB Marker: 1 [T1] 4.540000000 MHz -15.21 dBm 1.877400000 GHz 1.877740000 GHz 1.877740000 GHz 1.882260000 GHz</p> <p>Center: 1.88 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 22.FEB.2023 17:56:16</p>
Highest	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 100 kHz VSW: 300 kHz SWT: 5 ms Delta: 1 [T1] 0.49 dB Marker: 1 [T1] 4.500000000 MHz -15.91 dBm 1.905000000 GHz 1.905240000 GHz 1.905240000 GHz 1.909740000 GHz</p> <p>Center: 1.9075 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 22.FEB.2023 17:56:34</p>	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 100 kHz VSW: 300 kHz SWT: 5 ms Delta: 1 [T1] 0.81 dB Marker: 1 [T1] 4.520000000 MHz -14.74 dBm 1.905000000 GHz 1.905240000 GHz 1.905240000 GHz 1.909740000 GHz</p> <p>Center: 1.9075 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 22.FEB.2023 17:56:52</p>



## Occupied Bandwidth

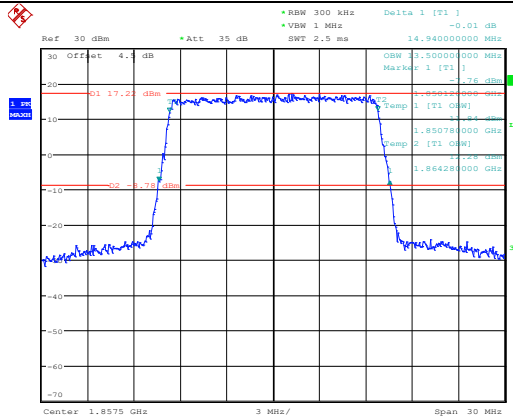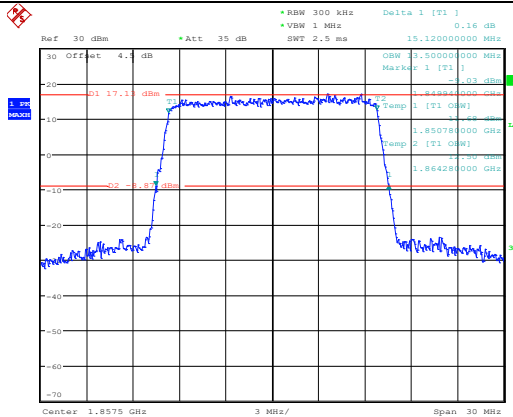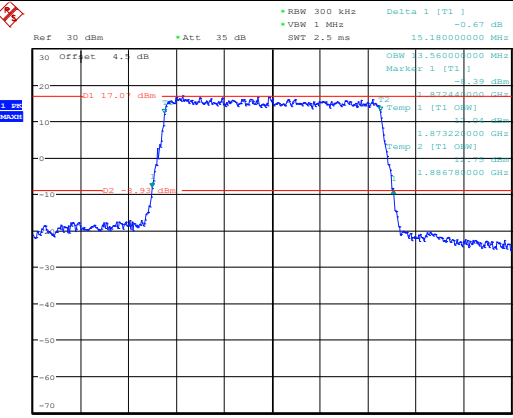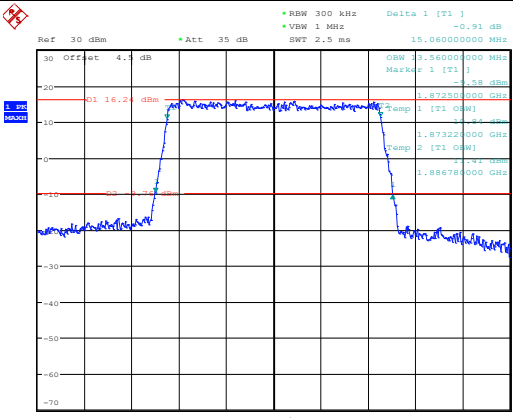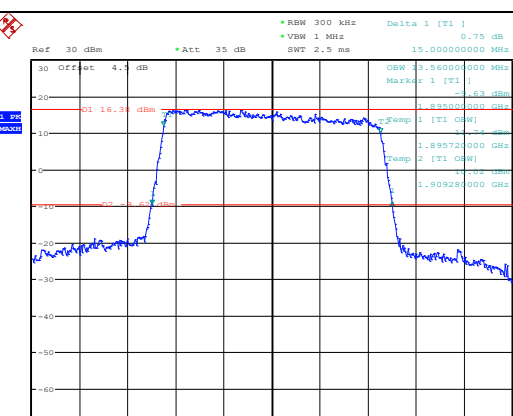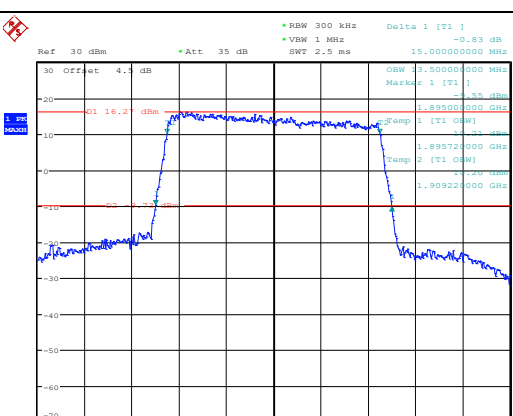Channel	15MHz Bandwidth QPSK	15MHz Bandwidth 16QAM
Lowest	 <p>Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] -0.01 dB VBW 1 MHz SWT 2.5 ms OSW 15.00000000 MHz Marker 1 [T1] -17.23 dBm Temp 1 [T1 QSW] 1.850780000 GHz Temp 2 [T1 QSW] 1.864280000 GHz Center 1.8575 GHz 3 MHz/ Span 30 MHz</p> <p>Date: 22.FEB.2023 17:59:02</p>	 <p>Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] 0.16 dB VBW 1 MHz SWT 2.5 ms OSW 15.120000000 MHz Marker 1 [T1] -17.11 dBm Temp 1 [T1 QSW] 1.850780000 GHz Temp 2 [T1 QSW] 1.864280000 GHz Center 1.8575 GHz 3 MHz/ Span 30 MHz</p> <p>Date: 22.FEB.2023 17:59:23</p>
Middle	 <p>Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] -0.67 dB VBW 1 MHz SWT 2.5 ms OSW 15.180000000 MHz Marker 1 [T1] -17.0 dBm Temp 1 [T1 QSW] 1.873220000 GHz Temp 2 [T1 QSW] 1.886780000 GHz Center 1.88 GHz 3 MHz/ Span 30 MHz</p> <p>Date: 22.FEB.2023 17:59:42</p>	 <p>Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] -0.91 dB VBW 1 MHz SWT 2.5 ms OSW 15.060000000 MHz Marker 1 [T1] -16.24 dBm Temp 1 [T1 QSW] 1.873220000 GHz Temp 2 [T1 QSW] 1.886780000 GHz Center 1.88 GHz 3 MHz/ Span 30 MHz</p> <p>Date: 22.FEB.2023 18:00:00</p>
Highest	 <p>Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] 0.75 dB VBW 1 MHz SWT 2.5 ms OSW 15.000000000 MHz Marker 1 [T1] -16.34 dBm Temp 1 [T1 QSW] 1.895720000 GHz Temp 2 [T1 QSW] 1.909280000 GHz Center 1.9025 GHz 3 MHz/ Span 30 MHz</p> <p>Date: 22.FEB.2023 18:00:19</p>	 <p>Ref 30 dBm *Att 35 dB RBW 300 kHz Delta 1 [T1] -0.83 dB VBW 1 MHz SWT 2.5 ms OSW 15.000000000 MHz Marker 1 [T1] -16.2 dBm Temp 1 [T1 QSW] 1.895720000 GHz Temp 2 [T1 QSW] 1.909280000 GHz Center 1.9025 GHz 3 MHz/ Span 30 MHz</p> <p>Date: 22.FEB.2023 18:00:37</p>


## Occupied Bandwidth
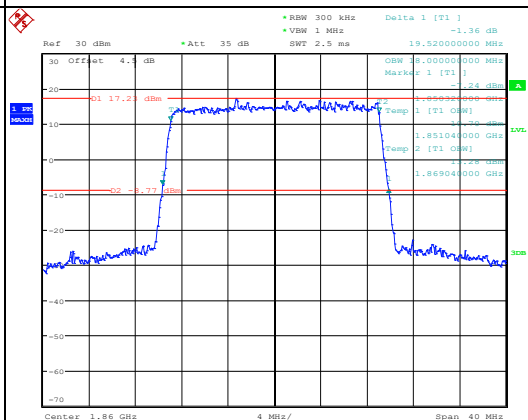
## Channel


## 20MHz Bandwidth QPSK

## 20MHz Bandwidth 16QAM

## Lowest




Date: 22.FEB.2023 18:00:59

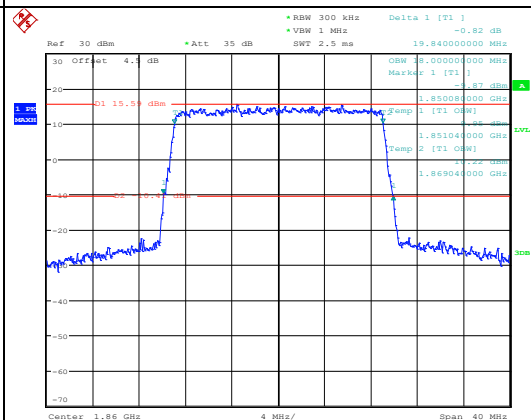


Date: 22.FEB.2023 18:01:17

## Middle

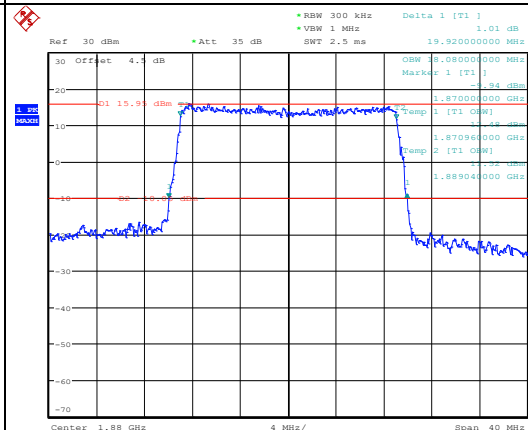


Date: 22.FEB.2023 18:01:40

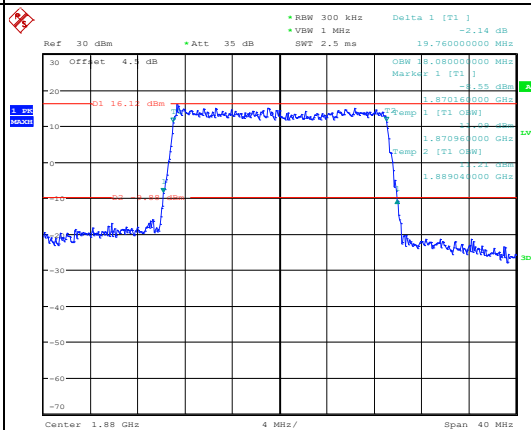


Date: 22.FEB.2023 18:01:58

## Highest

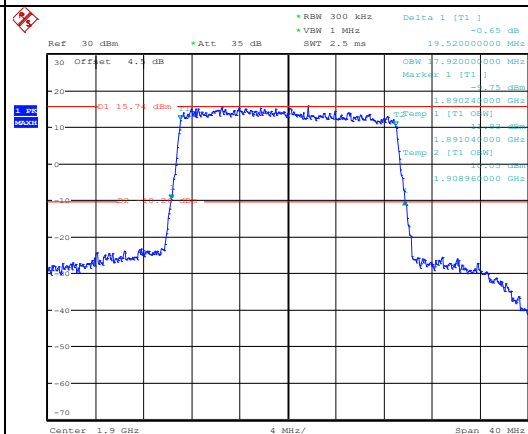

Date: 22.FEB.2023 18:02:13

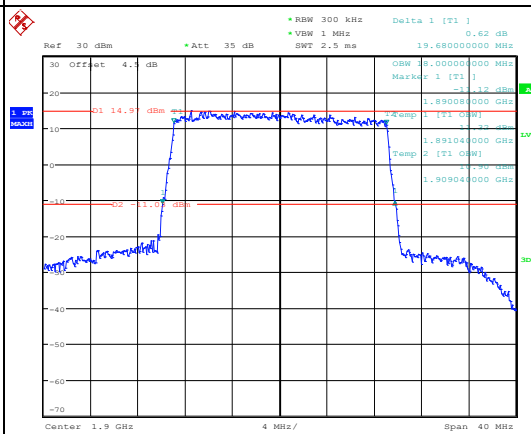


Date: 22.FEB.2023 18:02:32

## Spurious Emissions at Antenna Terminal

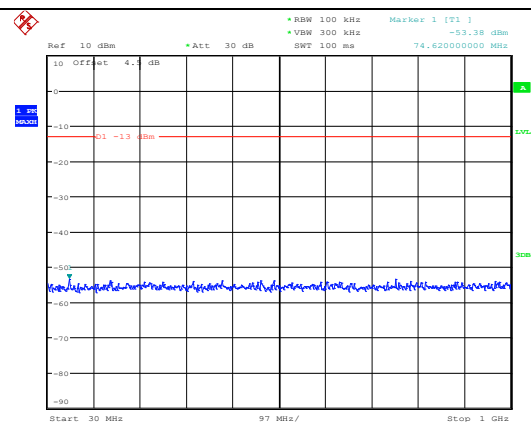
Channel

1.4MHz Bandwidth QPSK

Lowest




Date: 22.FEB.2023 18:58:15

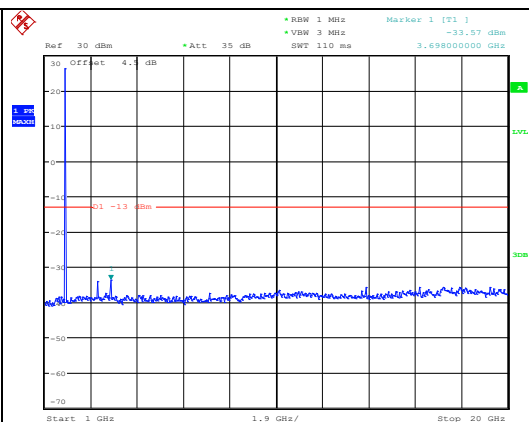


Date: 22.FEB.2023 18:58:28

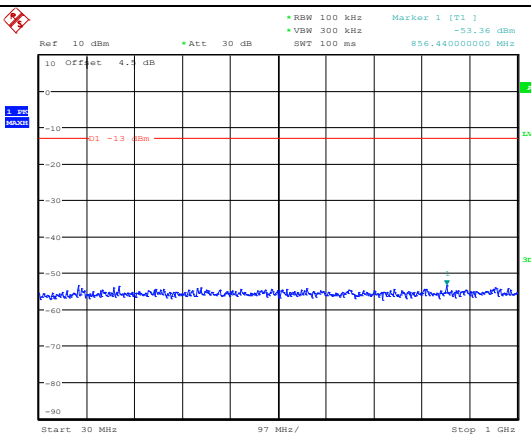Middle




Date: 22.FEB.2023 18:58:43

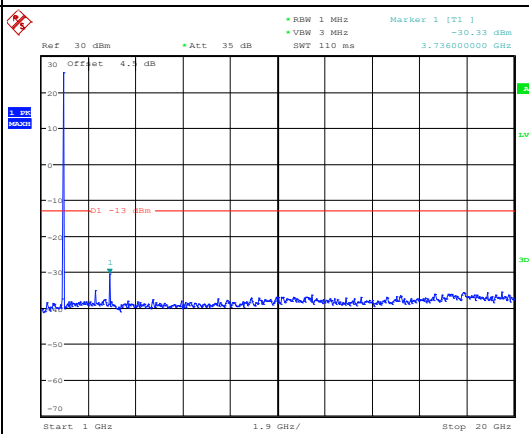


Date: 22.FEB.2023 18:58:56

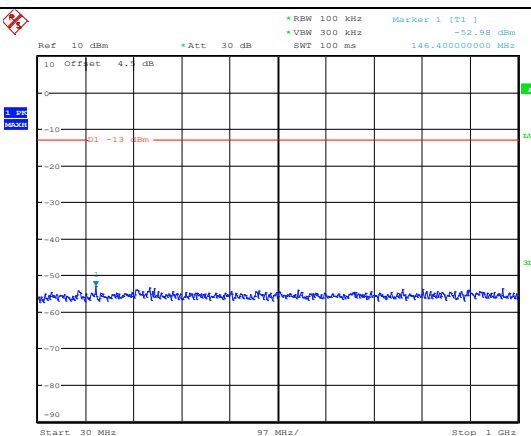Highest



Date: 22.FEB.2023 18:59:11

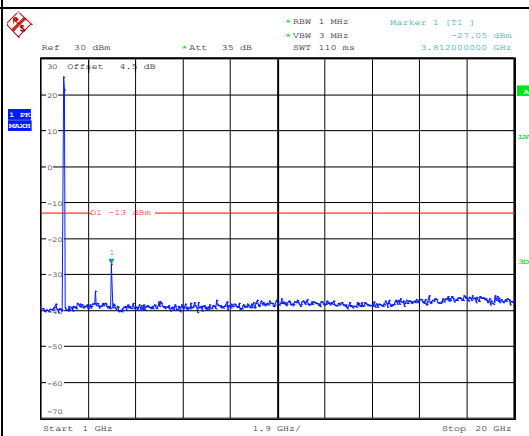



Date: 22.FEB.2023 18:59:24

## Spurious Emissions at Antenna Terminal

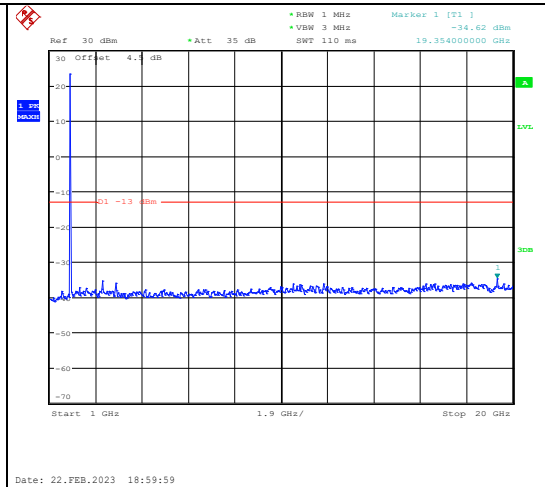
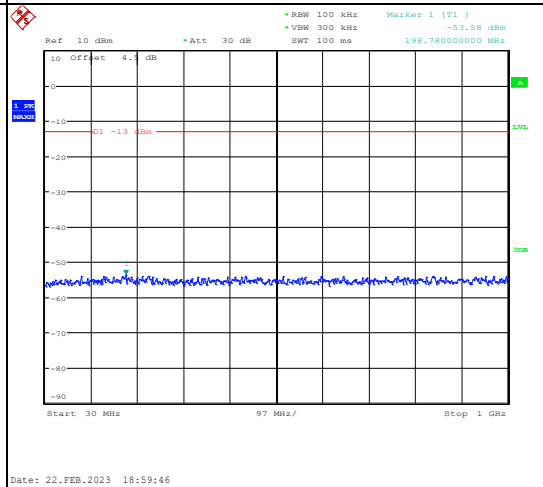
Channel

3MHz Bandwidth QPSK



Lowest



Middle

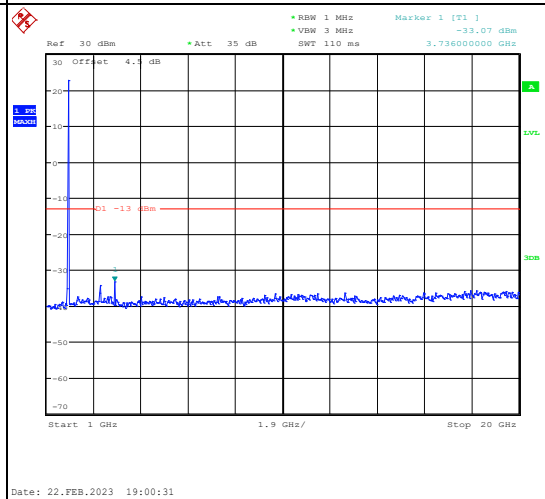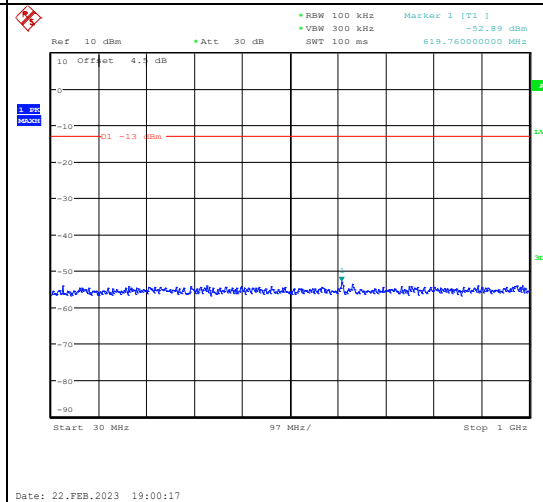

Highest

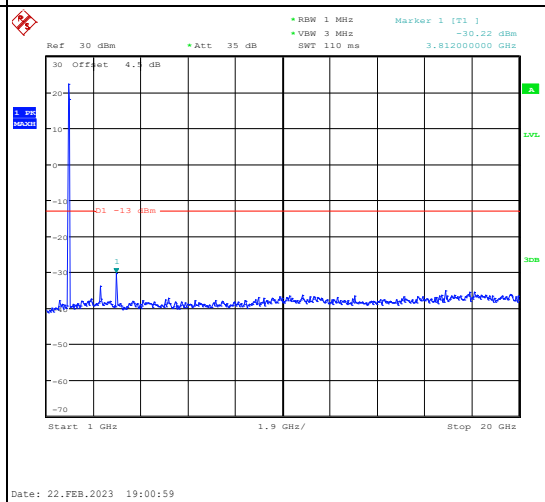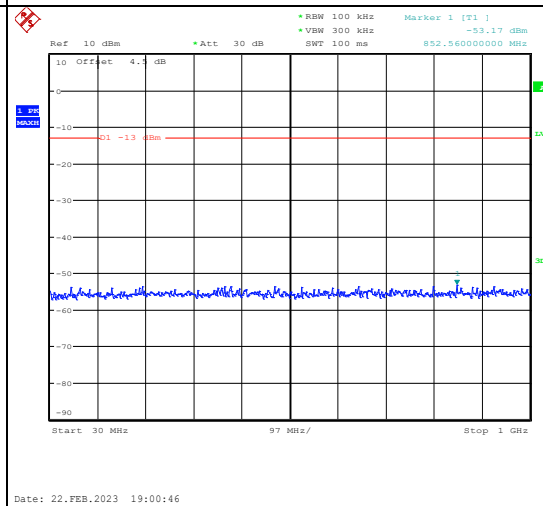




## Spurious Emissions at Antenna Terminal


Channel

5MHz Bandwidth QPSK

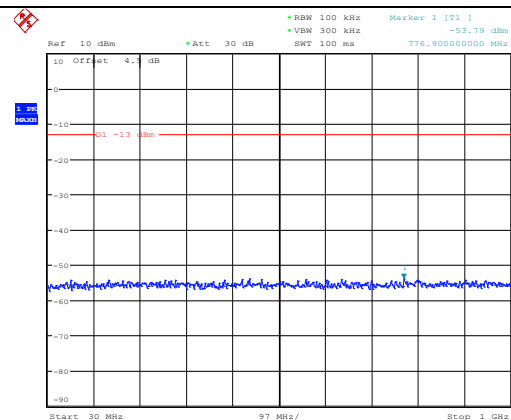Lowest




Date: 22.FEB.2023 19:01:17

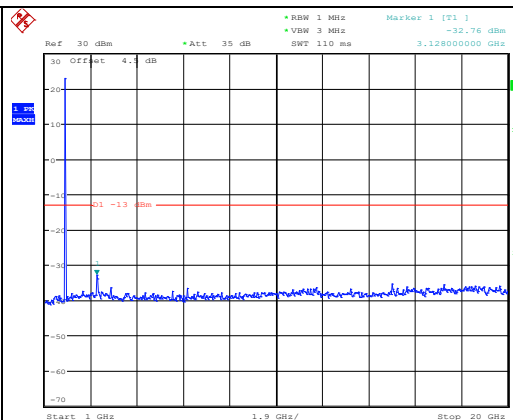


Date: 22.FEB.2023 19:01:30

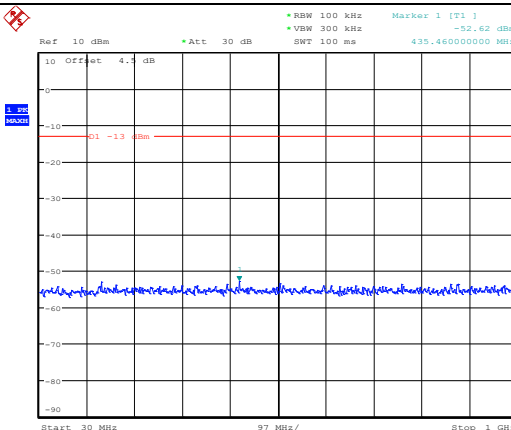Middle




Date: 22.FEB.2023 19:01:49

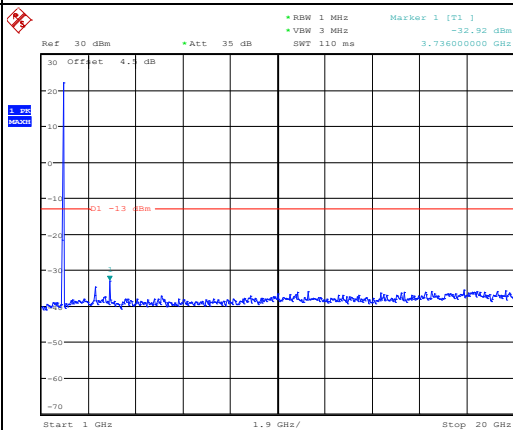


Date: 22.FEB.2023 19:02:02

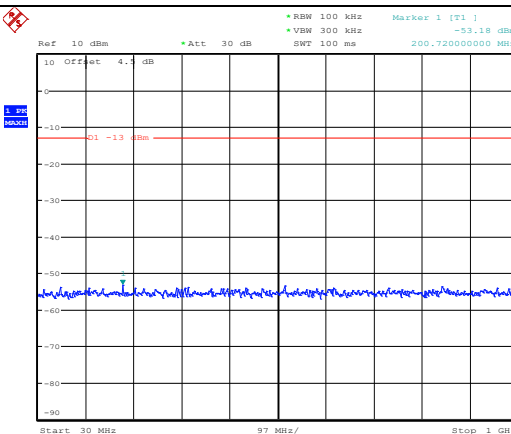Highest









Date: 22.FEB.2023 19:02:20

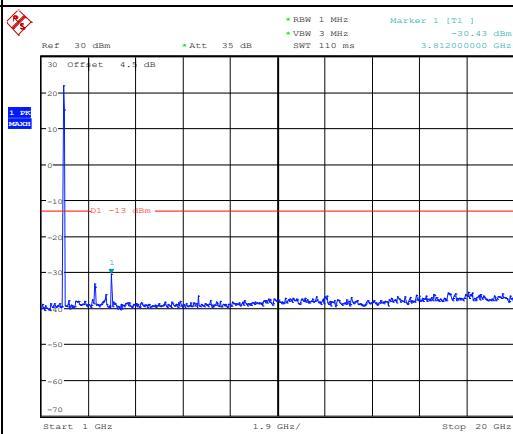

Date: 22.FEB.2023 19:02:33

## Spurious Emissions at Antenna Terminal

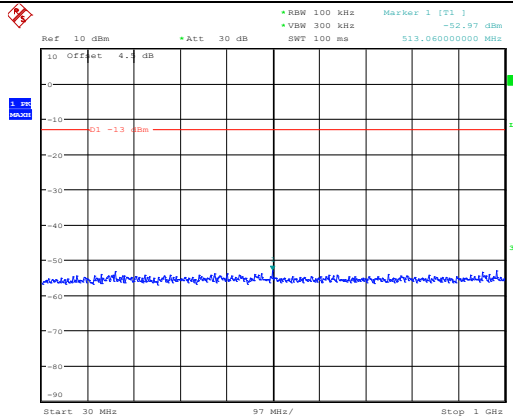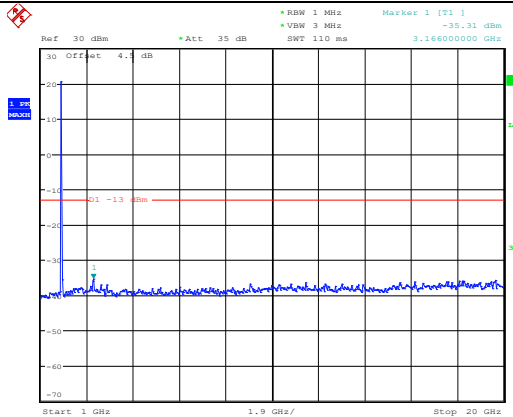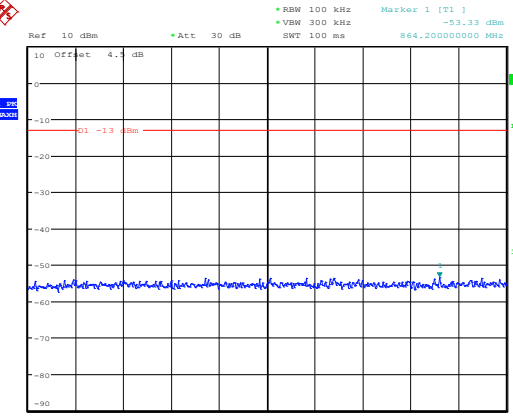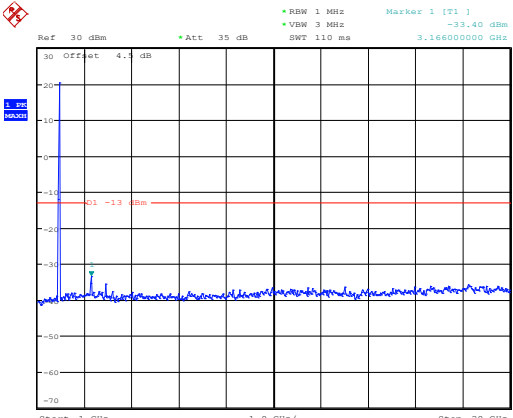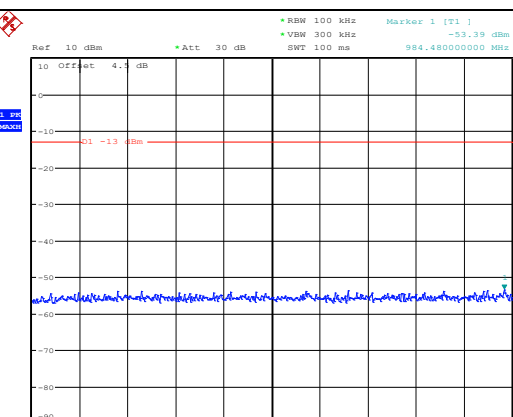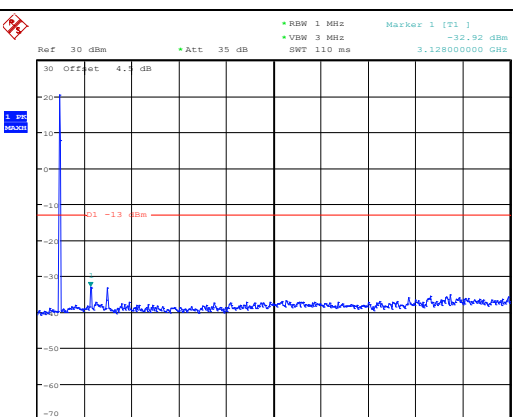
Channel	10MHz Bandwidth QPSK	
Lowest		
	Date: 22.FEB.2023 19:02:55	Date: 22.FEB.2023 19:03:08
Middle		
	Date: 22.FEB.2023 19:03:27	Date: 22.FEB.2023 19:03:39
Highest		
	Date: 22.FEB.2023 19:03:55	Date: 22.FEB.2023 19:04:08

## Spurious Emissions at Antenna Terminal

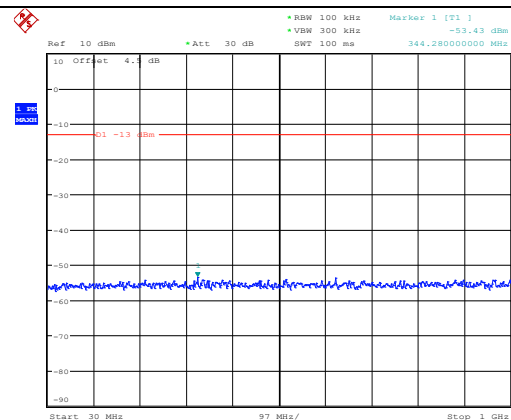
Channel

15MHz Bandwidth QPSK

Lowest




Date: 22.FEB.2023 19:04:27

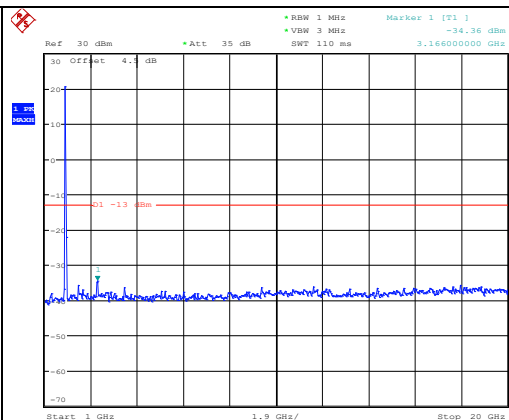


Date: 22.FEB.2023 19:04:40

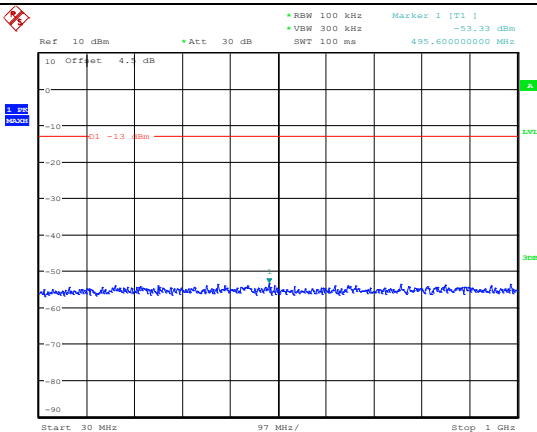Middle




Date: 22.FEB.2023 19:04:59

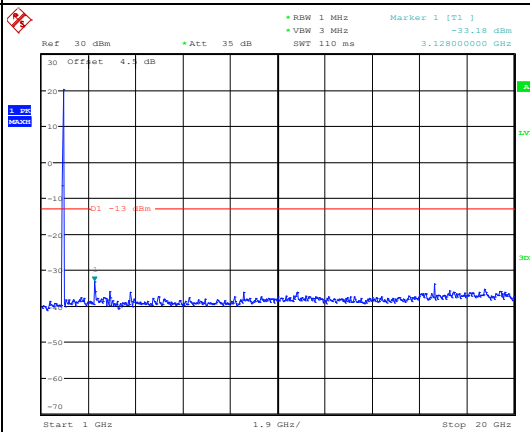


Date: 22.FEB.2023 19:05:12

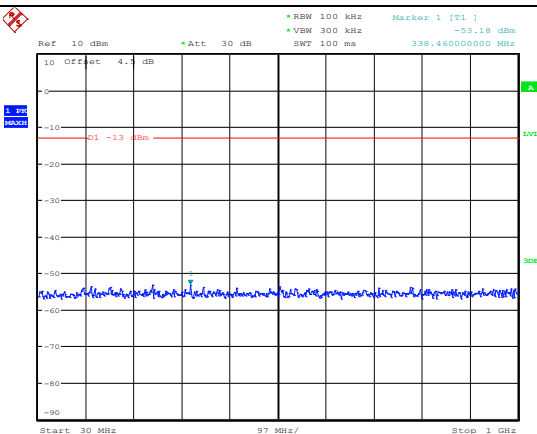Highest



Date: 22.FEB.2023 19:05:28

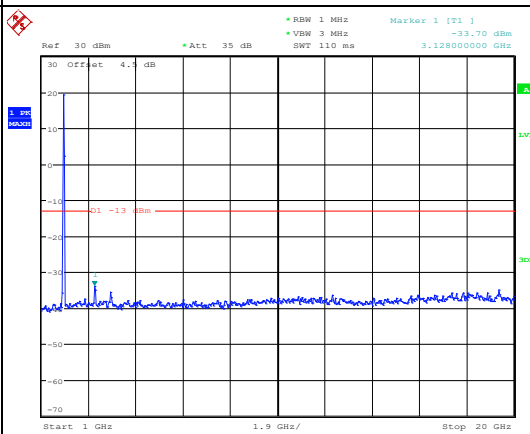


Date: 22.FEB.2023 19:05:42

## Spurious Emissions at Antenna Terminal

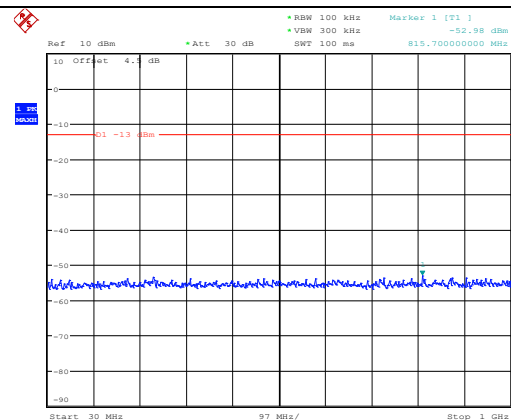
Channel

20MHz Bandwidth QPSK

Lowest




Date: 22.FEB.2023 19:06:05

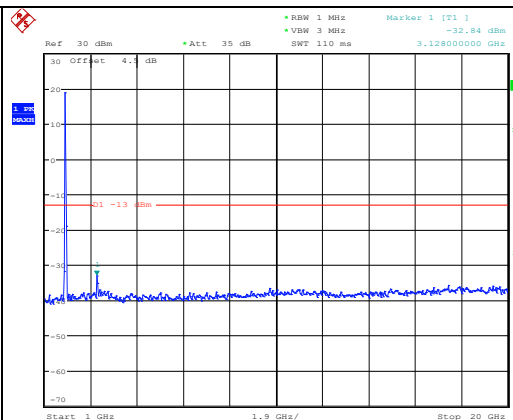


Date: 22.FEB.2023 19:06:19

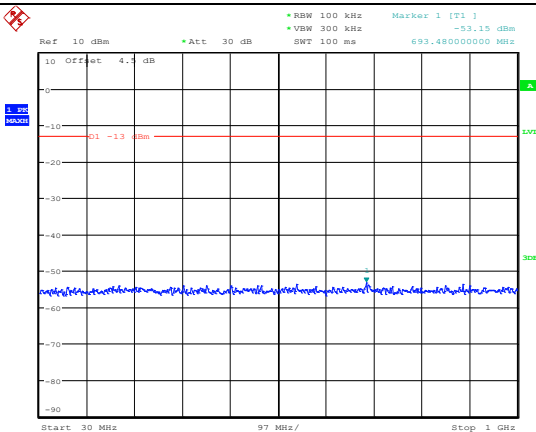Middle




Date: 22.FEB.2023 19:06:41

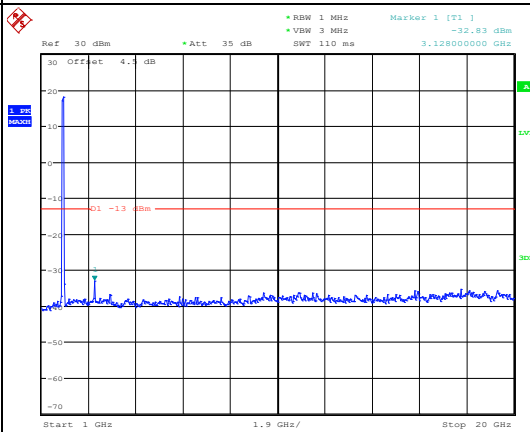


Date: 22.FEB.2023 19:06:54

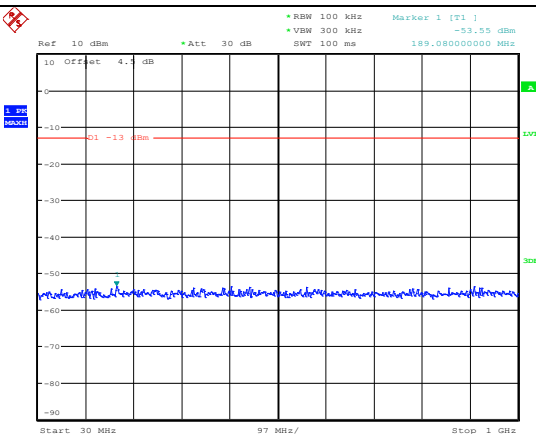Highest









Date: 22.FEB.2023 19:07:11






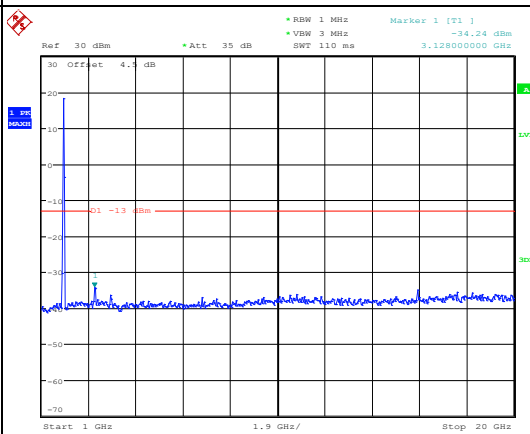


Date: 22.FEB.2023 19:07:24







## Out of band emission, Band Edge

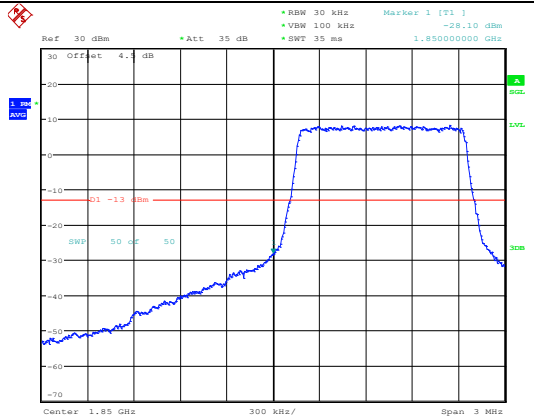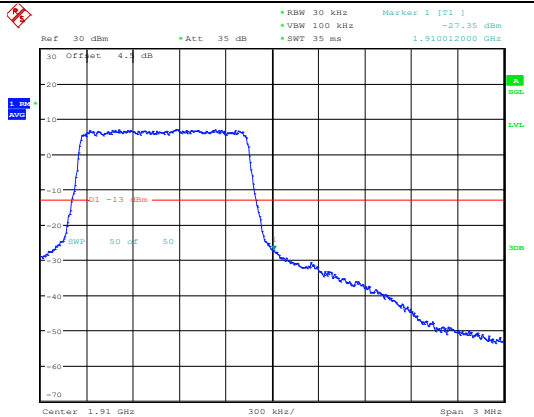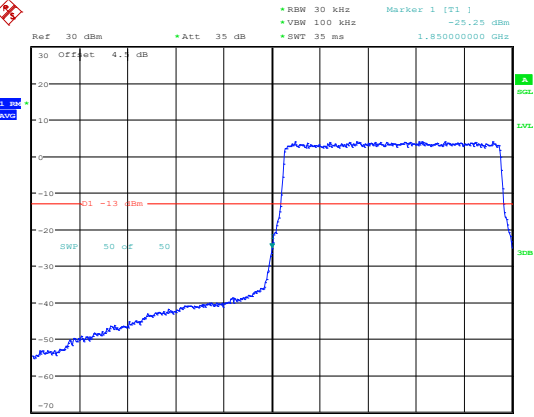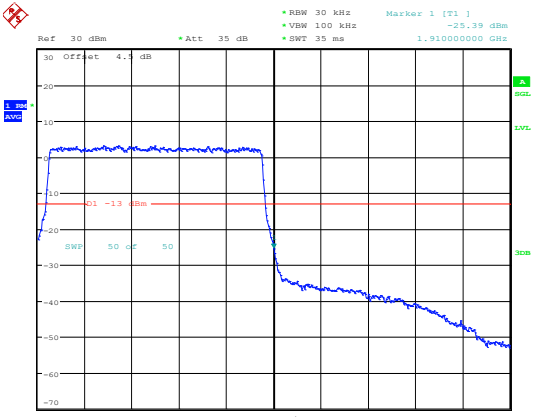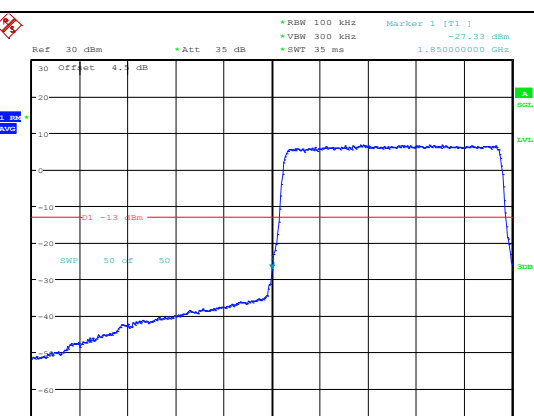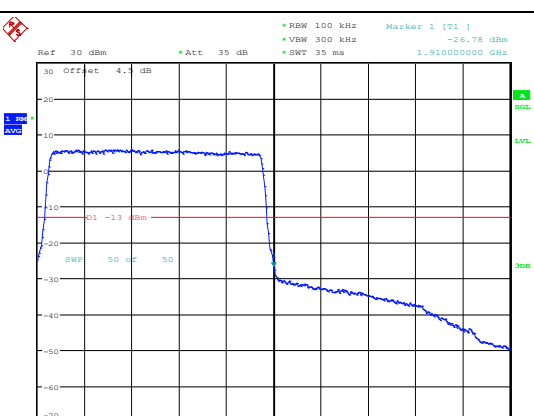Mode	Lowest	Highest
QPSK 1.4MHz	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 100 kHz *SWT: 35 ms Marker 1 [T1]: -25.10 dBm 1.850000000 GHz</p> <p>30 Offset 4.1 dB</p> <p>30 dBm</p> <p>10 dBm</p> <p>0 dBm</p> <p>-10 dBm</p> <p>-20 dBm</p> <p>-30 dBm</p> <p>-40 dBm</p> <p>-50 dBm</p> <p>-60 dBm</p> <p>-70 dBm</p> <p>Center: 1.85 GHz 300 kHz/ Span: 3 MHz</p> <p>Date: 22.FEB.2023 18:45:25</p>	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 100 kHz *SWT: 35 ms Marker 1 [T1]: -27.35 dBm 1.910012000 GHz</p> <p>30 Offset 4.1 dB</p> <p>30 dBm</p> <p>10 dBm</p> <p>0 dBm</p> <p>-10 dBm</p> <p>-20 dBm</p> <p>-30 dBm</p> <p>-40 dBm</p> <p>-50 dBm</p> <p>-60 dBm</p> <p>-70 dBm</p> <p>Center: 1.91 GHz 300 kHz/ Span: 3 MHz</p> <p>Date: 22.FEB.2023 18:45:46</p>
QPSK 3MHz	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 100 kHz *SWT: 35 ms Marker 1 [T1]: -25.25 dBm 1.850000000 GHz</p> <p>30 Offset 4.1 dB</p> <p>30 dBm</p> <p>10 dBm</p> <p>0 dBm</p> <p>-10 dBm</p> <p>-20 dBm</p> <p>-30 dBm</p> <p>-40 dBm</p> <p>-50 dBm</p> <p>-60 dBm</p> <p>-70 dBm</p> <p>Center: 1.85 GHz 600 kHz/ Span: 6 MHz</p> <p>Date: 22.FEB.2023 18:46:11</p>	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 100 kHz *SWT: 35 ms Marker 1 [T1]: -25.39 dBm 1.910012000 GHz</p> <p>30 Offset 4.1 dB</p> <p>30 dBm</p> <p>10 dBm</p> <p>0 dBm</p> <p>-10 dBm</p> <p>-20 dBm</p> <p>-30 dBm</p> <p>-40 dBm</p> <p>-50 dBm</p> <p>-60 dBm</p> <p>-70 dBm</p> <p>Center: 1.91 GHz 600 kHz/ Span: 6 MHz</p> <p>Date: 22.FEB.2023 18:46:33</p>
QPSK 5MHz	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 100 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1]: -27.33 dBm 1.850000000 GHz</p> <p>30 Offset 4.1 dB</p> <p>30 dBm</p> <p>10 dBm</p> <p>0 dBm</p> <p>-10 dBm</p> <p>-20 dBm</p> <p>-30 dBm</p> <p>-40 dBm</p> <p>-50 dBm</p> <p>-60 dBm</p> <p>-70 dBm</p> <p>Center: 1.85 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 22.FEB.2023 18:46:57</p>	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 100 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1]: -26.78 dBm 1.910012000 GHz</p> <p>30 Offset 4.1 dB</p> <p>30 dBm</p> <p>10 dBm</p> <p>0 dBm</p> <p>-10 dBm</p> <p>-20 dBm</p> <p>-30 dBm</p> <p>-40 dBm</p> <p>-50 dBm</p> <p>-60 dBm</p> <p>-70 dBm</p> <p>Center: 1.91 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 22.FEB.2023 18:47:21</p>







## Out of band emission, Band Edge

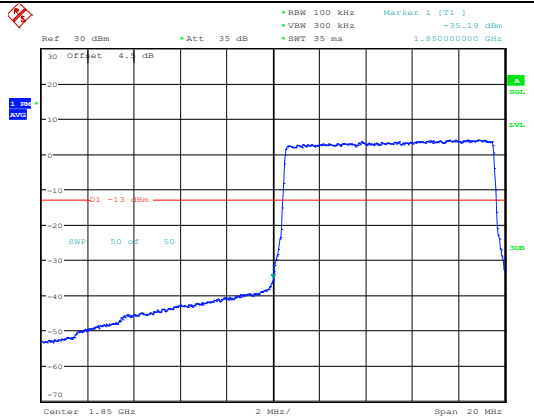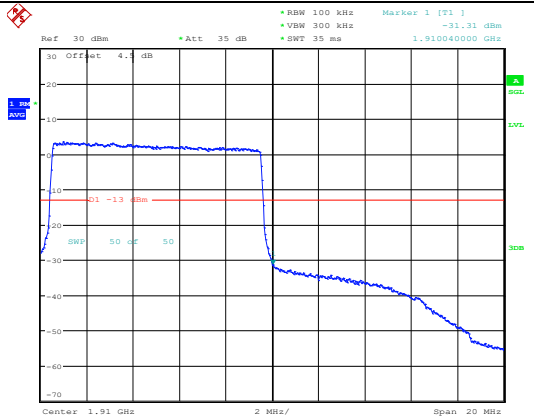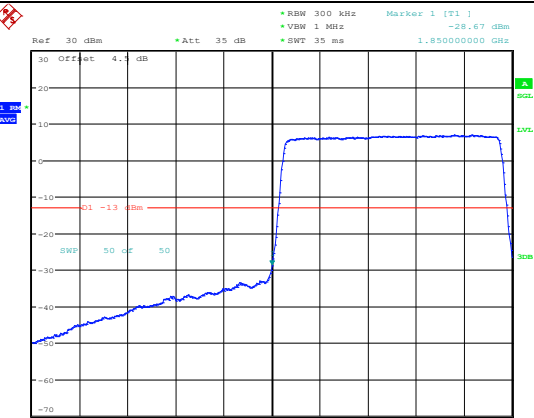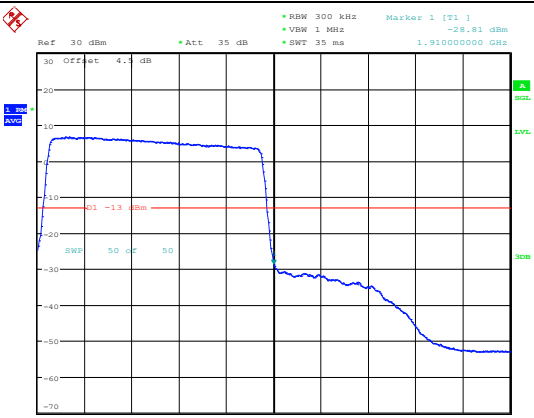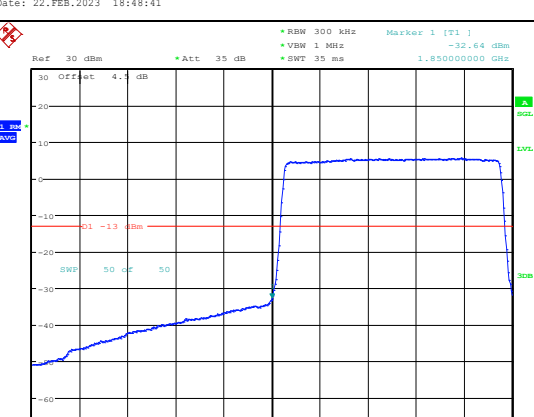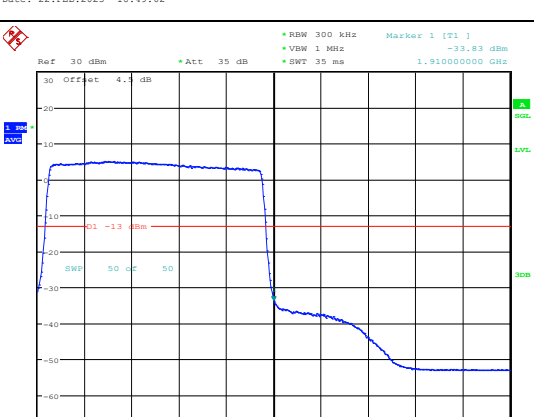Mode	Lowest	Highest
QPSK 10MHz	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 100 kHz VBW: 300 kHz SWT: 35 ms Marker 1 [T1]: -35.19 dBm 1.850000000 GHz</p> <p>Center: 1.85 GHz 2 MHz/ Span: 20 MHz</p> <p>Date: 22.FEB.2023 18:47:49</p>	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 100 kHz VBW: 300 kHz SWT: 35 ms Marker 1 [T1]: -31.31 dBm 1.910040000 GHz</p> <p>Center: 1.91 GHz 2 MHz/ Span: 20 MHz</p> <p>Date: 22.FEB.2023 18:48:14</p>
QPSK 15MHz	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 300 kHz VBW: 1 MHz SWT: 35 ms Marker 1 [T1]: -28.67 dBm 1.850000000 GHz</p> <p>Center: 1.85 GHz 3 MHz/ Span: 30 MHz</p> <p>Date: 22.FEB.2023 18:48:41</p>	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 300 kHz VBW: 1 MHz SWT: 35 ms Marker 1 [T1]: -25.81 dBm 1.910040000 GHz</p> <p>Center: 1.91 GHz 3 MHz/ Span: 30 MHz</p> <p>Date: 22.FEB.2023 18:49:02</p>
QPSK 20MHz	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 300 kHz VBW: 1 MHz SWT: 35 ms Marker 1 [T1]: -32.64 dBm 1.850000000 GHz</p> <p>Center: 1.85 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 22.FEB.2023 18:49:27</p>	 <p>Ref: 30 dBm Offset: 4.1 dB Att: 35 dB RBW: 300 kHz VBW: 1 MHz SWT: 35 ms Marker 1 [T1]: -33.83 dBm 1.910040000 GHz</p> <p>Center: 1.91 GHz 4 MHz/ Span: 40 MHz</p> <p>Date: 22.FEB.2023 18:49:48</p>

## Out of band emission, Band Edge

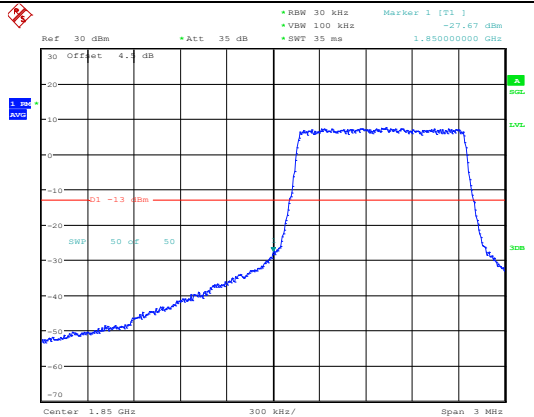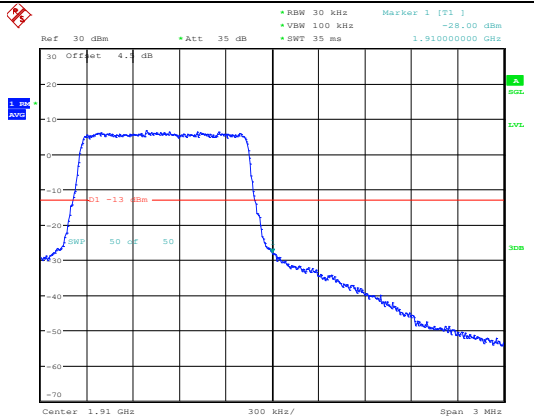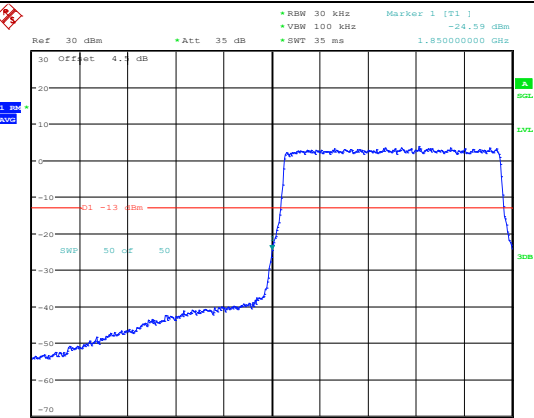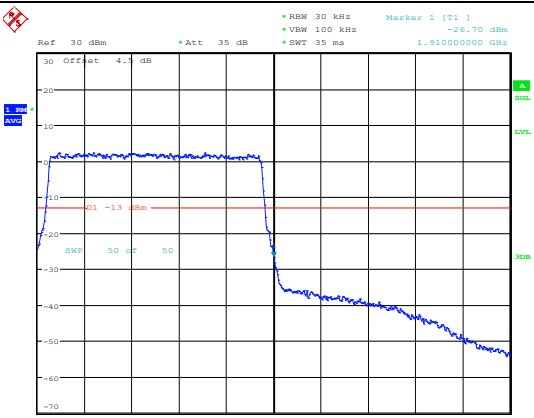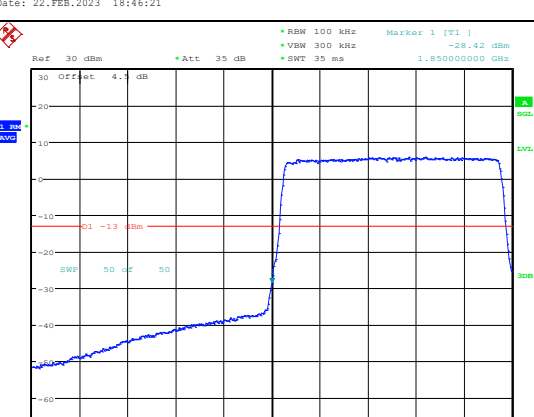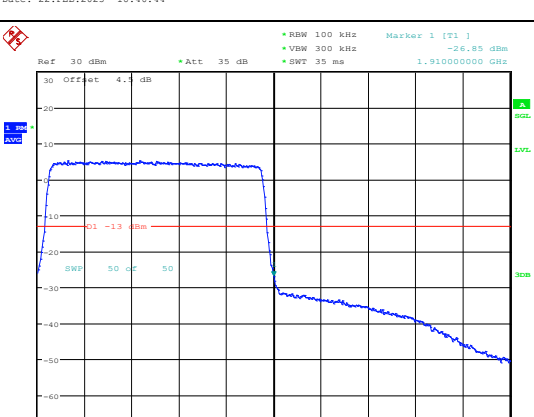Mode	Lowest	Highest
16QAM 1.4MHz	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 100 kHz *SWT: 35 ms Marker 1 [T1]: -27.67 dBm 1.850000000 GHz</p> <p>Center: 1.85 GHz 300 kHz/ Span: 3 MHz</p> <p>Date: 22.FEB.2023 18:45:35</p>	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 100 kHz *SWT: 35 ms Marker 1 [T1]: -28.00 dBm 1.910000000 GHz</p> <p>Center: 1.91 GHz 300 kHz/ Span: 3 MHz</p> <p>Date: 22.FEB.2023 18:45:57</p>
16QAM 3MHz	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 100 kHz *SWT: 35 ms Marker 1 [T1]: -24.59 dBm 1.850000000 GHz</p> <p>Center: 1.85 GHz 600 kHz/ Span: 6 MHz</p> <p>Date: 22.FEB.2023 18:46:21</p>	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 30 kHz *VBW: 100 kHz *SWT: 35 ms Marker 1 [T1]: -26.70 dBm 1.910000000 GHz</p> <p>Center: 1.91 GHz 600 kHz/ Span: 6 MHz</p> <p>Date: 22.FEB.2023 18:46:44</p>
16QAM 5MHz	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 100 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1]: -28.42 dBm 1.850000000 GHz</p> <p>Center: 1.85 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 22.FEB.2023 18:47:08</p>	 <p>Ref: 30 dBm *Att: 35 dB *RBW: 100 kHz *VBW: 300 kHz *SWT: 35 ms Marker 1 [T1]: -26.85 dBm 1.910000000 GHz</p> <p>Center: 1.91 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 22.FEB.2023 18:47:34</p>

## Out of band emission, Band Edge

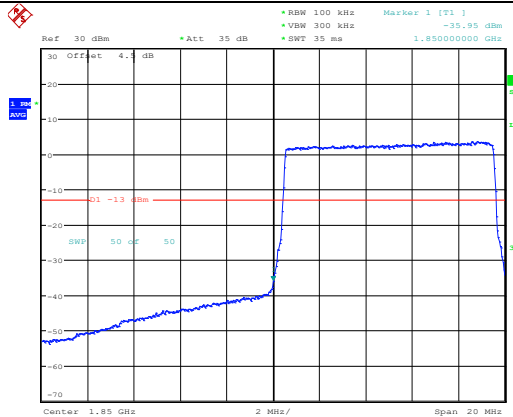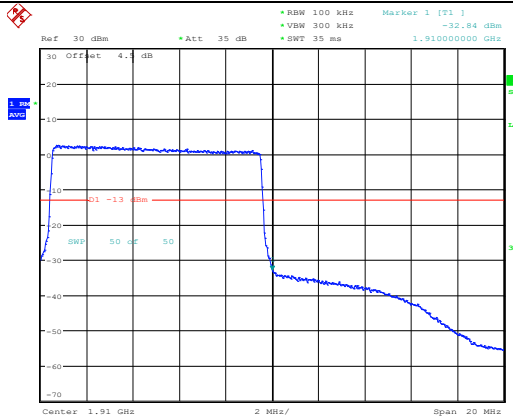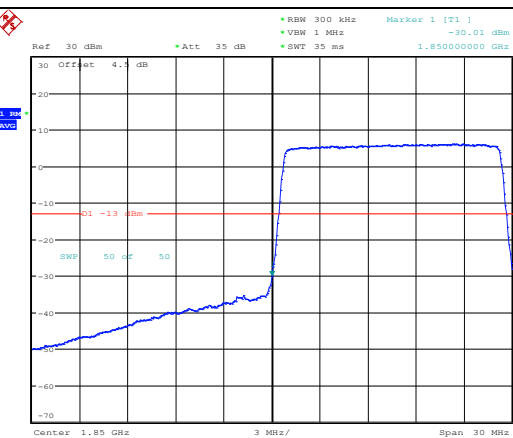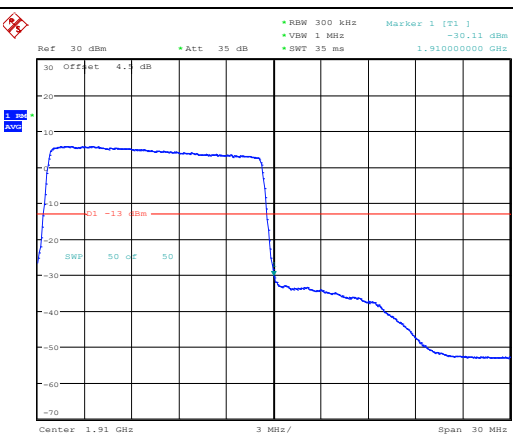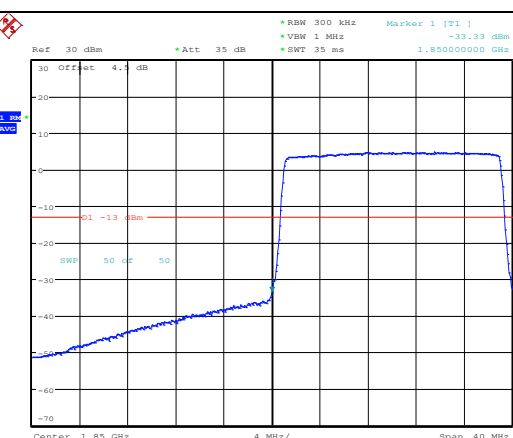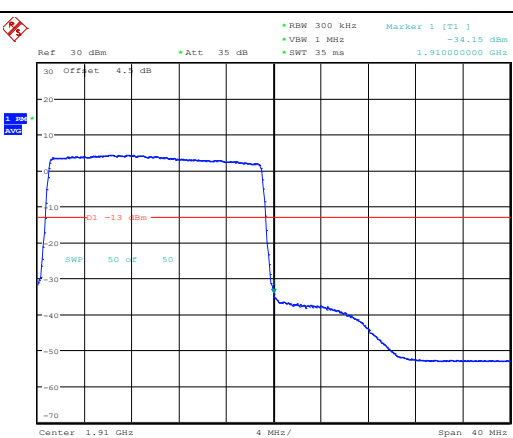Mode	Lowest	Highest
16QAM 10MHz	 <p>Date: 22.FEB.2023 18:48:01</p>	 <p>Date: 22.FEB.2023 18:48:27</p>
16QAM 15MHz	 <p>Date: 22.FEB.2023 18:48:51</p>	 <p>Date: 22.FEB.2023 18:49:13</p>
16QAM 20MHz	 <p>Date: 22.FEB.2023 18:49:37</p>	 <p>Date: 22.FEB.2023 18:49:59</p>



**4.6 Antenna Port Test Data and Results for LTE Band 4**

Serial Number:	1WTO-1	Test Date:	2023/2/22~2023/2/23
Test Site:	RF	Test Mode:	Transmitting
Tester:	Arthur Su	Test Result:	Pass

**Environmental Conditions:**

Temperature: (°C)	25.6-24.5	Relative Humidity: (%)	36-42	ATM Pressure: (kPa)	101.7-101.8
----------------------	-----------	------------------------------	-------	------------------------	-------------

**Test Equipment List and Details:**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	200445	2022/4/5	2023/4/4
R&S	Wideband Radio Communication Tester	CMW500	149218	2022/7/15	2023/7/14
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
YINSAIGE	Coaxial Cable	SS402	SJ0100001	Each time	N/A
Unknown	Coaxial tee connector	Unknown	2204004	Each time	N/A
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30174	2022/4/6	2023/4/5
UNI-T	Multimeter	UT39A+	C210582554	2022/9/29	2023/9/28
ZHAOXIN	DC Power Supply	RXN-6010D	21R6010D0912386	N/A	N/A

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Frequency For Each Mode:**

Operation Bandwidth	Lowest Frequency (MHz)	Middle Frequency (MHz)	Highest Frequency (MHz)
1.4MHz	1710.7	1732.5	1754.3
3MHz	1711.5	1732.5	1753.5
5MHz	1712.5	1732.5	1752.5
10MHz	1715	1732.5	1750
15MHz	1717.5	1732.5	1747.5
20MHz	1720	1732.5	1745

**Test Data:****FCC §2.1046; § 27.50(d)(4)****RF Output Power:**

Test Bandwidth & Modulation	Resource Block & RB offset	Conducted Average Output Power(dBm)			Maximum EIRP (dBm)	EIRP Limit (dBm)
		Lowest Channel	Middle Channel	Highest Channel		
1.4MHz QPSK	RB1#0	20.86	21.34	21.38	20.97	30
	RB1#3	20.82	21.22	21.22		
	RB1#5	20.85	21.3	21.35		
	RB3#0	20.93	21.29	21.34		
	RB3#3	20.94	21.28	21.29		
	RB6#0	20.41	20.73	20.79		
1.4MHz 16QAM	RB1#0	21.14	20.24	21.83	21.43	30
	RB1#3	21.15	20.24	21.84		
	RB1#5	21.18	20.24	21.75		
	RB3#0	20.26	20.85	20.97		
	RB3#3	20.3	20.82	21.05		
	RB6#0	19.57	19.96	19.97		
3MHz QPSK	RB1#0	20.86	21.14	20.76	20.8	30
	RB1#8	20.89	21.21	20.75		
	RB1#14	20.93	21.11	20.82		
	RB6#0	20.4	20.91	20.33		
	RB6#9	20.47	20.85	20.36		
	RB15#0	20.36	20.8	20.42		
3MHz 16QAM	RB1#0	21.31	20.58	20.58	20.9	30
	RB1#8	21.22	20.66	20.56		
	RB1#14	21.18	20.62	20.52		
	RB6#0	19.54	20.09	19.46		
	RB6#9	19.55	20.13	19.42		
	RB15#0	19.47	20.02	19.51		
5MHz QPSK	RB1#0	21.36	21.22	20.81	21	30
	RB1#13	21.33	21.23	20.75		
	RB1#24	21.41	21.28	20.79		
	RB15#0	20.76	20.79	20.29		
	RB15#10	20.83	20.72	20.31		
	RB25#0	20.76	20.71	20.3		
5MHz 16QAM	RB1#0	21	20.57	19.63	20.63	30
	RB1#13	21	20.54	19.59		
	RB1#24	21.04	20.53	19.59		
	RB15#0	19.86	19.98	19.47		
	RB15#10	19.81	19.94	19.45		
	RB25#0	19.89	19.82	19.53		

10MHz QPSK	RB1#0	20.99	20.43	20.8	20.58	30
	RB1#25	20.99	20.36	20.86		
	RB1#49	20.98	20.34	20.88		
	RB25#0	20.39	19.9	20.36		
	RB25#25	20.29	19.87	20.43		
	RB50#0	20.28	19.81	20.4		
10MHz 16QAM	RB1#0	20.63	19.4	20.75	20.39	30
	RB1#25	20.59	19.35	20.75		
	RB1#49	20.61	19.38	20.8		
	RB25#0	19.65	19.15	19.58		
	RB25#25	19.63	19.16	19.5		
	RB50#0	19.58	19.03	19.55		
15MHz QPSK	RB1#0	20.91	20.63	21.25	20.86	30
	RB1#38	20.86	20.55	21.27		
	RB1#74	20.91	20.54	21.22		
	RB36#0	20.34	20.28	20.8		
	RB36#39	20.36	20.12	20.85		
	RB75#0	20.28	20.21	20.71		
15MHz 16QAM	RB1#0	20.46	20.64	21.17	20.78	30
	RB1#38	20.49	20.58	21.17		
	RB1#74	20.51	20.57	21.19		
	RB36#0	19.52	19.34	20.06		
	RB36#39	19.56	19.32	20.05		
	RB75#0	19.42	19.41	19.93		
20MHz QPSK	RB1#0	20.51	21.16	21.5	21.09	30
	RB1#50	20.57	21.18	21.48		
	RB1#99	20.54	21.17	21.5		
	RB50#0	19.98	20.53	20.71		
	RB50#50	20.23	20.68	20.65		
	RB100#0	20.04	20.59	20.77		
20MHz 16QAM	RB1#0	20.49	21.43	20.17	21.02	30
	RB1#50	20.47	21.37	20.23		
	RB1#99	20.56	21.33	20.21		
	RB50#0	19.39	19.73	19.93		
	RB50#50	19.4	19.7	19.97		
	RB100#0	19.19	19.81	19.89		

Note: EIRP=Conducted Power(dBm) - Lc(dB) + G<sub>T</sub>(dBi)

Result:

Pass

<b>Peak-to-average Ratio(PAR)</b>					
Test Bandwidth & Modulation	Resource Block & RB offset	Peak-to-average Ratio(dB)			Limit (dB)
		Lowest Channel	Middle Channel	Highest Channel	
20MHz QPSK	RB1#0	5.45	5.42	4.94	13
	RB100#0	6.63	6.35	6.57	13
20MHz 16QAM	RB1#0	6.06	6.19	5.8	13
	RB100#0	7.28	7.18	7.28	13
				<b>Result:</b>	<b>Pass</b>

<b>FCC §2.1049, §27.53:Occupied Bandwidth</b>						
Operation Mode	99% Occupied Bandwidth (MHz)			26 dB Occupied Bandwidth (MHz)		
	Low Channel	Middle channel	High Channel	Low Channel	Middle Channel	High Channel
1.4MHz QPSK	1.104	1.11	1.104	1.26	1.254	1.26
1.4MHz 16QAM	1.098	1.104	1.116	1.254	1.254	1.26
3MHz QPSK	2.7	2.7	2.7	3.012	3.012	2.988
3MHz 16QAM	2.7	2.7	2.7	3	3.024	3.012
5MHz QPSK	4.52	4.52	4.54	5.02	5.02	5
5MHz 16QAM	4.54	4.54	4.52	5.02	5.02	4.98
10MHz QPSK	8.96	8.96	9	9.76	9.76	9.76
10MHz 16QAM	9	9	9	9.8	9.76	9.76
15MHz QPSK	13.56	13.56	13.56	15.06	15.12	15.12
15MHz 16QAM	13.56	13.56	13.56	15.06	15.12	15.12
20MHz QPSK	17.92	18	18.08	19.44	19.84	19.68
20MHz 16QAM	17.92	18	18.08	19.68	19.76	19.76
Note: The test plots please refer to the Plots of Occupied Bandwidth						

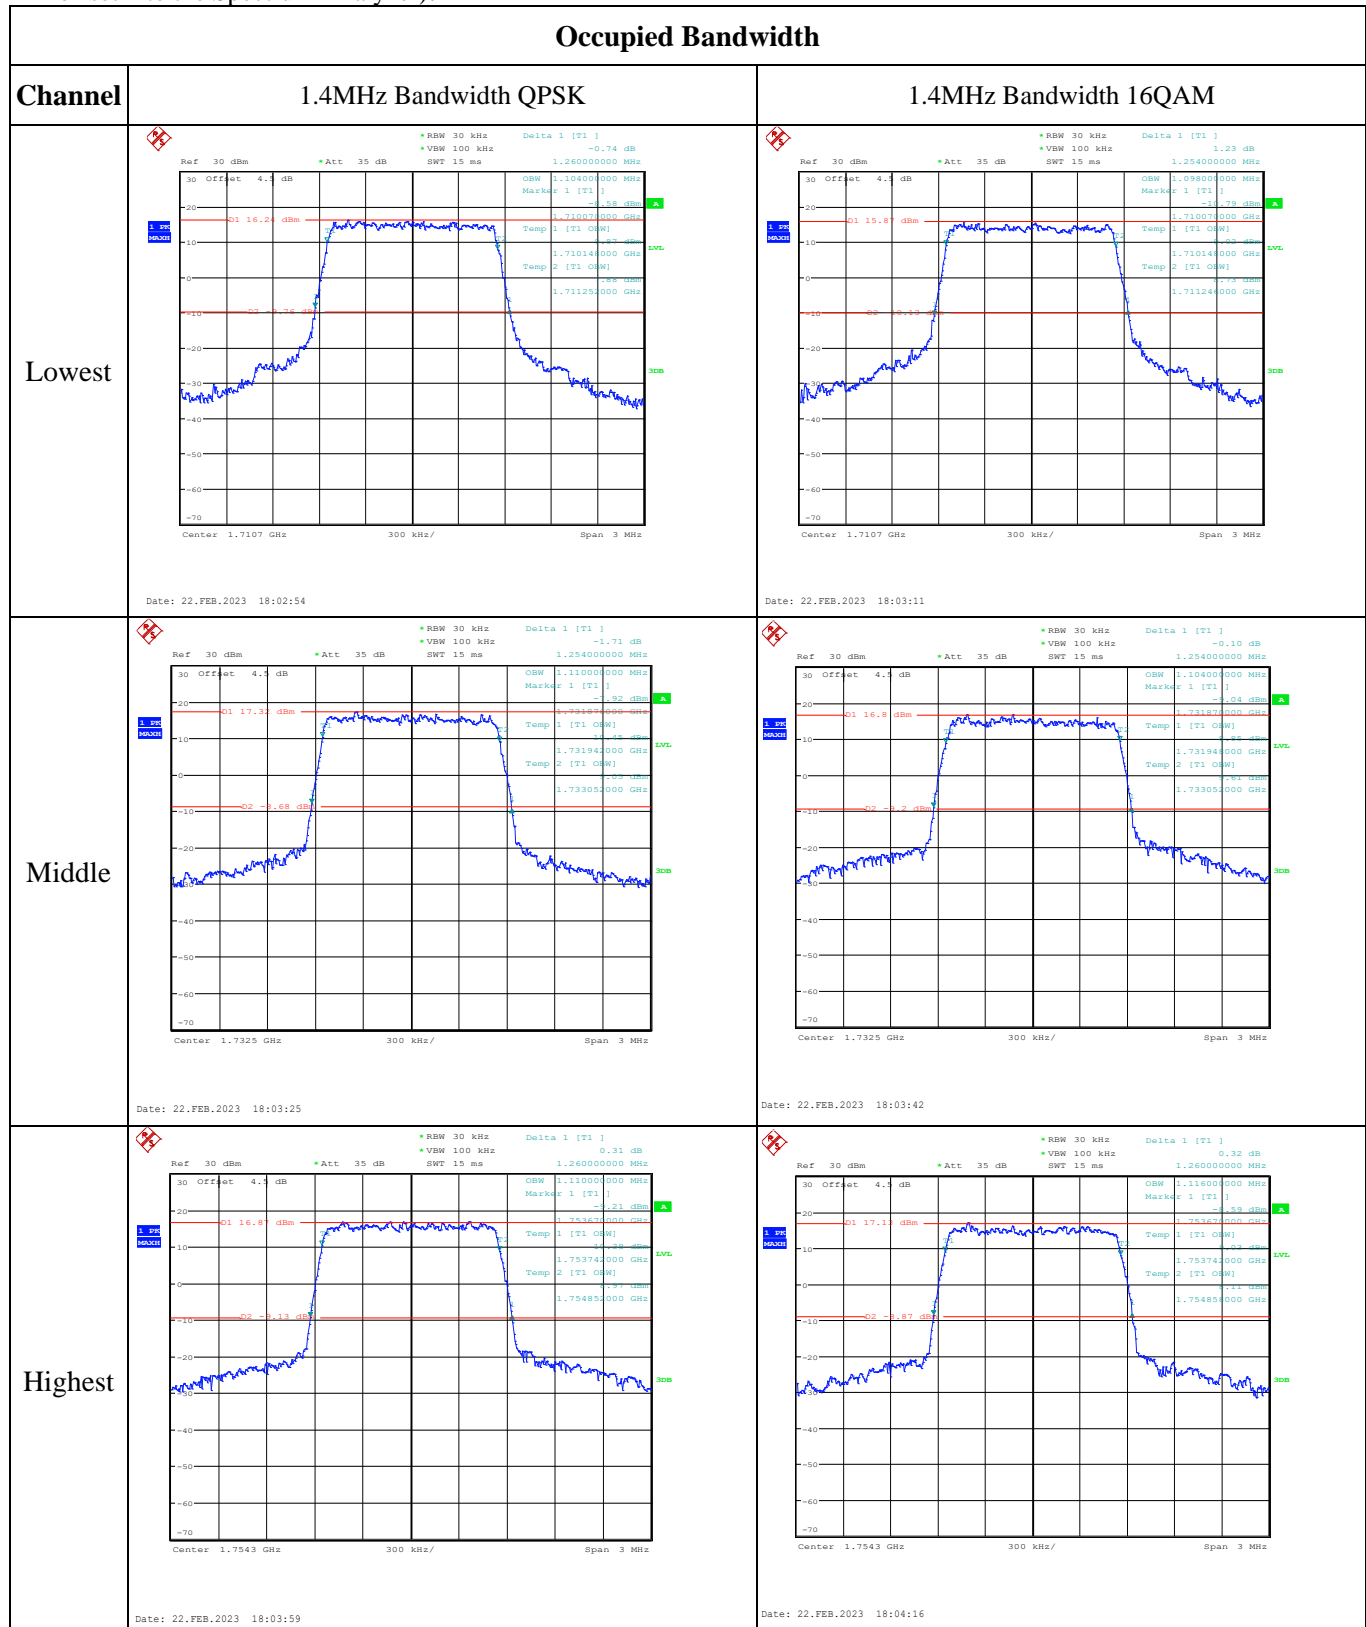
<b>FCC §2.1051, §27.53:Spurious Emissions at Antenna Terminal</b>	
<b>Result:</b>	<b>Pass, Please refer to the test plots of Spurious Emissions at Antenna Terminal.</b>

<b>FCC §2.1051, §27.53:Out of band emission, Band Edge</b>	
<b>Result:</b>	<b>Pass, Please refer to the test plots of Out of band emission, Band Edge.</b>







<b>FCC §2.1055, §27.54: Frequency Stability</b>						
Test Mode:	20M QPSK	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1711.112	1710.00	1754.048	1755
	-20	3.8	1711.114	1710.00	1754.065	1755
	-10	3.8	1711.119	1710.00	1754.045	1755
	0	3.8	1711.096	1710.00	1754.067	1755
	10	3.8	1711.095	1710.00	1754.065	1755
	20	3.8	1711.120	1710.00	1754.040	1755
	30	3.8	1711.108	1710.00	1754.047	1755
	40	3.8	1711.092	1710.00	1754.066	1755
	50	3.8	1711.103	1710.00	1754.043	1755
Frequency Stability vs. Voltage	20	3.6	1711.110	1710.00	1754.067	1755
	20	4.35	1711.108	1710.00	1754.059	1755
					<b>Result:</b>	<b>Pass</b>

Test Mode:	20M 16QAM	Test Channel: Lowest for Lower Edge,Highest for Upper Edge				
Test Item	Temperature (°C)	Voltage (V <sub>DC</sub> )	Lower Edge (MHz)		Upper Edge (MHz)	
			Result	Limit	Result	Limit
Frequency Stability vs. Temperature	-30	3.8	1711.119	1710.00	1754.126	1755
	-20	3.8	1711.096	1710.00	1754.129	1755
	-10	3.8	1711.103	1710.00	1754.123	1755
	0	3.8	1711.111	1710.00	1754.133	1755
	10	3.8	1711.110	1710.00	1754.127	1755
	20	3.8	1711.120	1710.00	1754.120	1755
	30	3.8	1711.106	1710.00	1754.148	1755
	40	3.8	1711.097	1710.00	1754.130	1755
	50	3.8	1711.102	1710.00	1754.140	1755
Frequency Stability vs. Voltage	20	3.6	1711.109	1710.00	1754.129	1755
	20	4.35	1711.096	1710.00	1754.125	1755
					<b>Result:</b>	<b>Pass</b>

**Test Plots**(Note: The 4.5dB is the Insertion loss of the RF cable, Coaxial tee connector and DC Block, which was offset into the Spectrum Analyzer):



## Occupied Bandwidth

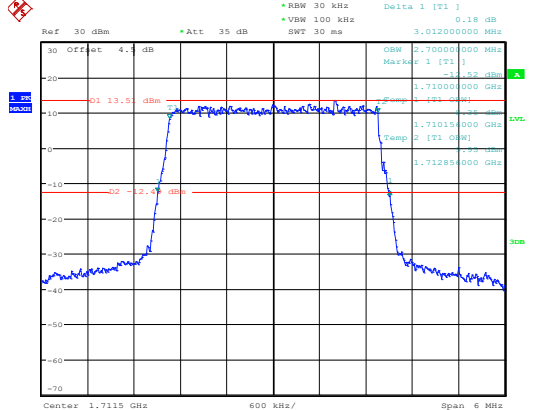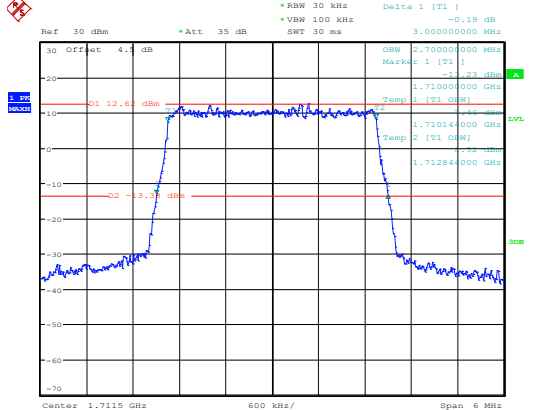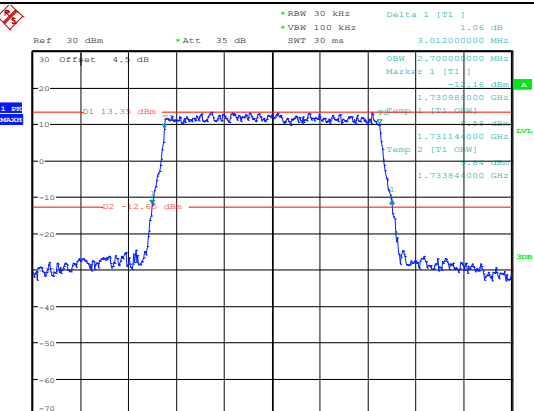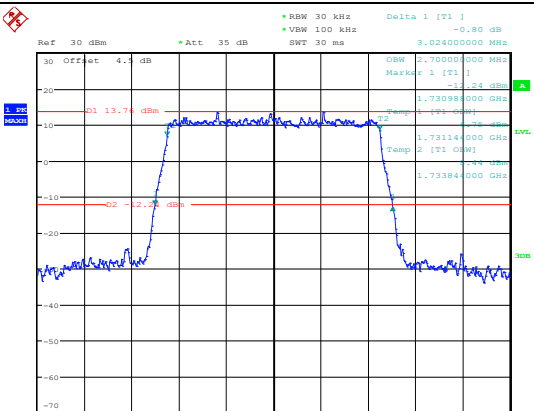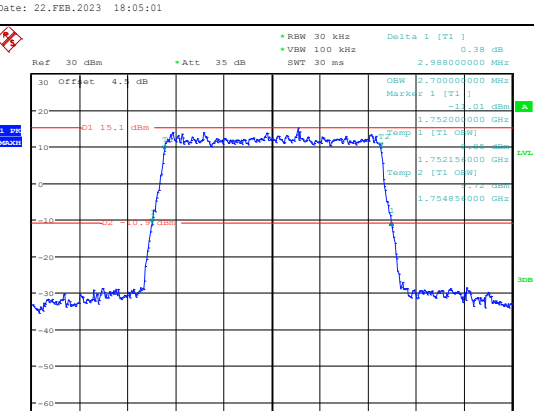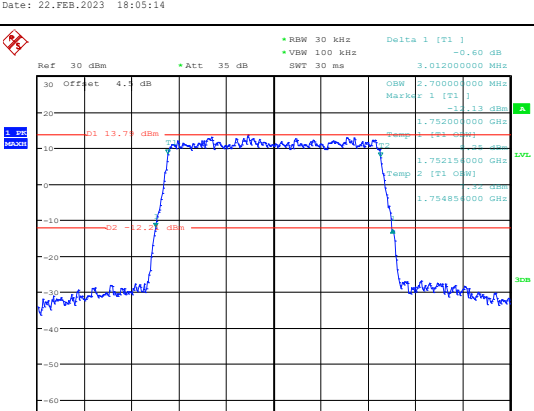Channel	3MHz Bandwidth QPSK	3MHz Bandwidth 16QAM
Lowest	 <p>Ref: 30 dBm, Att: 35 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 30 ms, Delta 1 [T1]: 0.18 dB, Marker 1 [T1]: 1.710000000 MHz, -13.52 dBm, Marker 2 [T1]: 1.712000000 MHz, -13.52 dBm, Temp 1 [T1]: 1.710150000 GHz, Temp 2 [T1]: 1.712000000 GHz, Center: 1.7115 GHz, 600 kHz/, Span: 6 MHz</p> <p>Date: 22.FEB.2023 18:04:33</p>	 <p>Ref: 30 dBm, Att: 35 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 30 ms, Delta 1 [T1]: -0.19 dB, Marker 1 [T1]: 1.710000000 MHz, -12.63 dBm, Marker 2 [T1]: 1.712000000 MHz, -12.63 dBm, Temp 1 [T1]: 1.710140000 GHz, Temp 2 [T1]: 1.712000000 GHz, Center: 1.7115 GHz, 600 kHz/, Span: 6 MHz</p> <p>Date: 22.FEB.2023 18:04:47</p>
Middle	 <p>Ref: 30 dBm, Att: 35 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 30 ms, Delta 1 [T1]: 1.06 dB, Marker 1 [T1]: 1.730980000 MHz, -13.16 dBm, Marker 2 [T1]: 1.733000000 MHz, -13.16 dBm, Temp 1 [T1]: 1.731140000 GHz, Temp 2 [T1]: 1.733000000 GHz, Center: 1.7325 GHz, 600 kHz/, Span: 6 MHz</p> <p>Date: 22.FEB.2023 18:05:01</p>	 <p>Ref: 30 dBm, Att: 35 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 30 ms, Delta 1 [T1]: -0.20 dB, Marker 1 [T1]: 1.730980000 MHz, -13.74 dBm, Marker 2 [T1]: 1.733000000 MHz, -13.74 dBm, Temp 1 [T1]: 1.731140000 GHz, Temp 2 [T1]: 1.733000000 GHz, Center: 1.7325 GHz, 600 kHz/, Span: 6 MHz</p> <p>Date: 22.FEB.2023 18:05:14</p>
Highest	 <p>Ref: 30 dBm, Att: 35 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 30 ms, Delta 1 [T1]: 0.38 dB, Marker 1 [T1]: 1.752000000 MHz, -15.01 dBm, Marker 2 [T1]: 1.754000000 MHz, -15.01 dBm, Temp 1 [T1]: 1.752150000 GHz, Temp 2 [T1]: 1.754000000 GHz, Center: 1.7535 GHz, 600 kHz/, Span: 6 MHz</p> <p>Date: 22.FEB.2023 18:05:29</p>	 <p>Ref: 30 dBm, Att: 35 dB, RBW: 30 kHz, VSW: 100 kHz, SWT: 30 ms, Delta 1 [T1]: -0.60 dB, Marker 1 [T1]: 1.752000000 MHz, -13.73 dBm, Marker 2 [T1]: 1.754000000 MHz, -13.73 dBm, Temp 1 [T1]: 1.752150000 GHz, Temp 2 [T1]: 1.754000000 GHz, Center: 1.7535 GHz, 600 kHz/, Span: 6 MHz</p> <p>Date: 22.FEB.2023 18:05:46</p>



## Occupied Bandwidth
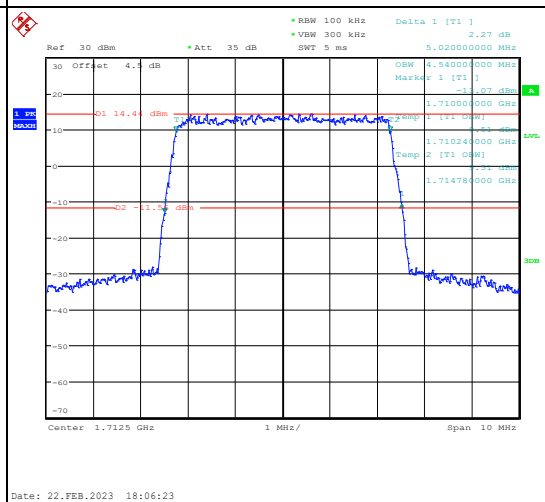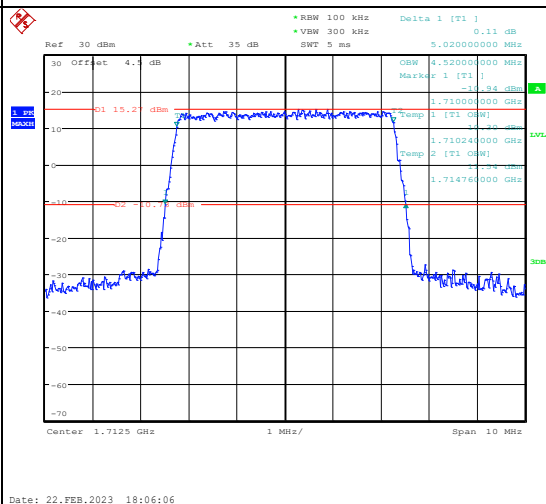
## Channel



## 5MHz Bandwidth QPSK

## 5MHz Bandwidth 16QAM



## Lowest



## Middle





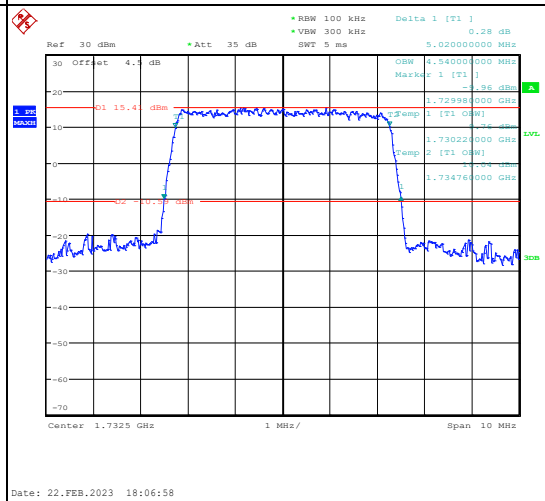
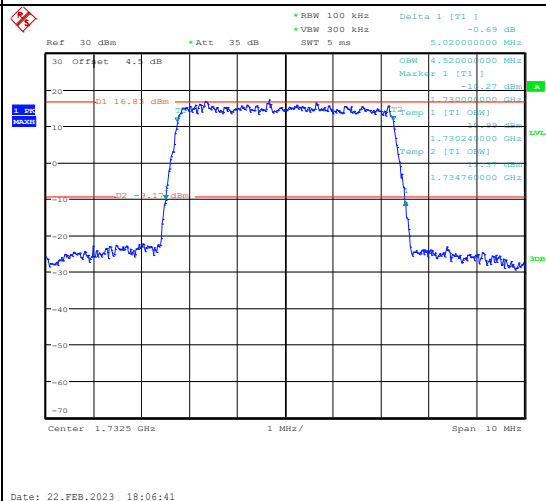


## Highest

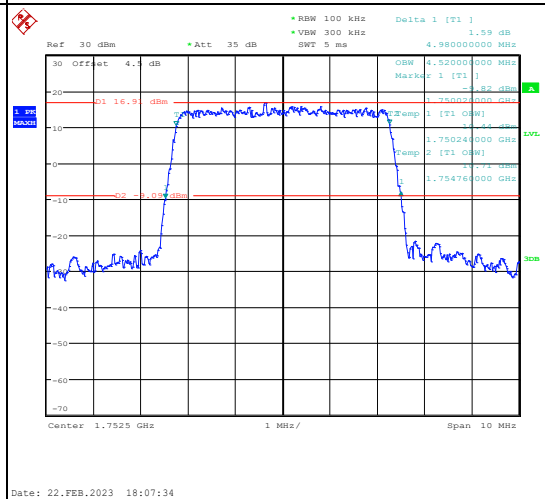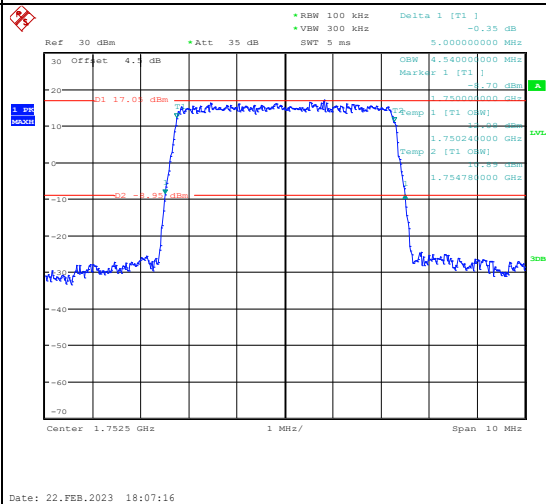



## Occupied Bandwidth

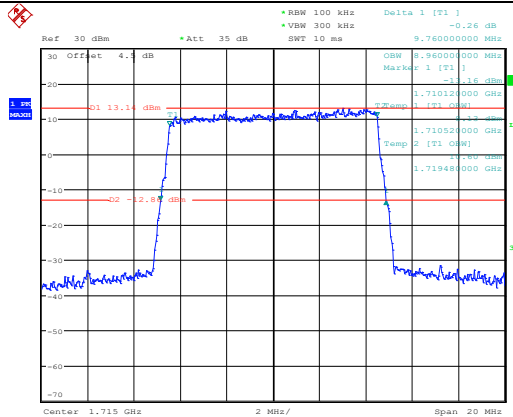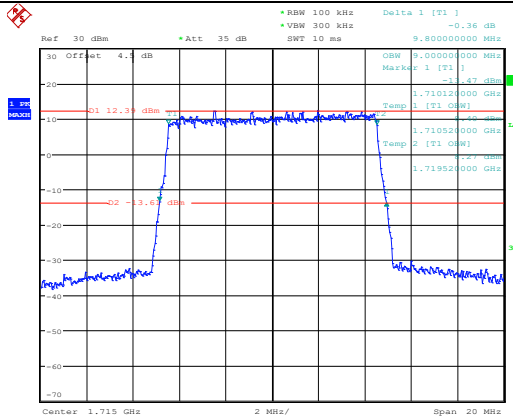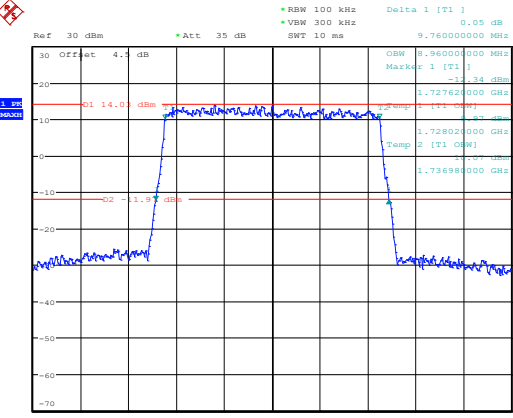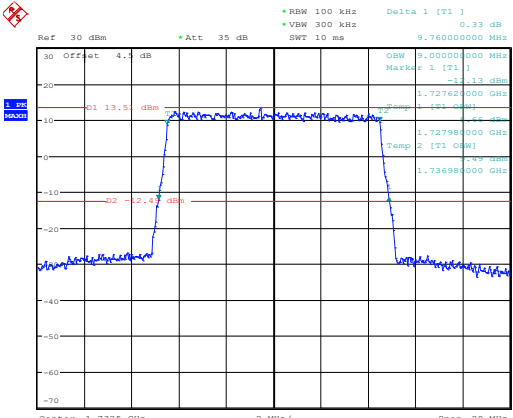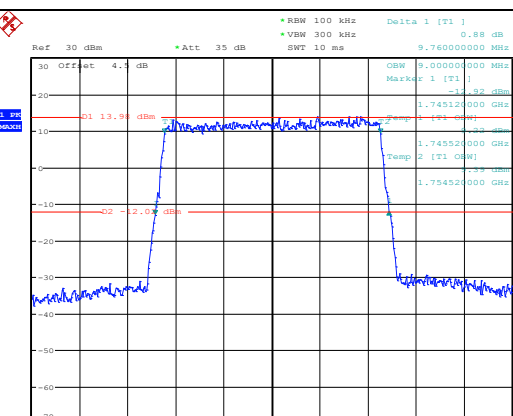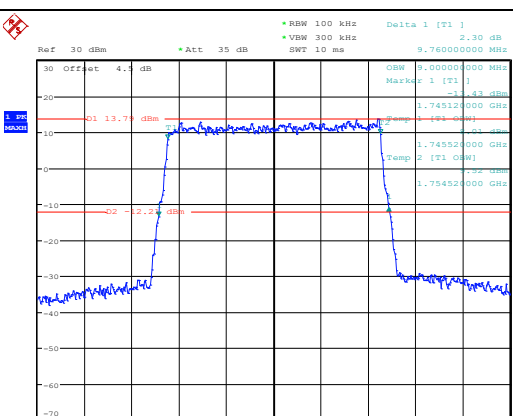Channel	10MHz Bandwidth QPSK	10MHz Bandwidth 16QAM
Lowest	 <p>Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] -0.26 dB VBW 300 kHz SWT 10 ms 9.760000000 MHz OSW 9.960000000 MHz Marker 1 [T1] -13.14 dBm Temp 1 [T1] -13.14 dBm Temp 2 [T1] -13.14 dBm Center 1.715 GHz 2 MHz/ Span 20 MHz</p> <p>Date: 22.FEB.2023 18:07:51</p>	 <p>Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] -0.36 dB VBW 300 kHz SWT 10 ms 9.800000000 MHz OSW 9.900000000 MHz Marker 1 [T1] -12.37 dBm Temp 1 [T1] -12.37 dBm Temp 2 [T1] -12.37 dBm Center 1.715 GHz 2 MHz/ Span 20 MHz</p> <p>Date: 22.FEB.2023 18:08:05</p>
Middle	 <p>Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] 0.05 dB VBW 300 kHz SWT 10 ms 9.760000000 MHz OSW 9.960000000 MHz Marker 1 [T1] -14.01 dBm Temp 1 [T1] -14.01 dBm Temp 2 [T1] -14.01 dBm Center 1.7325 GHz 2 MHz/ Span 20 MHz</p> <p>Date: 22.FEB.2023 18:08:20</p>	 <p>Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] 0.33 dB VBW 300 kHz SWT 10 ms 9.760000000 MHz OSW 9.900000000 MHz Marker 1 [T1] -13.51 dBm Temp 1 [T1] -13.51 dBm Temp 2 [T1] -13.51 dBm Center 1.7325 GHz 2 MHz/ Span 20 MHz</p> <p>Date: 22.FEB.2023 18:08:38</p>
Highest	 <p>Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] 0.88 dB VBW 300 kHz SWT 10 ms 9.760000000 MHz OSW 9.900000000 MHz Marker 1 [T1] -13.91 dBm Temp 1 [T1] -13.91 dBm Temp 2 [T1] -13.91 dBm Center 1.75 GHz 2 MHz/ Span 20 MHz</p> <p>Date: 22.FEB.2023 18:08:53</p>	 <p>Ref 30 dBm *Att 35 dB RBW 100 kHz Delta 1 [T1] 2.30 dB VBW 300 kHz SWT 10 ms 9.760000000 MHz OSW 9.900000000 MHz Marker 1 [T1] -13.71 dBm Temp 1 [T1] -13.71 dBm Temp 2 [T1] -13.71 dBm Center 1.75 GHz 2 MHz/ Span 20 MHz</p> <p>Date: 22.FEB.2023 18:09:10</p>

