



RF MEASUREMENT REPORT

FCC ID: 2BBNT-HE202
Applicant: Heilongjiang Huida Technology Co., Ltd.
Product: Intelligent Battery Charger
Model No.: HE202
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
Result: Complies
Received Date: 2024-04-17
Test Date: 2024-04-19 ~ 2024-04-28

Reviewed By:

Vincent Yu

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2404RSU029-U1	V01	Initial Report	2025-03-20	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
1.7. Antenna Details	7
2. Test Configuration	8
2.1. Test Mode	8
2.2. Test System Connection Diagram	8
2.3. Test Software	9
2.4. Applied Standards	9
2.5. Test Environment Condition	9
3. Antenna Requirements	10
4. Measuring Instrument	11
5. Decision Rules and Measurement Uncertainty	12
5.1. Decision Rules	12
5.2. Measurement Uncertainty	12
6. Test Result	13
6.1. Summary	13
6.2. 6dB Bandwidth Measurement	14
6.2.1. Test Limit	14
6.2.2. Test Procedure	14
6.2.3. Test Setting	14
6.2.4. Test Setup	14
6.2.5. Test Result	14
6.3. Output Power Measurement	15
6.3.1. Test Limit	15
6.3.2. Test Procedure	15
6.3.3. Test Setting	15
6.3.4. Test Setup	15
6.3.5. Test Result	15
6.4. Power Spectral Density Measurement	16
6.4.1. Test Limit	16

6.4.2.	Test Procedure	16
6.4.3.	Test Setting	16
6.4.4.	Test Setup	16
6.4.5.	Test Result	16
6.5.	Conducted Band Edge and Out-of-Band Emissions Measurement	17
6.5.1.	Test Limit	17
6.5.2.	Test Procedure	17
6.5.3.	Test Setting	17
6.5.4.	Test Setup	18
6.5.5.	Test Result	18
6.6.	Radiated Spurious Emission Measurement.....	19
6.6.1.	Test Limit	19
6.6.2.	Test Procedure	19
6.6.3.	Test Setting	19
6.6.4.	Test Setup	21
6.6.5.	Test Result	22
6.7.	Radiated Restricted Band Edge Measurement	23
6.7.1.	Test Limit	23
6.7.2.	Test Procedure	24
6.7.3.	Test Setting	24
6.7.4.	Test Setup	25
6.7.5.	Test Result	25
6.8.	AC Conducted Emissions Measurement	26
6.8.1.	Test Limit	26
6.8.2.	Test Setup	26
6.8.3.	Test Result	26
Appendix A	- Test Result.....	27
A.1	Duty Cycle Test Result	27
A.2	6dB Bandwidth Test Result	28
A.3	Output Power Test Result	31
A.4	Power Spectral Density Test Result.....	32
A.5	Conducted Band Edge and Out-of-Band Emissions Test Result.....	35
A.6	Radiated Spurious Emission Test Result.....	44
A.7	Radiated Restricted Band Edge Test Result.....	50
A.8	AC Conducted Emissions Test Result	88
Appendix B	- Test Setup Photograph	90
Appendix C	- EUT Photograph	91

1. General Information

1.1. Applicant

Heilongjiang Huida Technology Co., Ltd.

Building 1, Science Innovation Headquarters, Shenzhen (Harbin) industrial park, 288 Zhigu Street, Songbei district, Harbin

1.2. Manufacturer

Heilongjiang Huida Technology Co., Ltd.

Building 1, Science Innovation Headquarters, Shenzhen (Harbin) industrial park, 288 Zhigu Street, Songbei district, Harbin

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian’edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001 VCCI: ☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 CNAS: L10551 FCC: CN1284 ISED: CN0105
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	Intelligent Battery Charger
Model No.	HE202
EUT Identification No.	20240417Sample#08 (For Conducted testing) 20240417Sample#06 (For Radiated testing)
Wi-Fi Specification	802.11a/b/g/n/ac
Antenna Specification	Refer to Section 1.7
Operating Temp.	-10 ~ 40°C
Power Type	Input: 110 - 230V ~ 10A Output: 73.3V/30A & 78.6V/110A
Note: The information of EUT was provided by the manufacturer, and the accuracy of the information shall be the responsibility of the manufacturer.	

1.5. Radio Specification under Test

Frequency Range	802.11b/g/n-HT20: 2412 ~ 2462MHz 802.11n-HT40: 2422 ~ 2452MHz
Channel Number	802.11b/g/n-HT20: 11 802.11n-HT40: 7
Type of Modulation	802.11b: DSSS 802.11g/n: OFDM
Data Rate	802.11b: 1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 150Mbps

1.6. Working Frequencies

802.11b/g/n-HT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz	--	--

802.11n-HT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
03	2422 MHz	04	2427 MHz	05	2432 MHz
06	2437 MHz	07	2442 MHz	08	2447 MHz
09	2452 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency Range (MHz)	Antenna Tx Paths	Max Peak Gain (dBi)
Wi-Fi Antenna			
Dipole	2400 ~ 2483.5	1	-0.65
	5150 ~ 5250	1	-0.90
	5725 ~ 5850	1	0.85


2. Test Configuration

2.1. Test Mode

Mode 1: Transmit by 802.11b (1Mbps)
Mode 2: Transmit by 802.11g (6Mbps)
Mode 3: Transmit by 802.11n-HT20 (MCS0)
Mode 4: Transmit by 802.11n-HT40 (MCS0)
Note: All modes of operation and data rates were investigated, so all RF test requirements shall be executed at the worst data rate which power is the greatest.

2.2. Test System Connection Diagram

The device was tested per the guidance ANSI C63.10: 2013 was used to reference the appropriate EUT setup for radiated emissions testing and AC line conducted testing.

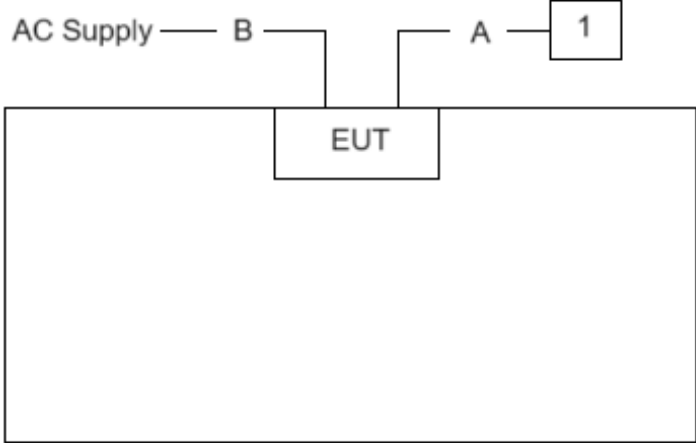Connection Diagram – Radiated Emission testing & AC Conducted Emissions			
			
Cable Type	Cable Description		Length
A	USB Cable	Shielded	1.0m
B	Power Cable	Non shielded	2.0m
Product	Manufacturer		Model No.
1	Notebook	HP	445R G6

2.3. Test Software

The test utility software used during testing was “adb.exe”, and the commands were provided by the manufacturer.

2.4. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.247
- KDB 558074 D01v05r02
- ANSI C63.10-2013

2.5. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. Antenna Requirements

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is **permanently attached**.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2024-12-17	SIP-AC1
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2024-12-21	SIP-AC1
Thermohygrometer	testo	608-H1	MRTSUE06616	1 year	2024-10-28	SIP-AC1
Loop Antenna	Schwarzbeck	FMZB 1519 B	MRTSUE06937	1 year	2025-01-27	SIP-AC1
Cable	HUBER+SUHNER	SF106	MRTSUE06594	1 year	2024-12-20	SIP-AC1
Cable	HUBER+SUHNER	SF106	MRTSUE06874	1 year	2024-12-20	SIP-AC1
Cable	HUBER+SUHNER	SF106	MRTSUE06522	1 year	2024-05-08	SIP-AC2
Cable	HUBER+SUHNER	SF106	MRTSUE06875	1 year	2024-12-20	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06598	1 year	2024-11-04	SIP-AC2
Preamplifier	EMCI	EMC051845SE	MRTSUE06601	1 year	2024-11-02	SIP-AC2
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2024-10-09	SIP-AC2
Signal Analyzer	Keysight	N9010B	MRTSUE06603	1 year	2024-09-27	SIP-AC2
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2024-10-23	SIP-AC2
Thermohygrometer	testo	608-H1	MRTSUE06622	1 year	2024-11-03	SIP-AC2
TRILOG Antenna	Schwarzbeck	VULB 9168	MRTSUE06647	1 year	2024-06-17	SIP-AC2
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06648	1 year	2024-10-21	SIP-AC2
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2024-12-21	SIP-AC2
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2024-05-23	SIP-SR2
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2024-05-23	SIP-SR2
Thermohygrometer	testo	608-H1	MRTSUE06621	1 year	2024-11-03	SIP-SR2
Shielding Room	MIX-BEP	SIP-SR2	MRTSUE06949	5 years	2024-10-23	SIP-SR2
Cable	HUBER+SUHNER	RG 233/U	MRTSUE06872	1 year	2024-12-24	SIP-SR2
Thermohygrometer	testo	608-H1	MRTSUE11022	1 year	2024-10-28	SIP-TR1
USB Power Sensor	Keysight	U2021XA	MRTSUE06596	1 year	2024-07-31	SIP-TR1
Signal Analyzer	Keysight	N9010B	MRTSUE07036	1 year	2025-02-03	SIP-TR1

Software	Version	Function
EMI Software	V3.0.0	EMI Test Software
Controller_MF 7802BS	1.02	RE Antenna & Turntable
Agilent Power Analyzer/Agilent Power Panel	V R03.09.00	Power

5. Decision Rules and Measurement Uncertainty

5.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

5.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
The maximum measurement uncertainty is evaluated as: 9kHz~150kHz: 3.58dB 150kHz~30MHz: 3.20dB
Radiated Emission Measurement
The maximum measurement uncertainty is evaluated as: Coaxial: 9kHz~30MHz: 2.61dB Coplanar: 9kHz~30MHz: 2.62dB Horizontal: 30MHz~200MHz: 3.79dB 200MHz~1GHz: 3.91dB 1GHz~40GHz: 4.99dB Vertical: 30MHz~200MHz: 4.06dB 200MHz~1GHz: 5.21dB 1GHz~40GHz: 4.90dB
Spurious Emissions, Conducted
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2dB
Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 1.4dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.2dB
Occupied Bandwidth
Measuring Uncertainty for a Level of Confidence of 95% ($U=2U_c(y)$): 2.7%

6. Test Result

6.1. Summary

FCC Section(s)	Test Description	Test Condition	Verdict
15.247(a)(2)	6dB Bandwidth	Conducted	Pass
15.247(b)(3)	Output Power		Pass
15.247(e)	Power Spectral Density		Pass
15.247(d)	Band Edge / Out-of-Band Emissions		Pass
15.205 15.209	General Field Strength (Restricted Bands and Radiated Emission)	Radiated	Pass
15.207	AC Conducted Emissions 150kHz - 30MHz	Line Conducted	Pass

Note: The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

6.2. 6dB Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


6.2.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.8

6.2.3. Test Setting

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize.

6.2.4. Test Setup

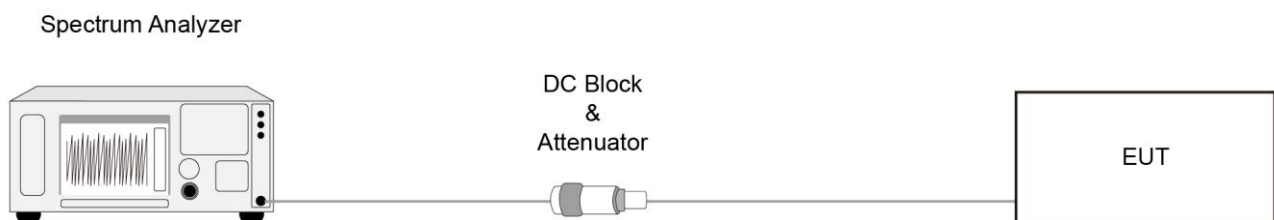

6.2.5. Test Result

Refer to Appendix A.2.

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum output power shall be less 1 Watt (30dBm).

The conducted output power limit specified in paragraph FCC Part 15.247(b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs FCC Part 15.247(b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.3.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.9.1.3

ANSI C63.10 - 2013 - Section 11.9.2.3.2

6.3.3. Test Setting


Method PKPM1 (Peak Power Measurement of Signals with DTS BW $\leq$ 50MHz)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Average Power Measurement

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter.

6.3.4. Test Setup

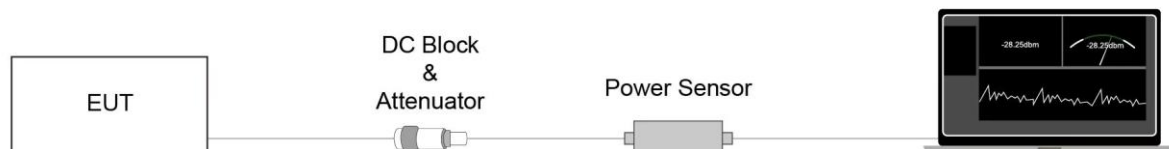

6.3.5. Test Result

Refer to Appendix A.3.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.

The same method of determining the conducted output power shall be used to determine the power spectral density.


6.4.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW = 10kHz
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Trace was allowed to stabilize

6.4.4. Test Setup

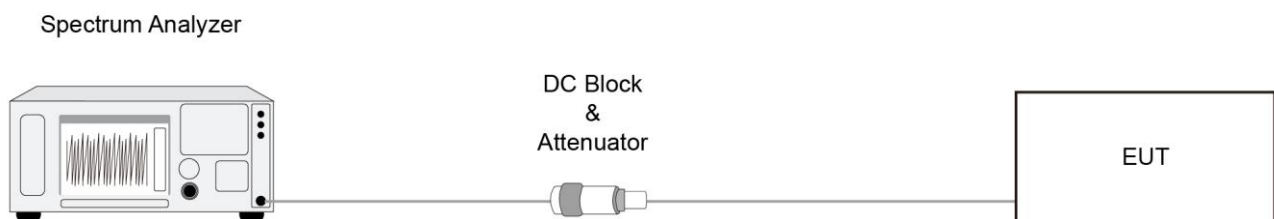

6.4.5. Test Result

Refer to Appendix A.4.

6.5. Conducted Band Edge and Out-of-Band Emissions Measurement

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = peak
6. Sweep time = auto couple
7. Trace mode = max hold
8. Allow trace to fully stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = max hold
6. Sweep time = auto couple
7. The trace was allowed to stabilize

6.5.4. Test Setup

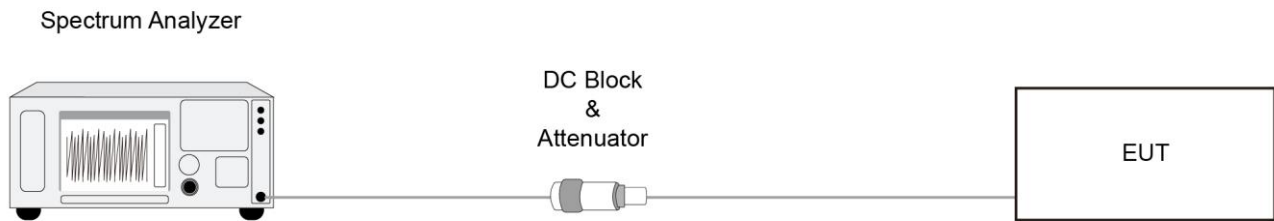

6.5.5. Test Result

Refer to Appendix A.5.

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.6.2. Test Procedure

ANSI C63.10 - 2013 - Section 11.11 & 11.12

ANSI C63.10 - 2013 - Section 6.3 (General Requirements)

ANSI C63.10 - 2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10 - 2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10 - 2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000MHz	1MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; if the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10Hz


If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.
4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = Auto
7. Trace mode = Max hold
8. Trace was allowed to stabilize

6.6.4. Test Setup


Below 30MHz Test Setup:

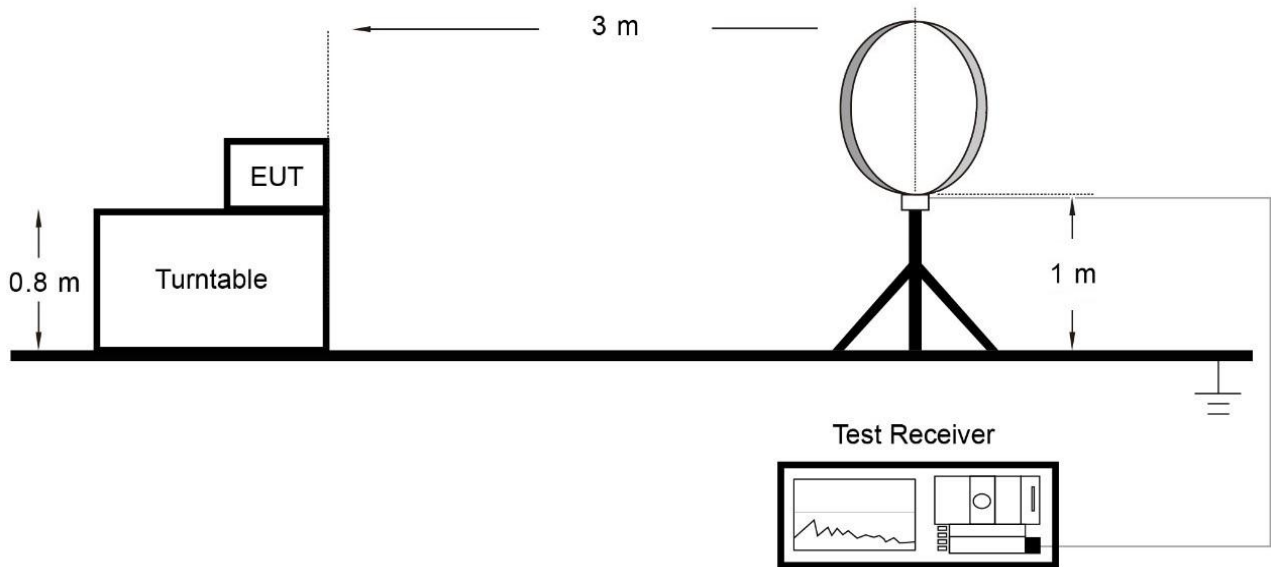

Below 1GHz Test Setup:

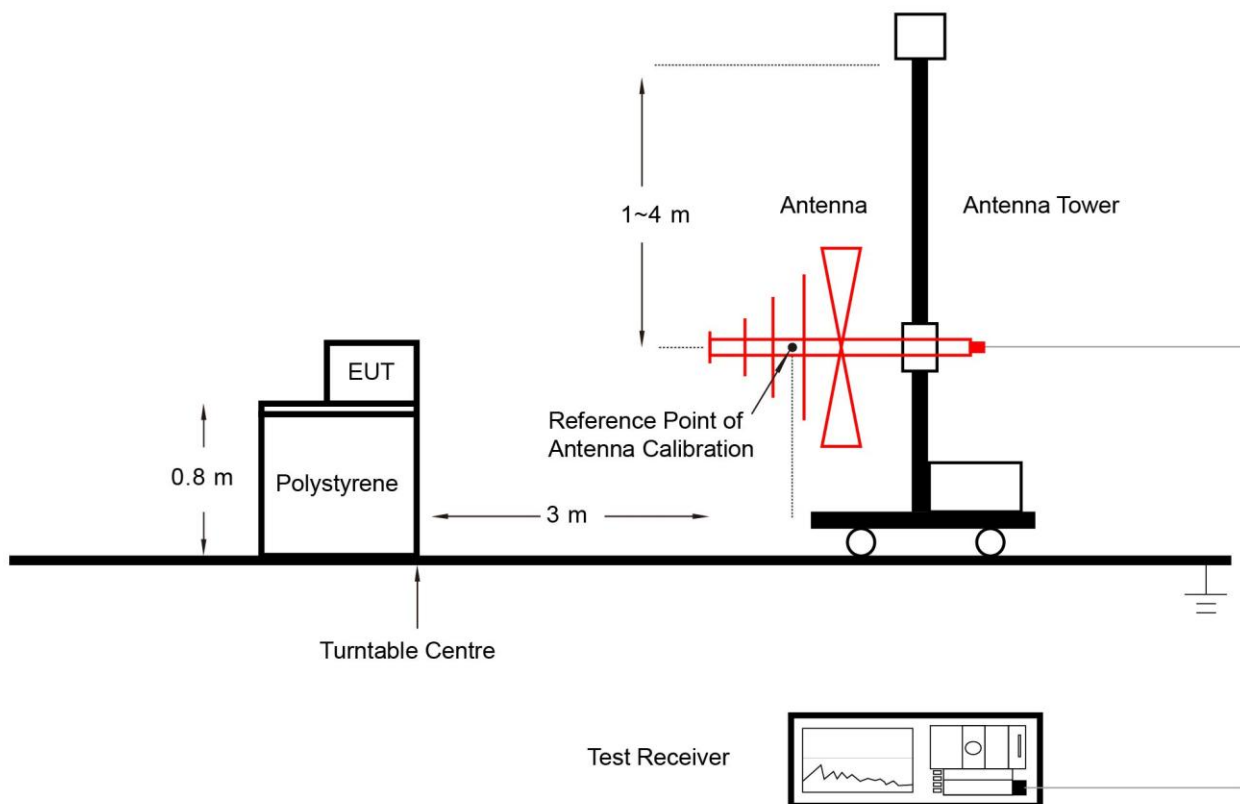

Above 1GHz Test Setup:

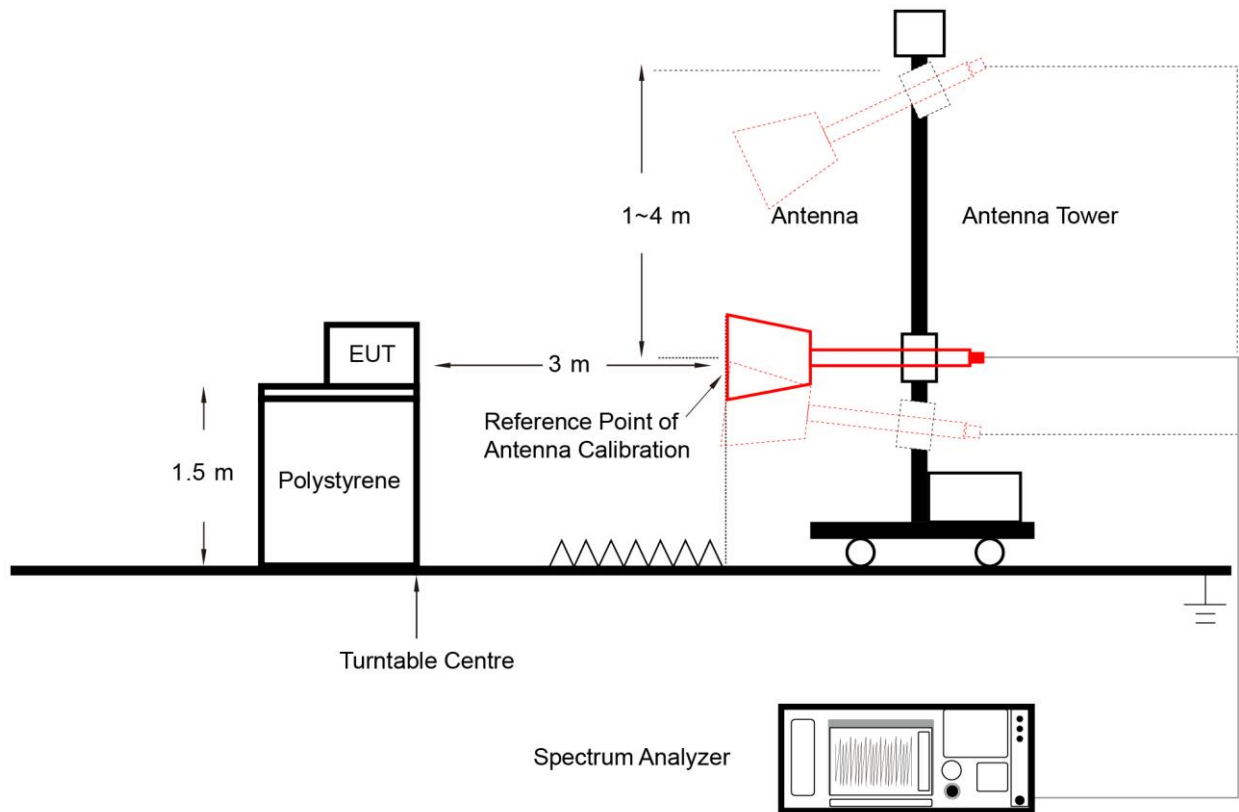

6.6.5. Test Result

Refer to Appendix A.6.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

¹Until February 1, 1999, this restricted band shall be 0.490-0.510MHz.

²Above 38.6

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

6.7.2. Test Procedure

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.

4. As an alternative, the instrument may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some instruments require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode
5. Detector = Peak
6. Sweep time = auto
7. Trace mode = max hold
8. Allow max hold to run for at least 50 times (1/duty cycle) traces

6.7.4. Test Setup

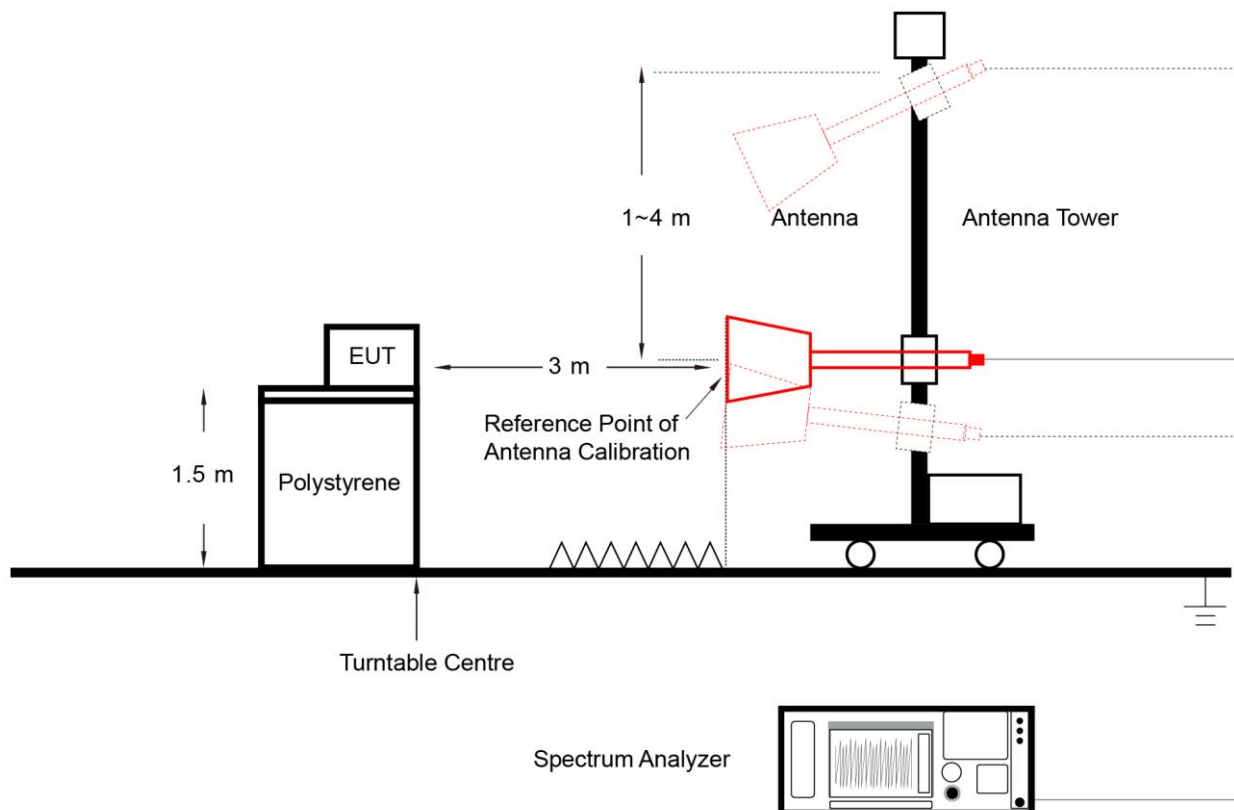

6.7.5. Test Result

Refer to Appendix A.7.

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

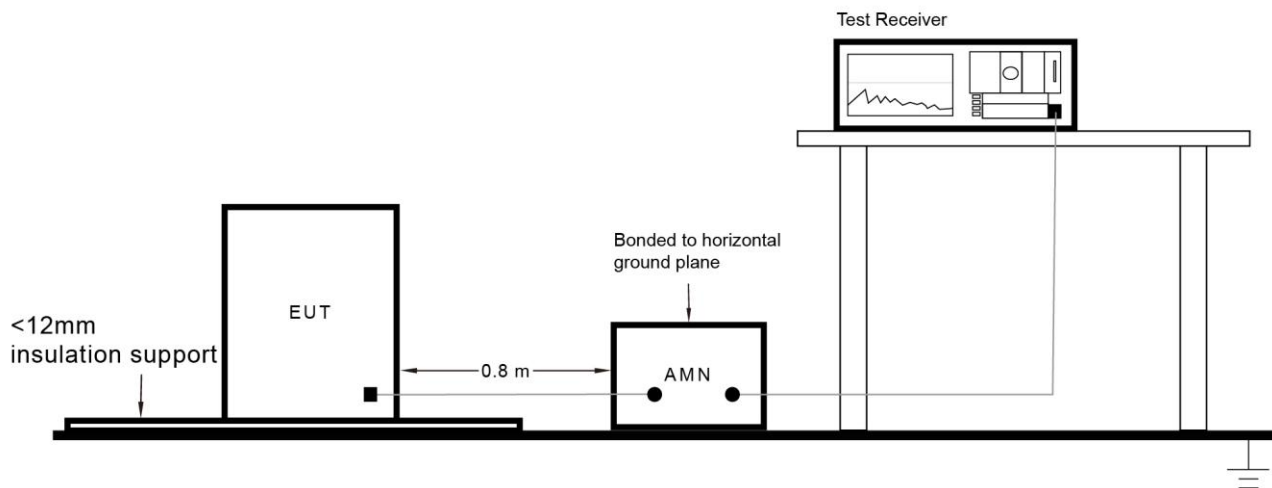

6.8.3. Test Result


Refer to Appendix A.8.

Appendix A – Test Result

A.1 Duty Cycle Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-04-24		

Test Mode	Duty Cycle
802.11b	98.41%
802.11g	92.24%
802.11n-HT20	93.82%
802.11n-HT40	85.56%

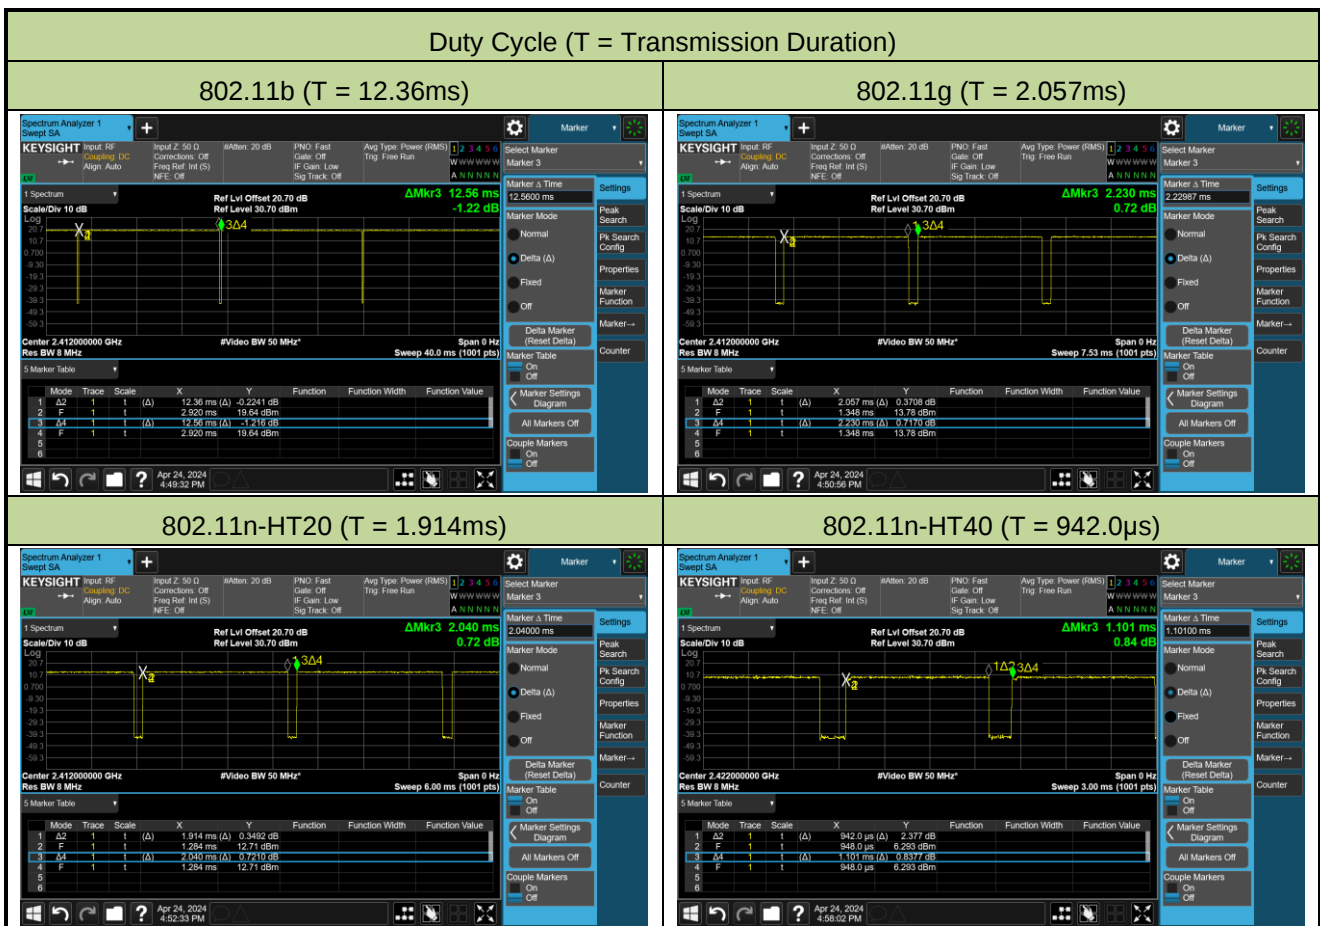


A.2 6dB Bandwidth Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-04-24~2024-04-26		


Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11b	1Mbps	01	2412	10.12	≥ 0.5
11b	1Mbps	06	2437	10.12	≥ 0.5
11b	1Mbps	11	2462	10.12	≥ 0.5
11g	6Mbps	01	2412	16.35	≥ 0.5
11g	6Mbps	06	2437	16.33	≥ 0.5
11g	6Mbps	11	2462	16.33	≥ 0.5
11n-HT20	MCS0	01	2412	17.12	≥ 0.5
11n-HT20	MCS0	06	2437	17.07	≥ 0.5
11n-HT20	MCS0	11	2462	17.03	≥ 0.5
11n-HT40	MCS0	03	2422	35.74	≥ 0.5
11n-HT40	MCS0	06	2437	35.53	≥ 0.5
11n-HT40	MCS0	09	2452	35.67	≥ 0.5

802.11b 6dB Bandwidth


Channel 01 (2412MHz)

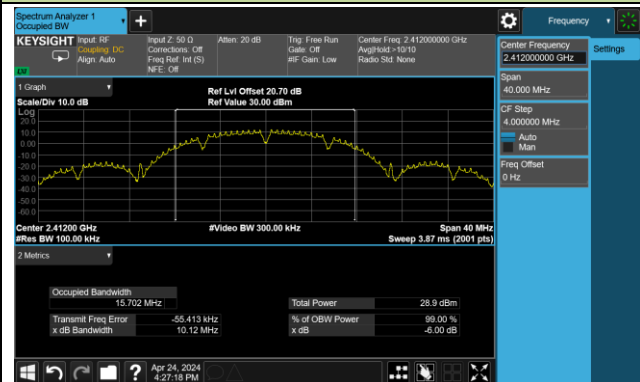

Channel 06 (2437MHz)

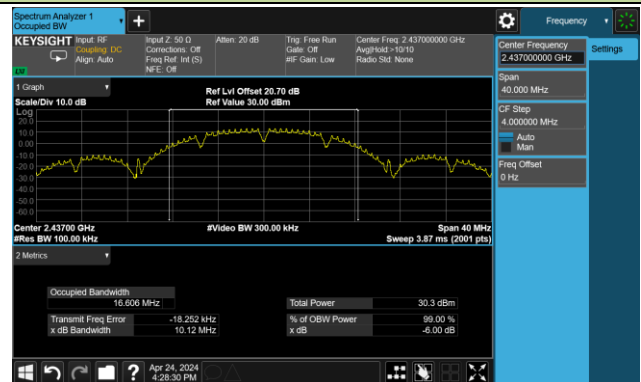


Channel 11 (2462MHz)

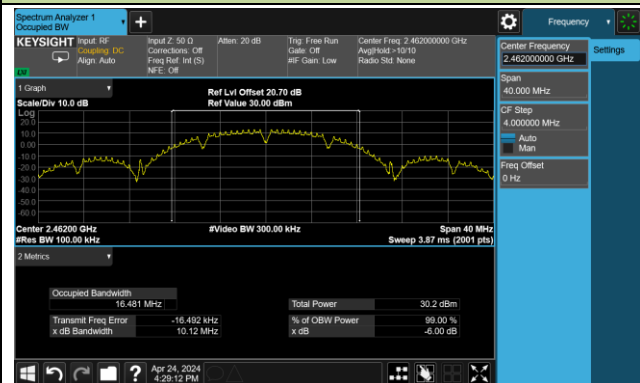


802.11g 6dB Bandwidth


Channel 01 (2412MHz)

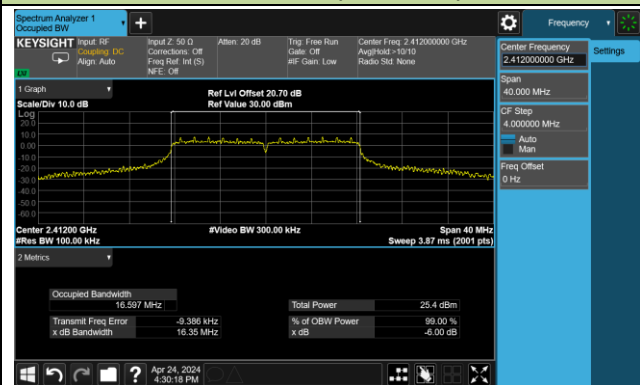

Channel 06 (2437MHz)

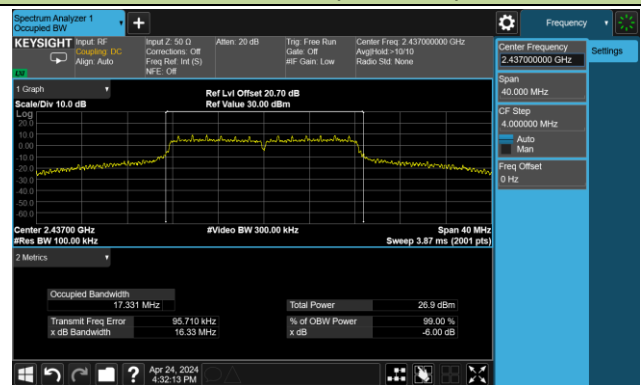


Channel 11 (2462MHz)

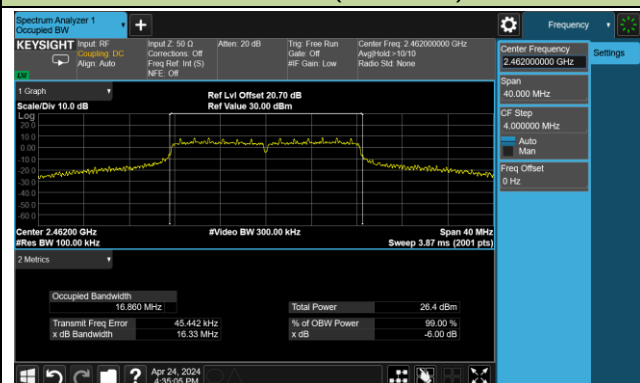


802.11n-HT20 6dB Bandwidth


Channel 01 (2412MHz)

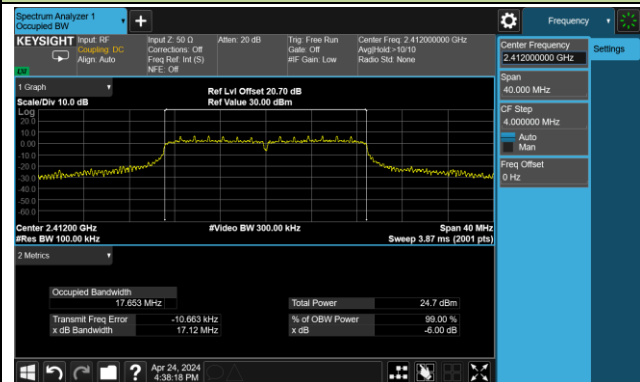

Channel 06 (2437MHz)

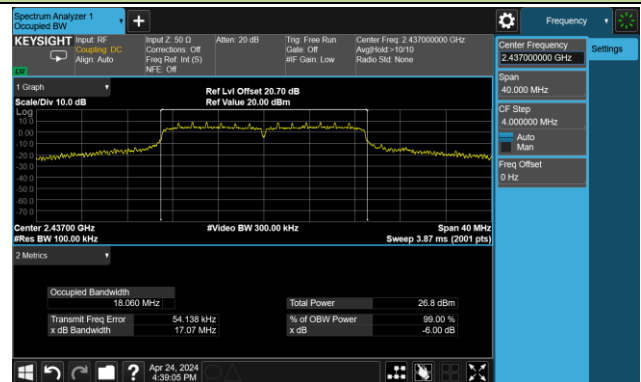


Channel 11 (2462MHz)

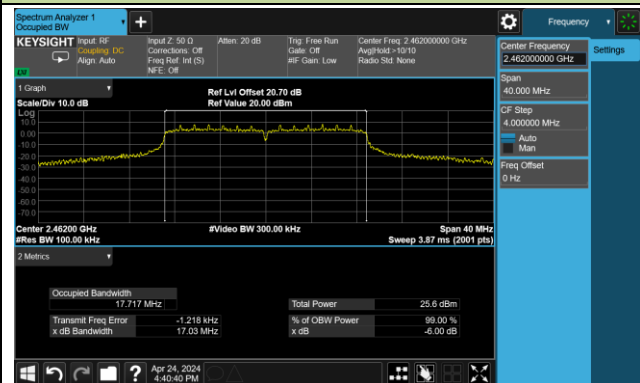


802.11n-HT40 6dB Bandwidth


Channel 03 (2422MHz)

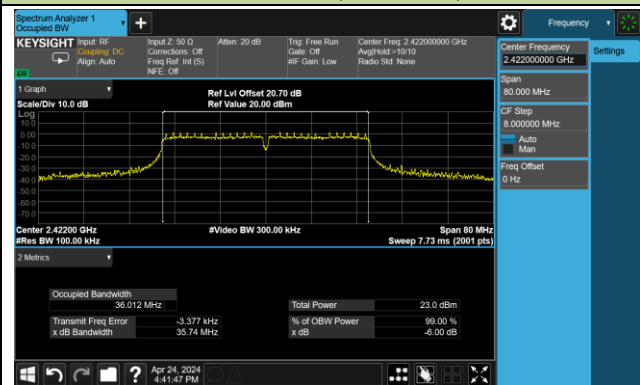

Channel 06 (2437MHz)

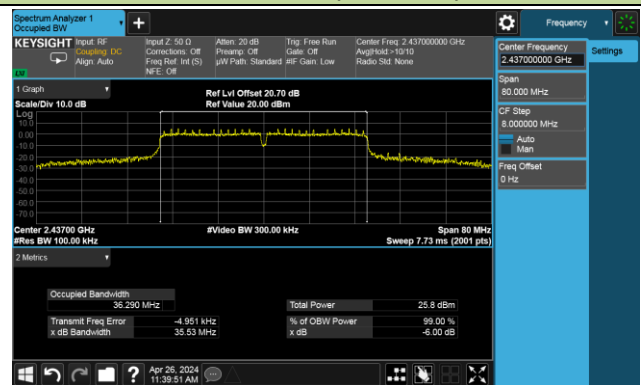

Channel 09 (2452MHz)

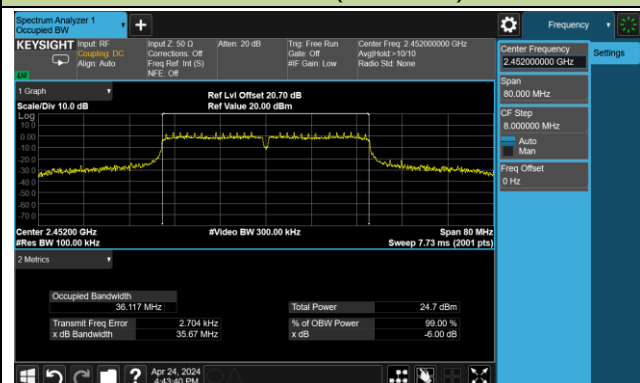

A.3 Output Power Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-04-24		

Test Mode	Data Rate / MCS	Channel No.	Freq. (MHz)	Peak Power (dBm)	Average Power (dBm)	Limit (dBm)
11b	1Mbps	01	2412	24.20	21.40	≤ 30.00
11b	1Mbps	06	2437	25.18	22.83	≤ 30.00
11b	1Mbps	11	2462	25.36	22.91	≤ 30.00
11g	6Mbps	01	2412	24.36	18.30	≤ 30.00
11g	6Mbps	06	2437	24.57	19.45	≤ 30.00
11g	6Mbps	11	2462	24.64	19.17	≤ 30.00
11n-HT20	MCS0	01	2412	24.32	17.55	≤ 30.00
11n-HT20	MCS0	06	2437	24.66	19.54	≤ 30.00
11n-HT20	MCS0	11	2462	24.47	18.50	≤ 30.00
11n-HT40	MCS0	03	2422	23.66	16.00	≤ 30.00
11n-HT40	MCS0	04	2427	24.34	16.71	≤ 30.00
11n-HT40	MCS0	06	2437	24.64	19.06	≤ 30.00
11n-HT40	MCS0	09	2452	24.53	17.53	≤ 30.00


A.4 Power Spectral Density Test Result

Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-04-24~2024-04-26		


Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
11b	1Mbps	01	2412	-1.25	≤ 8.00
11b	1Mbps	06	2437	-0.11	≤ 8.00
11b	1Mbps	11	2462	-0.20	≤ 8.00
11g	6Mbps	01	2412	-6.83	≤ 8.00
11g	6Mbps	06	2437	-5.48	≤ 8.00
11g	6Mbps	11	2462	-5.97	≤ 8.00
11n-HT20	MCS0	01	2412	-7.49	≤ 8.00
11n-HT20	MCS0	06	2437	-6.02	≤ 8.00
11n-HT20	MCS0	11	2462	-6.39	≤ 8.00
11n-HT40	MCS0	03	2422	-12.19	≤ 8.00
11n-HT40	MCS0	06	2437	-9.62	≤ 8.00
11n-HT40	MCS0	09	2452	-10.15	≤ 8.00

802.11b - PSD


Channel 01 (2412MHz)

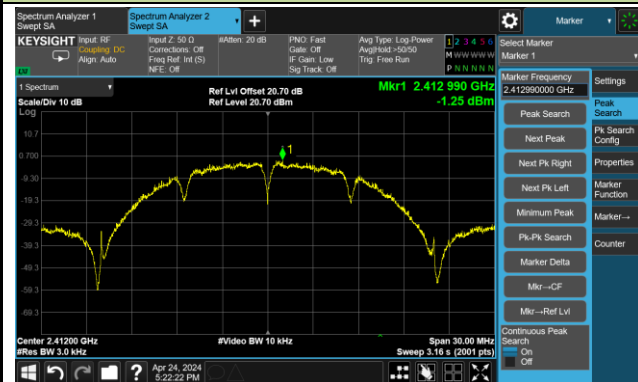

Channel 06 (2437MHz)

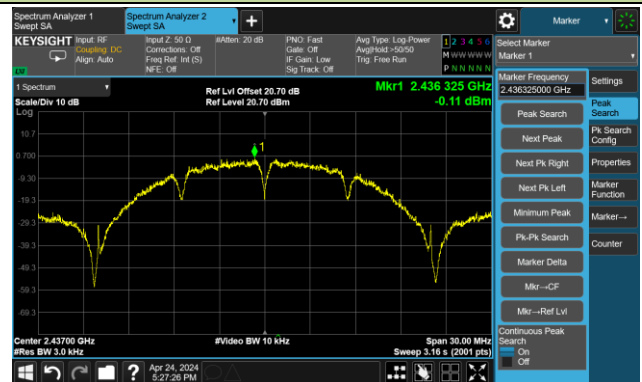


Channel 11 (2462MHz)

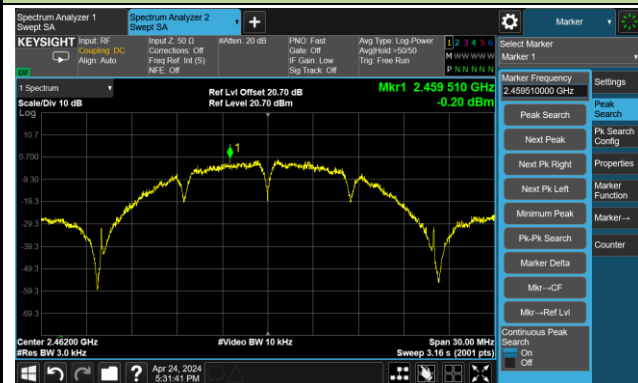


802.11g - PSD


Channel 01 (2412MHz)

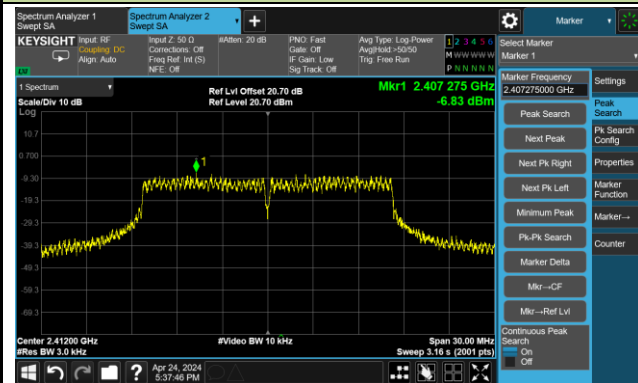

Channel 06 (2437MHz)

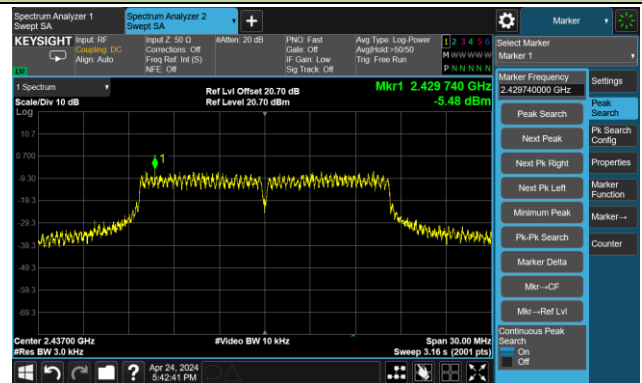


Channel 11 (2462MHz)

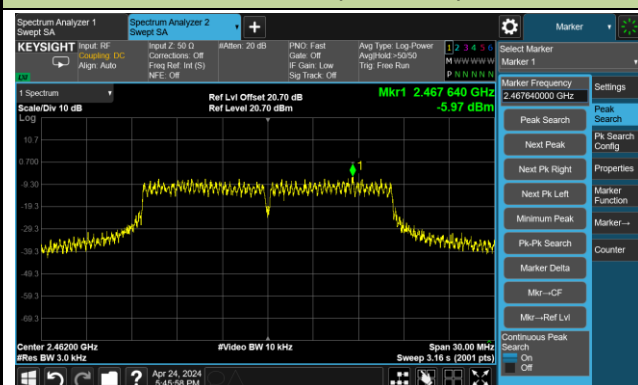


802.11n-HT20 - PSD


Channel 01 (2412MHz)

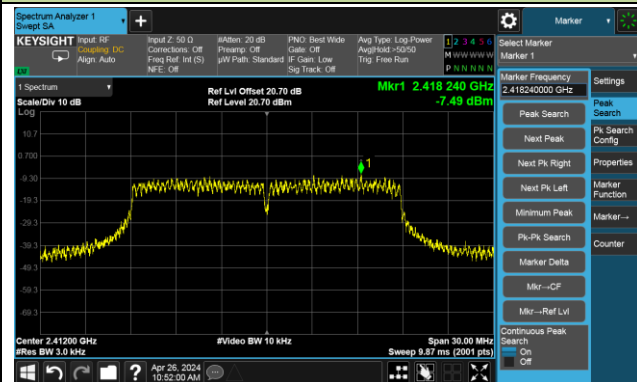

Channel 06 (2437MHz)

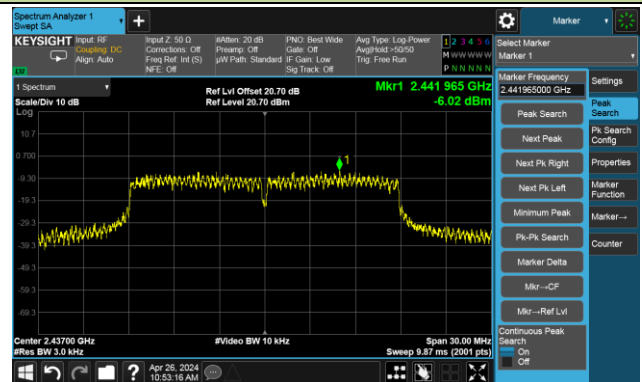


Channel 11 (2462MHz)

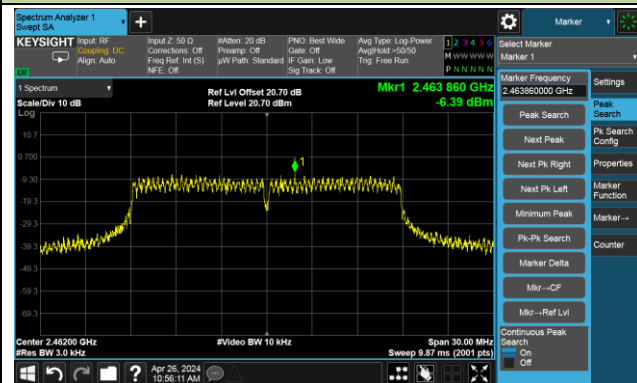


802.11n-HT40 - PSD


Channel 03 (2422MHz)

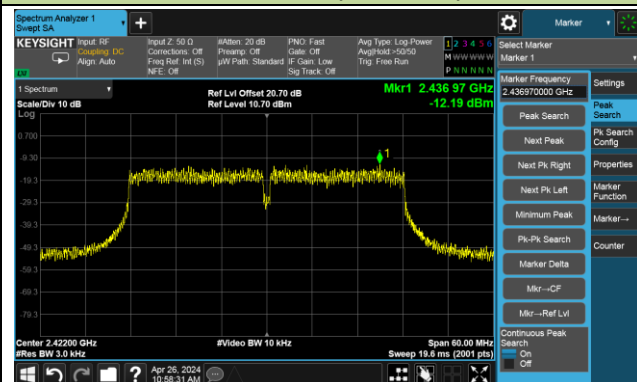

Channel 06 (2437MHz)

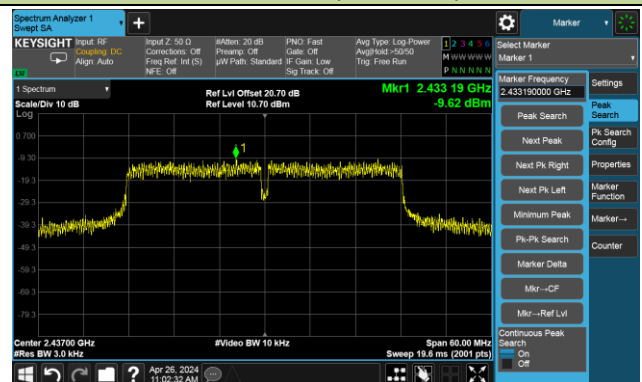

Channel 09 (2452MHz)

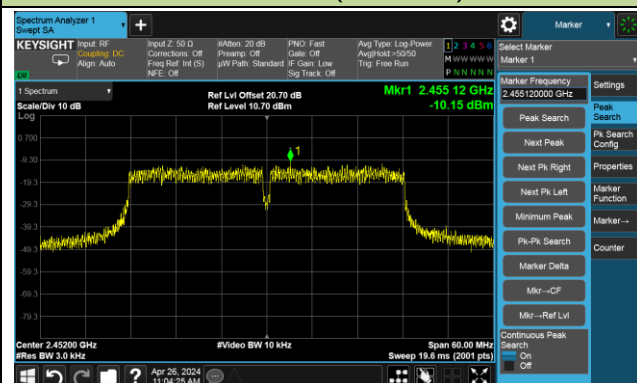

A.5 Conducted Band Edge and Out-of-Band Emissions Test Result


Test Site	SIP-TR1	Test Engineer	Alisa Deng
Test Date	2024-04-26		

Test Mode	Data Rate / MCS	Channel No.	Frequency (MHz)	Limit
11b	1Mbps	01	2412	20dBc
11b	1Mbps	06	2437	20dBc
11b	1Mbps	11	2462	20dBc
11g	6Mbps	01	2412	20dBc
11g	6Mbps	06	2437	20dBc
11g	6Mbps	11	2462	20dBc
11n-HT20	MCS0	01	2412	20dBc
11n-HT20	MCS0	06	2437	20dBc
11n-HT20	MCS0	11	2462	20dBc
11n-HT40	MCS0	03	2422	20dBc
11n-HT40	MCS0	06	2437	20dBc
11n-HT40	MCS0	09	2452	20dBc

802.11b Out-of-Band Emissions

Channel 01 (2412MHz)


Reference Level

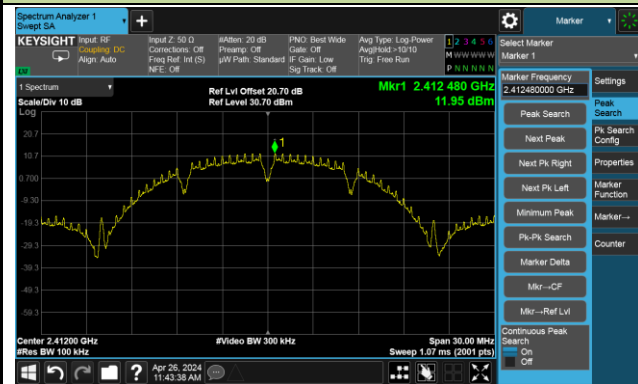

Low Band Edge




Spurious Emission

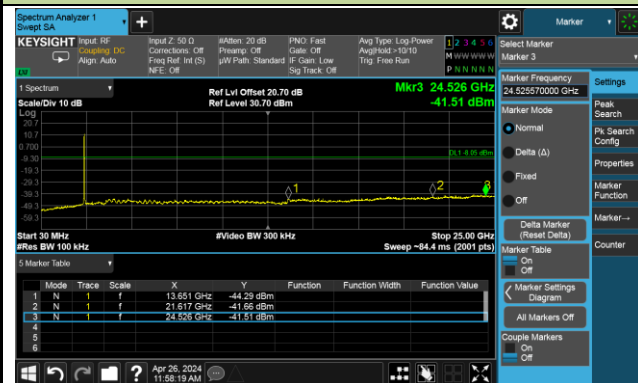


Channel 06 (2437MHz)

Reference Level

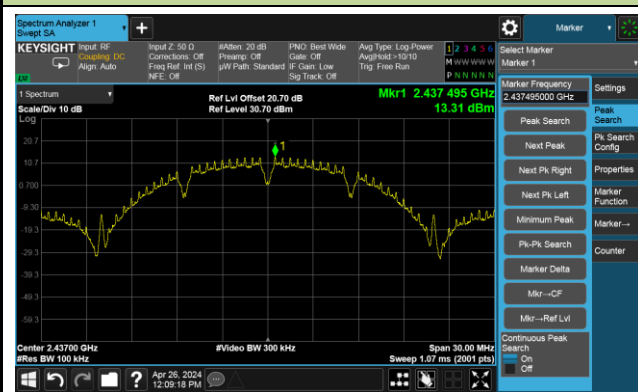


Spurious Emission

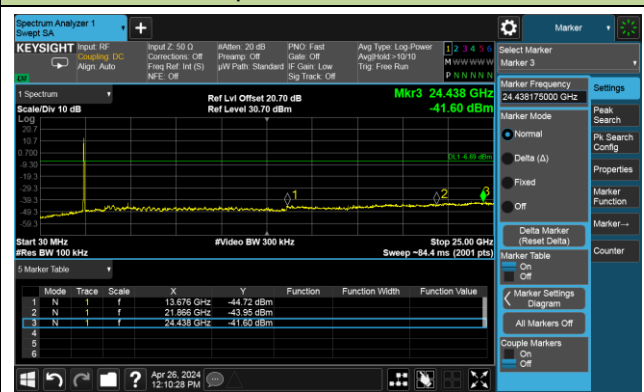

802.11b Out-of-Band Emissions

Channel 11 (2462MHz)


Reference Level

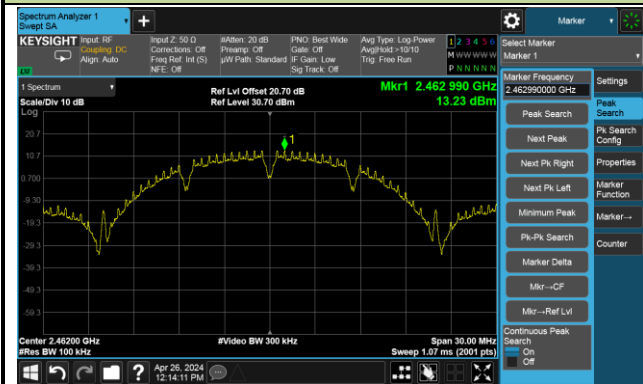

High Band Edge



Spurious Emission

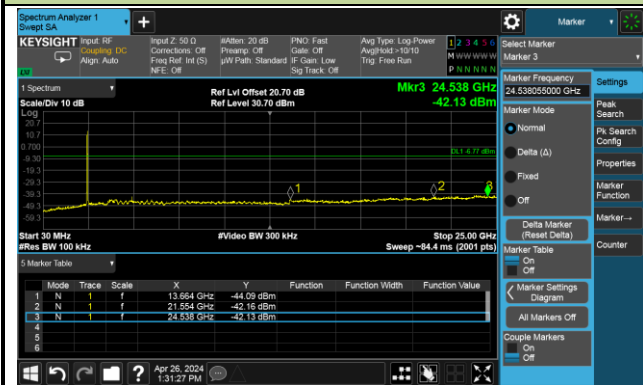


802.11g Out-of-Band Emissions

Channel 01 (2412MHz)


Reference Level



Low Band Edge

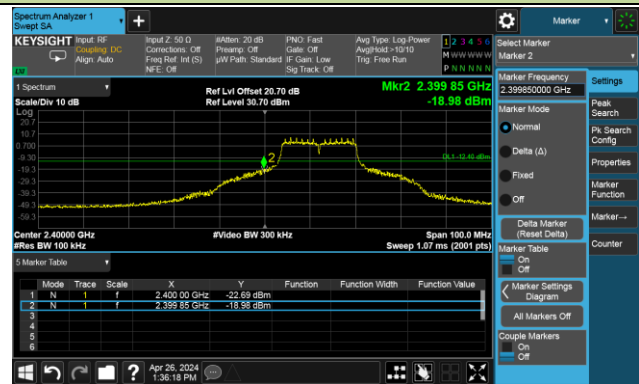

Spurious Emission

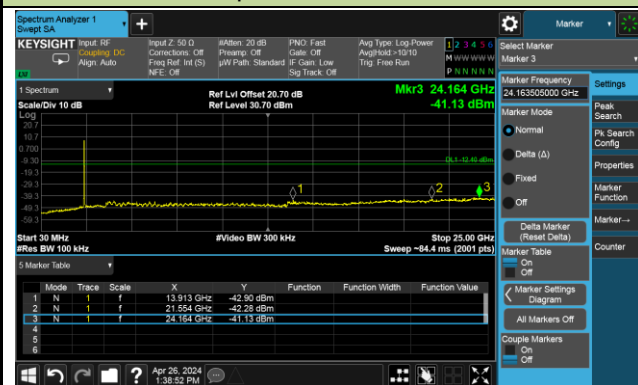


Channel 06 (2437MHz)

Reference Level



Spurious Emission

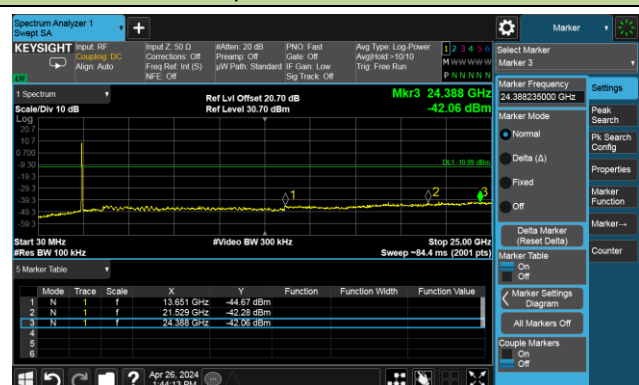

802.11g Out-of-Band Emissions

Channel 11 (2462MHz)


Reference Level



High Band Edge



Spurious Emission

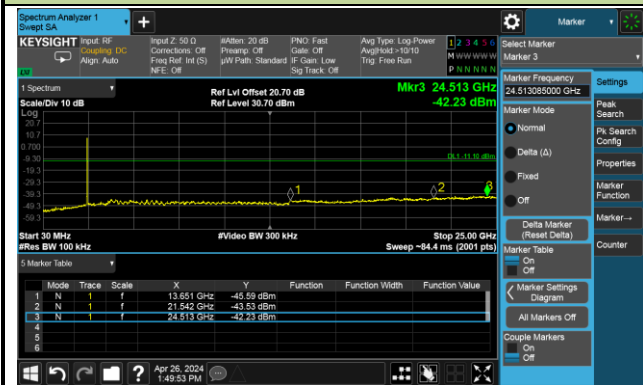


802.11n-HT20 Out-of-Band Emissions

Channel 01 (2412MHz)


Reference Level



Low Band Edge

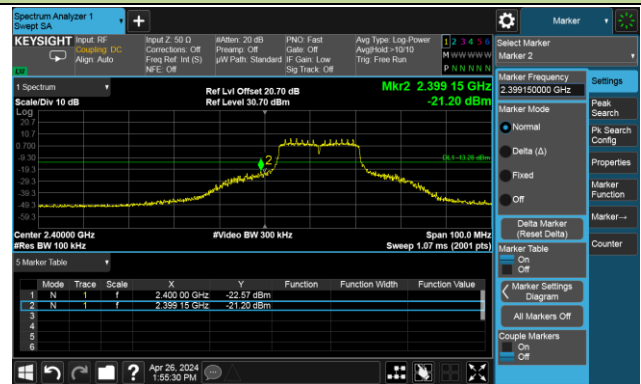


Spurious Emission

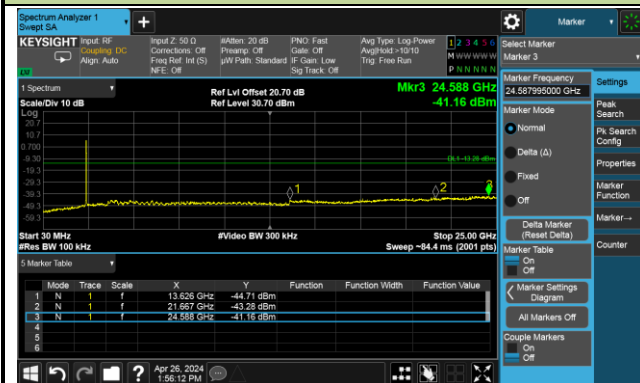


Channel 06 (2437MHz)

Reference Level

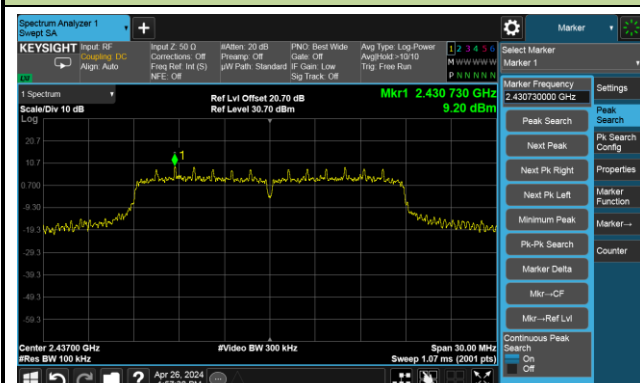

Spurious Emission

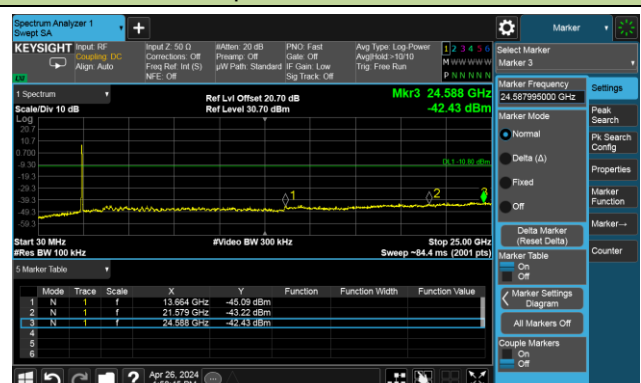


802.11n-HT20 Out-of-Band Emissions

Channel 11 (2462MHz)


Reference Level



High Band Edge

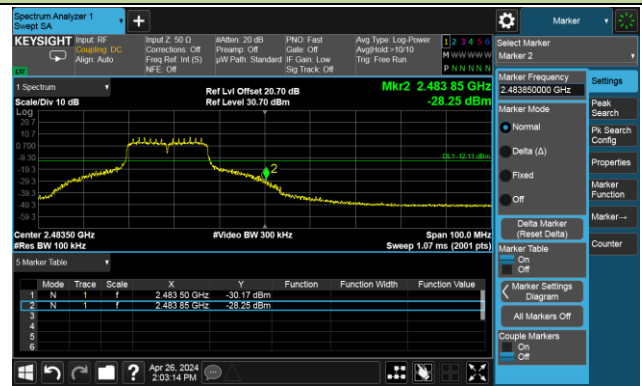

Spurious Emission

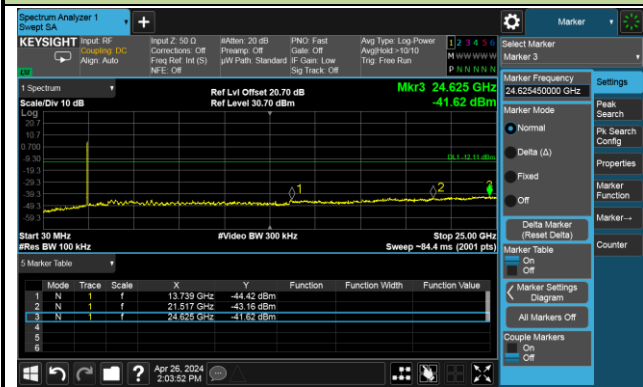


802.11n-HT40 Out-of-Band Emissions

Channel 03 (2422MHz)


Reference Level



Low Band Edge

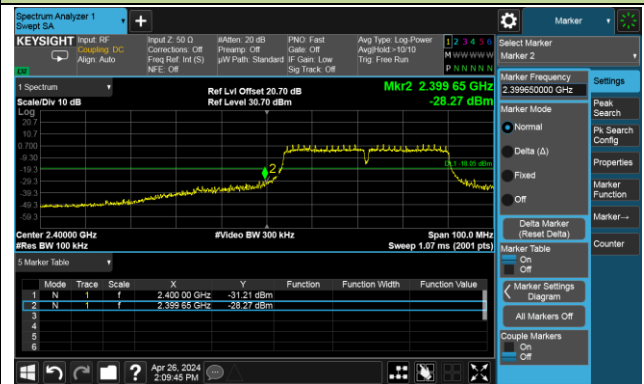

Spurious Emission

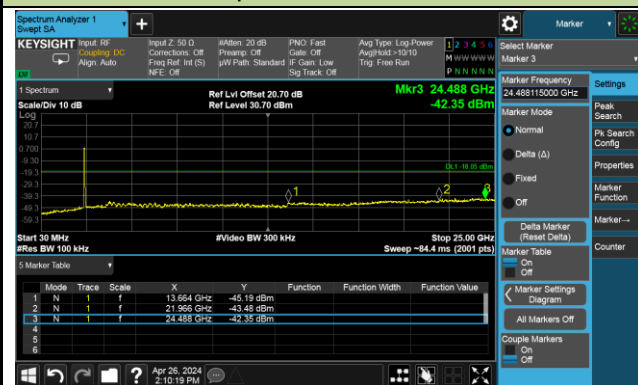


Channel 06 (2437MHz)

Reference Level



Spurious Emission

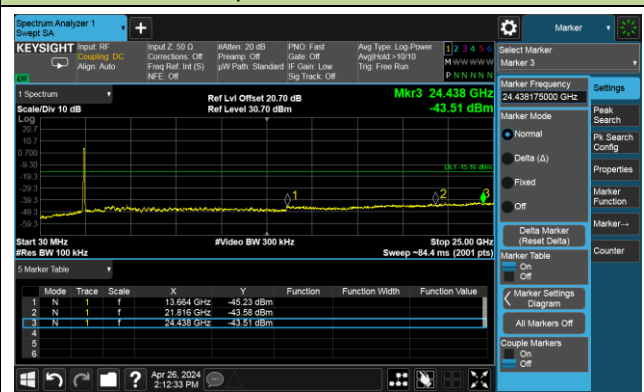

802.11n-HT40 Out-of-Band Emissions

Channel 09 (2452MHz)


Reference Level



High Band Edge



Spurious Emission

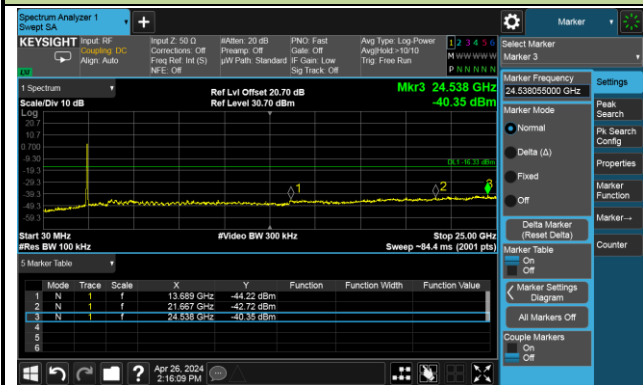

A.6 Radiated Spurious Emission Test Result

Test Site	SIP-AC2	Test Engineer	Mero Zhou
Test Date	2024-04-21	Test Mode	802.11b
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	4825.0	53.1	-7.3	45.8	74.0	-28.2	Peak	Horizontal
	8276.0	42.7	0.7	43.4	74.0	-30.6	Peak	Horizontal
	10979.0	41.9	5.3	47.2	74.0	-26.8	Peak	Horizontal
	4825.0	60.7	-7.3	53.4	74.0	-20.6	Peak	Vertical
	4825.0	60.6	-7.3	53.3	54.0	-0.7	Average	Vertical
	8310.0	43.6	0.0	43.6	74.0	-30.4	Peak	Vertical
	11693.0	41.5	5.1	46.6	74.0	-27.4	Peak	Vertical
06	4876.0	54.8	-6.8	48.0	74.0	-26.0	Peak	Horizontal
	7315.5	46.7	-0.7	46.0	74.0	-28.0	Peak	Horizontal
	11659.0	41.5	5.0	46.5	74.0	-27.5	Peak	Horizontal
	4876.0	60.9	-6.8	54.1	74.0	-19.9	Peak	Vertical
	4876.0	60.4	-6.8	53.6	54.0	-0.4	Average	Vertical
	7307.0	45.8	-0.7	45.1	74.0	-28.9	Peak	Vertical
	10817.5	42.4	4.7	47.1	74.0	-26.9	Peak	Vertical
11	4927.0	53.2	-7.1	46.1	74.0	-27.9	Peak	Horizontal
	7383.5	47.3	-0.6	46.7	74.0	-27.3	Peak	Horizontal
	10970.5	42.5	5.1	47.6	74.0	-26.4	Peak	Horizontal
	4927.0	60.2	-7.1	53.1	74.0	-20.9	Peak	Vertical
	7383.5	46.8	-0.6	46.2	74.0	-27.8	Peak	Vertical
	11106.5	41.2	5.4	46.6	74.0	-27.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC2	Test Engineer	Mero Zhou
Test Date	2024-04-21	Test Mode	802.11g
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not shown in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
01	8310.0	41.6	0.0	41.6	74.0	-32.4	Peak	Horizontal
	11225.5	41.0	5.4	46.4	74.0	-27.6	Peak	Horizontal
	15560.5	39.2	6.7	45.9	74.0	-28.1	Peak	Horizontal
	4825.0	52.1	-7.3	44.8	74.0	-29.2	Peak	Vertical
	8182.5	43.5	0.8	44.3	74.0	-29.7	Peak	Vertical
	11013.0	41.9	4.8	46.7	74.0	-27.3	Peak	Vertical
06	7307.0	45.8	-0.7	45.1	74.0	-28.9	Peak	Horizontal
	10732.5	42.2	4.4	46.6	74.0	-27.4	Peak	Horizontal
	15475.5	40.7	7.0	47.7	74.0	-26.3	Peak	Horizontal
	4867.5	50.8	-7.0	43.8	74.0	-30.2	Peak	Vertical
	7307.0	45.5	-0.7	44.8	74.0	-29.2	Peak	Vertical
	10979.0	41.4	5.3	46.7	74.0	-27.3	Peak	Vertical
11	7392.0	46.7	-0.6	46.1	74.0	-27.9	Peak	Horizontal
	11081.0	42.2	5.0	47.2	74.0	-26.8	Peak	Horizontal
	15475.5	40.4	7.0	47.4	74.0	-26.6	Peak	Horizontal
	4927.0	50.4	-7.1	43.3	74.0	-30.7	Peak	Vertical
	7383.5	45.2	-0.6	44.6	74.0	-29.4	Peak	Vertical
	11030.0	41.9	5.2	47.1	74.0	-26.9	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)