

FCC RF Test Report

APPLICANT : OnePlus Technology (shenzhen) Co., Ltd.
EQUIPMENT : Smart Phone
BRAND NAME : ONEPLUS
MODEL NAME : ONEPLUS A5010
MARKETING NAME : ONEPLUS 5T
FCC ID : 2ABZ2-A5010
STANDARD : FCC 47 CFR Part 2, 27
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Aug. 25, 2017 and completely tested on Oct. 11, 2017. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-D-2010 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager



Sporton International (Shenzhen) Inc.

***1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City
Guangdong Province 518055 China***



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	6
1.6 Maximum Frequency Tolerance and Emission Designator and Conducted Power	7
1.7 Testing Site.....	8
1.8 Applied Standards	8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	9
2.1 Test Mode.....	9
2.2 Connection Diagram of Test System.....	10
2.3 Support Unit used in test configuration and system	10
2.4 Measurement Results Explanation Example.....	11
2.5 Frequency List of Low/Middle/High Channels	11
3 CONDUCTED TEST ITEMS	12
3.1 Measuring Instruments	12
3.2 Test Setup	12
3.3 Test Result of Conducted Test	12
3.4 Conducted Output Power Measurement	13
3.5 Peak-to-Average Ratio	14
3.6 EIRP Power Density	15
3.7 Occupied Bandwidth.....	16
3.8 Conducted Band Edge Measurement	17
3.9 Conducted Spurious Emission Measurement	18
3.10 Frequency Stability Measurement.....	19
4 RADIATED TEST ITEMS	20
4.1 Measuring Instruments	20
4.2 Test Setup	20
4.3 Test Result of Radiated Test	20
4.4 Radiated Spurious Emission Measurement	21
5 LIST OF MEASURING EQUIPMENT	22
6 UNCERTAINTY OF EVALUATION	23
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG782510-01C	Rev. 01	Initial issue of report	Oct. 23, 2017

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.5	-	Peak-to-Average Ratio	<13dB	N/A	Reporting only
3.6	§27.50 (a)(3)	EIRP Power Density	EIRP < 250mW/5MHz	PASS	-
3.7	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.8	§2.1051 §27.53 (a)(4)	Conducted Band Edge Measurement	Refer standard	PASS	-
3.9	§2.1051 §27.53 (a)(4)	Conducted Spurious Emission	< 70+10log ₁₀ (P[Watts])	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (a)(4)	Radiated Spurious Emission	< 70+10log ₁₀ (P[Watts])	PASS	Under limit 11.84 dB at 9222.360 MHz



1 General Description

1.1 Applicant

OnePlus Technology (shenzhen) Co., Ltd.

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.2 Manufacturer

OnePlus Technology (shenzhen) Co., Ltd.

18C02, 18C03, 18C04 and 18C05, Shum Yip Terra Building, Binhe Avenue North, Futian District, Shenzhen

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Smart Phone
Brand Name	ONEPLUS
Model Name	ONEPLUS A5010
Marketing Name	ONEPLUS 5T
FCC ID	2ABZ2-A5010
EUT supports Radios application	CDMA/EVDO/GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+ /LTE/NFC WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ac VHT20/VHT40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/ Bluetooth v3.0 + EDR/ Bluetooth v 4.0 LE/ Bluetooth v4.1 LE/ Bluetooth v4.2 LE/ Bluetooth v5.0 LE
IMEI Code	Top Antenna Conducted: 866817030000871 / 866817030000871 Radiation: 866817030000954/866817030000954 Bottom Antenna Radiation: 866817030000954/866817030000954
HW Version	EC017
SW Version	oxygen version 4.7
EUT Stage	Production Unit

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx Frequency	LTE Band 30 : 2307.5 MHz ~ 2312.5 MHz
Rx Frequency	LTE Band 30 : 2352.5 MHz ~ 2357.5 MHz
Bandwidth	5MHz / 10MHz
Maximum Output Power to Antenna	LTE Band 30 : 22.51 dBm
Antenna Type	PIFA Antenna
Antenna Gain	Top Antenna: -0.5dBi Bottom Antenna: 0dBi
Type of Modulation	QPSK / 16QAM / 64QAM

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Frequency Tolerance and Emission Designator and Conducted Power

LTE Band 30		QPSK			16QAM		
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum Conducted power(W)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum Conducted power(W)
5	2307.5 ~ 2312.5	4M49G7D	-	0.1778	4M50W7D	-	0.1472
10	2310.0	9M09G7D	0.0250	0.1782	8M99W7D	-	0.1452
LTE Band 30		64QAM					
BW (MHz)	Frequency Range (MHz)	Emission Designator (99%OBW)	Frequency Tolerance (ppm)	Maximum Conducted power(W)			
5	2307.5 ~ 2312.5	4M50W7D	-	0.1306			
10	2310.0	9M05W7D	-	0.1250			

1.7 Testing Site

Sporton Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No. are CN5018 and CN5019.

Test Site	Sporton International (Shenzhen) Inc.	
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City Guangdong Province 518055 China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.
	TH01-SZ	251365

Test Site	Sporton International (Shenzhen) Inc.	
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398	
Test Site No.	Sporton Site No.	FCC Test Firm Registration No.
	03CH03-SZ	577730

Note: The test site complies with ANSI C63.4 2014 requirement.

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, Part 27(D)
- ♦ ANSI / TIA / EIA-603-D-2010
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to K DB 971168 D01 Power Meas. License Digital Systems v02r02 with maximum output power.

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Conducted Test Cases	Band	Bandwidth (MHz)						Modulation			RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Max. Output Power	30	-	-	V		-	-	V	V	V	V	V	V	V	V	V
		-	-		V	-	-	V	V	V	V	V	V		V	
Peak-to-Average Ratio	30	-	-		V	-	-	V	V	V	V		V		V	
E.I.R.P PSD	30	-	-	V		-	-	V	V	V	V			V	V	V
		-	-		V	-	-	V	V	V	V				V	
26dB and 99% Bandwidth	30	-	-	V		-	-	V	V	V			V	V	V	V
		-	-		V	-	-	V	V	V			V		V	
Conducted Band Edge	30	-	-	V		-	-	V	V	V	V		V	V		V
		-	-		V	-	-	V	V	V	V		V		V	
Conducted Spurious Emission	30	-	-	V		-	-	V	V	V	V			V	V	V
		-	-		V	-	-	V	V	V	V				V	
Frequency Stability	30	-	-		V	-	-	V					V		V	
Radiated Spurious Emission	30	-	-	V		-	-	V			V			V	V	V
					V			V			V				V	
Note	- The mark "v " means that this configuration is chosen for testing - The mark "- " means that this bandwidth is not supported. - The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.															

2.2 Connection Diagram of Test System

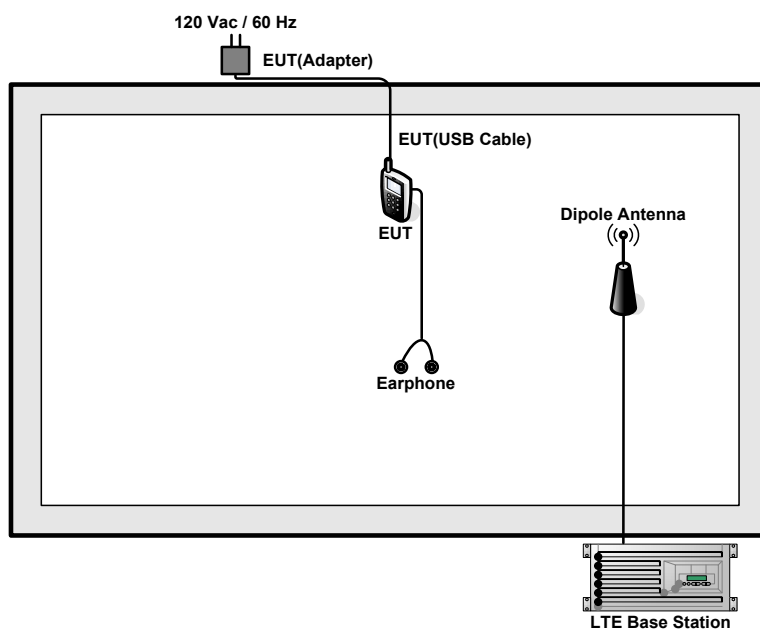

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	Earphone	Apple	MC690ZP/A	N/A	Shielded, 1.0m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 5.0 dB and a 10dB attenuator.

Example :

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 5.0 + 10 = 15.0 (dB)

2.5 Frequency List of Low/Middle/High Channels

LTE Band 30 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	-	27710	-
	Frequency	-	2310	-
5	Channel	27685	27710	27735
	Frequency	2307.5	2310	2312.5


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

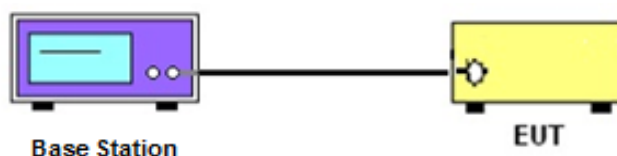

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth ,Band-Edge and Conducted Spurious Emission

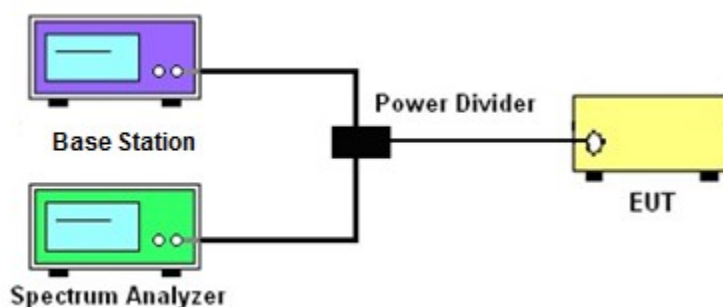

3.2.3 Frequency Stability

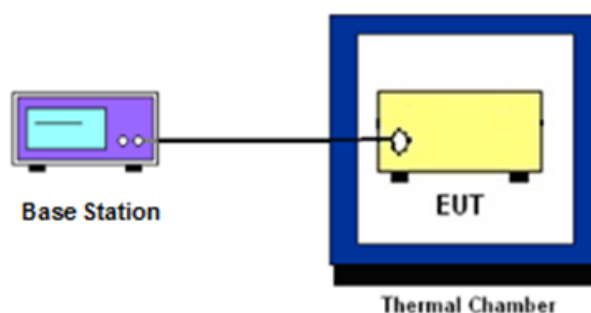

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different modulation.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.1.
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP Power Density

3.6.1 Description of EIRP Power Density

For mobile and portable stations transmitting in the 2305-2315 MHz band or the 2350-2360 MHz band, the average EIRP must not exceed 50 milliwatts within any 1 megahertz of authorized bandwidth, *except that* for mobile and portable stations compliant with 3GPP LTE standards or another advanced mobile broadband protocol that avoids concentrating energy at the edge of the operating band the average EIRP must not exceed 250 milliwatts within any 5 megahertz of authorized bandwidth but may exceed 50 milliwatts within any 1 megahertz of authorized bandwidth. For mobile and portable stations using time division duplexing (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands. Mobile and portable stations using FDD technology are restricted to transmitting in the 2305-2315 MHz band. Power averaging shall not include intervals in which the transmitter is off.

3.6.2 Test Procedures

1. Set instrument center frequency to OBW center frequency.
2. Set span to at least 1.5 times the OBW.
3. Set the RBW to the specified reference bandwidth (often 1 MHz).
4. Set VBW $\geq 3 \times$ RBW.
5. Detector = RMS (power averaging).
6. Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
7. Sweep time = auto couple.
8. Employ trace averaging (RMS) mode over a minimum of 100 traces.
9. Use the peak marker function to determine the maximum amplitude level within the reference bandwidth (PSD).

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26dB occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal 26 dB.

The 26 dB emission bandwidth(EBW) is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF powers with full RB sizes were measured.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

27.53 (a)(4)

For mobile and portable stations operating in the 2305-2315 MHz and 2350-2360 MHz bands:

(i) By a factor of not less than: $43 + 10 \log (P)$ dB on all frequencies between 2305 and 2320 MHz and on all frequencies between 2345 and 2360 MHz that are outside the licensed band(s) of operation, not less than $55 + 10 \log (P)$ dB on all frequencies between 2320 and 2324 MHz and on all frequencies between 2341 and 2345 MHz, not less than $61 + 10 \log (P)$ dB on all frequencies between 2324 and 2328 MHz and on all frequencies between 2337 and 2341 MHz, and not less than $67 + 10 \log (P)$ dB on all frequencies between 2328 and 2337 MHz;

(ii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2300 and 2305 MHz, $55 + 10 \log (P)$ dB on all frequencies between 2296 and 2300 MHz, $61 + 10 \log (P)$ dB on all frequencies between 2292 and 2296 MHz, $67 + 10 \log (P)$ dB on all frequencies between 2288 and 2292 MHz, and $70 + 10 \log (P)$ dB below 2288 MHz;

(iii) By a factor of not less than $43 + 10 \log (P)$ dB on all frequencies between 2360 and 2365 MHz, and not less than $70 + 10 \log (P)$ dB above 2365 MHz.

3.8.2 Test Procedures

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The band edges of low and high channels were measured with RBW $\geq$ 1% EBW set in Spectrum Analyzer, while the EUT was transmitting under maximum power.
3. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
4. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)} = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30MHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
7. The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [70 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [70 + 10\log(P)] \text{ (dB)}$
 $= -40\text{dBm}.$

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.10.2 Test Procedures for Temperature Variation

1. The EUT was set up in the thermal chamber and connected with the base station.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The EUT was placed in a temperature chamber at $25\pm 5^{\circ}\text{C}$ and connected with the base station.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

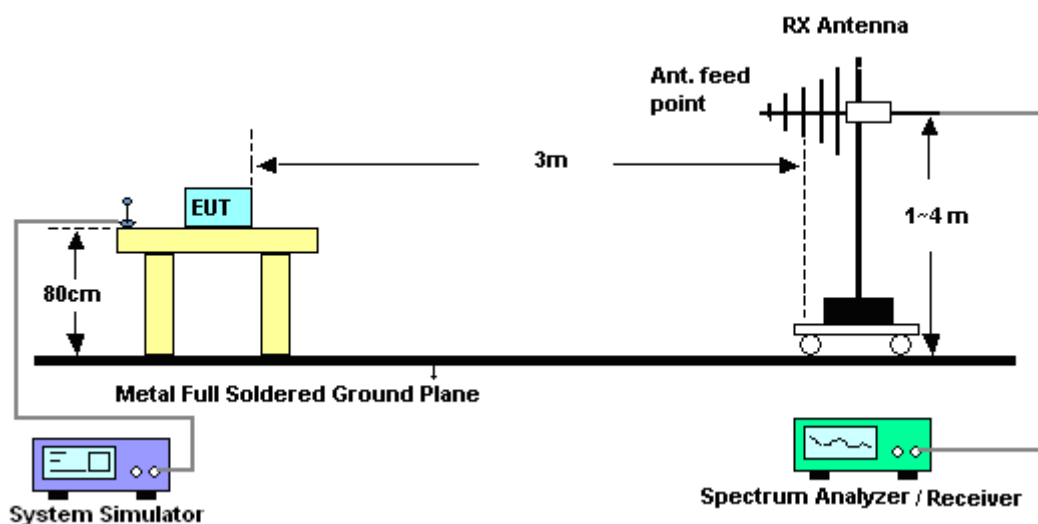

4.2.2 For radiated test above 1GHz

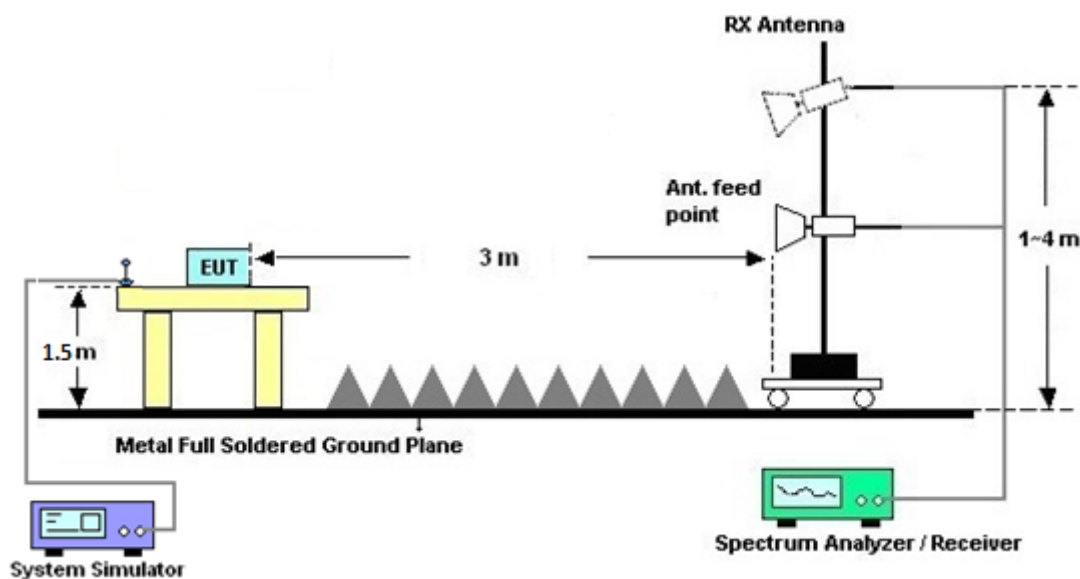

4.3 Test Result of Radiated Test

Please refer to Appendix B.

4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010.

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $70 + 10 \log (P)$ dB.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, Sweep = 500ms, Taking the record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Taking the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $70 + 10\log(P)$ dB below the transmitter power P(Watts)
= $P(W) - [70 + 10\log(P)]$ (dB)
= $[30 + 10\log(P)]$ (dBm) - $[70 + 10\log(P)]$ (dB)
= -40dBm.

11. EIRP (dBm) = S.G. Power – Tx Cable Loss + Tx Antenna Gain

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	Apr. 20, 2017	Sep. 30, 2017~ Oct. 11, 2017	Apr. 19, 2018	Conducted (TH01-SZ)
Radio Communication Analyzer	Anritsu	MT8820C	6201563777	2G/3G/4G (CDMA)	Jan. 03, 2017	Sep. 30, 2017~ Oct. 11, 2017	Jan. 02, 2018	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 20, 2017	Sep. 30, 2017~ Oct. 11, 2017	Jul. 19, 2018	Conducted (TH01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 20, 2017	Sep. 24, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 20, 2017	Sep. 24, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	May 14, 2017	Sep. 24, 2017	May 13, 2018	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120 D	9120D-1355	1GHz~18GHz	Jul. 09, 2017	Sep. 24, 2017	Jul. 08, 2018	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 11, 2016	Sep. 24, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35 -HG	1871923	18GHz~40GHz	Jul. 21, 2017	Sep. 24, 2017	Jul. 20, 2018	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Jun. 16, 2017	Sep. 24, 2017	Jun. 15, 2018	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Jan. 06, 2017	Sep. 24, 2017	Jan. 05, 2018	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	NCR	Sep. 24, 2017	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Sep. 24, 2017	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Sep. 24, 2017	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.6dB
---	-------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2U_c(y)$)	3.8dB
---	-------

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

LTE Band 30 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.43	22.34	22.5
5	1	12		22.25	22.26	22.4
5	1	24		22.31	22.49	22.44
5	12	0		21.37	21.44	21.44
5	12	7		21.49	21.48	21.52
5	12	13		21.41	21.47	21.44
5	25	0		21.47	21.41	21.42
5	1	0	16-QAM	21.46	21.67	21.58
5	1	12		21.38	21.65	21.32
5	1	24		21.5	21.56	21.68
5	12	0		20.42	20.53	20.42
5	12	7		20.52	20.59	20.52
5	12	13		20.39	20.43	20.53
5	25	0		20.37	20.4	20.53
5	1	0	64QAM	20.93	20.96	21.16
5	1	12		21.06	21.00	21.13
5	1	24		21.02	20.93	20.96
5	12	0		19.91	19.74	19.97
5	12	7		19.89	19.66	19.91
5	12	13		19.94	19.67	19.98
5	25	0		19.99	19.64	19.84


10	1	0	QPSK	-	22.44	-
10	1	25			22.51	
10	1	49			22.3	
10	25	0			21.53	
10	25	12			21.44	
10	25	25			21.42	
10	50	0			21.46	
10	1	0	16-QAM		21.57	
10	1	25			21.44	
10	1	49			21.62	
10	25	0			20.51	
10	25	12			20.48	
10	25	25			20.37	
10	50	0			20.5	
10	1	0	64QAM		20.96	
10	1	25			20.97	
10	1	49			20.79	
10	25	0			19.81	
10	25	12			19.74	
10	25	25			19.64	
10	50	0			19.69	

Peak-to-Average Ratio

Mode	LTE Band 30 / 10MHz				
Mod.	QPSK		16QAM		Limit: 13dB
RB Size	1RB	Full RB	1RB	Full RB	Result
Lowest CH	-	-	-	-	PASS
Middle CH	3.48	4.46	4.17	5.51	
Highest CH	-	-	-	-	
Mod.	64QAM		Limit: 13dB		
RB Size	1RB	Full RB	Result		
Lowest CH	-	-	PASS		
Middle CH	4.26	5.74			
Highest CH	-	-			


LTE Band 30 / 10MHz / QPSK

Middle Channel / 1RB

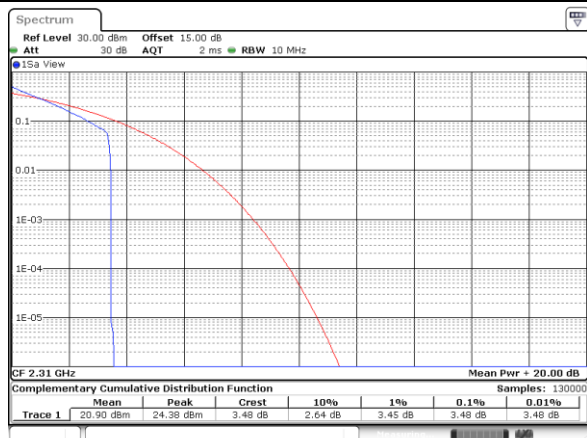

Date: 30 SEP 2017 16:57:11


Middle Channel / Full RB

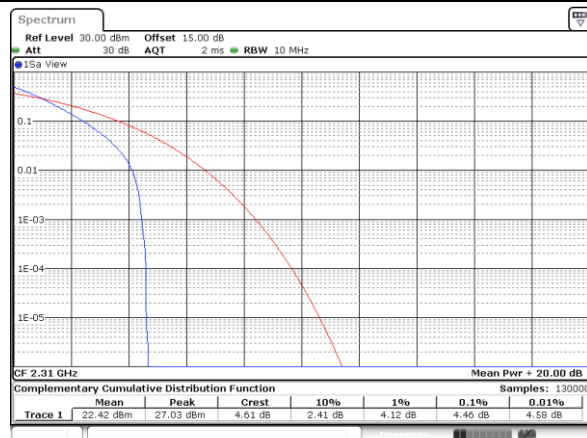

Date: 10 OCT 2017 15:17:32


LTE Band 30 / 10MHz / 16QAM

Middle Channel / 1RB

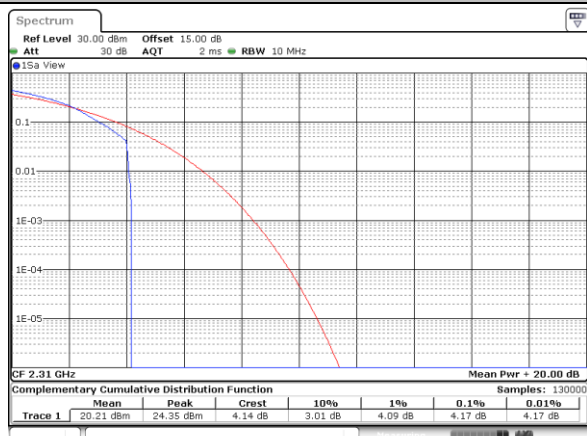

Date: 30 SEP 2017 16:57:20


Middle Channel / Full RB

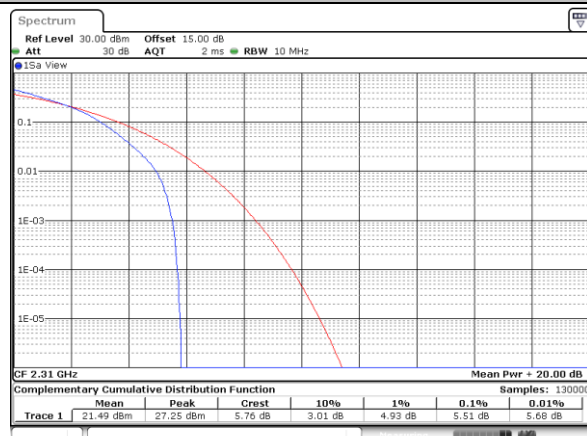

Date: 10 OCT 2017 15:23:00


LTE Band 30 / 10MHz / 64QAM

Middle Channel / 1RB

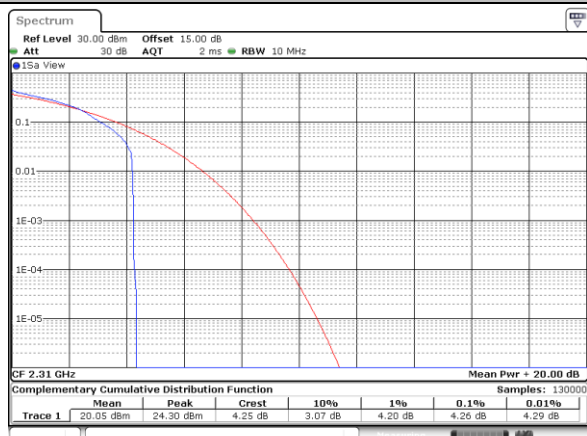

Date: 9 OCT 2017 18:59:51

Middle Channel / Full RB

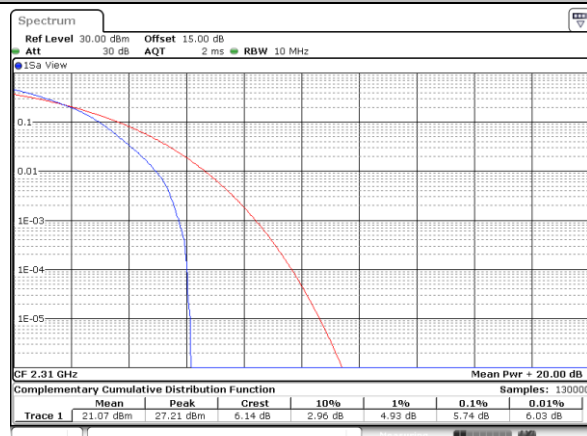

Date: 10 OCT 2017 14:33:36

**EIRP Power Density**

Mode	LTE Band 30 : Conducted Power Density (dBm/5MHz)											
BW	5MHz		10MHz		5MHz	10MHz						
Mod.	QPSK	16QAM	QPSK	16QAM	64QAM	64QAM						
Lowest CH	23.09	22.40			21.86							
Middle CH	23.08	22.35	23.08	22.36	22.02	21.91						
Highest CH	23.15	22.49			22.05							

Mode	LTE Band 30 : EIRP Power Density (dBm/5MHz)											
BW	5MHz		10MHz		5MHz	10MHz						
Mod.	QPSK	16QAM	QPSK	16QAM	64QAM	64QAM						
Lowest CH	23.09	22.40			21.86							
Middle CH	23.08	22.35	23.08	22.36	22.02	21.91						
Highest CH	23.15	22.49			22.05							
Antenna Gain	0 dBi											
Limit	250mW / 5MHz = 24dBm / 5MHz											
Result	Pass											


LTE Band 30 / 5MHz

Lowest Channel / 5MHz / 1RB0 / QPSK



Date: 9.OCT.2017 16:41:44

Lowest Channel / 5MHz / 1RB24 / 16QAM

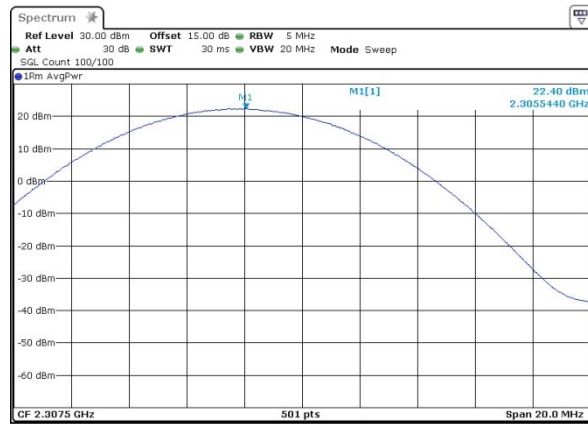


Date: 9.OCT.2017 16:41:22

Middle Channel / 5MHz / 1RB24 / QPSK



Date: 9.OCT.2017 16:42:21

Middle Channel / 5MHz / 1RB0 / 16QAM

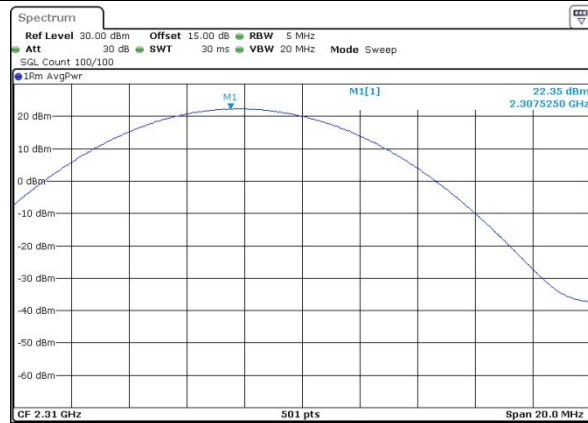


Date: 9.OCT.2017 16:42:43

Highest Channel / 5MHz / 1RB0 / QPSK



Date: 9.OCT.2017 16:43:48

Highest Channel / 5MHz / 1RB24 / 16QAM

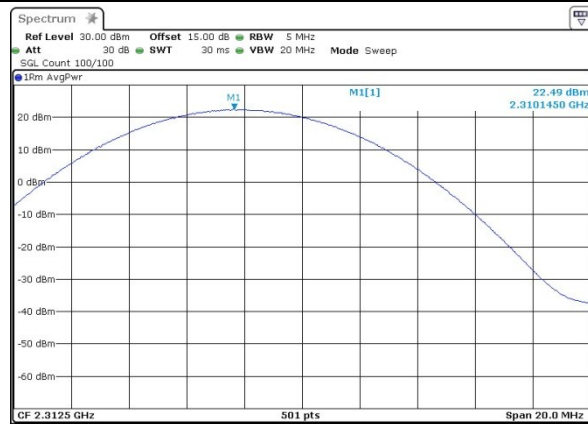

Date: 9.OCT.2017 16:43:23

LTE Band 30 / 10MHz

Lowest Channel / 10MHz / 1RB25 / QPSK



Date: 9.OCT.2017 16:45:47

Lowest Channel / 10MHz / 1RB49 / 16QAM



Date: 9.OCT.2017 16:46:14


LTE Band 30 / 5MHz

Lowest Channel / 5MHz / 1RB0 / 64QAM



Date: 11.OCT.2017 13:05:23


Middle Channel / 5MHz / 1RB0 / 64QAM

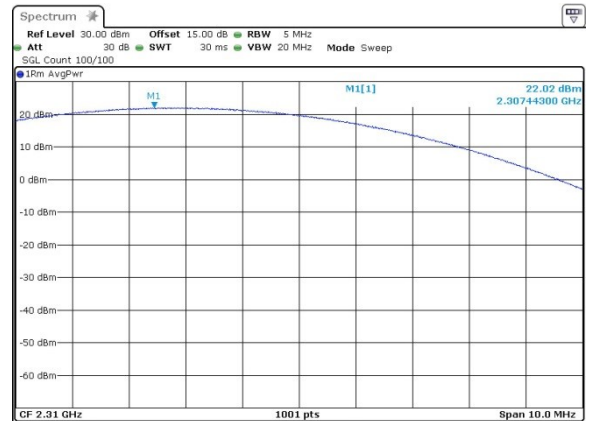

Date: 11.OCT.2017 13:06:13

LTE Band 30 / 5MHz

Highest Channel / 5MHz / 1RB0 / 64QAM

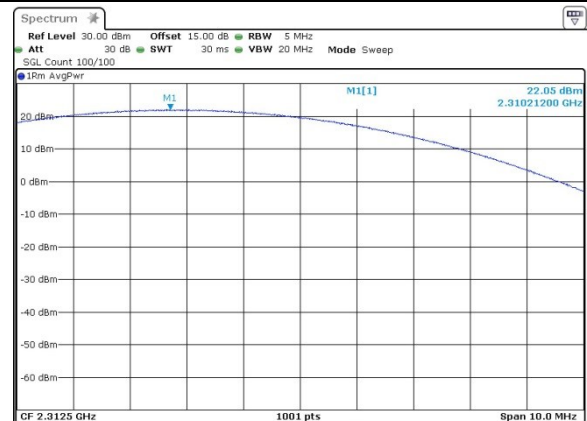


Date: 11.OCT.2017 13:07:00



LTE Band 30 / 10MHz

Middle Channel / 10MHz / 1RB25 / 64QAM

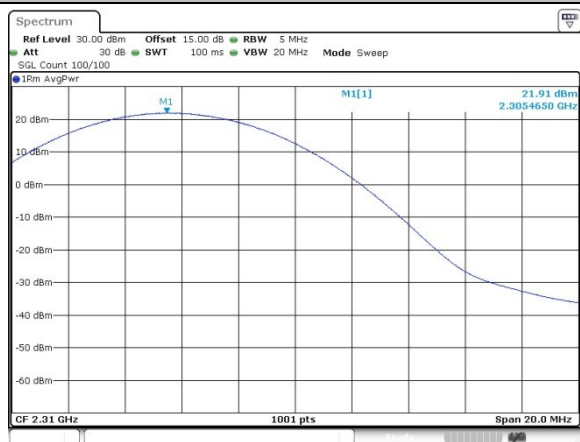




26dB Bandwidth

Mode	LTE Band 30 : 26dB BW(MHz)											
BW	5MHz		10MHz		5MHz	10MHz						
Mod.	QPSK	16QAM	QPSK	16QAM	64QAM	64QAM						
Lowest CH	4.915	4.845			4.875							
Middle CH	4.905	4.845	9.750	9.670	4.875	9.690						
Highest CH	4.865	4.835			4.815							


LTE Band 30

Lowest Channel / 5MHz / QPSK

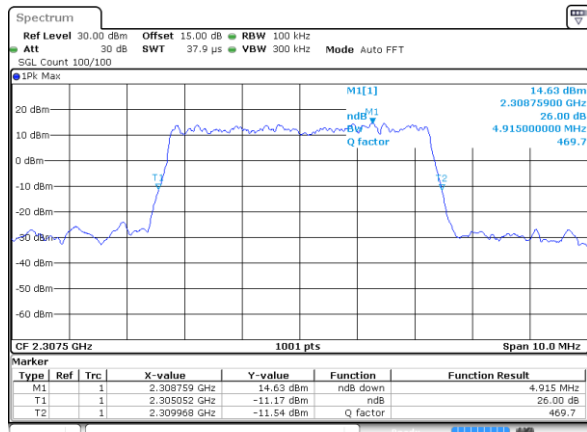


Date: 30 SEP 2017 14:33:03

Lowest Channel / 5MHz / 16QAM

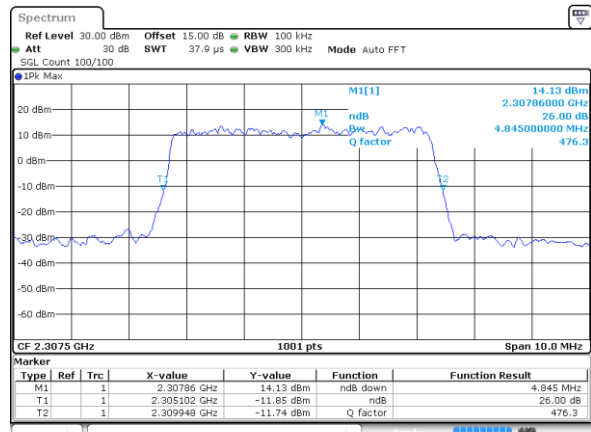


Date: 30 SEP 2017 14:33:13

Middle Channel / 5MHz / QPSK

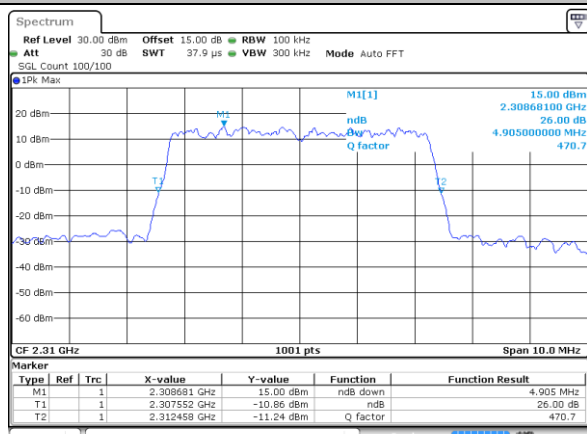


Date: 30 SEP 2017 14:40:08

Middle Channel / 5MHz / 16QAM

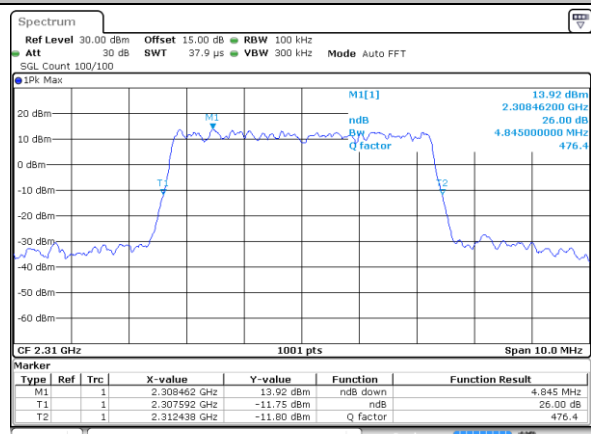


Date: 30 SEP 2017 14:40:18

Highest Channel / 5MHz / QPSK

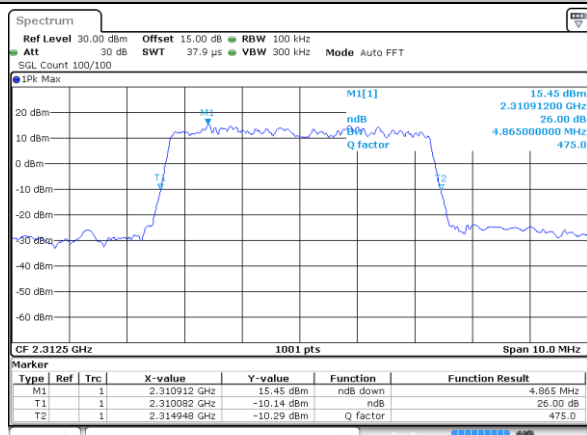

Date: 30 SEP 2017 14:42:34


Highest Channel / 5MHz / 16QAM

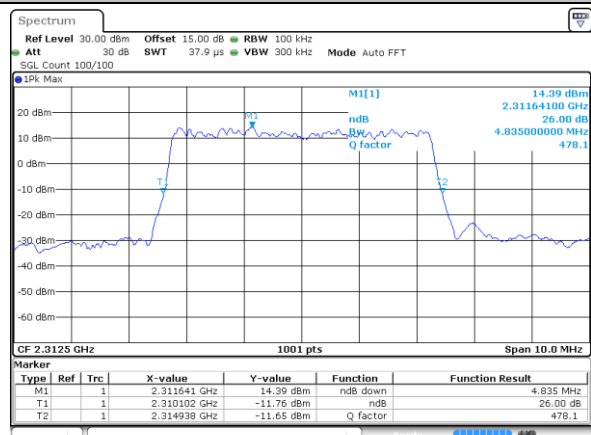

Date: 30 SEP 2017 14:42:44


LTE Band 30

Middle Channel / 10MHz / QPSK

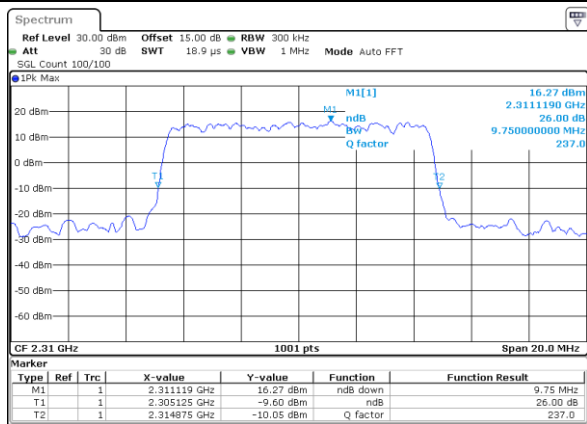

Date: 30 SEP 2017 16:32:39


Middle Channel / 10MHz / 16QAM

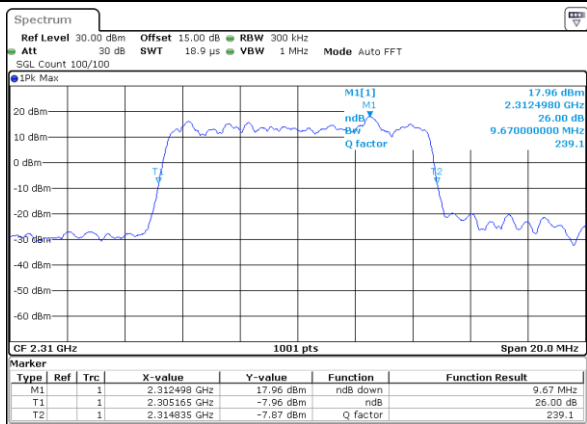

Date: 30 SEP 2017 16:32:49


LTE Band 30

Lowest Channel / 5MHz / 64QAM

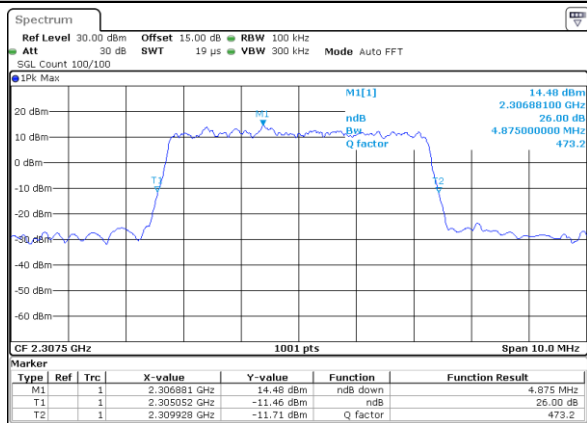


Date: 9 OCT 2017 17:33:03

Middle Channel / 5MHz / 64QAM

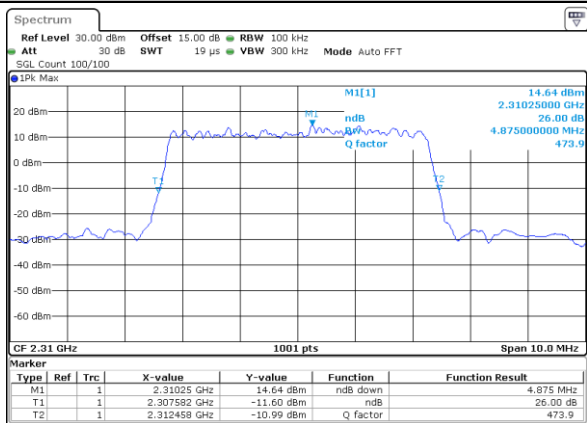


Date: 9 OCT 2017 17:36:40

Highest Channel / 5MHz / 64QAM

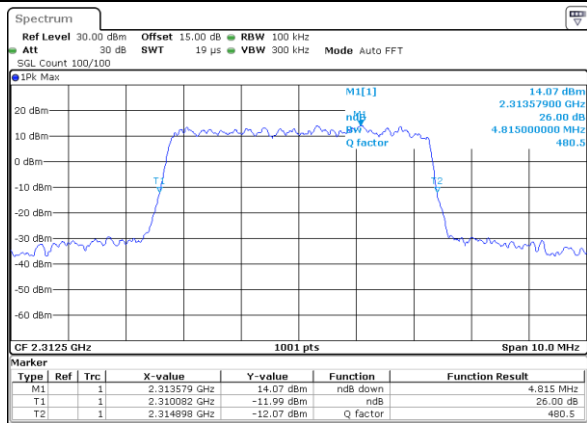

Date: 9 OCT 2017 17:37:54

Middle Channel / 10MHz / 64QAM

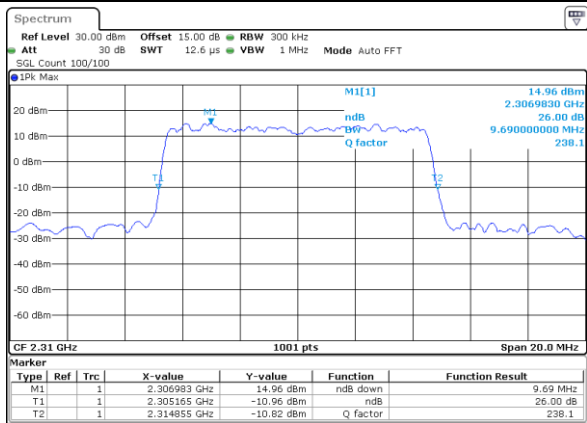

Date: 9 OCT 2017 17:41:31




Occupied Bandwidth

Mode	LTE Band 30 : 99%OBW(MHz)											
BW	5MHz		10MHz		5MHz	10MHz						
Mod.	QPSK	16QAM	QPSK	16QAM	64QAM	64QAM						
Lowest CH	4.476	4.476	-	-	4.486							
Middle CH	4.476	4.486	9.091	8.991	4.496	9.051						
Highest CH	4.486	4.496	-	-	4.486							


LTE Band 30

Lowest Channel / 5MHz / QPSK

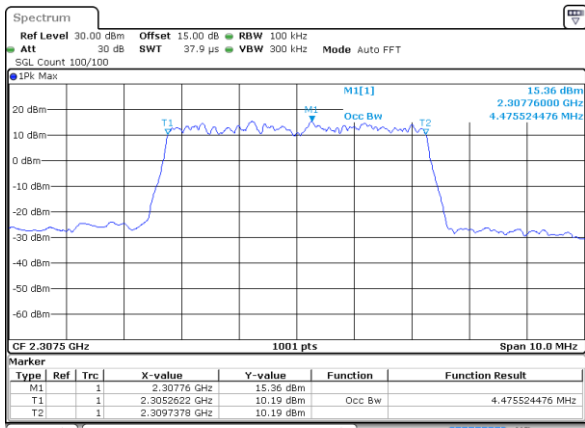


Date: 30 SEP 2017 14:32:44

Lowest Channel / 5MHz / 16QAM

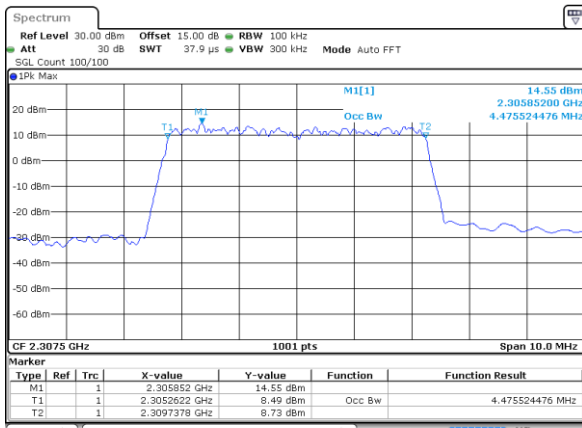


Date: 30 SEP 2017 14:32:53

Middle Channel / 5MHz / QPSK

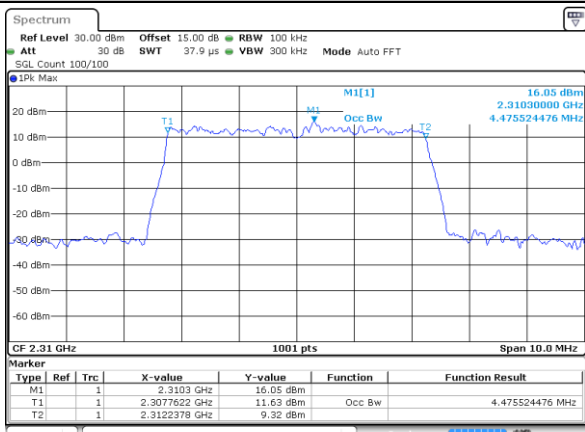


Date: 30 SEP 2017 14:39:48

Middle Channel / 5MHz / 16QAM

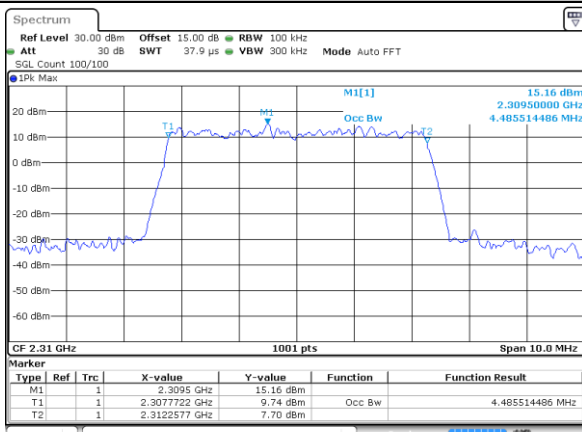


Date: 30 SEP 2017 14:39:58

Highest Channel / 5MHz / QPSK

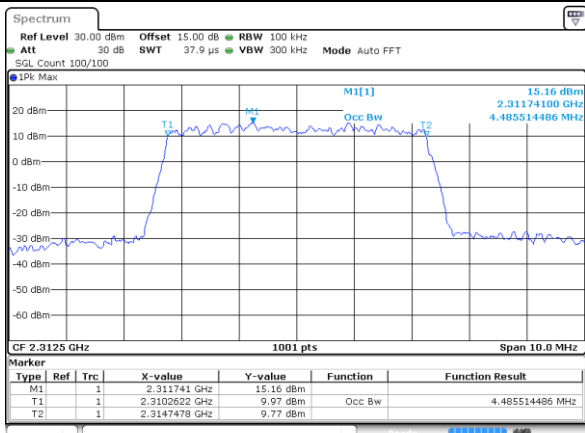

Date: 30 SEP 2017 14:42:14


Highest Channel / 5MHz / 16QAM

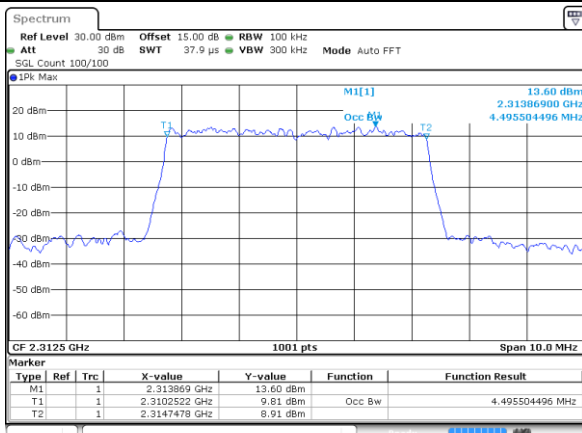

Date: 30 SEP 2017 14:42:24


LTE Band 30

Middle Channel / 10MHz / QPSK

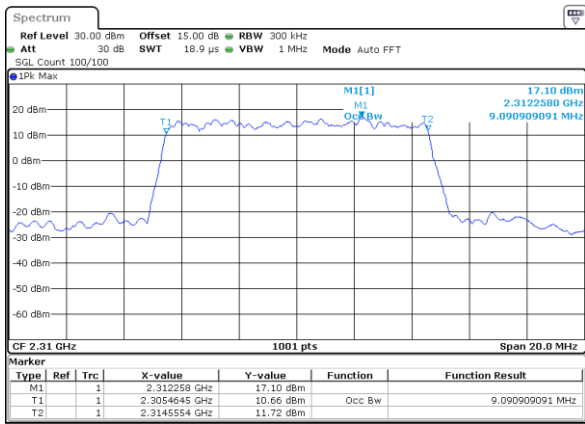

Date: 30 SEP 2017 16:32:19


Middle Channel / 10MHz / 16QAM

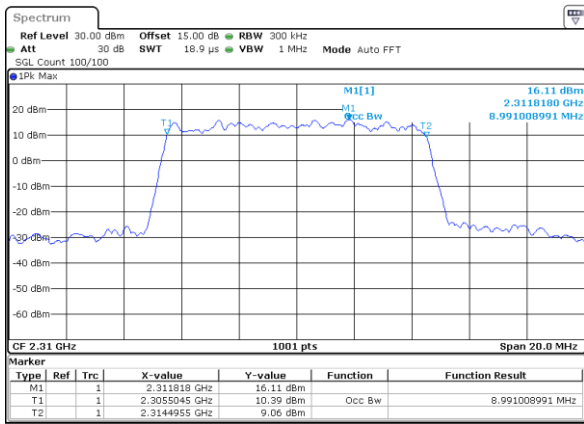


Date: 30 SEP 2017 16:32:29

LTE Band 30


Lowest Channel / 5MHz / 64QAM

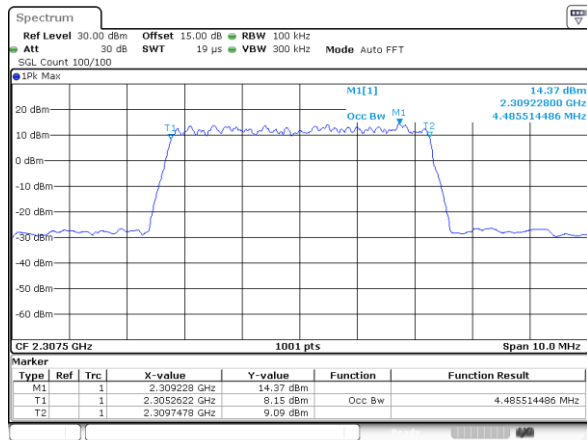


Middle Channel / 5MHz / 64QAM

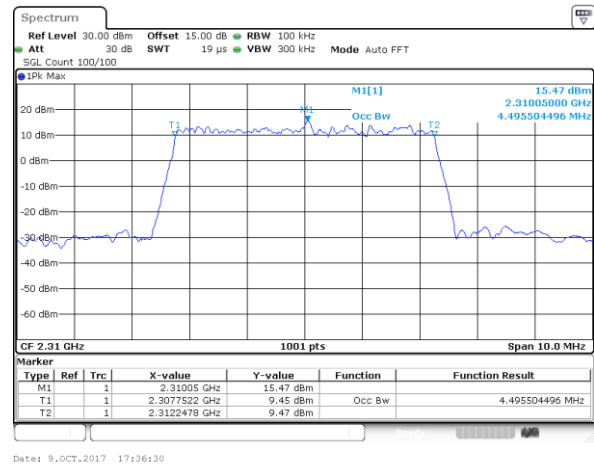

Highest Channel / 5MHz / 64QAM

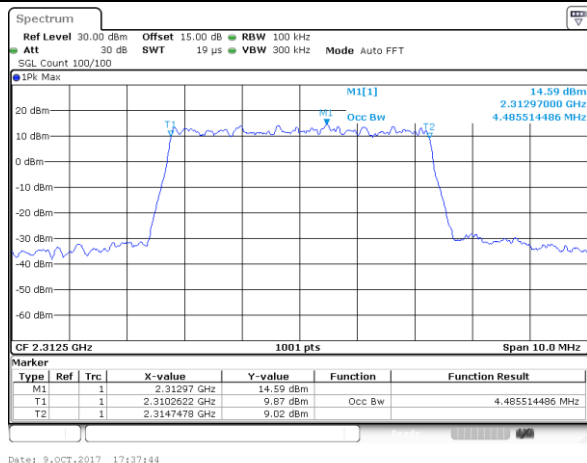


Middle Channel / 10MHz / 64QAM

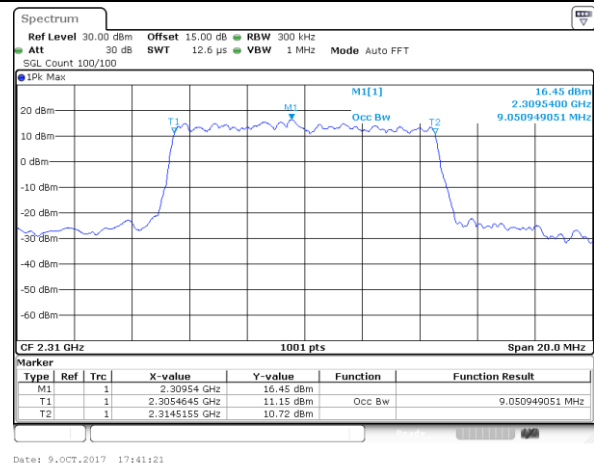


Conducted Band Edge

LTE Band 30 / 5MHz / QPSK


Lowest Band Edge / 1 RB

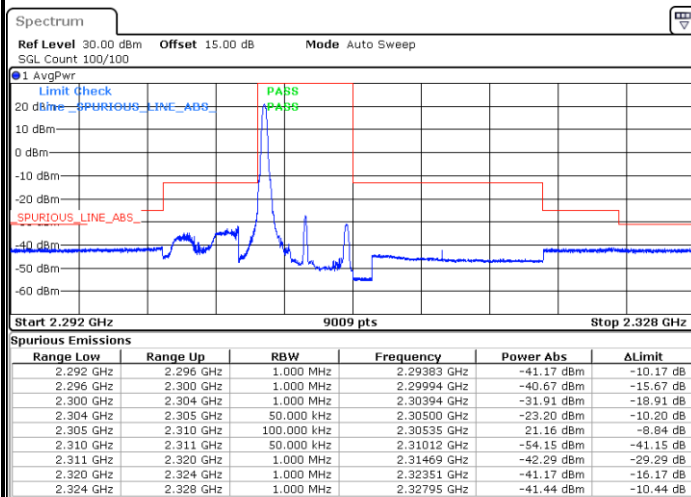


Highest Band Edge / 1 RB

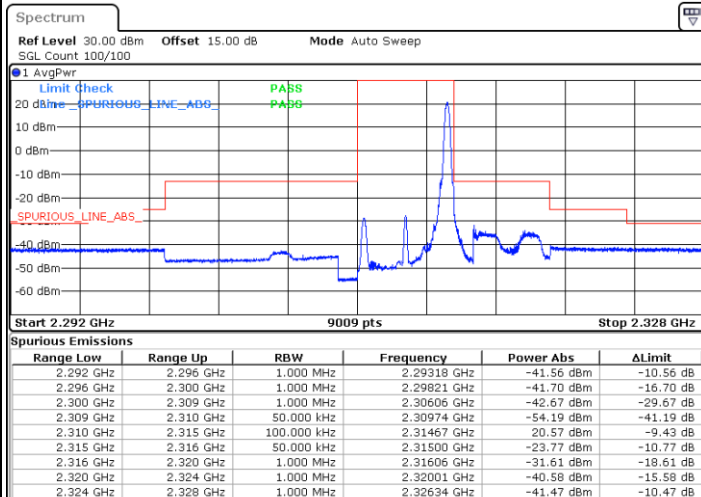

Lowest Band Edge / Full RB

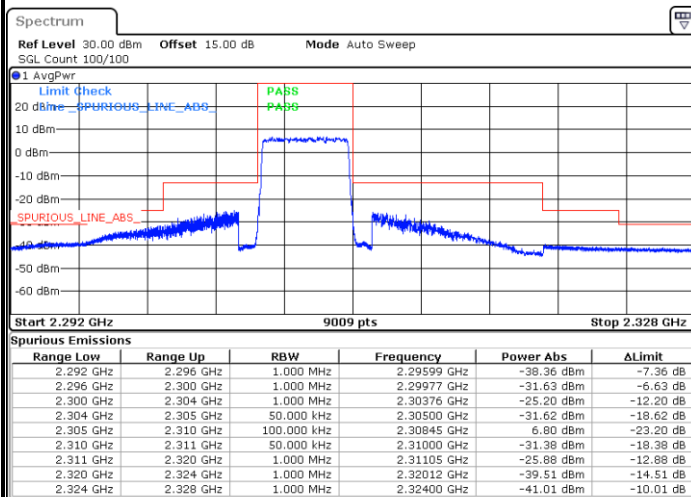


Highest Band Edge / Full RB

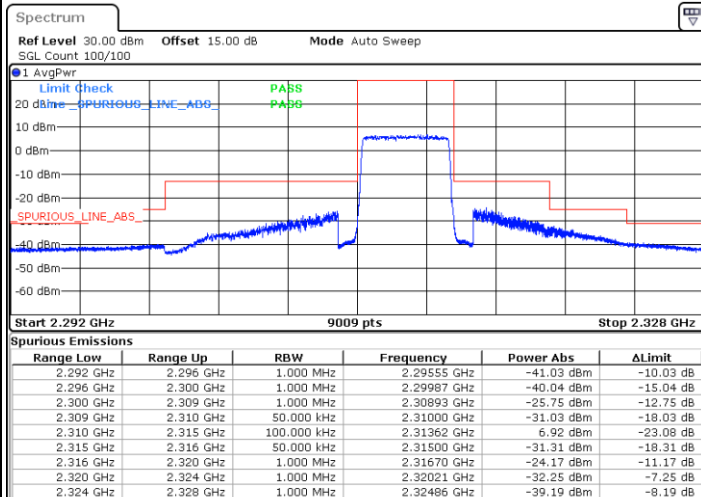


LTE Band 30 / 5MHz / 16QAM

Lowest Band Edge / 1RB

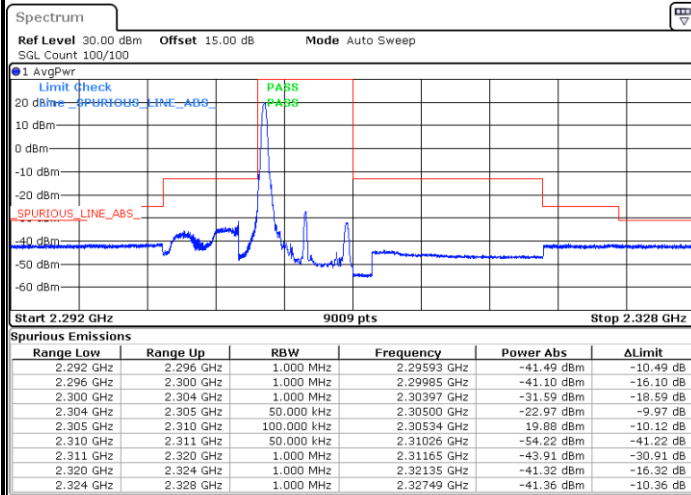


Date: 30 SEP 2017 14:35:32

Highest Band Edge / 1 RB

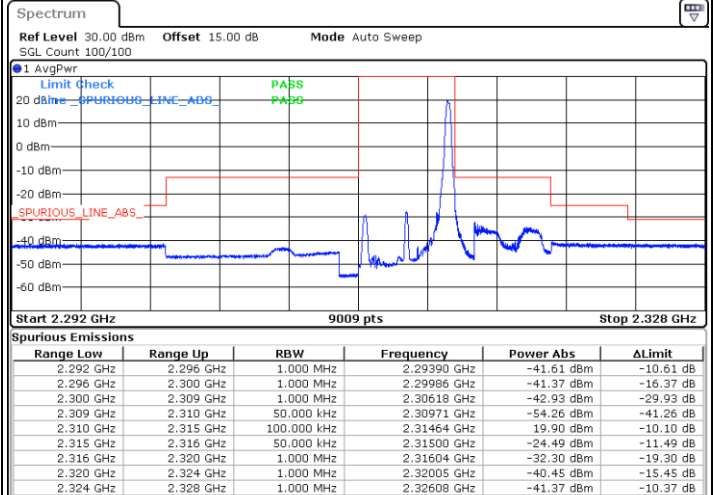


Date: 30 SEP 2017 14:45:02

Lowest Band Edge / Full RB

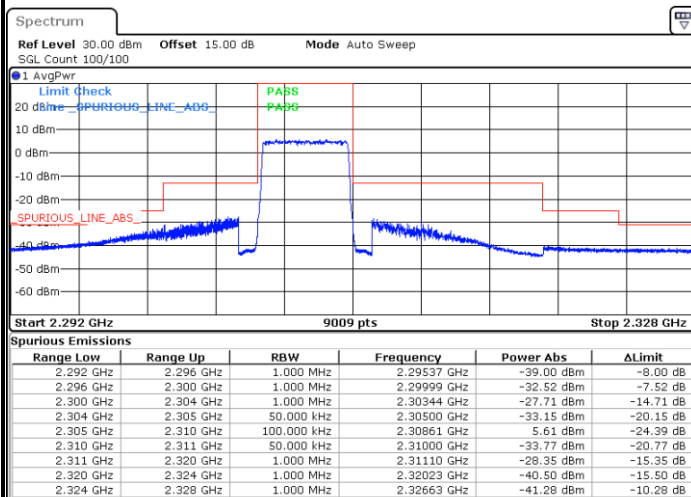

Date: 30 SEP 2017 14:37:51

Highest Band Edge / Full RB

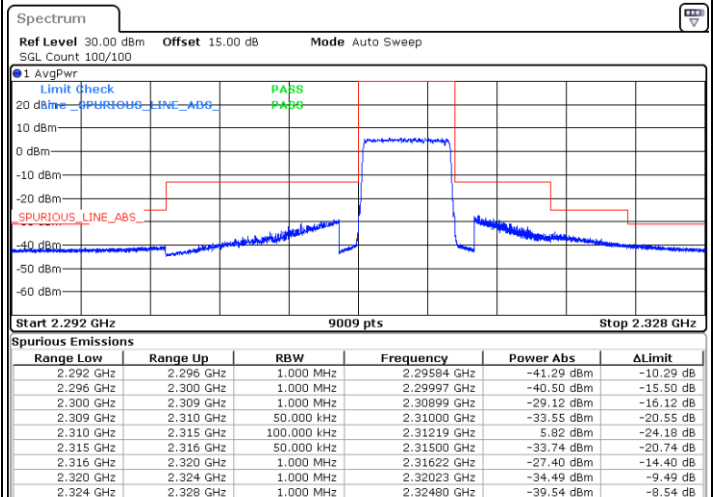


Date: 30 SEP 2017 14:47:21




LTE Band 30 / 10MHz / QPSK

Lowest Band Edge / 1 RB

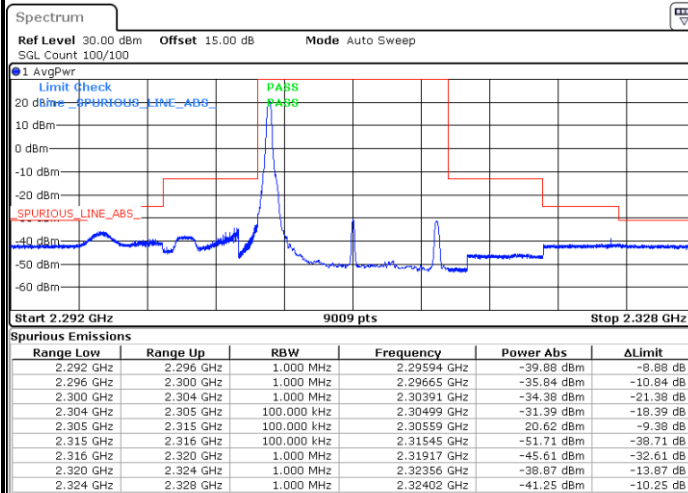


Date: 30 SEP 2017 16:33:57

Highest Band Edge / 1 RB

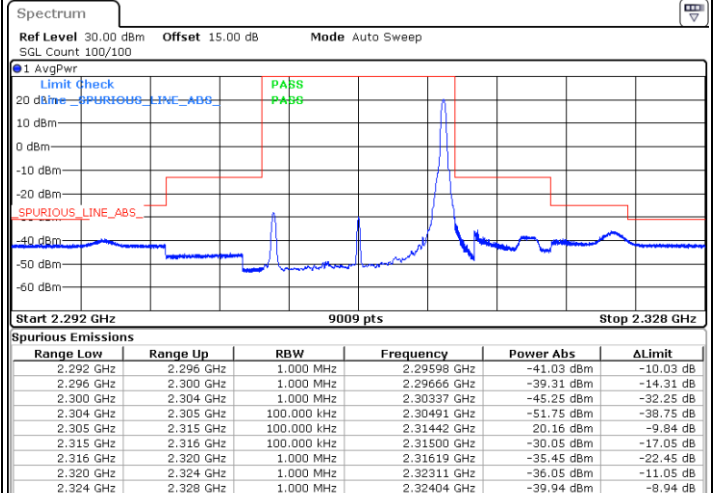

Date: 30 SEP 2017 16:38:35

Band Edge / Full RB

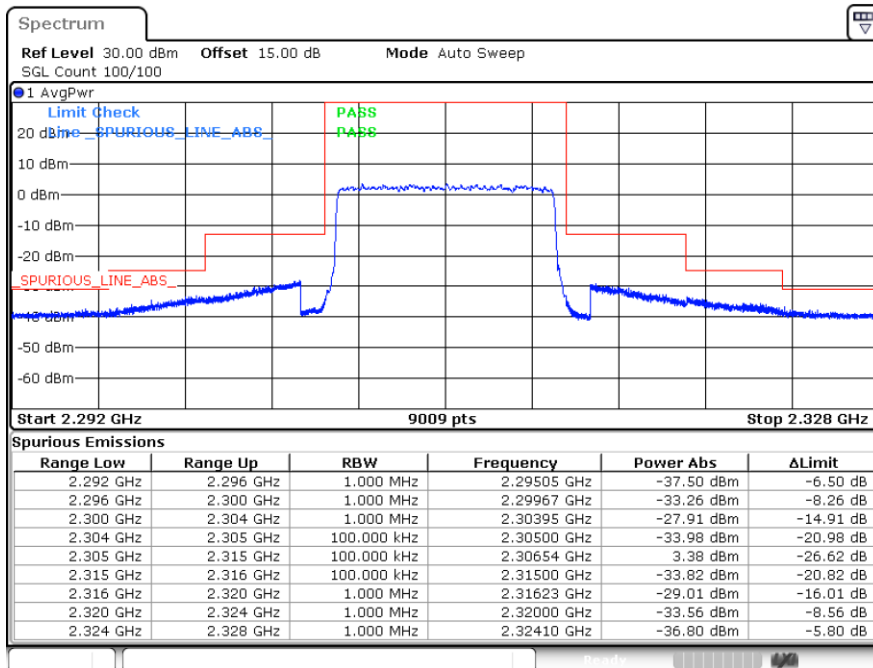


Date: 11 OCT 2017 15:24:04




LTE Band 30 / 10MHz / 16QAM

Lowest Band Edge / 1 RB

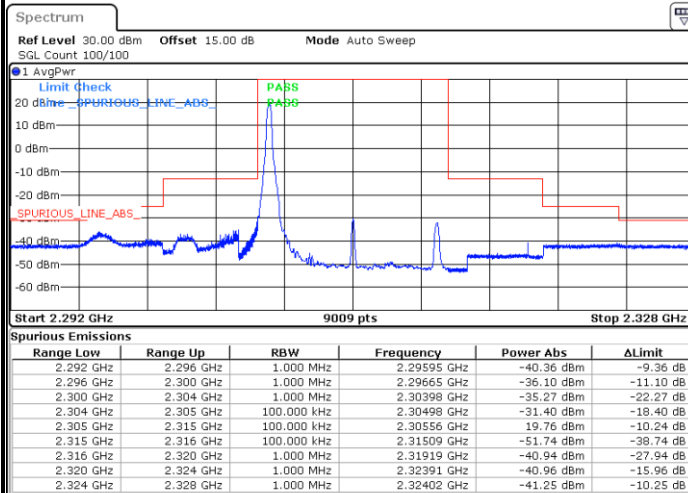


Date: 30.SEP.2017 16:35:07

Highest Band Edge / 1 RB

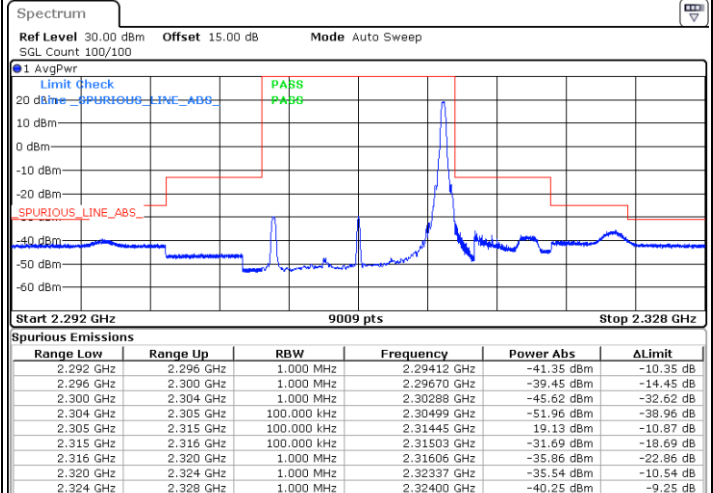

Date: 30.SEP.2017 16:39:44

Band Edge / Full RB

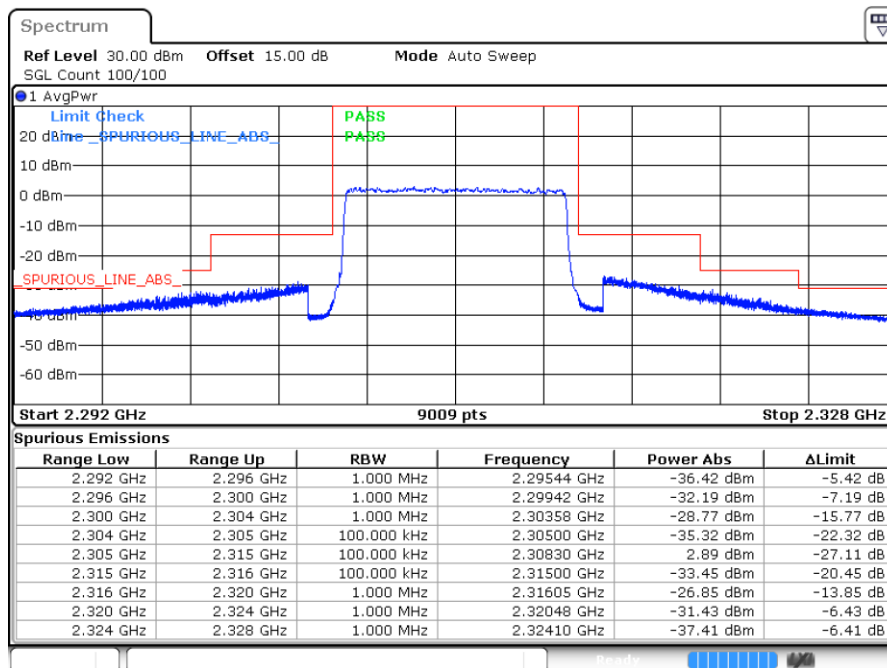


Date: 30.SEP.2017 16:37:25




LTE Band 30 / 5MHz / 64QAM

Lowest Band Edge / 1 RB

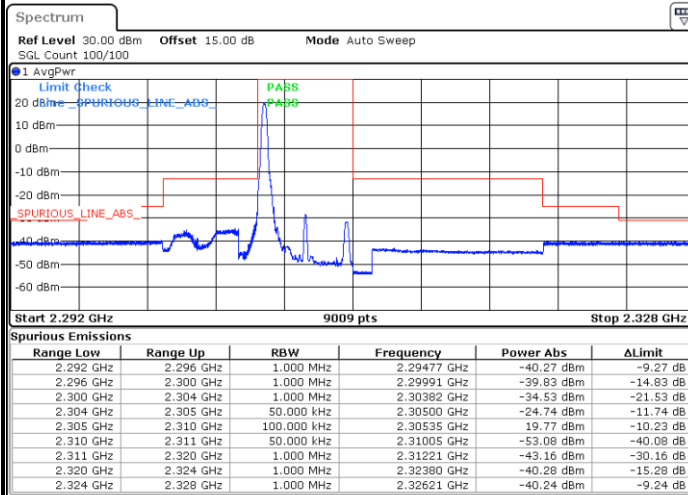


Date: 9.OCT.2017 17:34:14

Highest Band Edge / 1 RB

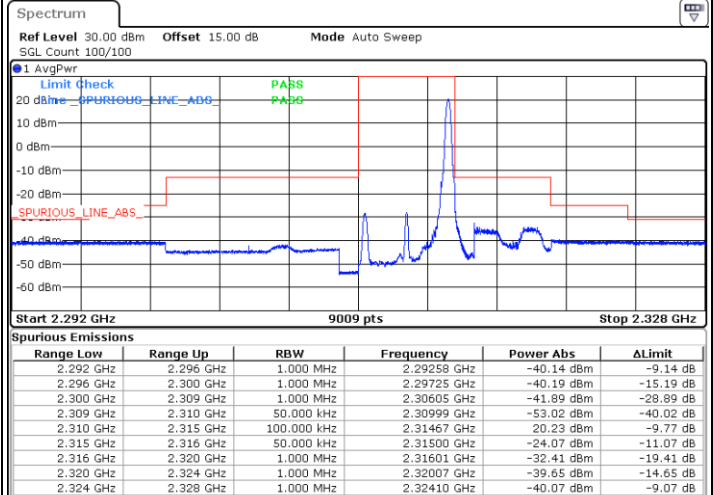


Date: 9.OCT.2017 17:39:05

Lowest Band Edge / Full RB

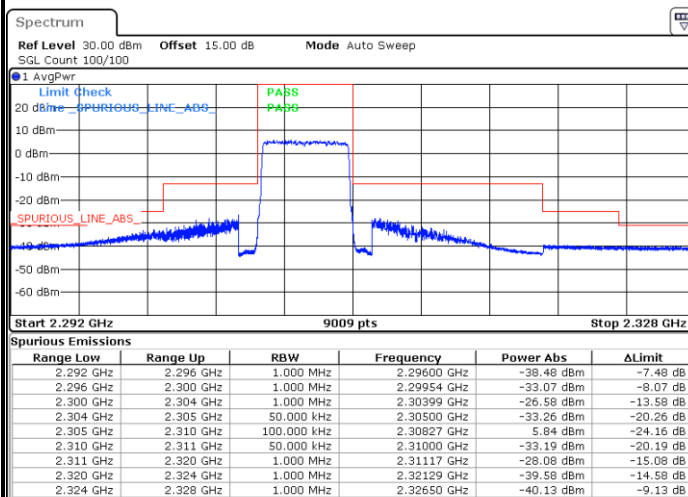

Date: 9.OCT.2017 17:35:26

Highest Band Edge / Full RB

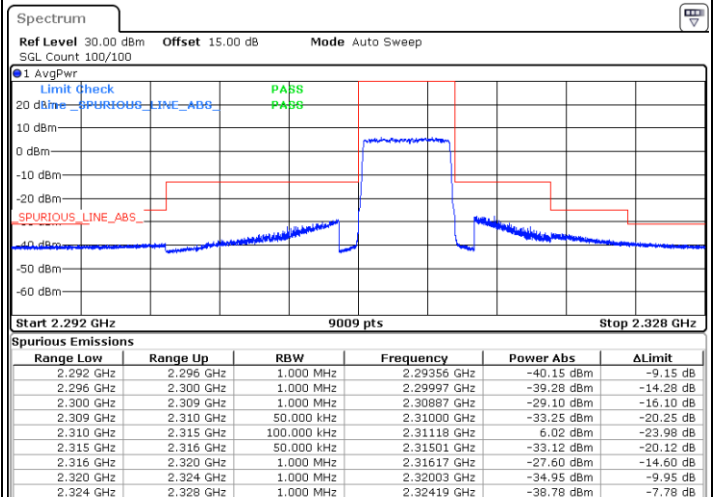


Date: 9.OCT.2017 17:40:16




LTE Band 30 / 10MHz / 64QAM

Band Edge / 1 RB

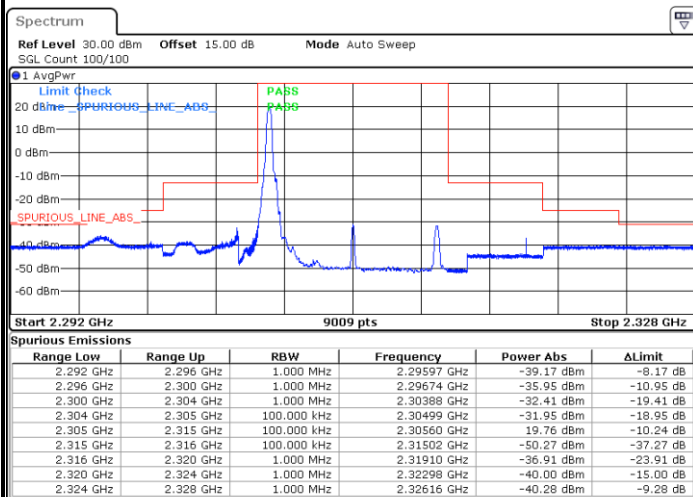


Date: 9.OCT.2017 17:42:42

Band Edge / 1 RB

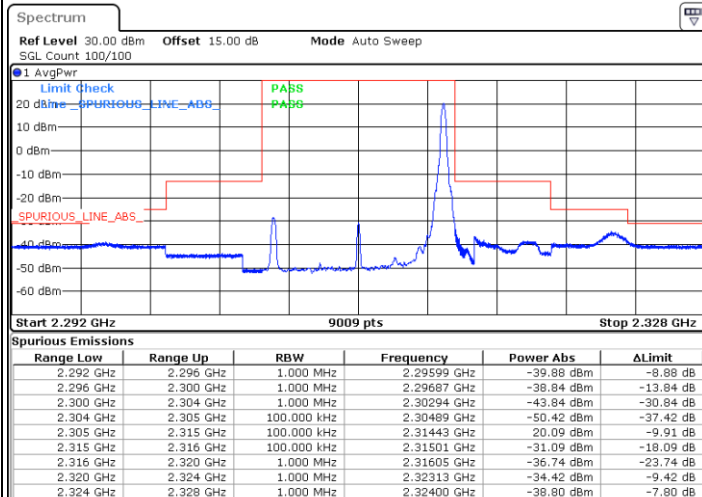

Date: 9.OCT.2017 17:45:05

Band Edge / Full RB

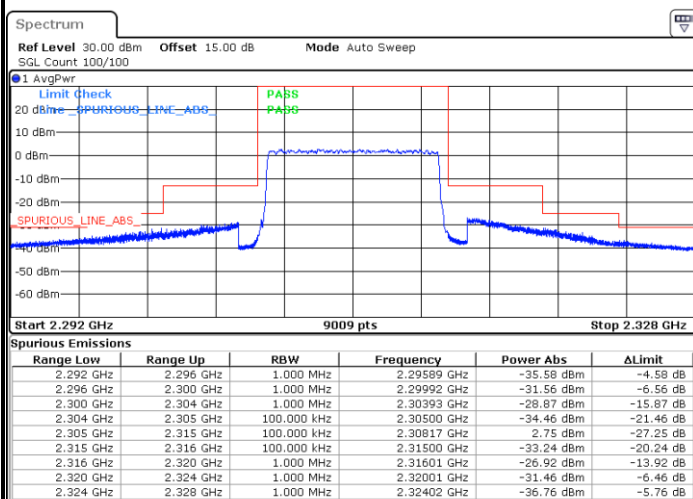


Date: 9.OCT.2017 17:43:53



Conducted Spurious Emission


LTE Band 30 / 5MHz

Lowest Channel / QPSK

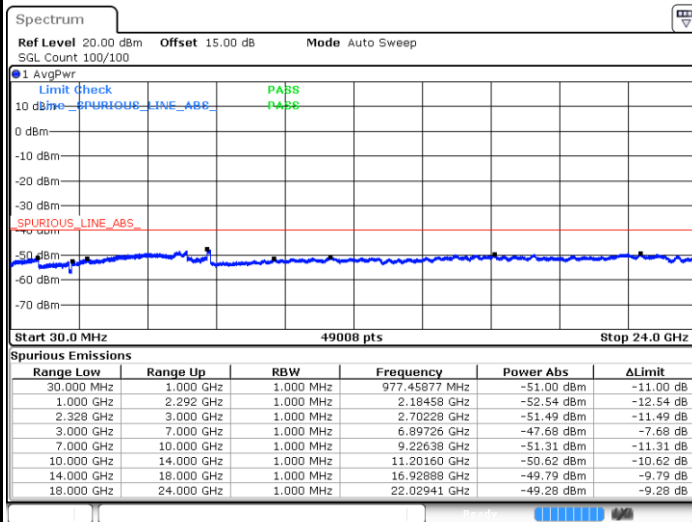


Date: 30 SEP. 2017 16:23:45

Lowest Channel / 16QAM

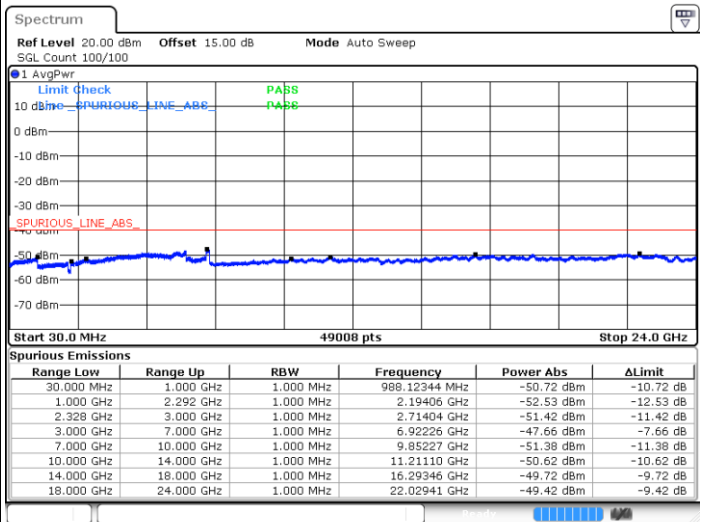


Date: 30 SEP. 2017 16:24:38

Middle Channel / QPSK

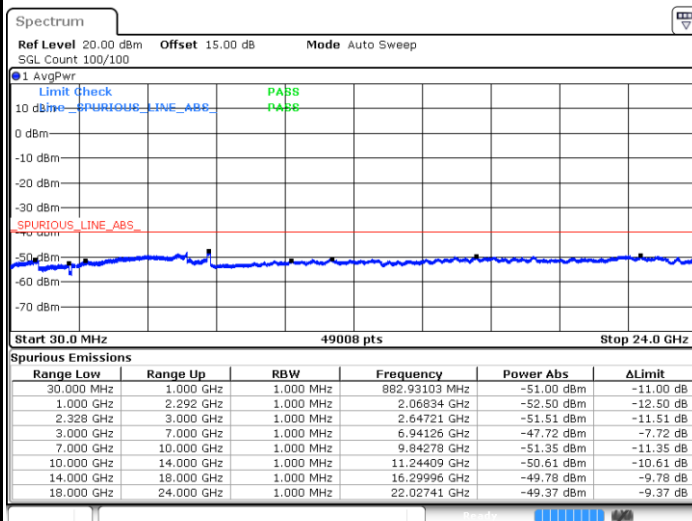

Date: 30 SEP. 2017 16:25:31

Middle Channel / 16QAM

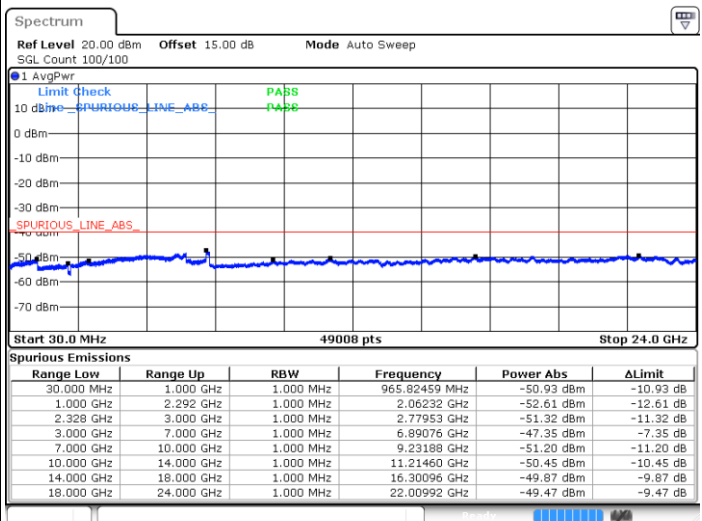


Date: 30 SEP. 2017 16:26:24




LTE Band 30 / 5MHz

Highest Channel / QPSK

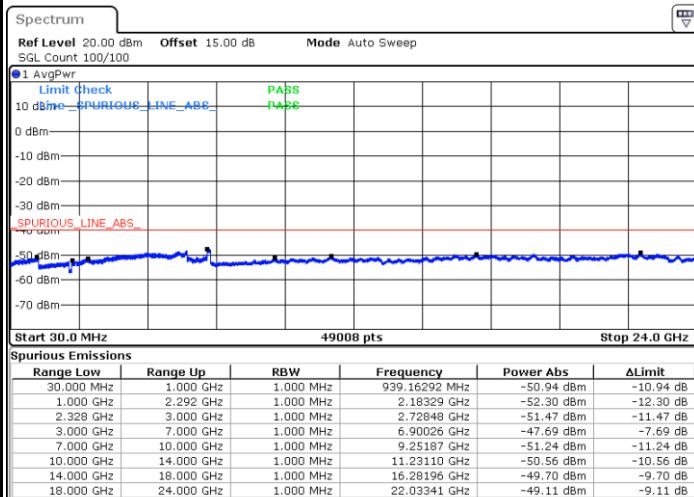

Date: 30.SEP.2017 16:27:18


Highest Channel / 16QAM

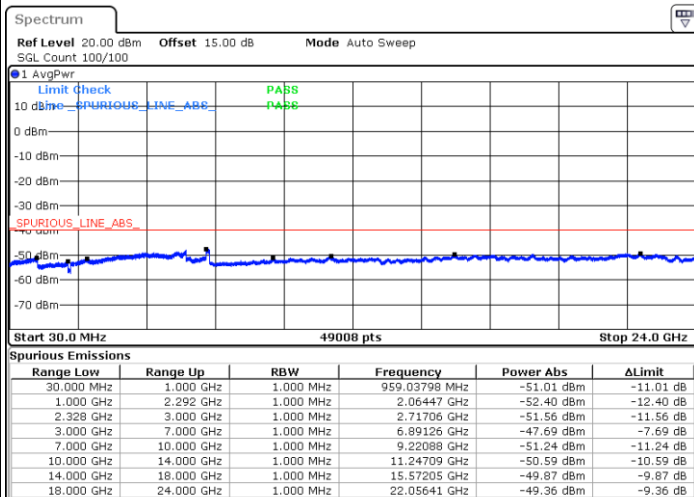

Date: 30.SEP.2017 16:28:11


LTE Band 30 / 10MHz

Middle Channel / QPSK

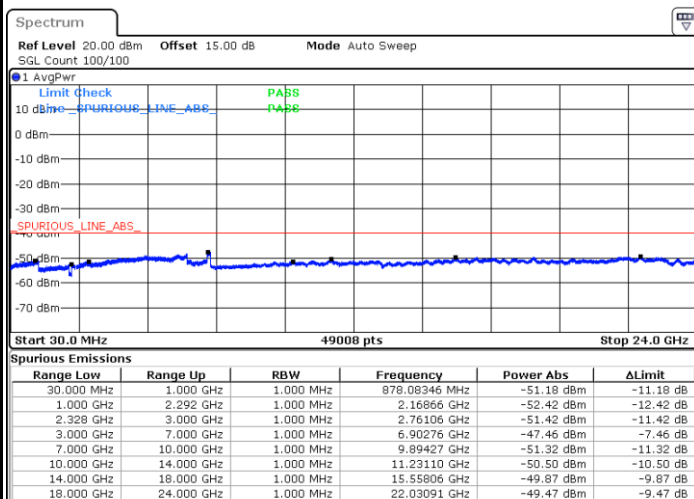

Date: 30.SEP.2017 16:59:00

Middle Channel / 16QAM

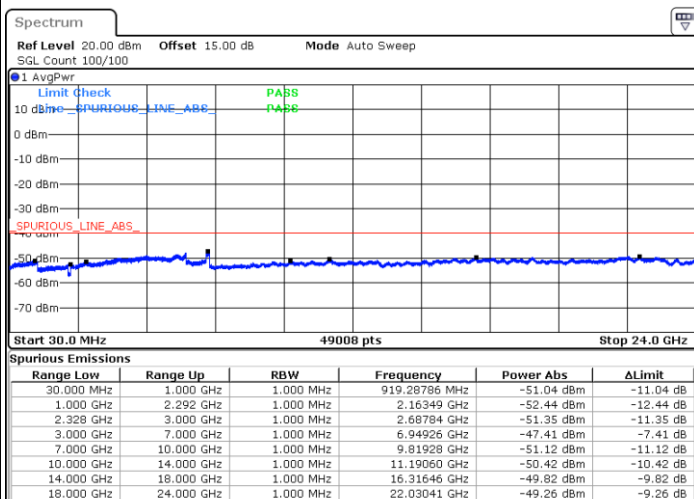


Date: 30.SEP.2017 16:59:53




LTE Band 30 / 5MHz

Lowest Channel / 64QAM

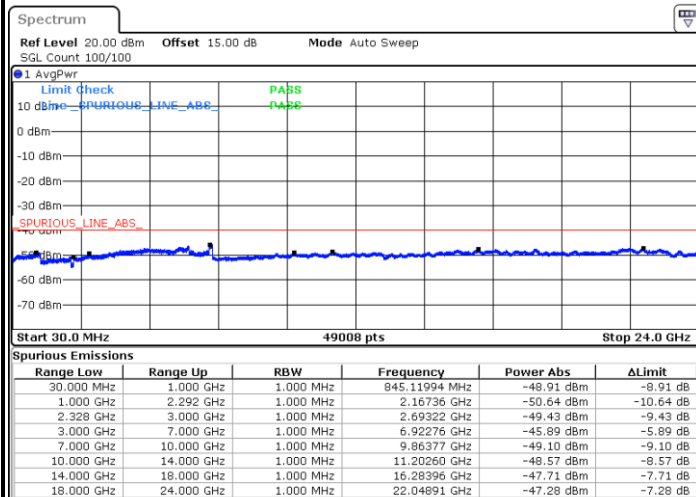


Date: 10.OCT.2017 14:10:53

Middle Channel / 64QAM

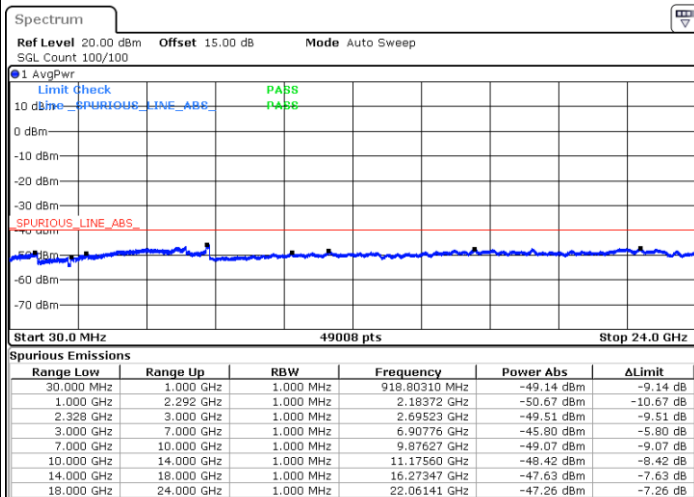

Date: 10.OCT.2017 14:11:44

Highest Channel / 64QAM

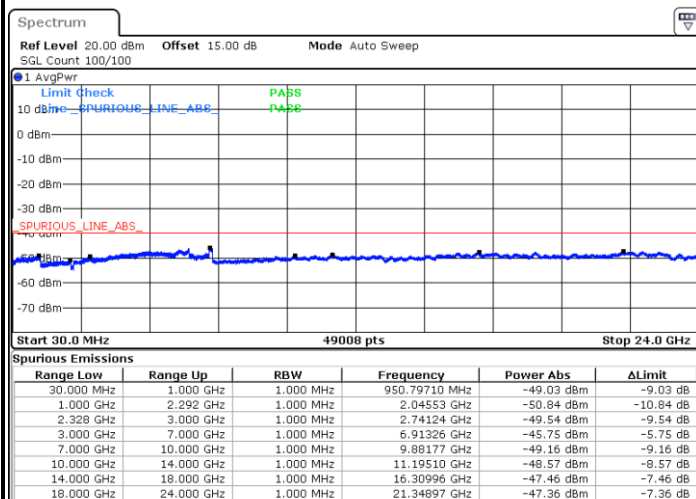


Date: 10.OCT.2017 14:13:03



LTE Band 30 / 10MHz

Middle Channel / 64QAM

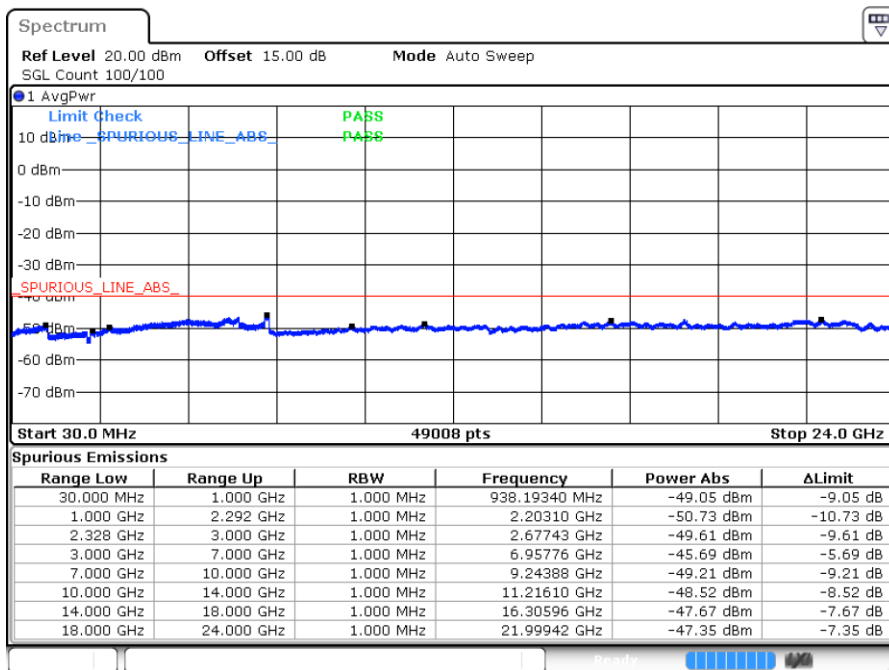

Date: 10.OCT.2017 14:17:58

Frequency Stability

Test Conditions		LTE Band 30 (QPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 10MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0048	PASS
40	Normal Voltage	0.0029	
30	Normal Voltage	0.0004	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0061	
0	Normal Voltage	0.0143	
-10	Normal Voltage	0.0205	
-20	Normal Voltage	0.0219	
-30	Normal Voltage	0.0250	
20	Maximum Voltage	0.0042	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0019	

Note:

1. Normal Voltage =3.9 V. ; Battery End Point (BEP) =3.8 V. ; Maximum Voltage =4.2 V.
2. Note: The frequency fundamental emissions stay within the authorized frequency block.

Appendix B. Test Results of Radiated Test

Radiated Spurious Emission

<Top Antenna>

LTE Band 30 / 5MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4610.50	-60.25	-40	-20.25	-79.22	-67.31	5.64	12.70	H
	6915.75	-56.68	-40	-16.68	-78.75	-60.15	8.23	11.70	H
	9221.18	-52.23	-40	-12.23	-79.31	-56.01	8.12	11.90	H
	4610.50	-59.85	-40	-19.85	-79.38	-66.91	5.64	12.70	V
	6915.75	-56.21	-40	-16.21	-78.83	-59.68	8.23	11.70	V
	9221.18	-52.82	-40	-12.82	-79.13	-56.60	8.12	11.90	V
Middle	4615.50	-59.74	-40	-19.74	-78.67	-66.80	5.64	12.70	H
	6923.25	-56.46	-40	-16.46	-78.53	-59.93	8.23	11.70	H
	9231.18	-52.10	-40	-12.10	-79.21	-55.88	8.12	11.90	H
	4615.50	-59.12	-40	-19.12	-78.61	-66.18	5.64	12.70	V
	6923.25	-56.17	-40	-16.17	-78.79	-59.64	8.23	11.70	V
	9231.18	-53.01	-40	-13.01	-79.35	-56.79	8.12	11.90	V
Highest	4620.50	-59.84	-40	-19.84	-78.77	-66.90	5.64	12.70	H
	6930.75	-56.53	-40	-16.53	-78.72	-60.00	8.23	11.70	H
	9241.18	-52.31	-40	-12.31	-79.44	-56.09	8.12	11.90	H
	4620.50	-59.28	-40	-19.28	-78.77	-66.34	5.64	12.70	V
	6930.75	-56.03	-40	-16.03	-78.75	-59.50	8.23	11.70	V
	9241.18	-52.83	-40	-12.83	-79.21	-56.61	8.12	11.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 30 / 10MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4611.50	-59.56	-40	-19.56	-78.53	-66.62	5.64	12.70	H
	6916.50	-56.79	-40	-16.79	-78.86	-60.26	8.23	11.70	H
	9222.18	-52.52	-40	-12.52	-79.60	-56.30	8.12	11.90	H
	4611.50	-59.28	-40	-19.28	-78.81	-66.34	5.64	12.70	V
	6916.50	-56.10	-40	-16.10	-78.72	-59.57	8.23	11.70	V
	9222.18	-53.11	-40	-13.11	-79.42	-56.89	8.12	11.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

**<Bottom Antenna>**

LTE Band 30 / 5MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4610.68	-59.69	-40	-19.69	-78.66	-66.75	5.64	12.70	H
	6916.02	-56.64	-40	-16.64	-78.71	-60.11	8.23	11.70	H
	9221.36	-52.67	-40	-12.67	-79.75	-56.45	8.12	11.90	H
	4610.68	-58.79	-40	-18.79	-78.32	-65.85	5.64	12.70	V
	6916.02	-56.41	-40	-16.41	-79.03	-59.88	8.23	11.70	V
	9221.36	-53.44	-40	-13.44	-79.75	-57.22	8.12	11.90	V
Middle	4615.68	-59.26	-40	-19.26	-78.19	-66.32	5.64	12.70	H
	6923.52	-56.73	-40	-16.73	-78.80	-60.20	8.23	11.70	H
	9231.36	-52.27	-40	-12.27	-79.38	-56.05	8.12	11.90	H
	4615.68	-58.81	-40	-18.81	-78.3	-65.87	5.64	12.70	V
	6923.52	-56.03	-40	-16.03	-78.65	-59.50	8.23	11.70	V
	9231.36	-52.89	-40	-12.89	-79.23	-56.67	8.12	11.90	V
Highest	4620.68	-60.08	-40	-20.08	-79.01	-67.14	5.64	12.70	H
	6931.02	-56.36	-40	-16.36	-78.55	-59.83	8.23	11.70	H
	9241.36	-51.98	-40	-11.98	-79.11	-55.76	8.12	11.90	H
	4620.68	-58.80	-40	-18.80	-78.29	-65.86	5.64	12.70	V
	6931.02	-56.05	-40	-16.05	-78.77	-59.52	8.23	11.70	V
	9241.36	-52.83	-40	-12.83	-79.21	-56.61	8.12	11.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



LTE Band 30 / 10MHz / QPSK / RB Size 1 Offset 0									
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	4611.18	-58.88	-40	-18.88	-77.85	-65.94	5.64	12.70	H
	6916.77	-56.29	-40	-16.29	-78.36	-59.76	8.23	11.70	H
	9222.36	-51.84	-40	-11.84	-78.92	-55.62	8.12	11.90	H
	4611.18	-58.58	-40	-18.58	-78.11	-65.64	5.64	12.70	V
	6916.77	-55.65	-40	-15.65	-78.27	-59.12	8.23	11.70	V
	9222.36	-52.90	-40	-12.90	-79.21	-56.68	8.12	11.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.