



# FCC RADIO TEST REPORT

FCC ID : GKRGBZ4S  
Equipment : Wireless Device  
Model Name : GBZ4S  
Applicant : Compal Electronics, Inc.  
No. 581-1 & 581, Ruiguang Rd., Nei-hu  
District, Taipei City 114, TAIWAN  
(R.O.C.)  
Standard : FCC 47 CFR Part 2, 22(H)

The product was received on May 04, 2021 and testing was started from Jun. 04, 2021 and completed on Aug. 09, 2021. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI / TIA-603-E and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

**Sporton International Inc. EMC & Wireless Communications Laboratory**

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report.....</b>	<b>3</b>
<b>Summary of Test Result.....</b>	<b>4</b>
<b>1 General Description .....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test .....	5
1.2 Product Specification of Equipment Under Test .....	6
1.3 Modification of EUT .....	6
1.4 Testing Location .....	7
1.5 Applicable Standards .....	7
<b>2 Test Configuration of Equipment Under Test .....</b>	<b>8</b>
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System .....	8
2.3 Support Unit used in test configuration .....	9
2.4 Measurement Results Explanation Example .....	9
2.5 Frequency List of Low/Middle/High Channels .....	9
<b>3 Conducted Test Result .....</b>	<b>10</b>
3.1 Measuring Instruments.....	10
3.2 Conducted Output Power and ERP .....	11
3.3 Peak-to-Average Ratio .....	12
3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement.....	13
3.5 Conducted Band Edge .....	14
3.6 Conducted Spurious Emission .....	15
3.7 Frequency Stability .....	16
<b>4 Radiated Test Items .....</b>	<b>17</b>
4.1 Measuring Instruments.....	17
4.2 Test Setup .....	17
4.3 Test Result of Radiated Test.....	18
4.4 Field Strength of Spurious Radiation Measurement .....	19
<b>5 List of Measuring Equipment.....</b>	<b>20</b>
<b>6 Uncertainty of Evaluation .....</b>	<b>22</b>
<b>Appendix A. Test Results of Conducted Test</b>	
<b>Appendix B. Test Results of Radiated Test</b>	



## History of this test report

Report No.	Version	Description	Issued Date
FG0D2204-01A	01	Initial issue of report	Sep. 27, 2021
FG0D2204-01A	02	1. Revise support unit used in test configuration and system and Radiated Spurious Emission test Item 2. Revise Appendix A1-2 test data 3. Add remark in section 2.1	Dec. 23, 2021

## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
3.3	-	Peak-to-Average Ratio	Reporting only	
3.4	§2.1049 §22.917 (b)	Occupied Bandwidth (WCDMA Band V)	Pass	-
3.5	§2.1051 §22.917 (a)	Band Edge Measurement (WCDMA Band V)	Pass	-
3.6	§2.1051 §22.917 (a)	Conducted Emission (WCDMA Band V)	Pass	-
3.7	§2.1055 §22.355	Frequency Stability Temperature & Voltage	Pass	-
4.4	§2.1053 §22.917 (a)	Field Strength of Spurious Radiation (WCDMA Band V)	Pass	Under limit 44.72 dB at 3393.000 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

**Reviewed by: Avis Chuang**

**Report Producer: Tina Chuang**

# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	Wireless Device
Model Name	GBZ4S
FCC ID	GKRGBZ4S
EUT supports Radios application	WCDMA/HSPA/LTE/NFC (Passive) WLAN 11b/g/n HT20 Bluetooth BR/EDR/LE

**Remark:** The above EUT's information was declared by manufacturer.

EUT Information List	
S/N	Performed Test Item
14151FQEJXR05G	Conducted Measurement ERP/EIRP
15031FQEJSR008 14231FQEJSR00W	Radiated Spurious Emission

## 1.2 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
<b>Tx Frequency</b>	Band V: 826.4 MHz ~ 846.6 MHz
<b>Rx Frequency</b>	Band V: 871.4 MHz ~ 891.6 MHz
<b>Maximum Output Power to Antenna</b>	<b>&lt;Top Antenna&gt;</b> Band V: 24.01 dBm <b>&lt;Bottom Antenna&gt;</b> Band V: 24.30 dBm
<b>Antenna Type</b>	<b>&lt;Top Antenna&gt;</b> : IFA Antenna type <b>&lt;Bottom Antenna&gt;</b> : IFA Antenna type
<b>Type of Modulation</b>	WCDMA: QPSK (Uplink) HSDPA: 16QAM (Downlink) HSUPA: QPSK (Uplink)

### <Top Antenna>

Radio Tech	Band Number	Antenna name	Gain
WCDMA	B5	Ant 0	-14.2

### <Bottom Antenna>

Radio Tech	Band Number	Antenna name	Gain
WCDMA	B5	Ant 1	-14.2

**Remark:** The above EUT's information was declared by manufacturer. Please refer to Comments and Explanations in report summary.

## 1.3 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.4 Testing Location

<b>Test Site</b>	Sporton International Inc. EMC & Wireless Communications Laboratory
<b>Test Site Location</b>	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH03-HY
<b>Test Engineer</b>	Oscar Chi
<b>Temperature</b>	21~24℃
<b>Relative Humidity</b>	51~55%

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
<b>Test Site No.</b>	<b>Sporton Site No.</b> 03CH11-HY (TAF Code: 3786)
<b>Test Engineer</b>	Harvey Guo and Fu Chen
<b>Temperature</b>	18.2~26.2℃
<b>Relative Humidity</b>	53.7~69.4%
<b>Remark</b>	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

## 1.5 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ ANSI / TIA-603-E
- ♦ FCC 47 CFR Part 2, 22(H)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. The TAF code is not including all the FCC KDB listed without accreditation.

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and find Y Plane with Strap 1 as worst plane.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V

All modes, data rates and positions were investigated.


Test modes are chosen to be reported as the worst case configuration below:

Test Modes		
Band	Radiated TCs	Conducted TCs
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link

**Remark:**

1. For Conducted Test Cases, the tests were performed with Bottom Antenna as Worst case.
2. Radiation Spurious Emission full test on EUT with Strap 1 and spot check the worst case with Strap 3 on each antenna.

### 2.2 Connection Diagram of Test System

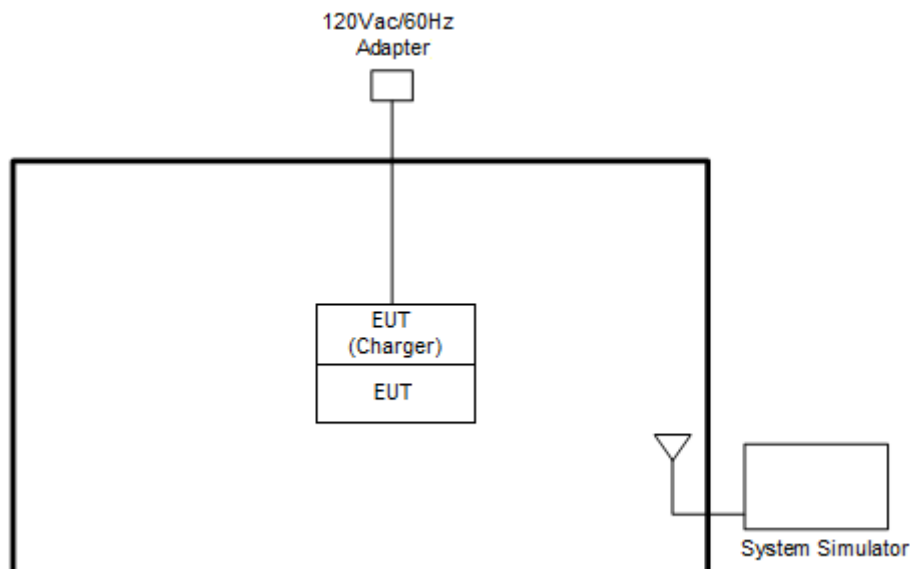



## 2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
2.	Adapter	N/A	N/A	N/A	N/A	N/A
3.	Wireless Device	N/A	G943M	GKRG943M	N/A	Unshielded, 1.0m

## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10 dB attenuator.

Example:

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

## 2.5 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6


### 3 Conducted Test Result

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

##### 3.1.1 Test Setup


##### 3.1.2 Conducted Output Power

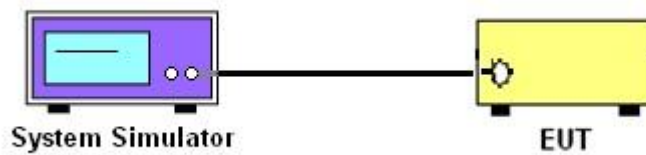

##### 3.1.3 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

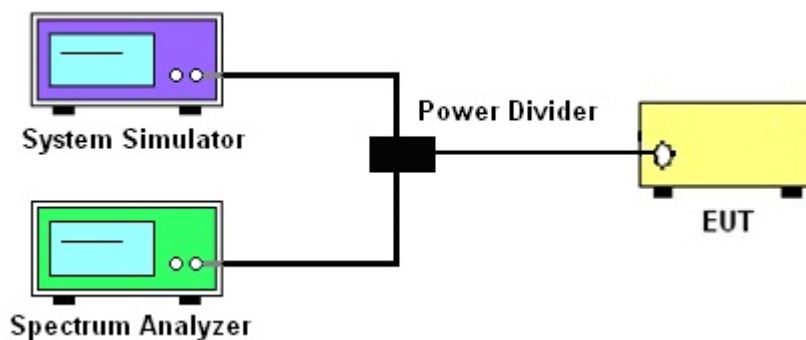

##### 3.1.4 Frequency Stability

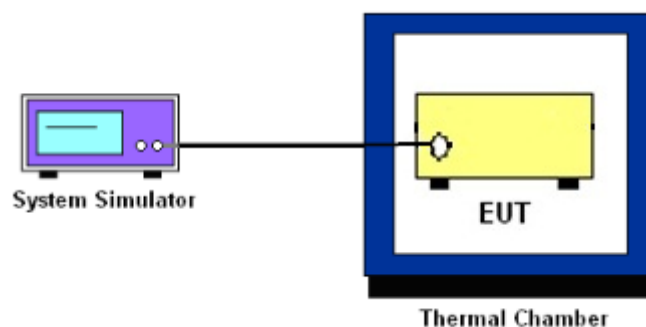

##### 3.1.5 Test Result of Conducted Test

Please refer to Appendix A.

## 3.2 Conducted Output Power and ERP

### 3.2.1 Description of the Conducted Output Power and ERP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

### 3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.



### **3.3 Peak-to-Average Ratio**

#### **3.3.1 Description of the PAR Measurement**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

#### **3.3.2 Test Procedures**

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. Set EUT to transmit at maximum output power.
3. When the duty cycle is less than 98%, then signal gating will be implemented on the spectrum analyzer by triggering from the system simulator.
4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer.
5. Record the maximum PAPR level associated with a probability of 0.1%.

### 3.4 99% Occupied Bandwidth and 26dB Bandwidth Measurement

#### 3.4.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.4.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.  
(This is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## **3.5 Conducted Band Edge**

### **3.5.1 Description of Conducted Band Edge Measurement**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **3.5.2 Test Procedures**

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
3. The band edges of low and high channels for the highest RF powers were measured.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
5. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## **3.6 Conducted Spurious Emission**

### **3.6.1 Description of Conducted Spurious Emission Measurement**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### **3.6.2 Test Procedures**

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.  
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)

### 3.7 Frequency Stability

#### 3.7.1 Description of Frequency Stability Measurement

22.355

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

#### 3.7.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  steps up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

#### 3.7.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.




## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


For radiated test below 30MHz

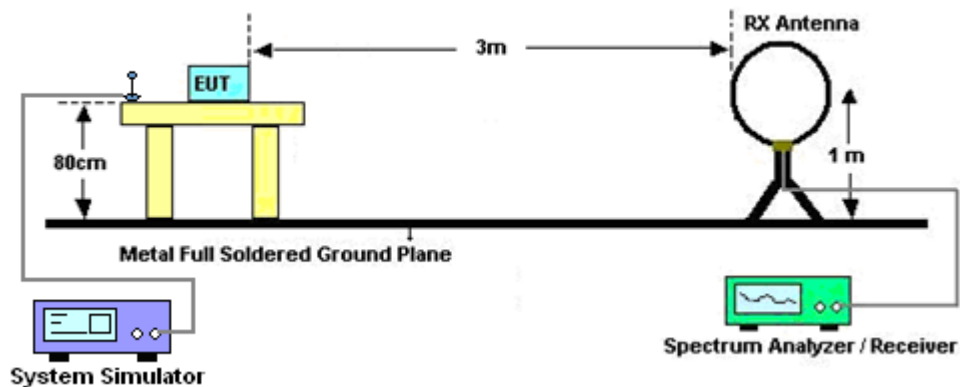

For radiated test from 30MHz to 1GHz

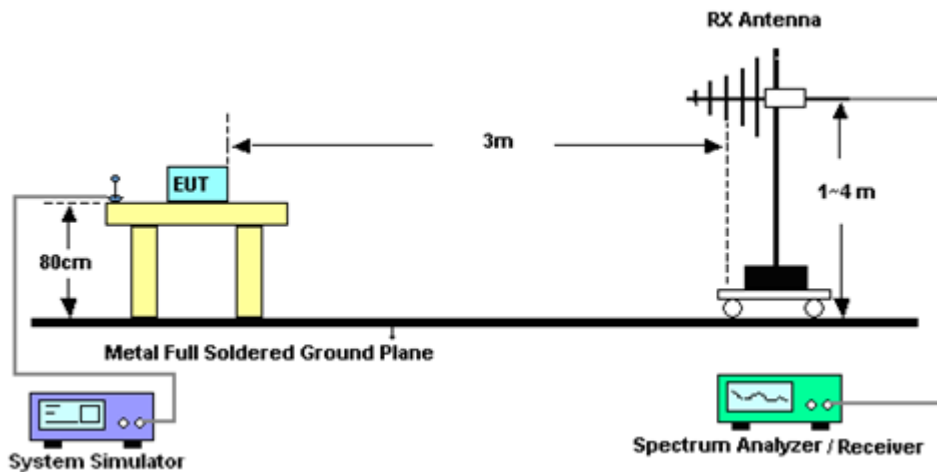

For radiated test above 1GHz

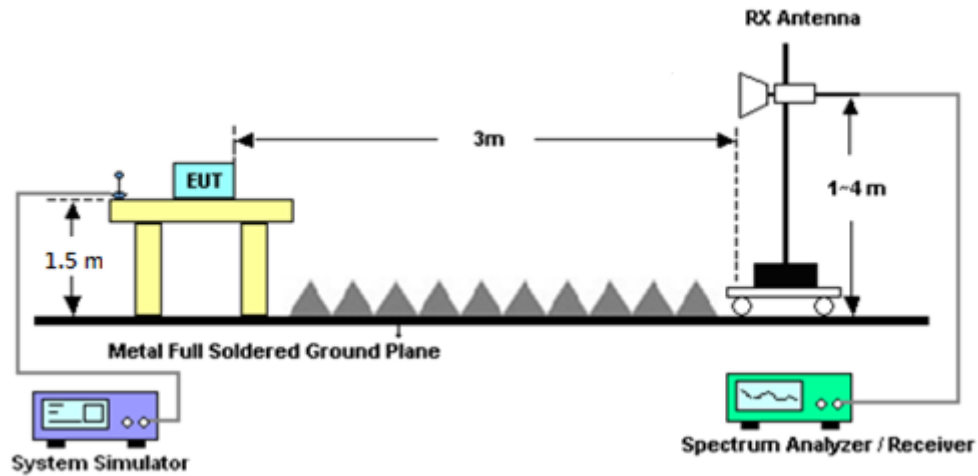

### 4.3 Test Result of Radiated Test

Please refer to Appendix B.

**Note:**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

## 4.4 Field Strength of Spurious Radiation Measurement

### 4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI / TIA-603-E Section 2.2.12.

1. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
7. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
8. Take the record of output power at antenna port.
9. Repeat step 7 to step 8 for another polarization.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
13. The limit line is derived from  $43 + 10\log(P)$  dB below the transmitter power P(Watts)



## 5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	9120D-1326	1GHz ~ 18GHz	Nov. 03, 2020	Jul. 16, 2021~ Aug. 09, 2021	Nov. 02, 2021	Radiation (03CH11-HY)
Horn Antenna	SCHWARZB ECK	BBHA 9120 D	9120D-1212	1GHz ~ 18GHz	May 18, 2021	Jul. 16, 2021~ Aug. 09, 2021	May 17, 2022	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D & N-6-06	35414 & AT-N0602	30MHz~1GHz	Oct. 11, 2020	Jul. 16, 2021~ Aug. 09, 2021	Oct. 10, 2021	Radiation (03CH11-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N1 D01N-06	54682 & AT-N0603	30MHz~1GHz	Sep. 25, 2020	Jul. 16, 2021~ Aug. 09, 2021	Sep. 24, 2021	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Jan. 04, 2021	Jul. 16, 2021~ Aug. 09, 2021	Jan. 03, 2022	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Nov. 12, 2020	Jul. 16, 2021~ Aug. 09, 2021	Nov. 11, 2021	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 02, 2020	Jul. 16, 2021~ Aug. 09, 2021	Dec. 01, 2021	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 23, 2020	Jul. 16, 2021~ Aug. 09, 2021	Oct. 22, 2021	Radiation (03CH11-HY)
Signal Generator	Rohde & Schwarz	SMF100A	101107	100kHz~40GHz	Dec. 14, 2020	Jul. 16, 2021~ Aug. 09, 2021	Dec. 13, 2021	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jul. 16, 2021~ Aug. 09, 2021	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jul. 16, 2021~ Aug. 09, 2021	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jul. 16, 2021~ Aug. 09, 2021	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jul. 16, 2021~ Aug. 09, 2021	N/A	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	9kHz-30MHz	Mar. 11, 2021	Jul. 16, 2021~ Aug. 09, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz-40GHz	Mar. 11, 2021	Jul. 16, 2021~ Aug. 09, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY9837/4PE	30M-18G	Mar. 11, 2021	Jul. 16, 2021~ Aug. 09, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY4274/2	30MHz-40GHz	Mar. 11, 2021	Jul. 16, 2021~ Aug. 09, 2021	Mar. 10, 2022	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-900-100 0-15000-60SS	SN12	1GHz High Pass Filter	Nov. 05, 2020	Jul. 16, 2021~ Aug. 09, 2021	Nov. 04, 2021	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-30 00-18000-60SS	SN3	3GHz High Pass Filter	Sep. 14, 2020	Jul. 16, 2021~ Aug. 09, 2021	Sep. 13, 2021	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP140325	N/A	Nov. 18, 2020	Jul. 16, 2021~ Aug. 09, 2021	Nov. 17, 2021	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	Testo	608-H1	34893241	N/A	Mar. 03, 2021	Jun. 04, 2021~ Jun. 24, 2021	Mar. 02, 2022	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 03, 2020	Jun. 04, 2021~ Jun. 24, 2021	Sep. 02, 2021	Conducted (TH03-HY)
Temperature Chamber	ESPEC	SH-641	92013720	-40℃ ~90℃	Sep. 14, 2020	Jun. 04, 2021~ Jun. 24, 2021	Sep. 13, 2021	Conducted (TH03-HY)
Programmable Power Supply	GW Instek	PSS-2005	EL890001	1V~20V 0.5A~4A	Oct. 05, 2020	Jun. 04, 2021~ Jun. 24, 2021	Oct. 04, 2021	Conducted (TH03-HY)
Base Station(Measure)	Rohde & Schwarz	CMU200	117997	GSM / GPRS / WCDMA / CDMA	Sep. 22, 2020	Jun. 04, 2021~ Jun. 24, 2021	Sep. 21, 2021	Conducted (TH03-HY)
Power Divider	Warison	WCOU-0.4-26.5 S-20	#A	N/A	Nov. 03, 2020	Jun. 04, 2021~ Jun. 24, 2021	Nov. 02, 2021	Conducted (TH03-HY)



## 6 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.09 dB
----------------------------------------------------------------------------	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	3.56 dB
----------------------------------------------------------------------------	---------



## Appendix A. Test Results of Conducted Test

### Conducted Output Power(Average power) & ERP / EIRP

<Top Antenna>

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -14.2 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	24.01	23.92	23.80	7.66	0.0058
HSDPA Subtest-1	22.08	21.99	21.86		
HSDPA Subtest-2	22.06	22.02	21.83		
HSDPA Subtest-3	21.15	21.10	20.98		
HSDPA Subtest-4	20.10	19.98	19.84		
HSUPA Subtest-1	20.62	20.55	20.40		
HSUPA Subtest-2	18.07	18.10	17.86		
HSUPA Subtest-3	20.10	19.99	19.91		
HSUPA Subtest-4	18.12	17.97	17.87		
HSUPA Subtest-5	21.90	21.70	21.70		
Limit	ERP < 7W			Result	Pass



**<Bottom Antenna>**

WCDMA Band V Maximum Average Power [dBm] (GT - LC = -14.2 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	24.61	24.50	24.42		
HSDPA Subtest-1	22.68	22.55	22.46		
HSDPA Subtest-2	22.68	22.59	22.51		
HSDPA Subtest-3	21.78	21.68	21.57		
HSDPA Subtest-4	20.69	20.62	20.45		
HSUPA Subtest-1	21.27	21.14	21.05		
HSUPA Subtest-2	18.71	18.61	18.39		
HSUPA Subtest-3	20.69	20.62	20.48		
HSUPA Subtest-4	18.65	18.64	18.50		
HSUPA Subtest-5	21.60	21.52	21.97		
Limit	ERP < 7W			Result	Pass




**A2. WCDMA****Peak-to-Average Ratio**

Mode	WCDMA Band V	Limit: 13dB
Mod.	RMC 12.2Kbps	Result
Lowest CH	2.96	PASS
Middle CH	3.00	
Highest CH	2.80	


## WCDMA Band V (RMC 12.2Kbps)

### Lowest Channel

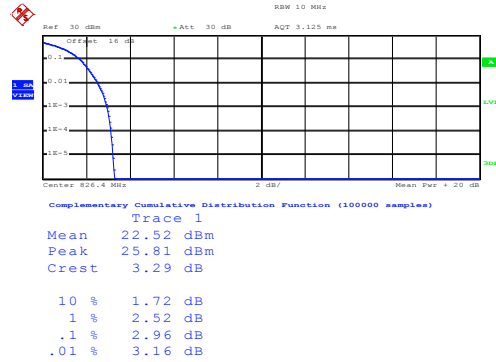


Date: 4.JUN.2021 14:10:48

### Middle Channel

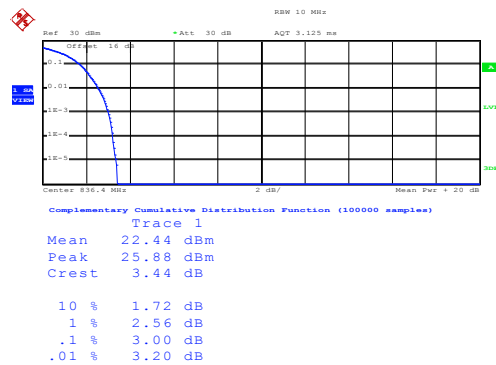

Date: 4.JUN.2021 14:11:05

### Highest Channel

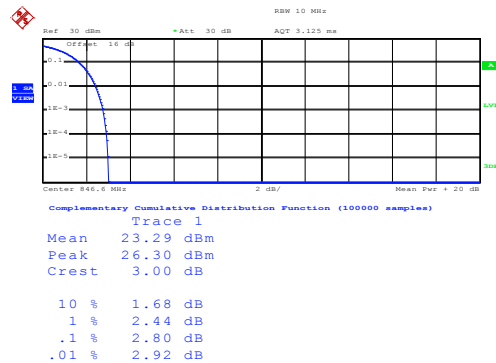

Date: 4.JUN.2021 14:11:21



**26dB Bandwidth**

Mode	WCDMA Band V
Mod.	RMC 12.2Kbps
Lowest CH	4.73
Middle CH	4.73
Highest CH	4.71




• RBW 100 kHz Marker 1 [71.1] 19.52 dBm  
 • VBW 300 kHz  
 SWT 5 ms 823.51000000 MHz

0 dBm  
 -10  
 -20  
 -30  
 -40  
 -50  
 -60  
 -70


820.000000 MHz 821.000000 MHz 822.000000 MHz 823.000000 MHz 824.000000 MHz 825.000000 MHz 826.000000 MHz 827.000000 MHz 828.000000 MHz

Center 820.0 MHz 1 MHz/ Span 10 MHz

## Middle Channel

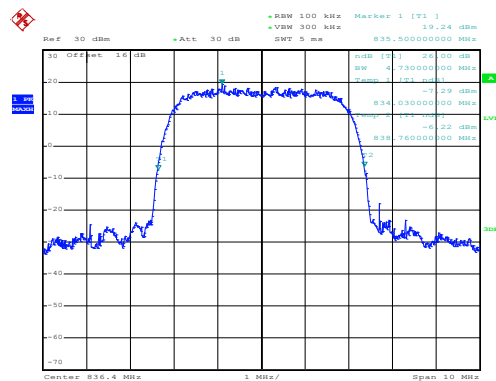

### Highest Channel

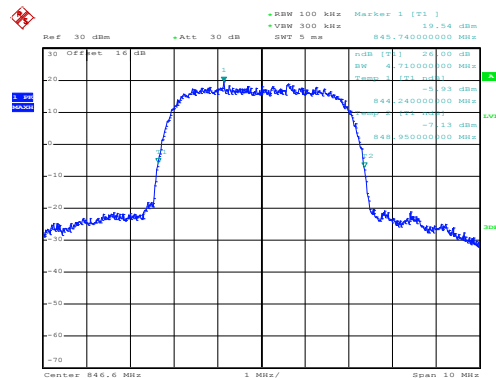


Page Number : A2-4 of 9




## Occupied Bandwidth


Mode	WCDMA Band V
Mod.	RMC 12.2Kbps
Lowest CH	4.15
Middle CH	4.16
Highest CH	4.13

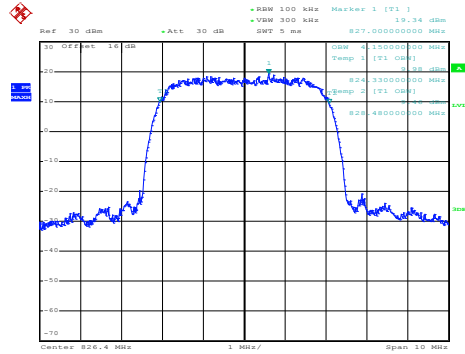**WCDMA Band V (RMC 12.2Kbps)**
**Lowest Channel**


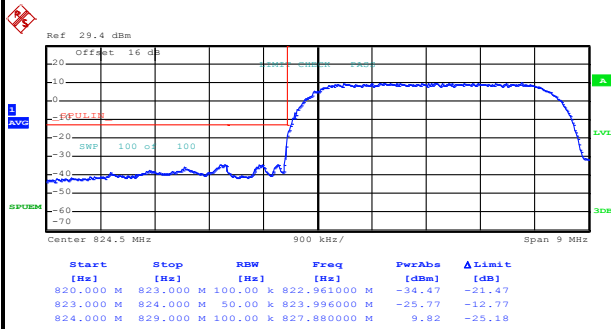
Date: 4.JUN.2021 14:03:16

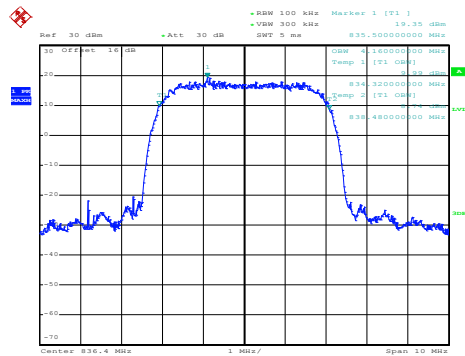**Middle Channel**


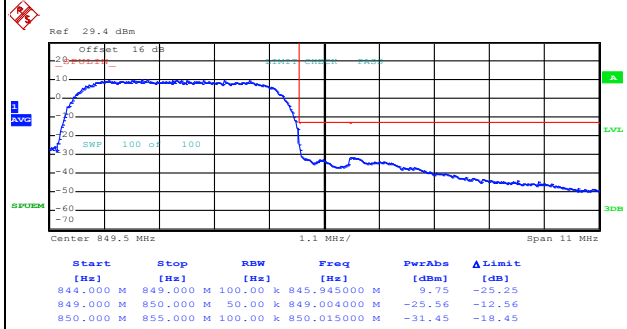
Date: 4.JUN.2021 14:03:55

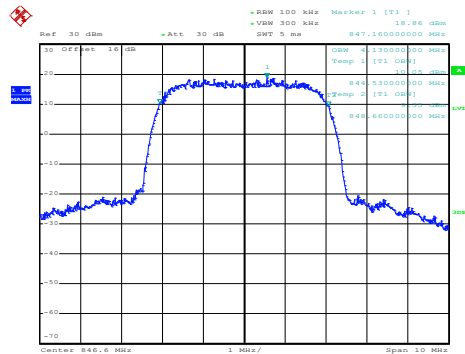**Highest Channel**


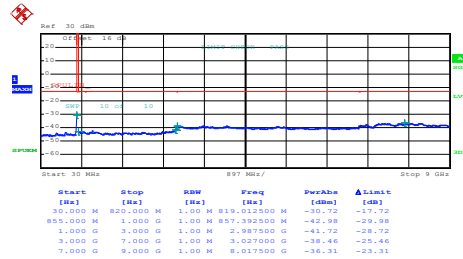
Date: 4.JUN.2021 14:04:32

**Conducted Band Edge****WCDMA Band V (RMC 12.2Kbps)****Lowest Band Edge**


Date: 4.JUN.2021 14:07:27

**Highest Band Edge**


Date: 4.JUN.2021 14:10:19

**Conducted Spurious Emission****WCDMA Band V (RMC 12.2Kbps)****Lowest Channel**

Date: 4.JUN.2021 14:00:19

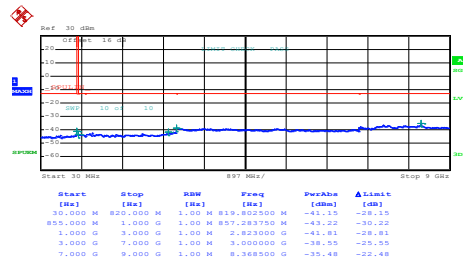**Middle Channel**

Date: 4.JUN.2021 14:01:16

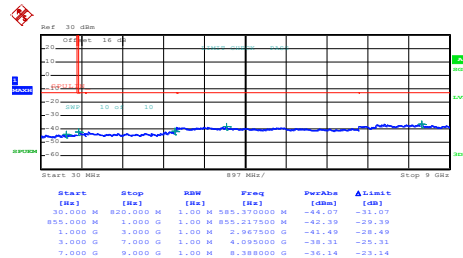**Highest Channel**

Date: 4.JUN.2021 14:02:11



## Frequency Stability

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0048	PASS
40	Normal Voltage	0.0036	
30	Normal Voltage	0.0024	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0024	
0	Normal Voltage	0.0024	
-10	Normal Voltage	0.0012	
-20	Normal Voltage	0.0012	
-30	Normal Voltage	0.0012	
20	Maximum Voltage	0.0024	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0024	

**Note:**

1. Normal Voltage = 3.85V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.3 V
2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.



## Appendix B. Test Results of Radiated Test

&lt;Top Antenna&gt;

&lt;EUT with Strap 1&gt;

### WCDMA 850

WCDMA 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1653	-63.44	-13	-50.44	-73.47	-70.4	0.53	9.64	H
	2480	-58.95	-13	-45.95	-72.58	-66.93	0.65	10.78	H
	3306	-59.17	-13	-46.17	-75.65	-68.28	0.76	12.02	H
									H
									H
	1653	-63.80	-13	-50.80	-73.54	-70.76	0.53	9.64	V
	2480	-60.46	-13	-47.46	-74.58	-68.44	0.65	10.78	V
	3306	-59.05	-13	-46.05	-75.48	-68.16	0.76	12.02	V
									V
									V
Middle	1672	-62.07	-13	-49.07	-72.24	-69.07	0.53	9.68	H
	2508	-61.08	-13	-48.08	-74.69	-69.08	0.66	10.80	H
	3344	-58.86	-13	-45.86	-75.42	-68.08	0.76	12.13	H
									H
									H
	1672	-62.16	-13	-49.16	-71.93	-69.16	0.53	9.68	V
	2508	-60.50	-13	-47.50	-74.51	-68.5	0.66	10.80	V
	3344	-59.07	-13	-46.07	-75.42	-68.29	0.76	12.13	V
									V
									V



Highest	1696	-60.58	-13	-47.58	-71.04	-67.63	0.53	9.73	H
	2544	-57.77	-13	-44.77	-71.44	-65.78	0.67	10.83	H
	3393	-57.72	-13	-44.72	-74.38	-67.08	0.77	12.28	H
									H
									H
	1696	-61.73	-13	-48.73	-71.55	-68.78	0.53	9.73	V
	2544	-59.27	-13	-46.27	-73.31	-67.28	0.67	10.83	V
	3393	-58.53	-13	-45.53	-74.76	-67.89	0.77	12.28	V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



&lt;EUT with Strap 3&gt;

**WCDMA 850**

WCDMA 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Highest	1696	-61.77	-13	-48.77	-72.23	-68.82	0.53	9.73	H
	2544	-58.96	-13	-45.96	-72.63	-66.97	0.67	10.83	H
	3393	-57.90	-13	-44.90	-74.56	-67.26	0.77	12.28	H
									H
									H
	1696	-62.53	-13	-49.53	-72.35	-69.58	0.53	9.73	V
	2544	-59.55	-13	-46.55	-73.59	-67.56	0.67	10.83	V
	3393	-58.33	-13	-45.33	-74.56	-67.69	0.77	12.28	V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



&lt;Bottom Antenna&gt;

&lt;EUT with Strap 1&gt;

**WCDMA 850**

WCDMA 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1653	-63.06	-13	-50.06	-73.09	-70.02	0.53	9.64	H
	2480	-58.47	-13	-45.47	-72.1	-66.45	0.65	10.78	H
	3304	-59.08	-13	-46.08	-75.56	-68.18	0.76	12.01	H
									H
									H
	1653	-63.49	-13	-50.49	-73.23	-70.45	0.53	9.64	V
	2480	-59.76	-13	-46.76	-73.88	-67.74	0.65	10.78	V
	3304	-59.26	-13	-46.26	-75.69	-68.36	0.76	12.01	V
									V
									V
Middle	1672	-62.02	-13	-49.02	-72.19	-69.02	0.53	9.68	H
	2504	-60.34	-13	-47.34	-73.95	-68.34	0.66	10.80	H
	3344	-58.85	-13	-45.85	-75.41	-68.07	0.76	12.13	H
									H
									H
	1672	-63.35	-13	-50.35	-73.12	-70.35	0.53	9.68	V
	2504	-58.25	-13	-45.25	-72.26	-66.25	0.66	10.80	V
	3344	-59.61	-13	-46.61	-75.96	-68.83	0.76	12.13	V
									V
									V



Highest	1696	-59.43	-13	-46.43	-69.89	-66.48	0.53	9.73	H
	2544	-59.09	-13	-46.09	-72.76	-67.1	0.67	10.83	H
	3392	-59.06	-13	-46.06	-75.72	-68.42	0.77	12.28	H
									H
									H
	1696	-60.91	-13	-47.91	-70.73	-67.96	0.53	9.73	V
	2544	-59.84	-13	-46.84	-73.88	-67.85	0.67	10.83	V
	3392	-59.29	-13	-46.29	-75.52	-68.65	0.77	12.28	V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



&lt;EUT with Strap 3&gt;

**WCDMA 850**

WCDMA 850									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Over Limit ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1672	-62.86	-13	-49.86	-73.03	-69.86	0.53	9.68	H
	2504	-60.02	-13	-47.02	-73.63	-68.02	0.66	10.80	H
	3344	-58.26	-13	-45.26	-74.82	-67.48	0.76	12.13	H
									H
									H
	1672	-62.74	-13	-49.74	-72.51	-69.74	0.53	9.68	V
	2504	-59.17	-13	-46.17	-73.18	-67.17	0.66	10.80	V
	3344	-58.63	-13	-45.63	-74.98	-67.85	0.76	12.13	V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

—————THE END—————