





EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 2/TX A Mode 5280MHz/POE/Integral Antenna		
Phase:	Horizontal		



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	624.6100	46.13	-7.06	39.07	46.00	-6.93	peak	
2		749.7400	37.28	-5.30	31.98	46.00	-14.02	peak	
3		1000.000	35.76	-0.54	35.22	54.00	-18.78	peak	
4		375.3200	36.15	-10.56	25.59	46.00	-20.41	peak	
5		300.6300	35.29	-10.95	24.34	46.00	-21.66	peak	
6		76.5600	40.27	-16.06	24.21	40.00	-15.79	peak	

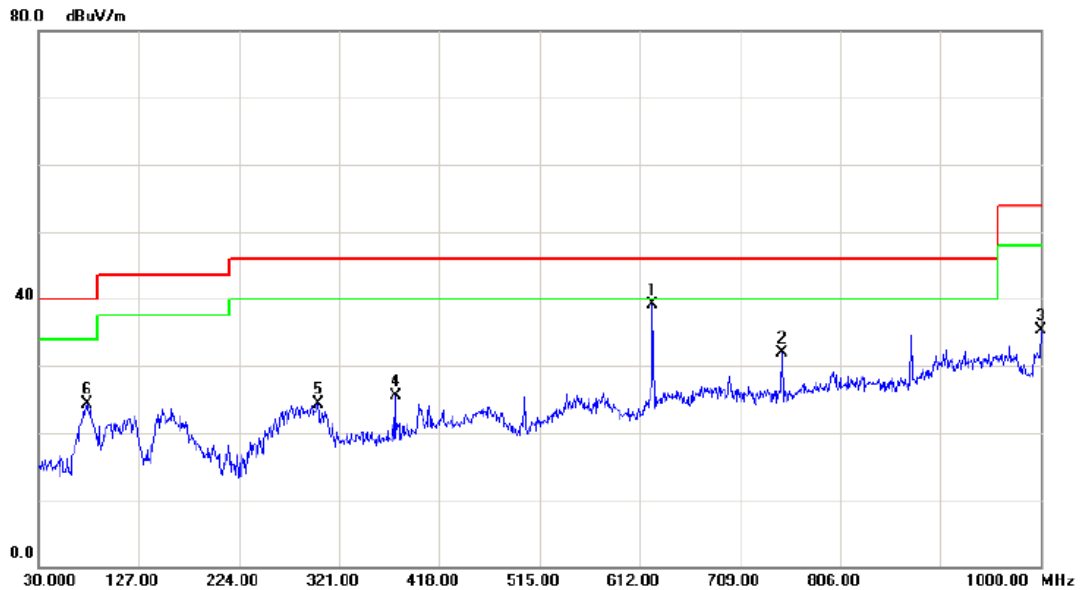


EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 2/TX A Mode 5320MHz/POE/Integral Antenna		
Phase:	Vertical		

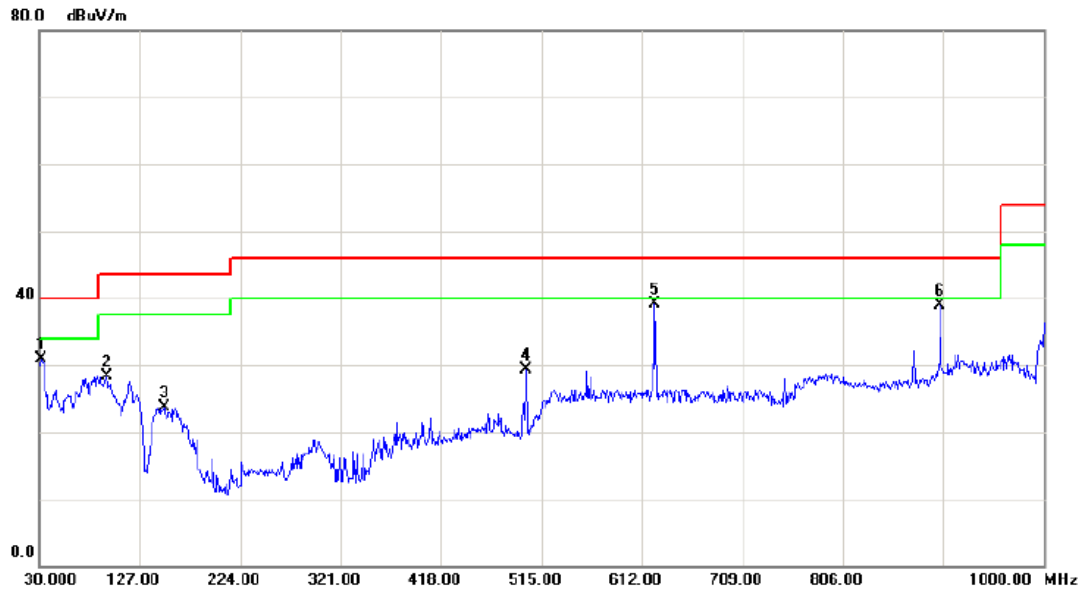

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.69	-14.86	30.83	40.00	-9.17	peak	
2		94.9900	45.21	-16.87	28.34	43.50	-15.16	peak	
3		150.2800	37.17	-13.51	23.66	43.50	-19.84	peak	
4		500.4500	39.84	-10.50	29.34	46.00	-16.66	peak	
5	*	624.6100	46.20	-7.06	39.14	46.00	-6.86	peak	
6		900.0900	38.19	0.63	38.82	46.00	-7.18	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 2/TX A Mode 5320MHz/POE/Integral Antenna		
Phase:	Horizontal		

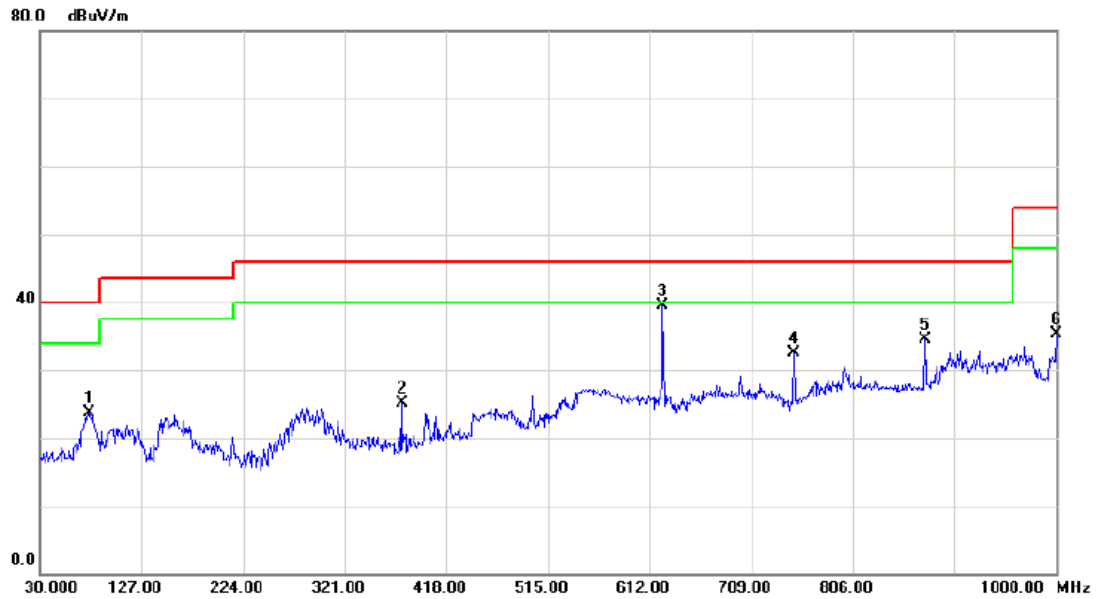

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		76.5600	39.77	-16.06	23.71	40.00	-16.29	peak	
2		375.3200	35.65	-10.56	25.09	46.00	-20.91	peak	
3	*	624.6100	46.63	-7.06	39.57	46.00	-6.43	peak	
4		749.7400	37.78	-5.30	32.48	46.00	-13.52	peak	
5		874.8700	36.26	-1.78	34.48	46.00	-11.52	peak	
6		1000.000	35.76	-0.54	35.22	54.00	-18.78	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5500MHz/POE/Integral Antenna		
Phase:	Vertical		

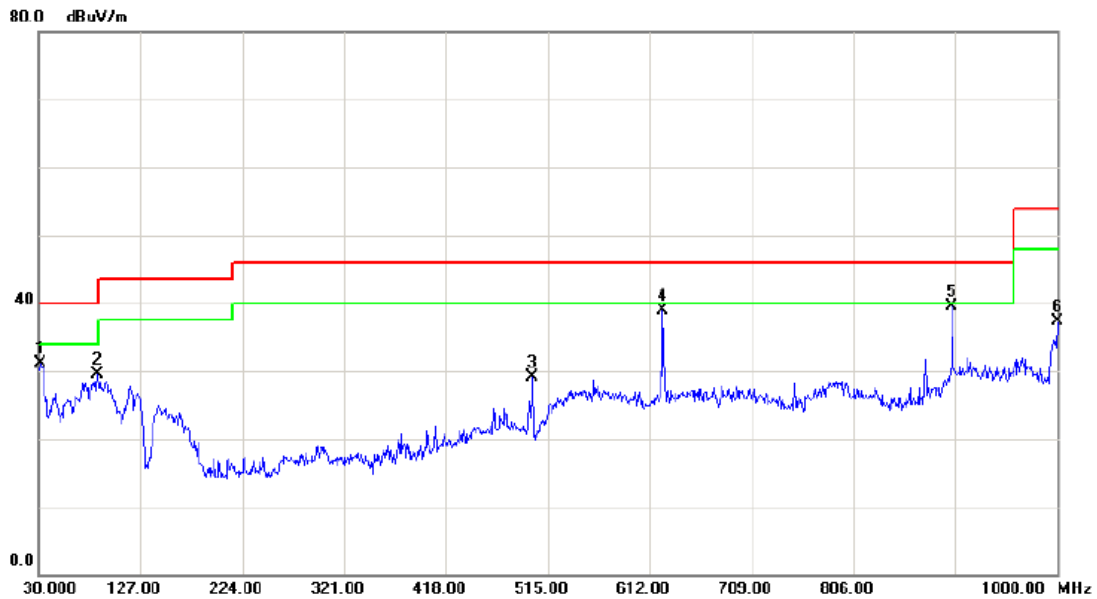

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.95	-14.86	31.09	40.00	-8.91	peak	
2		86.2600	46.29	-16.78	29.51	40.00	-10.49	peak	
3		500.4500	39.59	-10.50	29.09	46.00	-16.91	peak	
4		624.6100	45.96	-7.06	38.90	46.00	-7.10	peak	
5	*	900.0900	38.95	0.63	39.58	46.00	-6.42	peak	
6		1000.000	37.89	-0.54	37.35	54.00	-16.65	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5500MHz/POE/Integral Antenna		
Phase:	Horizontal		

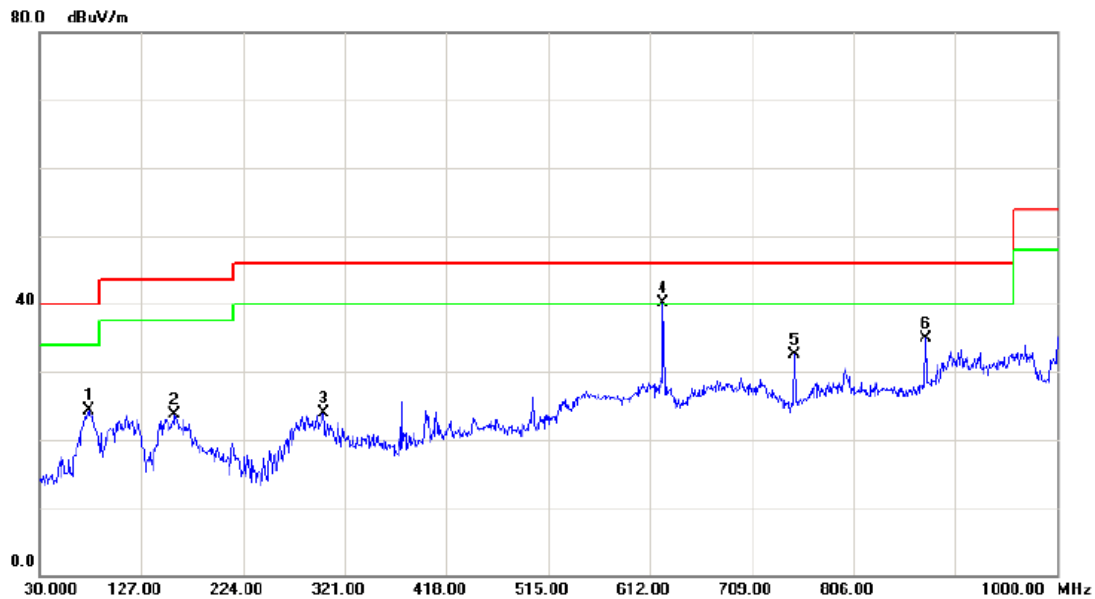

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		76.5600	40.27	-16.06	24.21	40.00	-15.79	peak	
2		159.0100	36.57	-12.83	23.74	43.50	-19.76	peak	
3		300.6300	34.79	-10.95	23.84	46.00	-22.16	peak	
4	*	624.6100	47.13	-7.06	40.07	46.00	-5.93	peak	
5		749.7400	37.78	-5.30	32.48	46.00	-13.52	peak	
6		874.8700	36.76	-1.78	34.98	46.00	-11.02	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5580MHz/POE/Integral Antenna		
Phase:	Vertical		

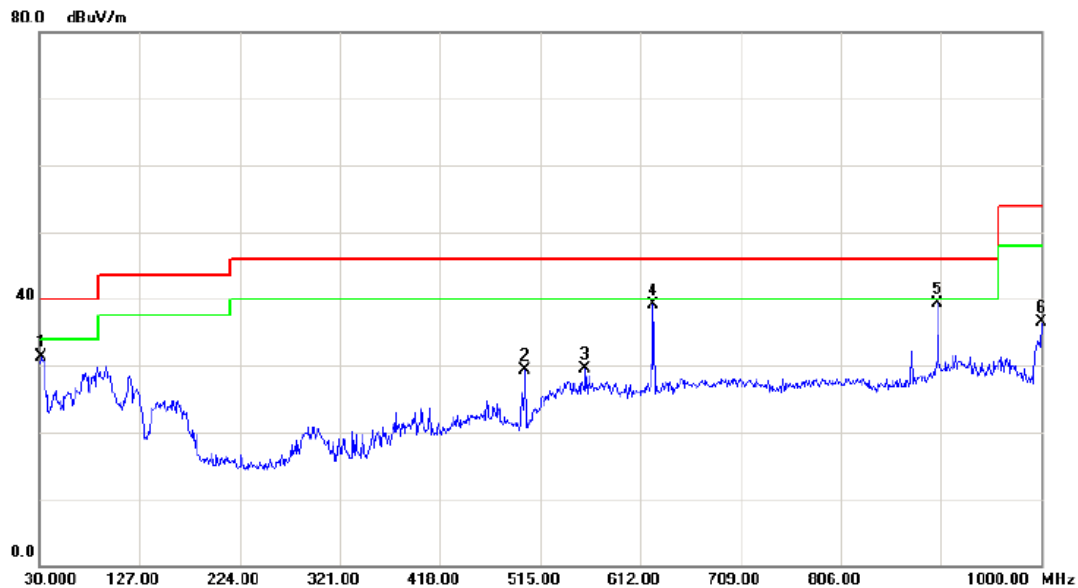

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		31.9400	46.19	-14.86	31.33	40.00	-8.67	peak	
2		500.4500	39.84	-10.50	29.34	46.00	-16.66	peak	
3		558.6500	35.79	-6.25	29.54	46.00	-16.46	peak	
4		624.6100	46.20	-7.06	39.14	46.00	-6.86	peak	
5	*	900.0900	38.69	0.63	39.32	46.00	-6.68	peak	
6		1000.000	37.13	-0.54	36.59	54.00	-17.41	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5580MHz/POE/Integral Antenna		
Phase:	Horizontal		

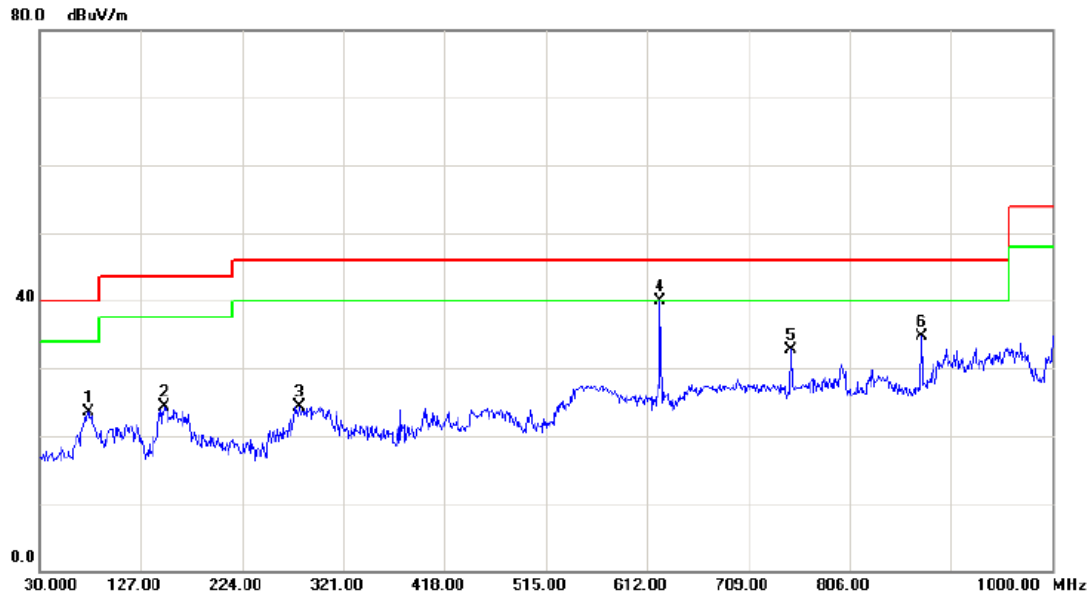

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		76.5600	39.51	-16.06	23.45	40.00	-16.55	peak	
2		149.3100	37.84	-13.61	24.23	43.50	-19.27	peak	
3		279.2900	37.00	-12.65	24.35	46.00	-21.65	peak	
4	*	624.6100	46.87	-7.06	39.81	46.00	-6.19	peak	
5		749.7400	38.02	-5.30	32.72	46.00	-13.28	peak	
6		874.8700	36.51	-1.78	34.73	46.00	-11.27	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5700MHz/POE/Integral Antenna		
Phase:	Vertical		

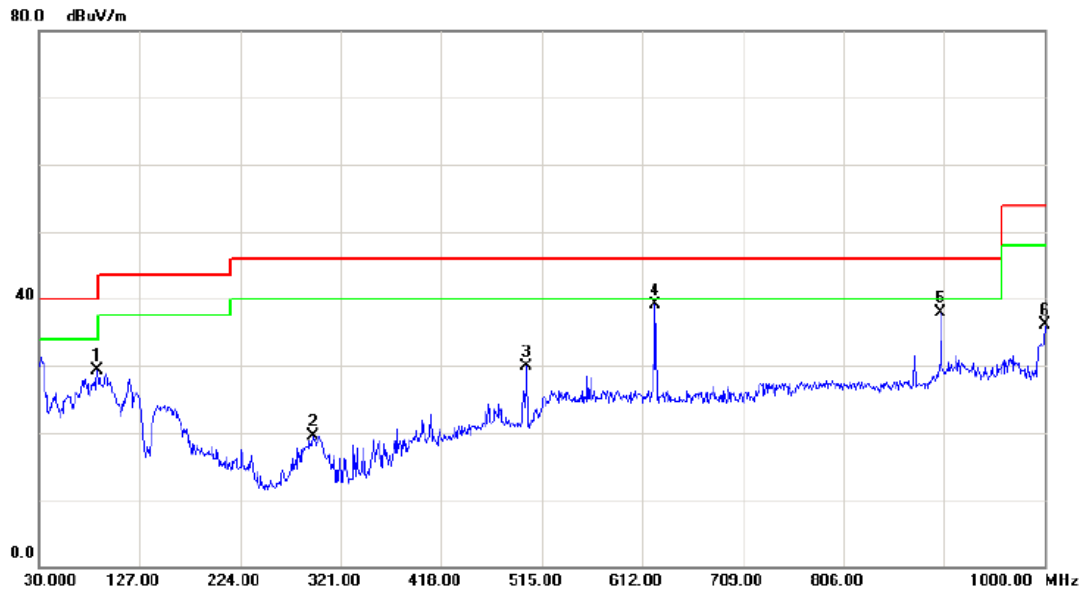

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	86.2600	46.04	-16.78	29.26	40.00	-10.74	peak	
2	293.8400	30.91	-11.42	19.49	46.00	-26.51	peak	
3	500.4500	40.34	-10.50	29.84	46.00	-16.16	peak	
4 *	624.6100	46.20	-7.06	39.14	46.00	-6.86	peak	
5	900.0900	37.19	0.63	37.82	46.00	-8.18	peak	
6	1000.000	36.63	-0.54	36.09	54.00	-17.91	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5700MHz/POE/Integral Antenna		
Phase:	Horizontal		

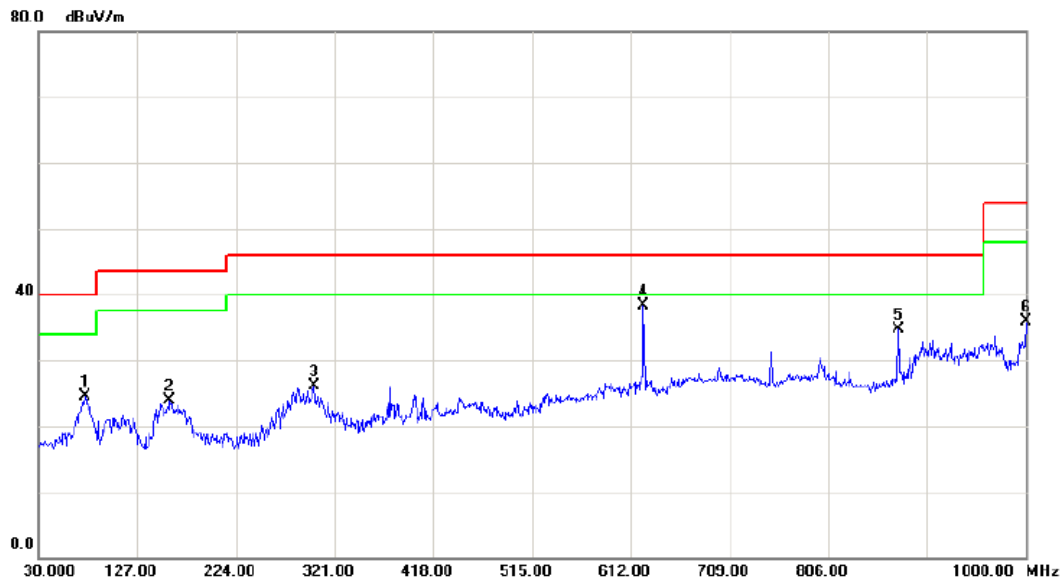

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		75.5900	40.38	-15.94	24.44	40.00	-15.56	peak	
2		159.0100	36.82	-12.83	23.99	43.50	-19.51	peak	
3		300.6300	37.03	-10.95	26.08	46.00	-19.92	peak	
4	*	624.6100	45.37	-7.06	38.31	46.00	-7.69	peak	
5		874.8700	36.51	-1.78	34.73	46.00	-11.27	peak	
6		1000.000	36.50	-0.54	35.96	54.00	-18.04	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz/POE/Dipole Antenna with external cable		
Phase:	Vertical		

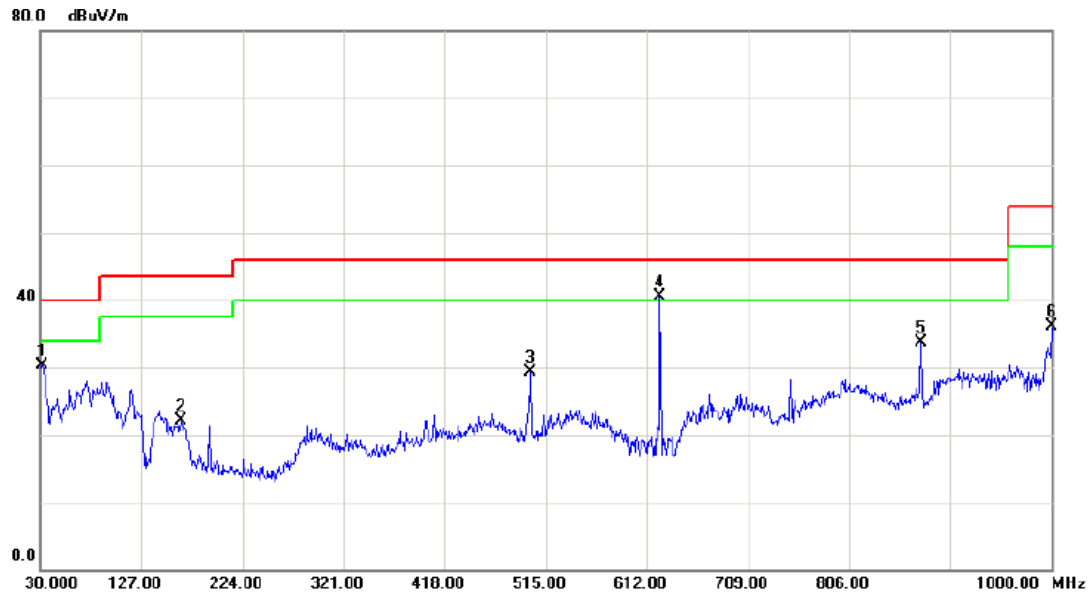

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.18	-14.86	30.32	40.00	-9.68	peak	
2		164.8300	34.81	-12.79	22.02	43.50	-21.48	peak	
3		500.4500	39.75	-10.50	29.25	46.00	-16.75	peak	
4	*	624.6100	47.60	-7.06	40.54	46.00	-5.46	peak	
5		874.8700	35.41	-1.78	33.63	46.00	-12.37	peak	
6		1000.000	36.73	-0.54	36.19	54.00	-17.81	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5180MHz/POE/Dipole Antenna with external cable		
Phase:	Horizontal		

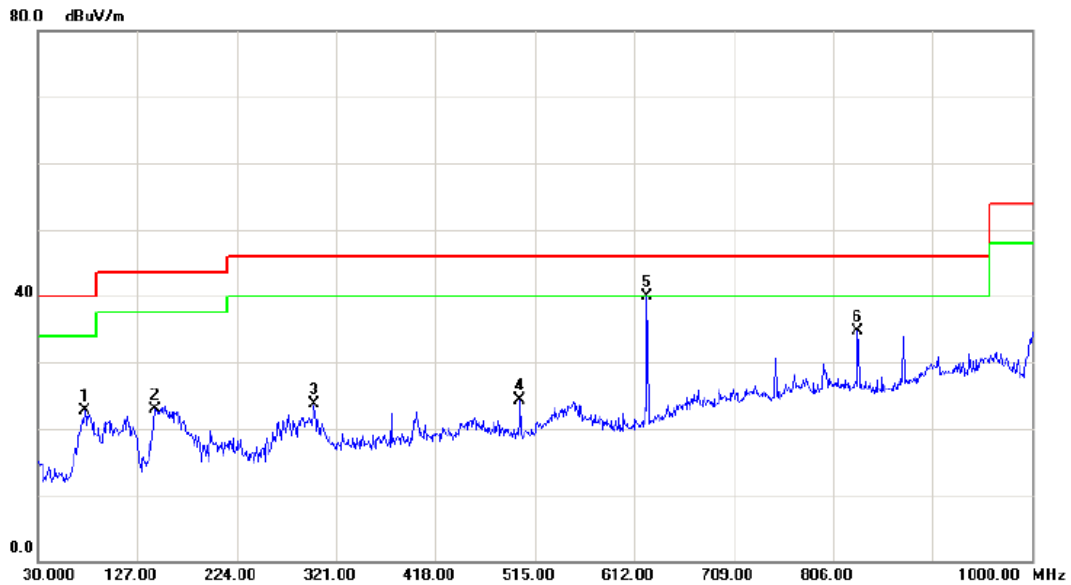

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	75.5900	38.74	-15.94	22.80	40.00	-17.20	peak	
2	144.4600	36.95	-14.11	22.84	43.50	-20.66	peak	
3	299.6600	34.68	-10.97	23.71	46.00	-22.29	peak	
4	500.4500	34.73	-10.50	24.23	46.00	-21.77	peak	
5 *	624.6100	46.87	-7.06	39.81	46.00	-6.19	peak	
6	830.2500	37.93	-3.15	34.78	46.00	-11.22	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz/POE/Dipole Antenna with external cable		
Phase:	Vertical		

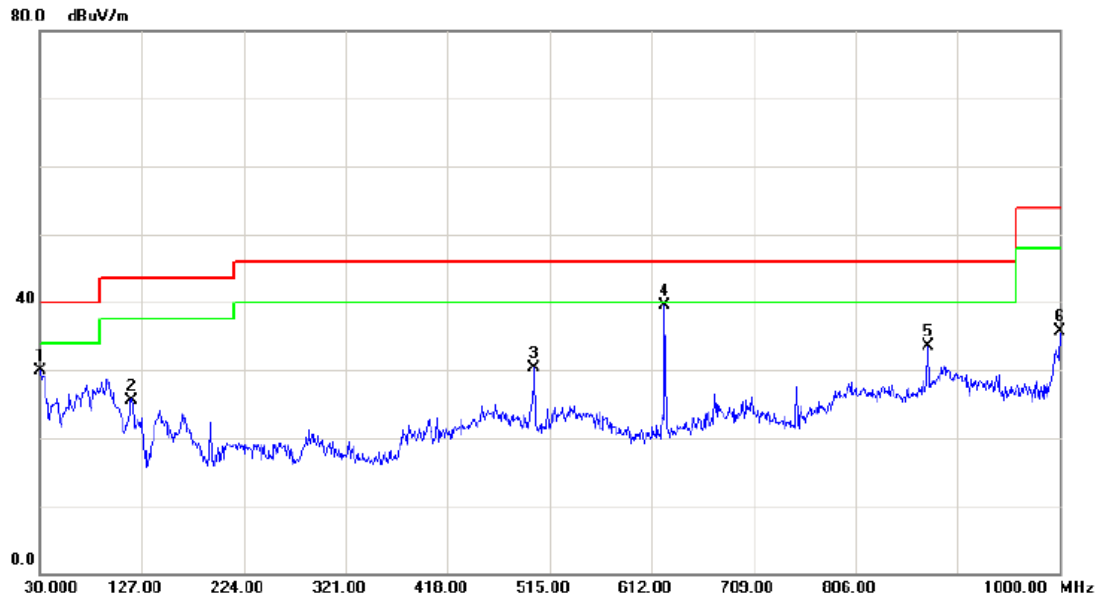

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		30.9700	44.95	-15.01	29.94	40.00	-10.06	peak	
2		117.3000	39.82	-14.22	25.60	43.50	-17.90	peak	
3		500.4500	40.71	-10.50	30.21	46.00	-15.79	peak	
4	*	624.6100	46.56	-7.06	39.50	46.00	-6.50	peak	
5		874.8700	35.37	-1.78	33.59	46.00	-12.41	peak	
6		1000.000	36.19	-0.54	35.65	54.00	-18.35	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5200MHz/POE/Dipole Antenna with external cable		
Phase:	Horizontal		

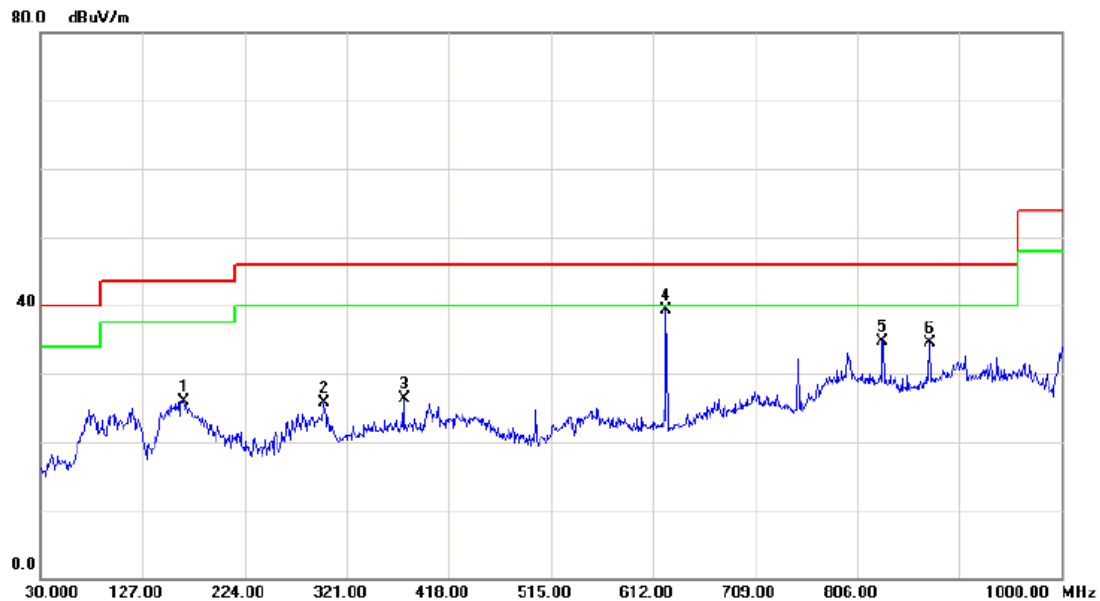

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		166.7700	38.80	-12.80	26.00	43.50	-17.50	peak	
2		299.6600	36.68	-10.97	25.71	46.00	-20.29	peak	
3		375.3200	36.87	-10.56	26.31	46.00	-19.69	peak	
4	*	624.6100	46.37	-7.06	39.31	46.00	-6.69	peak	
5		830.2500	37.93	-3.15	34.78	46.00	-11.22	peak	
6		874.8700	36.24	-1.78	34.46	46.00	-11.54	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz/POE/Dipole Antenna with external cable		
Phase:	Vertical		

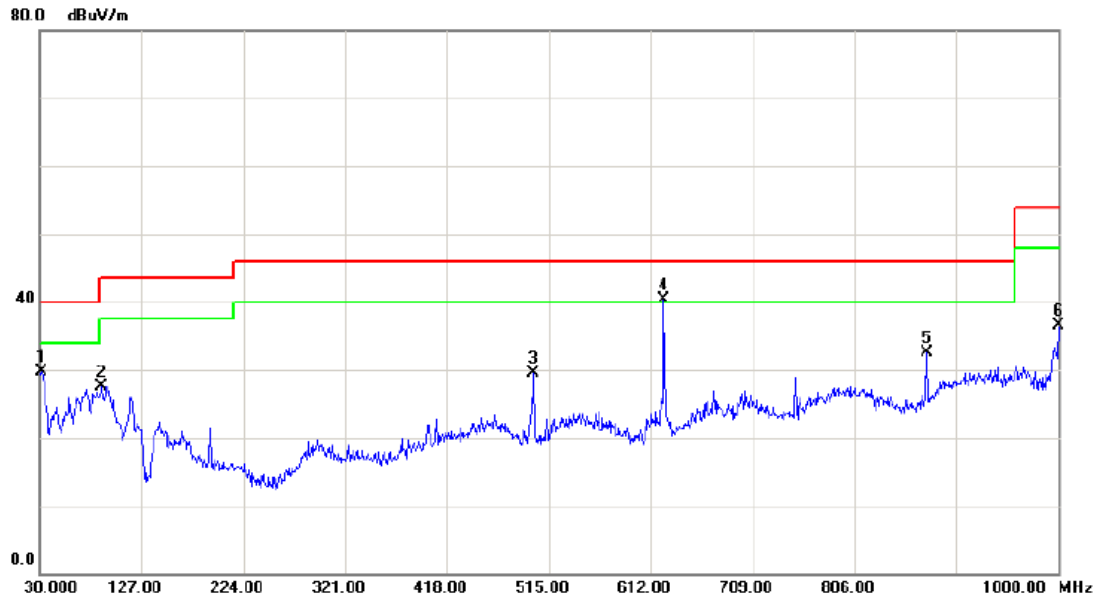

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	44.49	-14.86	29.63	40.00	-10.37	peak	
2		89.1700	44.34	-16.80	27.54	43.50	-15.96	peak	
3		500.4500	40.07	-10.50	29.57	46.00	-16.43	peak	
4	*	624.6100	47.41	-7.06	40.35	46.00	-5.65	peak	
5		874.8700	34.23	-1.78	32.45	46.00	-13.55	peak	
6		1000.000	37.04	-0.54	36.50	54.00	-17.50	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 1/TX A Mode 5240MHz/POE/Dipole Antenna with external cable		
Phase:	Horizontal		

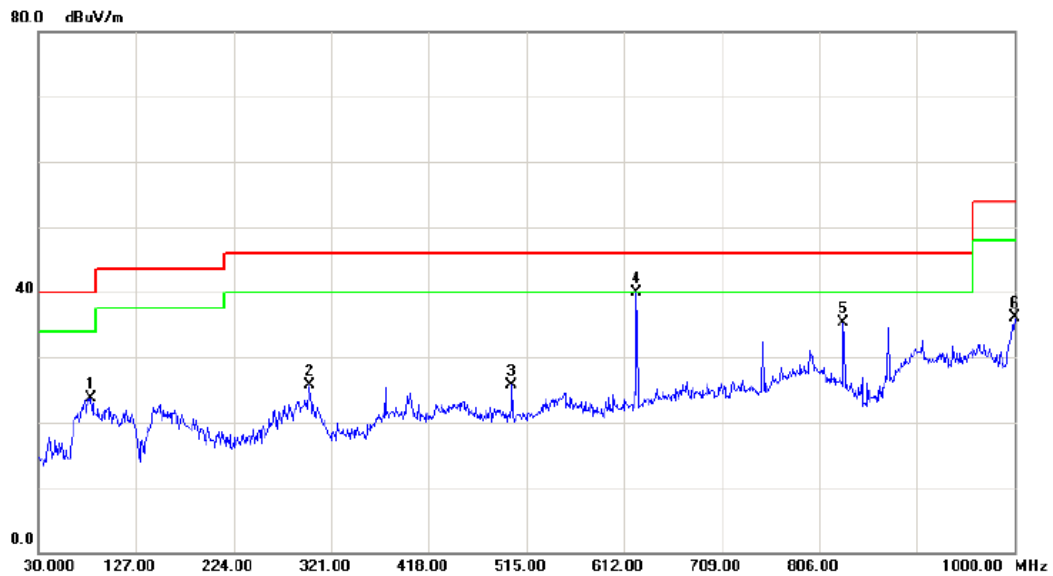

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		82.3800	40.28	-16.63	23.65	40.00	-16.35	peak	
2		299.6600	36.72	-10.97	25.75	46.00	-20.25	peak	
3		500.4500	36.27	-10.50	25.77	46.00	-20.23	peak	
4	*	624.6100	46.91	-7.06	39.85	46.00	-6.15	peak	
5		830.2500	38.47	-3.15	35.32	46.00	-10.68	peak	
6		1000.000	36.69	-0.54	36.15	54.00	-17.85	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 2/TX A Mode 5260MHz/POE/Dipole Antenna with external cable		
Phase:	Vertical		

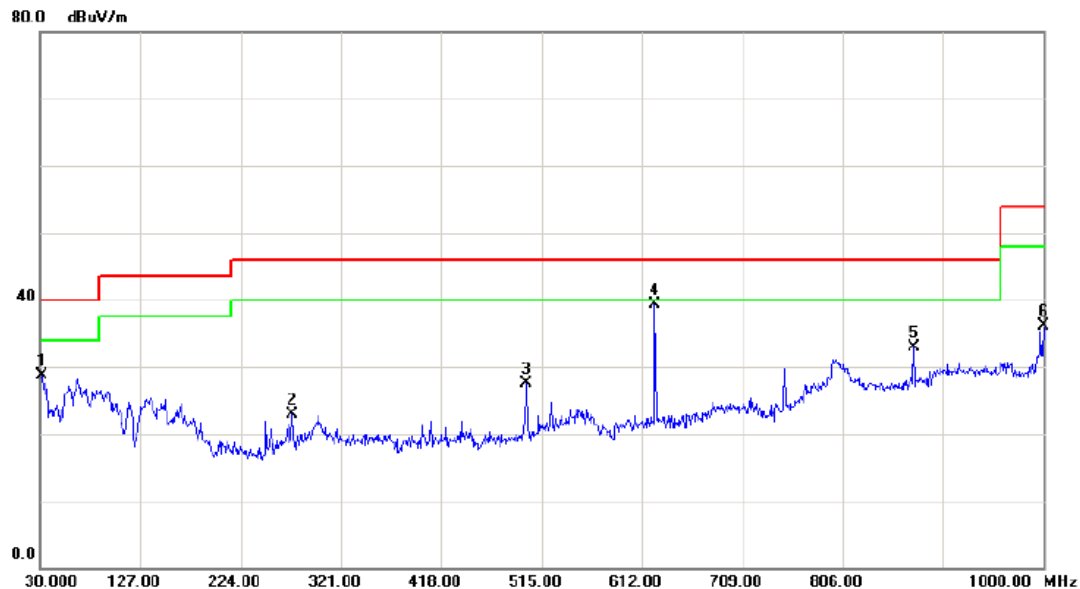

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	43.53	-14.86	28.67	40.00	-11.33	peak	
2		273.4700	36.44	-13.55	22.89	46.00	-23.11	peak	
3		500.4500	38.01	-10.50	27.51	46.00	-18.49	peak	
4	*	624.6100	46.35	-7.06	39.29	46.00	-6.71	peak	
5		874.8700	34.78	-1.78	33.00	46.00	-13.00	peak	
6		1000.000	36.69	-0.54	36.15	54.00	-17.85	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 2/TX A Mode 5260MHz/POE/Dipole Antenna with external cable		
Phase:	Horizontal		

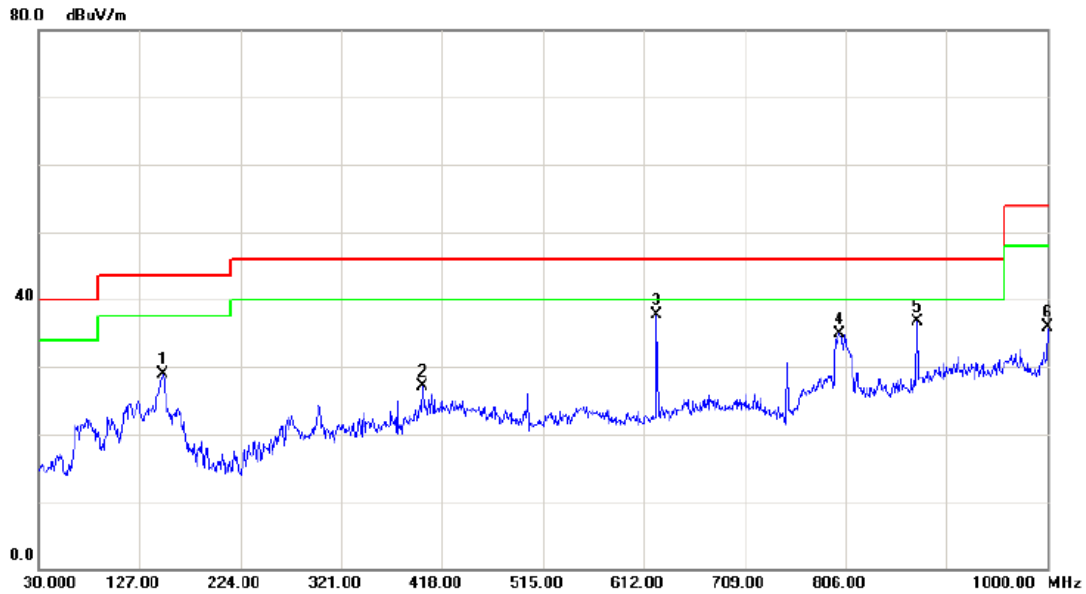

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	42.43	-13.61	28.82	43.50	-14.68	peak	
2		398.6000	36.90	-9.82	27.08	46.00	-18.92	peak	
3	*	624.6100	44.78	-7.06	37.72	46.00	-8.28	peak	
4		800.1800	36.51	-1.62	34.89	46.00	-11.11	peak	
5		874.8700	38.53	-1.78	36.75	46.00	-9.25	peak	
6		1000.000	36.39	-0.54	35.85	54.00	-18.15	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 2/TX A Mode 5280MHz/POE/Dipole Antenna with external cable		
Phase:	Vertical		

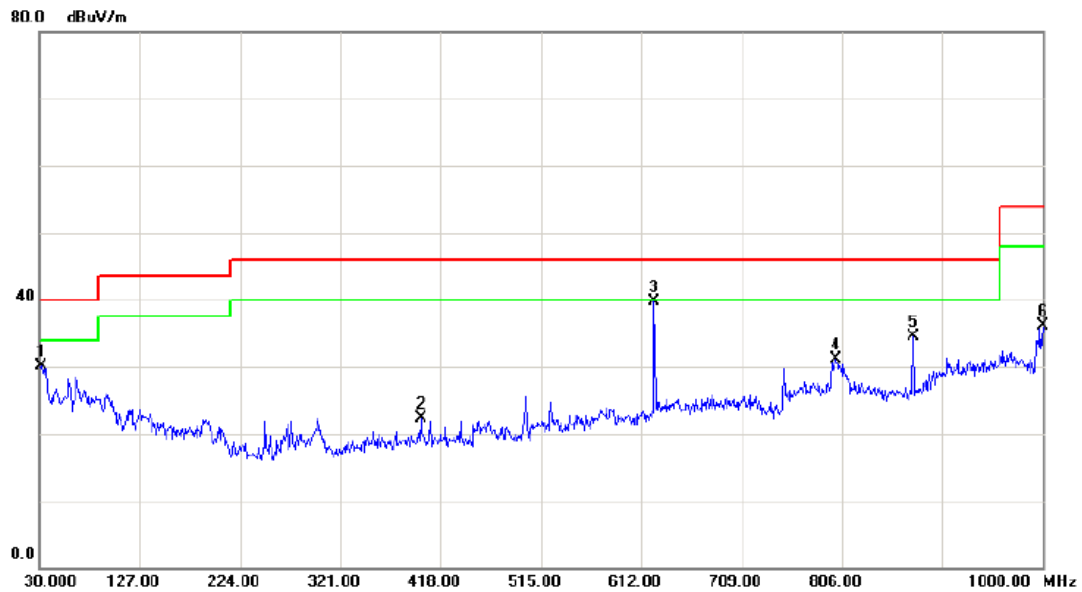

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.03	-14.86	30.17	40.00	-9.83	peak	
2		398.6000	32.12	-9.82	22.30	46.00	-23.70	peak	
3	*	624.6100	46.85	-7.06	39.79	46.00	-6.21	peak	
4		800.1800	32.81	-1.62	31.19	46.00	-14.81	peak	
5		874.8700	36.28	-1.78	34.50	46.00	-11.50	peak	
6		1000.000	36.69	-0.54	36.15	54.00	-17.85	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 2/TX A Mode 5280MHz/POE/Dipole Antenna with external cable		
Phase:	Horizontal		

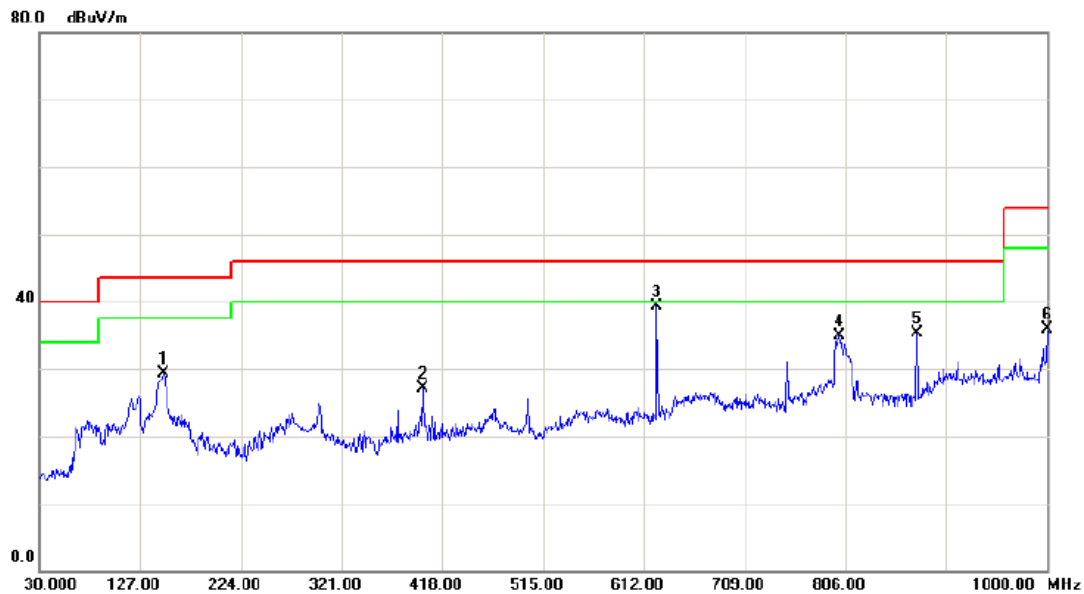

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	42.93	-13.61	29.32	43.50	-14.18	peak	
2		398.6000	36.90	-9.82	27.08	46.00	-18.92	peak	
3	*	624.6100	46.28	-7.06	39.22	46.00	-6.78	peak	
4		800.1800	36.51	-1.62	34.89	46.00	-11.11	peak	
5		874.8700	37.03	-1.78	35.25	46.00	-10.75	peak	
6		1000.000	36.39	-0.54	35.85	54.00	-18.15	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 2/TX A Mode 5320MHz/POE/Dipole Antenna with external cable		
Phase:	Vertical		

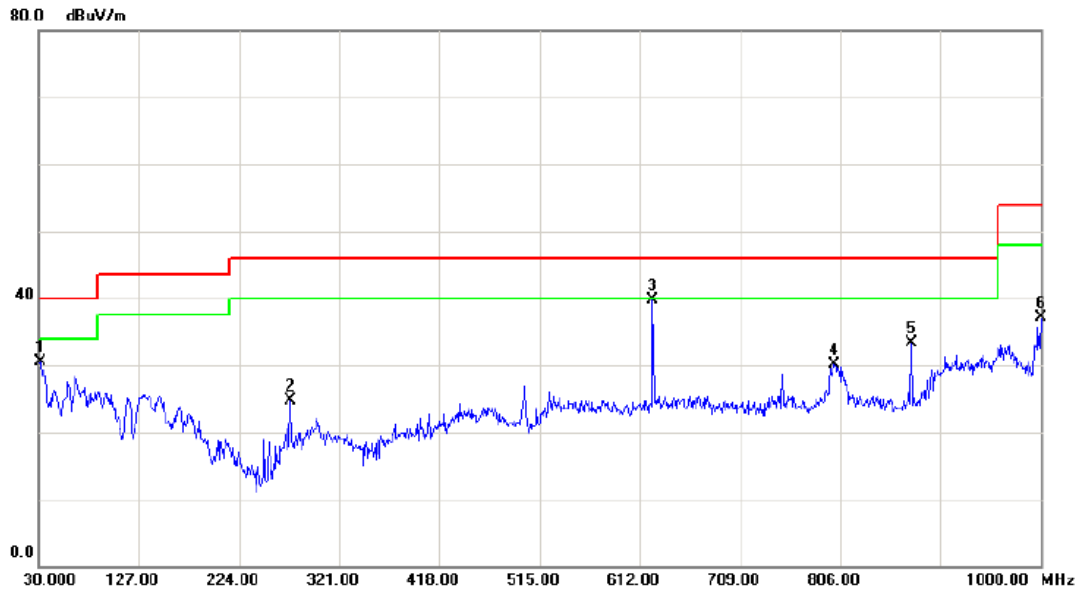

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.42	-14.86	30.56	40.00	-9.44	peak	
2		273.4700	38.34	-13.55	24.79	46.00	-21.21	peak	
3	*	624.6100	46.75	-7.06	39.69	46.00	-6.31	peak	
4		800.1800	31.71	-1.62	30.09	46.00	-15.91	peak	
5		874.8700	35.18	-1.78	33.40	46.00	-12.60	peak	
6		1000.000	37.58	-0.54	37.04	54.00	-16.96	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 2/TX A Mode 5320MHz/POE/Dipole Antenna with external cable		
Phase:	Horizontal		

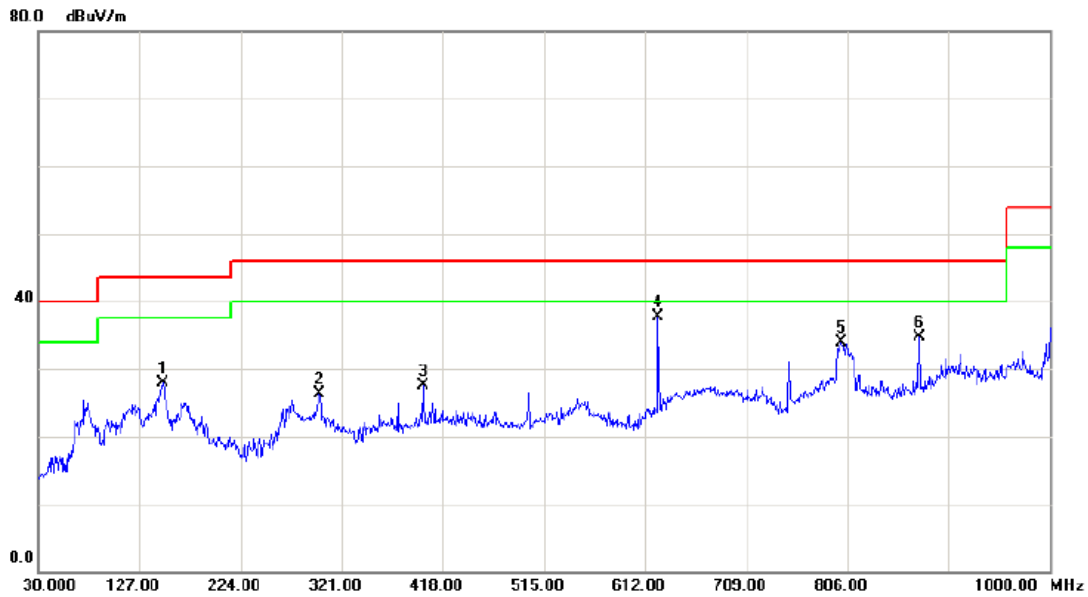

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	41.43	-13.61	27.82	43.50	-15.68	peak	
2		299.6600	37.29	-10.97	26.32	46.00	-19.68	peak	
3		398.6000	37.40	-9.82	27.58	46.00	-18.42	peak	
4	*	624.6100	44.78	-7.06	37.72	46.00	-8.28	peak	
5		800.1800	35.51	-1.62	33.89	46.00	-12.11	peak	
6		874.8700	36.53	-1.78	34.75	46.00	-11.25	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5500MHz/POE/Dipole Antenna with external cable		
Phase:	Vertical		

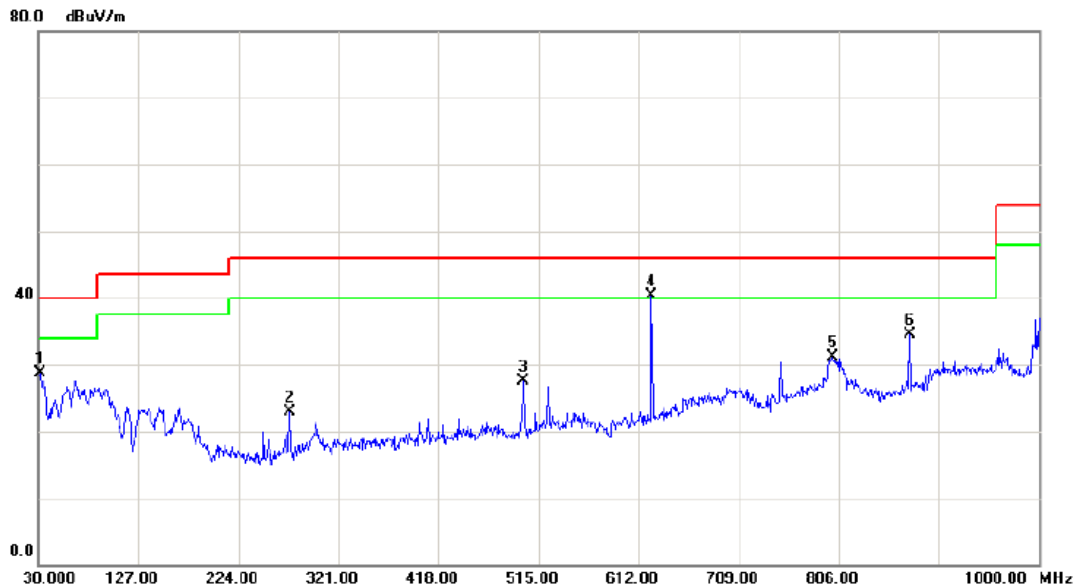

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	43.53	-14.86	28.67	40.00	-11.33	peak	
2		273.4700	36.44	-13.55	22.89	46.00	-23.11	peak	
3		500.4500	38.01	-10.50	27.51	46.00	-18.49	peak	
4	*	624.6100	47.35	-7.06	40.29	46.00	-5.71	peak	
5		800.1800	32.81	-1.62	31.19	46.00	-14.81	peak	
6		874.8700	36.28	-1.78	34.50	46.00	-11.50	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5500MHz/POE/Dipole Antenna with external cable		
Phase:	Horizontal		

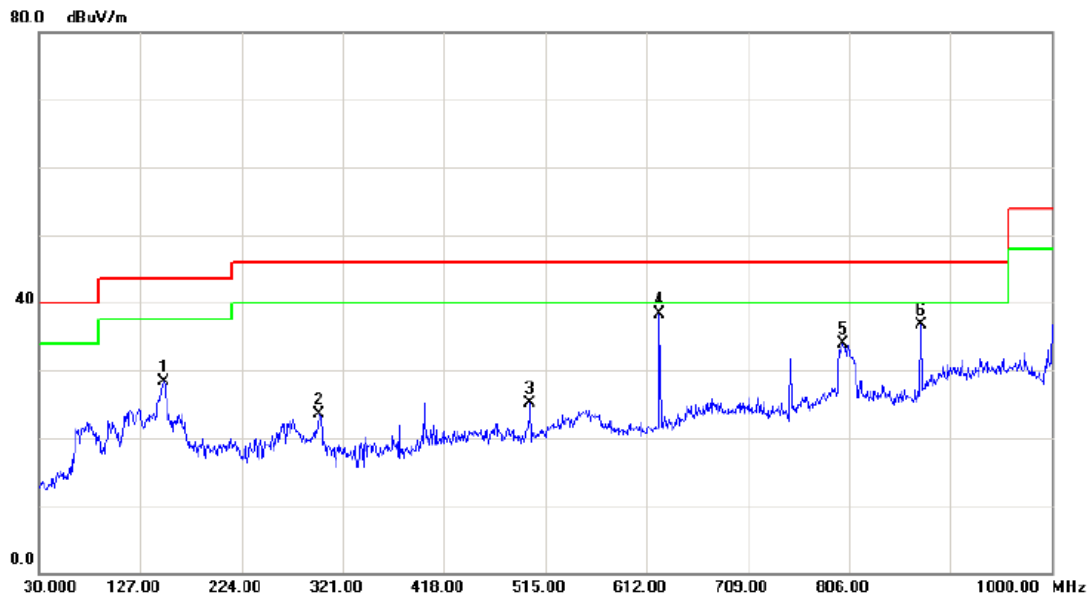

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	41.93	-13.61	28.32	43.50	-15.18	peak	
2		297.7200	34.53	-11.12	23.41	46.00	-22.59	peak	
3		500.4500	35.59	-10.50	25.09	46.00	-20.91	peak	
4	*	624.6100	45.28	-7.06	38.22	46.00	-7.78	peak	
5		800.1800	35.51	-1.62	33.89	46.00	-12.11	peak	
6		874.8700	38.53	-1.78	36.75	46.00	-9.25	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5580MHz/POE/Dipole Antenna with external cable		
Phase:	Vertical		

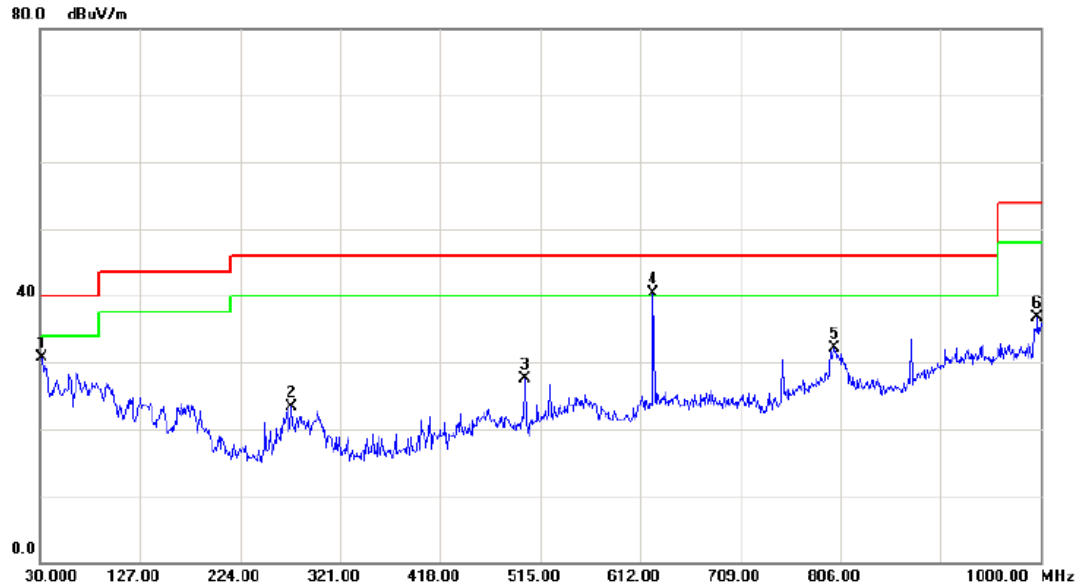

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	45.53	-14.86	30.67	40.00	-9.33	peak	
2		273.4700	36.94	-13.55	23.39	46.00	-22.61	peak	
3		500.4500	38.01	-10.50	27.51	46.00	-18.49	peak	
4	*	624.6100	47.35	-7.06	40.29	46.00	-5.71	peak	
5		800.1800	33.81	-1.62	32.19	46.00	-13.81	peak	
6		997.0900	37.25	-0.53	36.72	54.00	-17.28	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5580MHz/POE/Dipole Antenna with external cable		
Phase:	Horizontal		

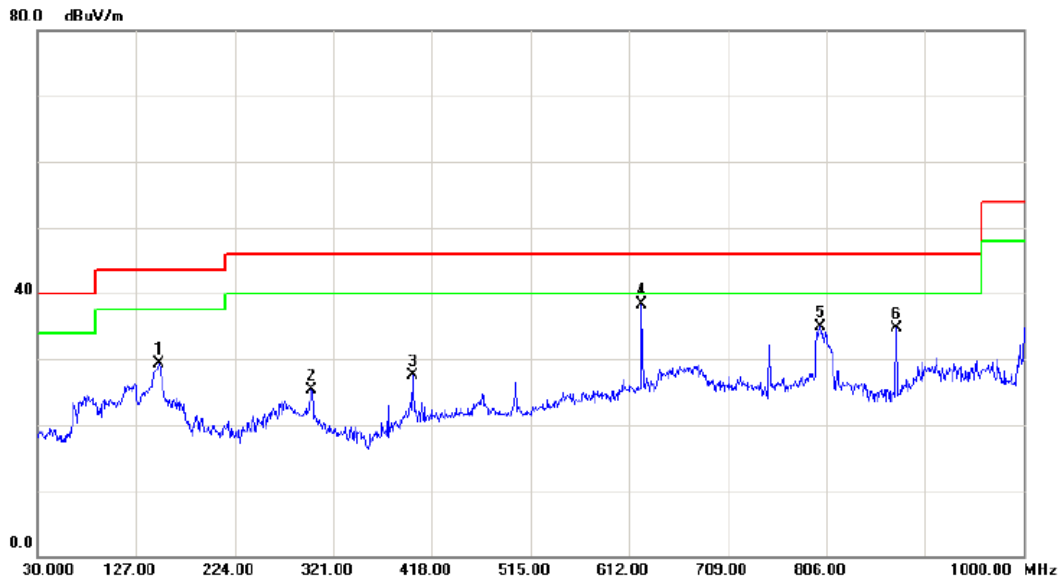

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	42.93	-13.61	29.32	43.50	-14.18	peak	
2		299.6600	36.29	-10.97	25.32	46.00	-20.68	peak	
3		398.6000	37.40	-9.82	27.58	46.00	-18.42	peak	
4	*	624.6100	45.28	-7.06	38.22	46.00	-7.78	peak	
5		800.1800	36.51	-1.62	34.89	46.00	-11.11	peak	
6		874.8700	36.53	-1.78	34.75	46.00	-11.25	peak	




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5700MHz/POE/Dipole Antenna with external cable		
Phase:	Vertical		

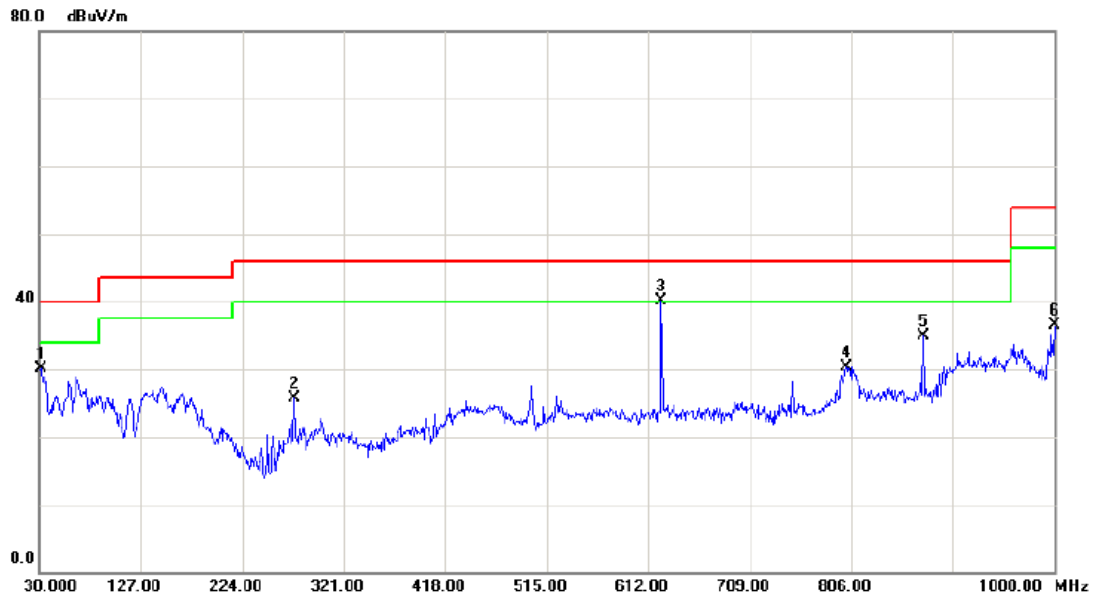

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		31.9400	44.92	-14.86	30.06	40.00	-9.94	peak	
2		273.4700	39.34	-13.55	25.79	46.00	-20.21	peak	
3	*	624.6100	47.25	-7.06	40.19	46.00	-5.81	peak	
4		801.1500	32.00	-1.67	30.33	46.00	-15.67	peak	
5		874.8700	36.68	-1.78	34.90	46.00	-11.10	peak	
6		1000.000	37.08	-0.54	36.54	54.00	-17.46	peak	



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25°C	Relative Humidity:	58 %
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Band 3/TX A Mode 5700MHz/POE/Dipole Antenna with external cable		
Phase:	Horizontal		

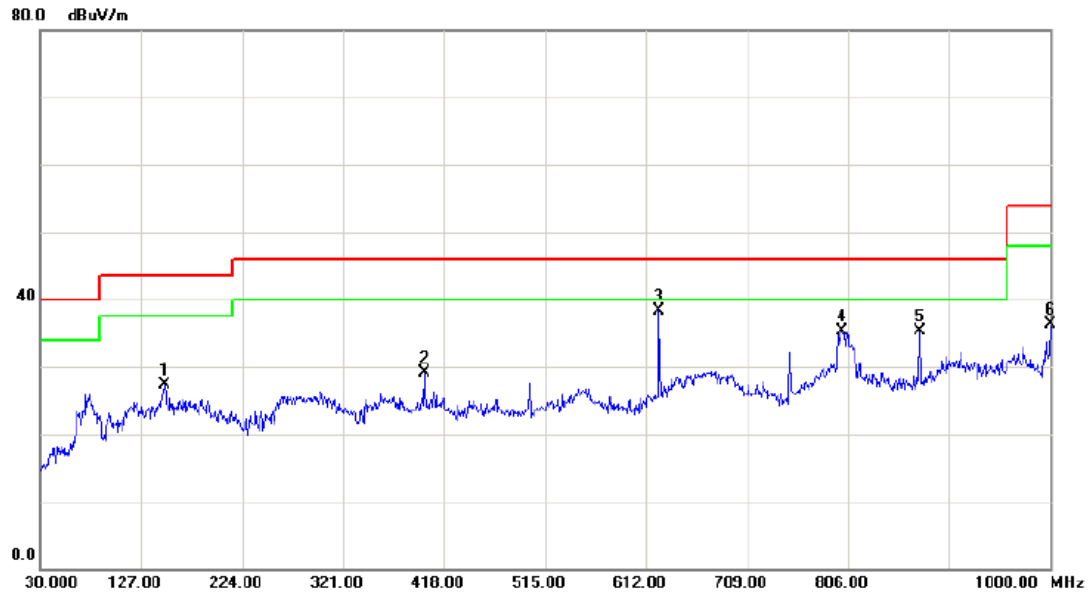

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		149.3100	40.93	-13.61	27.32	43.50	-16.18	peak	
2		398.6000	38.90	-9.82	29.08	46.00	-16.92	peak	
3	*	624.6100	45.28	-7.06	38.22	46.00	-7.78	peak	
4		800.1800	37.01	-1.62	35.39	46.00	-10.61	peak	
5		874.8700	37.03	-1.78	35.25	46.00	-10.75	peak	
6		1000.000	36.89	-0.54	36.35	54.00	-17.65	peak	



4.2.8 TEST RESULTS - ABOVE 1000MHZ

EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBUV/m)		Act.(dBm)		Limit(dBUV/m)		Limit(dBm)		Note
		Peak (dBUV)	AV (dBUV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	12.75	3.24	42.72	55.47	45.96	-49.30	-58.81	68.30	54.00	-27.00	-41.30	X/E
5175.60	V	58.60	51.20	42.78	101.38	93.98	-3.39	-10.79					X/F
10355.15	V	41.58	30.17	16.03	57.61	46.20	-47.16	-58.57	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)

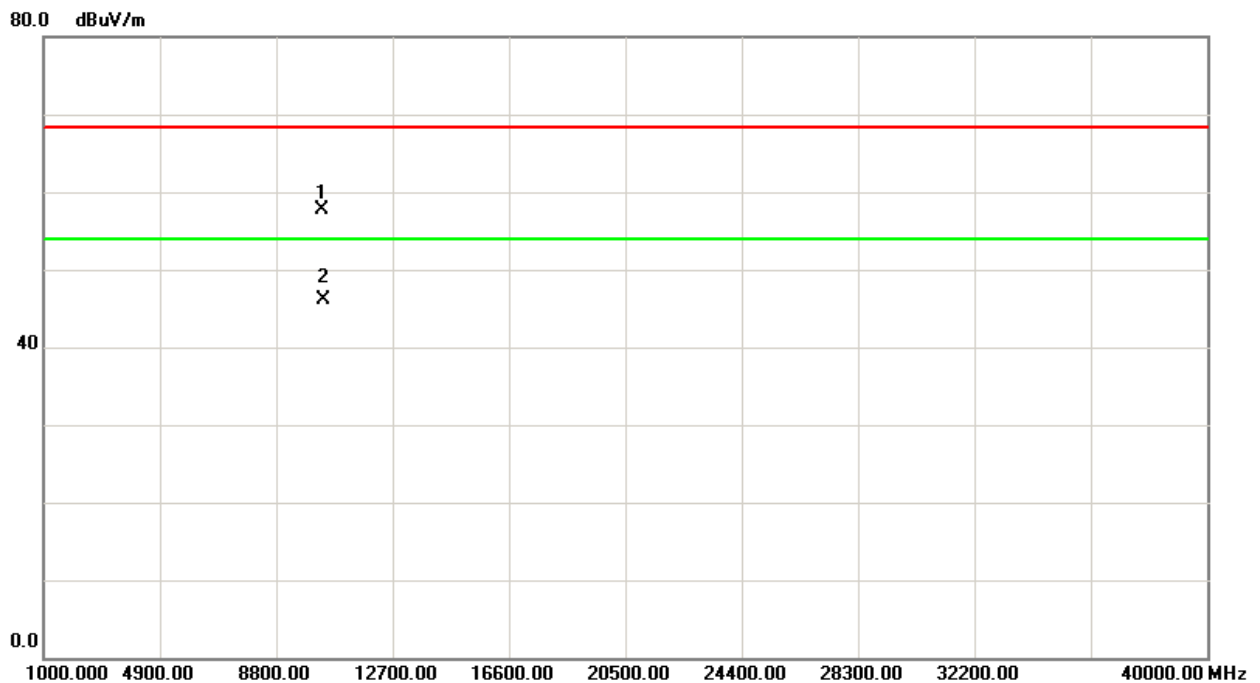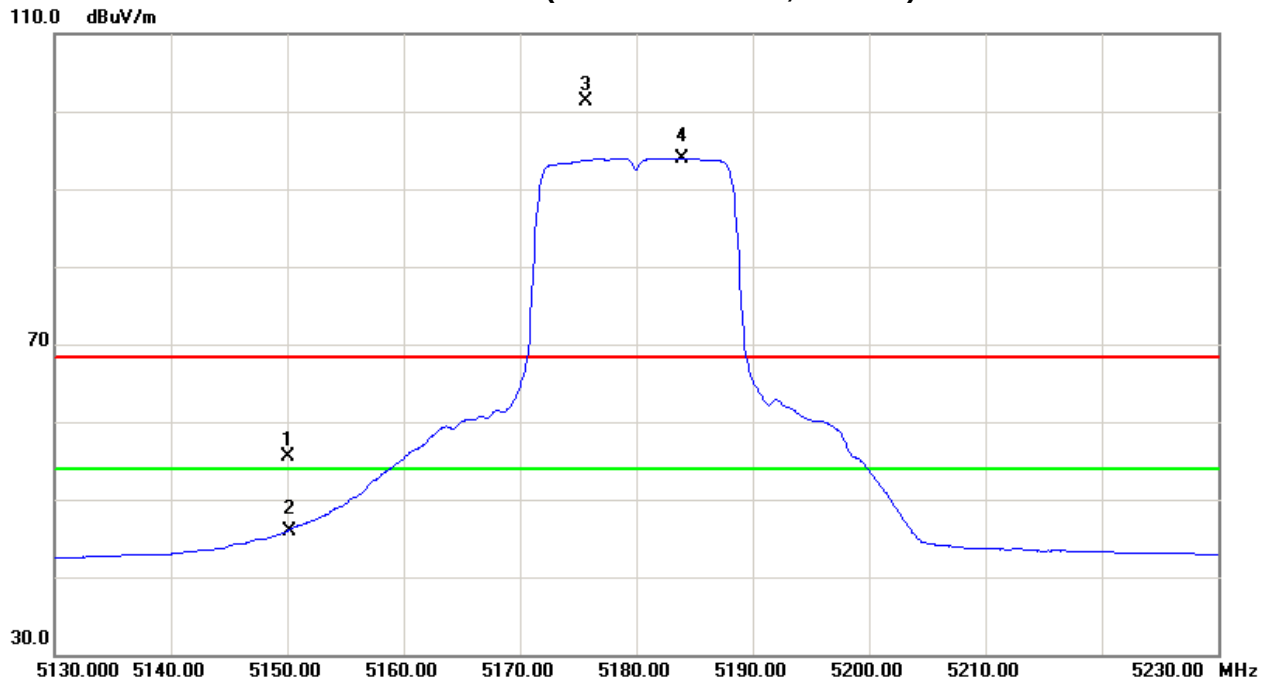



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	15.24	7.51	42.72	57.96	50.23	-46.81	-54.54	68.30	54.00	-27.00	-41.30	X/E
5174.00	H	61.88	55.25	42.78	104.66	98.03	-0.11	-6.74					X/F
10361.00	H	41.28	30.35	16.02	57.30	46.37	-47.47	-58.40	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)

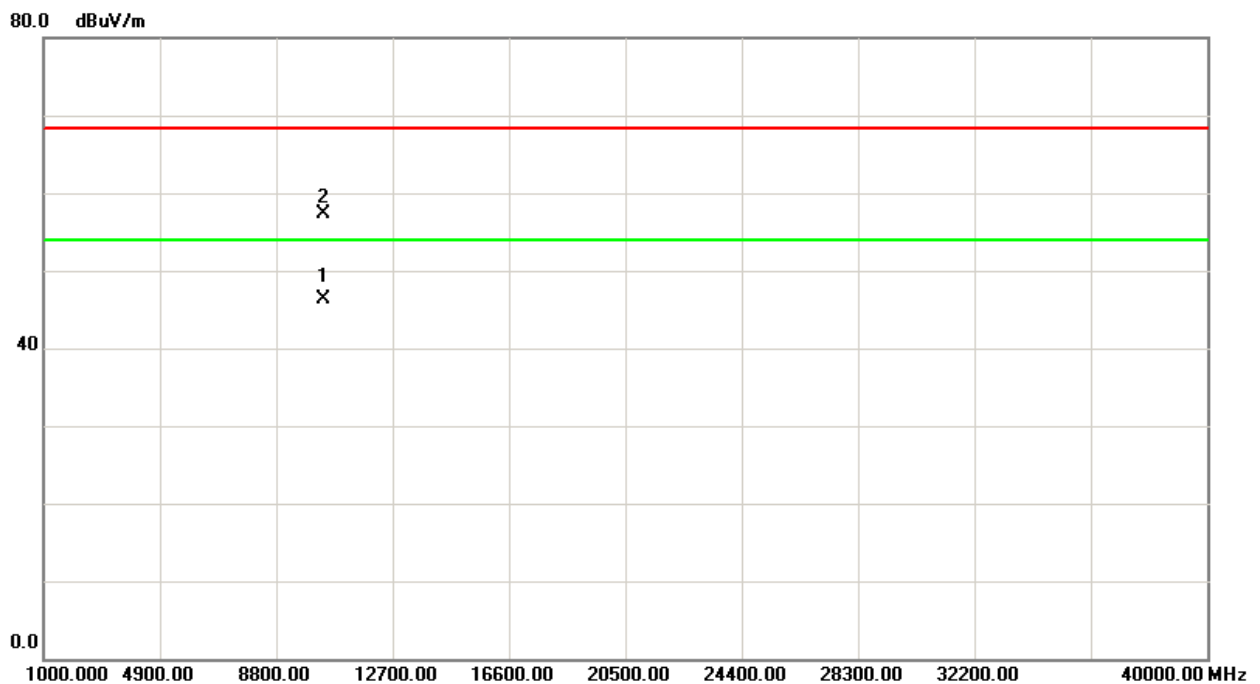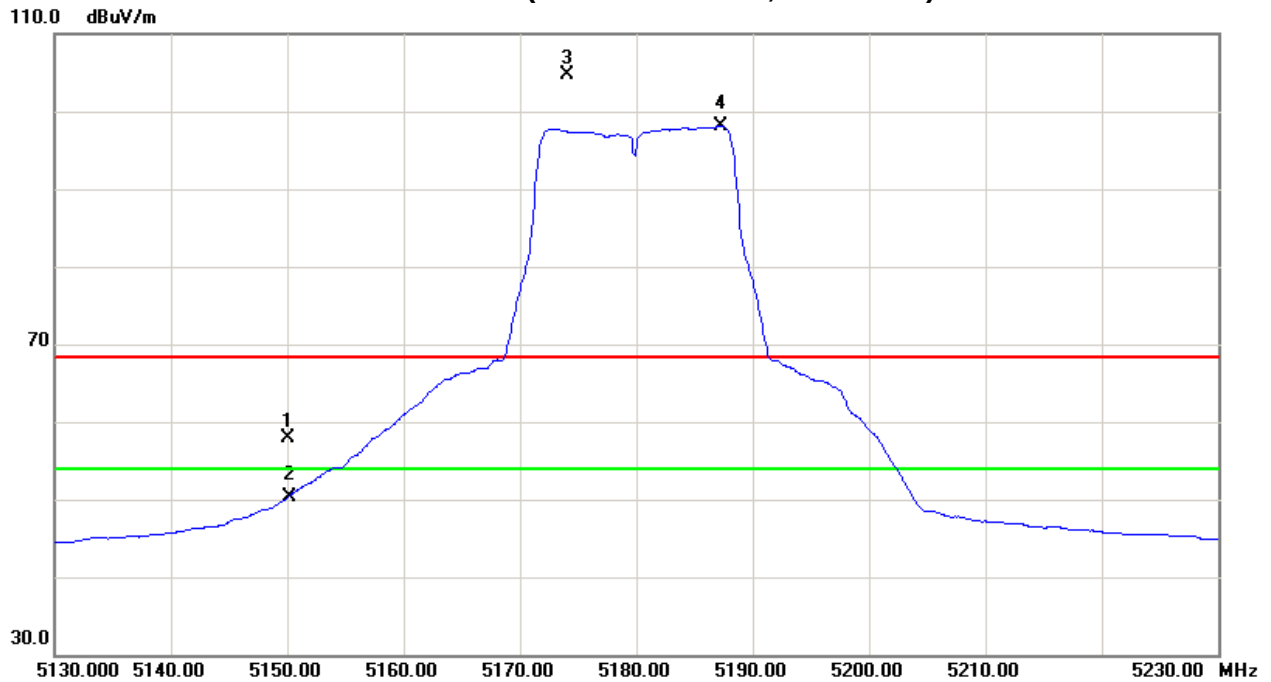



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5195.40	V	58.71	51.41	42.83	101.54	94.24	-3.23	-10.53					X/F
10401.15	V	41.45	30.35	15.96	57.41	46.31	-47.36	-58.46	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)

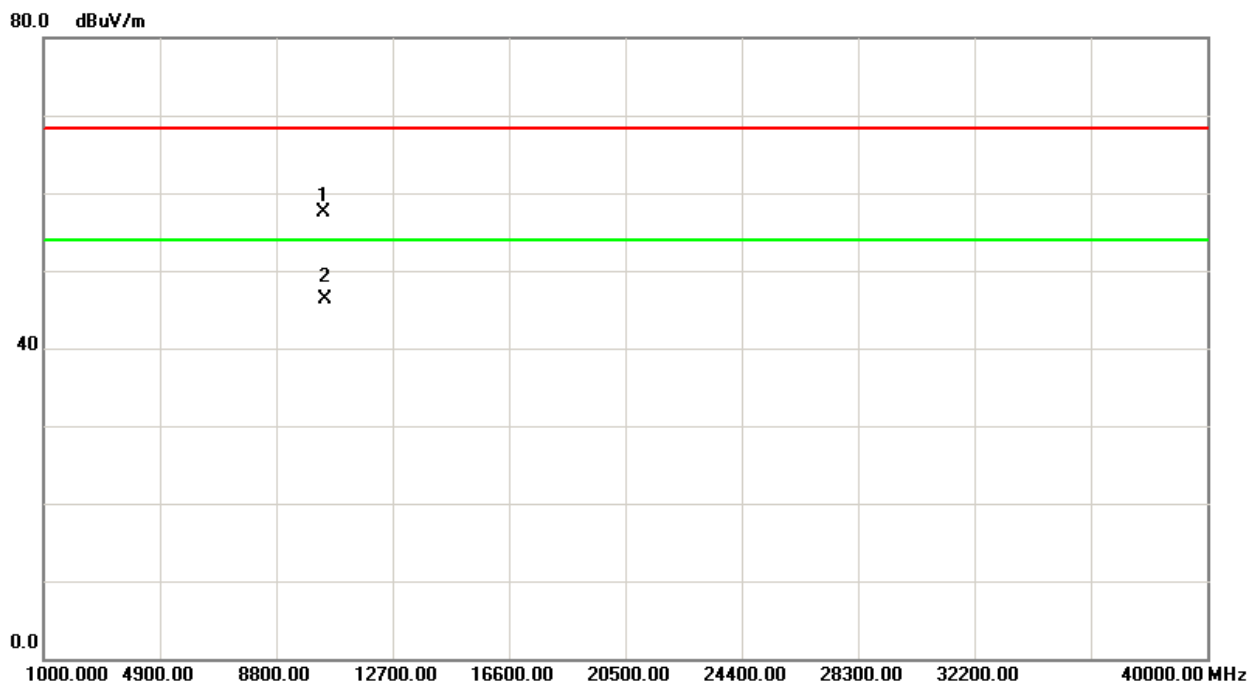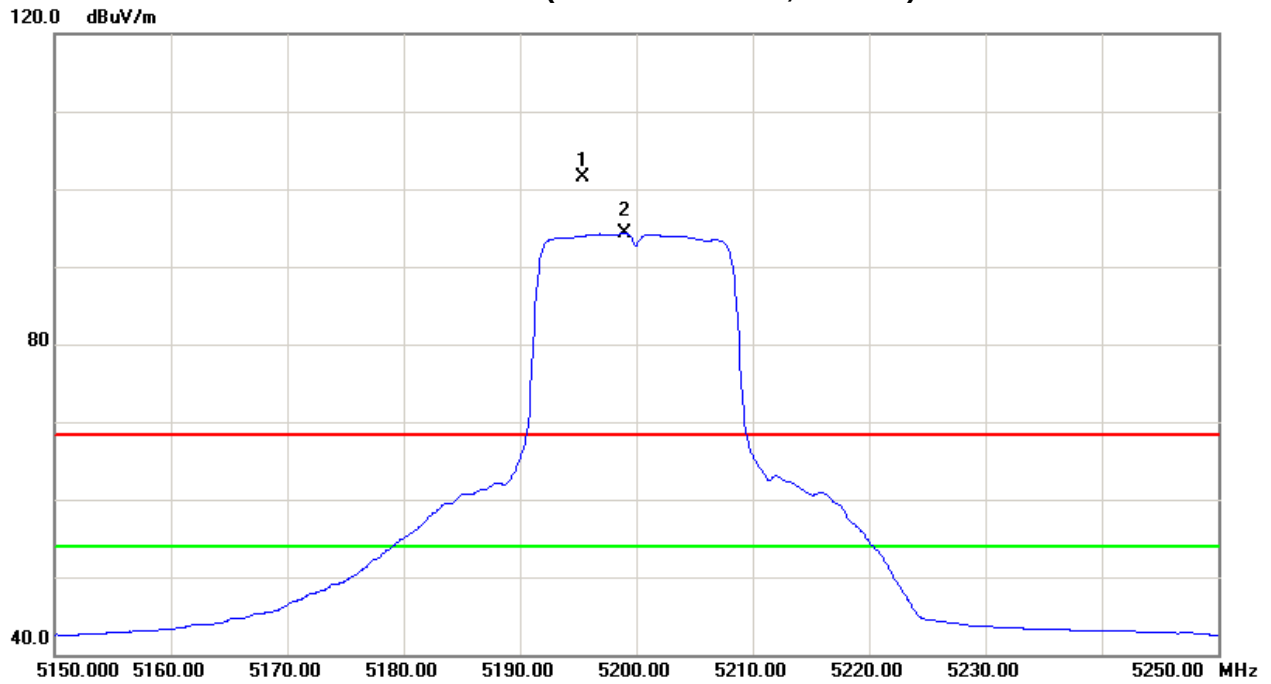



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5192.60	H	62.14	54.89	42.83	104.97	97.72	0.20	-7.05					X/F
10401.25	H	41.75	30.56	15.96	57.71	46.52	-47.06	-58.25	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)

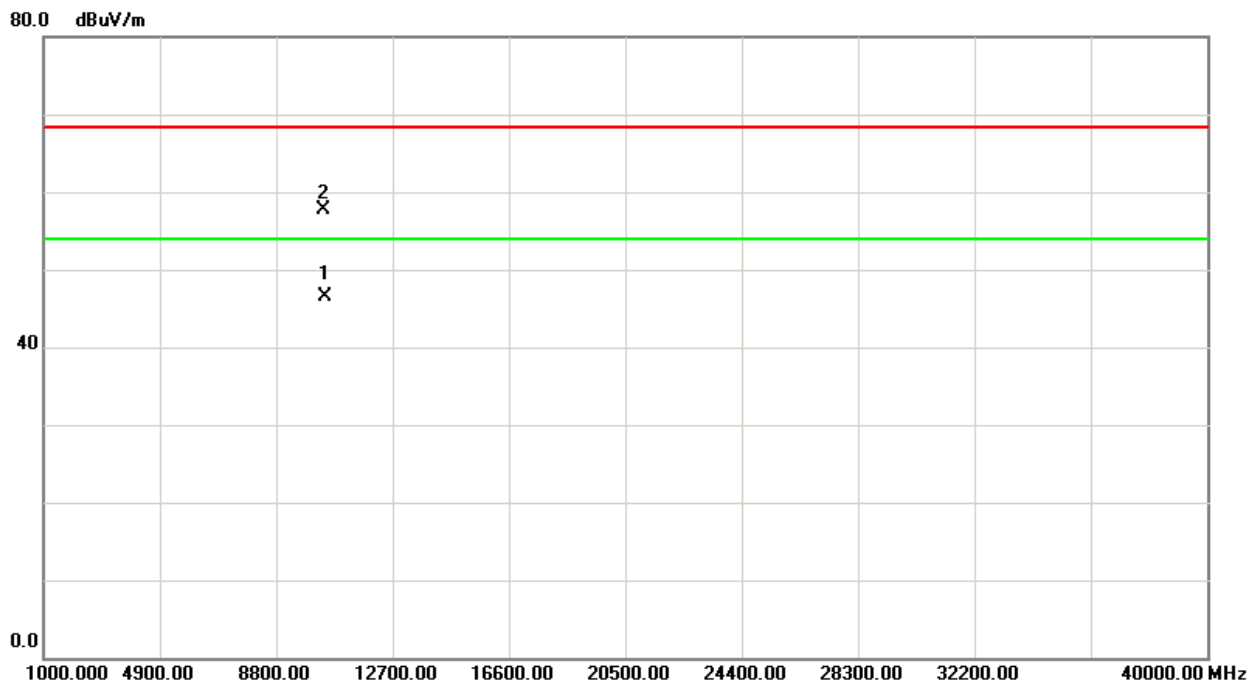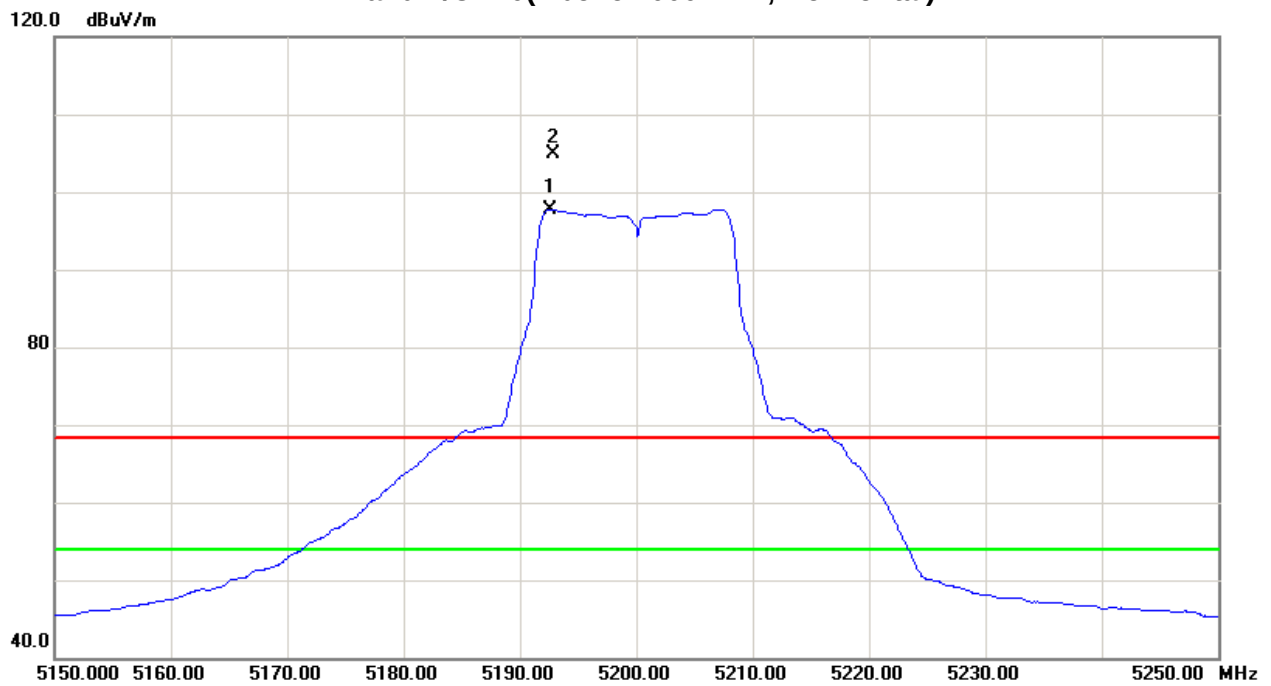



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5236.10	V	59.05	51.81	42.93	101.98	94.74	-2.79	-10.03					X/F
10481.15	V	41.38	30.37	15.85	57.23	46.22	-47.54	-58.55	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)

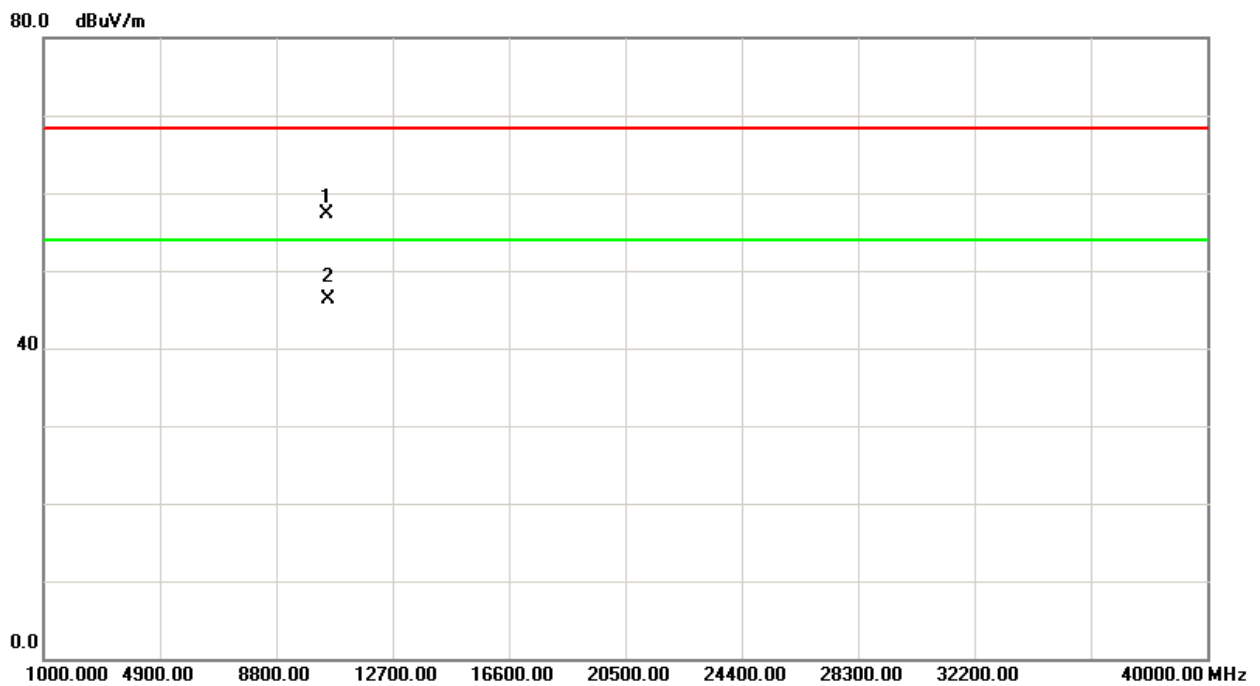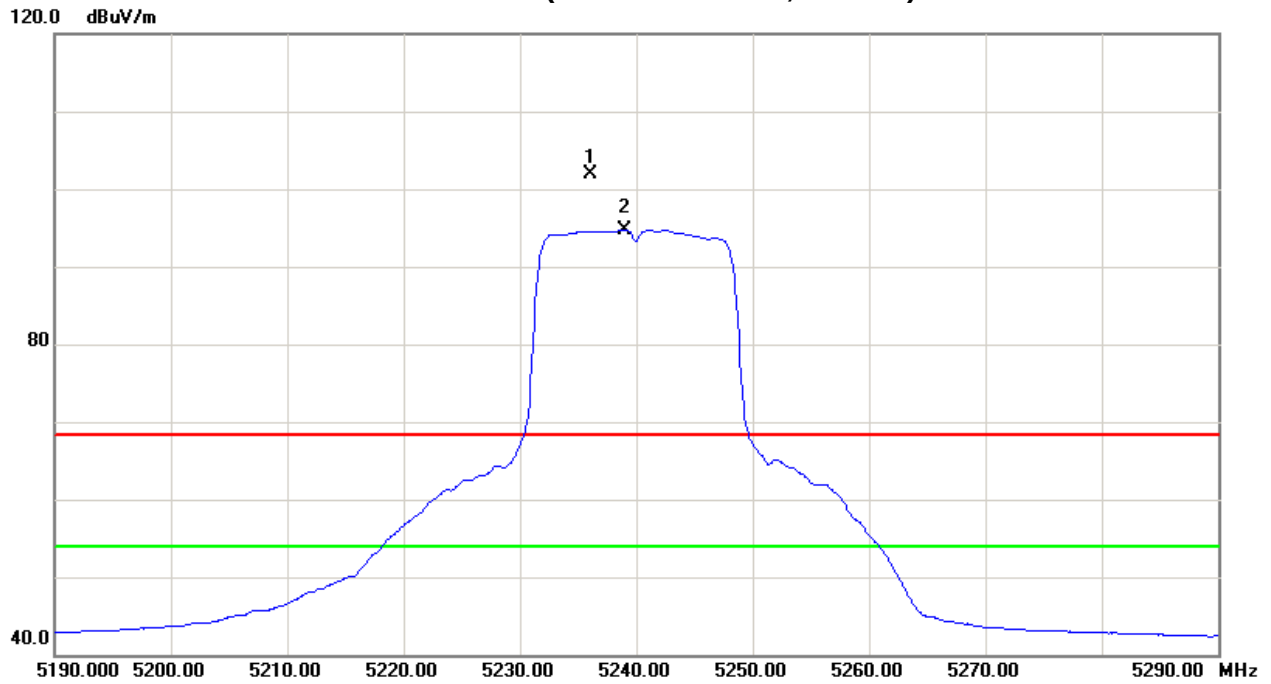



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5235.40	H	62.15	55.19	42.92	105.07	98.11	0.30	-6.66					X/F
10481.20	H	41.68	30.58	15.85	57.53	46.43	-47.24	-58.34	85.07	78.11	-10.23	-17.19	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)

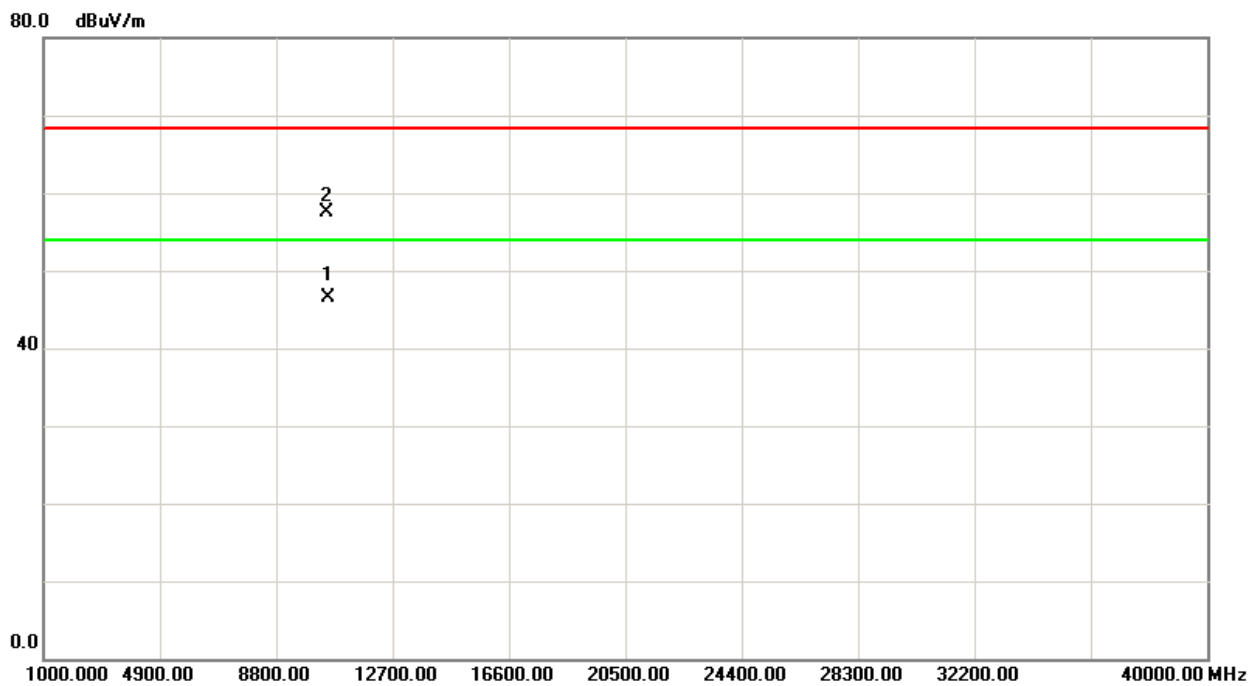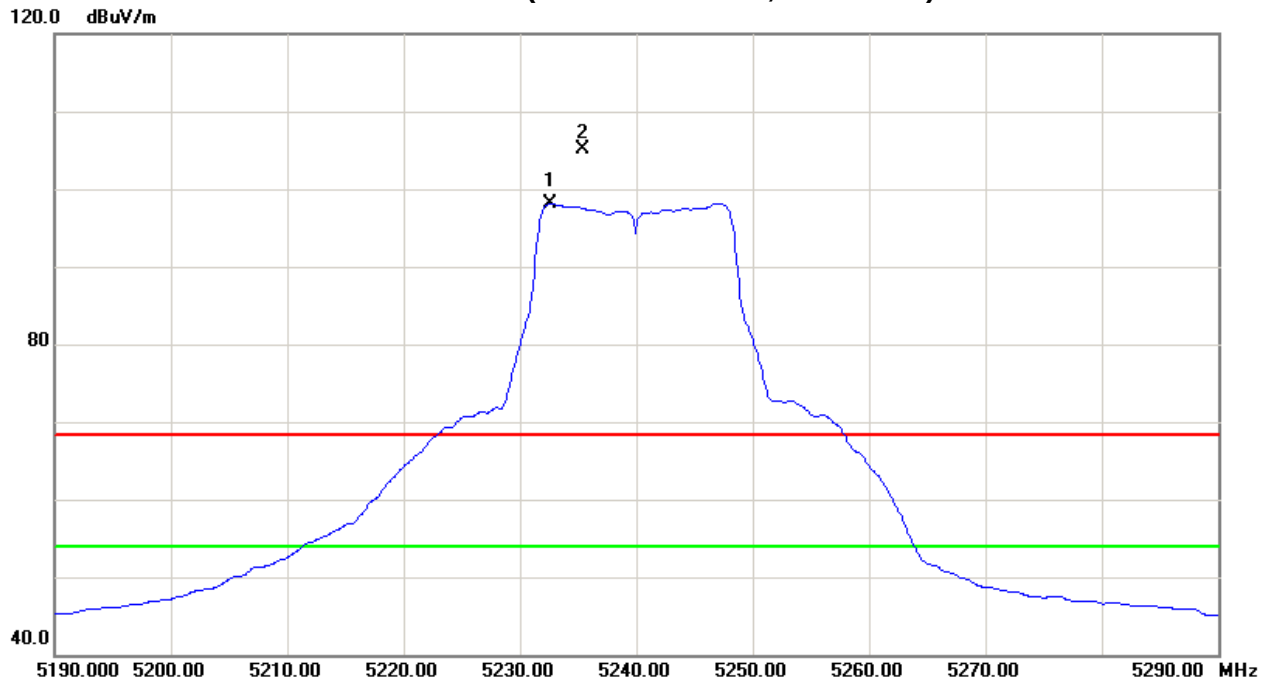



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	17.29	4.27	42.72	60.01	46.99	-44.76	-57.78	68.30	54.00	-27.00	-41.30	X/E
5175.70	V	60.44	52.70	42.78	103.22	95.48	-1.55	-9.29					X/F
10355.15	V	40.57	30.25	16.03	56.60	46.28	-48.17	-58.49	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)

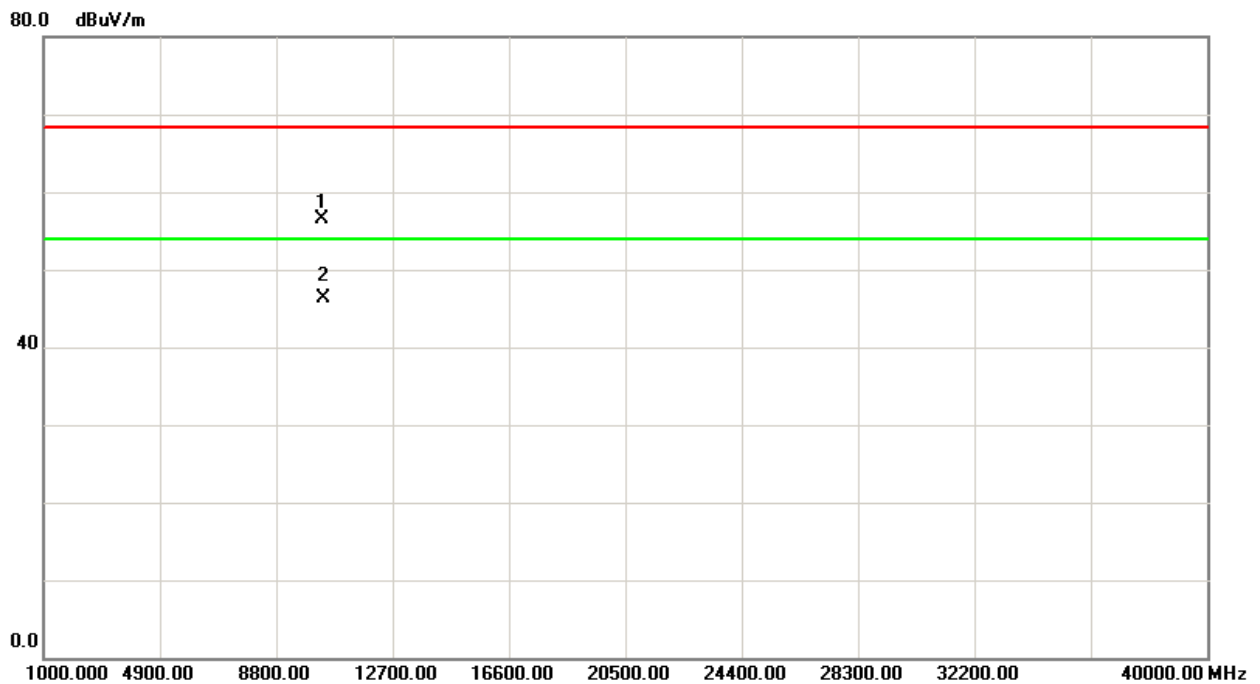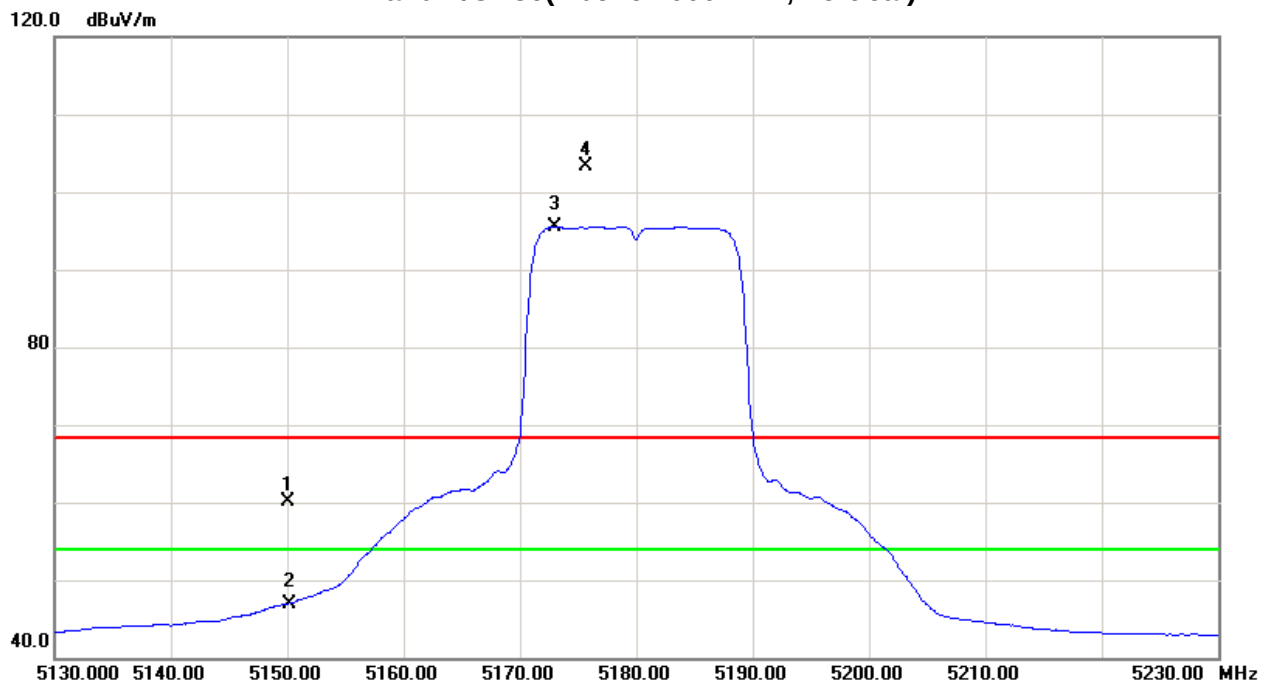



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	12.98	2.73	42.72	55.70	45.45	-49.07	-59.32	68.30	54.00	-27.00	-41.30	X/E
5182.50	H	63.10	53.91	42.80	105.90	96.71	1.13	-8.06					X/F
10363.00	H	40.86	30.12	16.02	56.88	46.14	-47.89	-58.63	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)

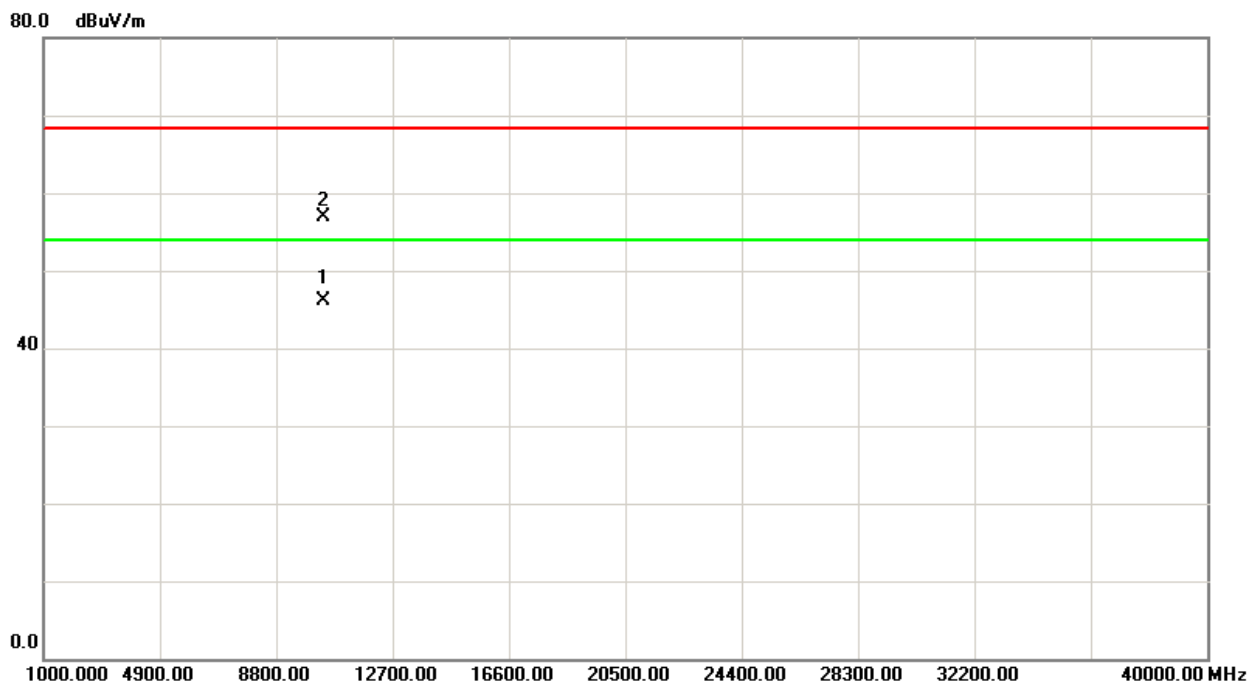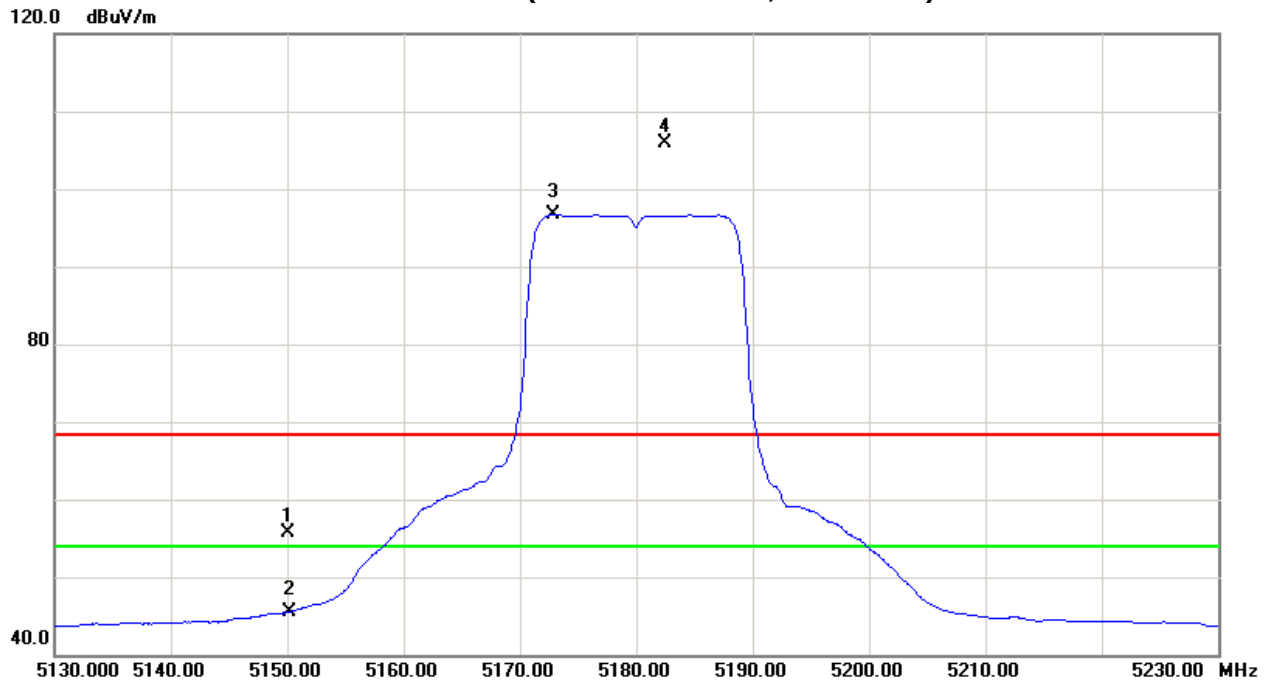



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5194.50	V	60.81	52.64	42.83	103.64	95.47	-1.13	-9.30					X/F
10404.30	V	40.83	30.25	15.96	56.79	46.21	-47.98	-58.56	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)

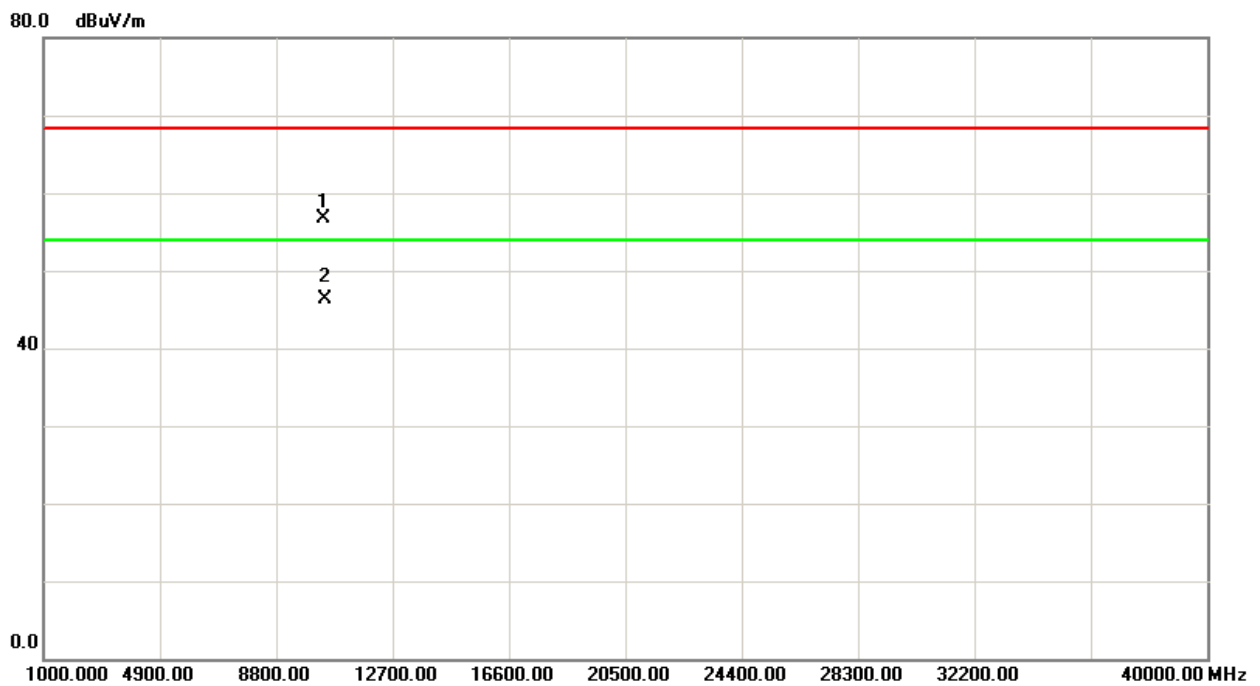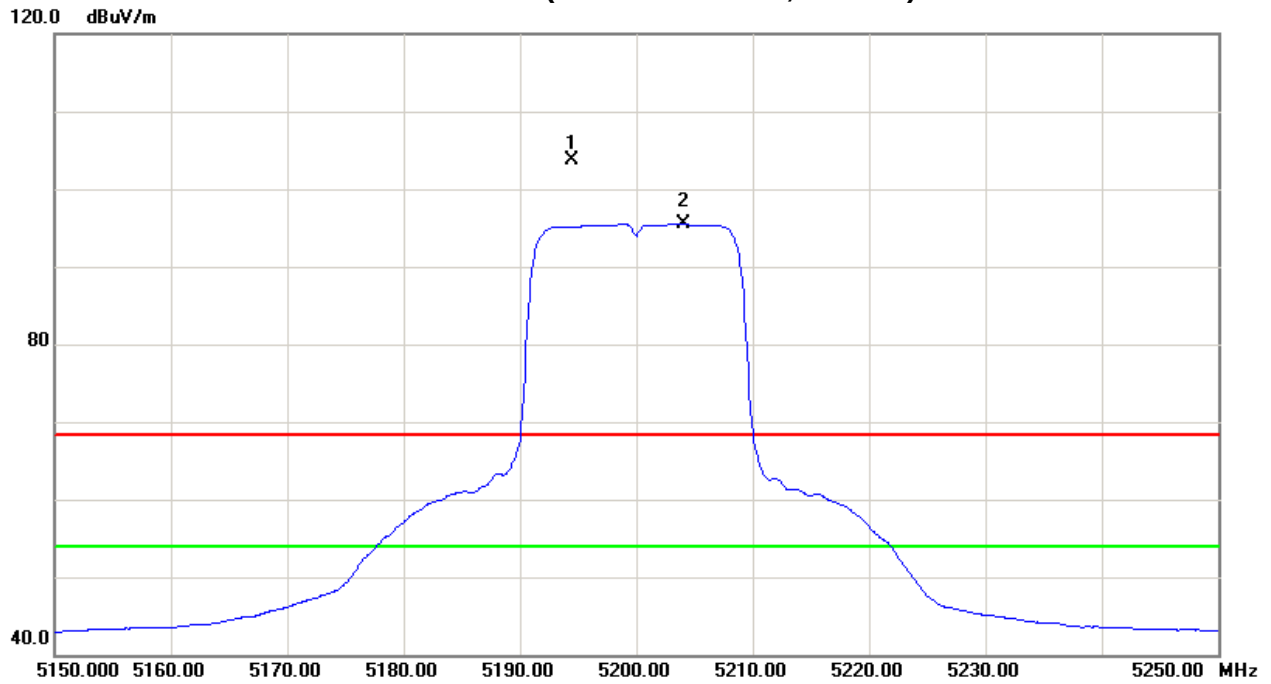



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5194.40	H	62.81	53.96	42.83	105.64	96.79	0.87	-7.98					X/F
10405.30	H	40.95	30.48	15.97	56.92	46.45	-47.85	-58.32	85.64	76.79	-9.66	-18.51	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)

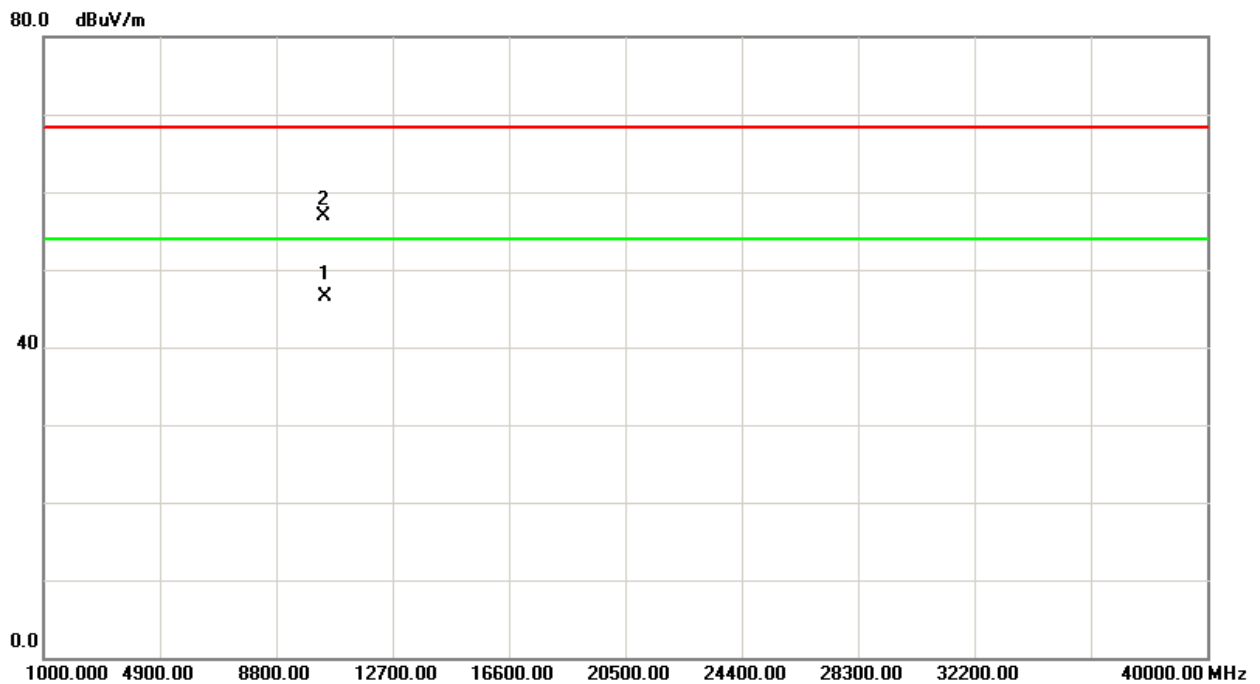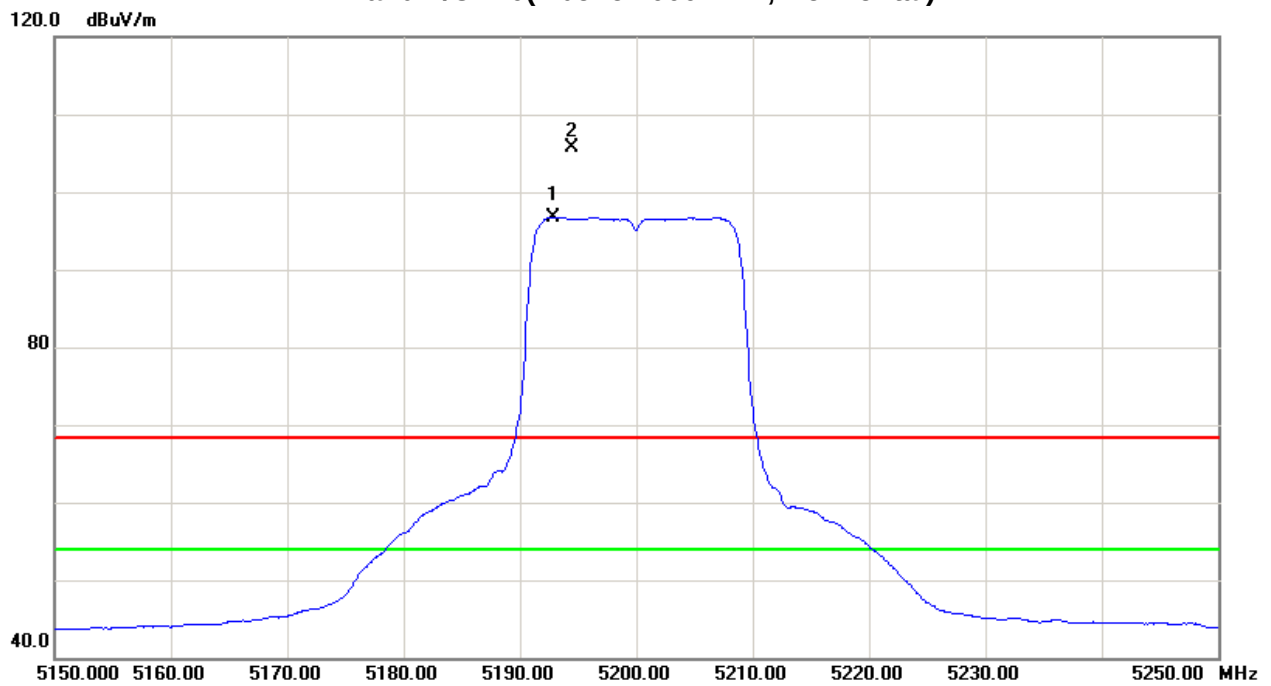



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5236.30	V	60.48	52.68	42.93	103.41	95.61	-1.36	-9.16					X/F
10485.15	V	40.67	30.31	15.84	56.51	46.15	-48.26	-58.62	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)

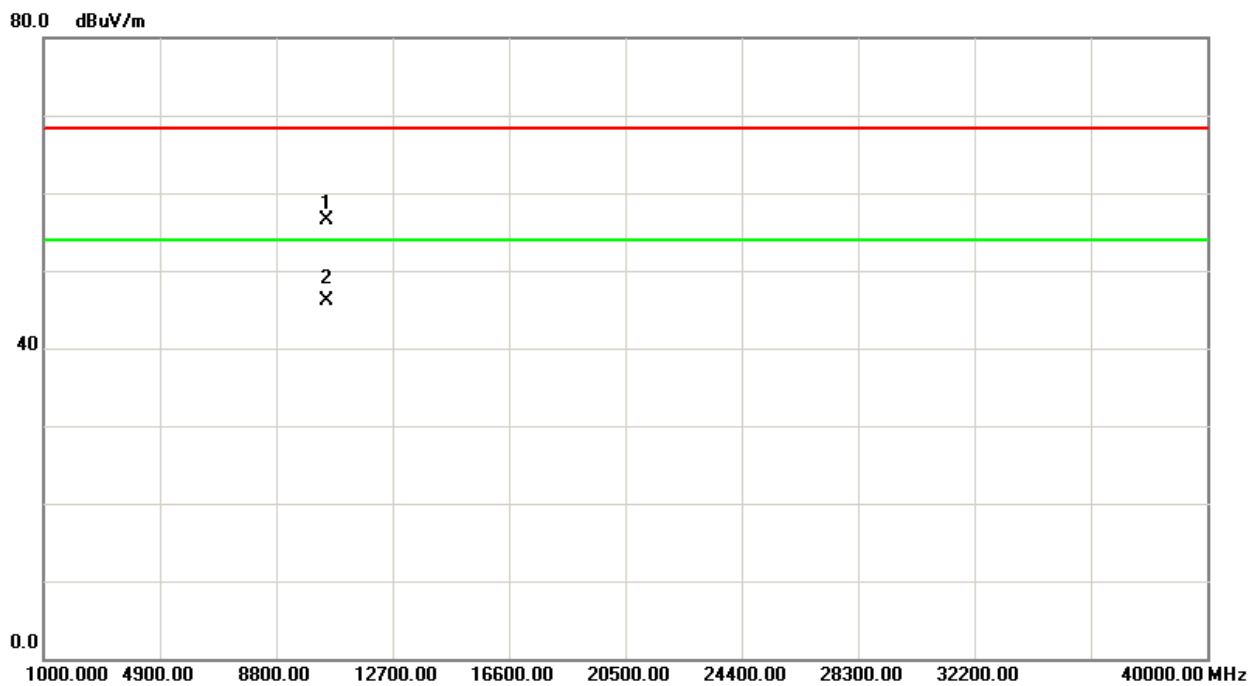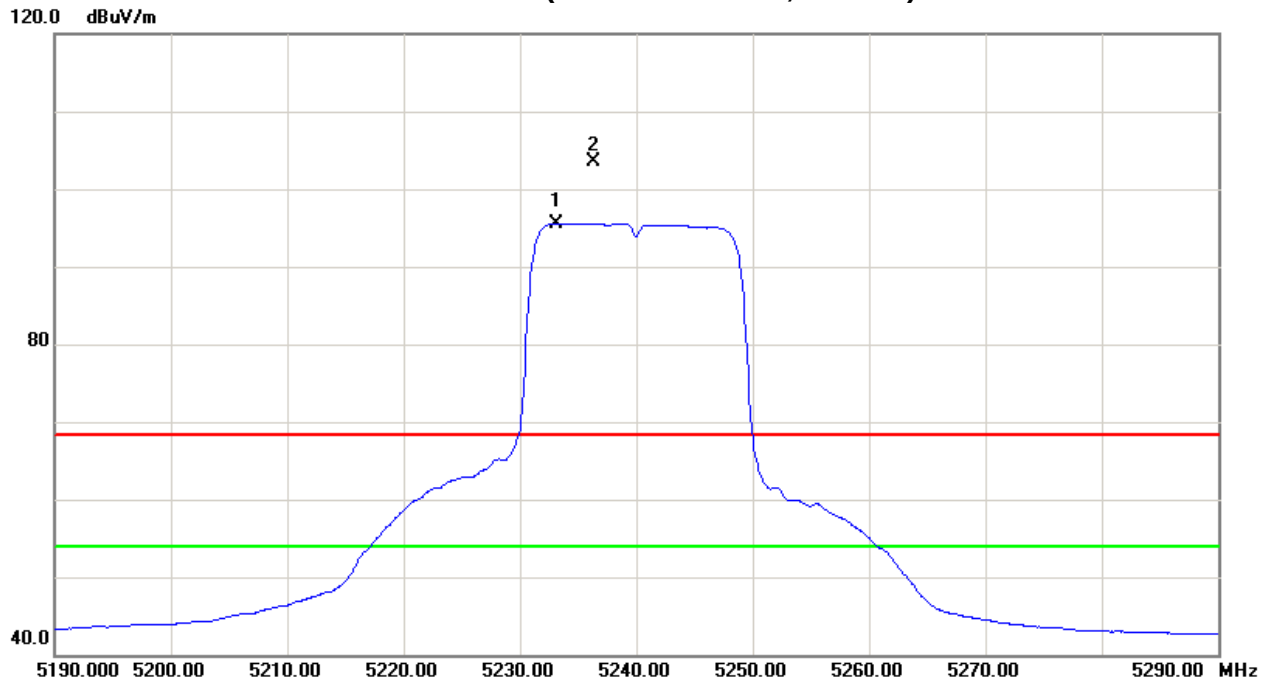



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBUV/m)		Act.(dBm)		Limit(dBUV/m)		Limit(dBm)		Note
		Peak (dBUV)	AV (dBUV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5233.00	H	64.29	55.28	42.92	107.21	98.20	2.44	-6.57					X/F
10481.58	H	40.86	30.65	15.84	56.70	46.49	-48.07	-58.28	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)

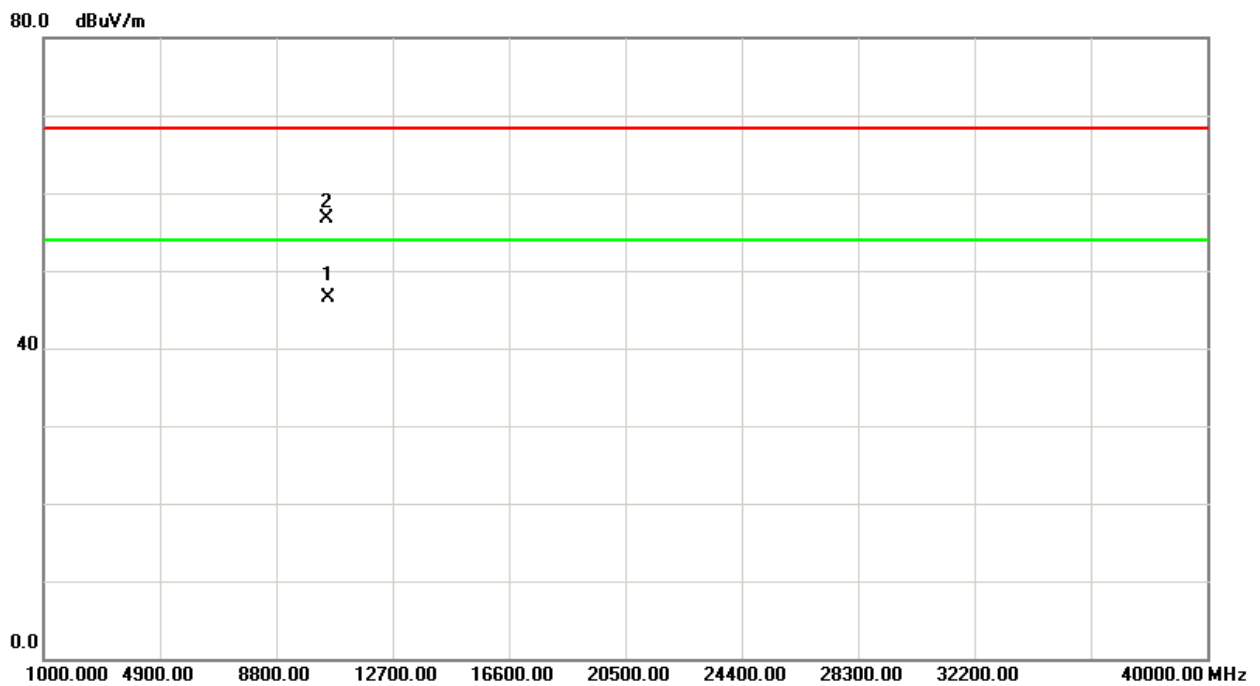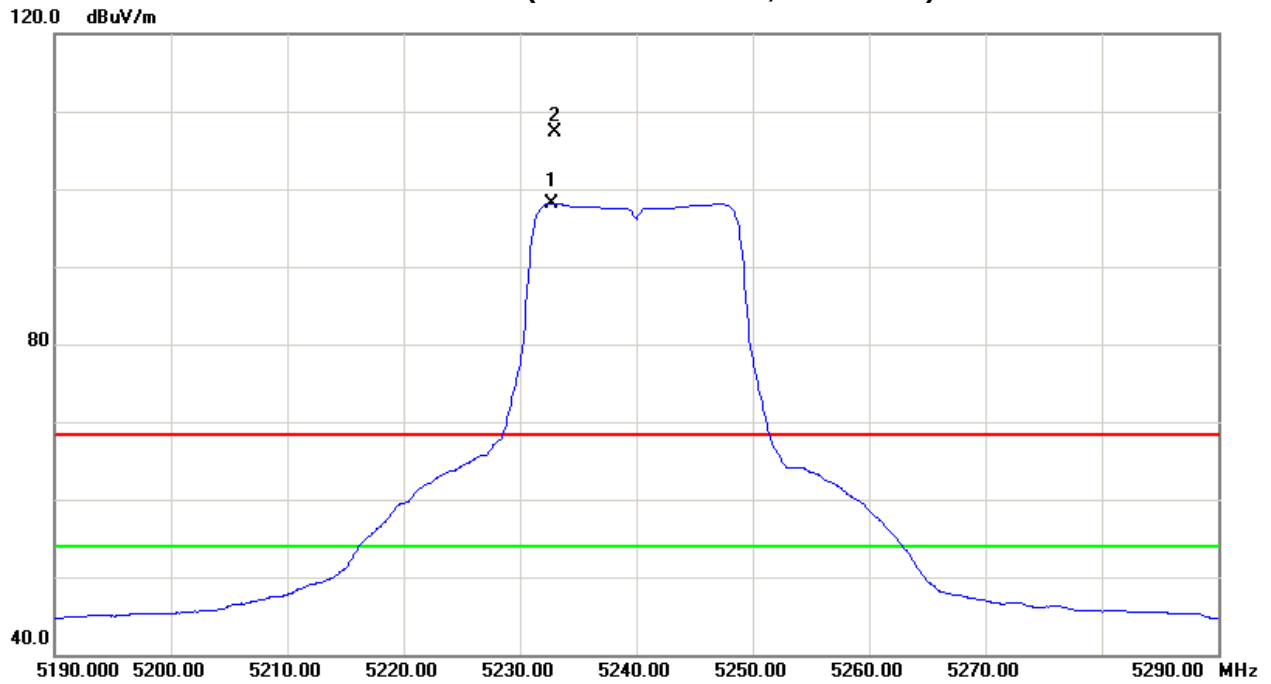



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	11.37	2.68	42.72	54.09	45.40	-50.68	-59.37	68.30	54.00	-27.00	-41.30	X/E
5185.40	V	52.79	44.02	42.81	95.60	86.83	-9.17	-17.94					X/F
10371.15	V	37.35	26.57	16.01	53.36	42.58	-51.41	-62.19	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency-“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Vertical)

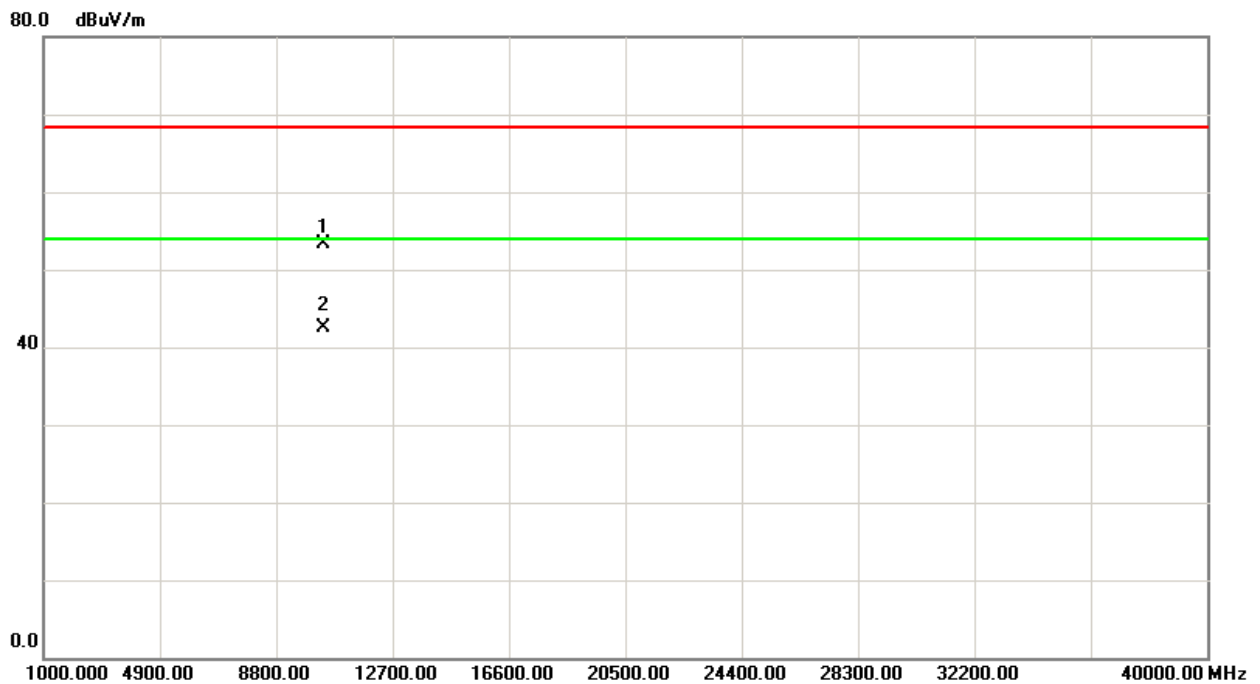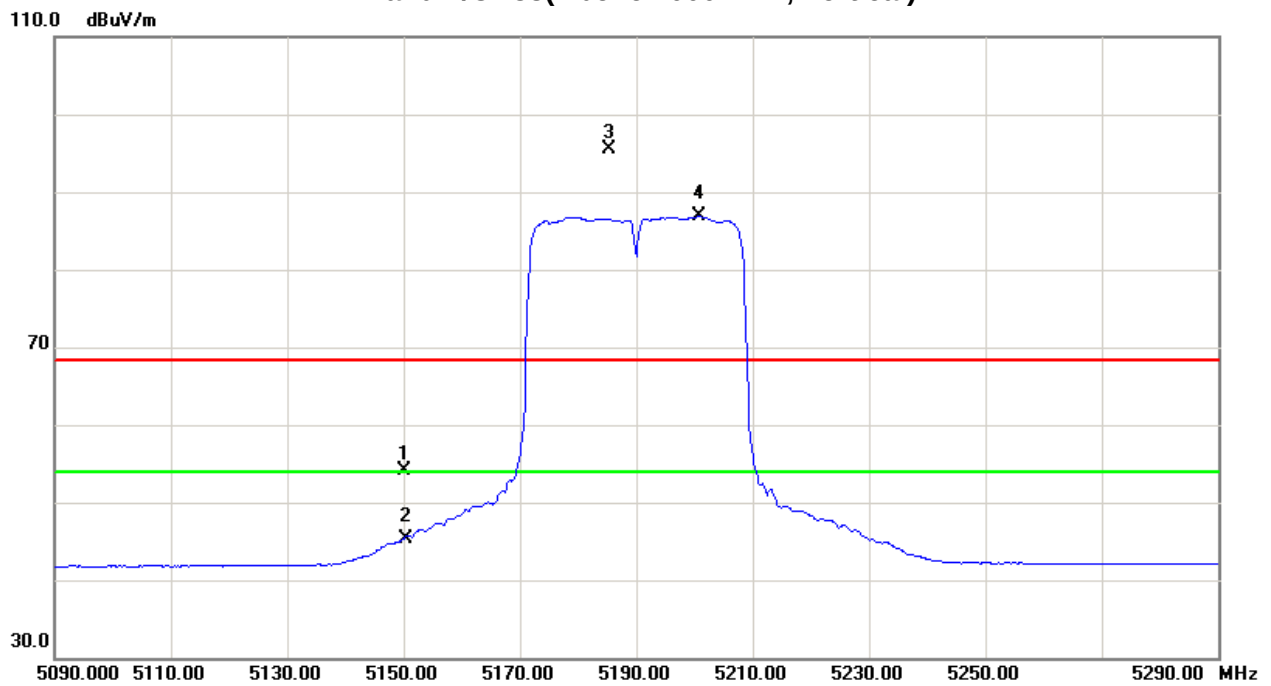



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	12.41	2.66	42.72	55.13	45.38	-49.64	-59.39	68.30	54.00	-27.00	-41.30	X/E
5191.40	H	56.43	45.55	42.82	99.25	88.37	-5.52	-16.40					X/F
10386.15	H	37.87	26.87	15.98	53.85	42.85	-50.92	-61.92	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Horizontal)

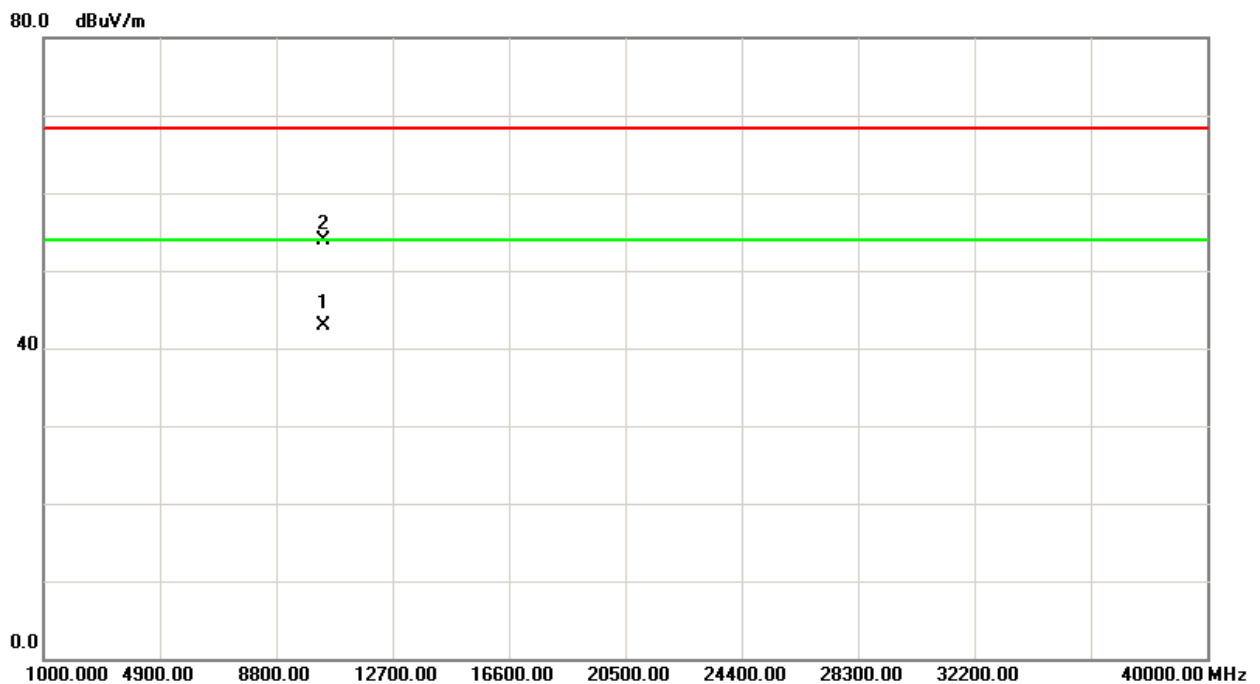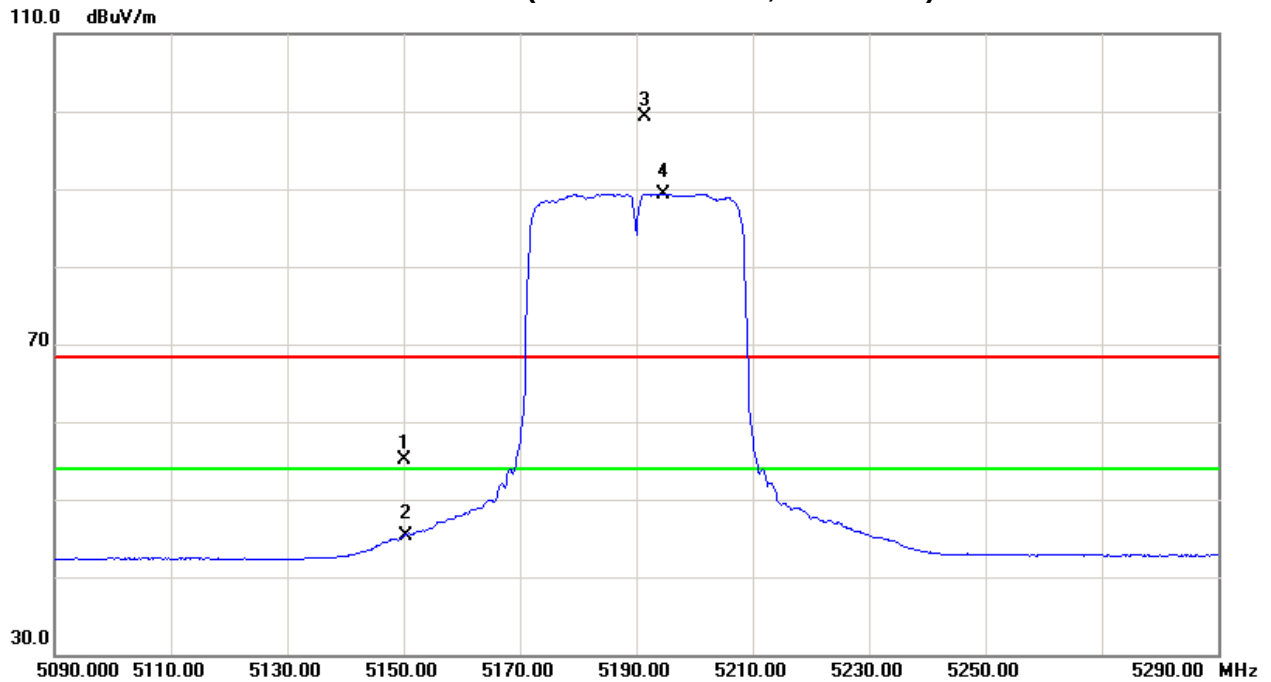



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5230MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5225.40	V	52.06	44.44	42.90	94.96	87.34	-9.81	-17.43					X/F
10455.16	V	37.15	26.37	15.89	53.04	42.26	-51.73	-62.51	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Vertical)

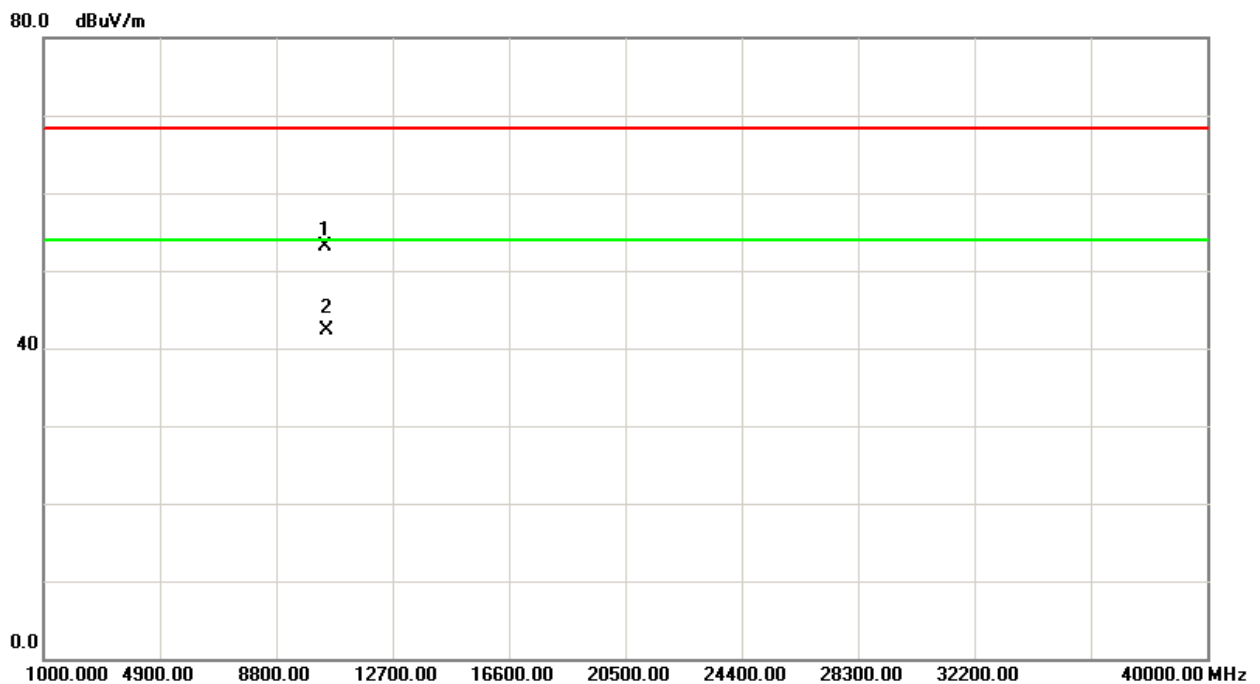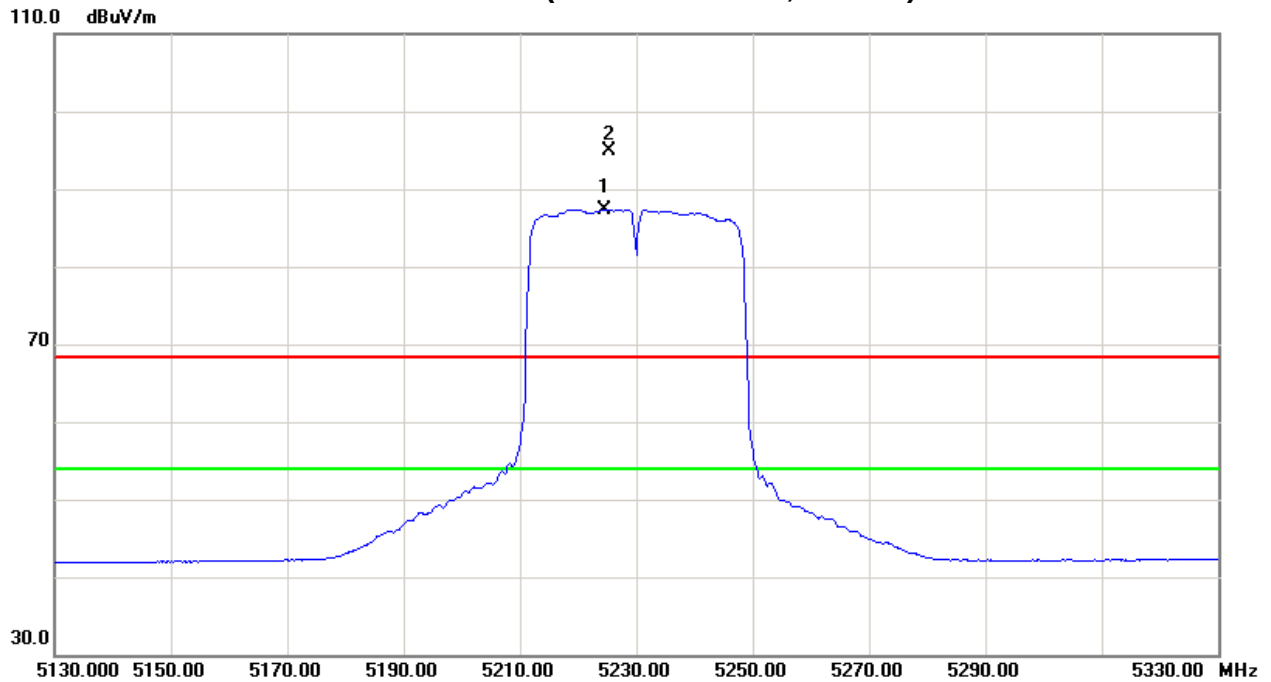



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5230MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5231.20	H	58.39	48.98	42.92	101.31	91.90	-3.46	-12.87					X/F
10456.05	H	37.56	26.58	15.89	53.45	42.47	-51.32	-62.30	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Horizontal)

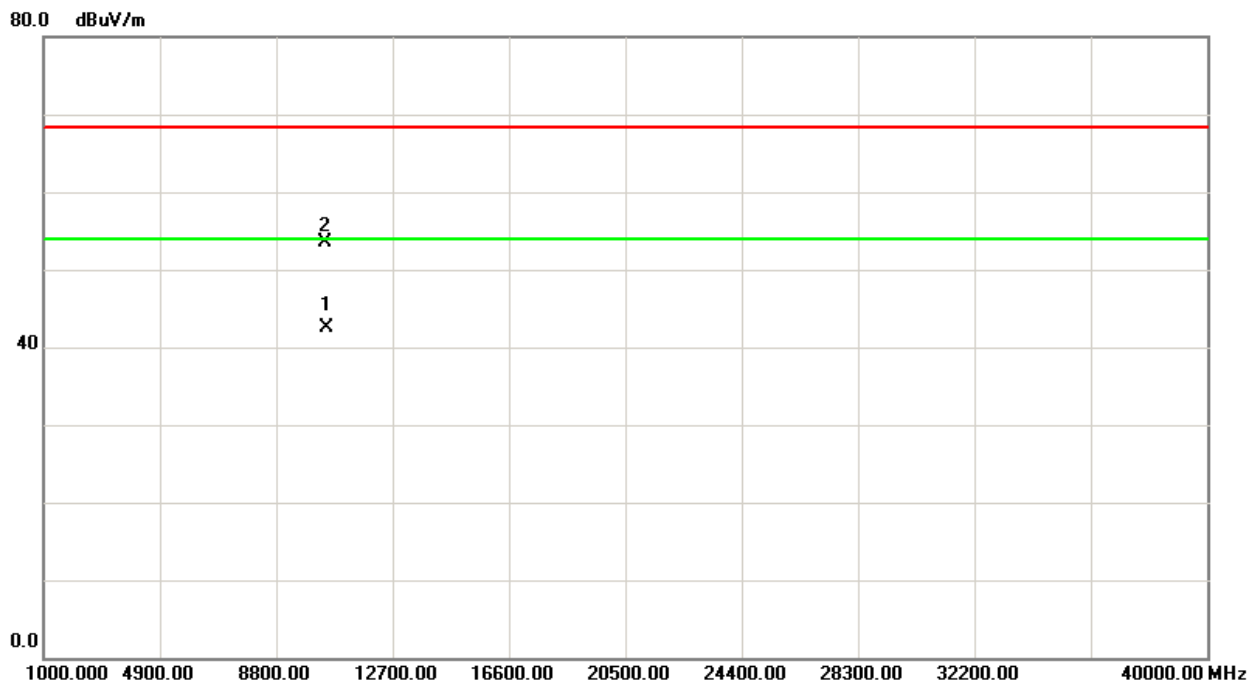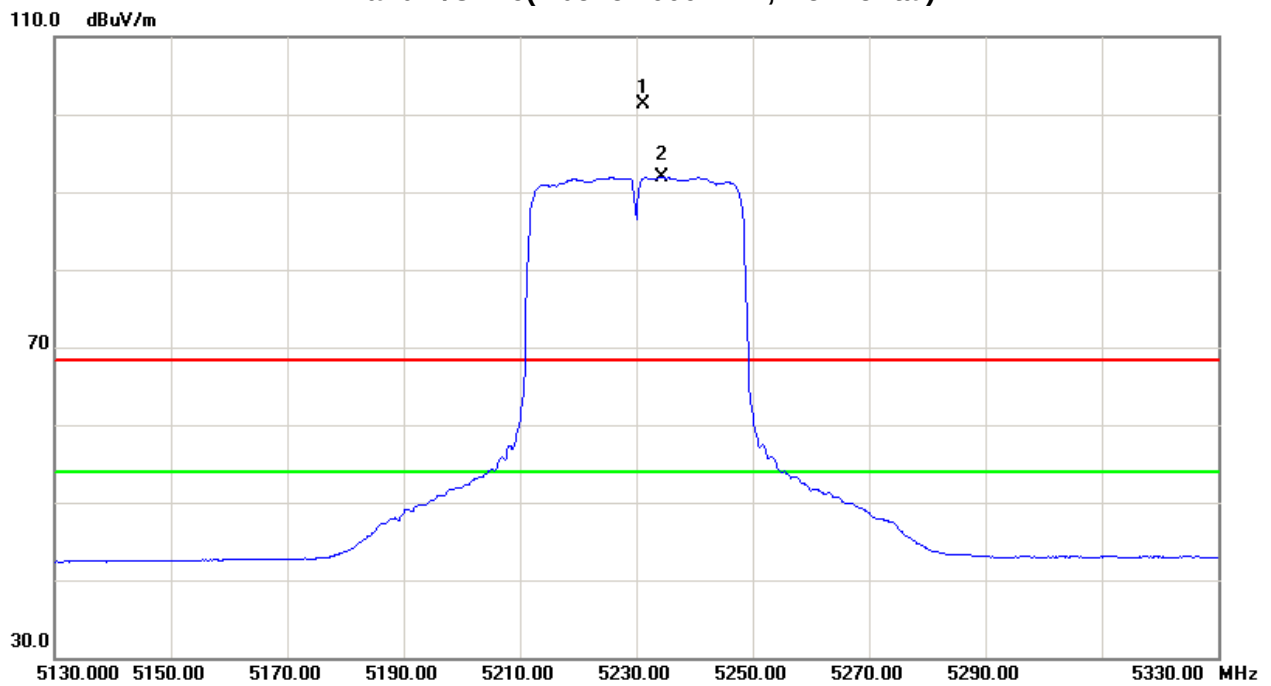



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5260MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5257.80	V	57.06	49.71	42.98	100.04	92.69	-4.73	-12.08					X/F
10524.17	V	41.12	30.14	15.90	57.02	46.04	-47.75	-58.73	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH52(Above 1000 MHz, Vertical)

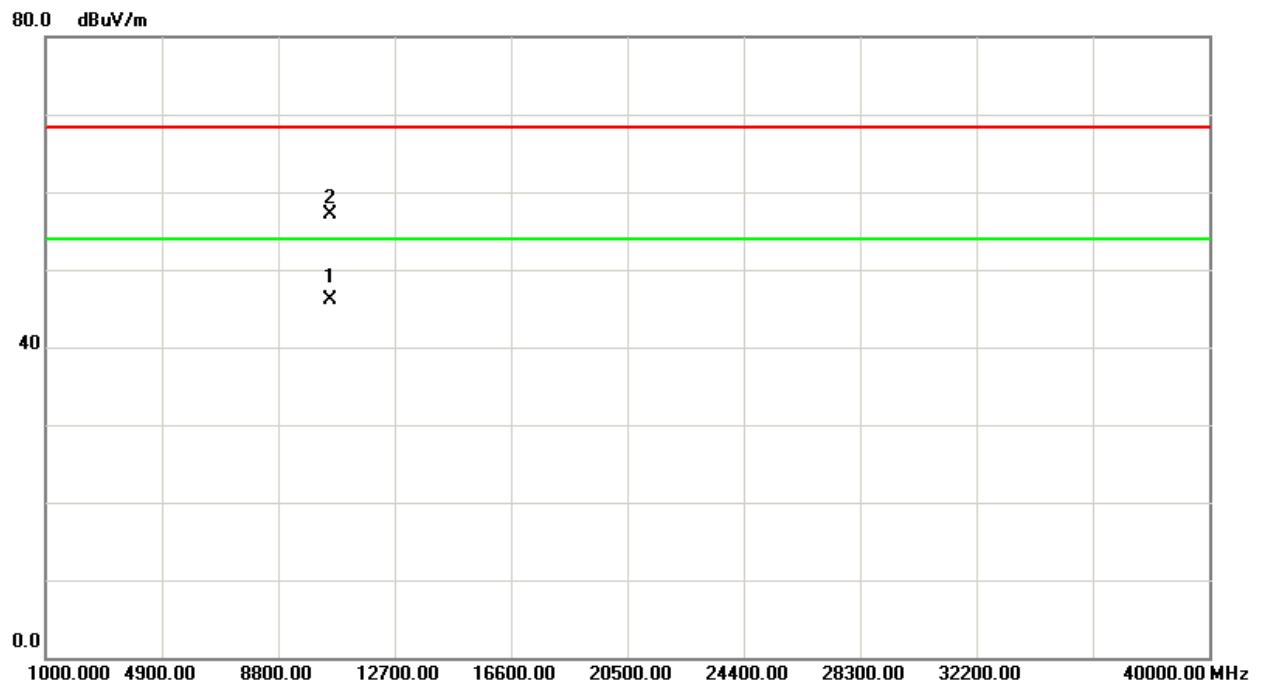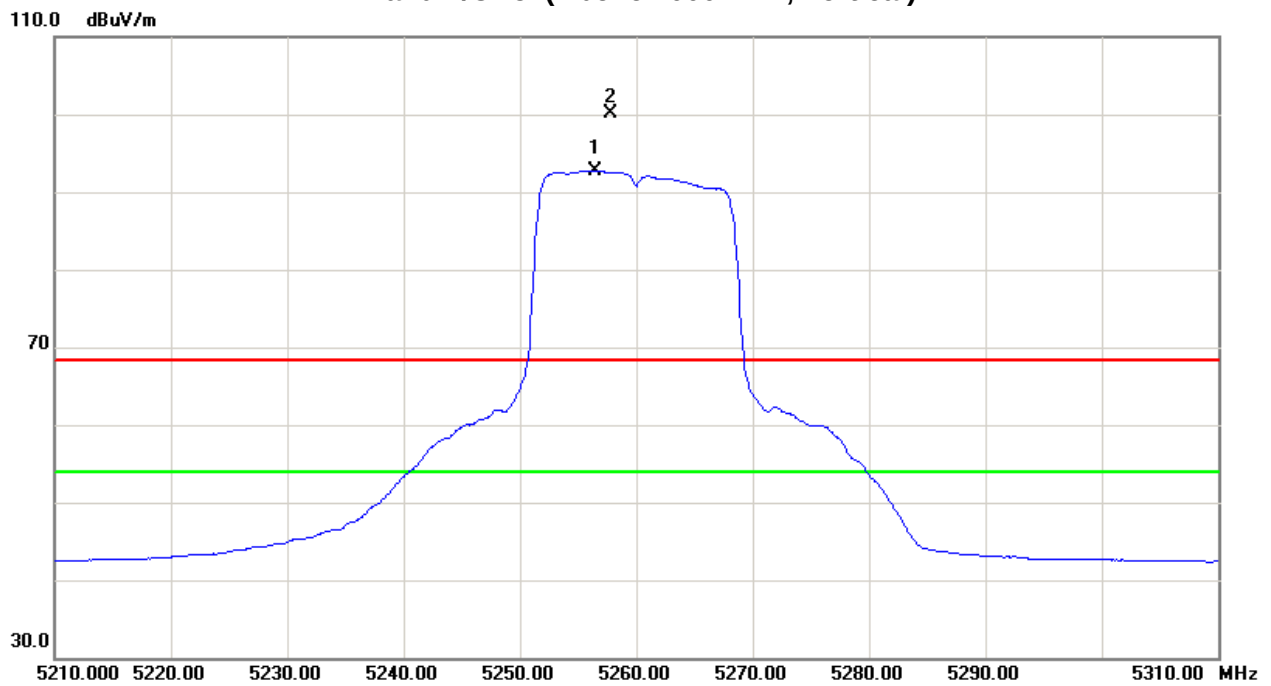



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5260MHz/Integral Antenna		



Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5252.80	H	63.42	55.59	42.97	106.39	98.56	1.62	-6.21					X/F
10516.35	H	41.56	30.37	15.87	57.43	46.24	-47.34	-58.53	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH52 (Above 1000 MHz, Horizontal)

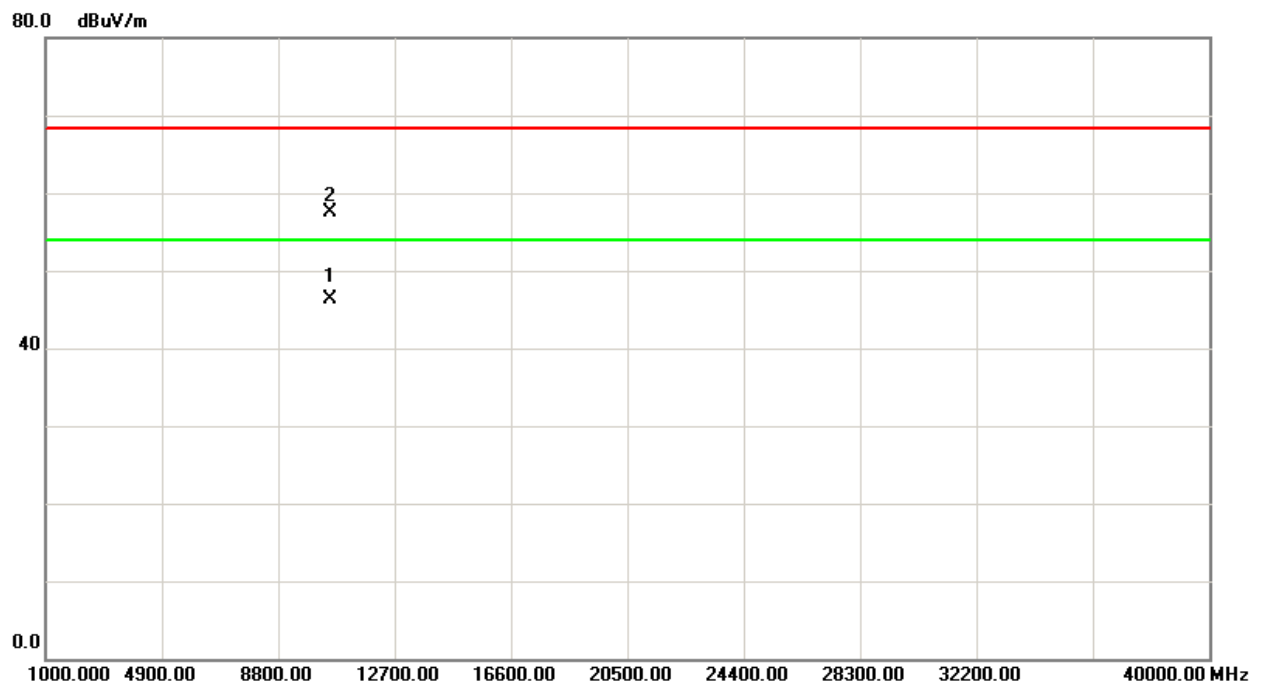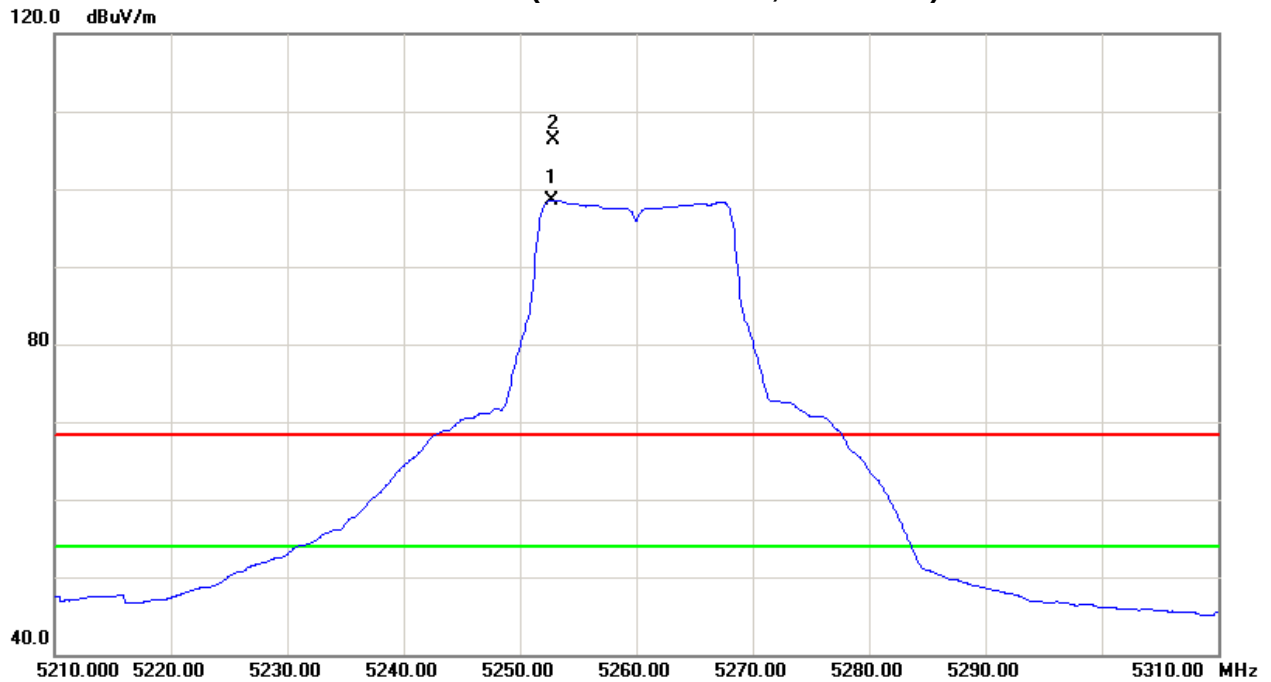



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5280MHz/Integral Antenna		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5279.00	V	56.59	49.11	43.03	99.62	92.14	-5.15	-12.63					X/F
10557.18	V	41.14	30.02	15.98	57.12	46.00	-47.65	-58.77	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH56(Above 1000 MHz, Vertical)

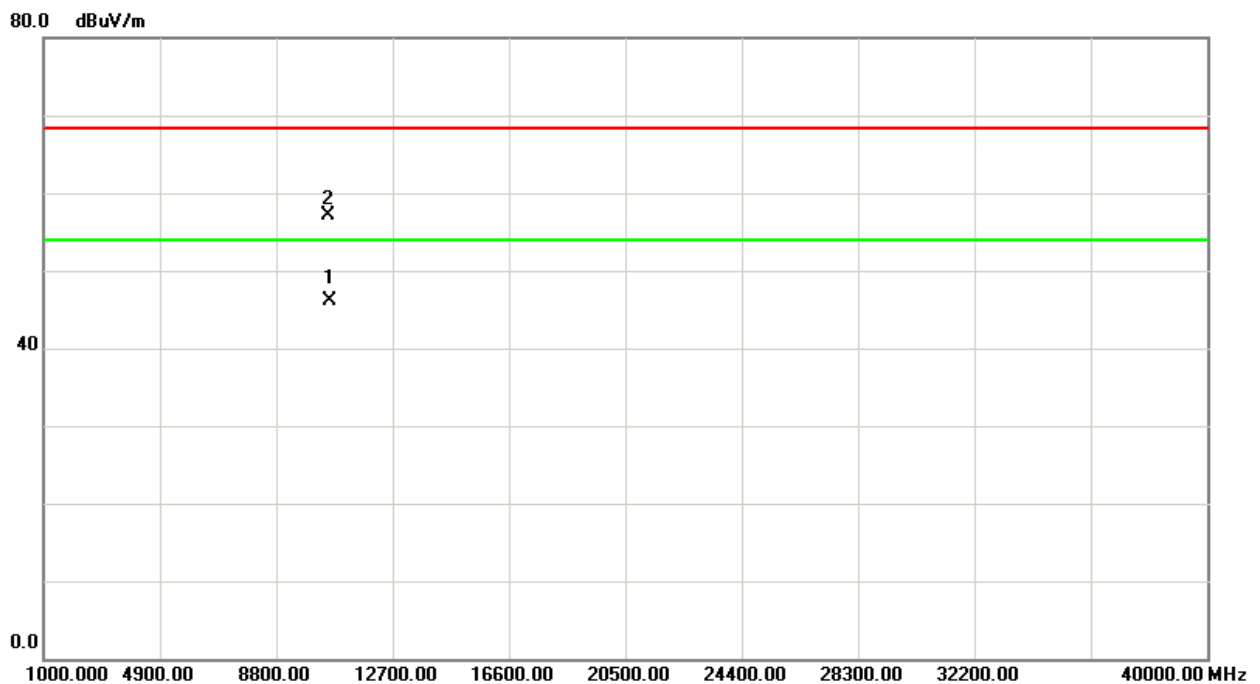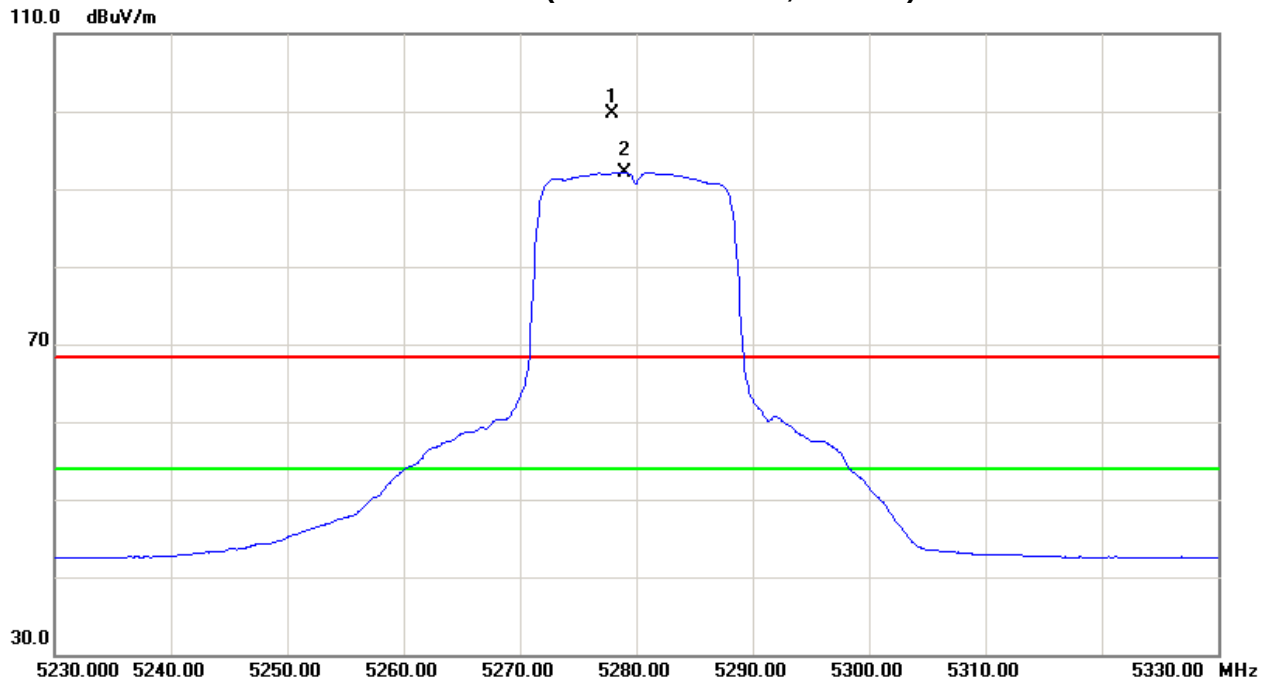



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5280MHz/Integral Antenna		



Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5272.90	H	63.24	55.96	43.03	106.27	98.99	1.50	-5.78					X/F
10556.35	H	41.44	30.35	15.99	57.43	46.34	-47.34	-58.43	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH56(Above 1000 MHz, Horizontal)

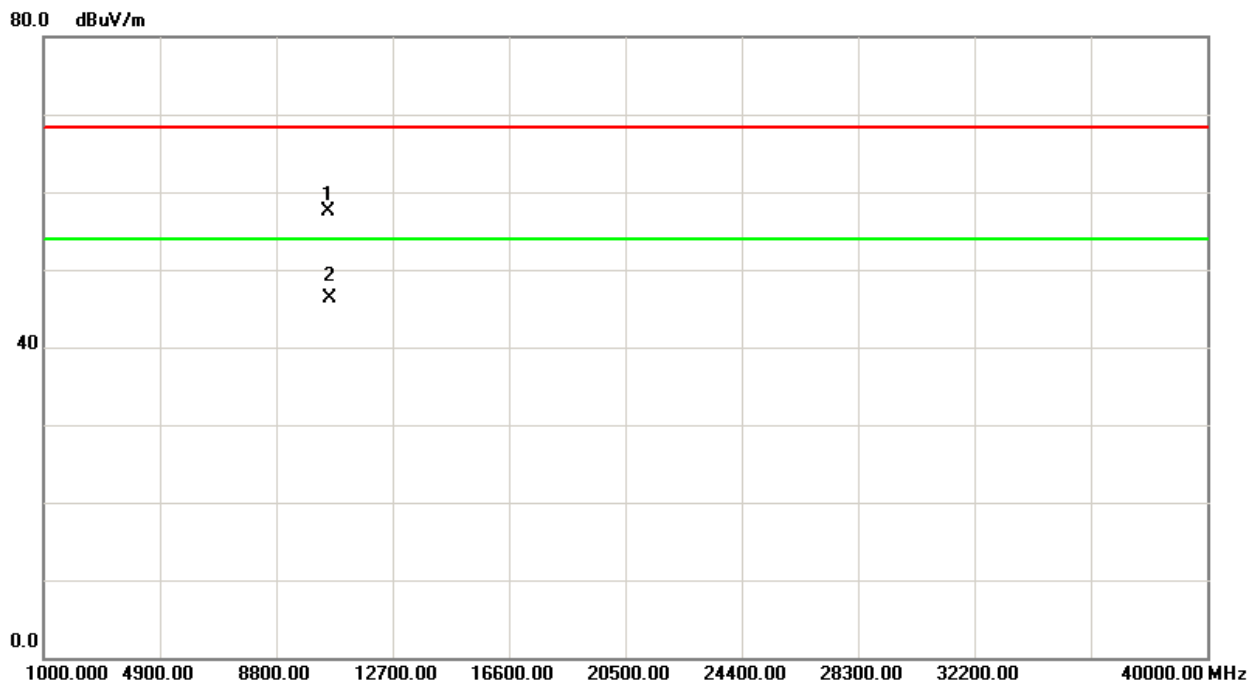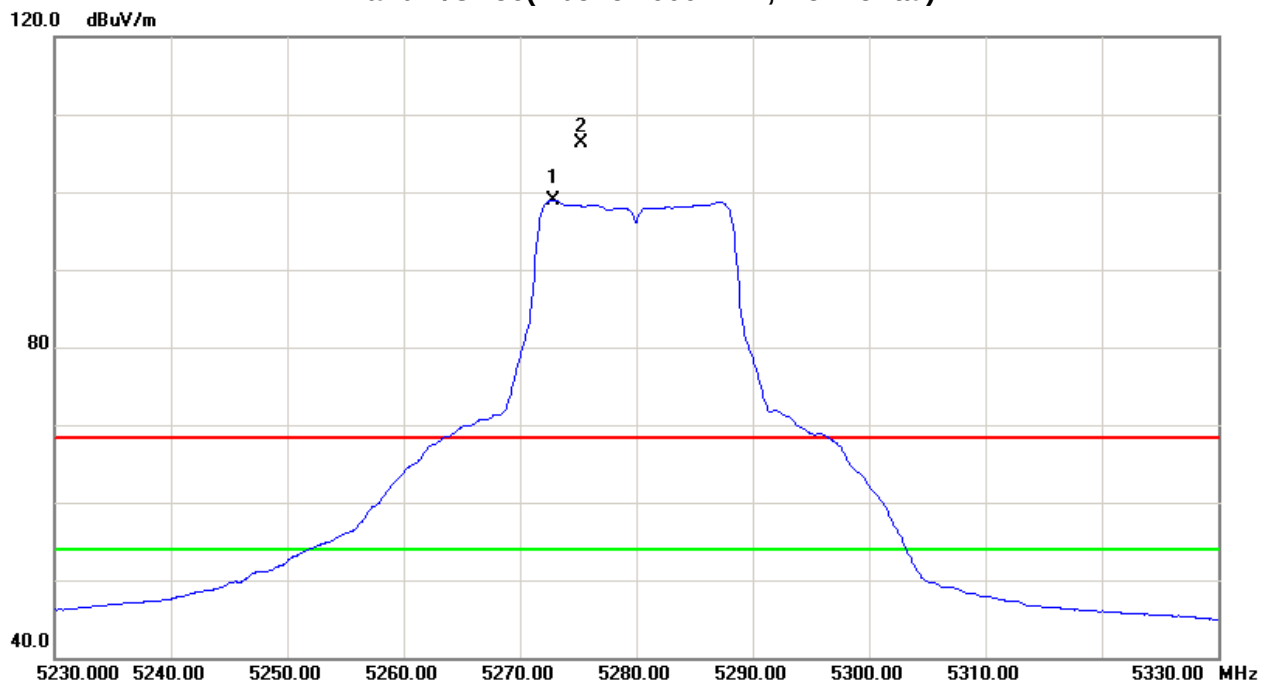




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5320MHz/Integral Antenna		

Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5321.00	V	54.77	47.32	43.15	97.92	90.47	-6.85	-14.30					X/F
5350.00	V	7.43	-0.14	43.21	50.64	43.07	-54.13	-61.70	68.30	54.00	-27.00	-41.30	X/E
10645.25	V	40.79	29.76	16.24	57.03	46.00	-47.74	-58.77	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency-“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

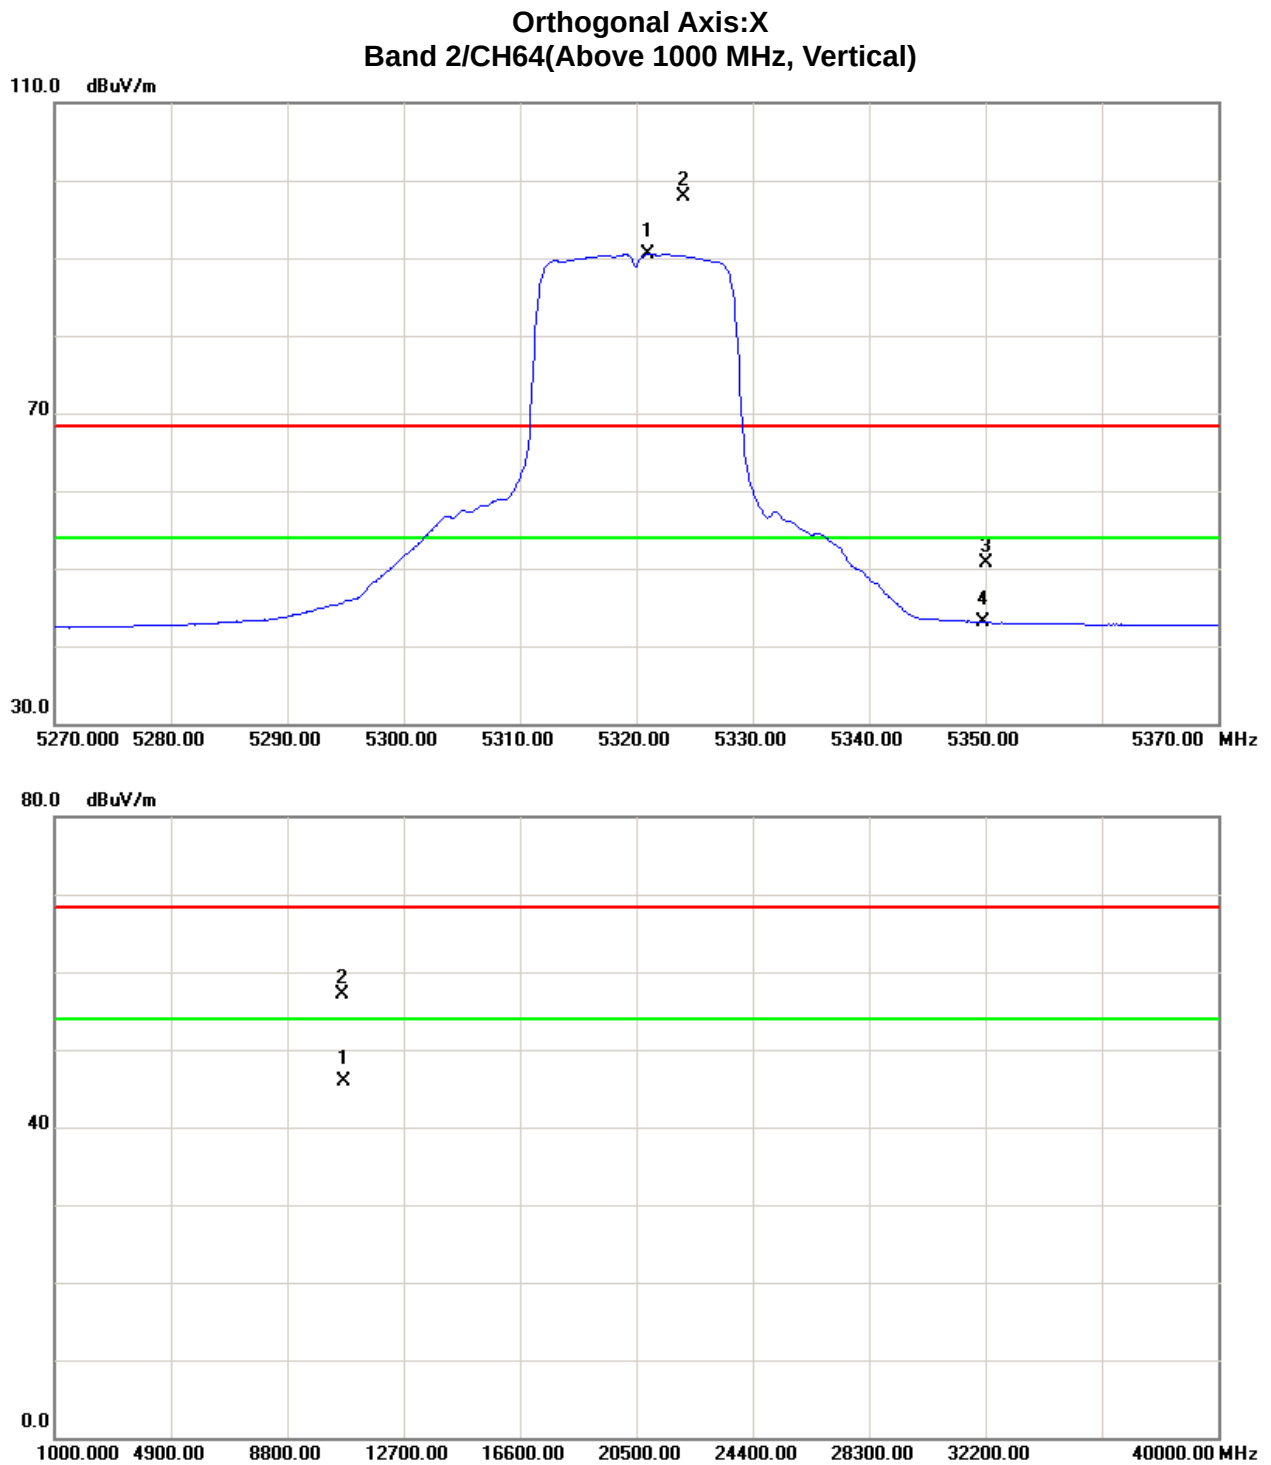



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5320MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5318.50	H	63.14	55.87	43.13	106.27	99.00	1.50	-5.77					X/F
5350.00	H	14.49	4.90	43.21	57.70	48.11	-47.07	-56.66	68.30	54.00	-27.00	-41.30	X/E
10645.35	H	41.13	30.21	16.24	57.37	46.45	-47.40	-58.32	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH64(Above 1000 MHz, Horizontal)

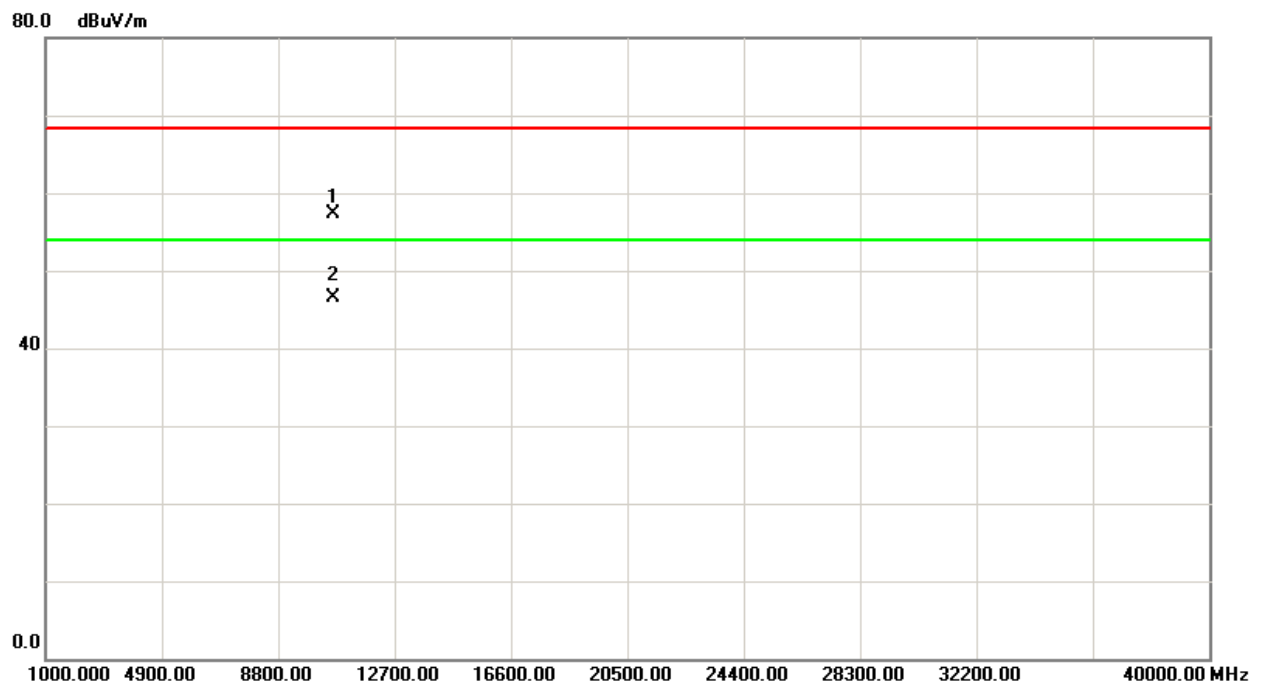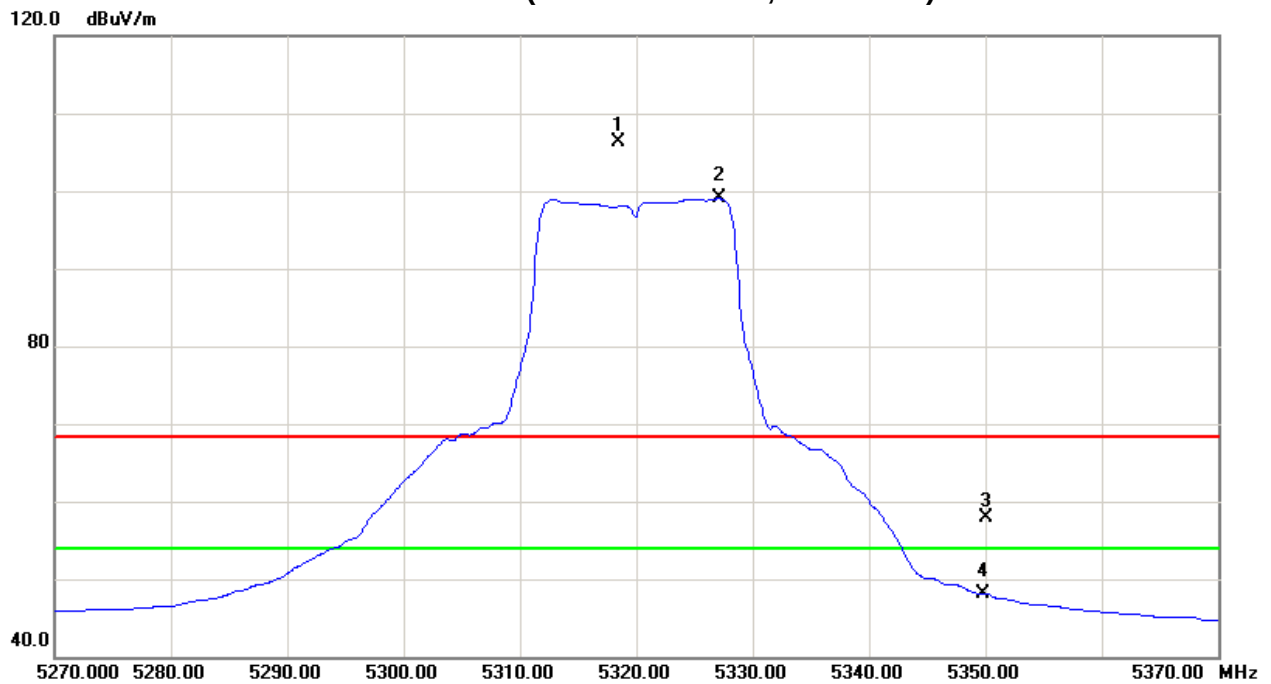



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5260MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5257.00	V	60.45	52.98	42.98	103.43	95.96	-1.34	-8.81					X/F
10526.37	V	41.34	30.37	15.87	57.21	46.24	-47.56	-58.53	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency-“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH52(Above 1000 MHz, Vertical)

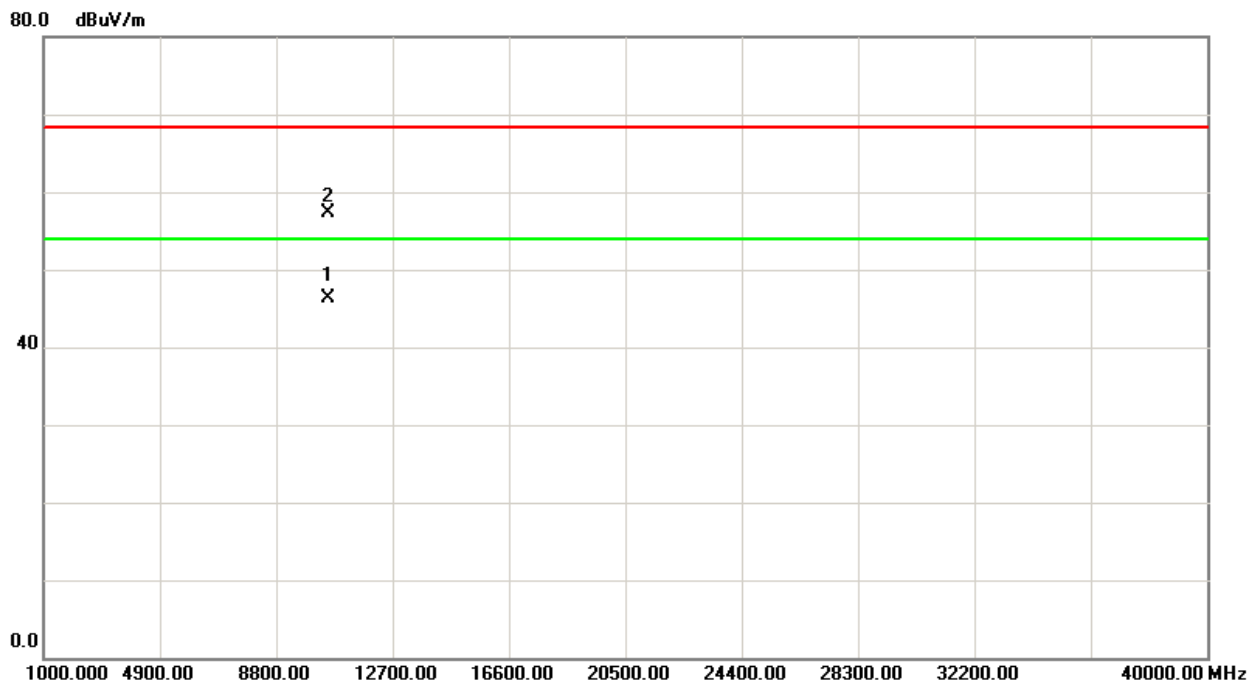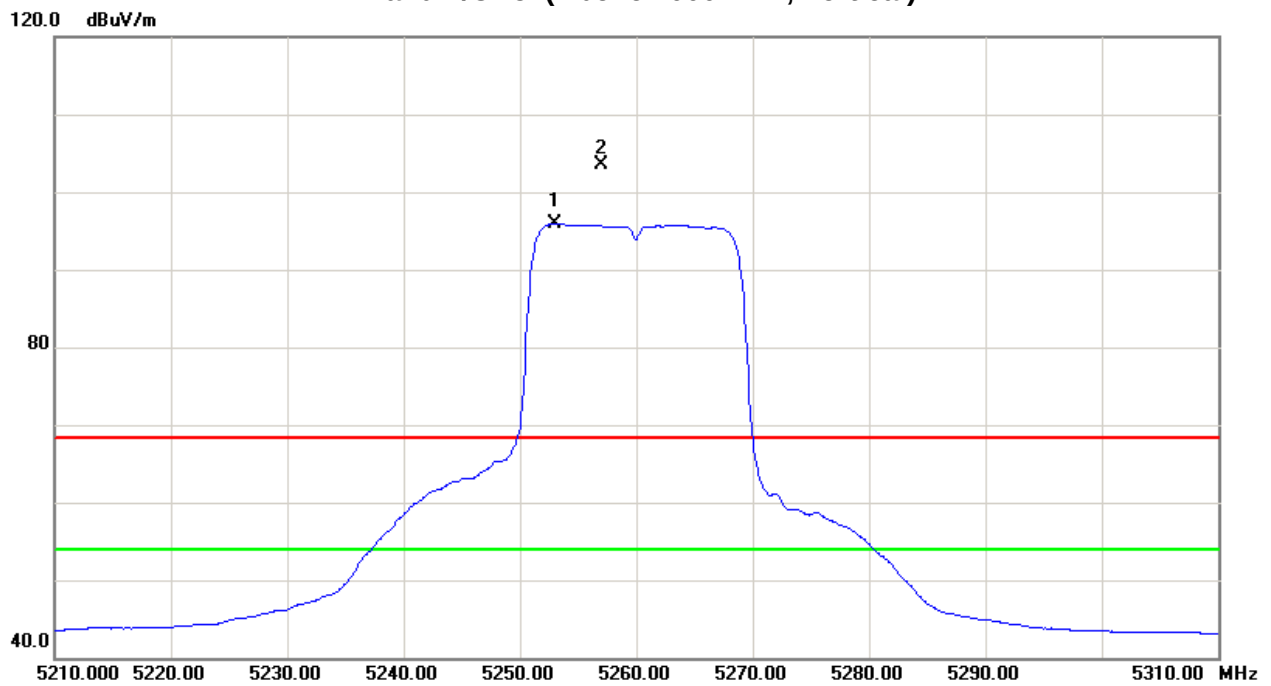



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5260MHz/Integral Antenna		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5256.80	H	64.07	55.13	42.98	107.05	98.11	2.28	-6.66					X/F
10513.75	H	41.59	30.52	15.86	57.45	46.38	-47.32	-58.39	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH52(Above 1000 MHz, Horizontal)

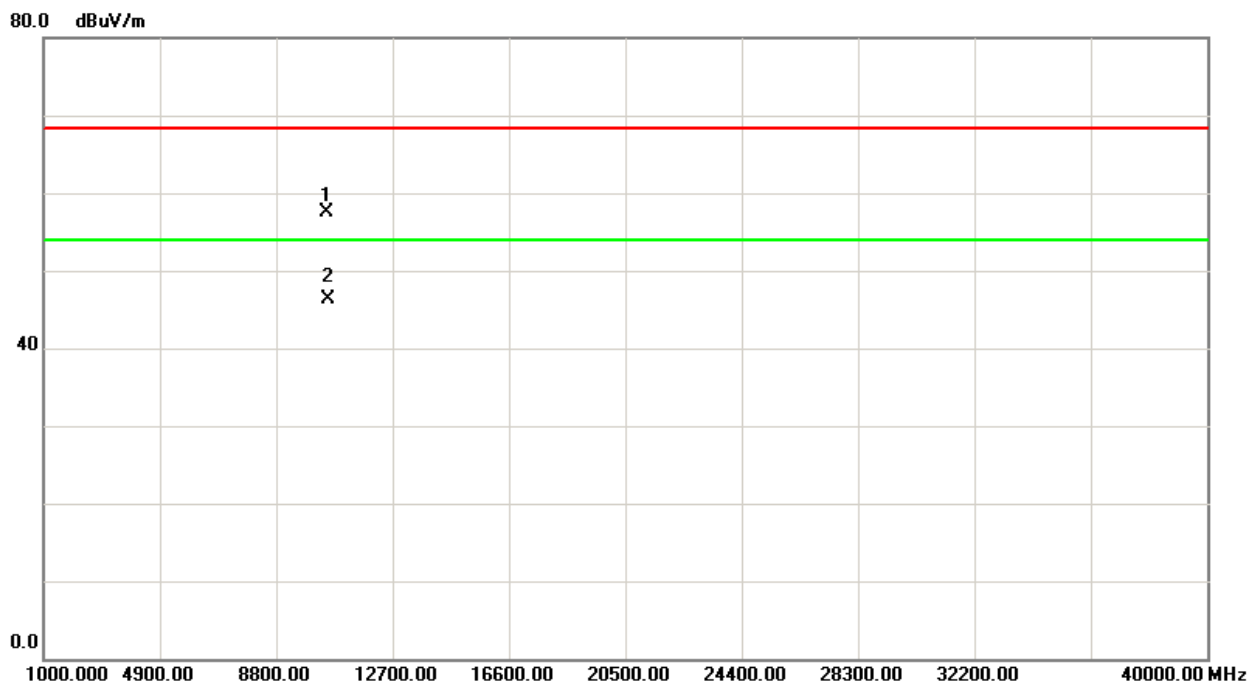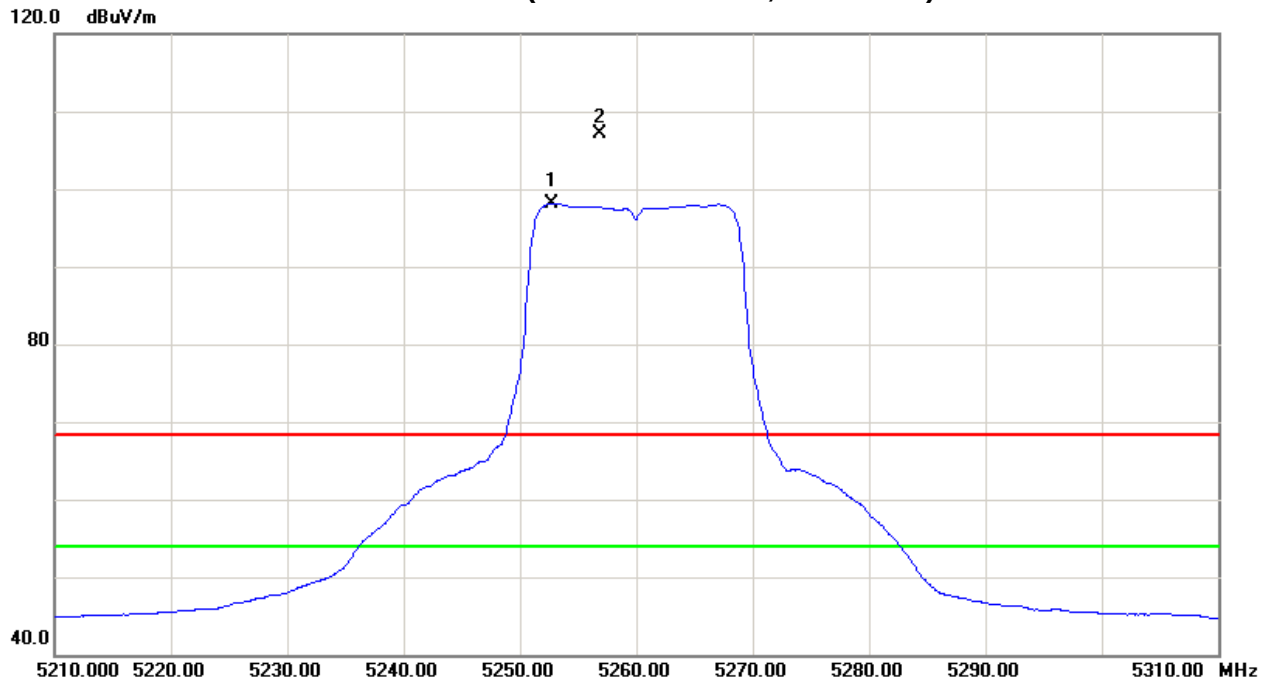



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5280MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5275.70	V	61.13	52.86	43.03	104.16	95.89	-0.61	-8.88					X/F
10564.27	V	41.46	30.35	15.99	57.45	46.34	-47.32	-58.43	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH56(Above 1000 MHz, Vertical)

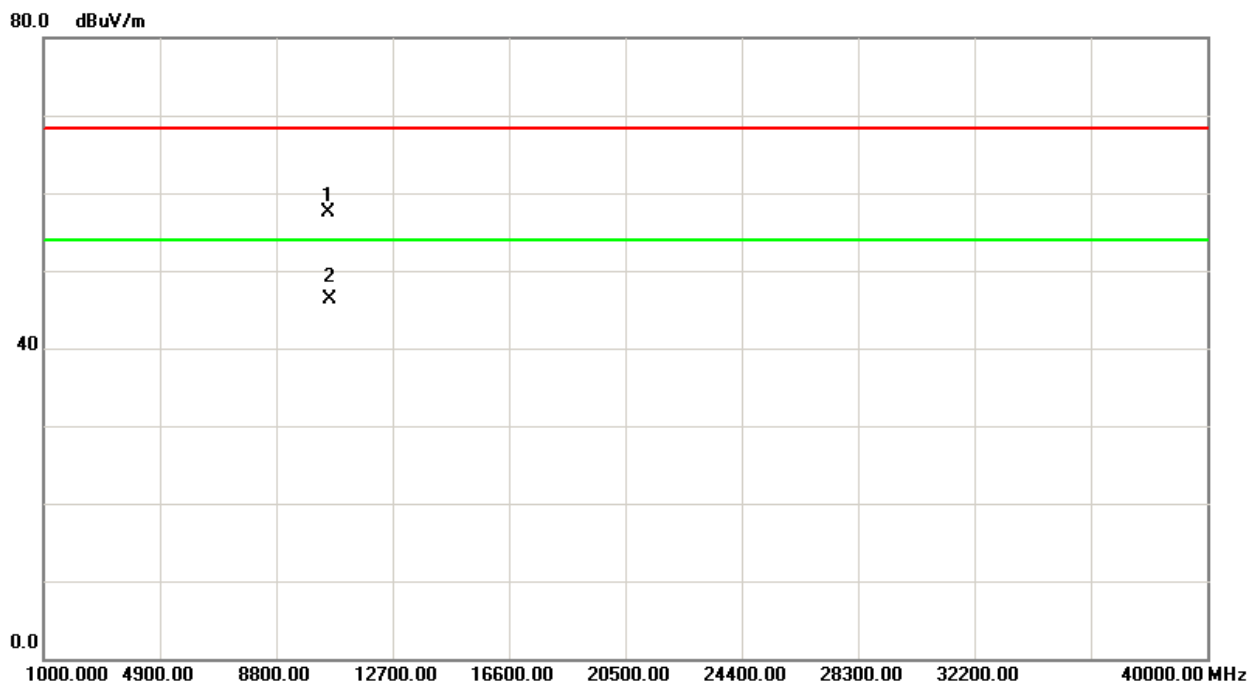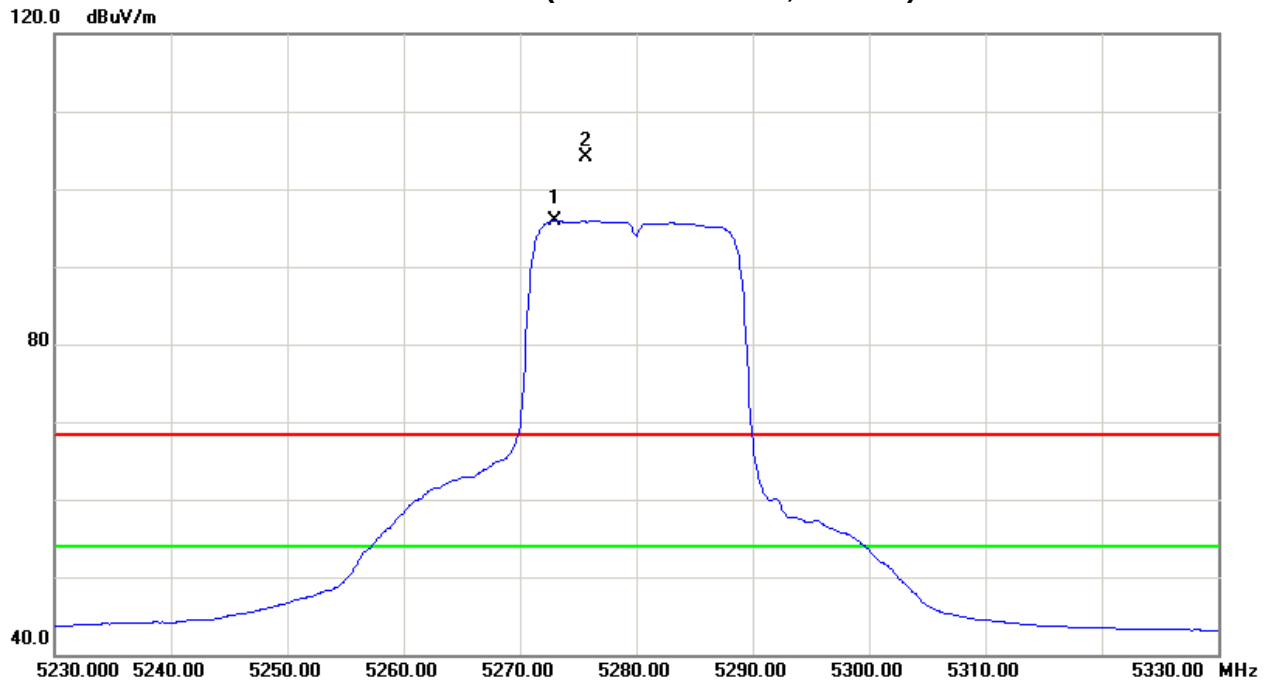



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5280MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5285.60	H	64.54	55.18	43.06	107.60	98.24	2.83	-6.53					X/F
10554.65	H	41.38	30.42	16.00	57.38	46.42	-47.39	-58.35	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH56(Above 1000 MHz, Horizontal)

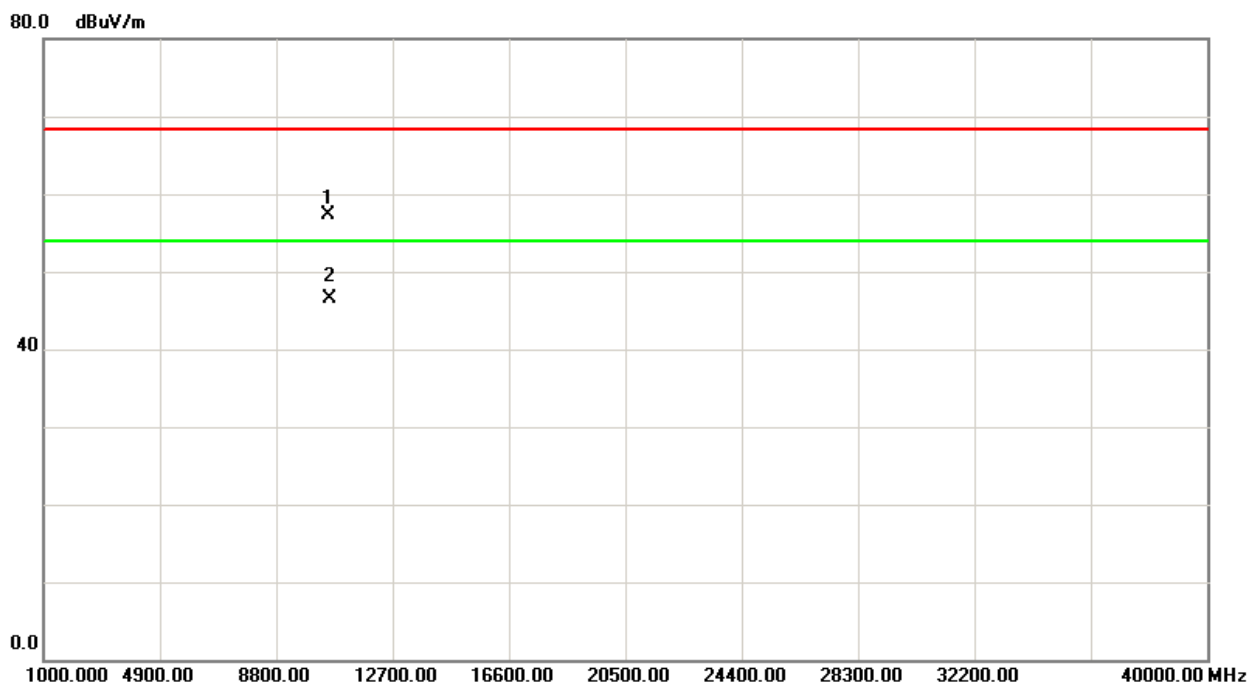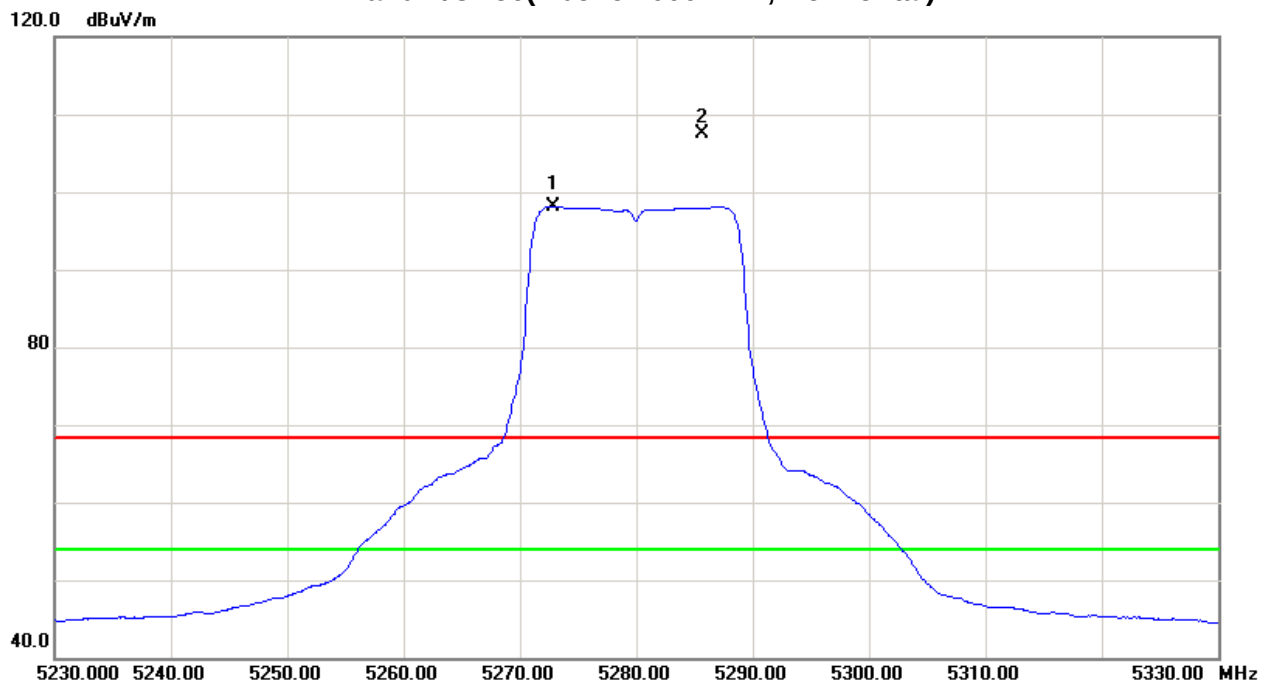



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5320MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5315.70	V	59.18	50.96	43.13	102.31	94.09	-2.46	-10.68					X/F
5350.00	V	7.41	0.47	43.21	50.62	43.68	-54.15	-61.09	68.30	54.00	-27.00	-41.30	X/E
10645.36	V	40.87	29.86	16.23	57.10	46.09	-47.67	-58.68	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH64(Above 1000 MHz, Vertical)

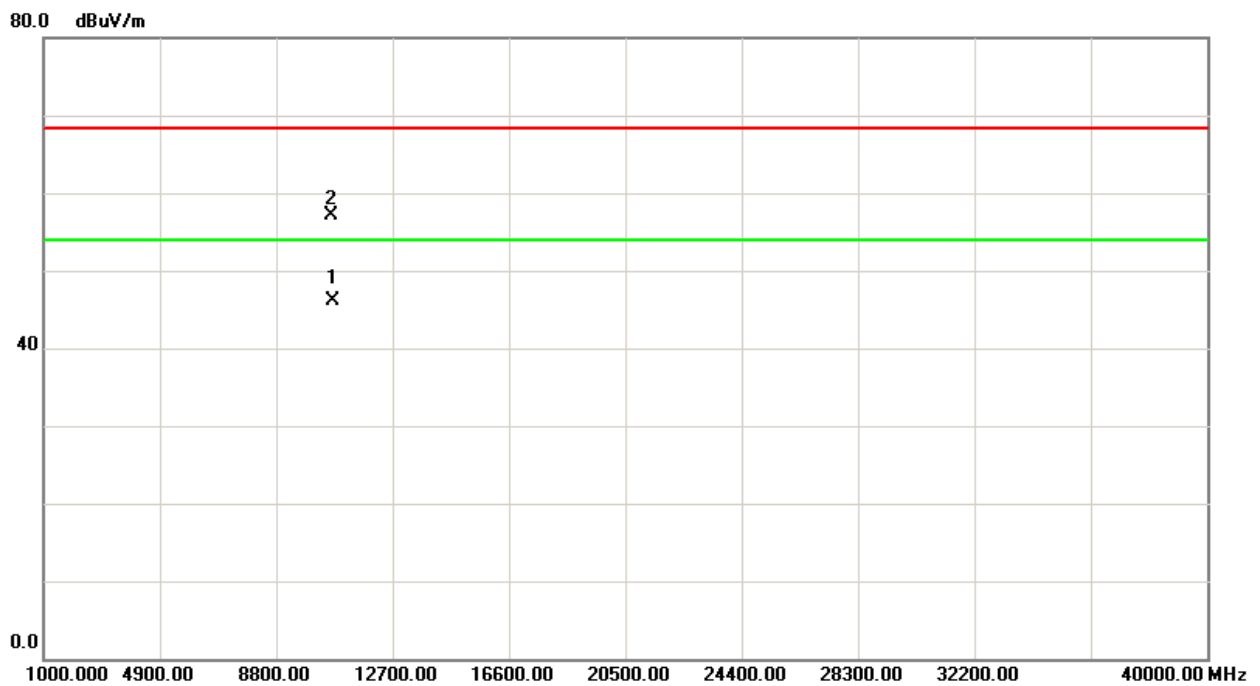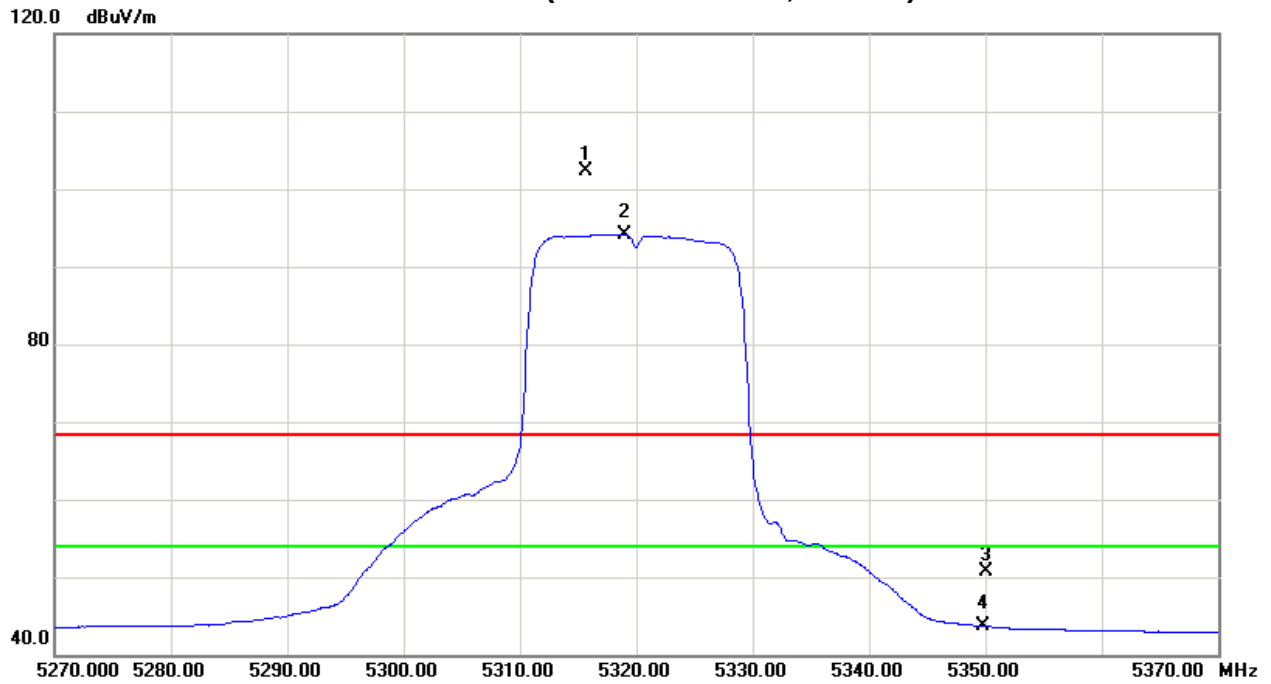



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5320MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5315.80	H	64.30	55.55	43.12	107.42	98.67	2.65	-6.10					X/F
5350.00	H	11.40	3.95	43.21	54.61	47.16	-50.16	-57.61	68.30	54.00	-27.00	-41.30	X/E
10633.64	H	41.16	30.43	16.22	57.38	46.65	-47.39	-58.12	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH64(Above 1000 MHz, Horizontal)

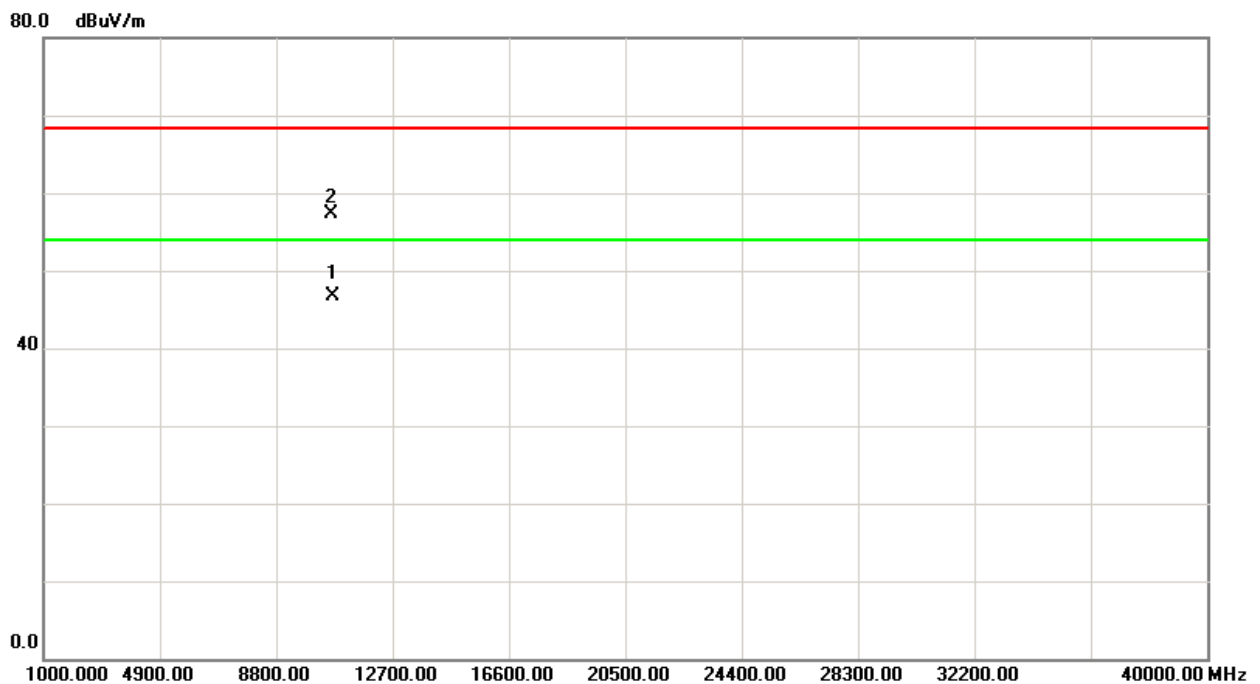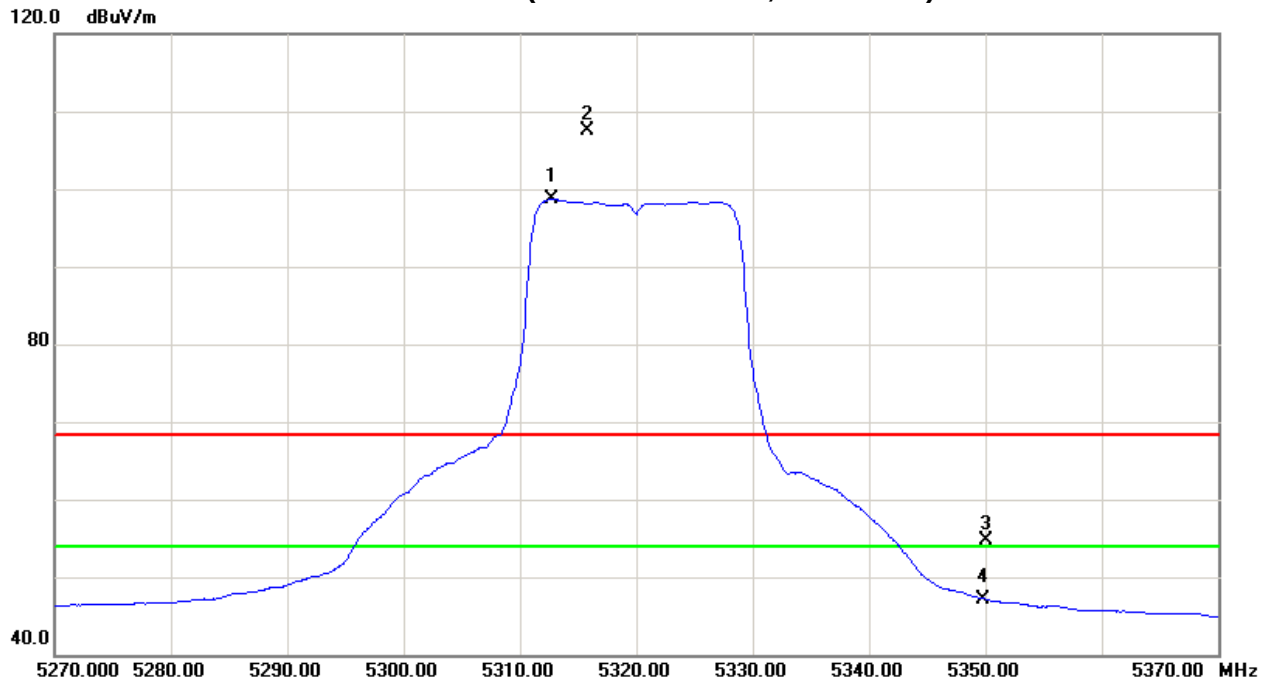




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N40 Mode 5270MHz/Integral Antenna		

Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5259.00	V	53.83	45.38	42.98	96.81	88.36	-7.96	-16.41					X/F
10531.65	V	36.95	26.13	15.91	52.86	42.04	-51.91	-62.73	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

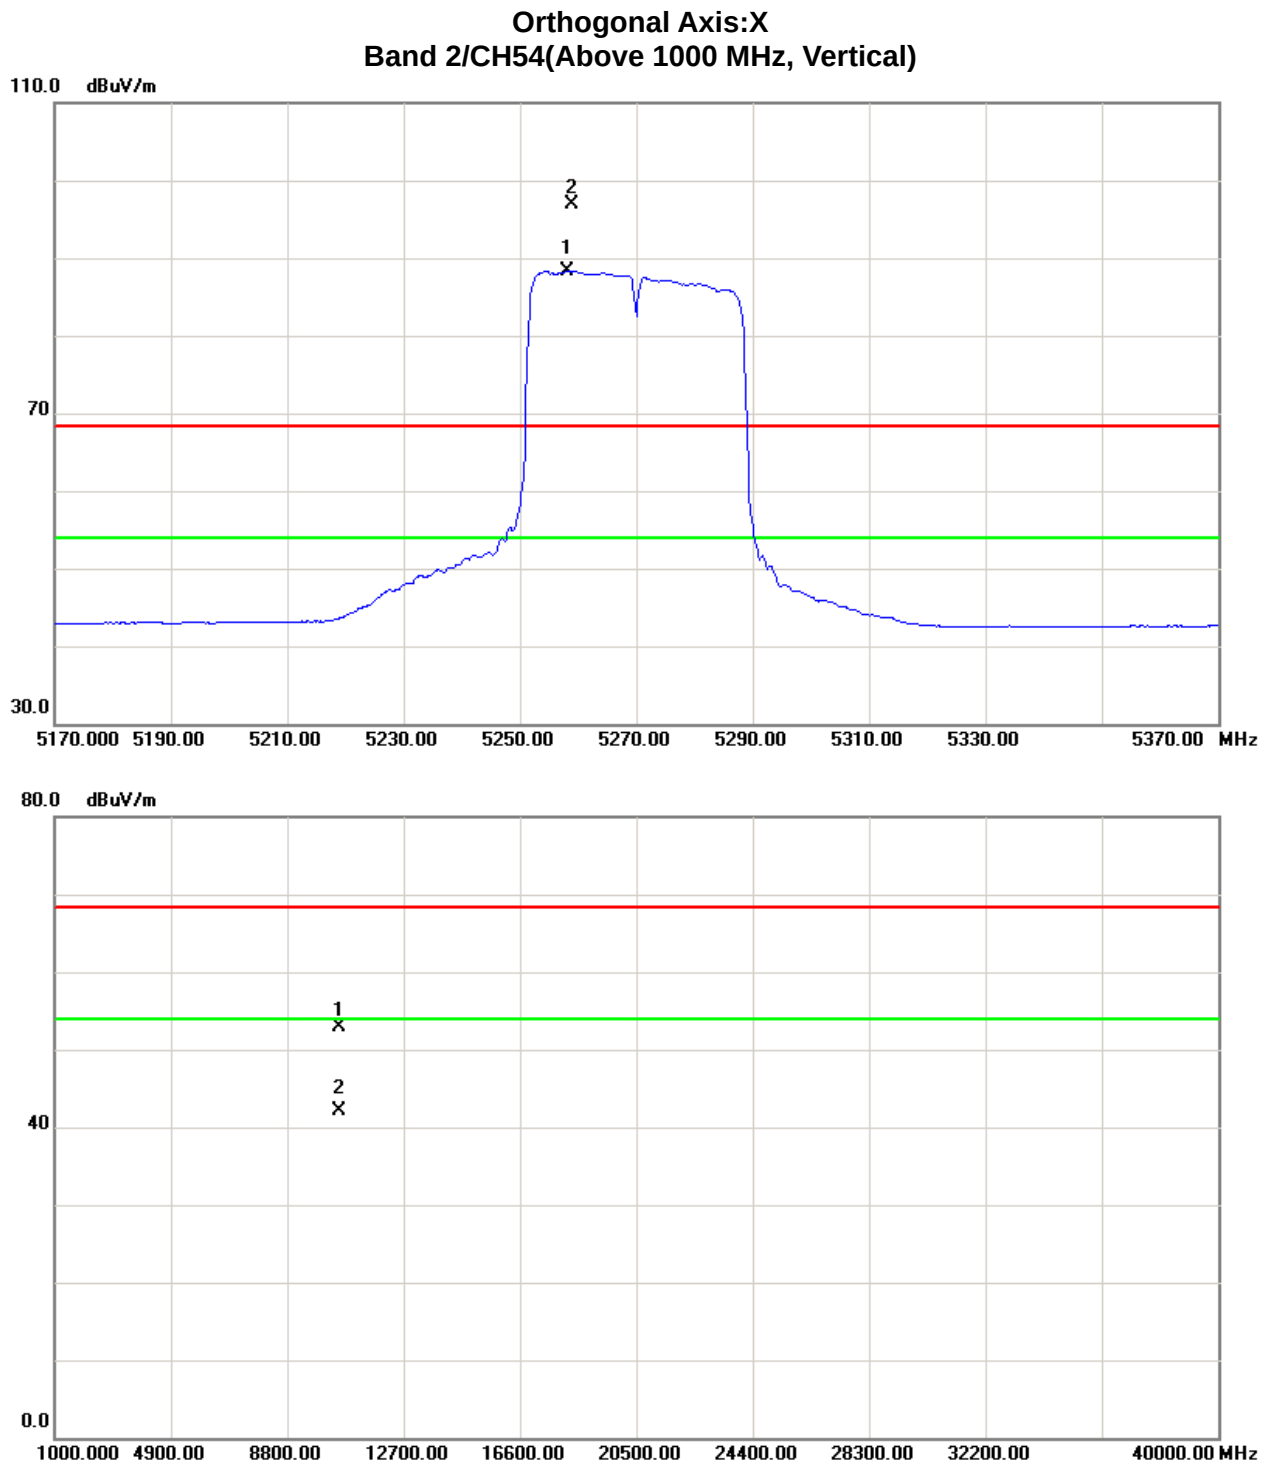



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N40 Mode 5270MHz/Integral Antenna		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5271.40	H	57.05	47.78	43.01	100.06	90.79	-4.71	-13.98					X/F
10531.63	H	37.58	26.32	15.91	53.49	42.23	-51.28	-62.54	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH54(Above 1000 MHz, Horizontal)

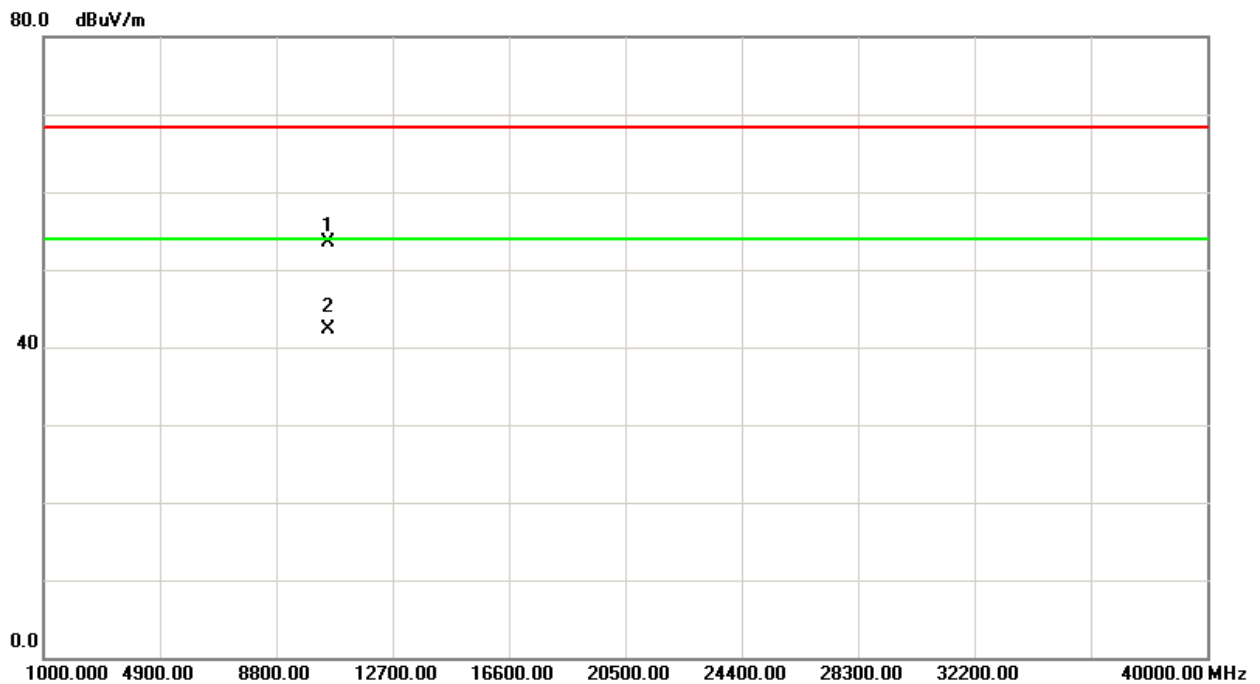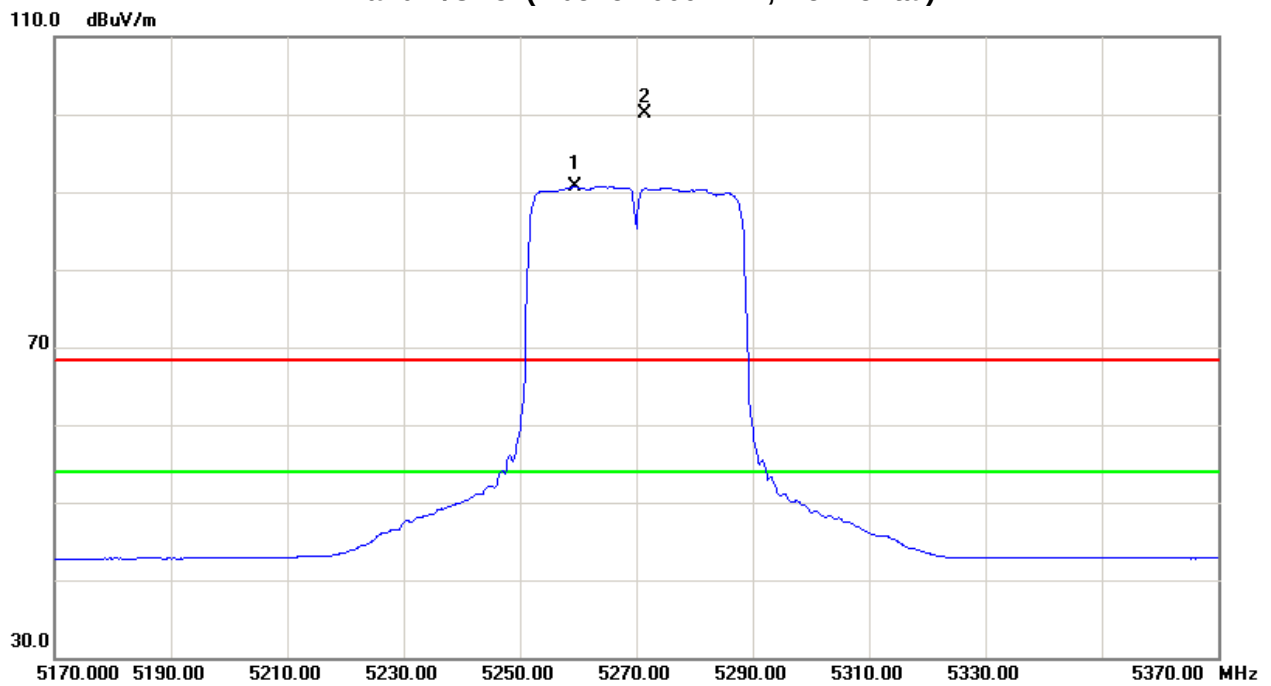




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N40 Mode 5310MHz/Integral Antenna		

Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5299.20	V	51.31	43.91	43.09	94.40	87.00	-10.37	-17.77					X/F
5350.00	V	10.11	0.84	43.21	53.32	44.05	-51.45	-60.72	68.30	54.00	-27.00	-41.30	X/E
10611.66	V	36.85	26.03	16.14	52.99	42.17	-51.78	-62.60	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

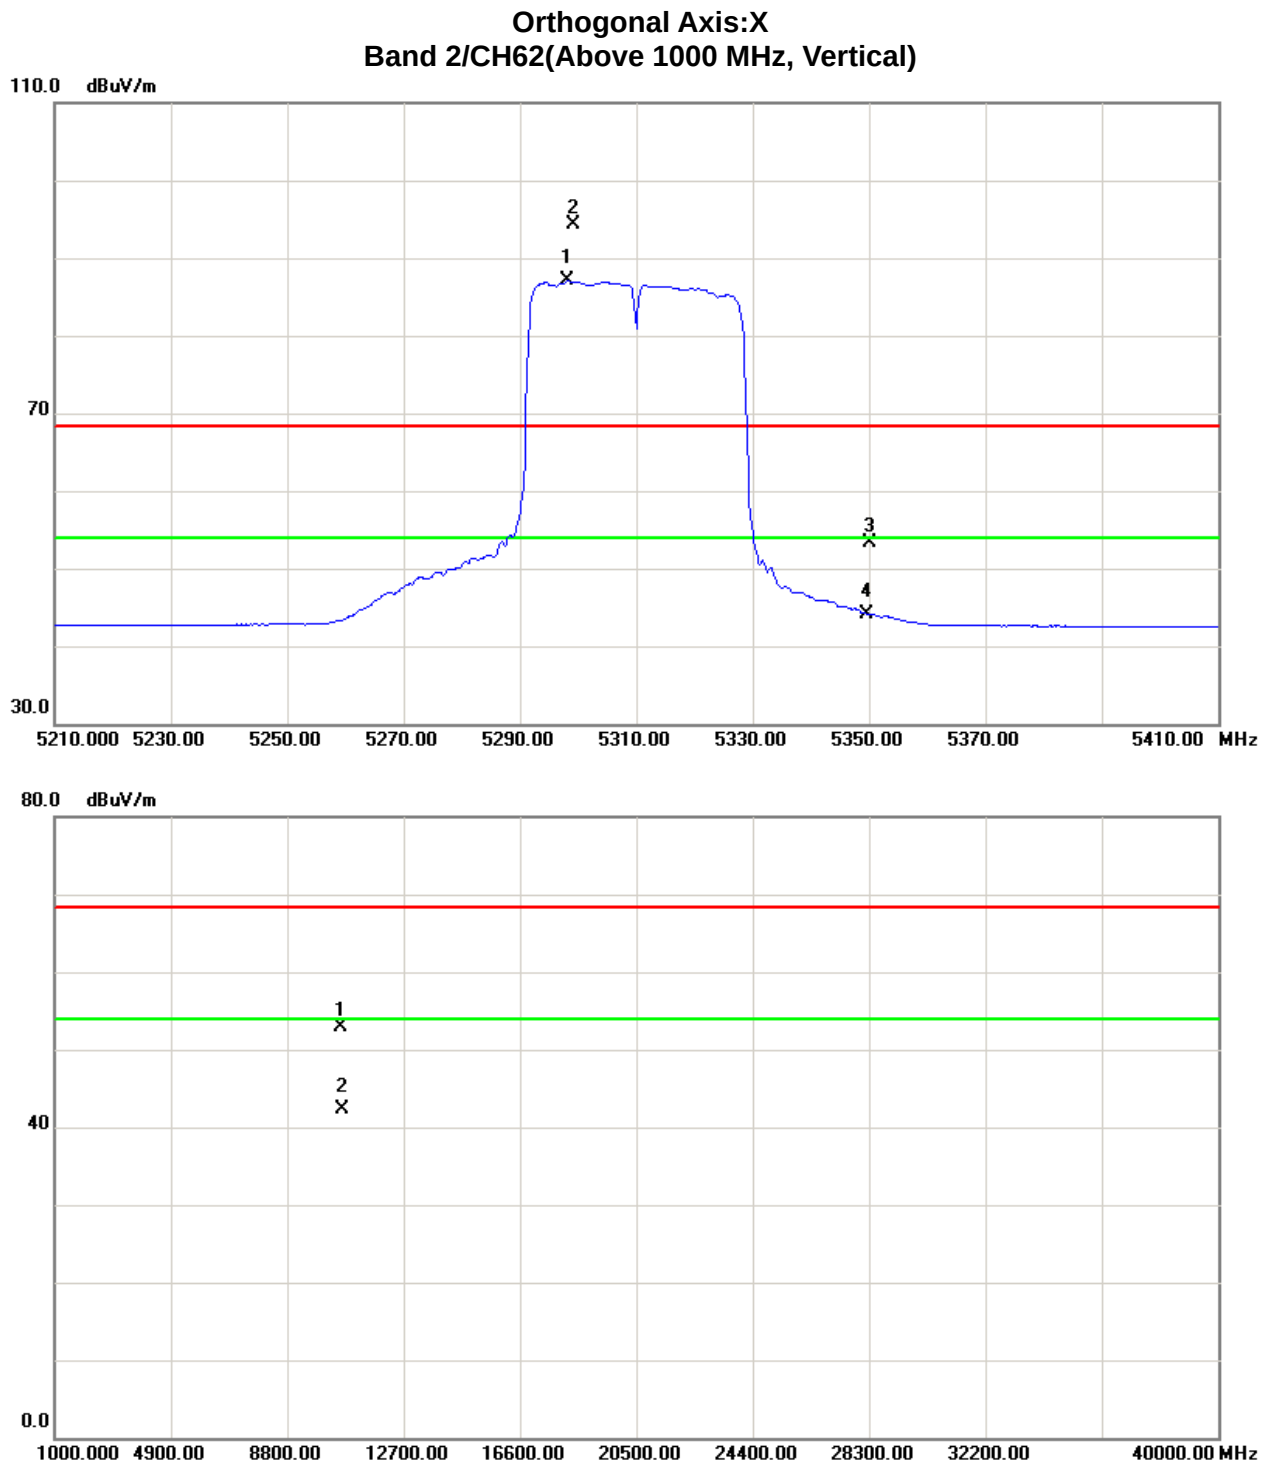



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N40 Mode 5310MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5298.80	H	57.08	47.66	43.09	100.17	90.75	-4.60	-14.02					X/F
5350.00	H	10.50	3.07	43.21	53.71	46.28	-51.06	-58.49	68.30	54.00	-27.00	-41.30	X/E
10632.63	H	37.21	26.31	16.21	53.42	42.52	-51.35	-62.25	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH62(Above 1000 MHz, Horizontal)

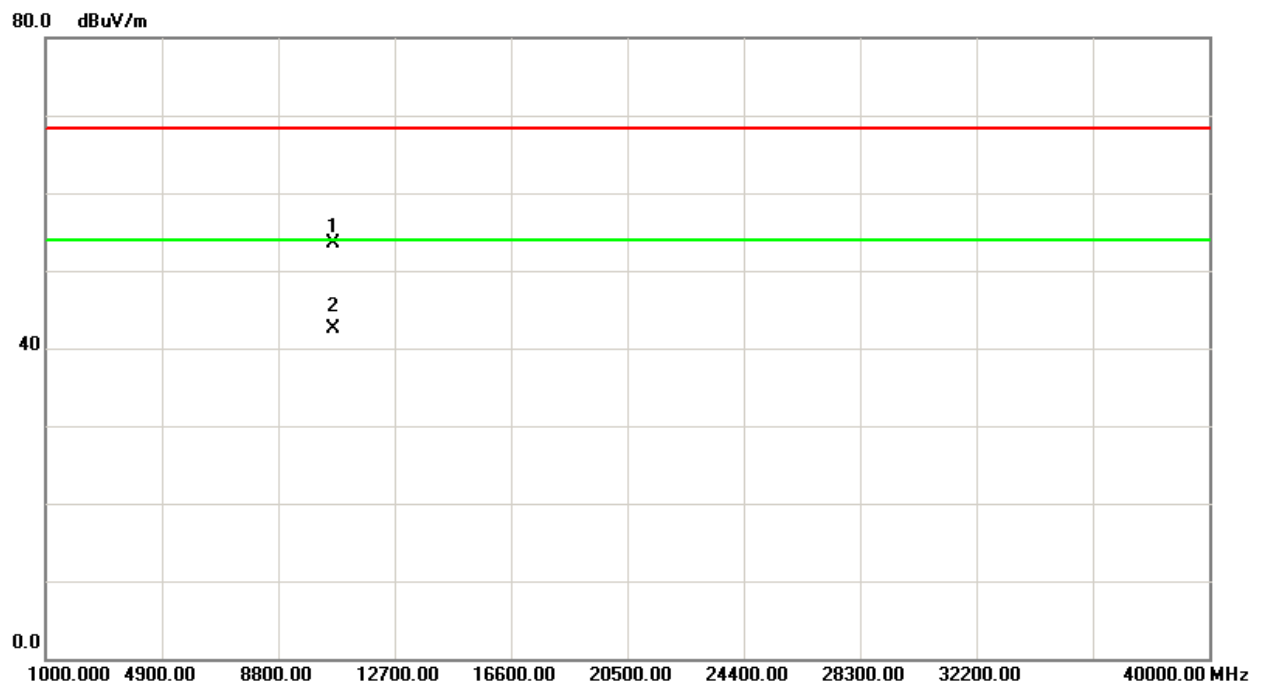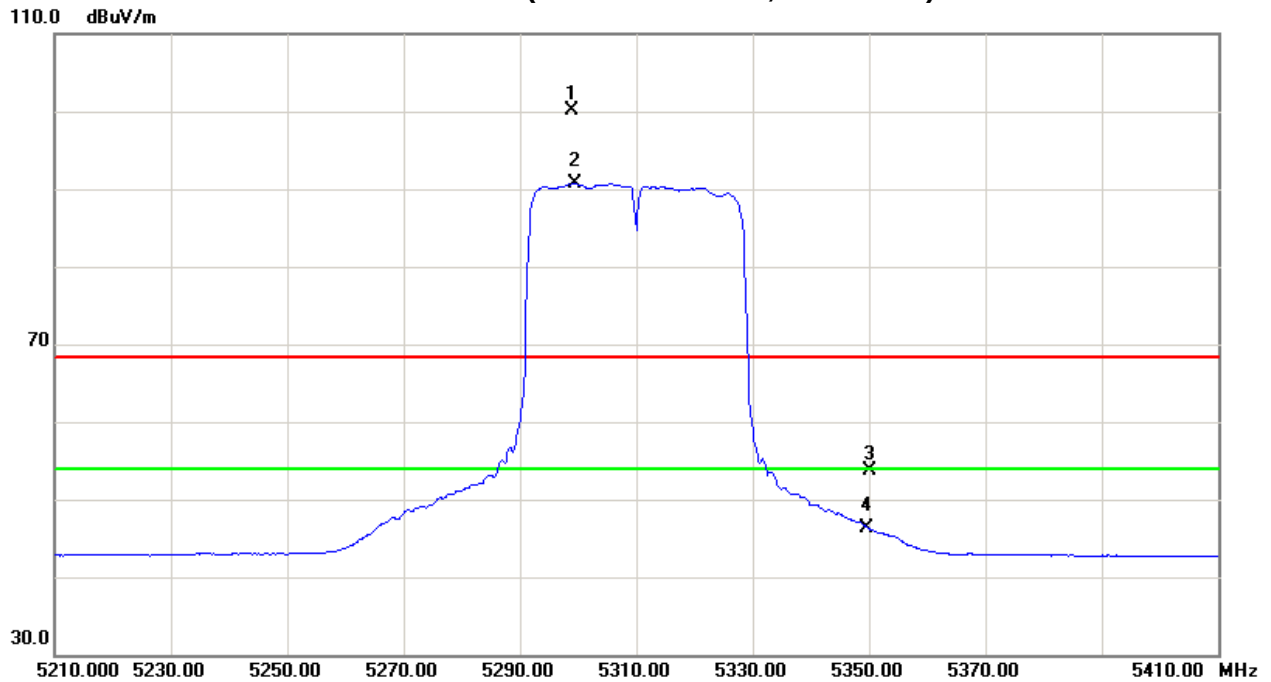



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5500MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	V	8.61	-0.60	43.49	52.10	42.89	-52.67	-61.88	68.30	54.00	-27.00	-41.30	X/E
5470.00	V	8.20	-0.02	43.50	51.70	43.48	-53.07	-61.29	68.30	54.00	-27.00	-41.30	X/E
5493.40	V	50.10	42.41	43.56	93.66	85.97	-11.11	-18.80					X/F
11012.78	V	39.55	29.58	17.29	56.84	46.87	-47.93	-57.90	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH100(Above 1000 MHz, Vertical)

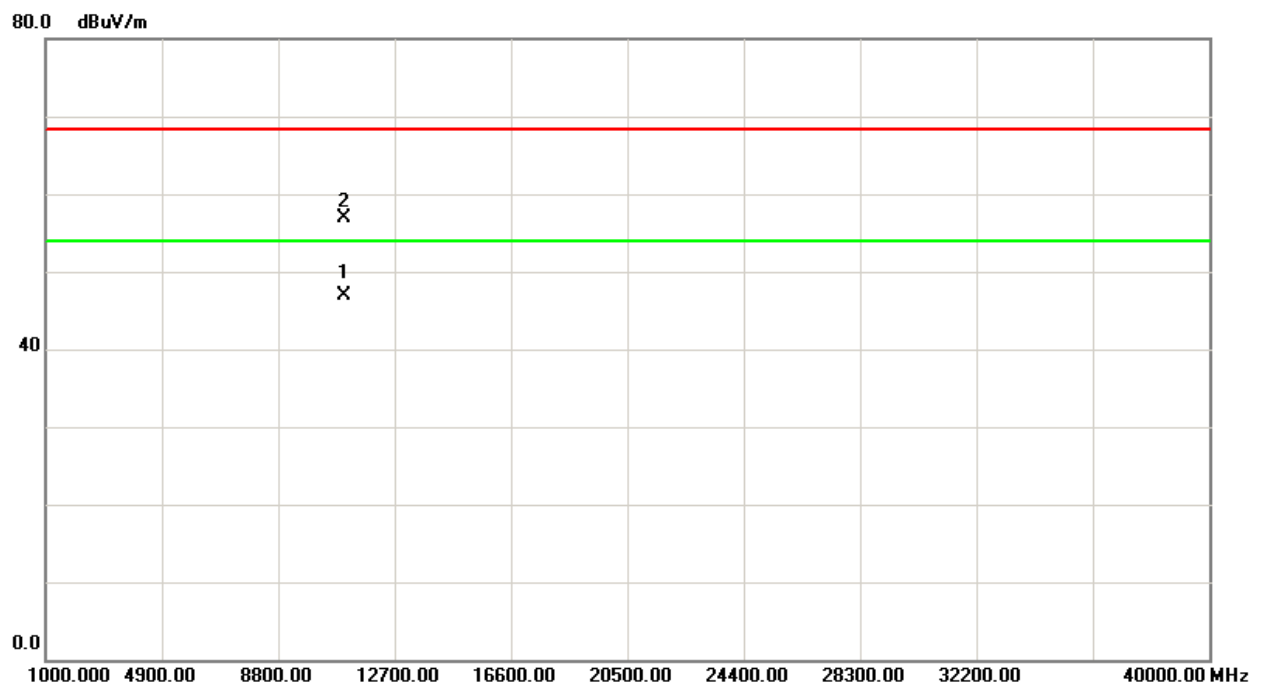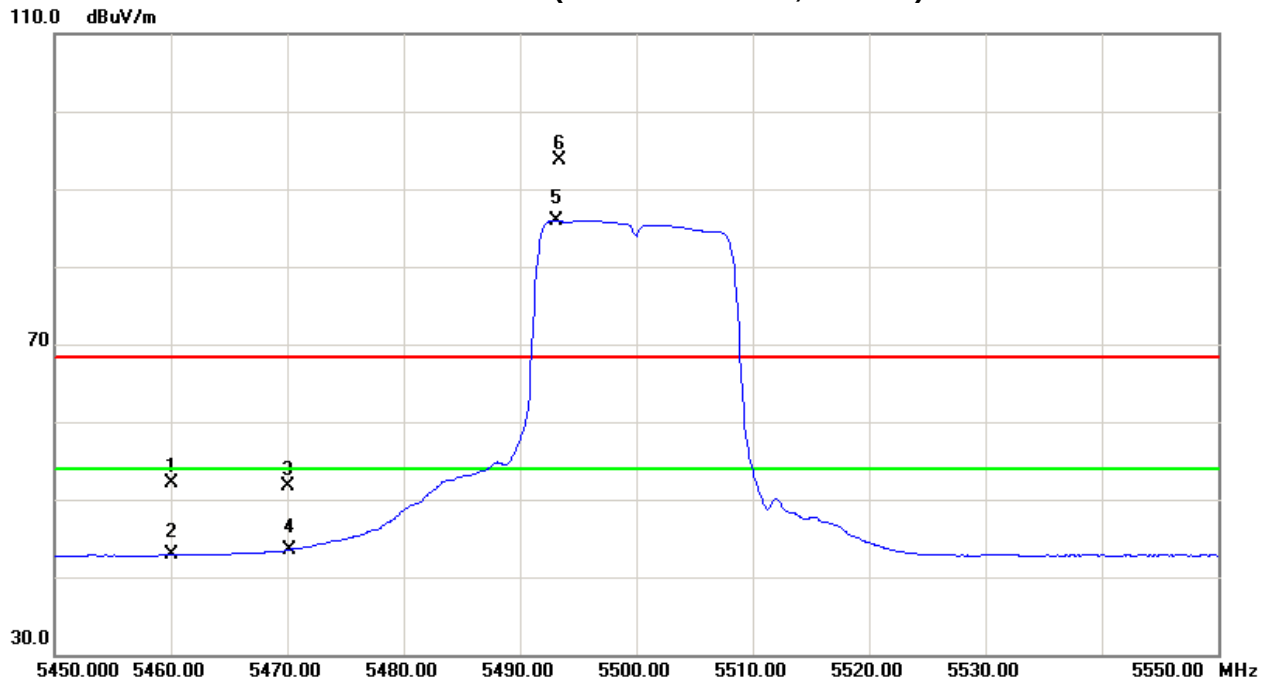



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5500MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	H	12.02	2.78	43.49	55.51	46.27	-49.26	-58.50	68.30	54.00	-27.00	-41.30	X/E
5470.00	H	20.14	7.40	43.50	63.64	50.90	-41.13	-53.87	68.30	54.00	-27.00	-41.30	X/E
5505.20	H	62.14	55.37	43.60	105.74	98.97	0.97	-5.80					X/F
11006.35	H	40.15	30.12	17.28	57.43	47.40	-47.34	-57.37	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH100(Above 1000 MHz, Horizontal)

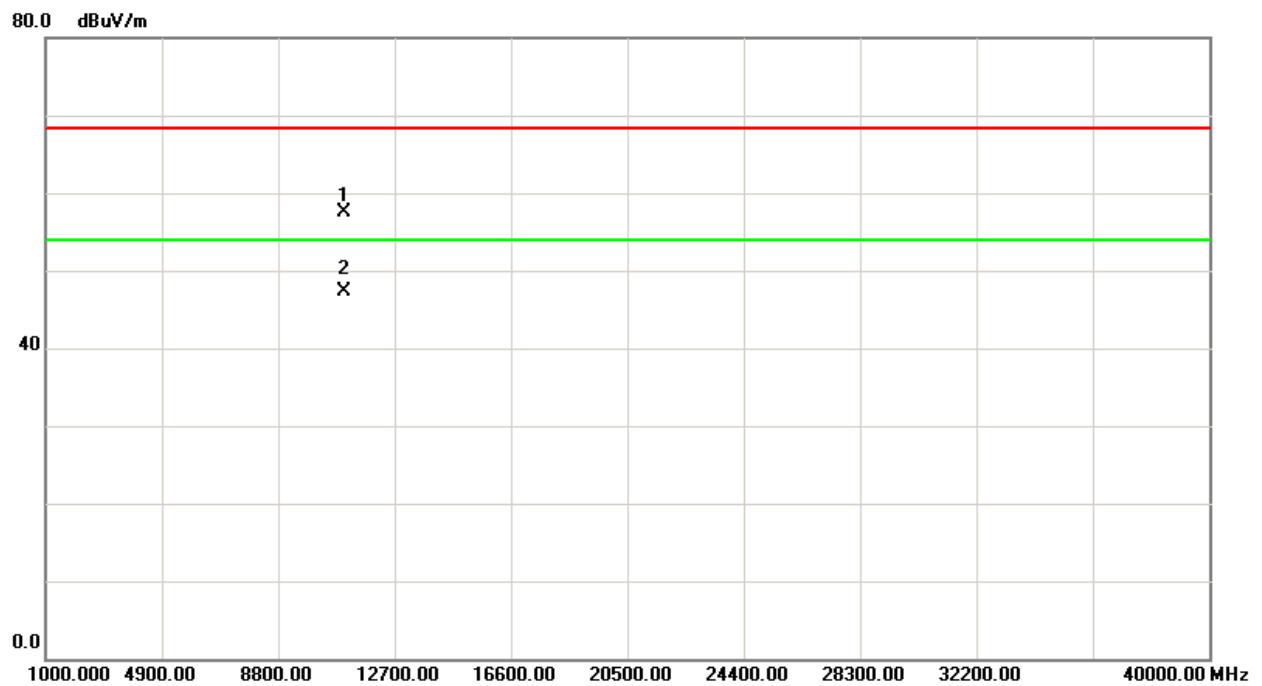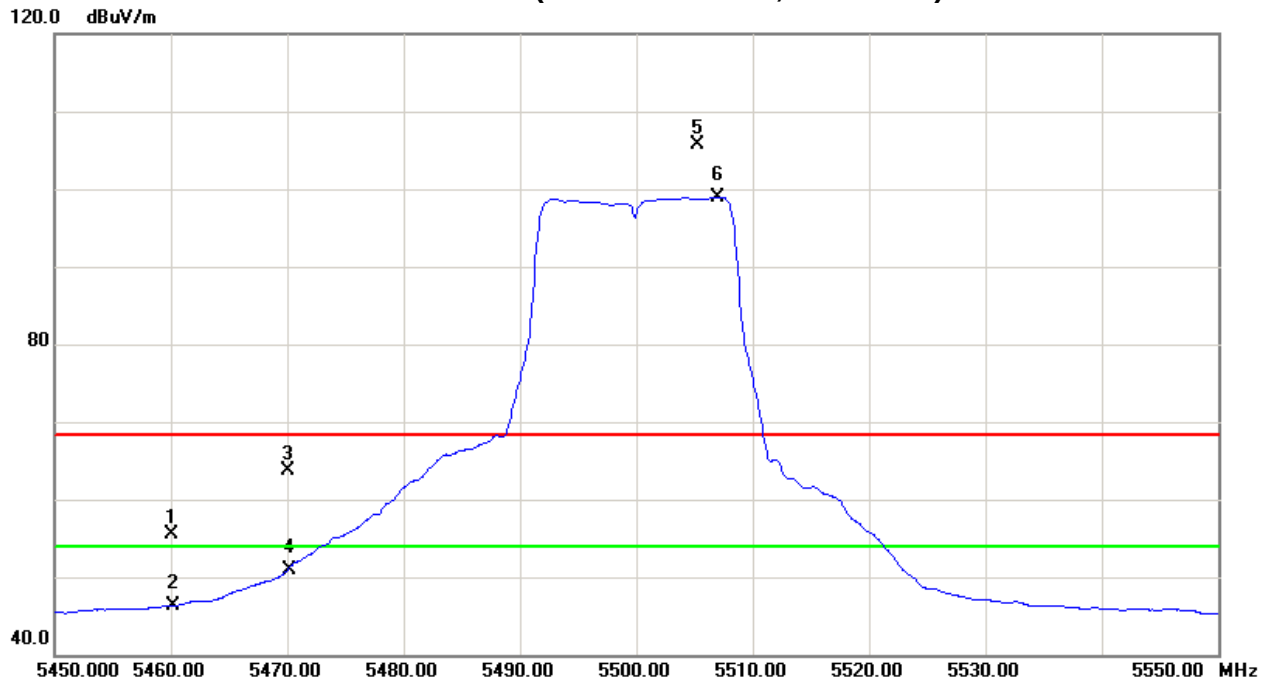



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5580MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5576.30	V	53.50	46.63	43.84	97.34	90.47	-7.43	-14.30					X/F
11165.47	V	39.87	28.77	17.64	57.51	46.41	-47.26	-58.36	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH116(Above 1000 MHz, Vertical)

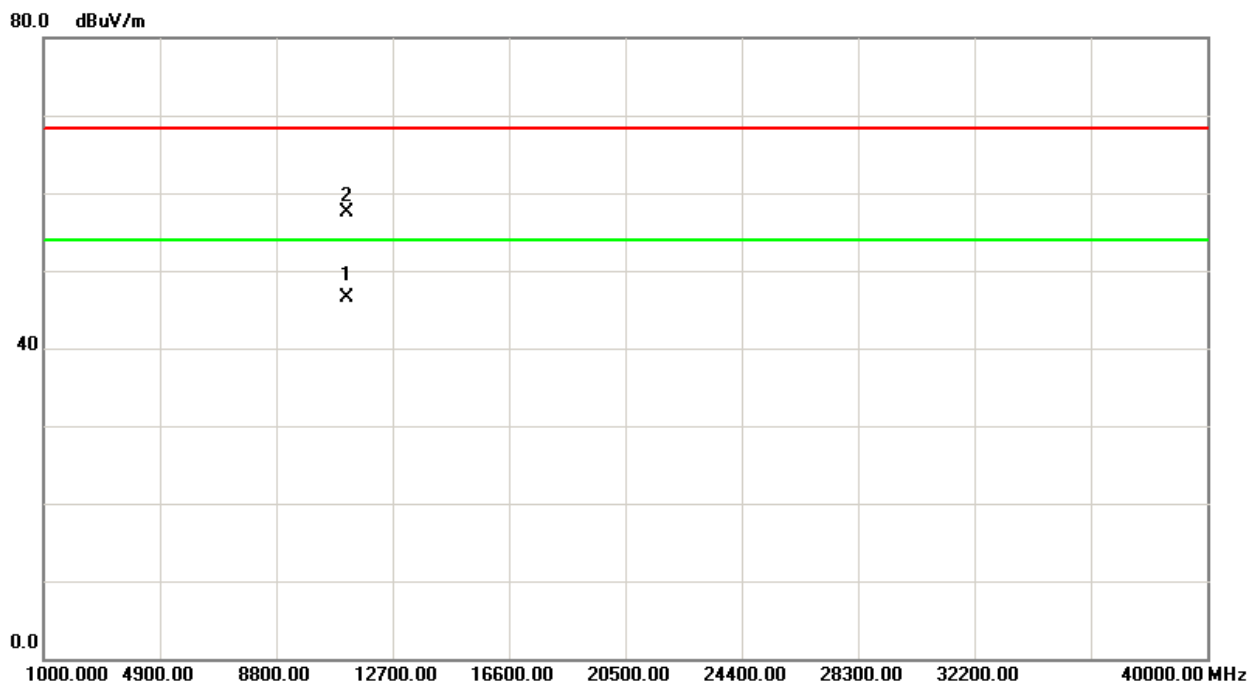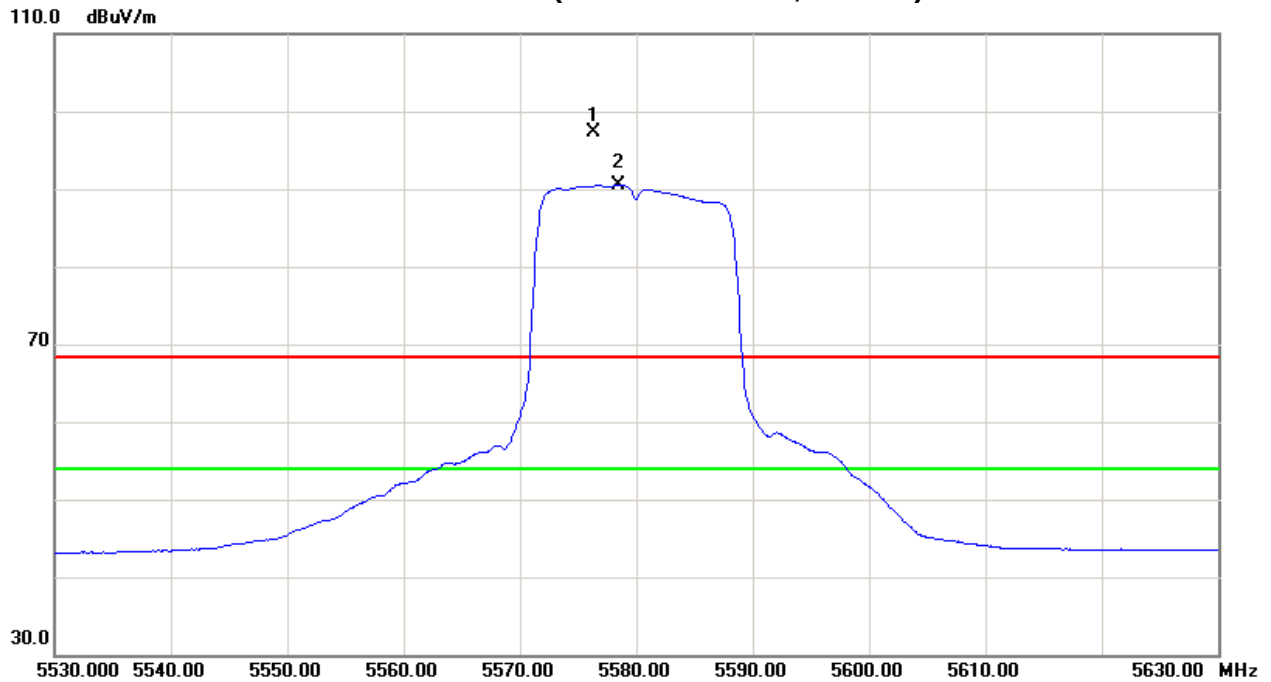



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5580MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5575.10	H	61.41	55.89	43.83	105.24	99.72	0.47	-5.05					X/F
11167.25	H	40.37	29.13	17.67	58.04	46.80	-46.73	-57.97	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH116(Above 1000 MHz, Horizontal)

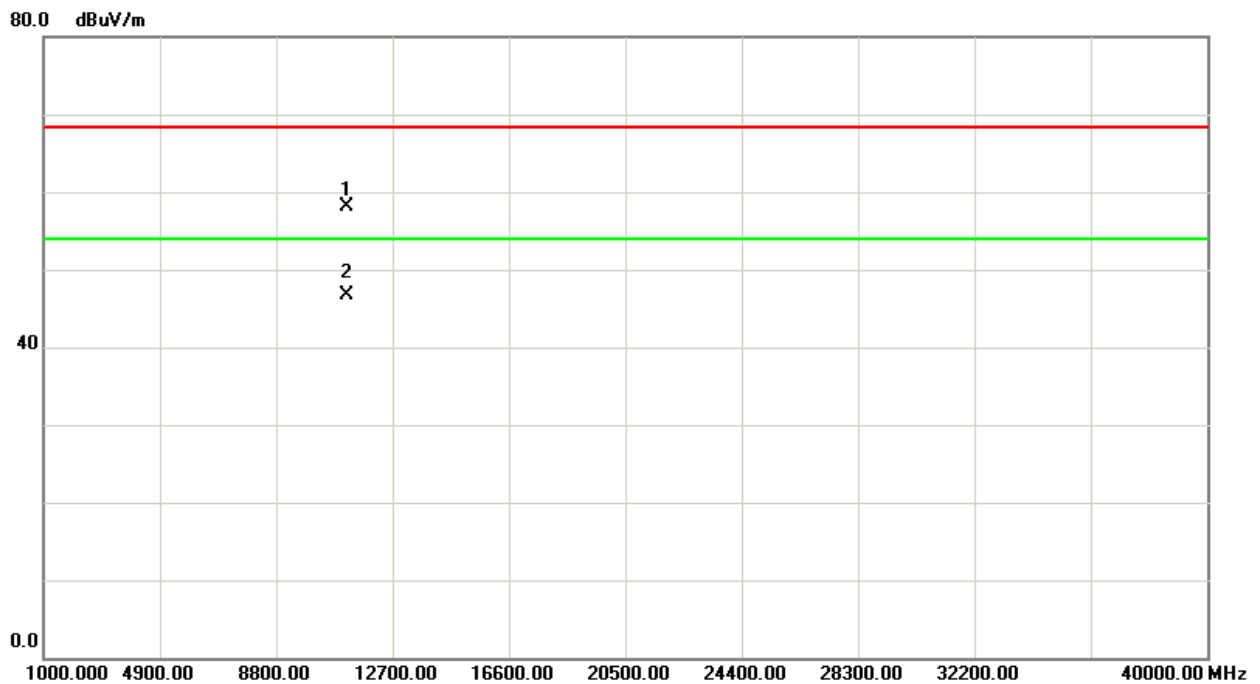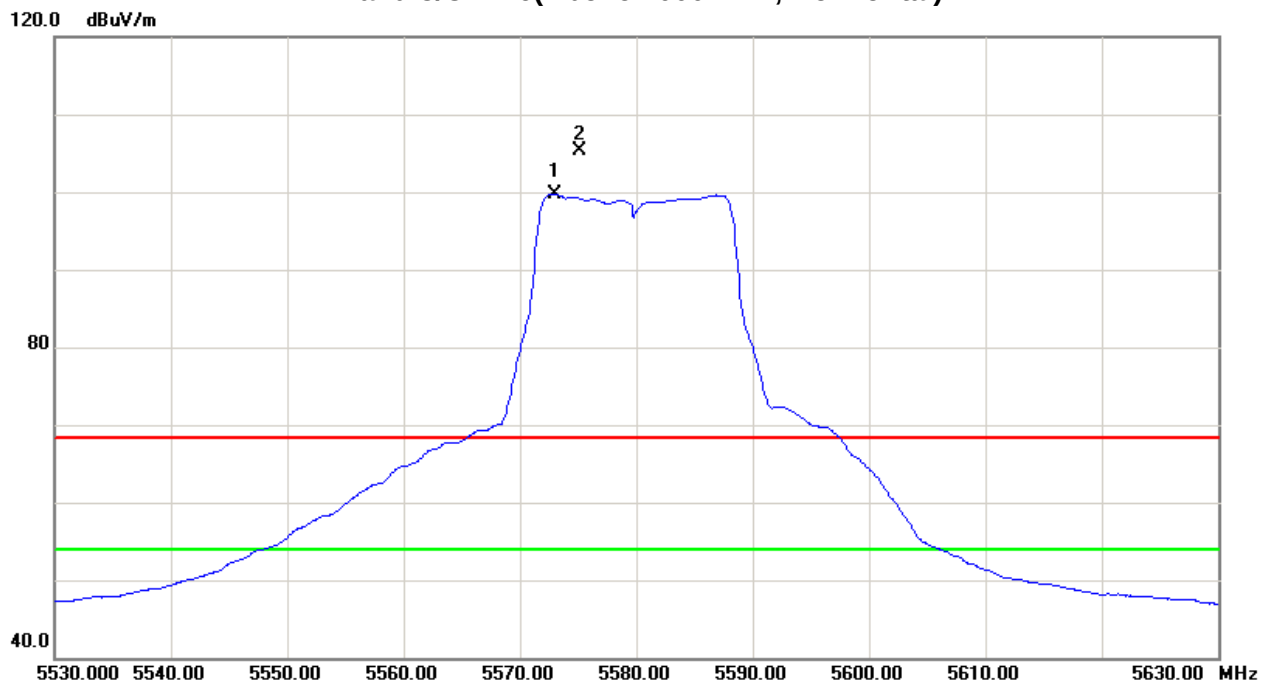



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5700MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5695.30	V	50.50	43.18	44.25	94.75	87.43	-10.02	-17.34					X/F
5725.00	V	7.33	-0.49	44.34	51.67	43.85	-53.10	-60.92	68.30	54.00	-27.00	-41.30	X/E
11403.77	V	39.77	27.76	18.26	58.03	46.02	-46.74	-58.75	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH140(Above 1000 MHz, Vertical)

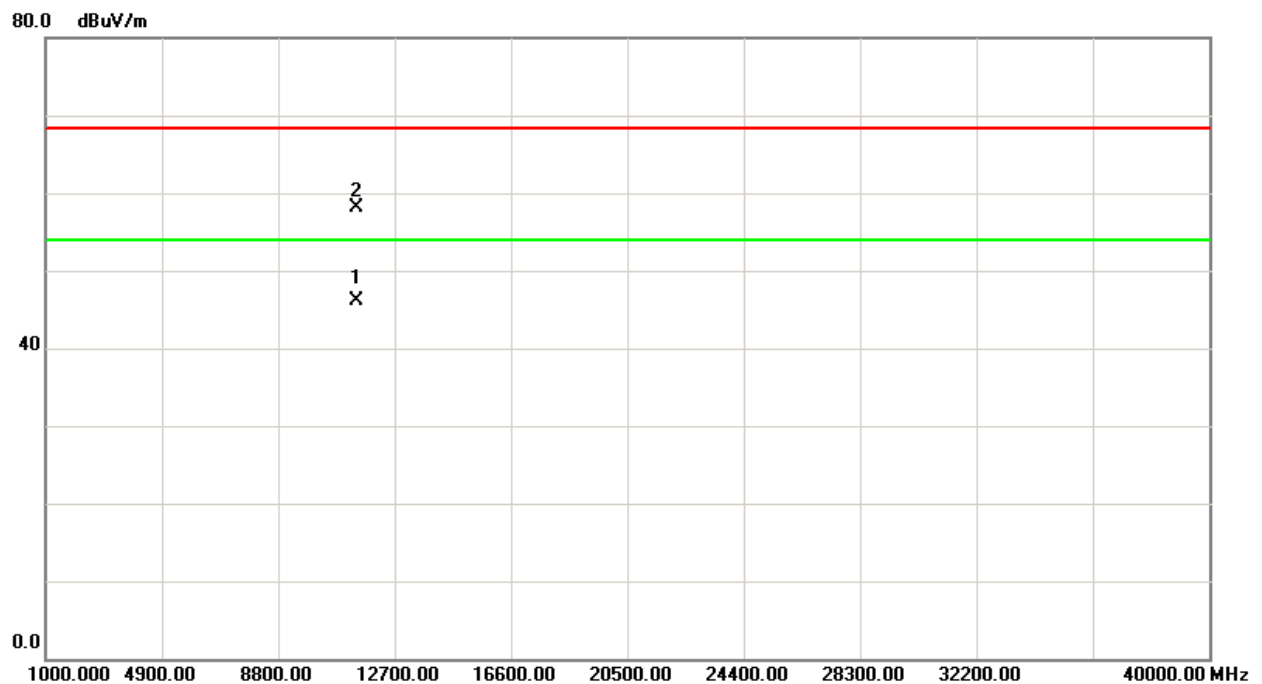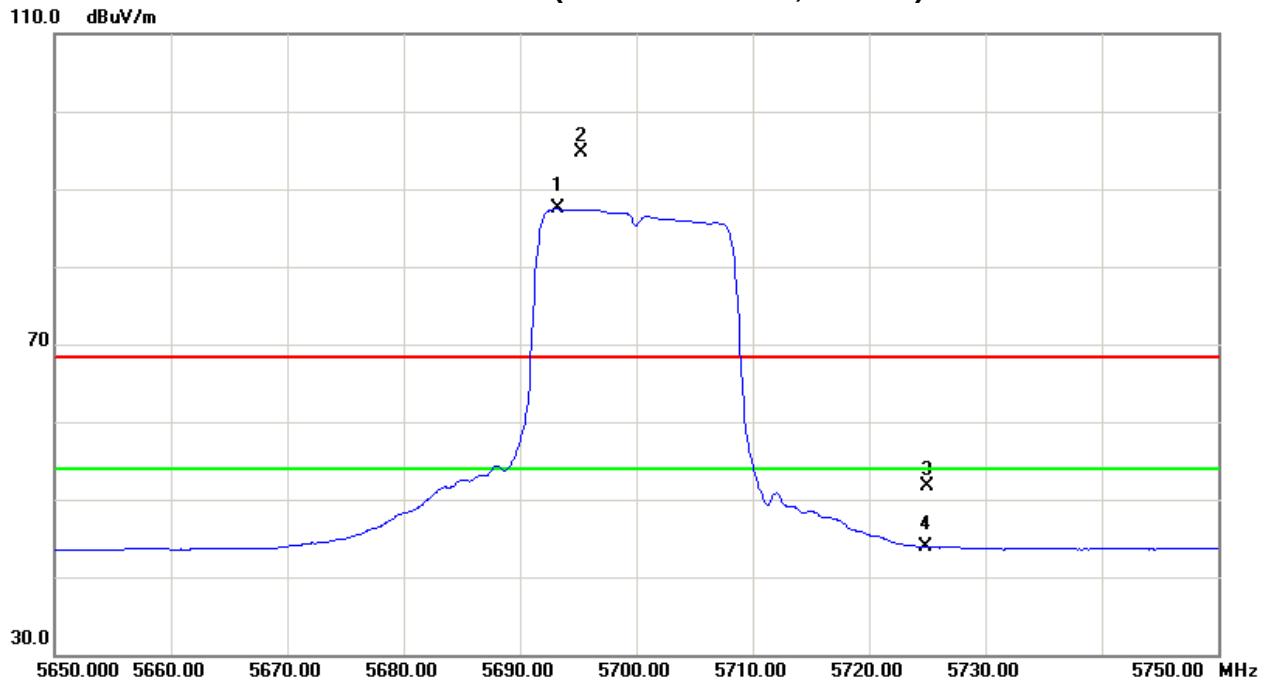




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5700MHz/Integral Antenna		

Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5707.30	H	62.14	55.21	44.29	106.43	99.50	1.66	-5.27					X/F
5725.00	H	14.95	5.04	44.34	59.29	49.38	-45.48	-55.39	68.30	54.00	-27.00	-41.30	X/E
11407.35	H	40.16	28.55	18.26	58.42	46.81	-46.35	-57.96	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

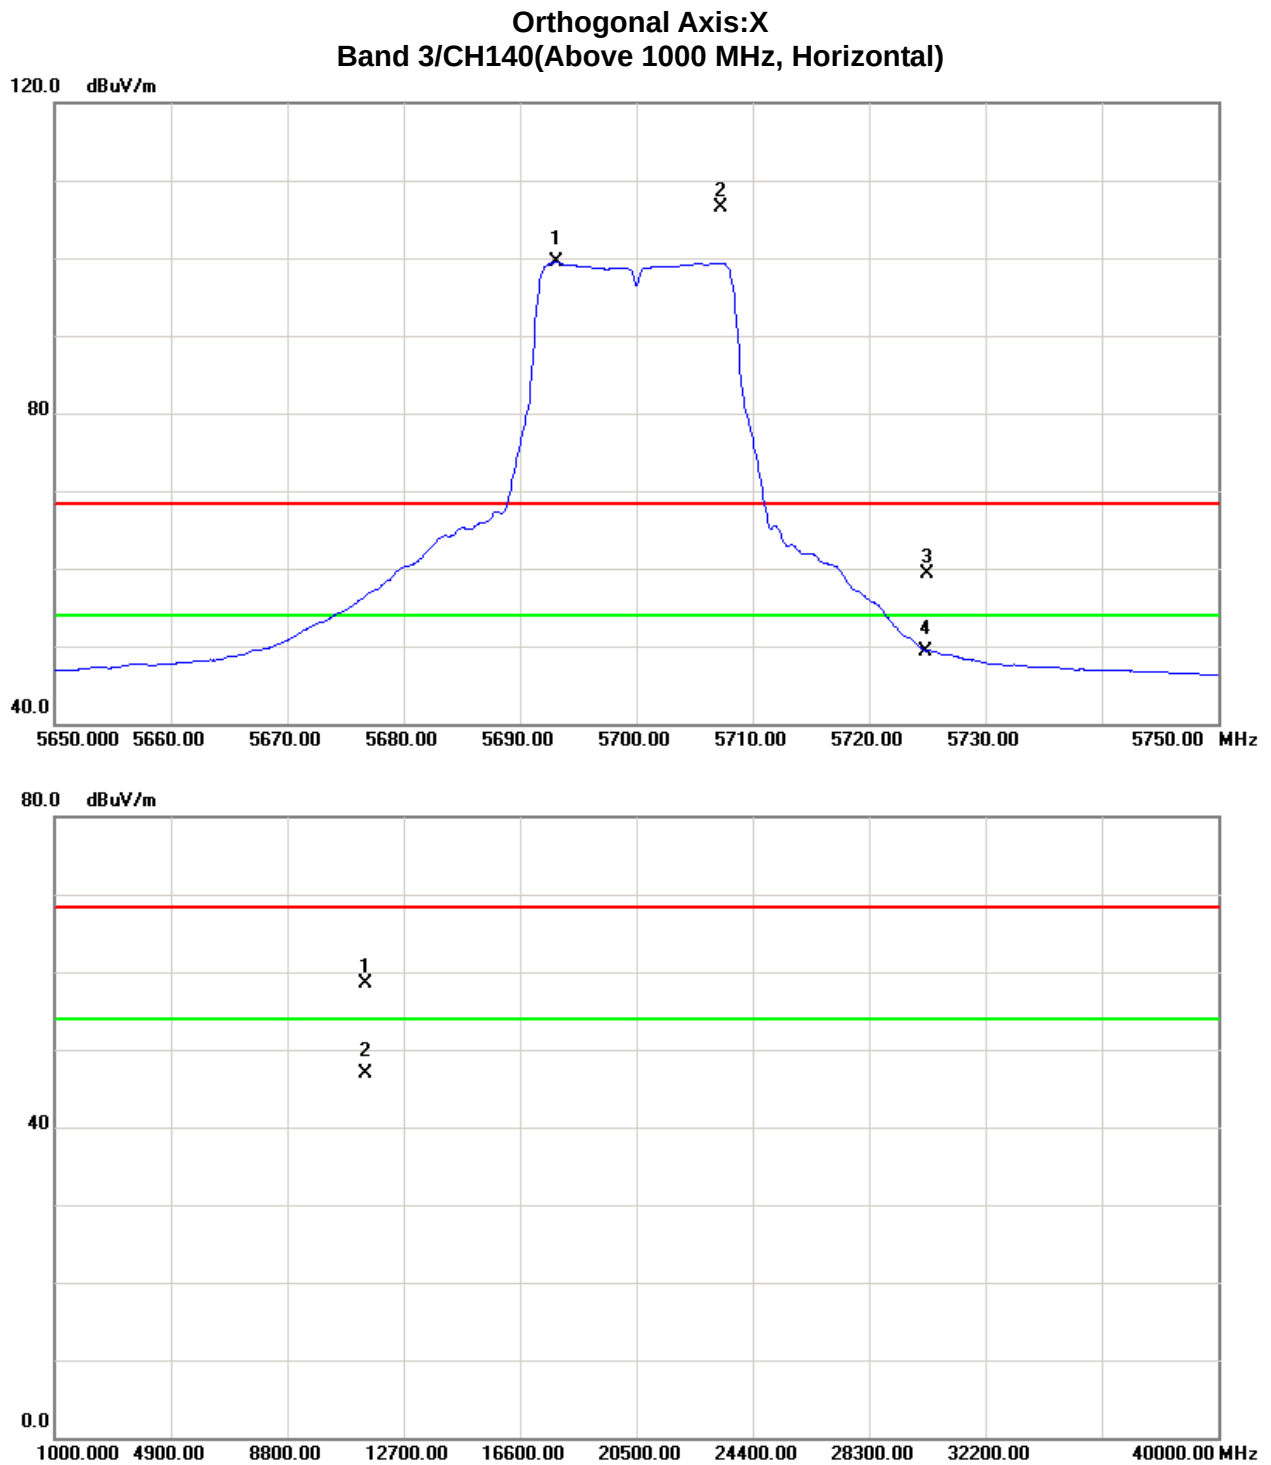



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5500MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	V	8.85	0.91	43.49	52.34	44.40	-52.43	-60.37	68.30	54.00	-27.00	-41.30	X/E
5470.00	V	13.34	2.88	43.50	56.84	46.38	-47.93	-58.39	68.30	54.00	-27.00	-41.30	X/E
5498.40	V	59.55	52.12	43.58	103.13	95.70	-1.64	-9.07					X/F
11012.64	V	40.24	29.87	17.29	57.53	47.16	-47.24	-57.61	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH100(Above 1000 MHz, Vertical)

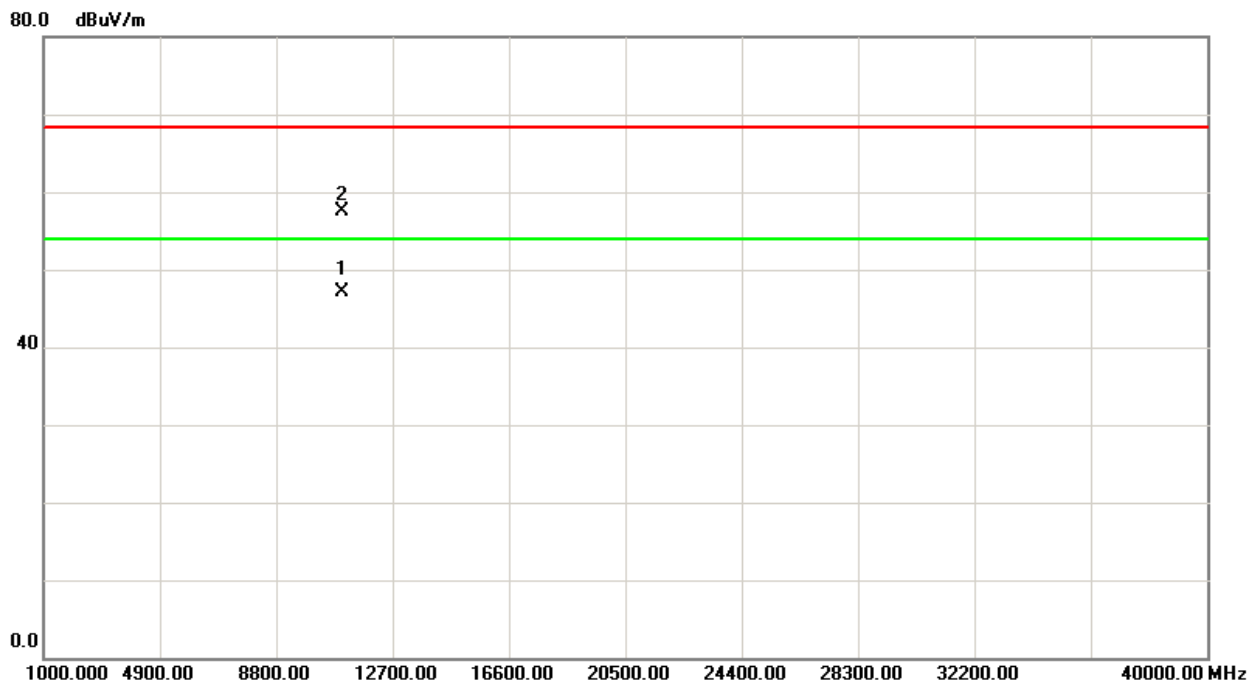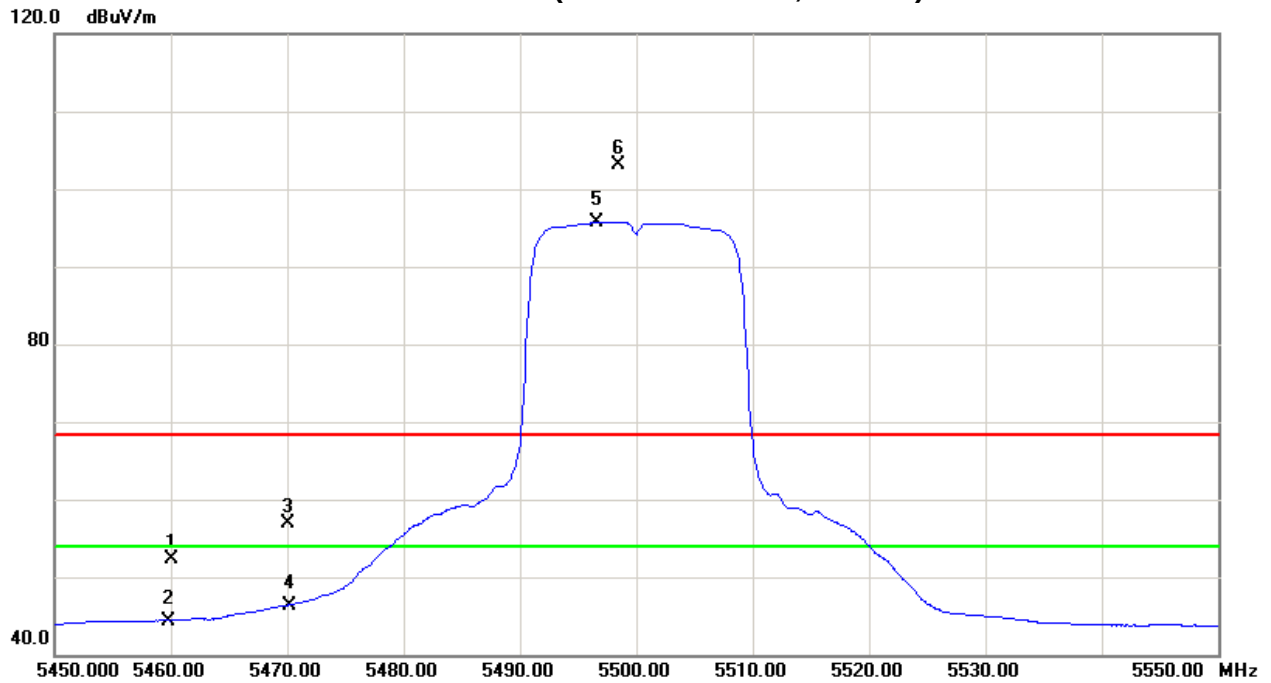



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5500MHz/Integral Antenna		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	H	11.54	2.42	43.49	55.03	45.91	-49.74	-58.86	68.30	54.00	-27.00	-41.30	X/E
5470.00	H	12.37	3.96	43.50	55.87	47.46	-48.90	-57.31	68.30	54.00	-27.00	-41.30	X/E
5498.20	H	63.67	54.23	43.58	107.25	97.81	2.48	-6.96					X/F
11010.42	H	40.37	30.32	17.28	57.65	47.60	-47.12	-57.17	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH100(Above 1000 MHz, Horizontal)

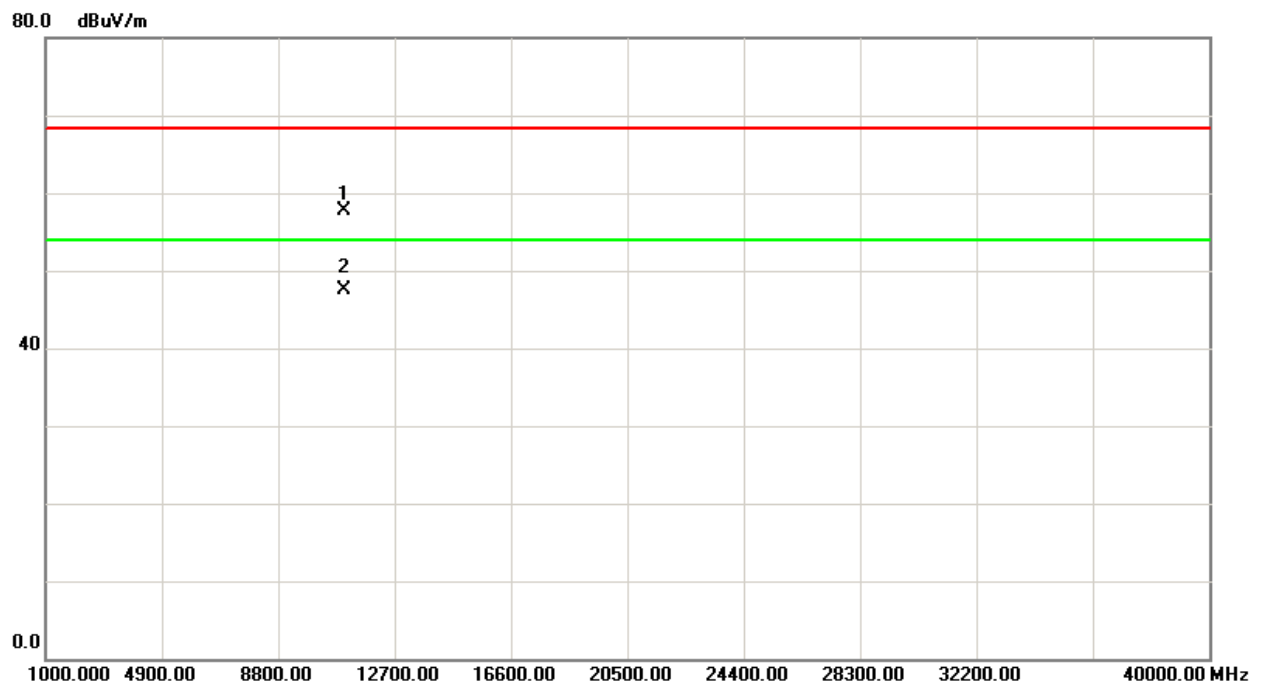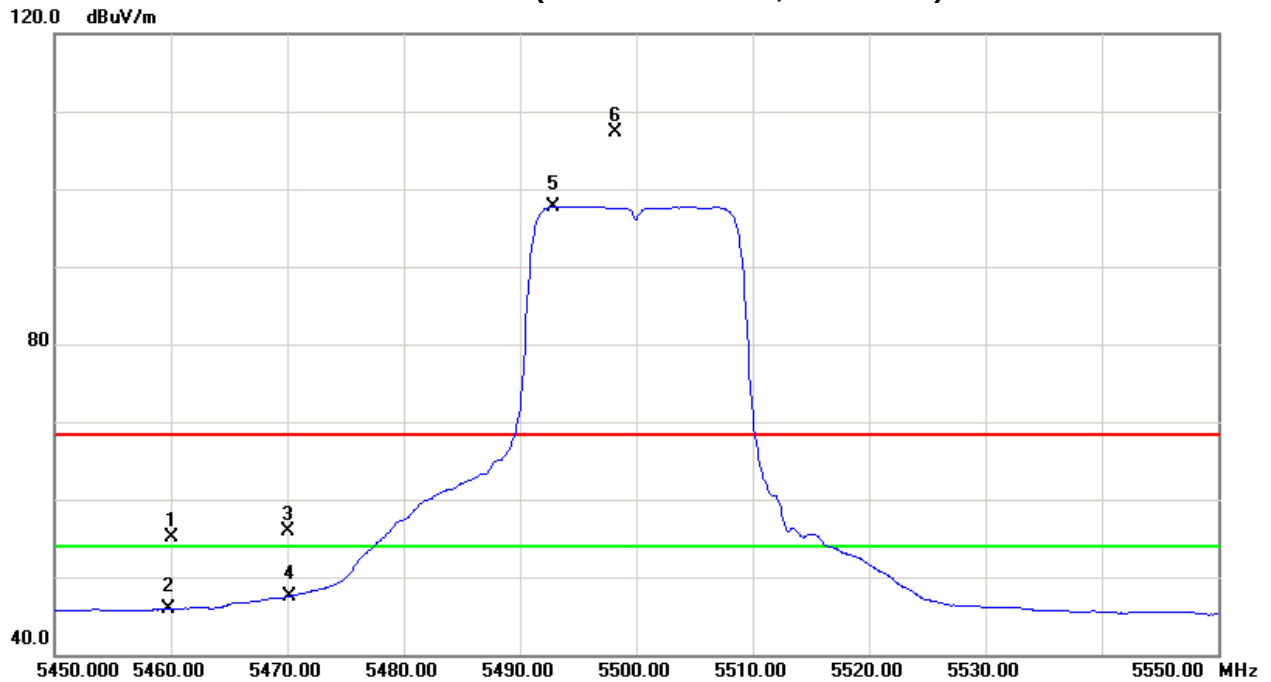



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5580MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5573.20	V	60.32	52.31	43.83	104.15	96.14	-0.62	-8.63					X/F
11164.53	V	39.96	28.85	17.67	57.63	46.52	-47.14	-58.25	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH116(Above 1000 MHz, Vertical)

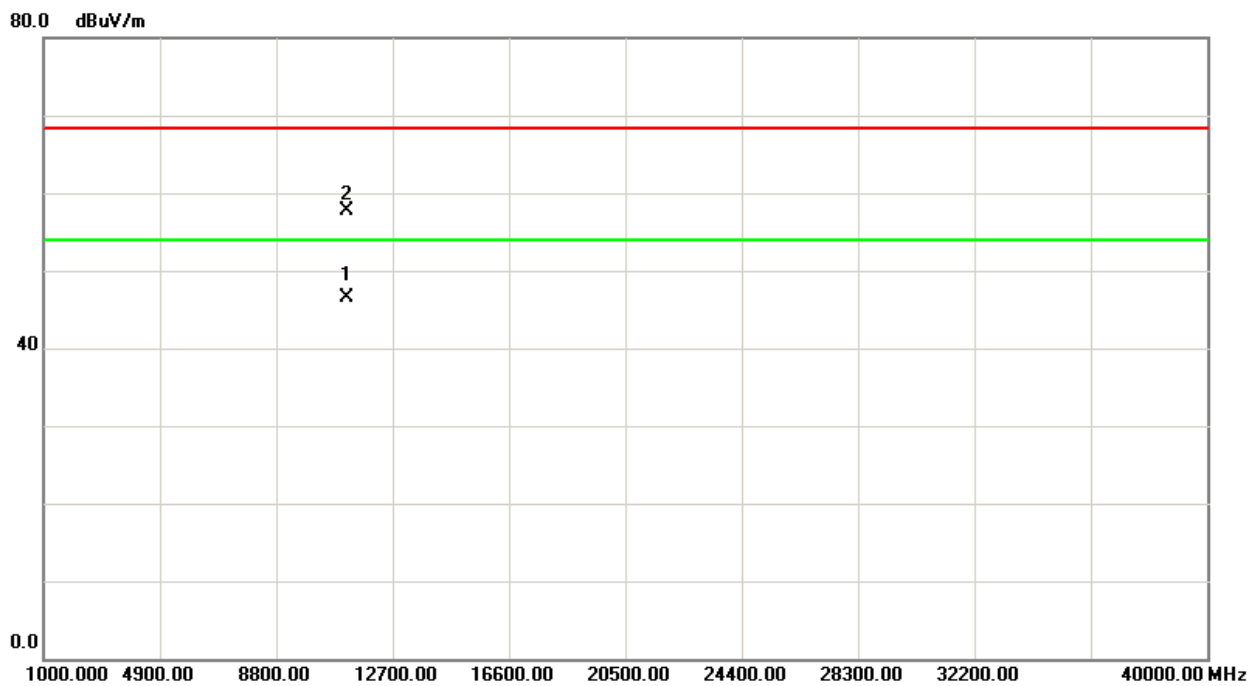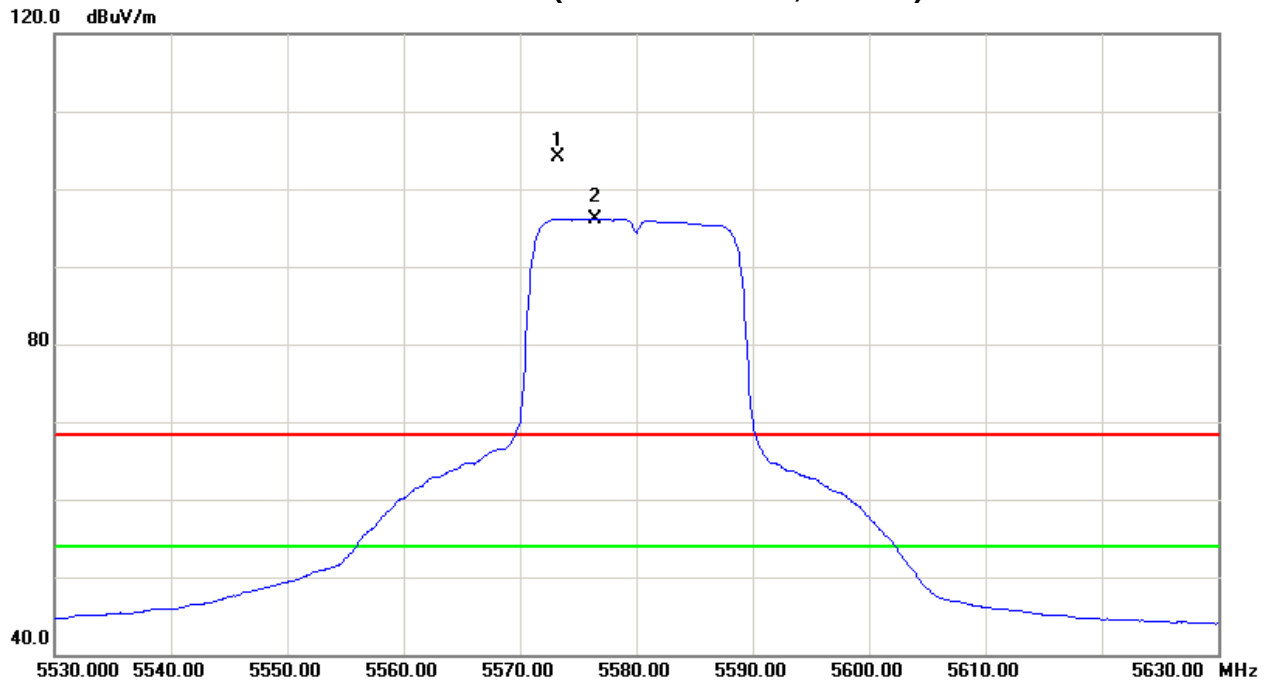



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5580MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5583.90	H	63.61	54.73	43.87	107.48	98.60	2.71	-6.17					X/F
11165.75	H	40.15	29.32	17.67	57.82	46.99	-46.95	-57.78	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH116(Above 1000 MHz, Horizontal)

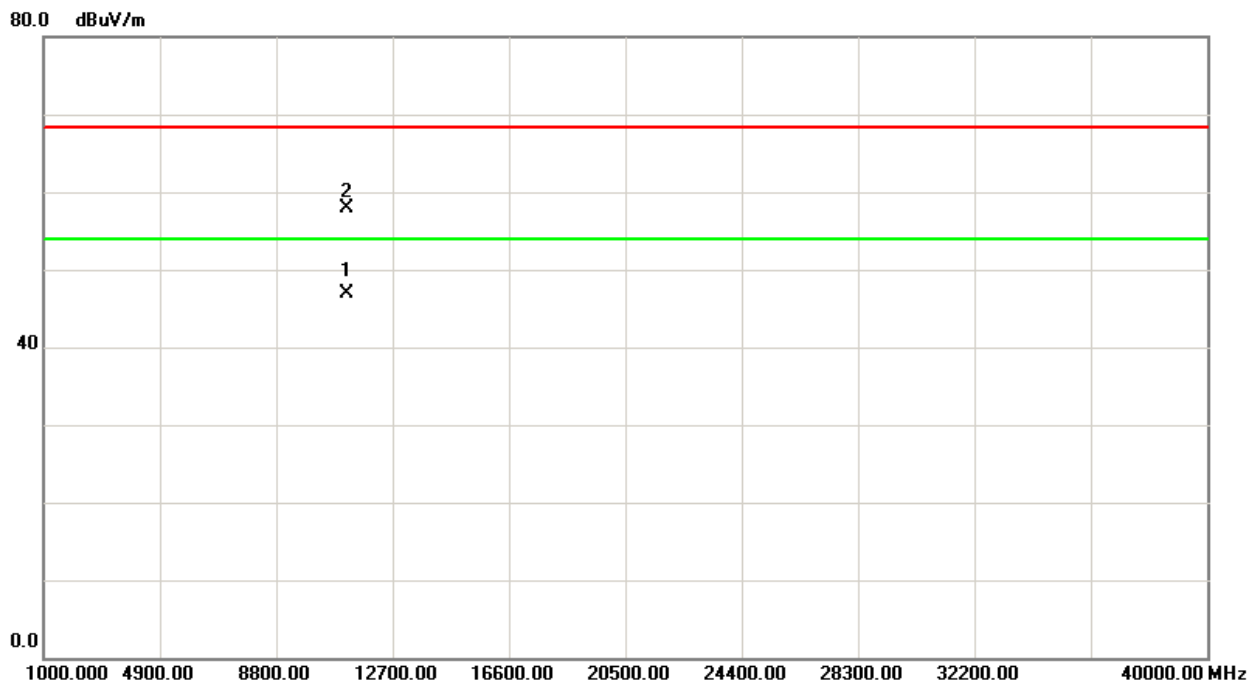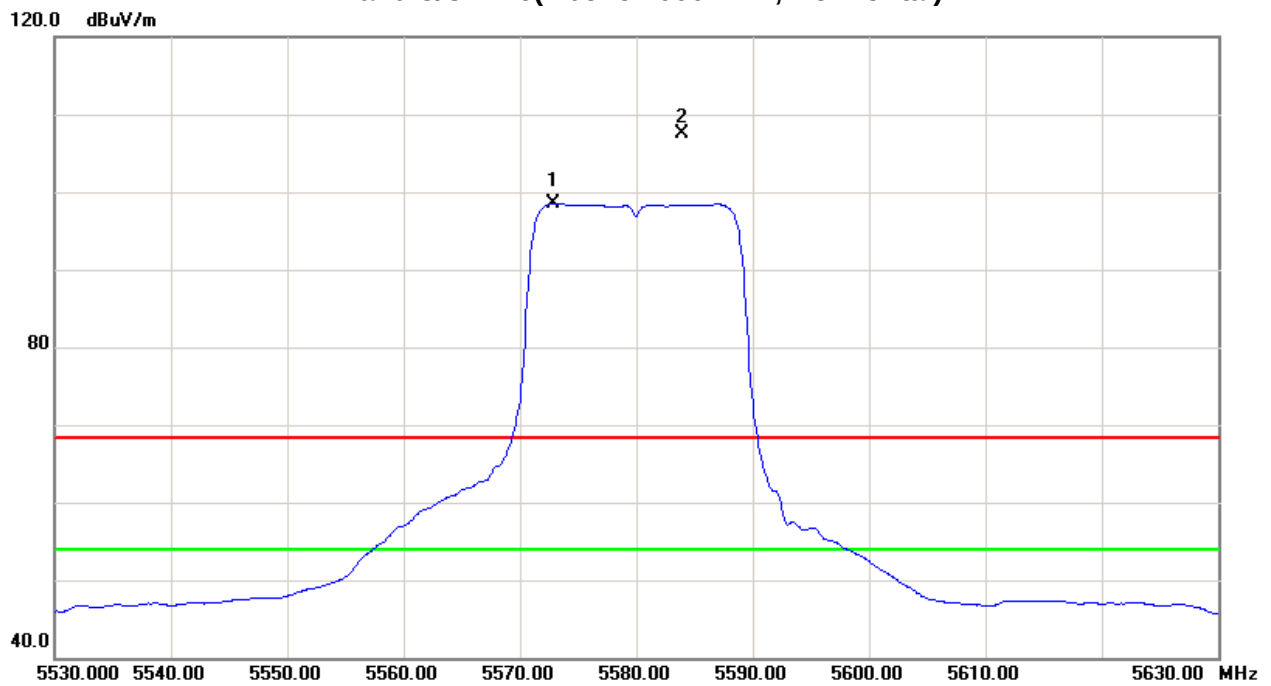



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5700MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5697.00	V	56.98	48.72	44.25	101.23	92.97	-3.54	-11.80					X/F
5725.00	V	9.79	0.79	44.34	54.13	45.13	-50.64	-59.64	68.30	54.00	-27.00	-41.30	X/E
11403.67	V	39.56	27.83	18.25	57.81	46.08	-46.96	-58.69	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH140(Above 1000 MHz, Vertical)

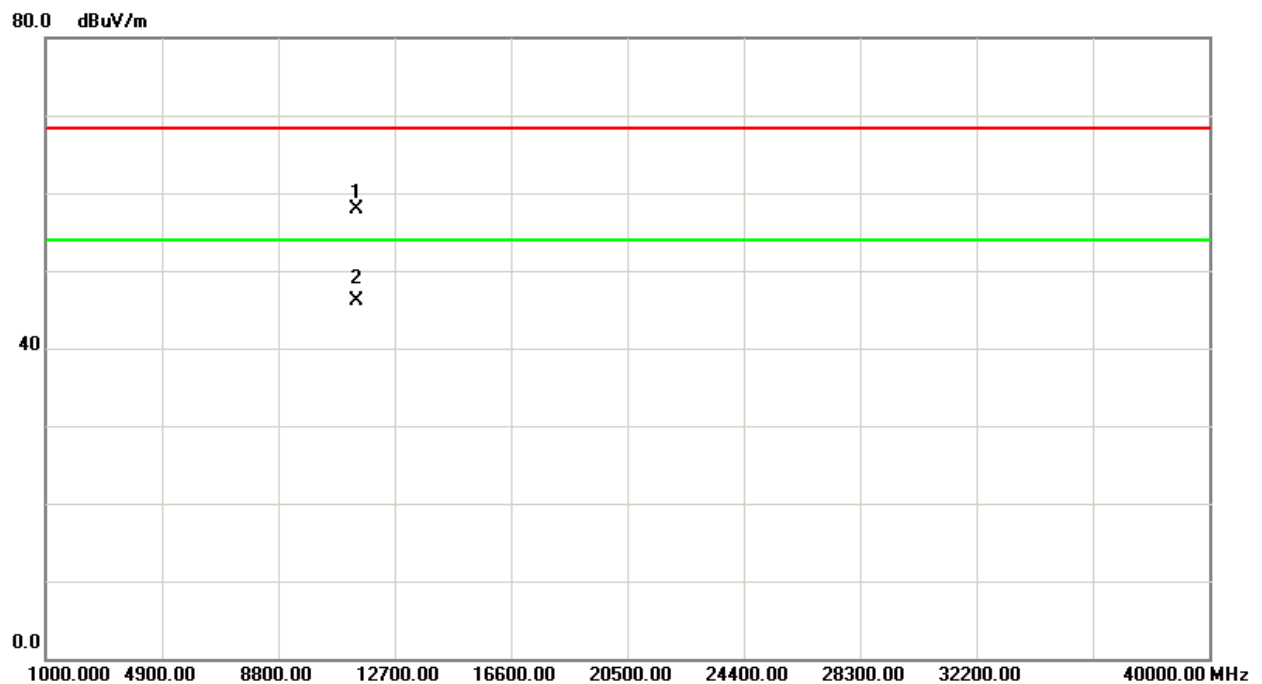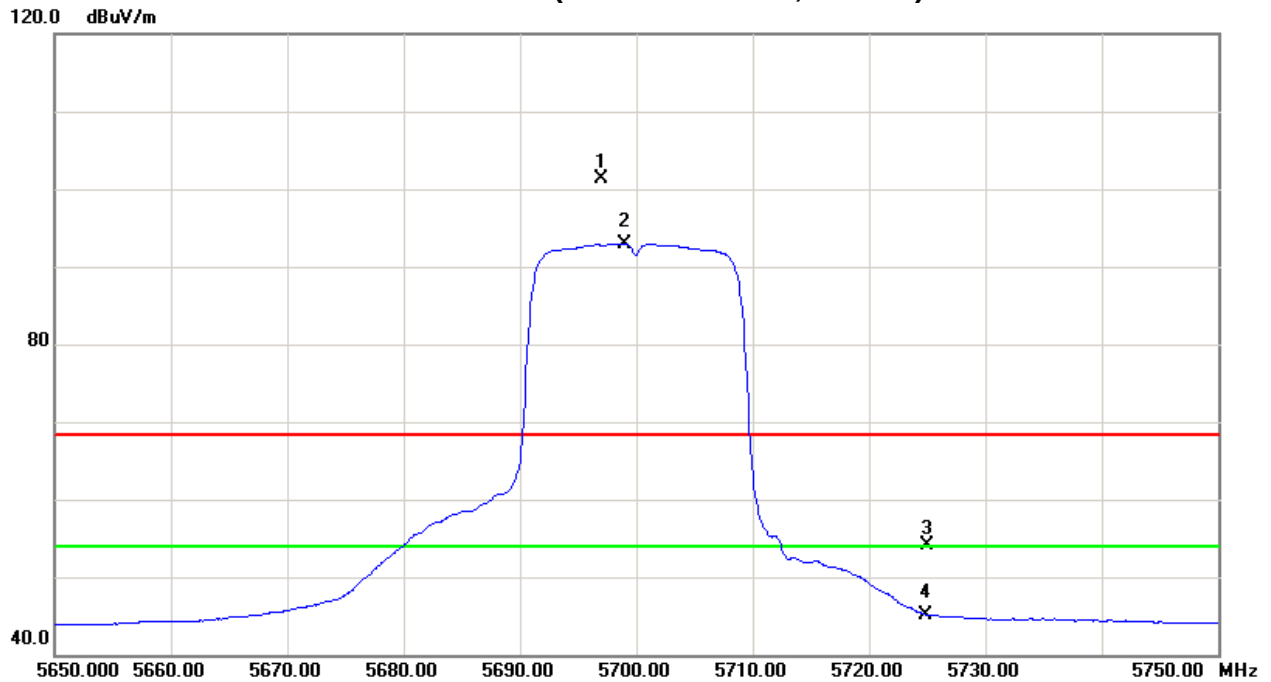



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5700MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5695.60	H	63.71	54.36	44.25	107.96	98.61	3.19	-6.16					X/F
5725.00	H	11.43	3.56	44.34	55.77	47.90	-49.00	-56.87	68.30	54.00	-27.00	-41.30	X/E
11406.63	H	40.37	28.85	18.26	58.63	47.11	-46.14	-57.66	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH140(Above 1000 MHz, Horizontal)

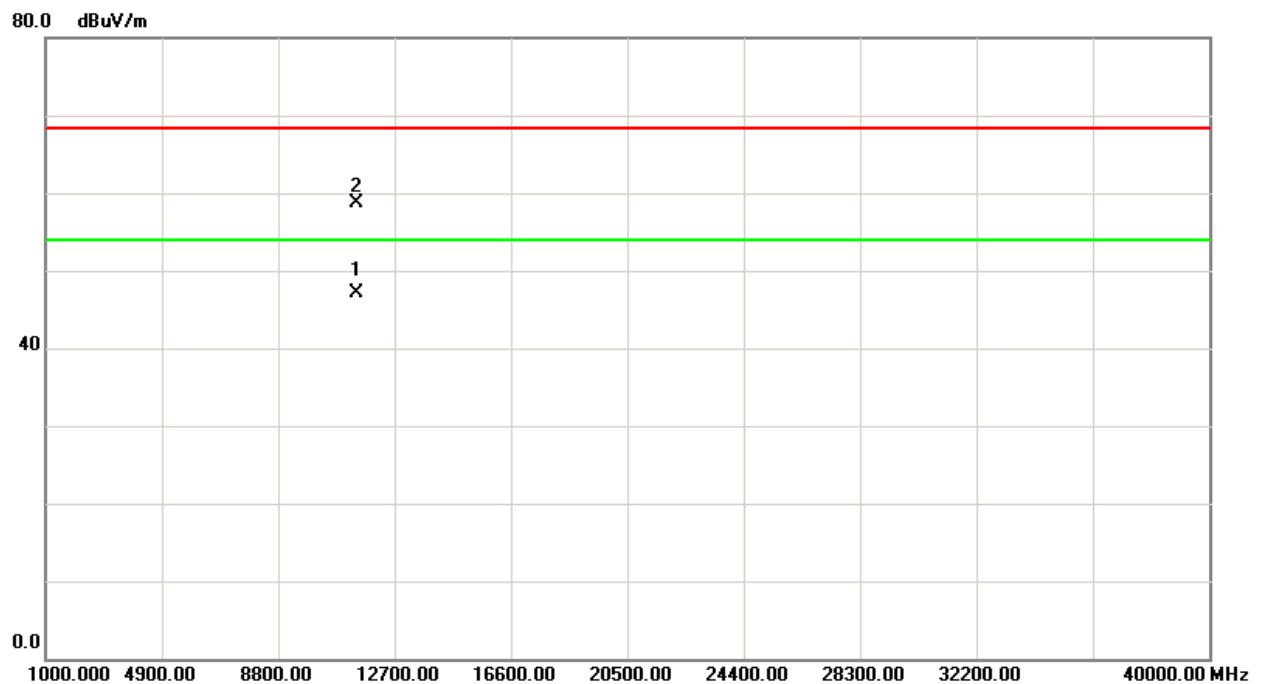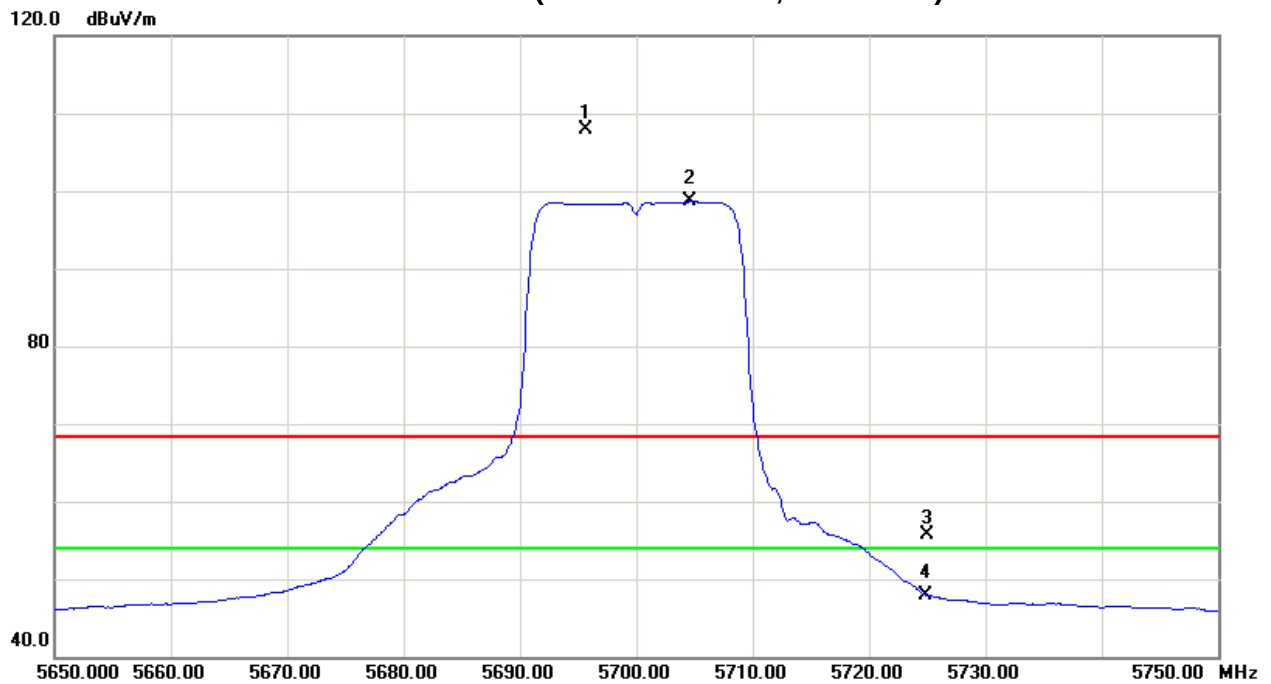



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5510MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	V	6.94	-0.15	43.49	50.43	43.34	-54.34	-61.43	68.30	54.00	-27.00	-41.30	X/E
5470.00	V	9.67	2.10	43.50	53.17	45.60	-51.60	-59.17	68.30	54.00	-27.00	-41.30	X/E
5505.40	V	51.20	43.03	43.60	94.80	86.63	-9.97	-18.14					X/F
11008.67	V	36.12	25.56	17.28	53.40	42.84	-51.37	-61.93	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH102(Above 1000 MHz, Vertical)

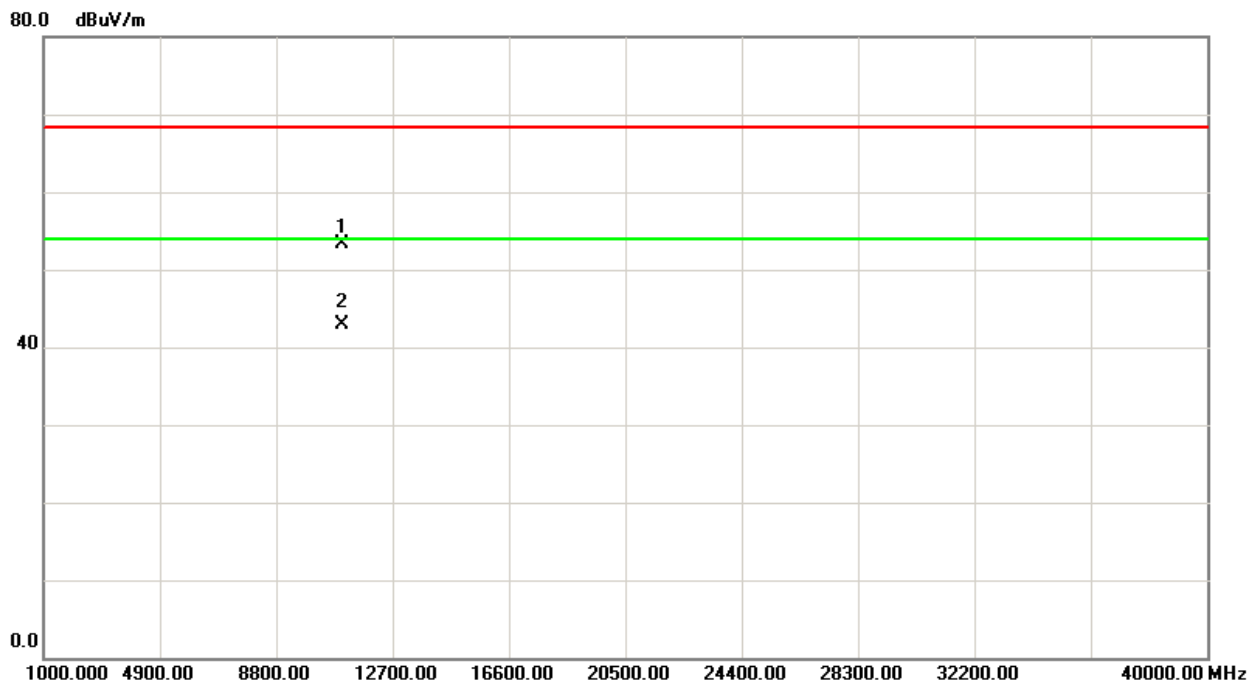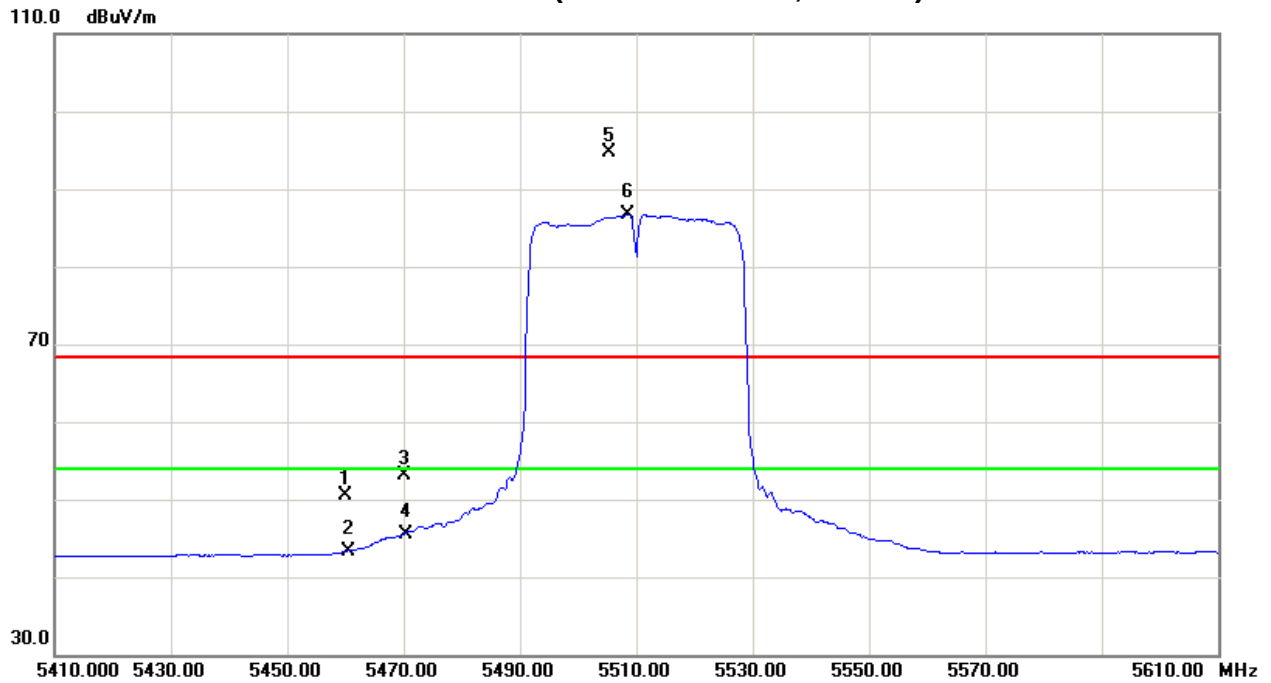




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5510MHz/Integral Antenna		

Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	H	8.73	0.81	43.49	52.22	44.30	-52.55	-60.47	68.30	54.00	-27.00	-41.30	X/E
5470.00	H	14.56	4.05	43.50	58.06	47.55	-46.71	-57.22	68.30	54.00	-27.00	-41.30	X/E
5498.60	H	56.14	47.29	43.58	99.72	90.87	-5.05	-13.90					X/F
11029.66	H	36.34	25.86	17.33	53.67	43.19	-51.10	-61.58	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

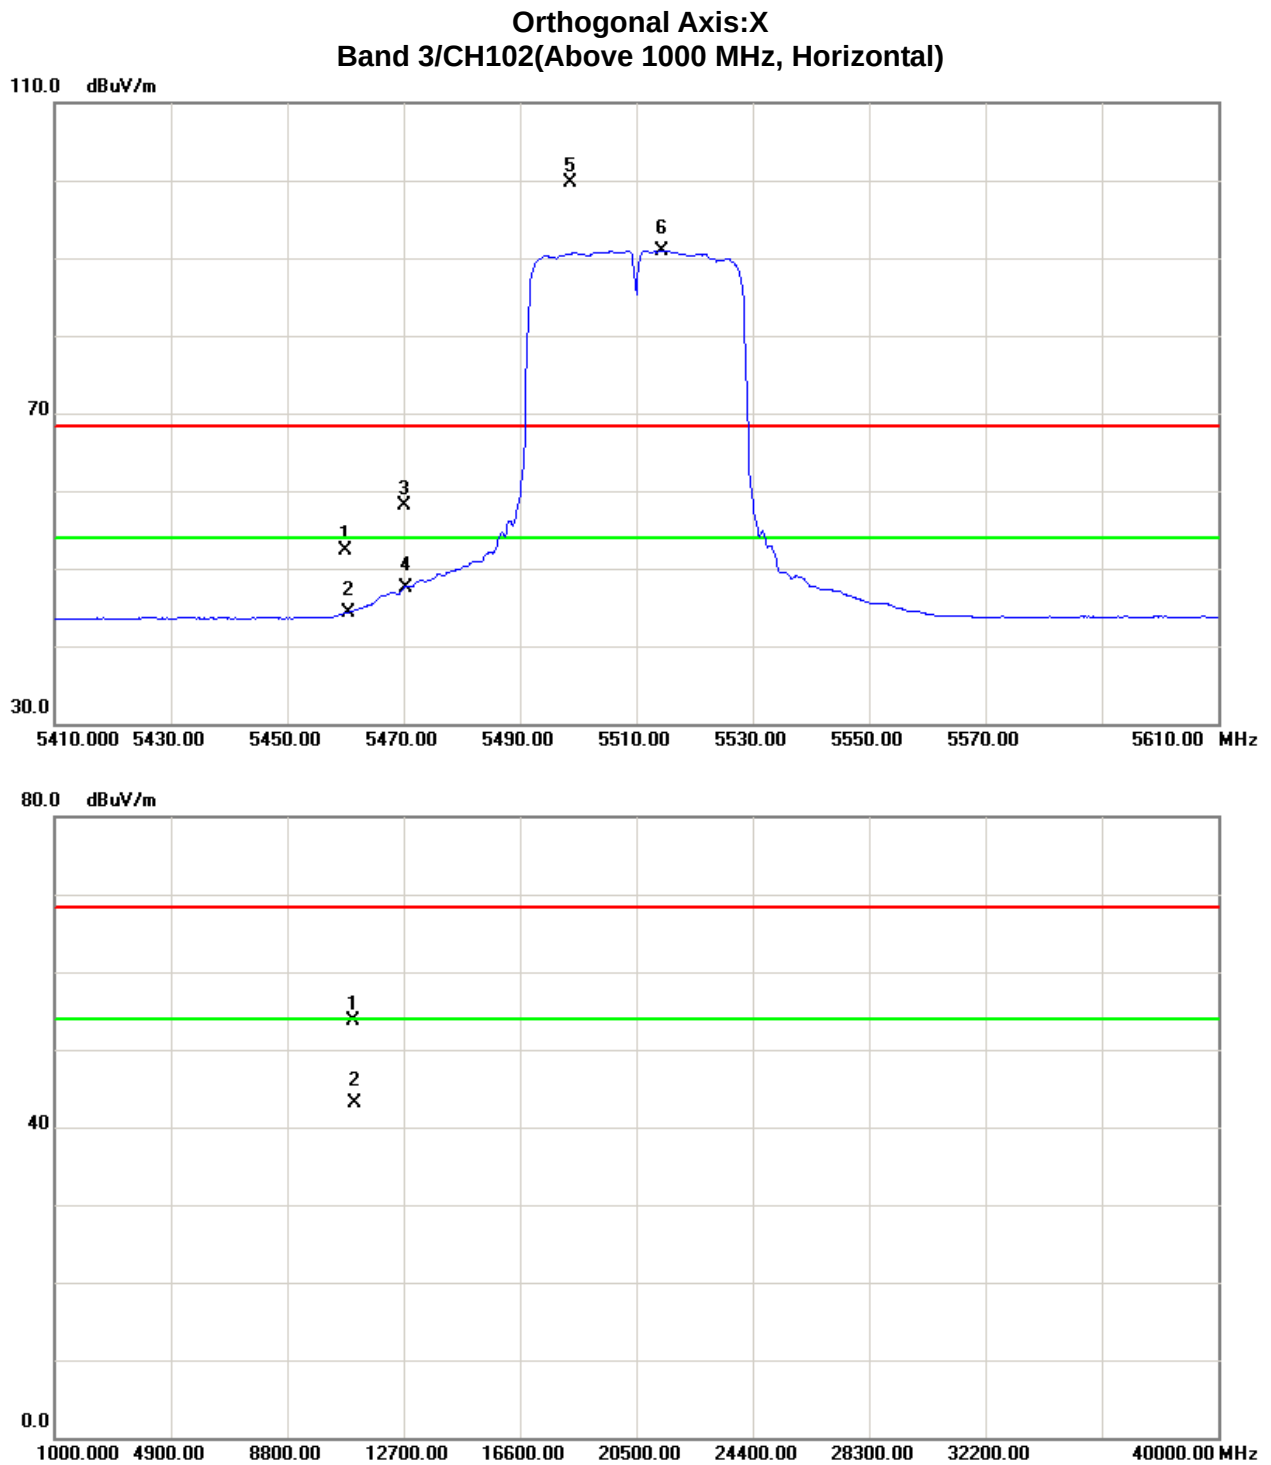



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5550MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5539.60	V	51.85	44.20	43.72	95.57	87.92	-9.20	-16.85					X/F
11108.65	V	36.45	25.45	17.52	53.97	42.97	-50.80	-61.80	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH110(Above 1000 MHz, Vertical)

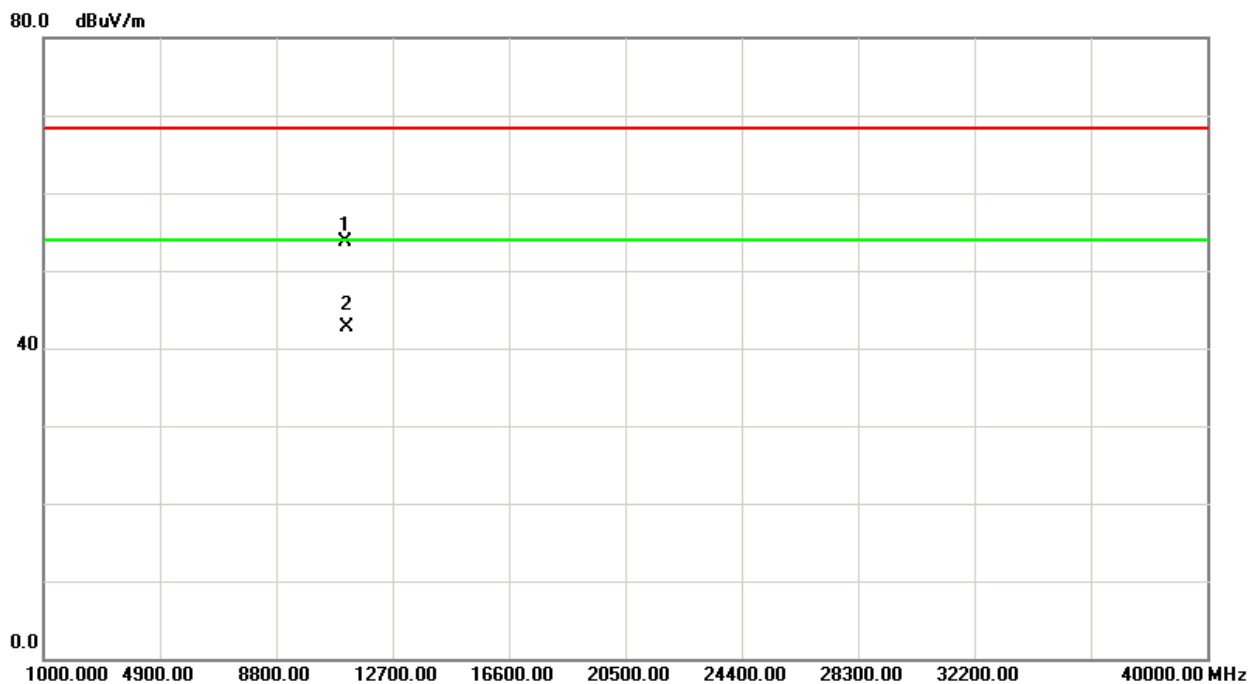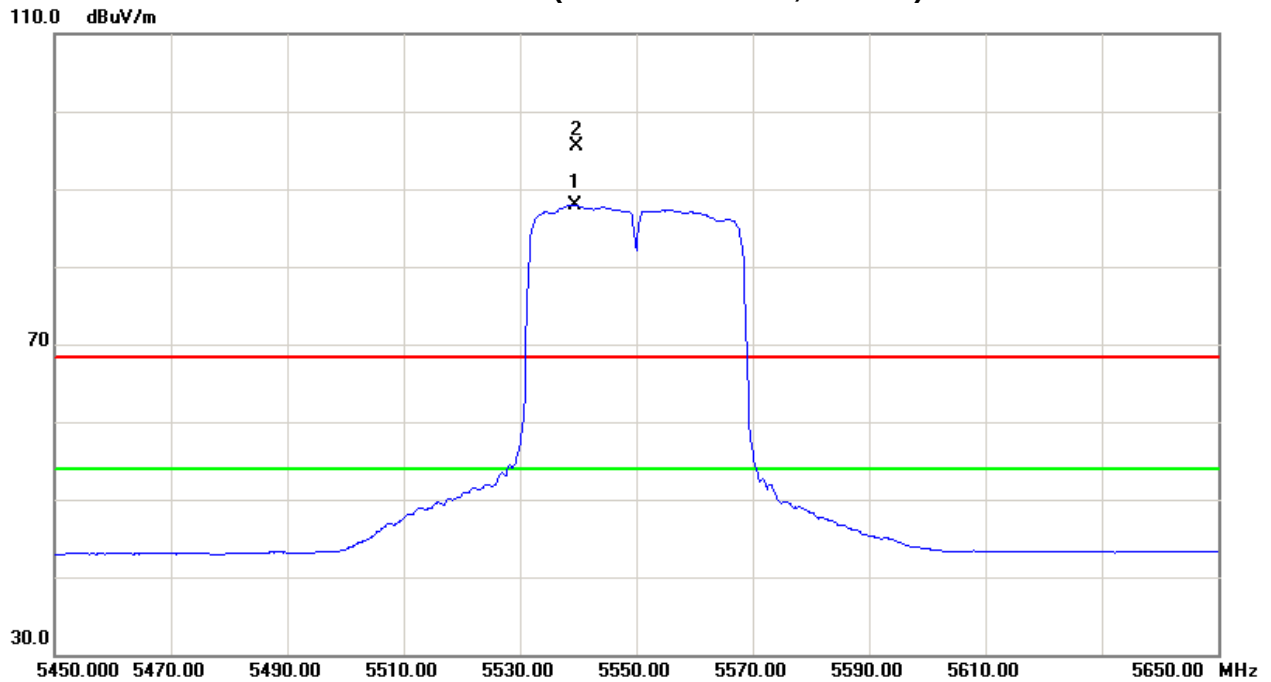



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5550MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5554.40	H	57.86	48.99	43.77	101.63	92.76	-3.14	-12.01					X/F
11107.62	H	36.13	25.11	17.52	53.65	42.63	-51.12	-62.14	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH110(Above 1000 MHz, Horizontal)

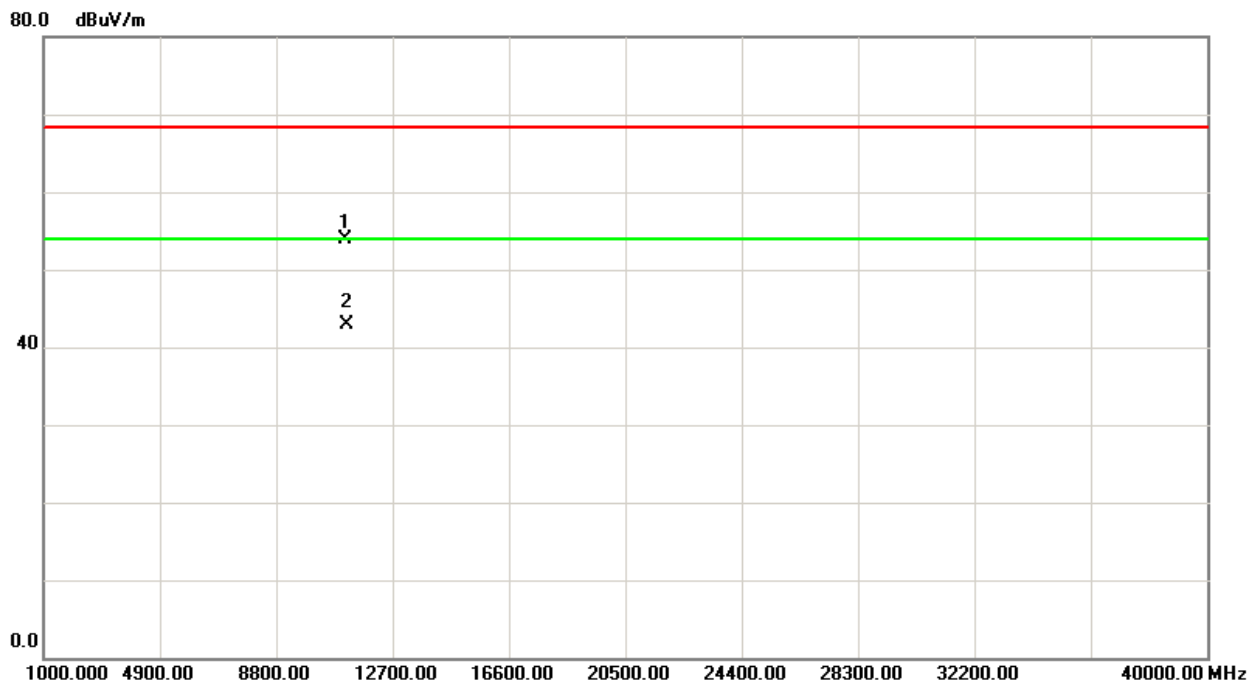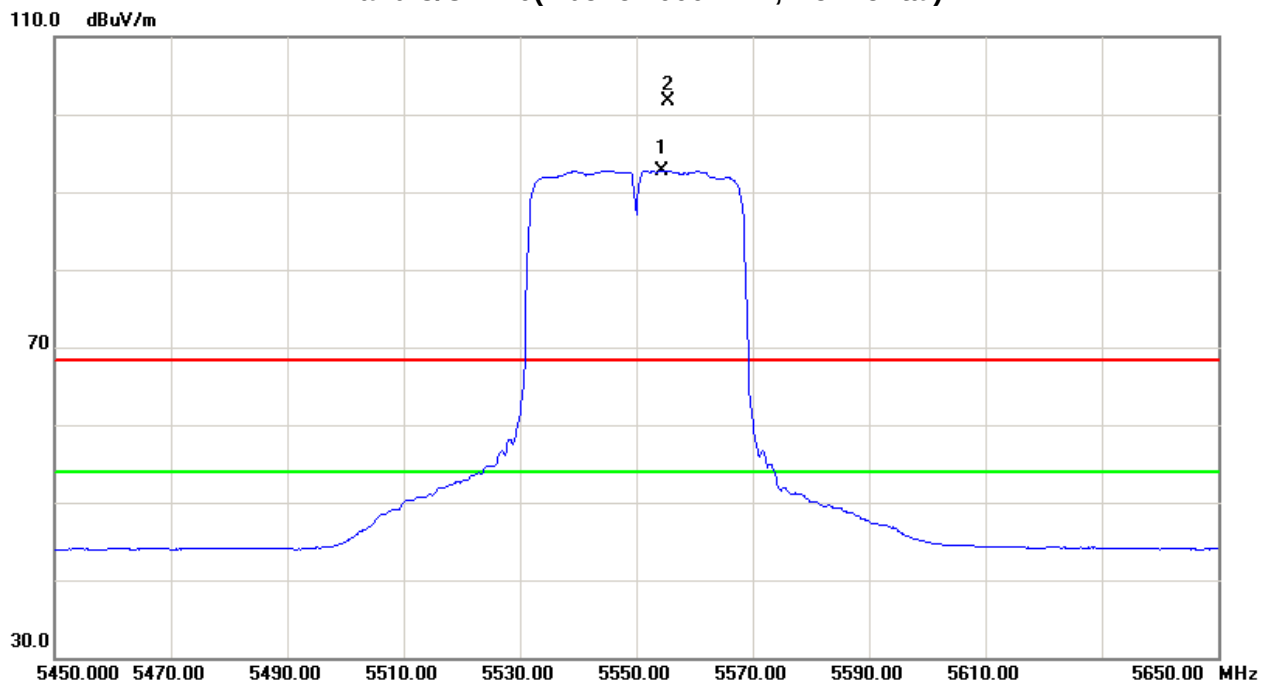



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5670MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5667.00	V	49.11	40.67	44.14	93.25	84.81	-11.52	-19.96					X/F
5725.00	V	7.53	-0.74	44.34	51.87	43.60	-52.90	-61.17	68.30	54.00	-27.00	-41.30	X/E
11347.67	V	35.85	25.34	18.11	53.96	43.45	-50.81	-61.32	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH134(Above 1000 MHz, Vertical)

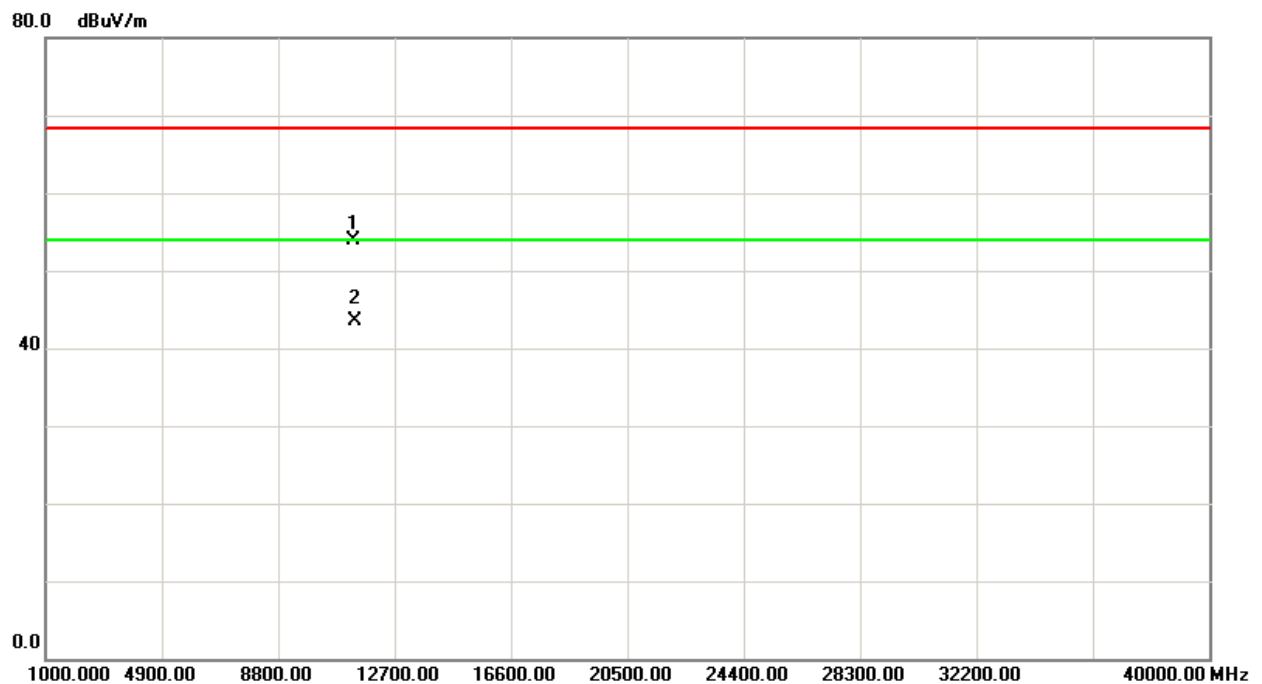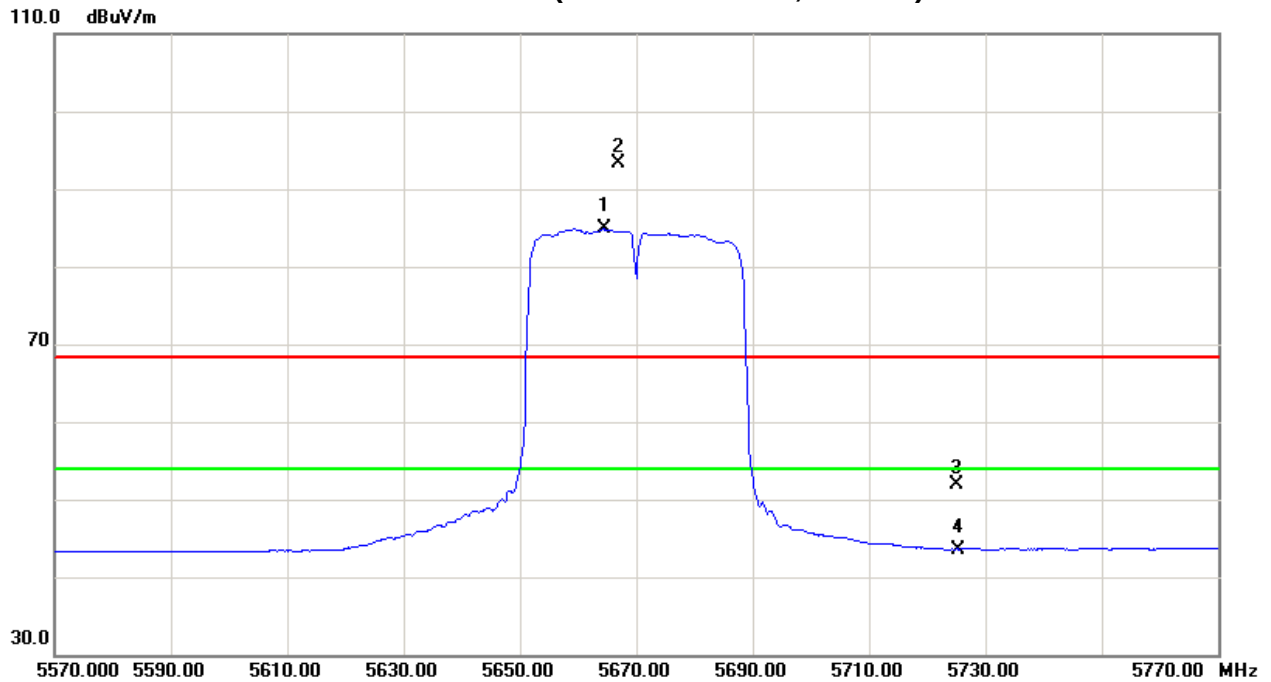



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5670MHz/Integral Antenna		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5658.80	H	58.26	49.06	44.13	102.39	93.19	-2.38	-11.58					X/F
5725.00	H	8.86	0.34	44.34	53.20	44.68	-51.57	-60.09	68.30	54.00	-27.00	-41.30	X/E
11334.65	H	35.89	25.52	18.08	53.97	43.60	-50.80	-61.17	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH134(Above 1000 MHz, Horizontal)

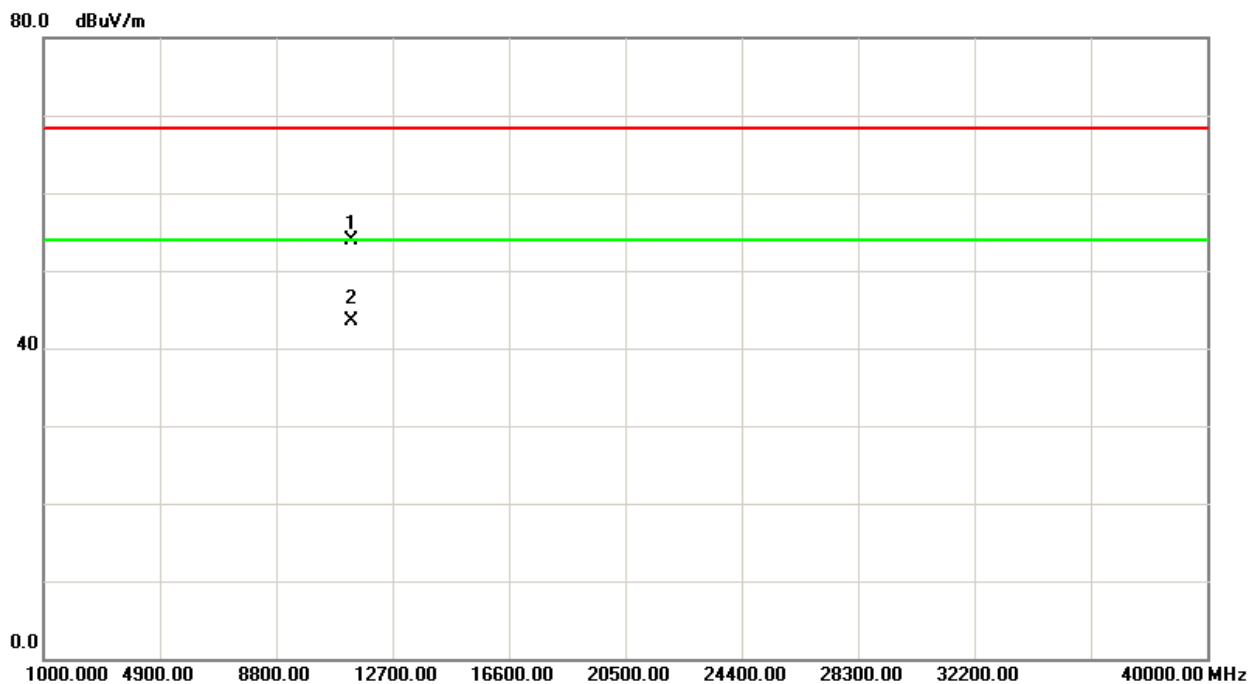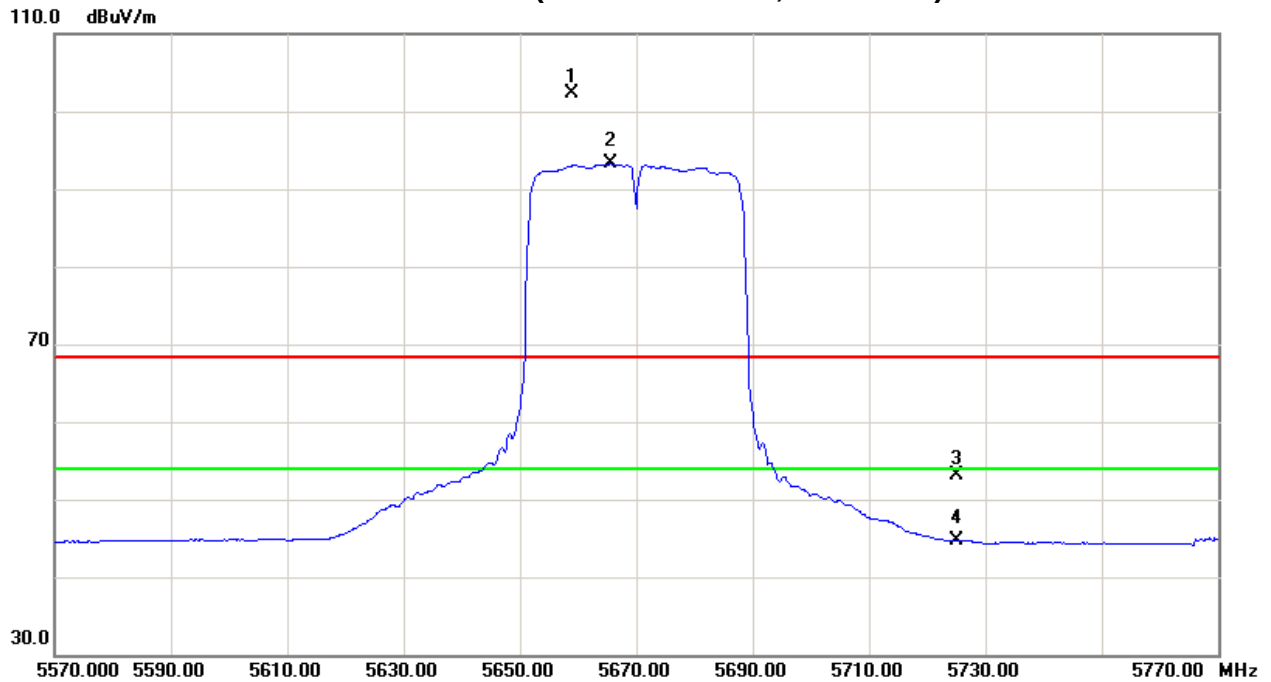



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	21.38	7.93	42.72	64.10	50.65	-40.67	-54.12	68.30	54.00	-27.00	-41.30	X/E
5177.80	V	64.41	56.94	42.78	107.19	99.72	2.42	-5.05					X/F
10361.90	V	41.49	30.68	16.02	57.51	46.70	-47.26	-58.07	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency-“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)

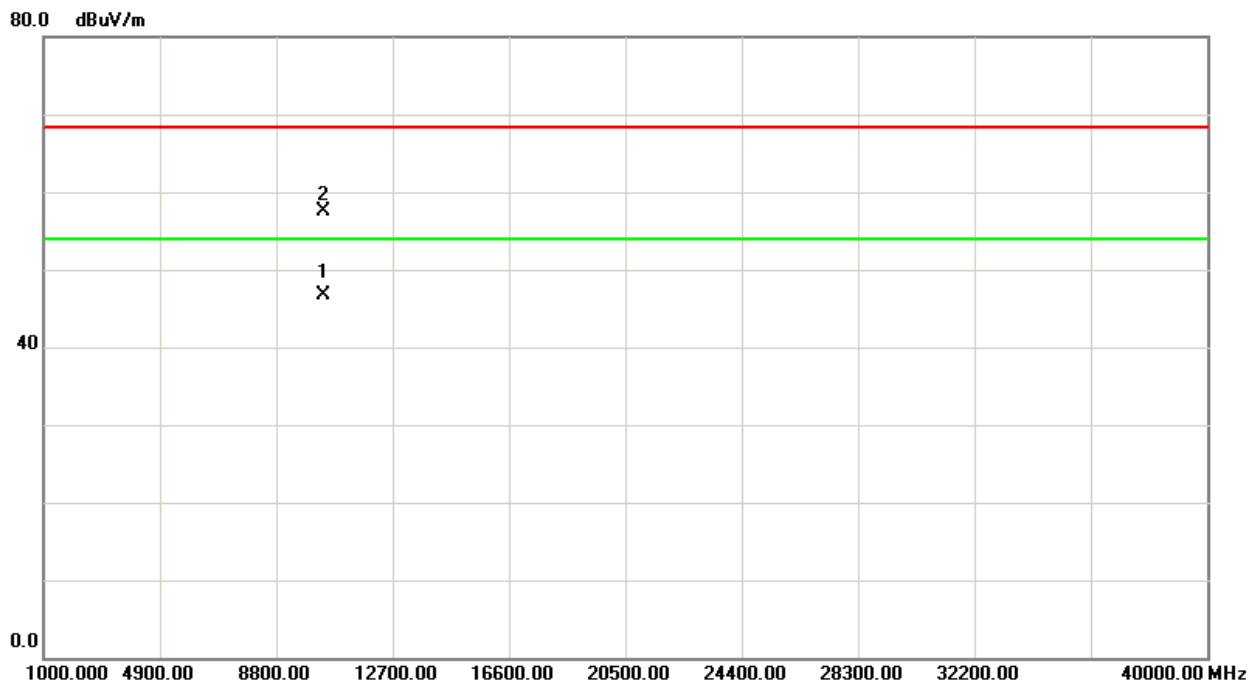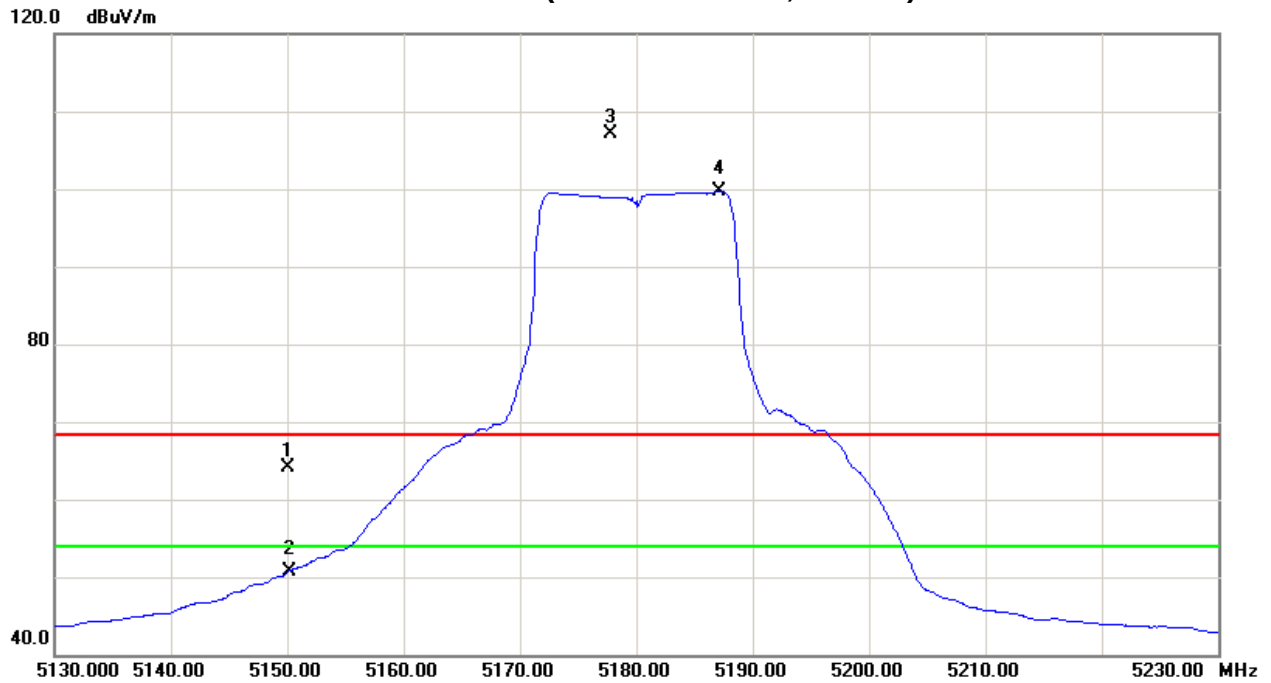



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5180MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	10.15	0.63	42.72	52.87	43.35	-51.90	-61.42	68.30	54.00	-27.00	-41.30	X/E
5176.20	H	52.89	45.90	42.78	95.67	88.68	-9.10	-16.09					X/F
10354.95	H	40.30	29.90	16.04	56.34	45.94	-48.43	-58.83	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)

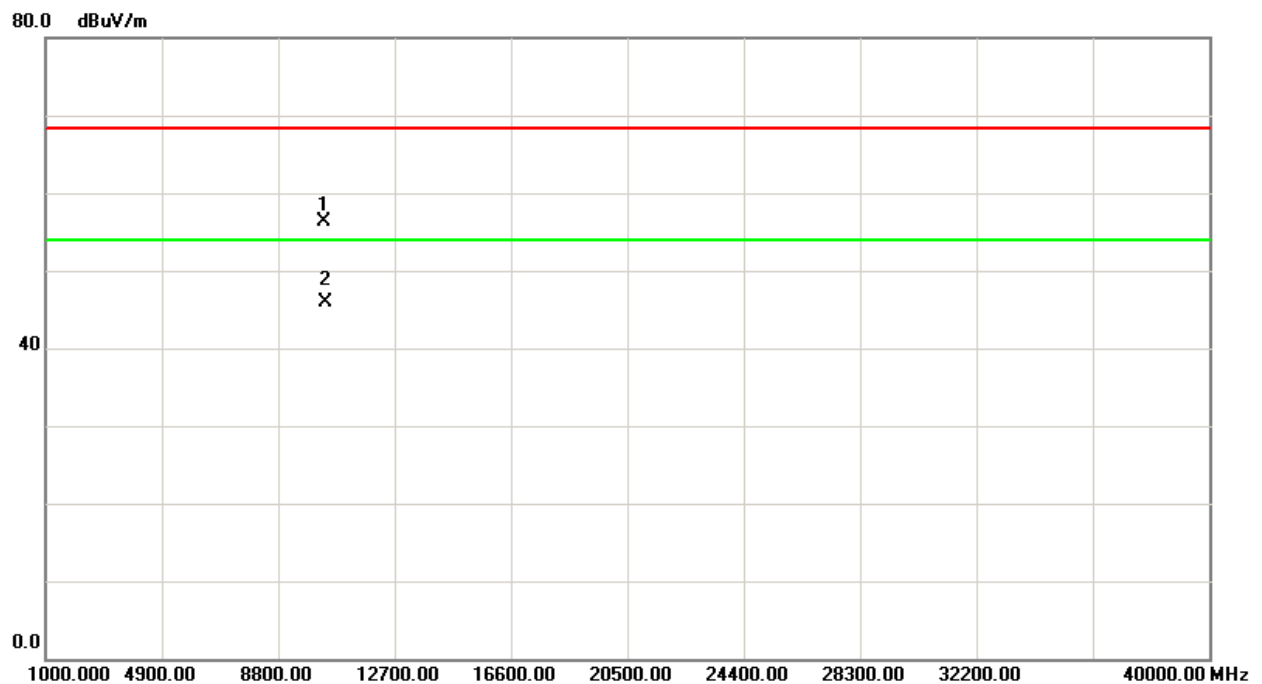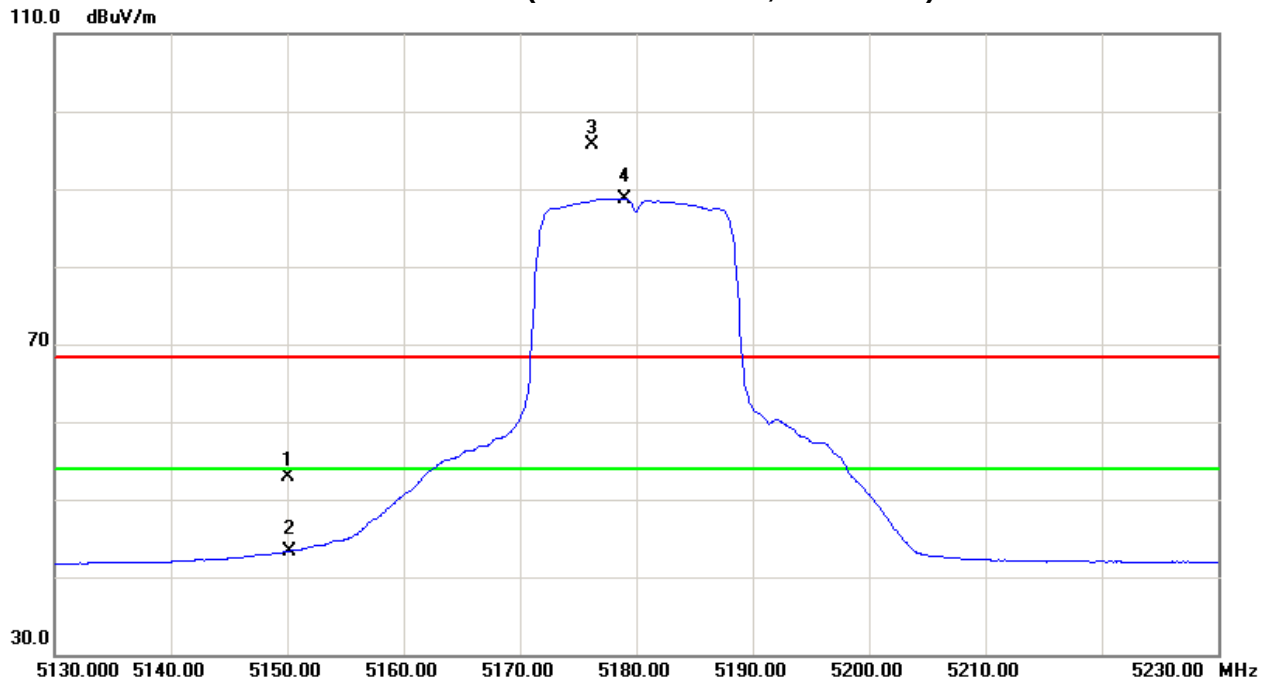



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5192.90	V	64.21	55.93	42.83	107.04	98.76	2.27	-6.01					X/F
10401.17	V	41.45	30.35	15.96	57.41	46.31	-47.36	-58.46	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)

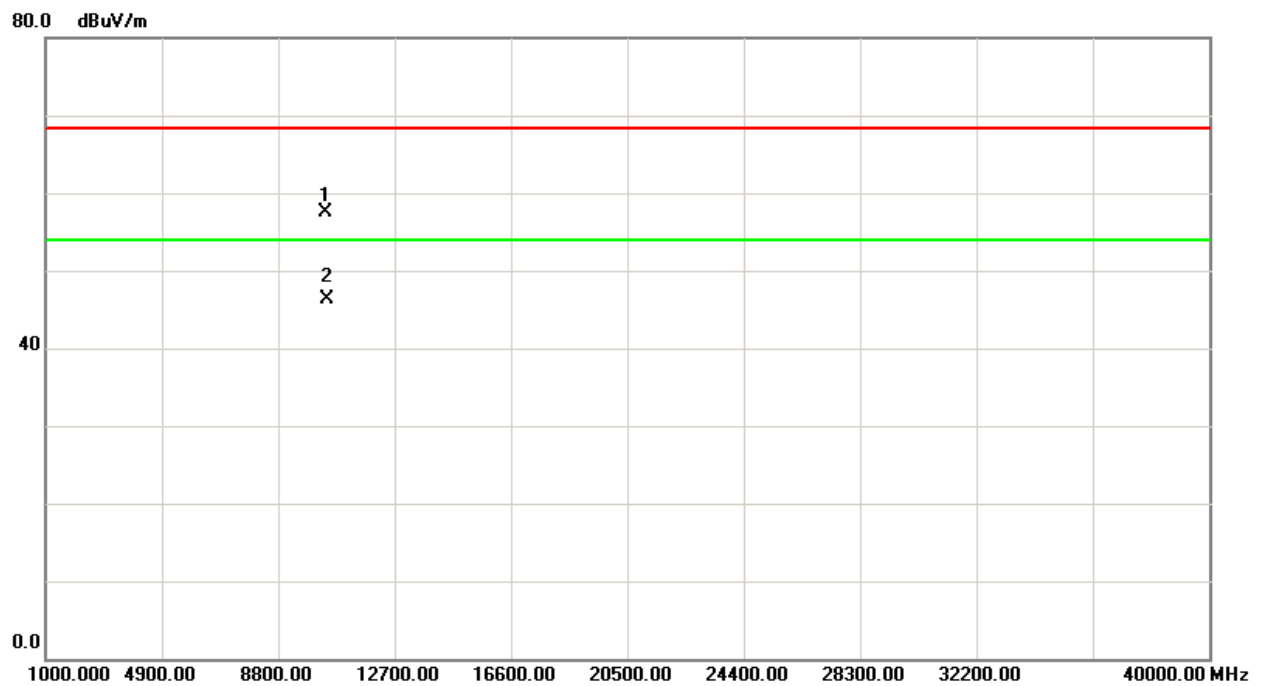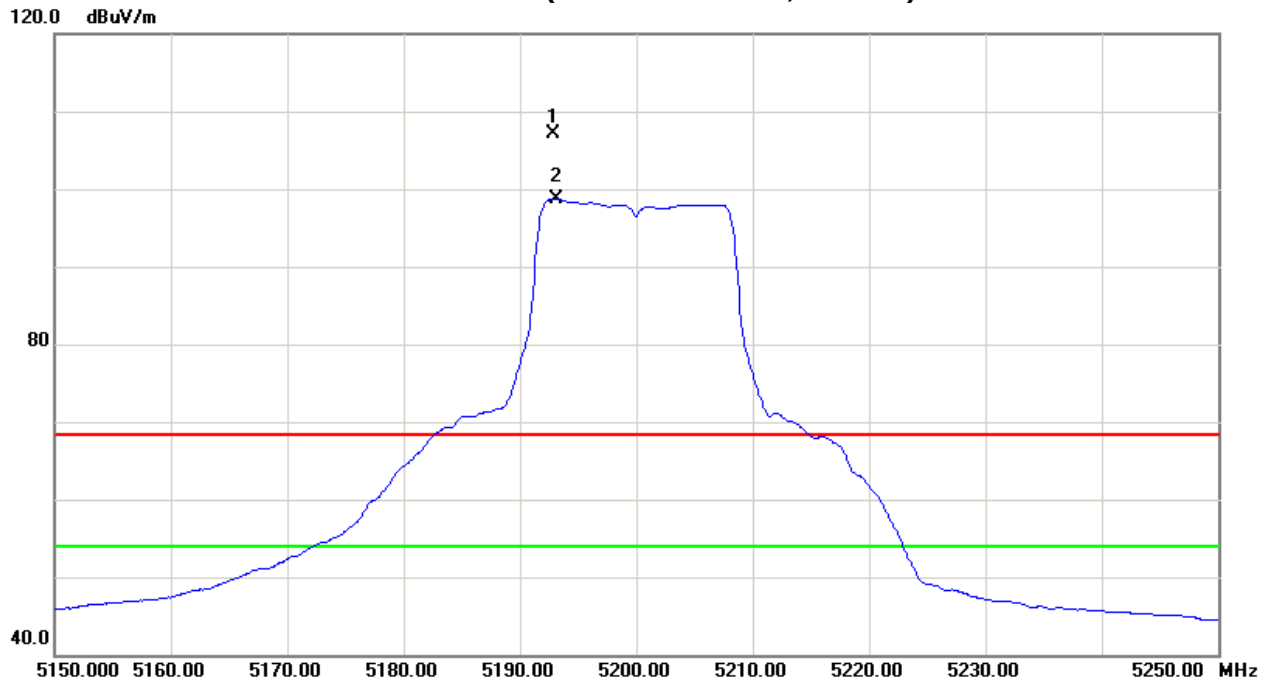



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5200MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5197.50	H	54.00	46.56	42.84	96.84	89.40	-7.93	-15.37					X/F
10401.25	H	40.75	29.56	15.96	56.71	45.52	-48.06	-59.25	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)

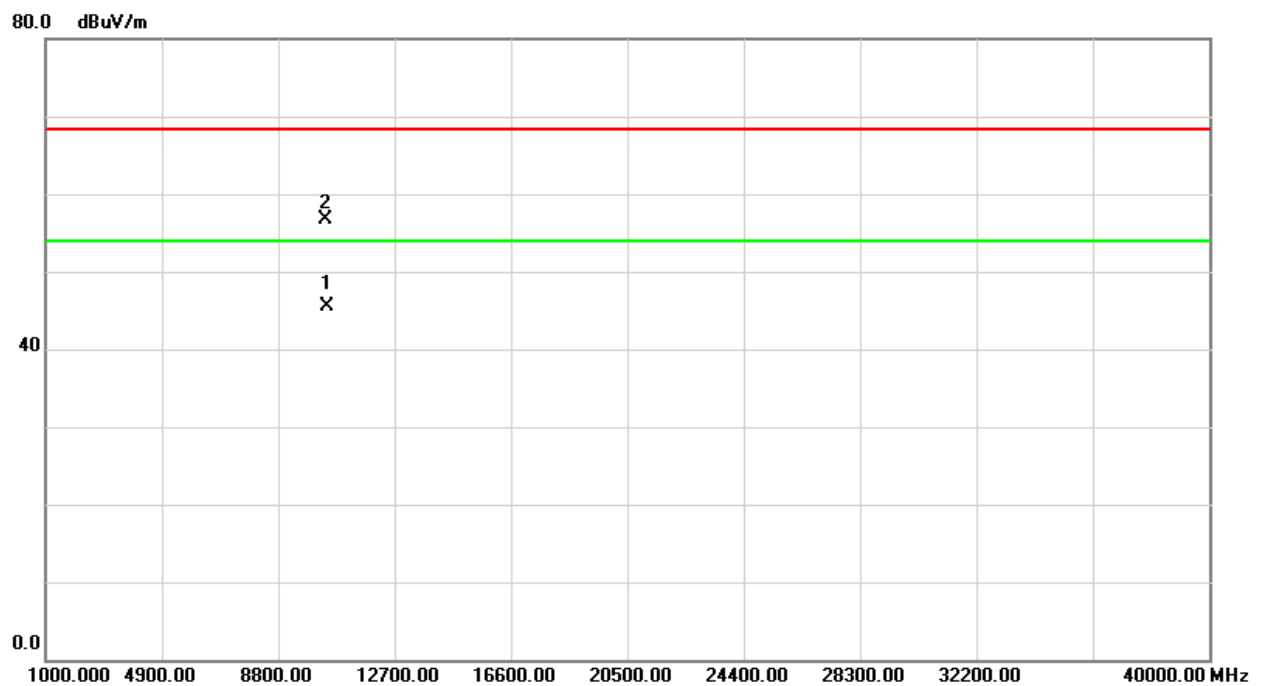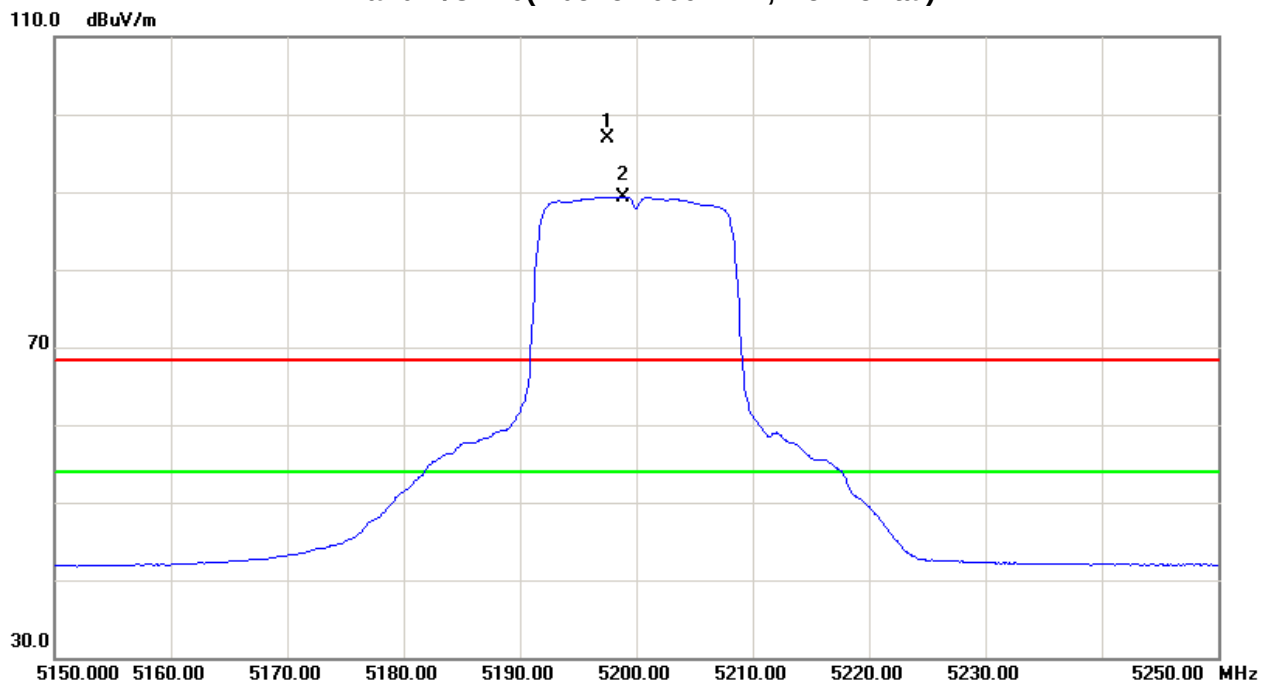



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5234.40	V	64.17	56.00	42.93	107.10	98.93	2.33	-5.84					X/F
10480.35	V	41.38	30.37	15.85	57.23	46.22	-47.54	-58.55	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)

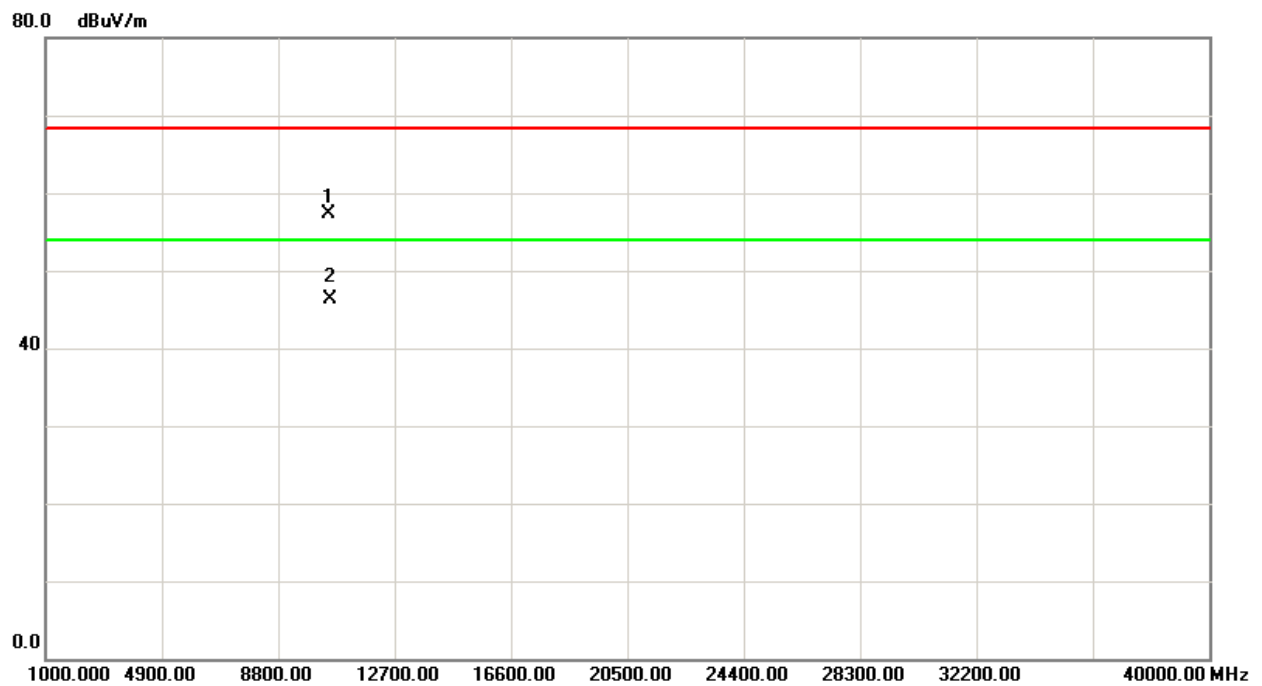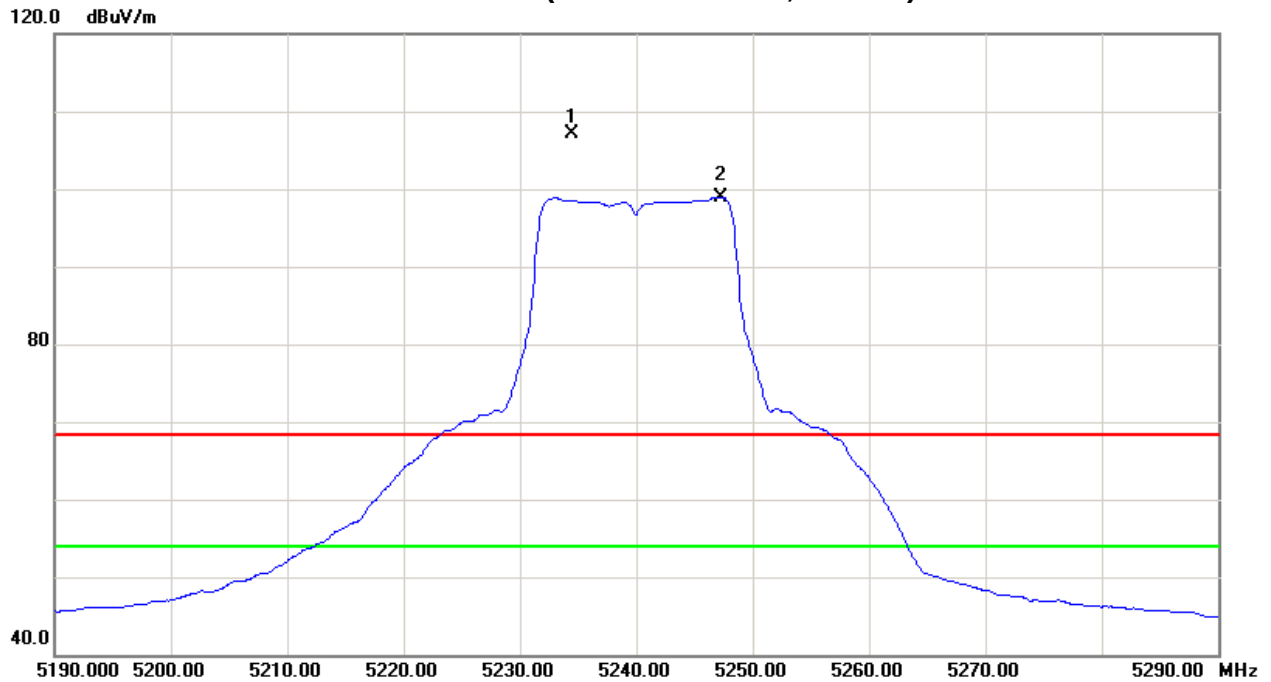



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX A Mode 5240MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5235.60	H	54.55	47.26	42.93	97.48	90.19	-7.29	-14.58					X/F
10481.20	H	40.68	29.58	15.85	56.53	45.43	-48.24	-59.34	77.48	70.19	-17.82	-25.11	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)

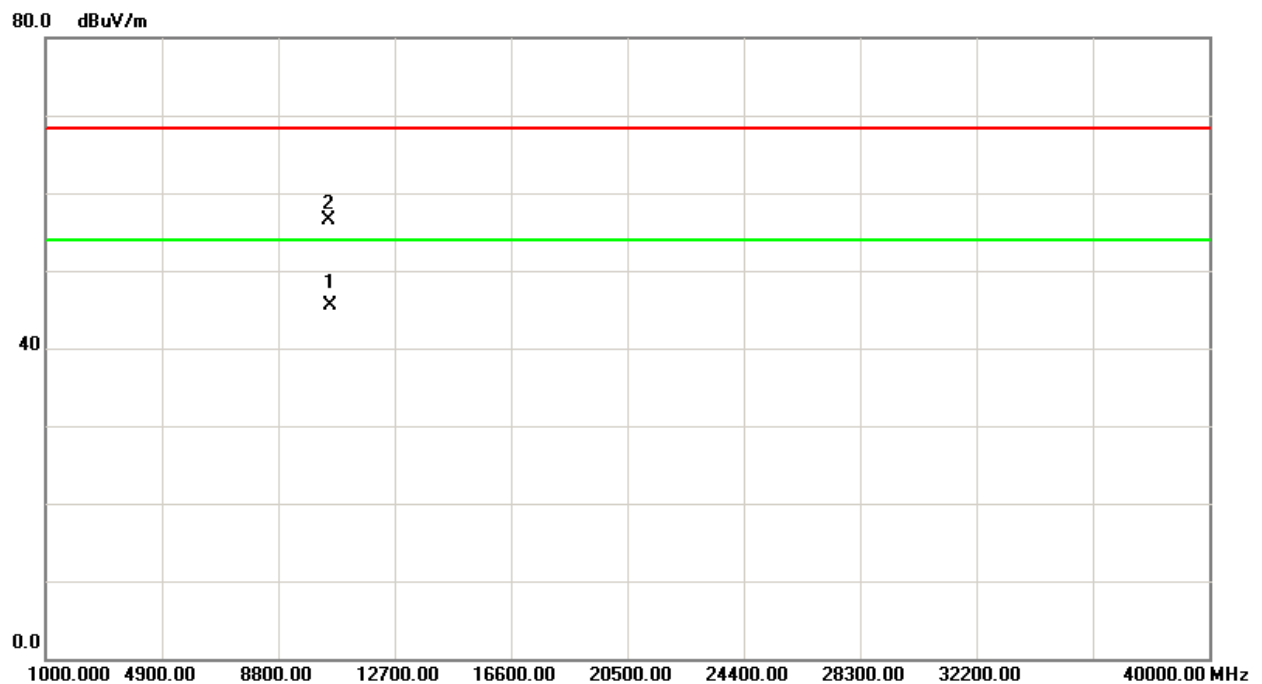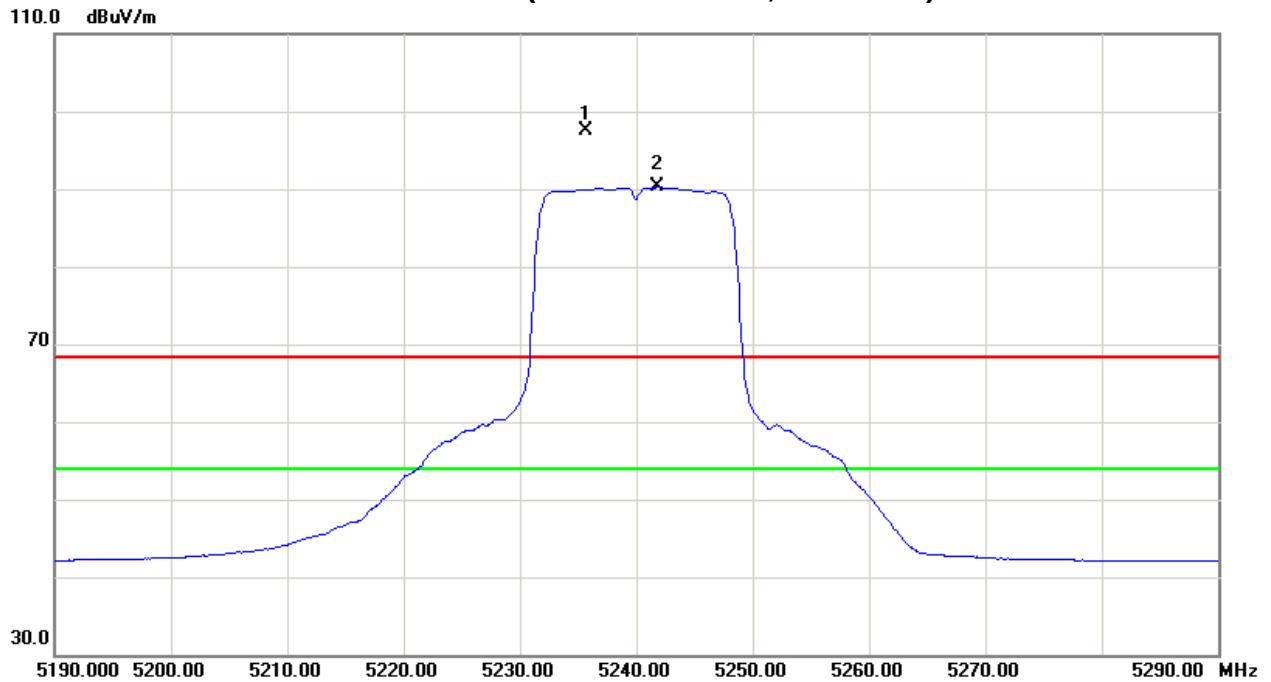



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	15.42	4.71	42.72	58.14	47.43	-46.63	-57.34	68.30	54.00	-27.00	-41.30	X/E
5185.70	V	62.61	53.53	42.78	105.39	96.31	0.62	-8.46					X/F
10355.15	V	40.52	30.25	16.03	56.55	46.28	-48.22	-58.49	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Vertical)

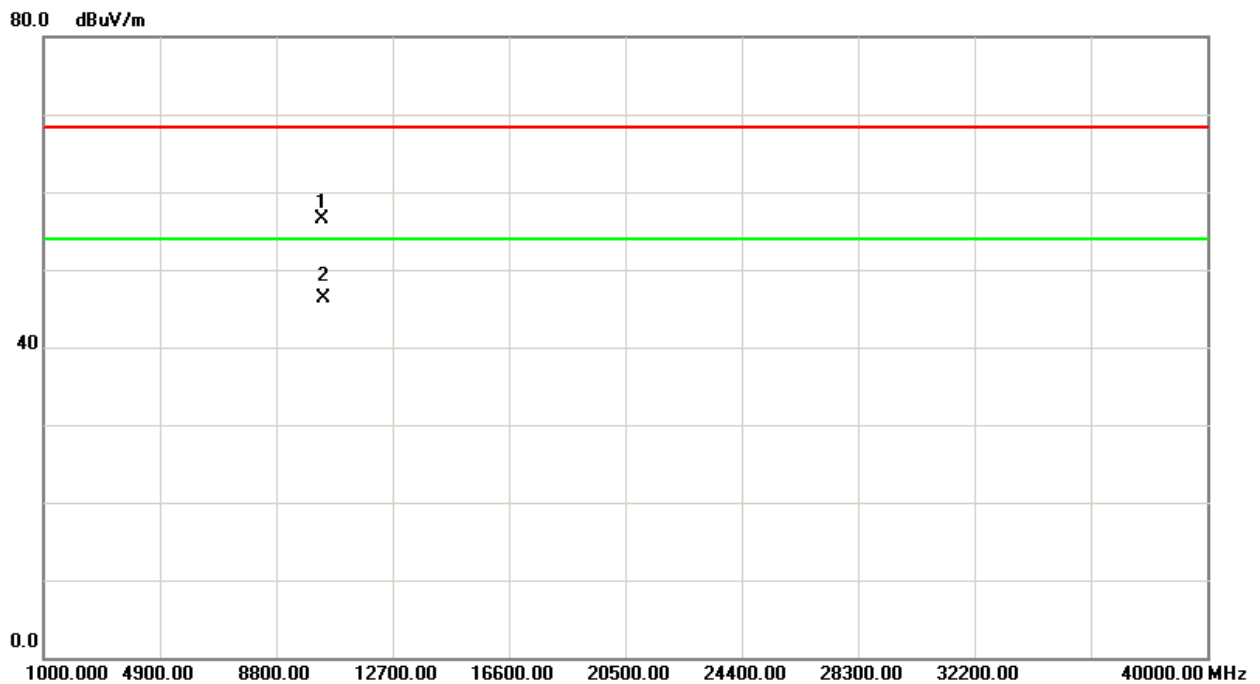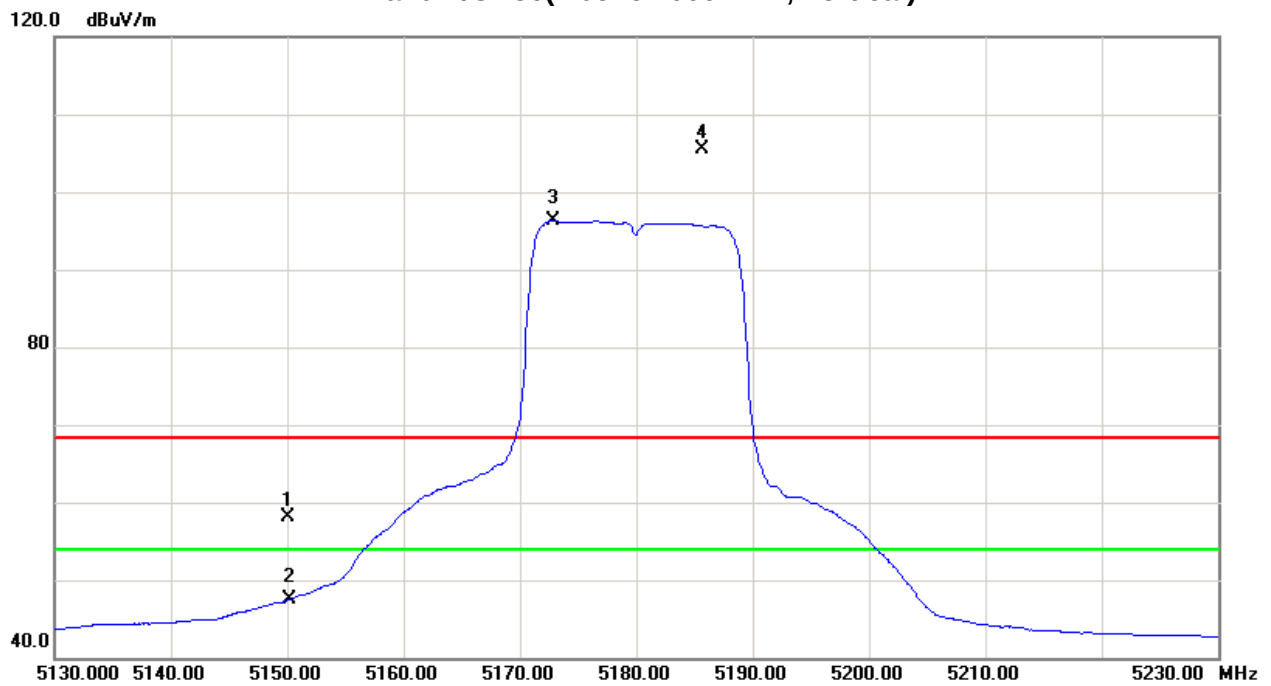



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5180MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	8.18	-0.03	42.72	50.90	42.69	-53.87	-62.08	68.30	54.00	-27.00	-41.30	X/E
5181.40	H	53.99	44.92	42.80	96.79	87.72	-7.98	-17.05					X/F
10363.00	H	40.25	29.12	16.02	56.27	45.14	-48.50	-59.63	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH36(Above 1000 MHz, Horizontal)

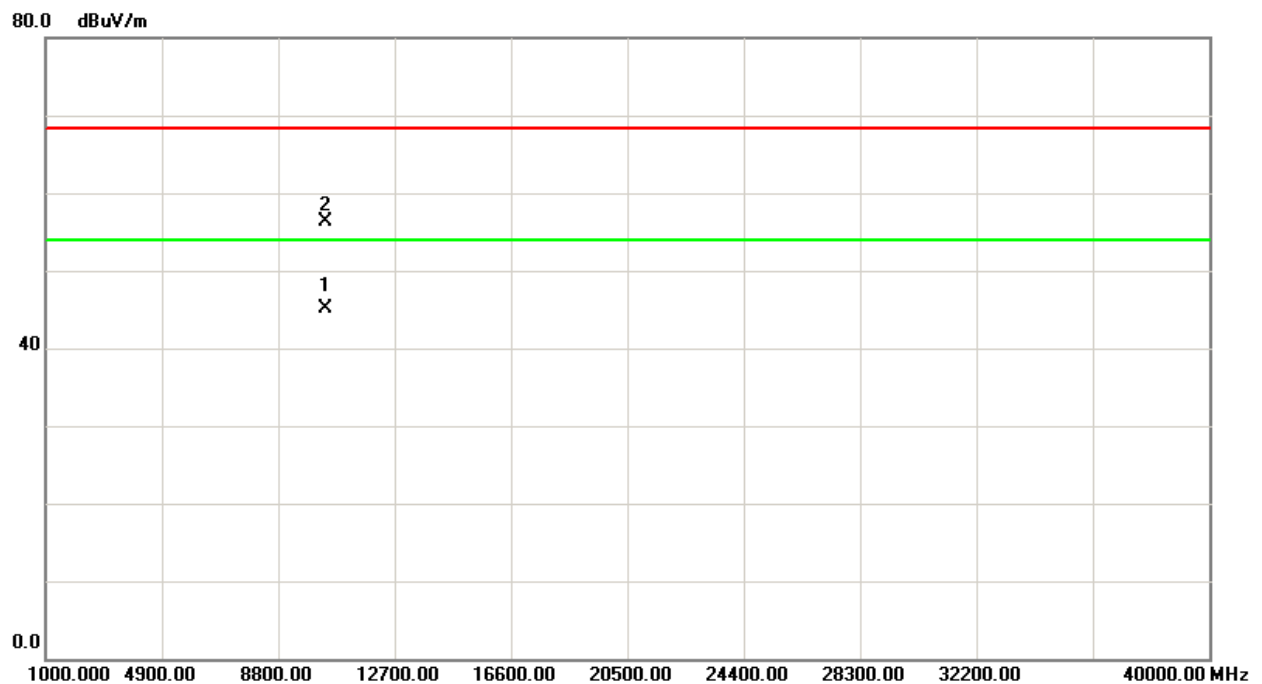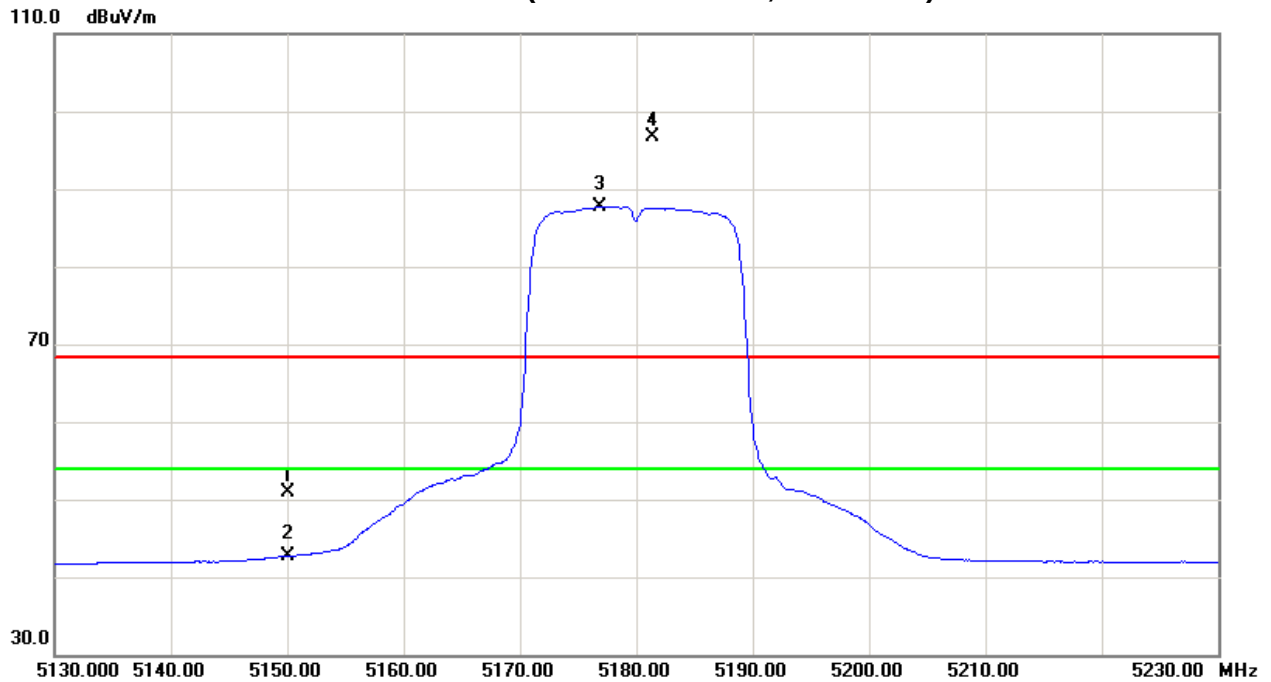



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5193.10	V	61.95	53.25	42.83	104.78	96.08	0.01	-8.69					X/F
10404.30	V	40.83	30.25	15.96	56.79	46.21	-47.98	-58.56	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Vertical)

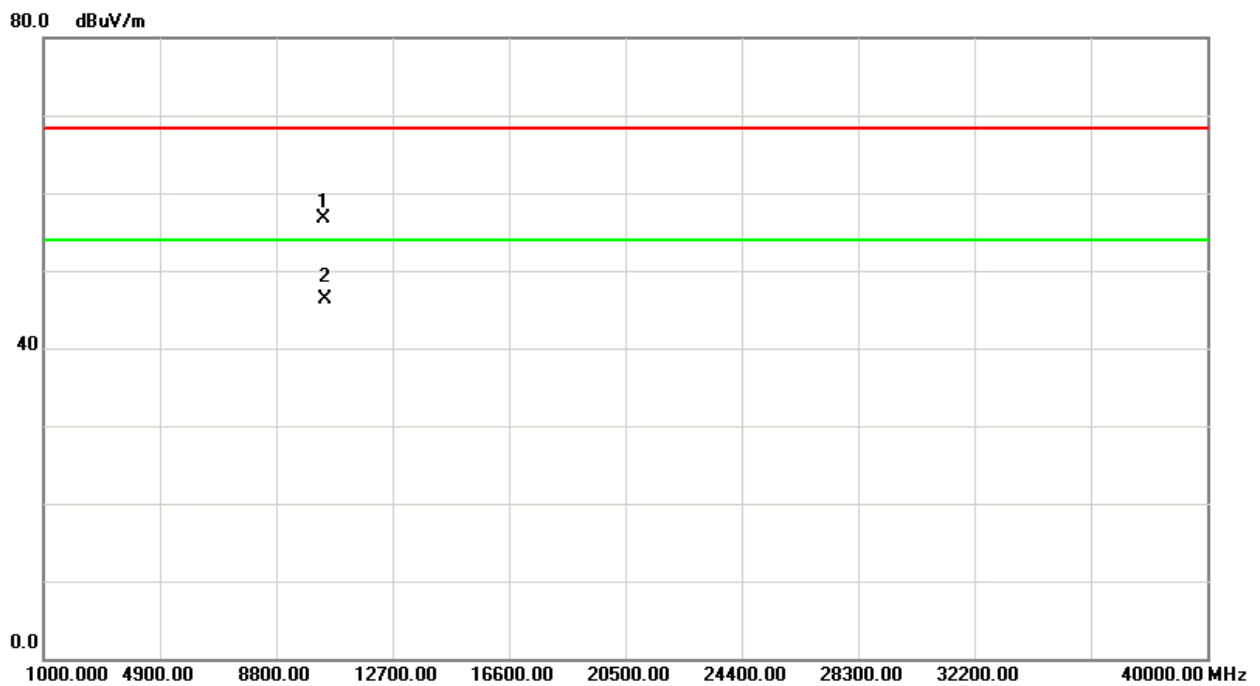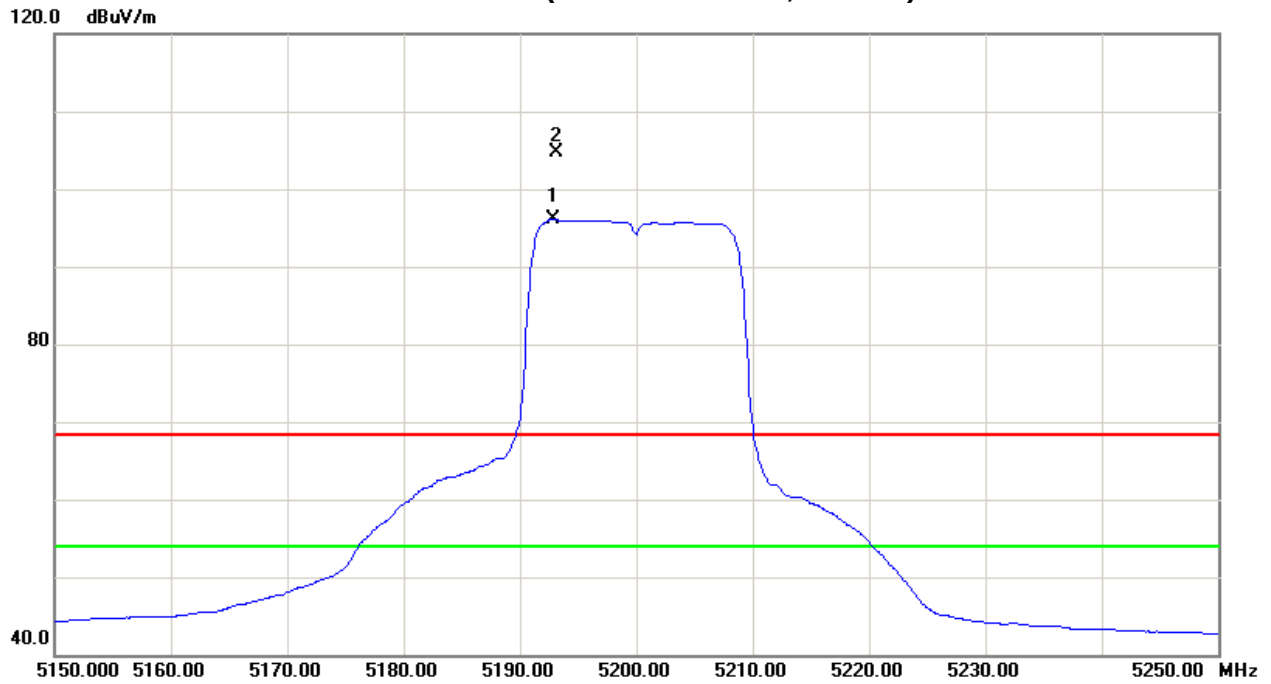



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5200MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5198.40	H	54.93	45.53	42.84	97.77	88.37	-7.00	-16.40					X/F
10405.00	H	40.42	29.48	15.97	56.39	45.45	-48.38	-59.32	77.77	68.37	-17.53	-26.93	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH40(Above 1000 MHz, Horizontal)

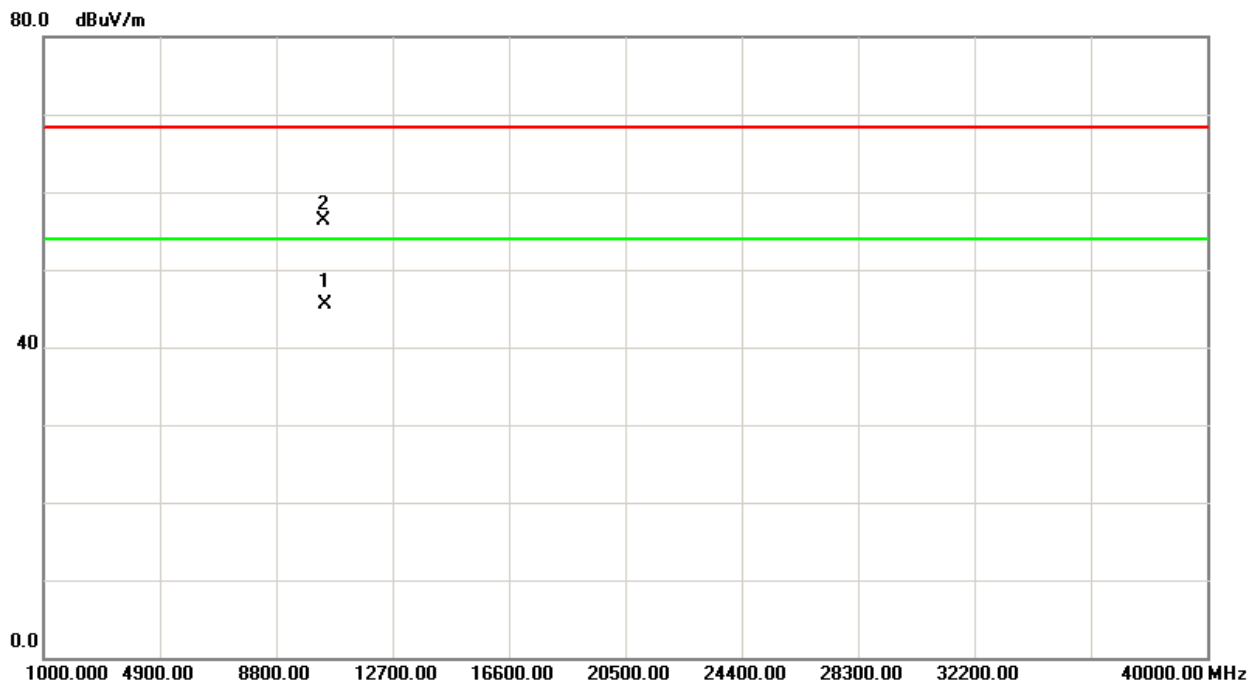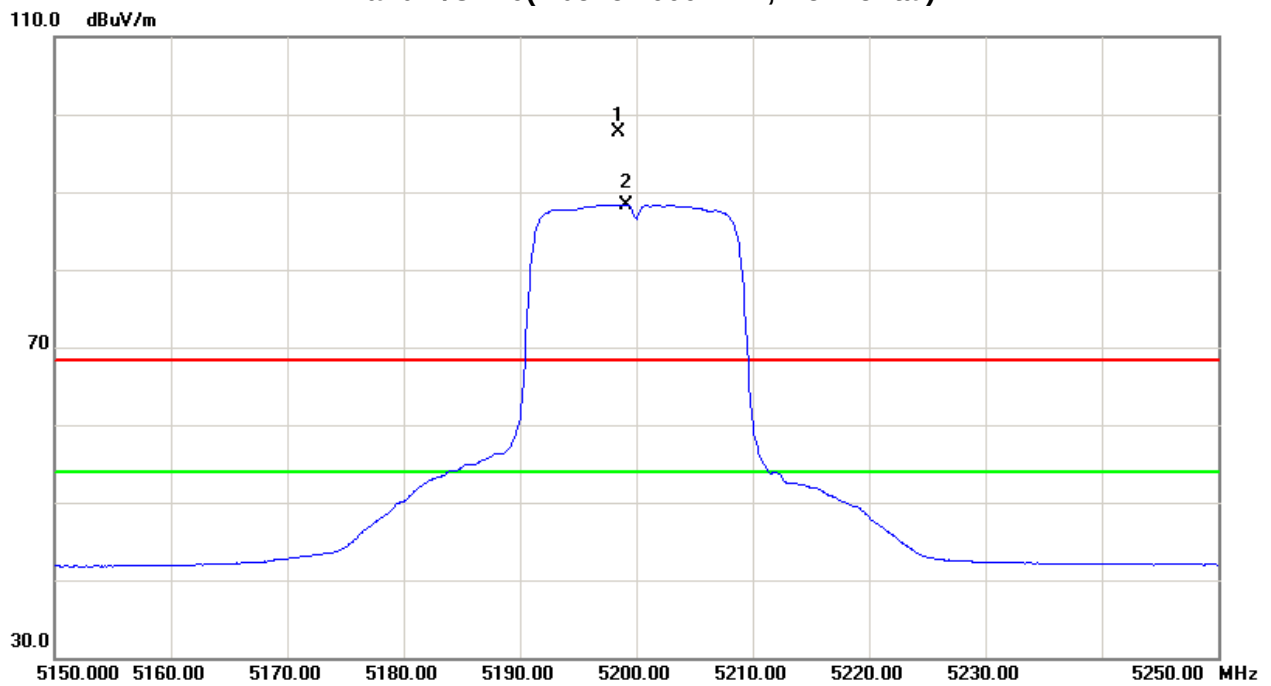



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5246.90	V	64.05	54.66	42.96	107.01	97.62	2.24	-7.15					X/F
10485.15	V	40.67	30.31	15.84	56.51	46.15	-48.26	-58.62	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Vertical)

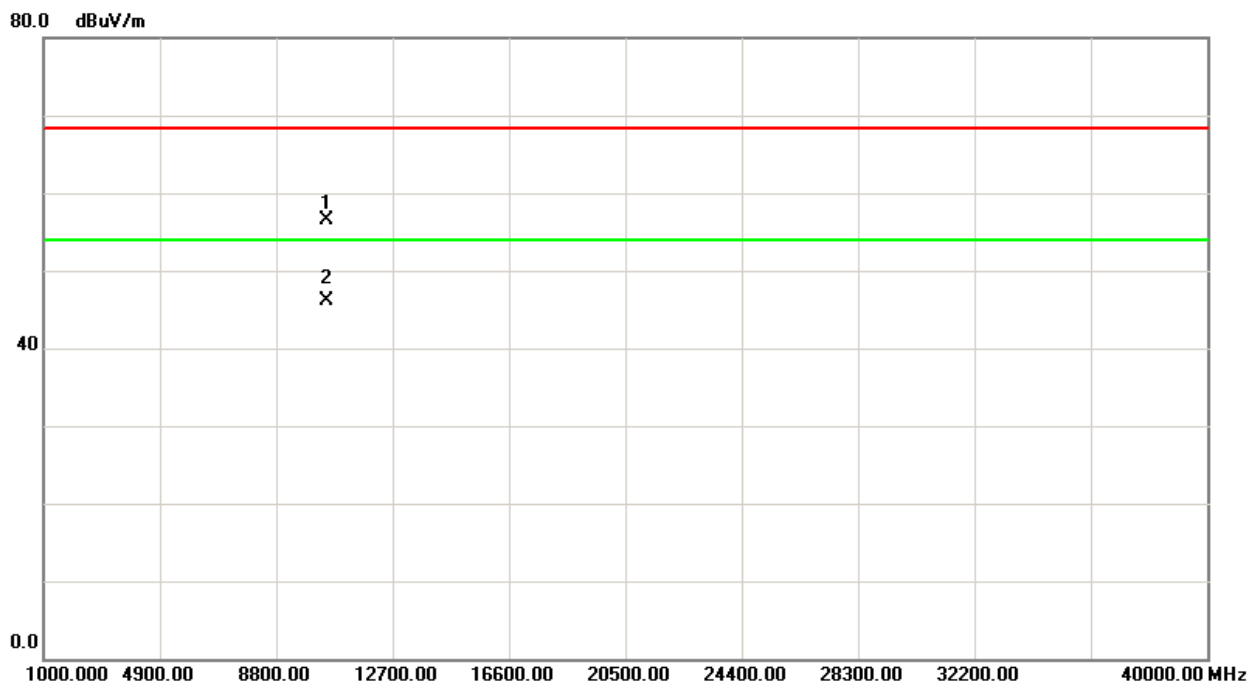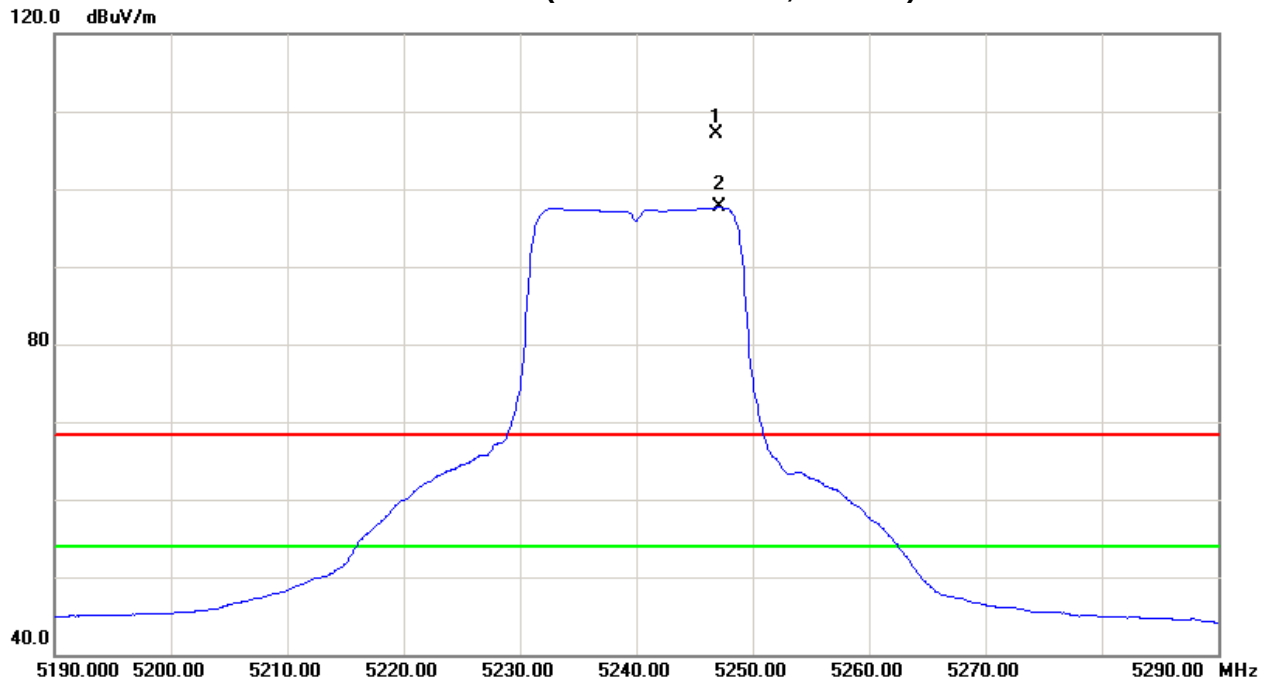



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N20 Mode 5240MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5236.90	H	52.74	44.26	42.93	95.67	87.19	-9.10	-17.58					X/F
10481.58	H	40.25	30.58	15.84	56.09	46.42	-48.68	-58.35	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH48(Above 1000 MHz, Horizontal)

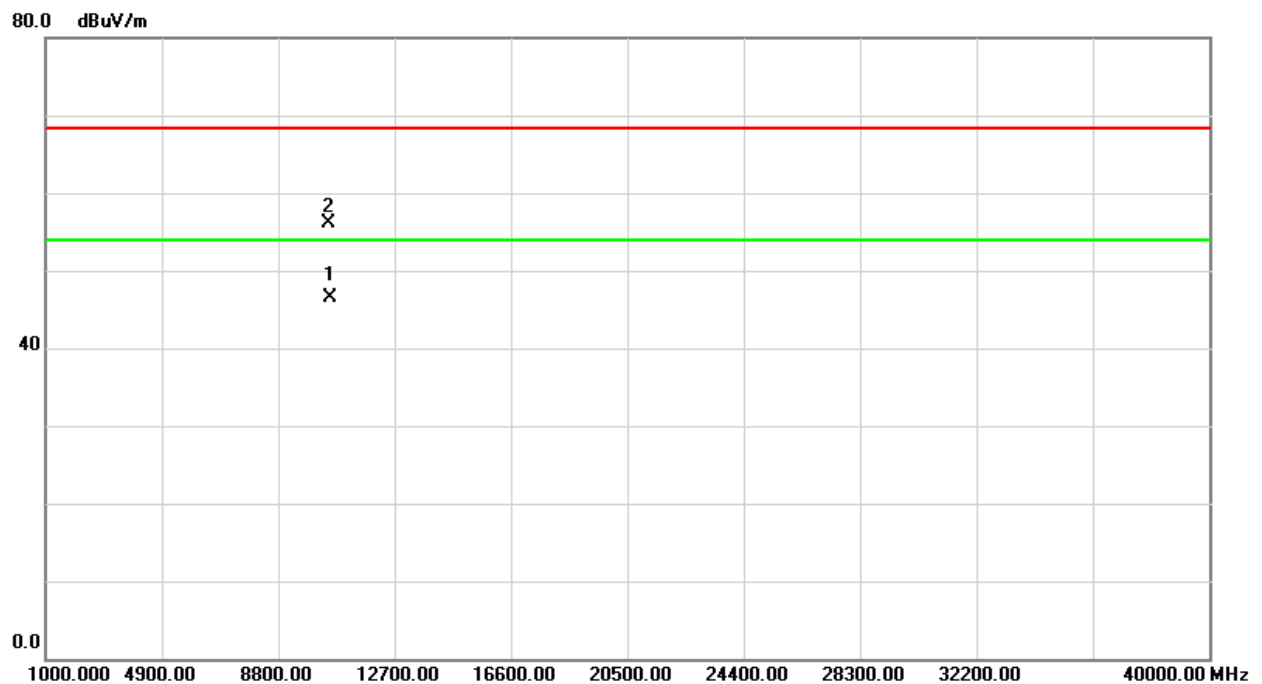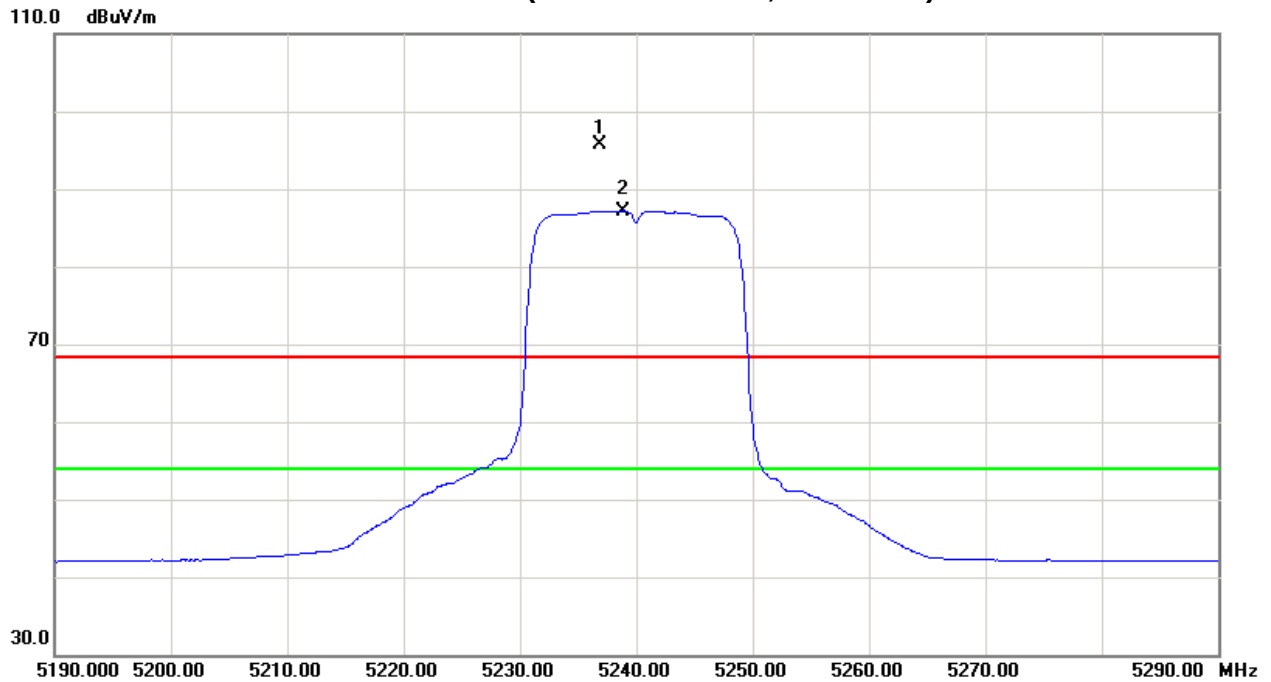



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	V	15.44	5.93	42.72	58.16	48.65	-46.61	-56.12	68.30	54.00	-27.00	-41.30	X/E
5182.60	V	55.07	46.28	42.80	97.87	89.08	-6.90	-15.69					X/F
10371.15	V	37.34	26.57	16.01	53.35	42.58	-51.42	-62.19	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency-“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Vertical)

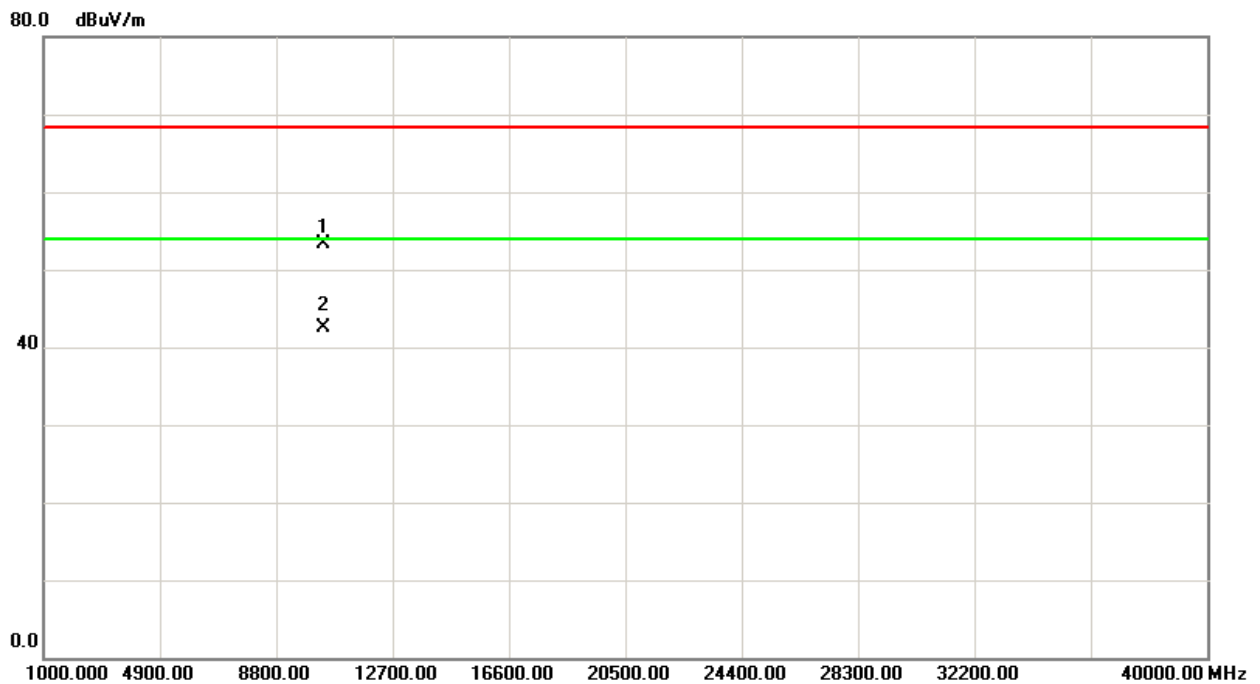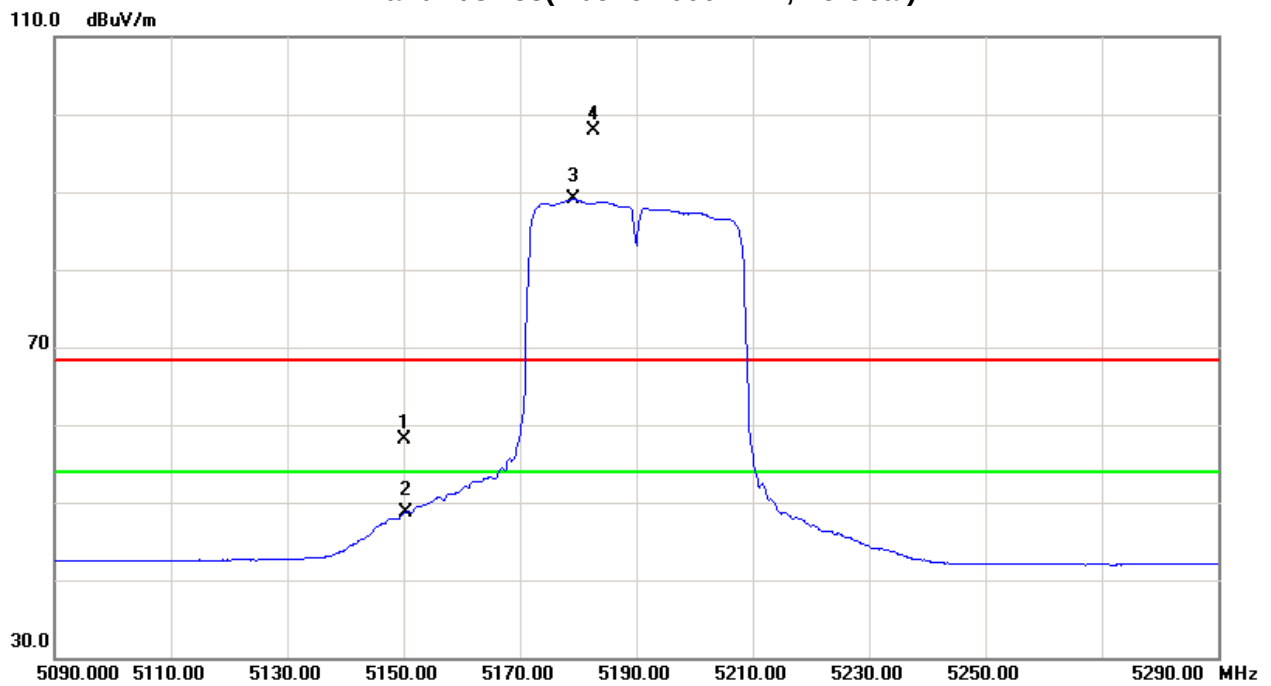



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5190MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5150.00	H	10.55	0.37	42.72	53.27	43.09	-51.50	-61.68	68.30	54.00	-27.00	-41.30	X/E
5191.40	H	46.24	37.40	42.82	89.06	80.22	-15.71	-24.55					X/F
10386.15	H	37.12	26.15	15.98	53.10	42.13	-51.67	-62.64	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH38(Above 1000 MHz, Horizontal)

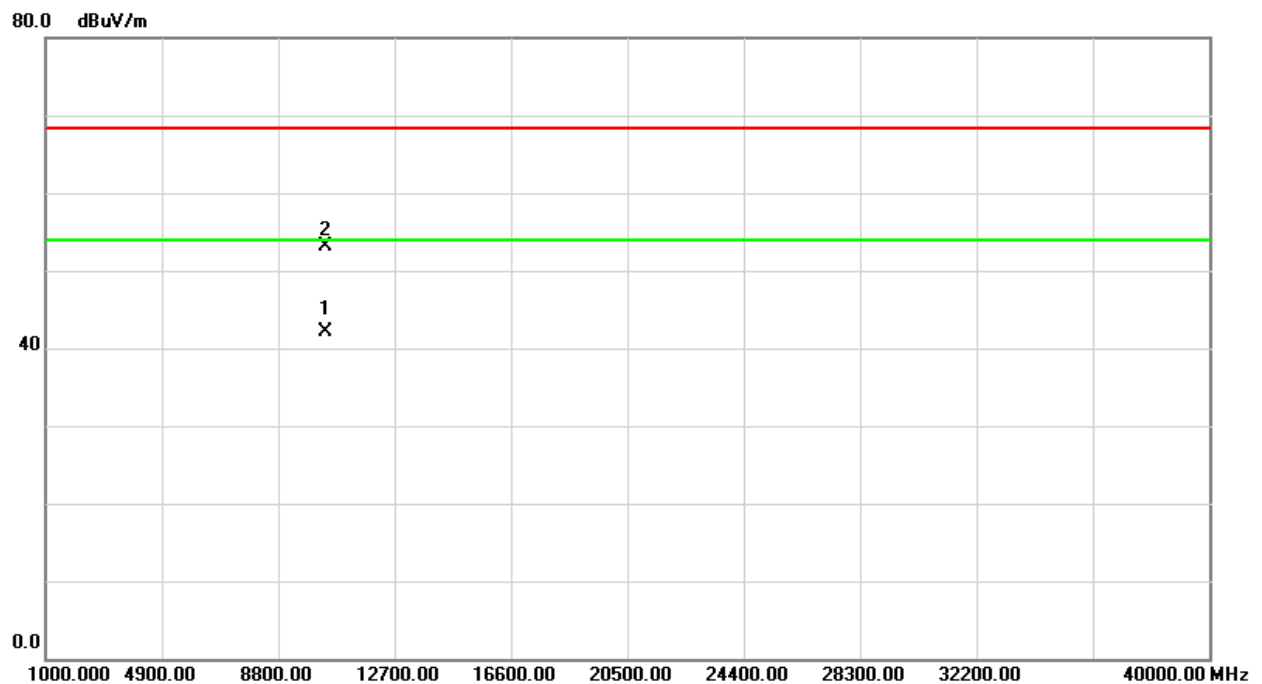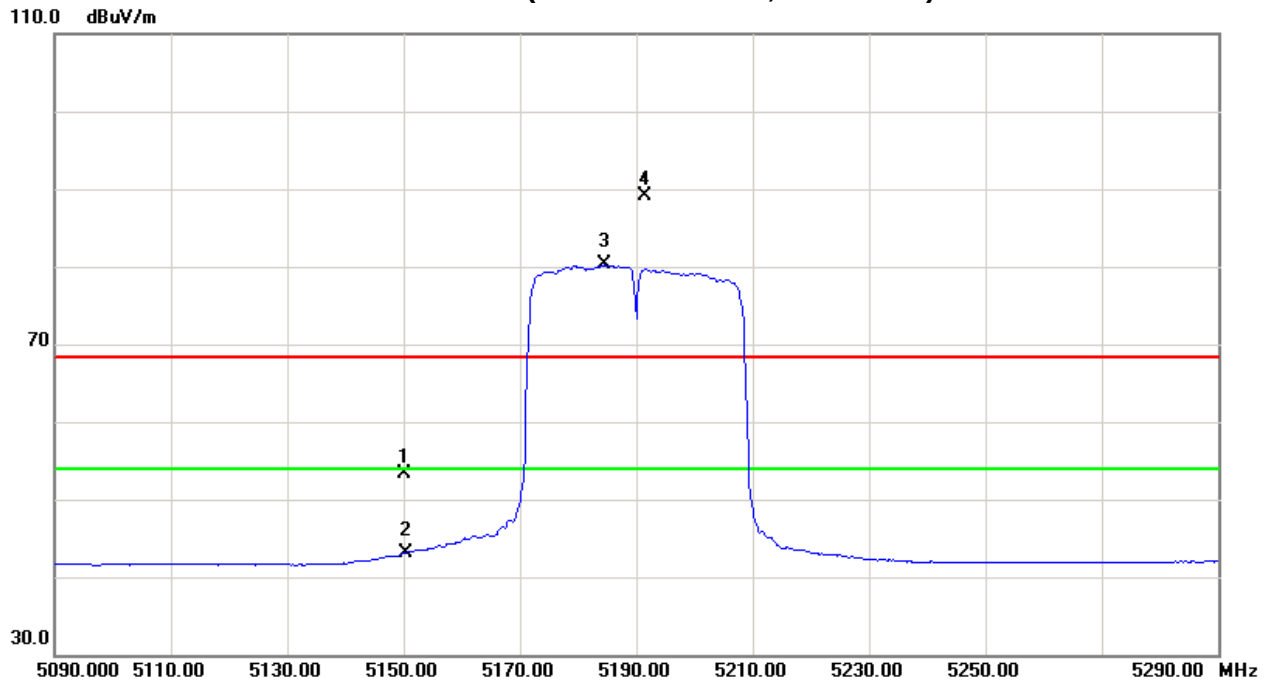




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5230MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5227.00	V	53.14	48.33	42.91	96.05	91.24	-8.72	-13.53					X/F
10455.16	V	37.45	26.46	15.89	53.34	42.35	-51.43	-62.42	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

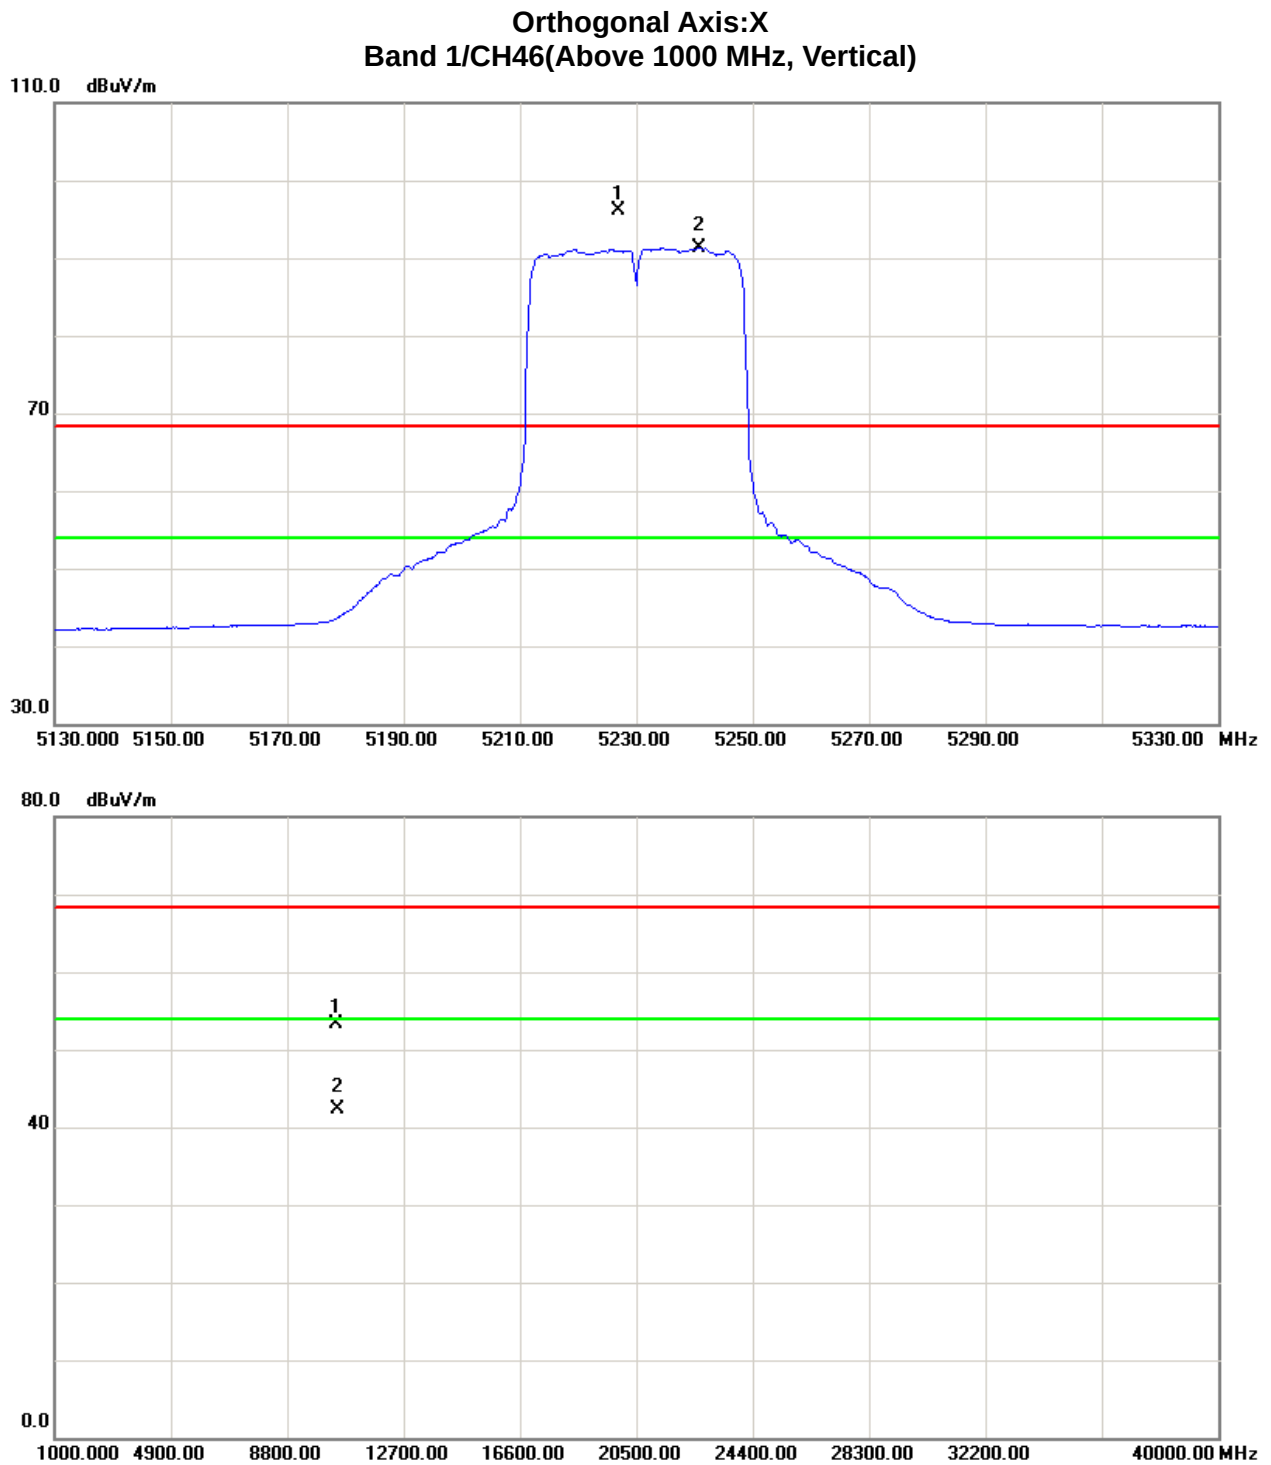



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 1/ TX N40 Mode 5230MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5235.00	H	45.59	36.01	42.93	88.52	78.94	-16.25	-25.83					X/F
10456.05	H	37.34	26.41	15.86	53.20	42.27	-51.57	-62.50	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 1/CH46(Above 1000 MHz, Horizontal)

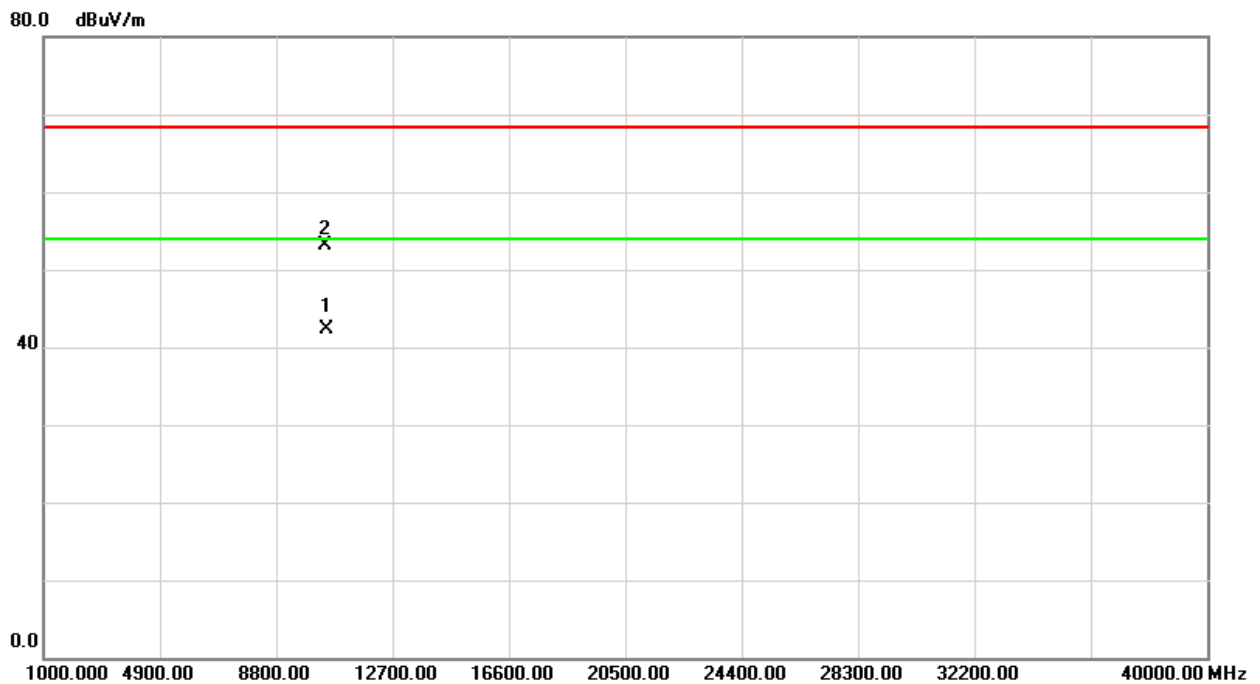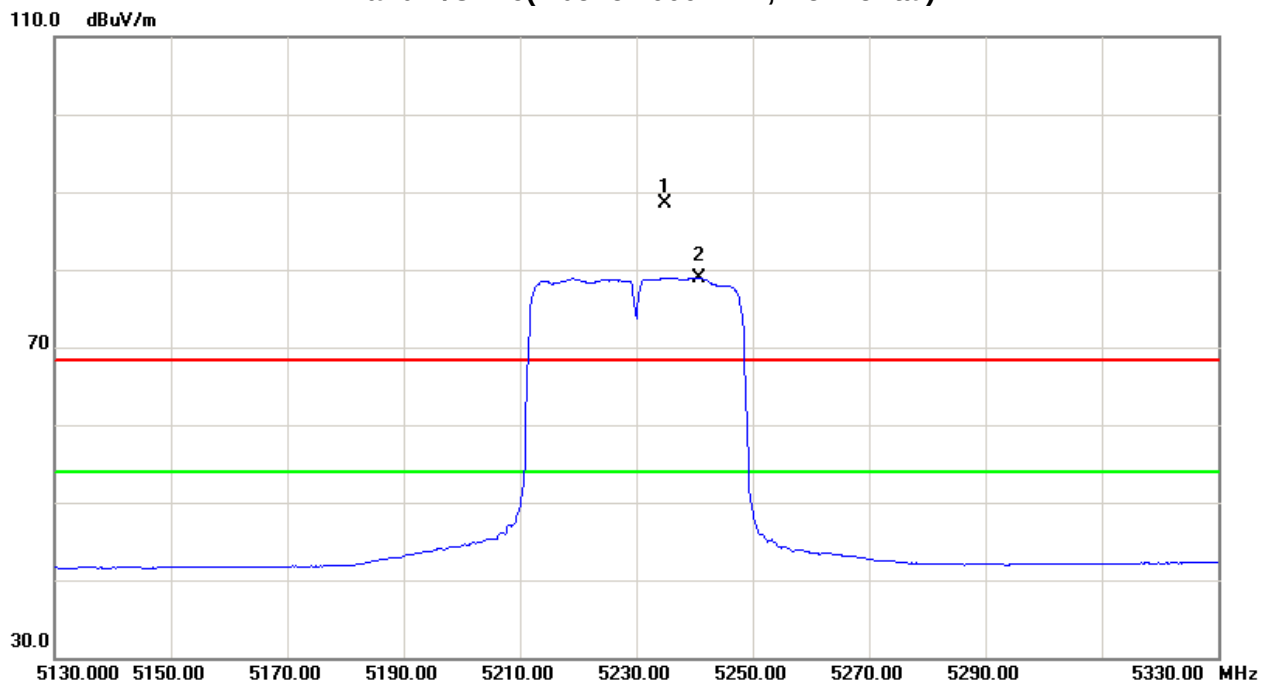



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5260MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5255.40	V	61.11	53.77	42.98	104.09	96.75	-0.68	-8.02					X/F
10524.15	V	41.26	30.17	15.90	57.16	46.07	-47.61	-58.70	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH52(Above 1000 MHz, Vertical)

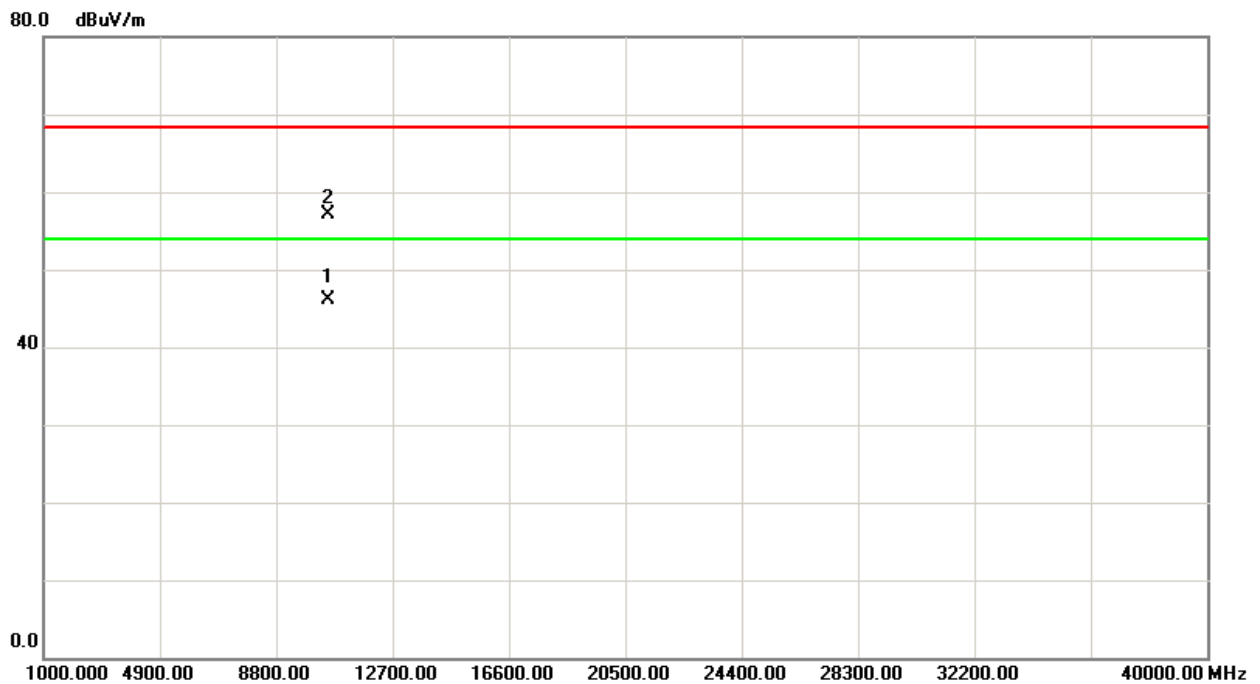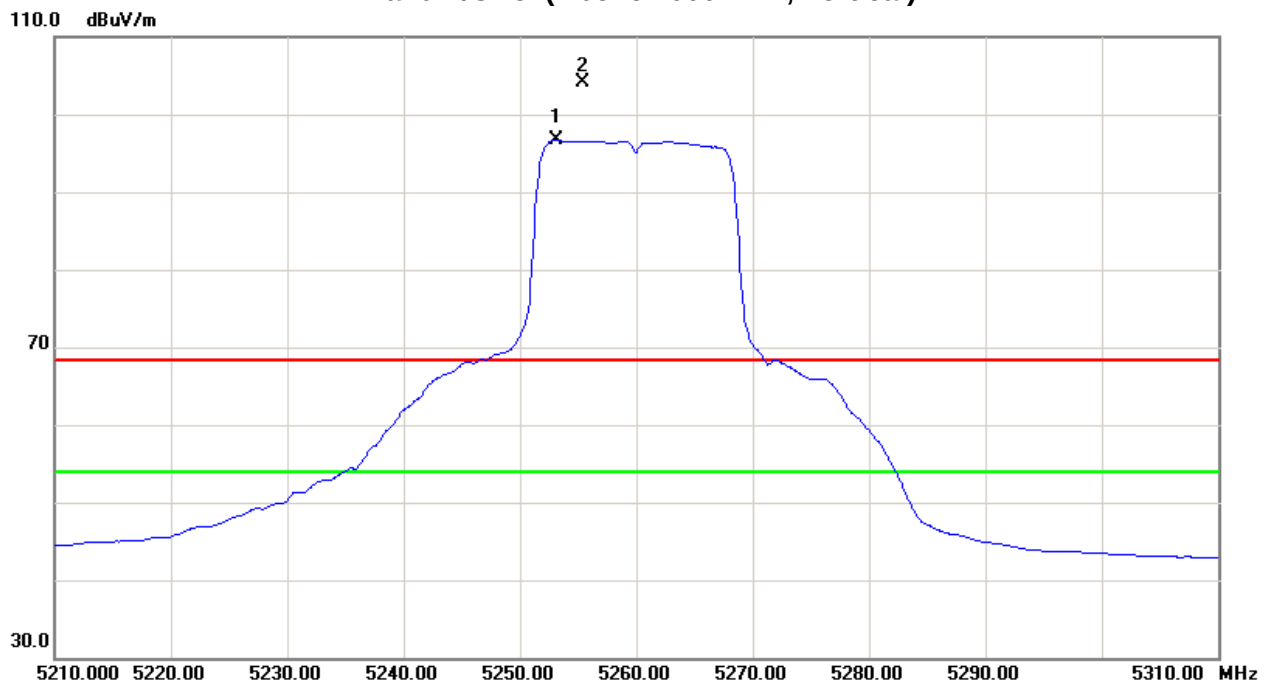



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5260MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBUV/m)		Act.(dBm)		Limit(dBUV/m)		Limit(dBm)		Note
		Peak (dBUV)	AV (dBUV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5262.30	H	55.34	48.61	43.00	98.34	91.61	-6.43	-13.16					X/F
10517.35	H	40.54	29.33	15.87	56.41	45.20	-48.36	-59.57	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH52 (Above 1000 MHz, Horizontal)

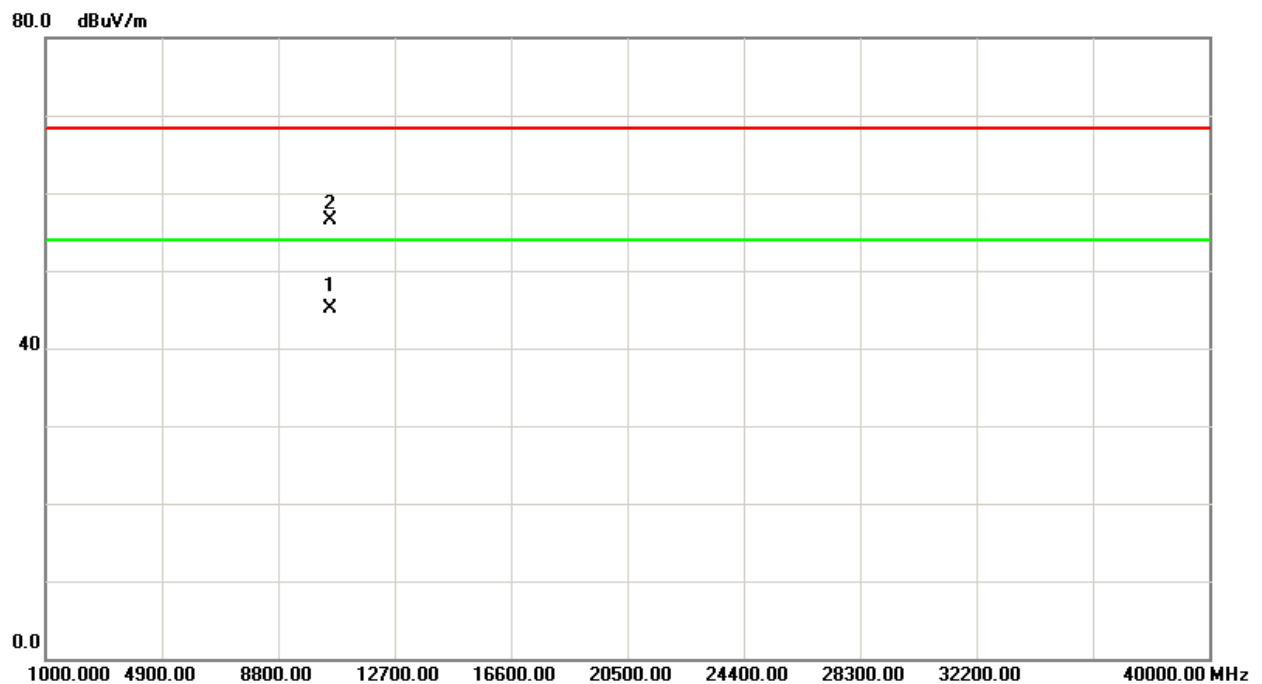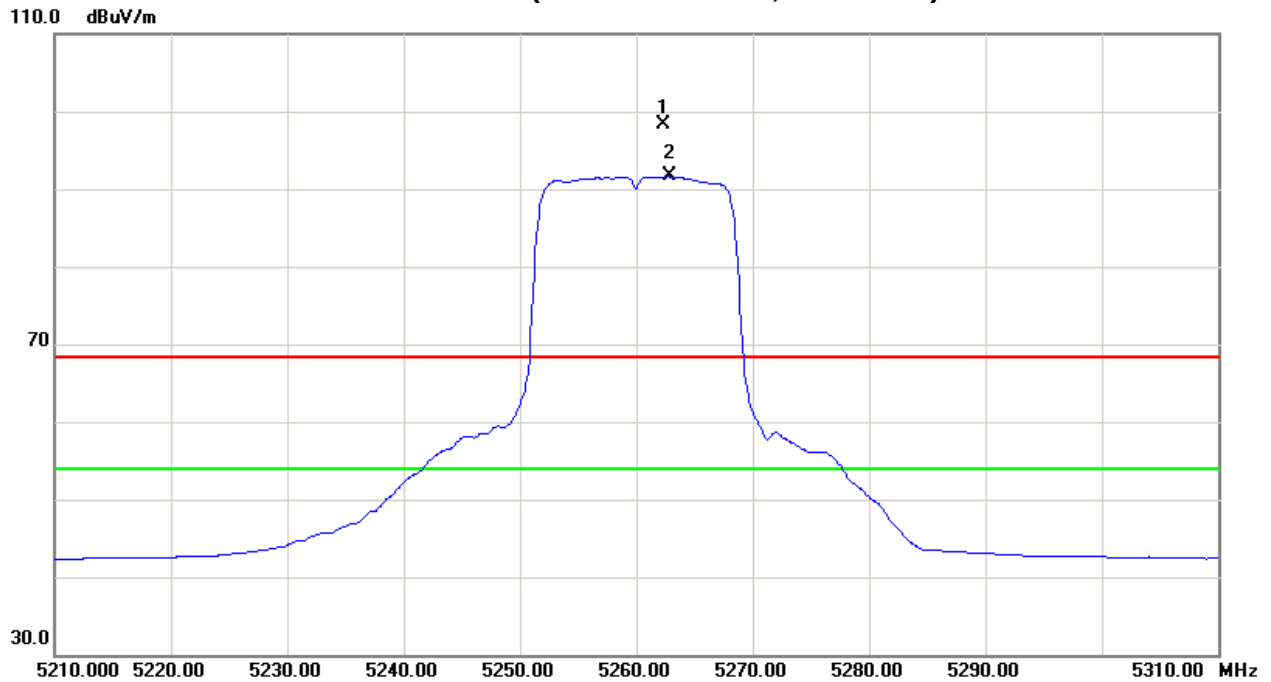




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5280MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5284.10	V	60.33	53.10	43.04	103.37	96.14	-1.40	-8.63					X/F
10557.18	V	41.17	30.11	15.98	57.15	46.09	-47.62	-58.68	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

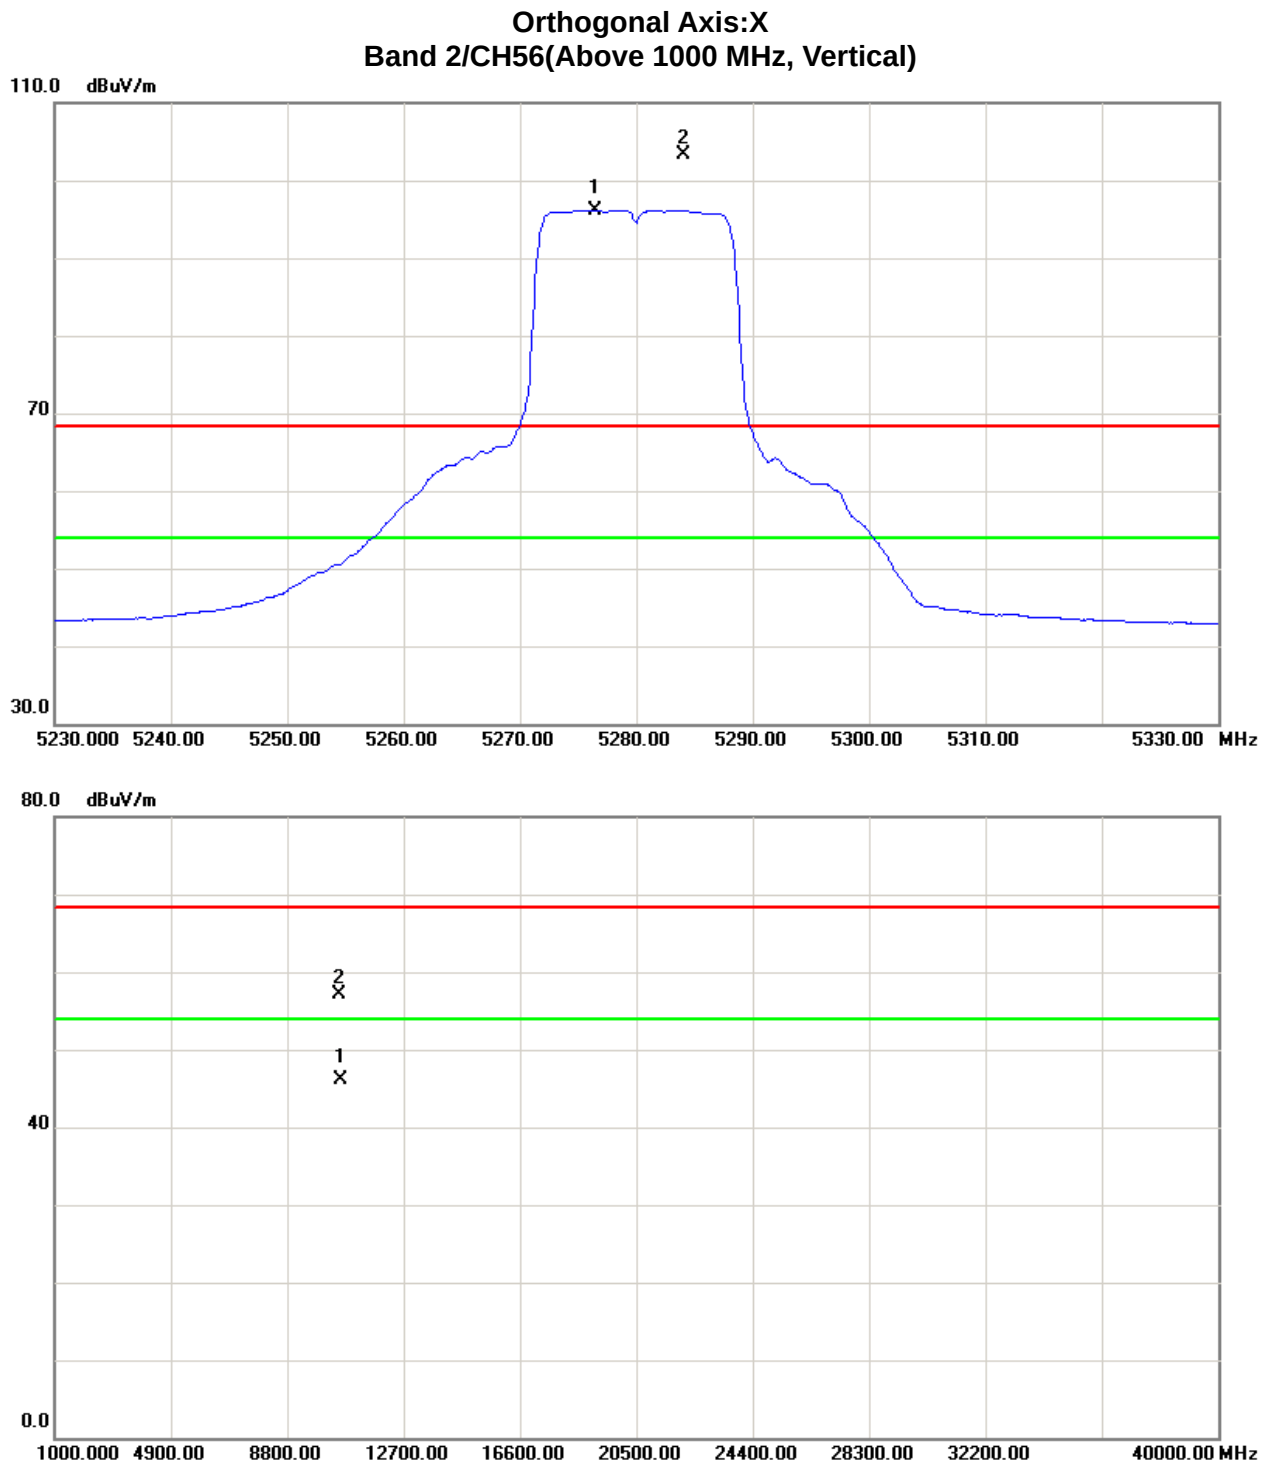



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5280MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5276.70	H	56.07	49.12	43.03	99.10	92.15	-5.67	-12.62					X/F
10556.37	H	40.43	29.41	15.99	56.42	45.40	-48.35	-59.37	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH56(Above 1000 MHz, Horizontal)

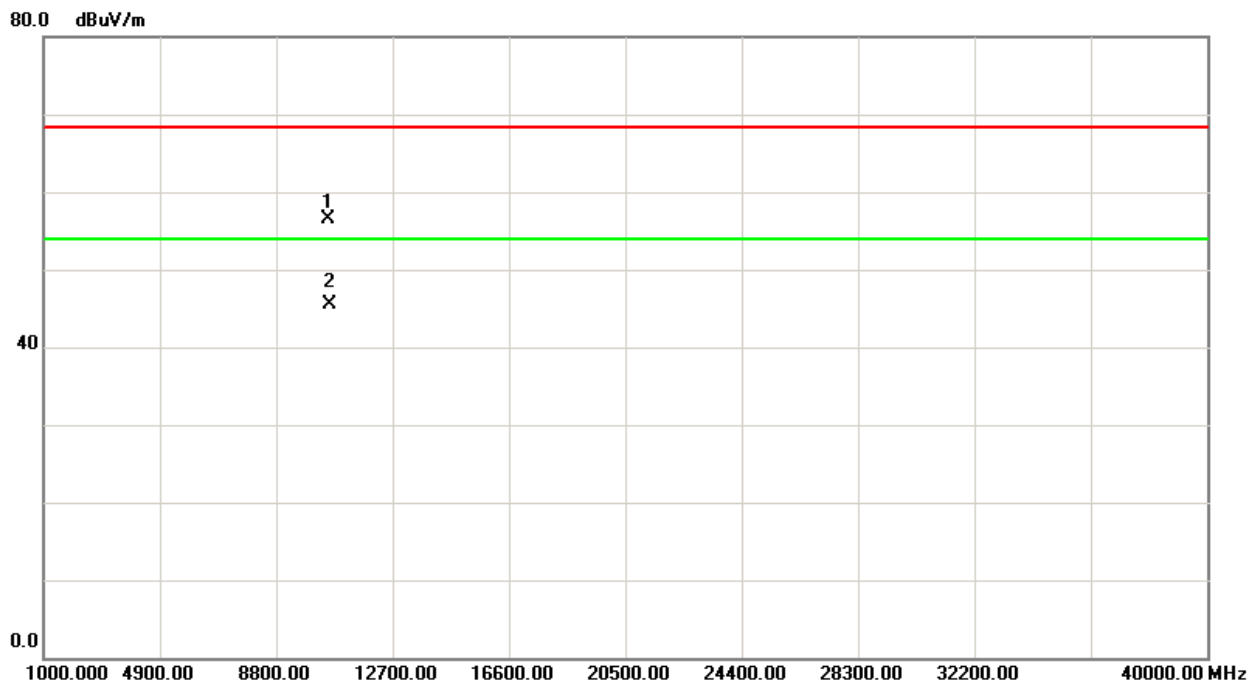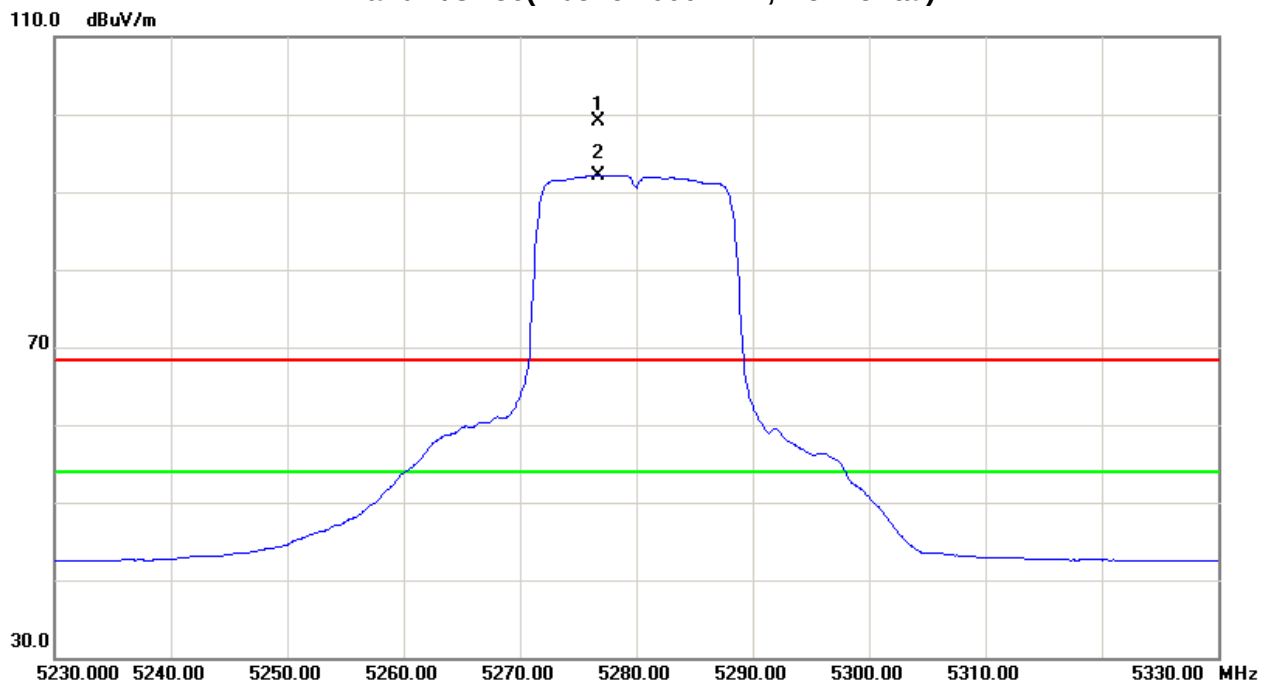



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5320MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5324.00	V	60.19	53.05	43.15	103.34	96.20	-1.43	-8.57					X/F
5350.00	V	10.61	1.58	43.21	53.82	44.79	-50.95	-59.98	68.30	54.00	-27.00	-41.30	X/E
10647.25	V	41.23	30.17	16.24	57.47	46.41	-47.30	-58.36	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency-“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH64(Above 1000 MHz, Vertical)

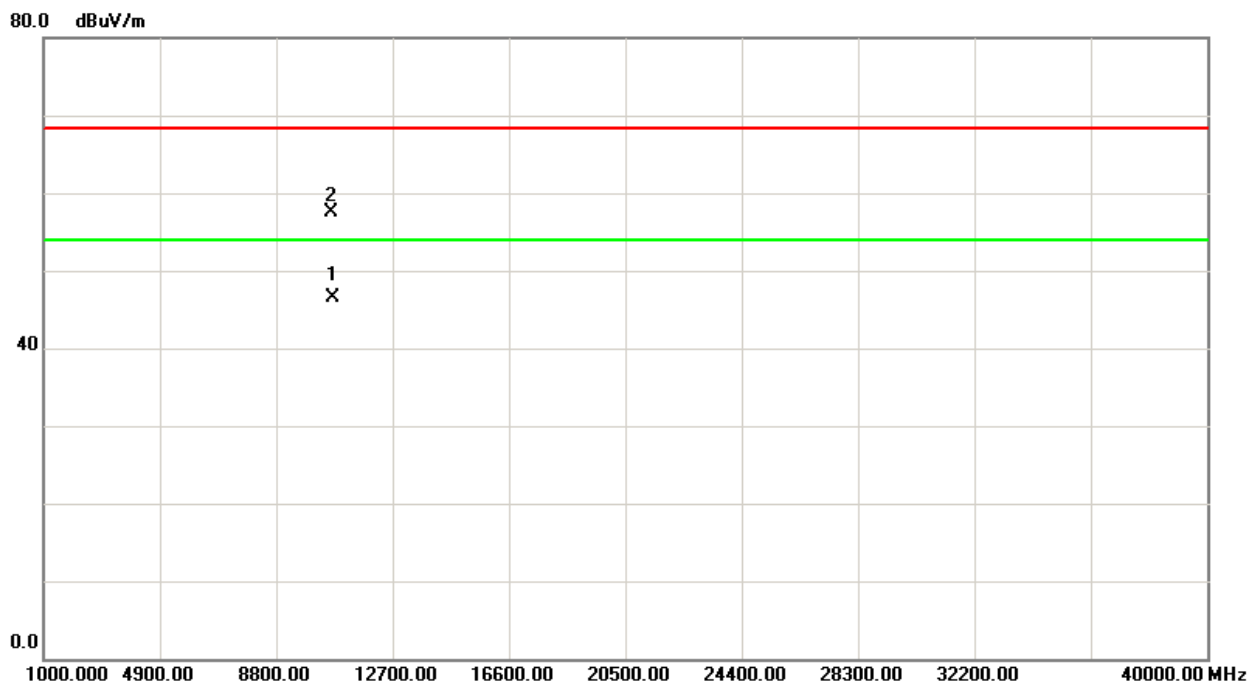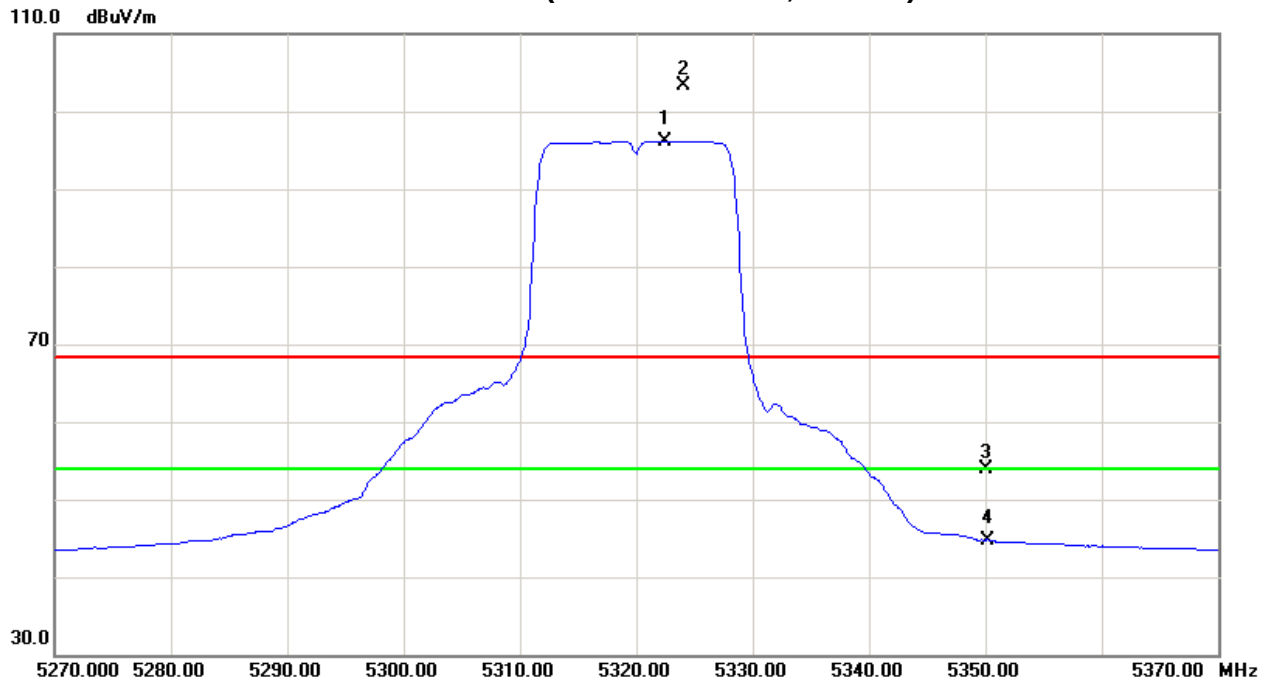



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX A Mode 5320MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5315.60	H	52.73	46.13	43.12	95.85	89.25	-8.92	-15.52					X/F
5350.00	H	8.53	-0.57	43.21	51.74	42.64	-53.03	-62.13	68.30	54.00	-27.00	-41.30	X/E
10646.33	H	40.13	29.27	16.24	56.37	45.51	-48.40	-59.26	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH64(Above 1000 MHz, Horizontal)

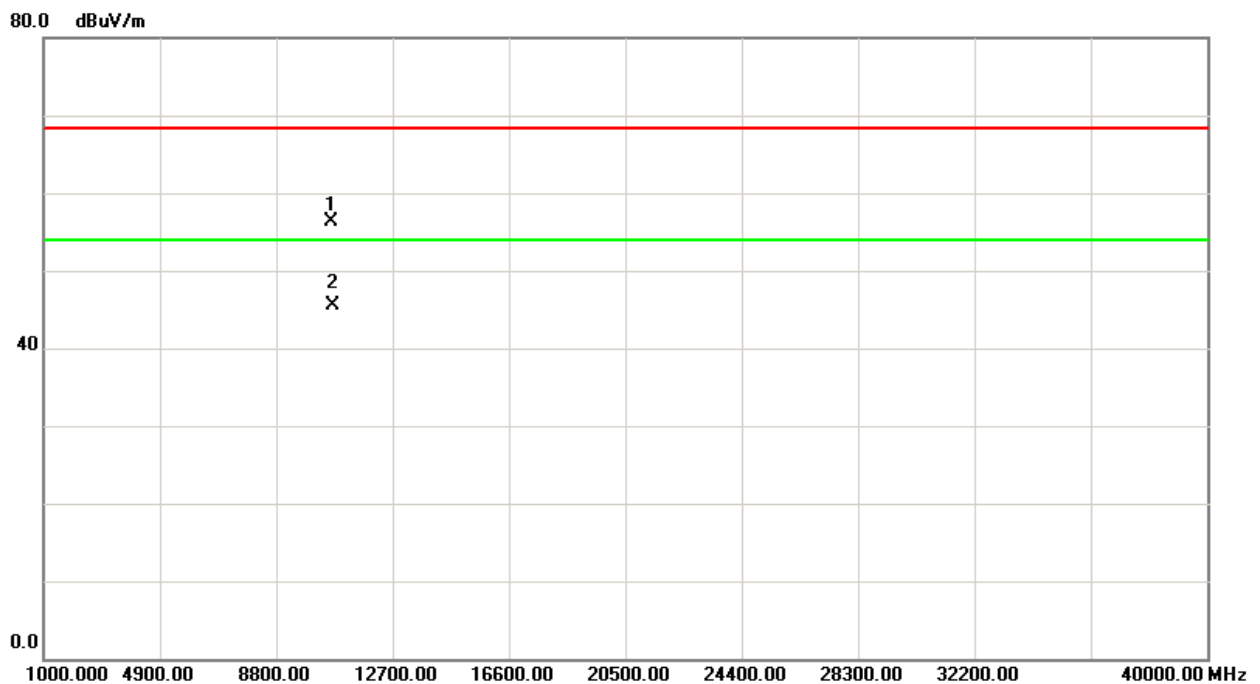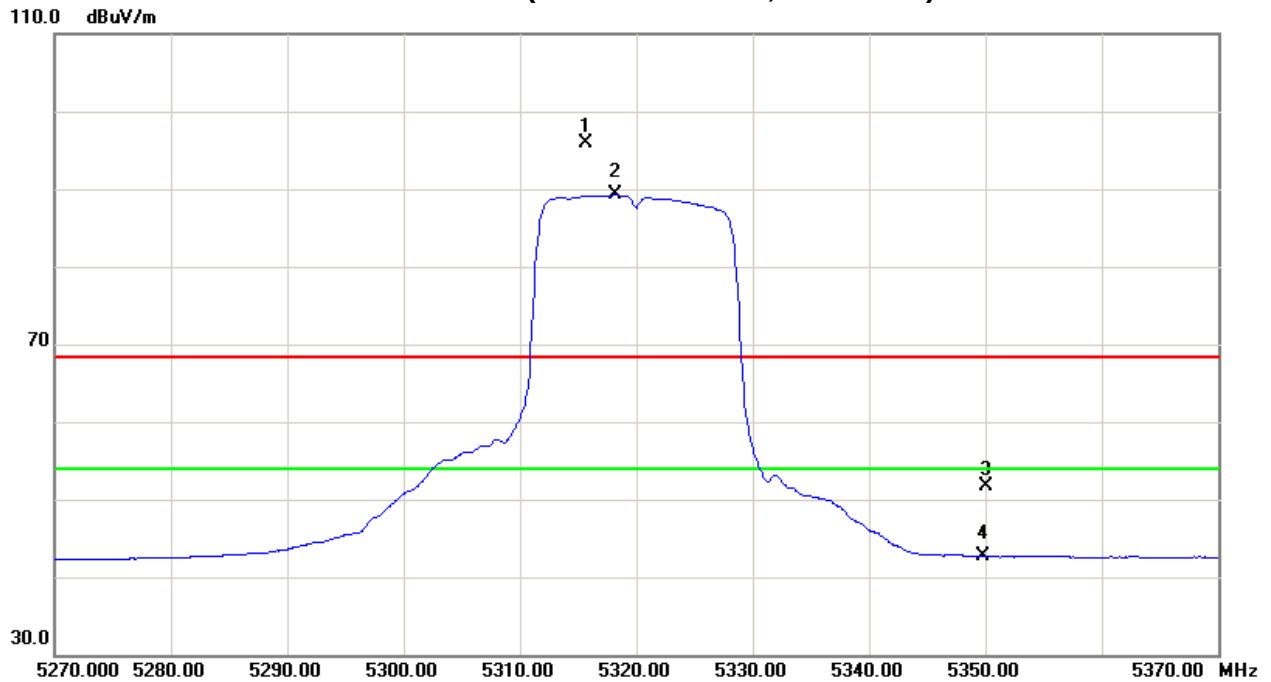




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5260MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5253.30	V	61.94	53.01	42.98	104.92	95.99	0.15	-8.78					X/F
10523.37	V	40.22	29.34	15.90	56.12	45.24	-48.65	-59.53	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency-“F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

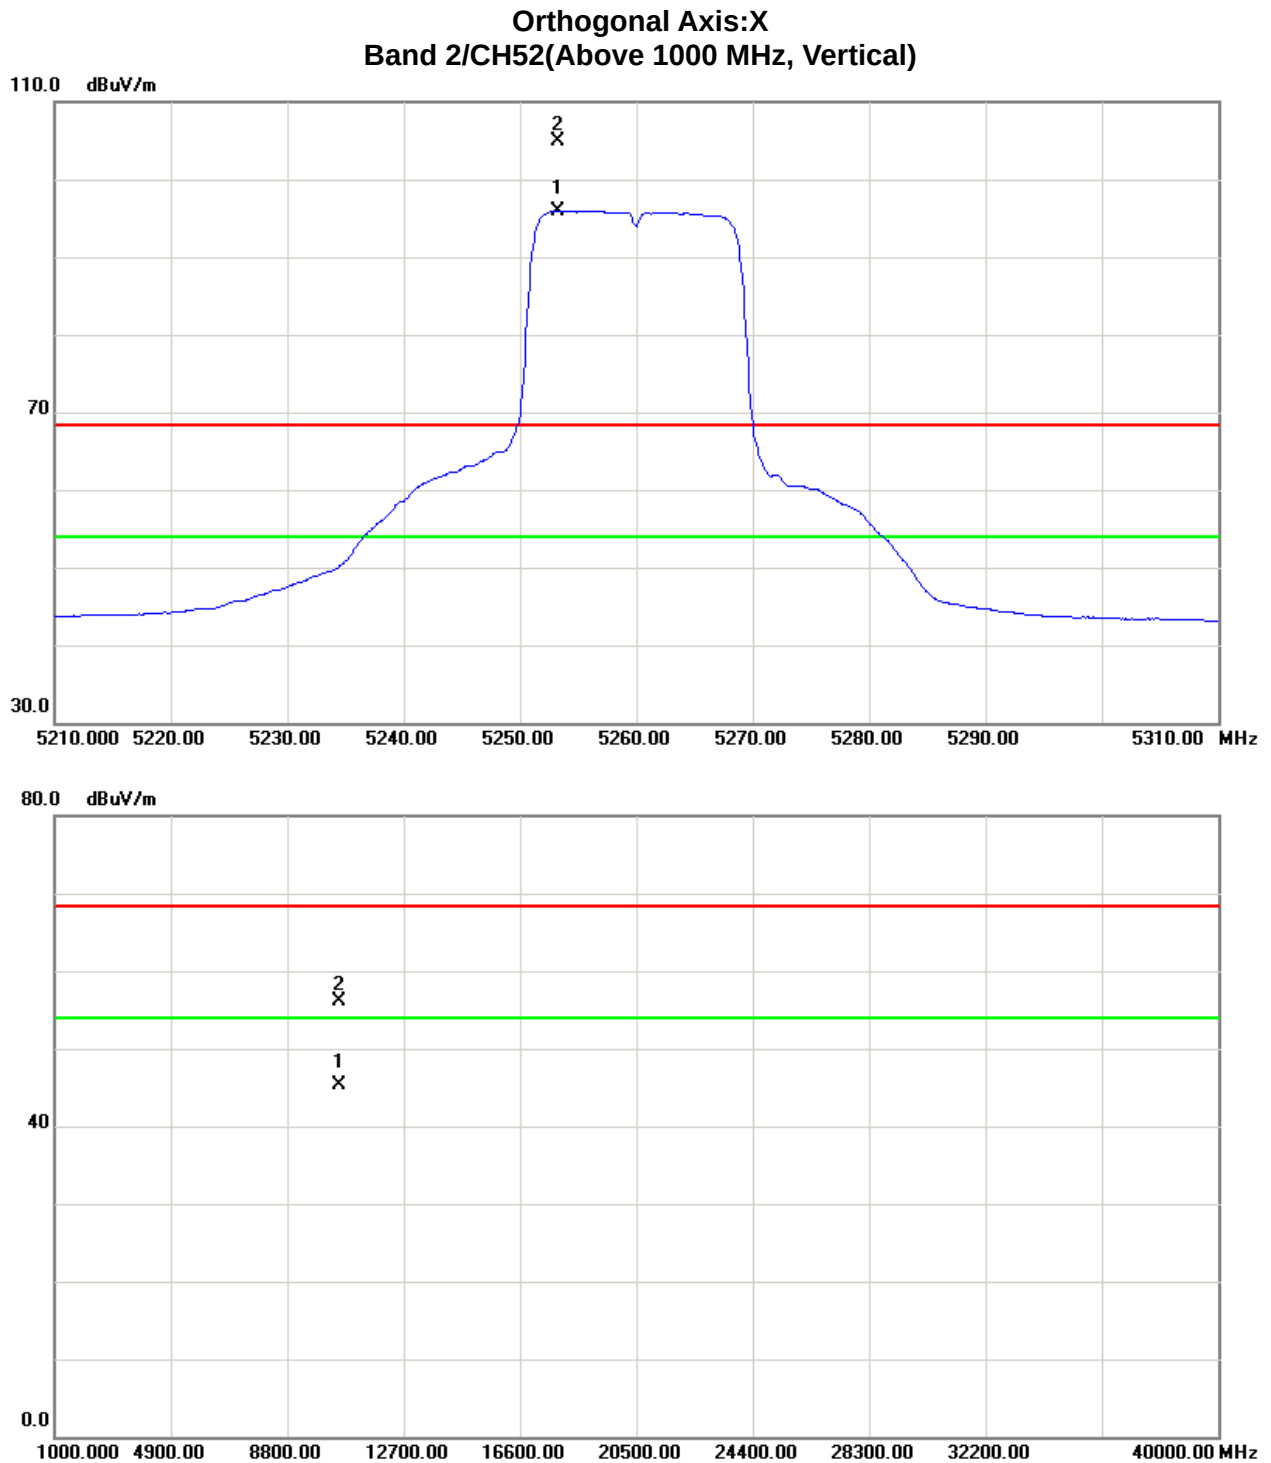



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5260MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5258.30	H	55.39	6.05	42.98	98.37	49.03	-6.40	-55.74					X/F
10516.73	H	39.58	28.65	15.87	55.45	44.52	-49.32	-60.25	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH52(Above 1000 MHz, Horizontal)

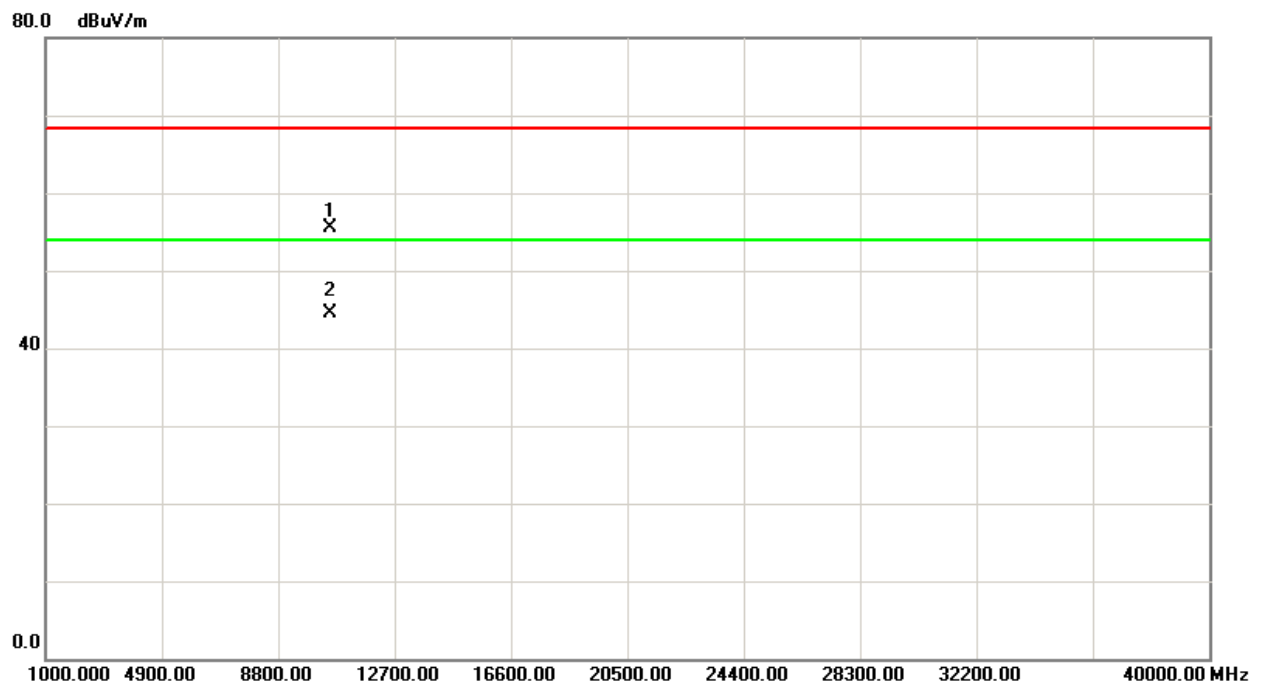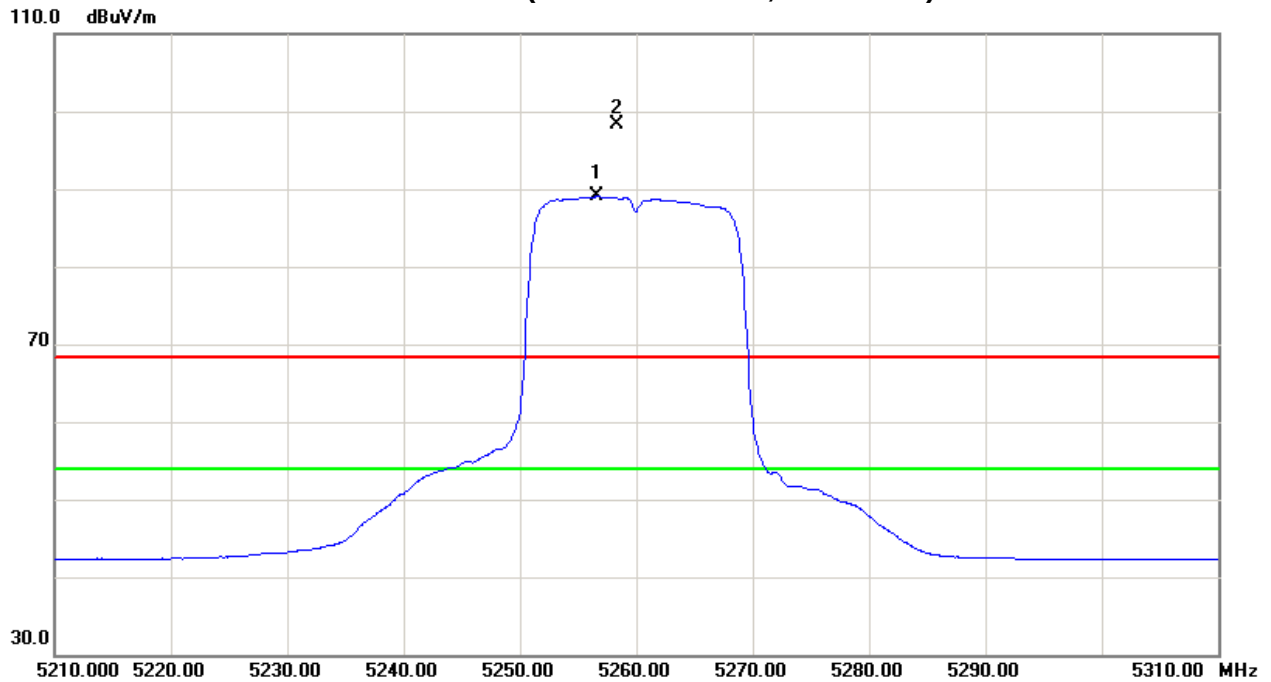




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5280MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5281.20	V	61.05	52.06	43.04	104.09	95.10	-0.68	-9.67					X/F
10557.26	V	40.01	29.13	15.98	55.99	45.11	-48.78	-59.66	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

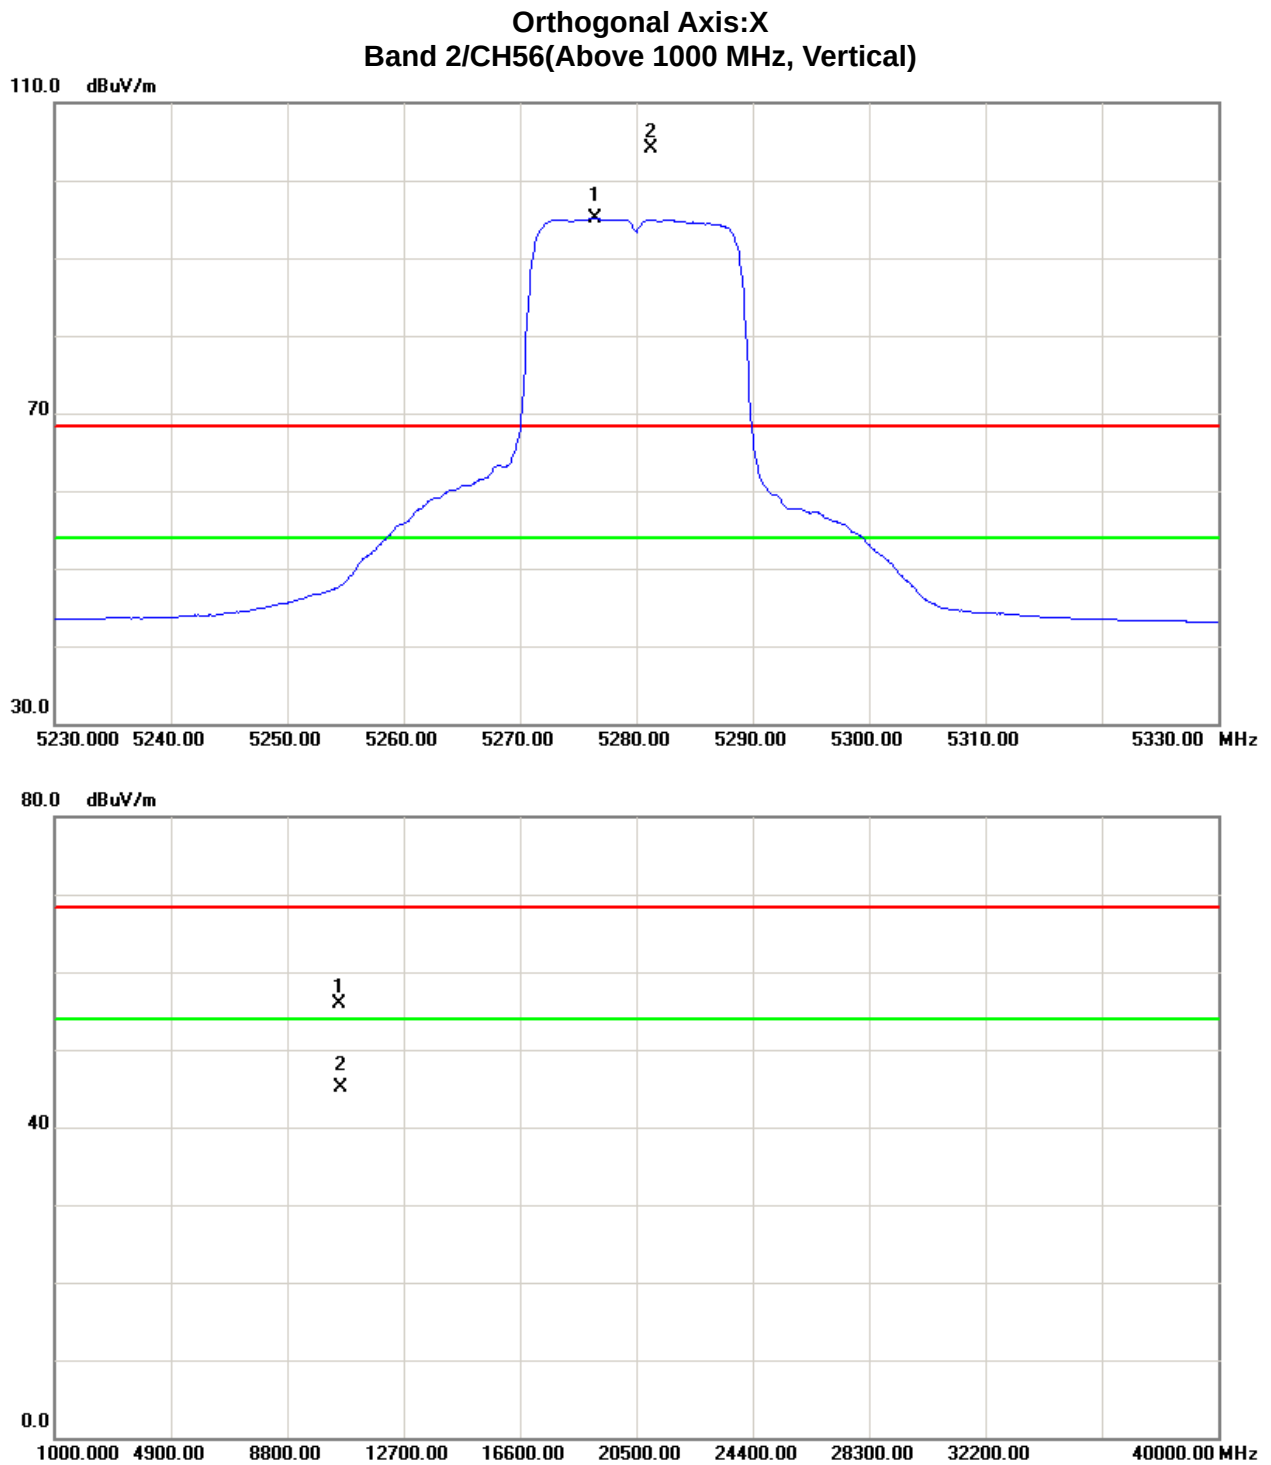



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5280MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5281.30	H	54.05	44.78	43.04	97.09	87.82	-7.68	-16.95					X/F
10554.63	H	38.86	28.47	15.98	54.84	44.45	-49.93	-60.32	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH56(Above 1000 MHz, Horizontal)

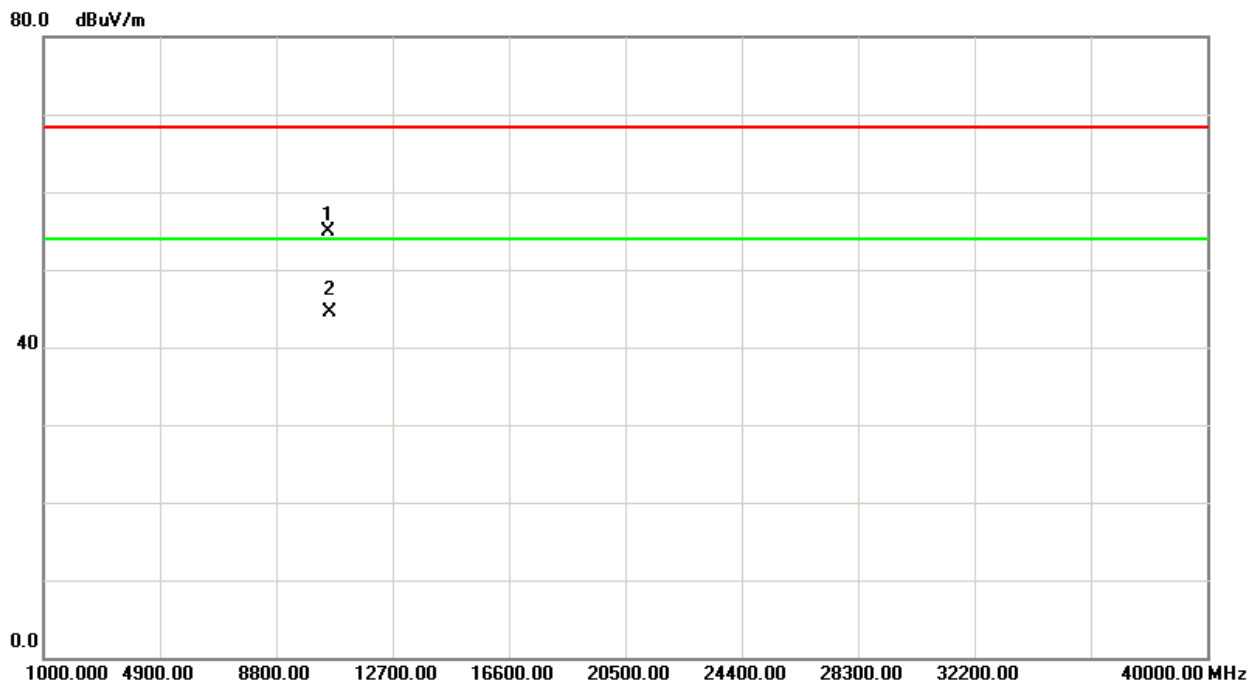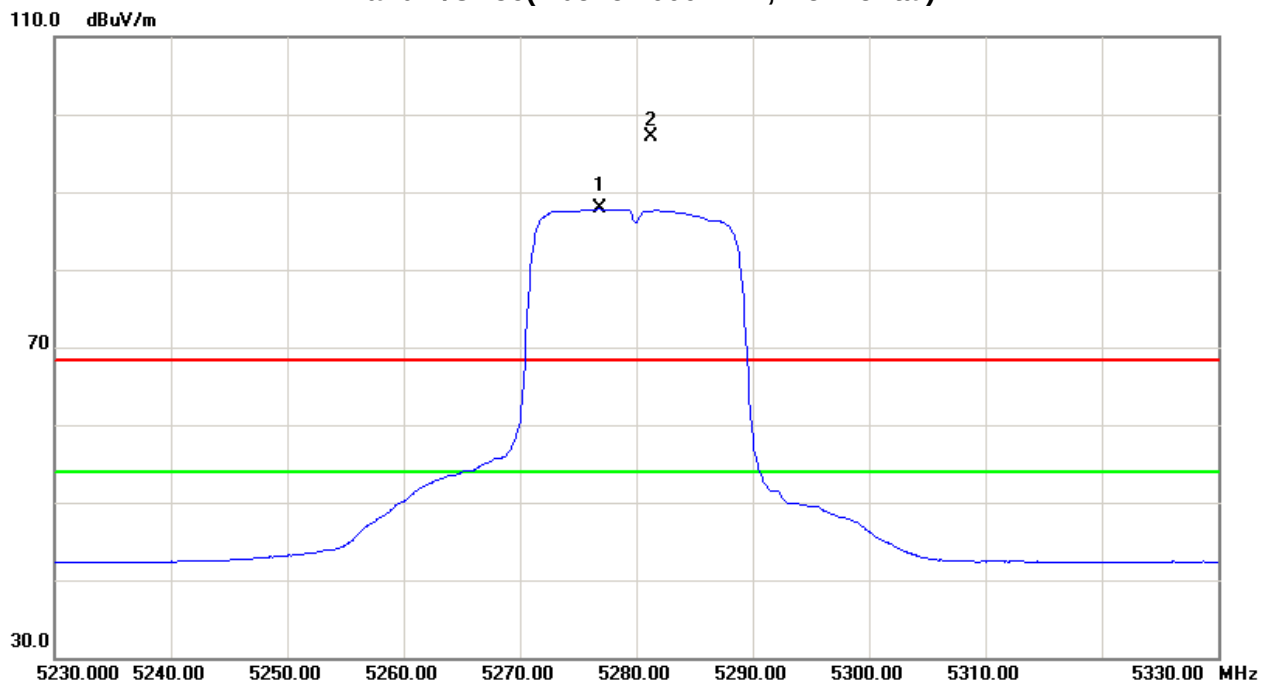




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5320MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5318.20	V	60.62	51.46	43.13	103.75	94.59	-1.02	-10.18					X/F
5350.00	V	9.78	0.97	43.21	52.99	44.18	-51.78	-60.59	68.30	54.00	-27.00	-41.30	X/E
10645.38	V	39.87	29.86	16.24	56.11	46.10	-48.66	-58.67	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

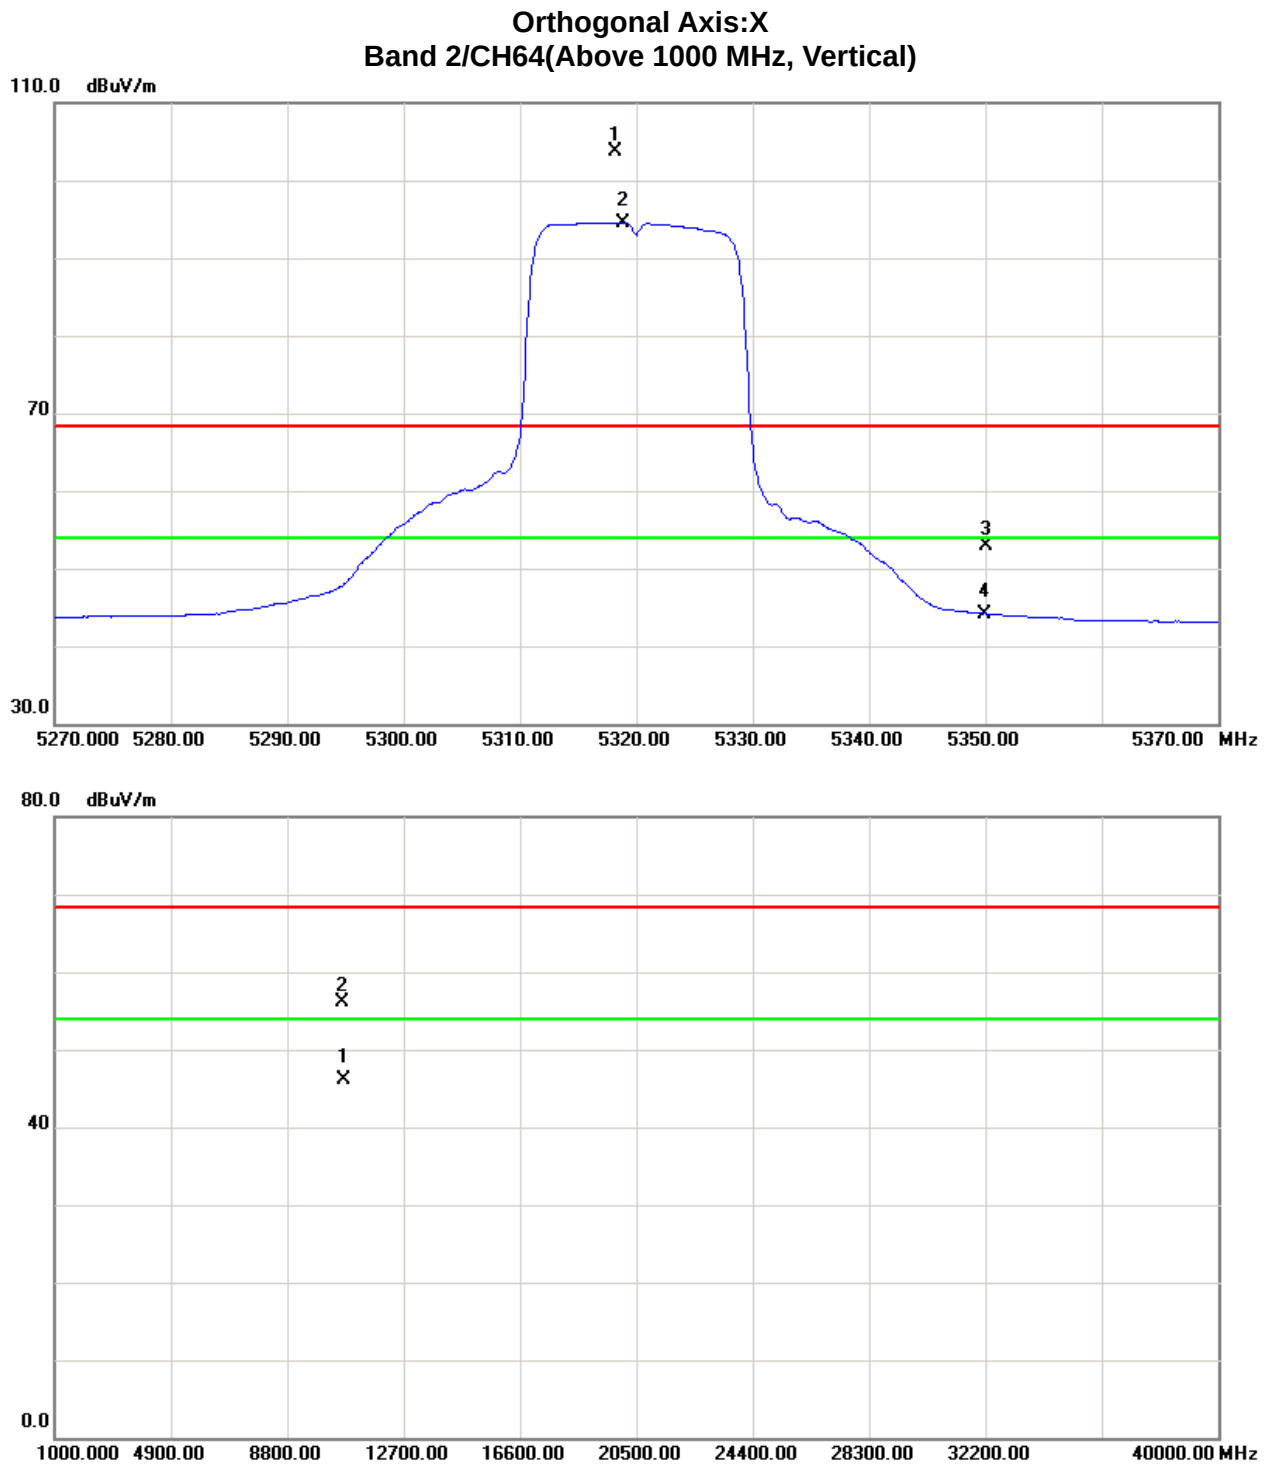



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N20 Mode 5320MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5315.80	H	54.22	45.34	43.13	97.35	88.47	-7.42	-16.30					X/F
5350.00	H	8.30	-0.14	43.21	51.51	43.07	-53.26	-61.70	68.30	54.00	-27.00	-41.30	X/E
10635.66	H	38.84	28.43	16.22	55.06	44.65	-49.71	-60.12	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH64(Above 1000 MHz, Horizontal)

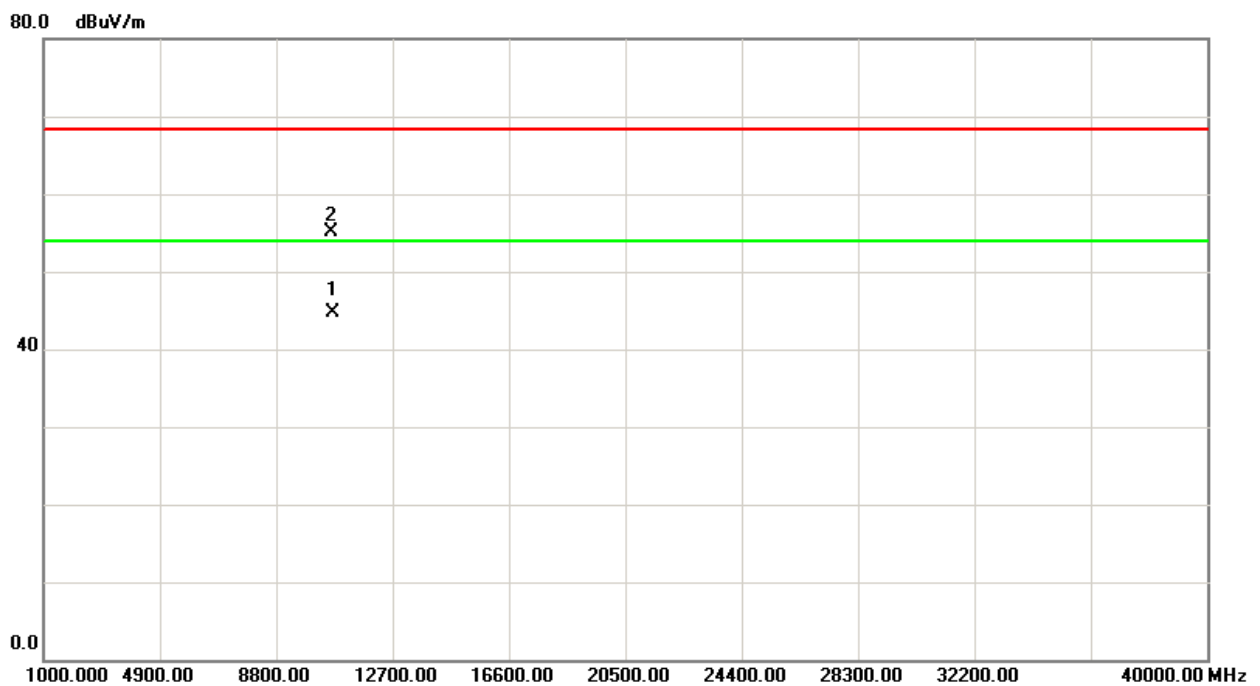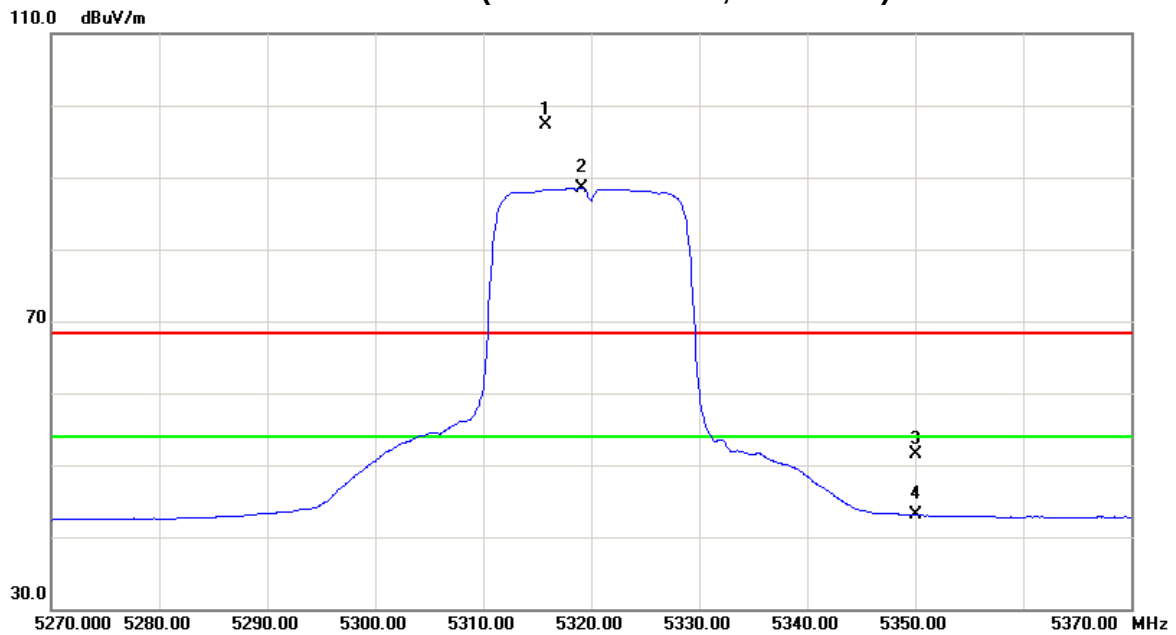




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N40 Mode 5270MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5263.60	V	52.39	43.67	43.00	95.39	86.67	-9.38	-18.10					X/F
10531.63	V	36.91	26.11	15.91	52.82	42.02	-51.95	-62.75	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

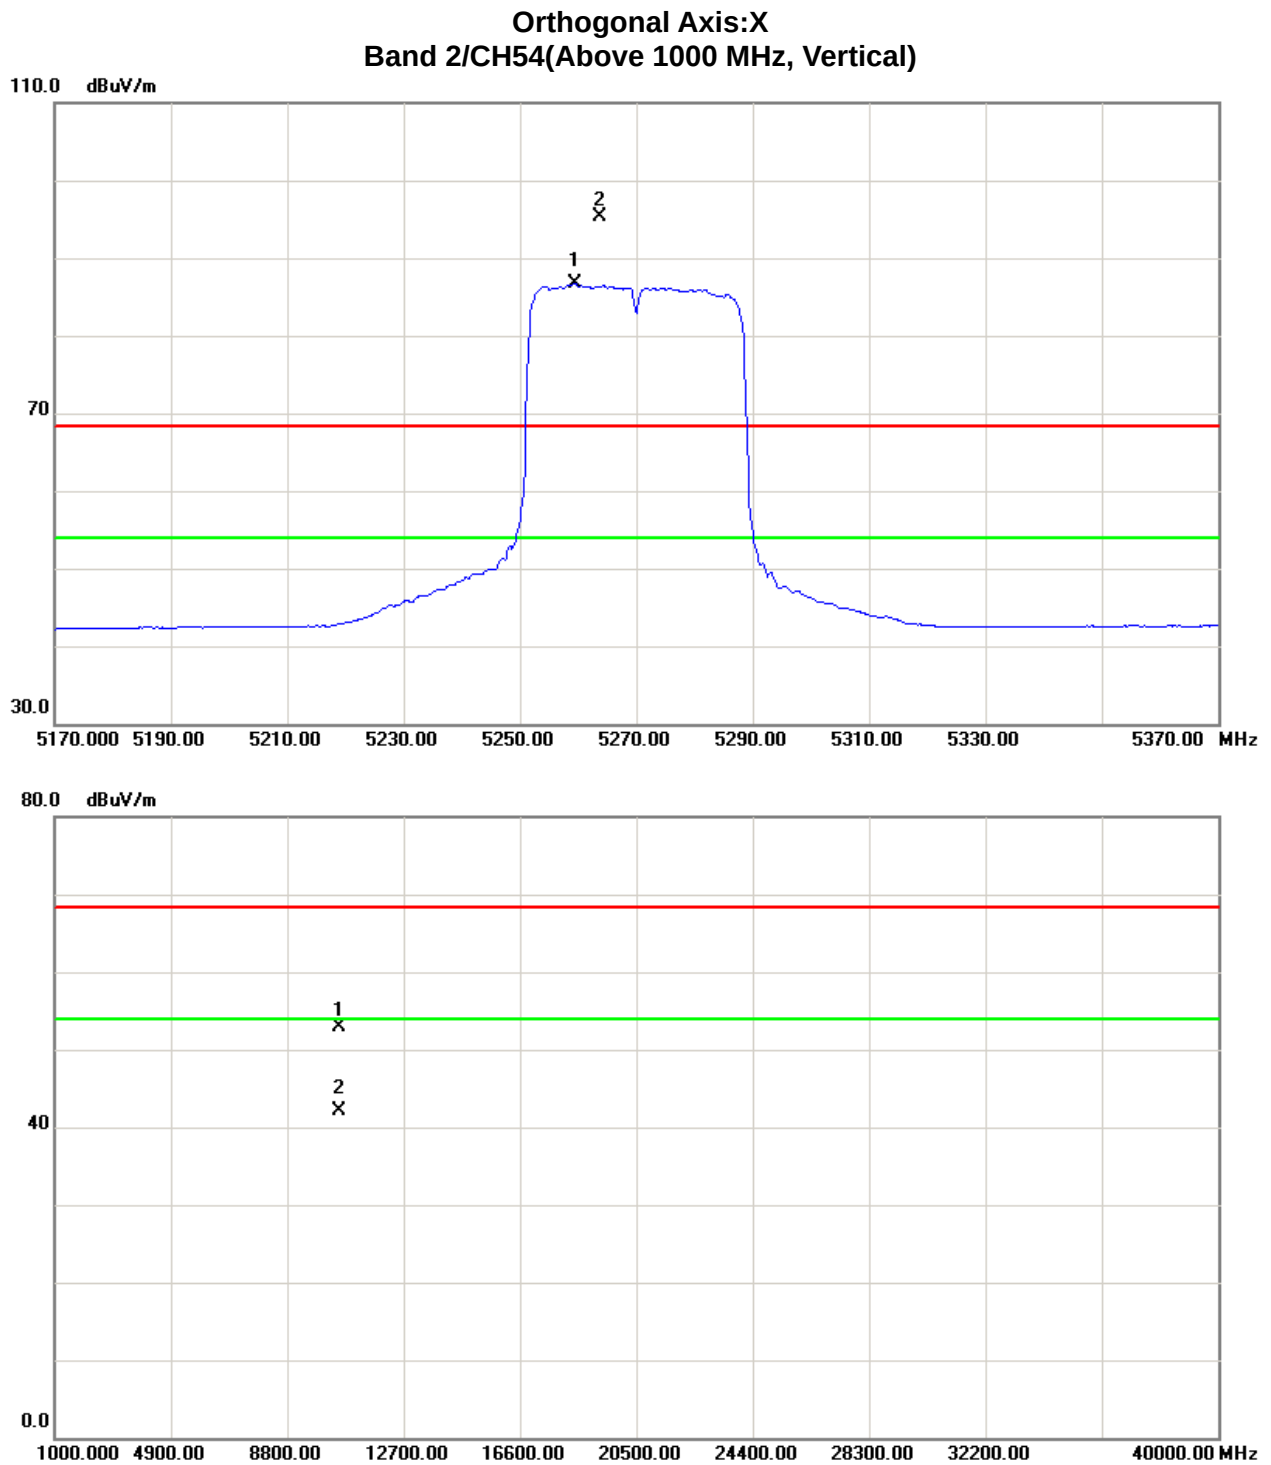



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N40 Mode 5270MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5268.80	H	46.09	37.36	43.01	89.10	80.37	-15.67	-24.40					X/F
10531.63	H	35.58	25.56	15.91	51.49	41.47	-53.28	-63.30	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH54(Above 1000 MHz, Horizontal)

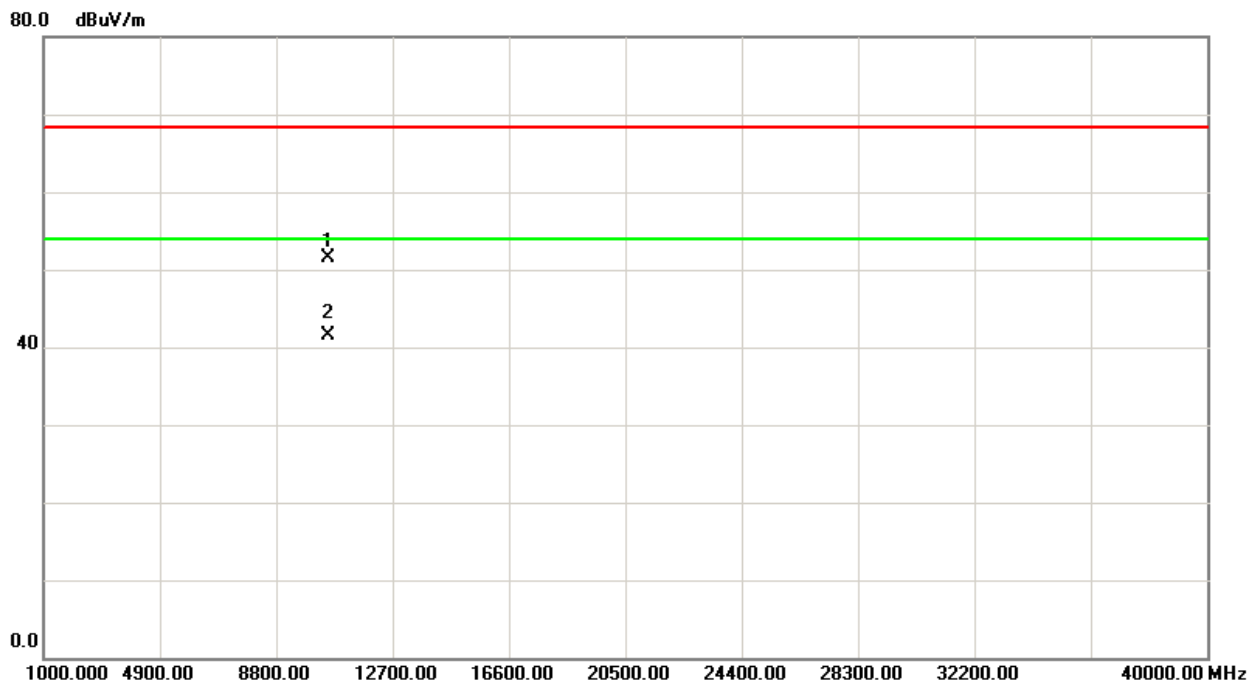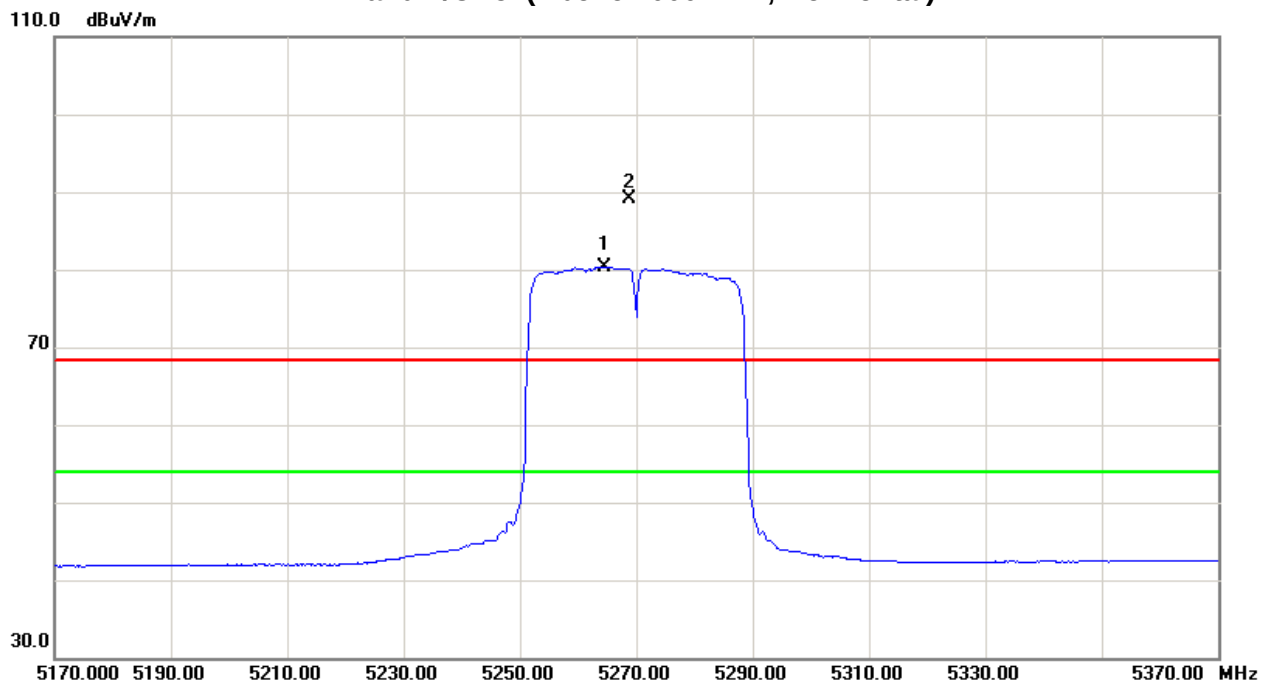



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N40 Mode 5310MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5306.60	V	53.43	44.21	43.10	96.53	87.31	-8.24	-17.46					X/F
5350.00	V	11.82	1.87	43.21	55.03	45.08	-49.74	-59.69	68.30	54.00	-27.00	-41.30	X/E
10610.66	V	36.52	26.05	16.14	52.66	42.19	-52.11	-62.58	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 2/CH62(Above 1000 MHz, Vertical)

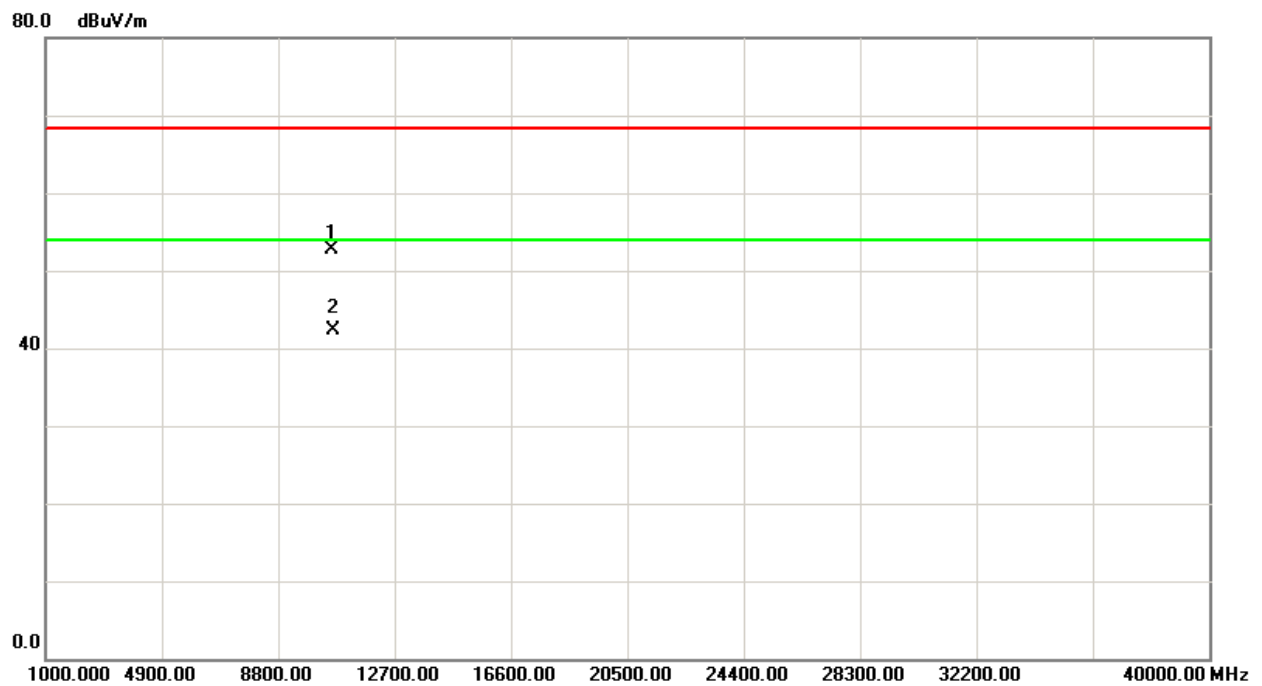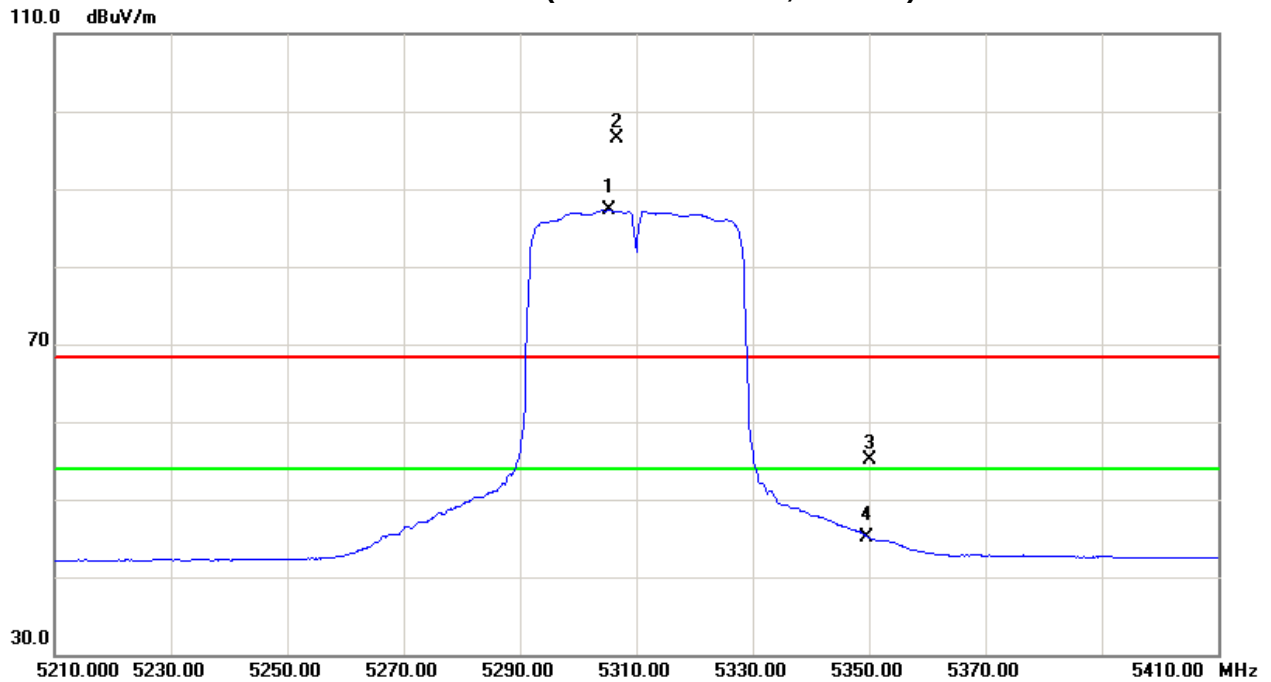




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 2/ TX N40 Mode 5310MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5301.40	H	47.25	38.43	43.09	90.34	81.52	-14.43	-23.25					X/F
5350.00	H	7.92	-0.43	43.21	51.13	42.78	-53.64	-61.99	68.30	54.00	-27.00	-41.30	X/E
10637.63	H	36.14	25.72	16.21	52.35	41.93	-52.42	-62.84	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

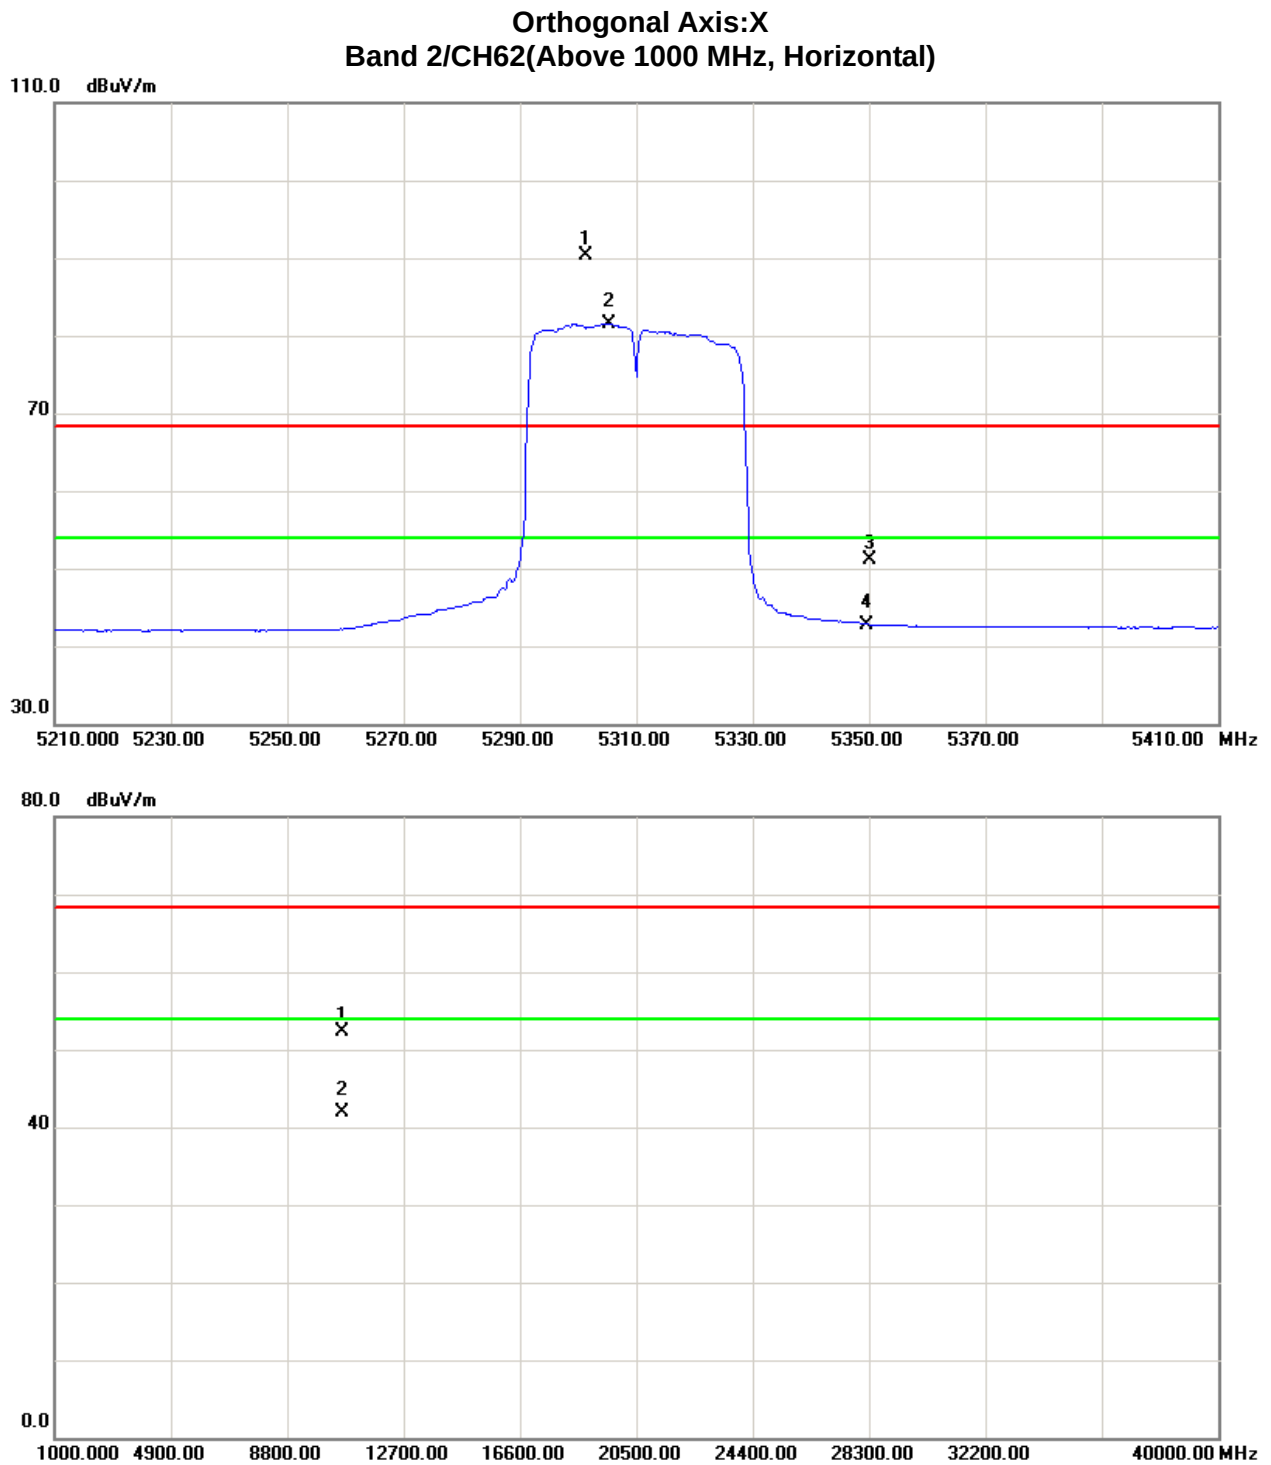



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5500MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	V	11.55	0.68	43.49	55.04	44.17	-49.73	-60.60	68.30	54.00	-27.00	-41.30	X/E
5470.00	V	15.31	3.76	43.50	58.81	47.26	-45.96	-57.51	68.30	54.00	-27.00	-41.30	X/E
5495.50	V	60.81	52.98	43.57	104.38	96.55	-0.39	-8.22					X/F
11012.78	V	41.13	30.28	17.29	58.42	47.57	-46.35	-57.20	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH100(Above 1000 MHz, Vertical)

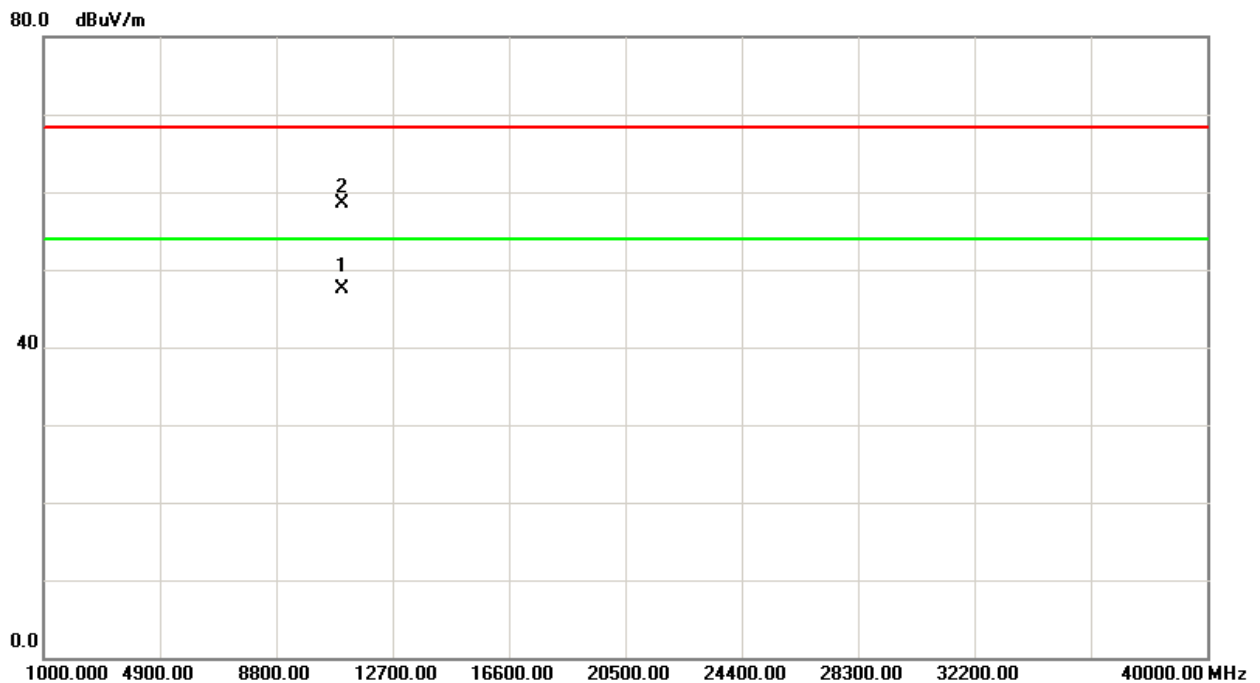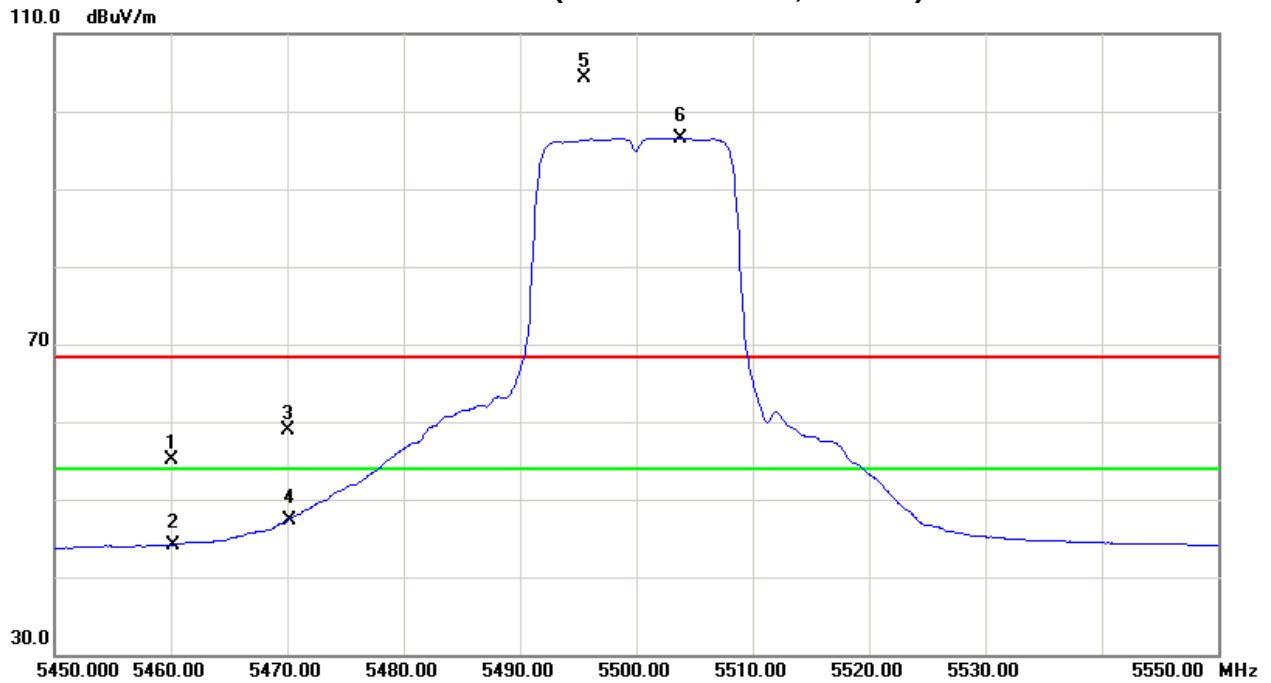



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5500MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	H	8.87	-0.65	43.49	52.36	42.84	-52.41	-61.93	68.30	54.00	-27.00	-41.30	X/E
5470.00	H	9.47	0.41	43.50	52.97	43.91	-51.80	-60.86	68.30	54.00	-27.00	-41.30	X/E
5495.40	H	53.10	45.84	43.57	96.67	89.41	-8.10	-15.36					X/F
11009.35	H	40.15	29.18	17.28	57.43	46.46	-47.34	-58.31	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH100(Above 1000 MHz, Horizontal)

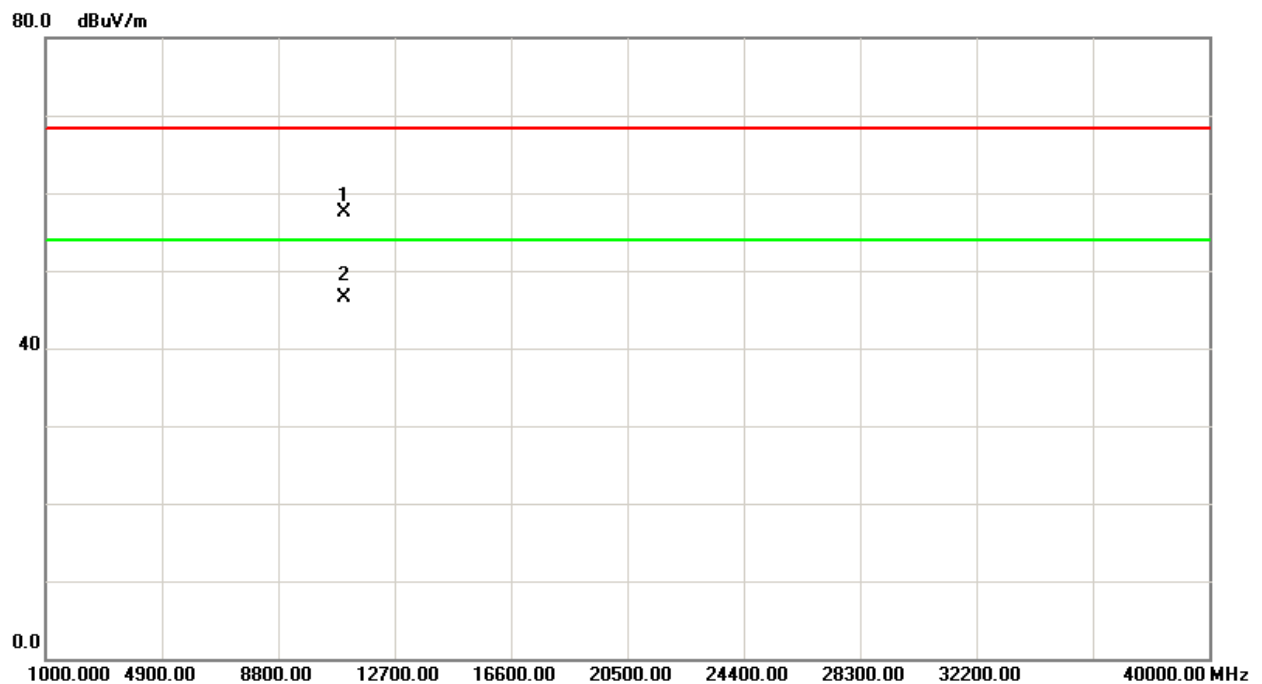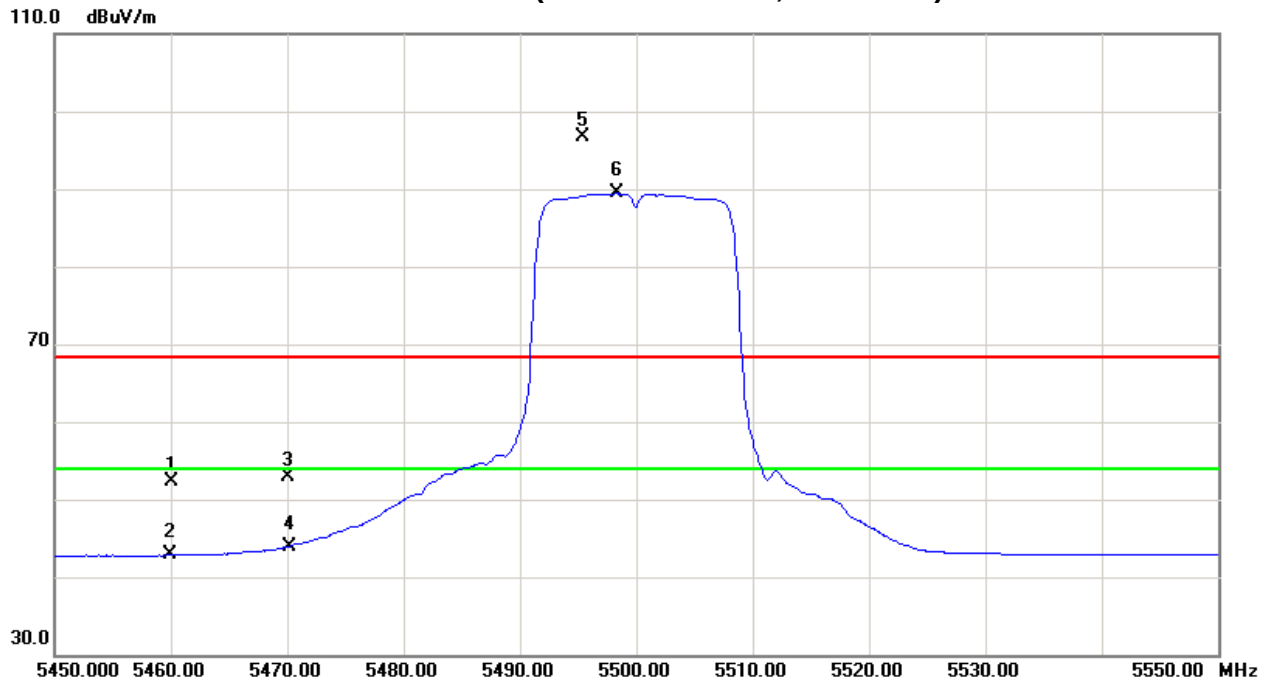



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5580MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5575.60	V	61.45	53.85	43.84	105.29	97.69	0.52	-7.08					X/F
11166.47	V	40.88	30.02	17.67	58.55	47.69	-46.22	-57.08	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH116(Above 1000 MHz, Vertical)

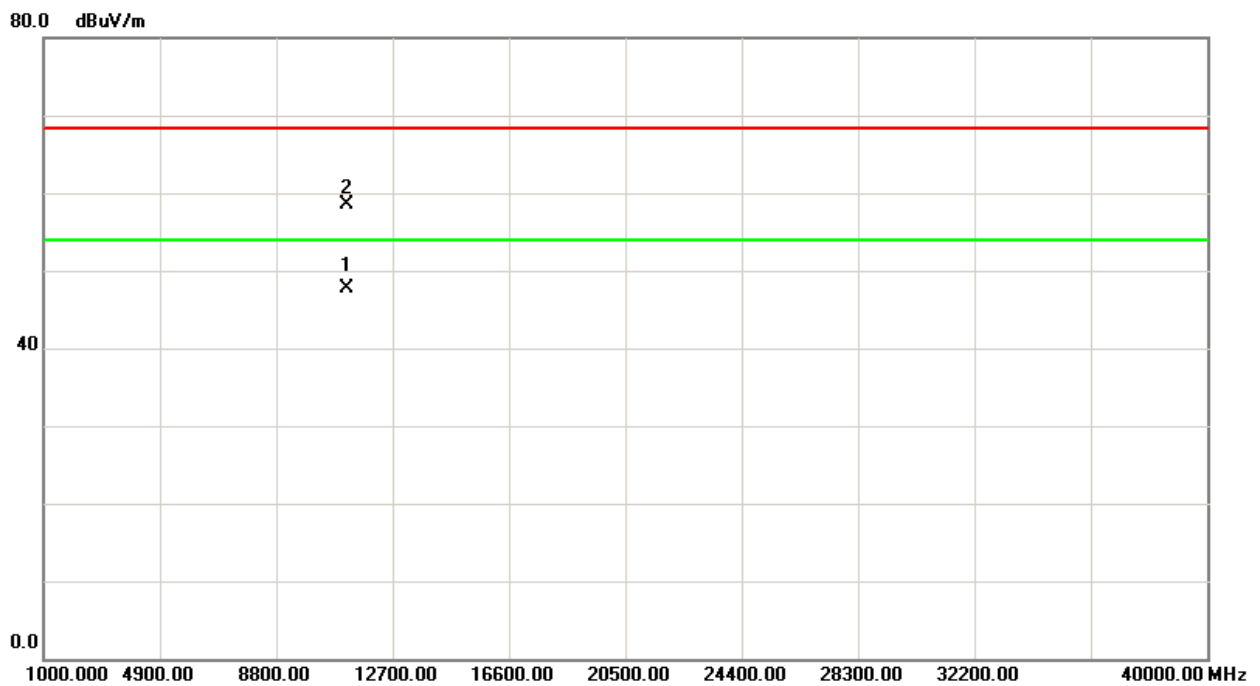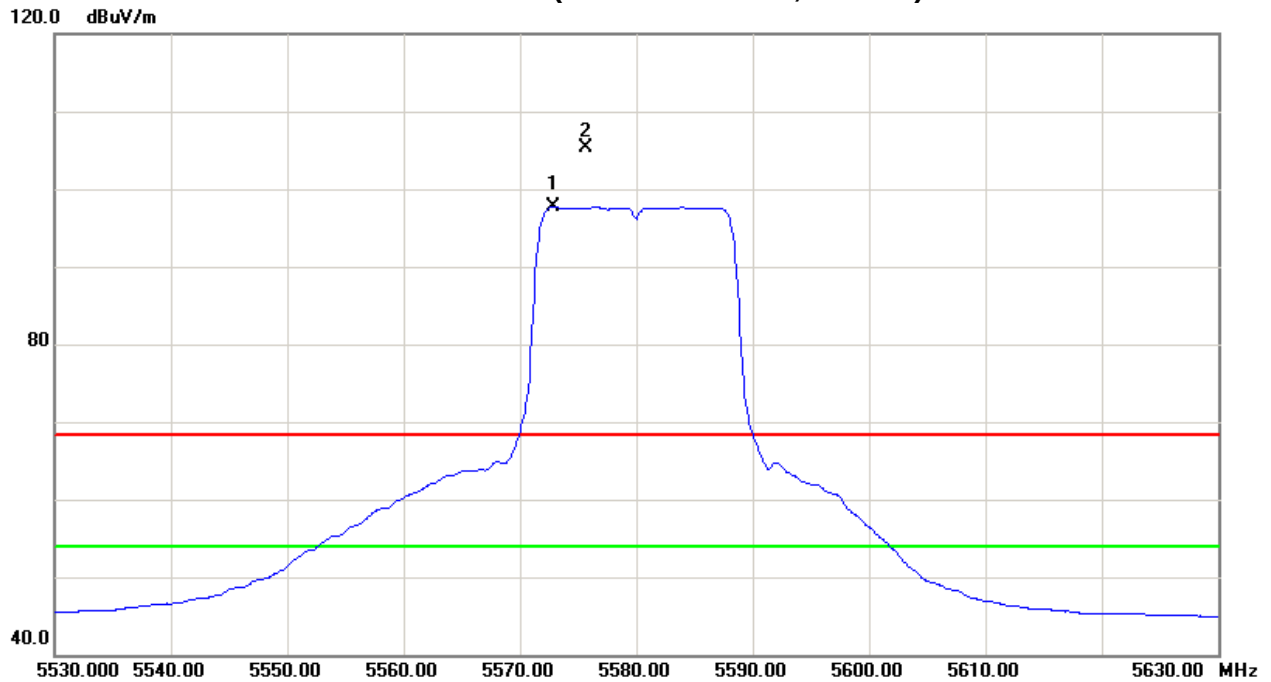



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5580MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5582.70	H	51.83	44.55	43.85	95.68	88.40	-9.09	-16.37					X/F
11166.25	H	40.13	29.13	17.67	57.80	46.80	-46.97	-57.97	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH116(Above 1000 MHz, Horizontal)

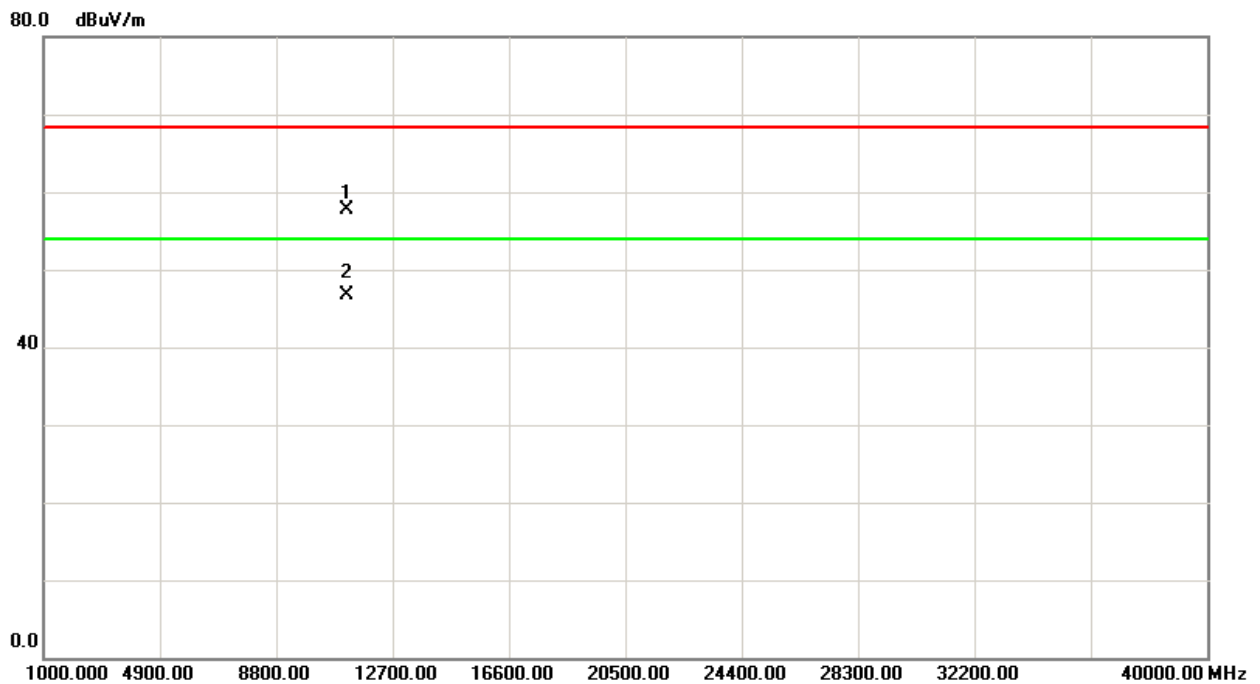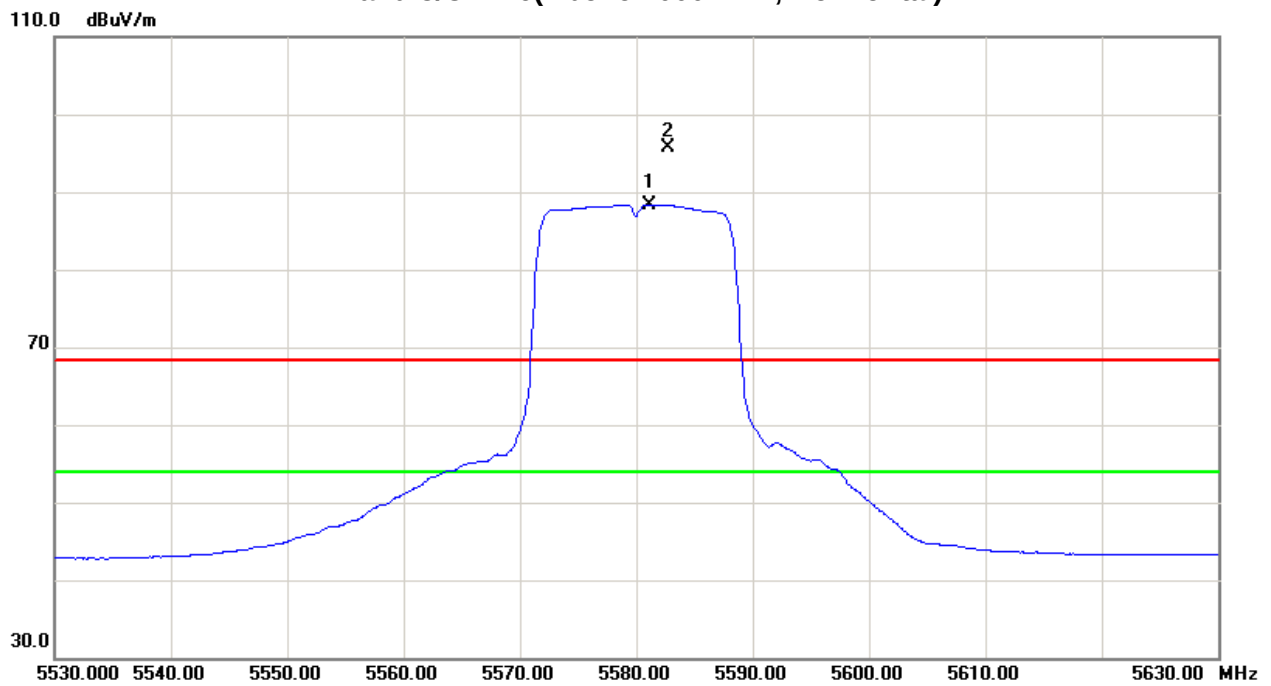



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5700MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5704.00	V	61.23	53.25	44.28	105.51	97.53	0.74	-7.24					X/F
5725.00	V	14.22	4.98	44.34	58.56	49.32	-46.21	-55.45	68.30	54.00	-27.00	-41.30	X/E
11403.67	V	40.25	29.11	18.25	58.50	47.36	-46.27	-57.41	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH140(Above 1000 MHz, Vertical)

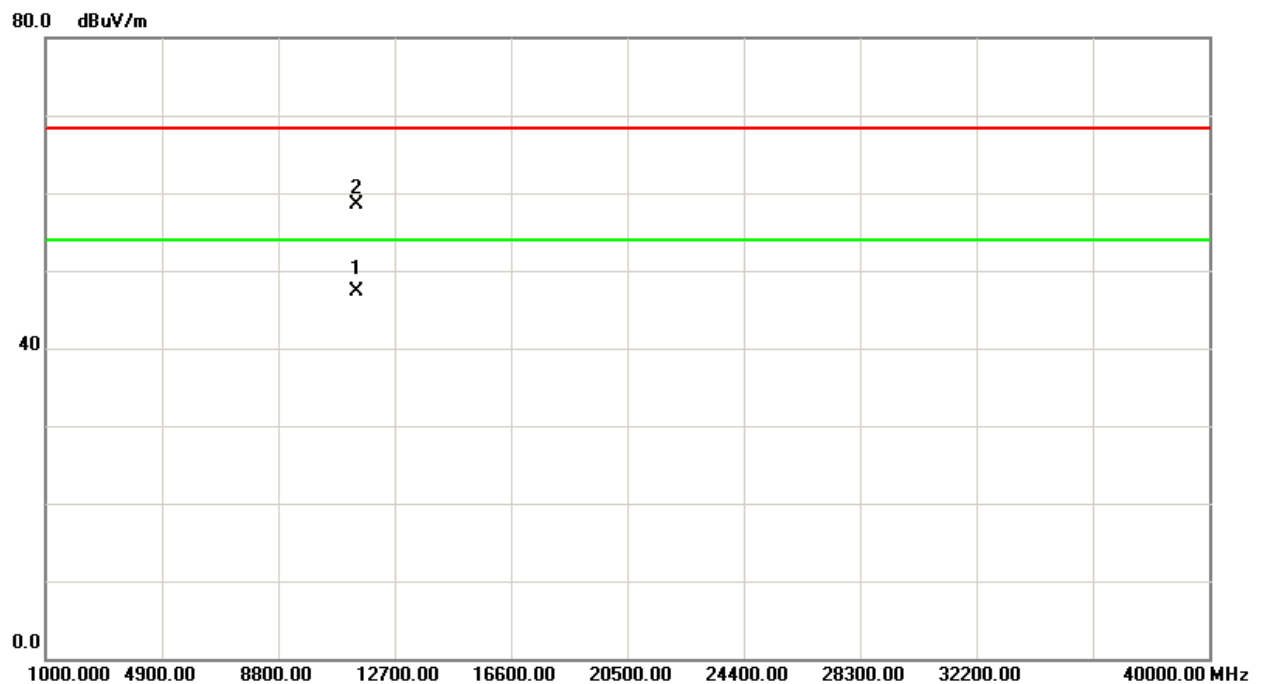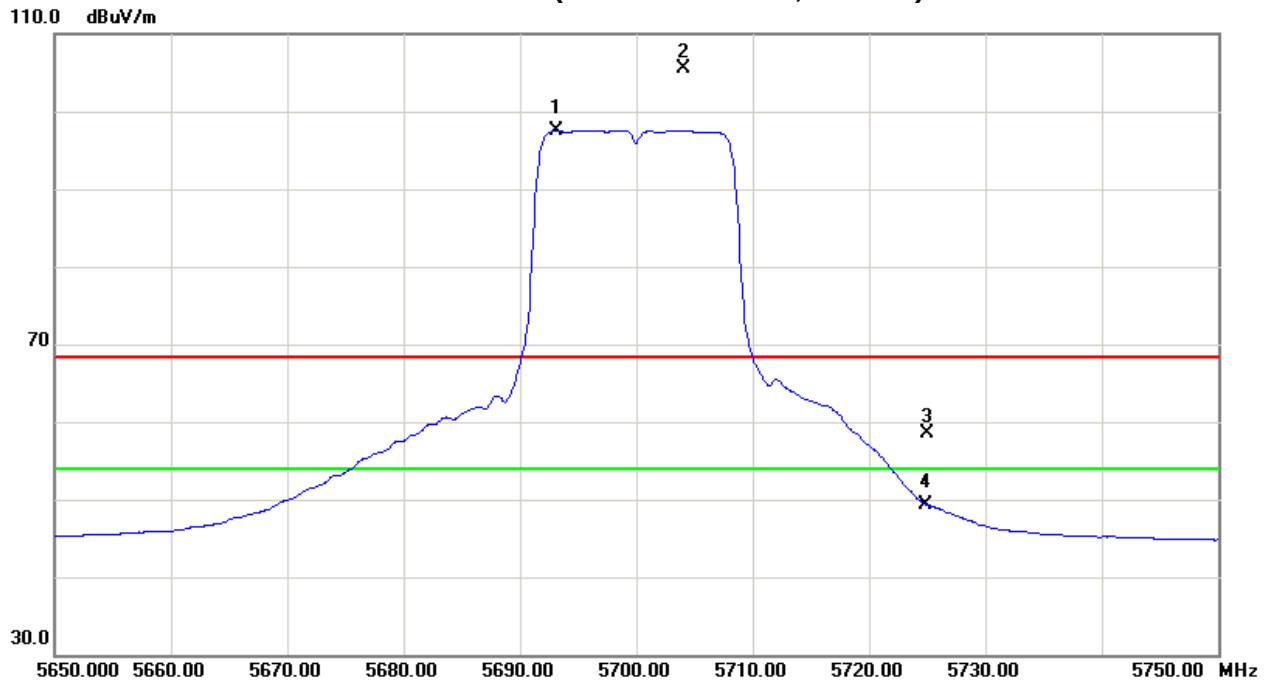




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX A Mode 5700MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5693.90	H	49.45	42.34	44.24	93.69	86.58	-11.08	-18.19					X/F
5725.00	H	12.25	3.32	44.34	56.59	47.66	-48.18	-57.11	68.30	54.00	-27.00	-41.30	X/E
11408.36	H	39.86	28.95	18.26	58.12	47.21	-46.65	-57.56	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

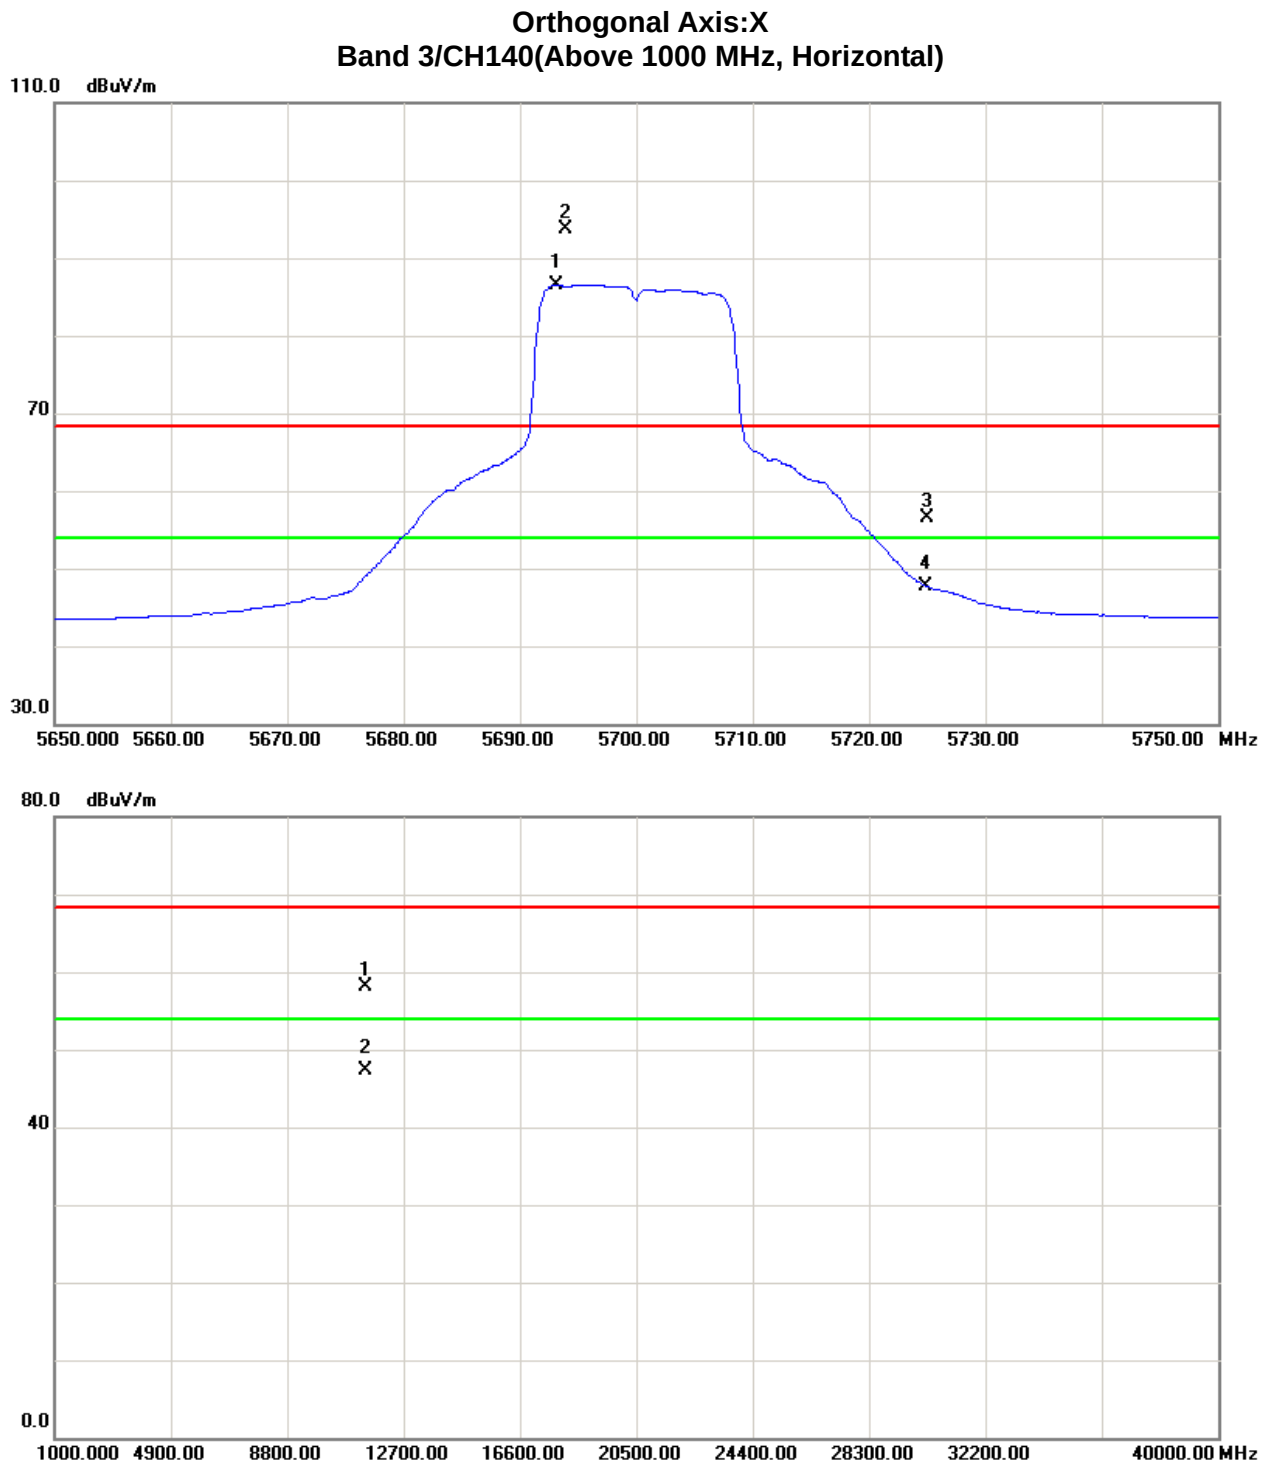



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5500MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	V	10.42	1.40	43.49	53.91	44.89	-50.86	-59.88	68.30	54.00	-27.00	-41.30	X/E
5470.00	V	13.36	3.69	43.50	56.86	47.19	-47.91	-57.58	68.30	54.00	-27.00	-41.30	X/E
5497.00	V	61.79	52.23	43.58	105.37	95.81	0.60	-8.96					X/F
11012.64	V	39.35	29.10	17.29	56.64	46.39	-48.13	-58.38	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH100(Above 1000 MHz, Vertical)

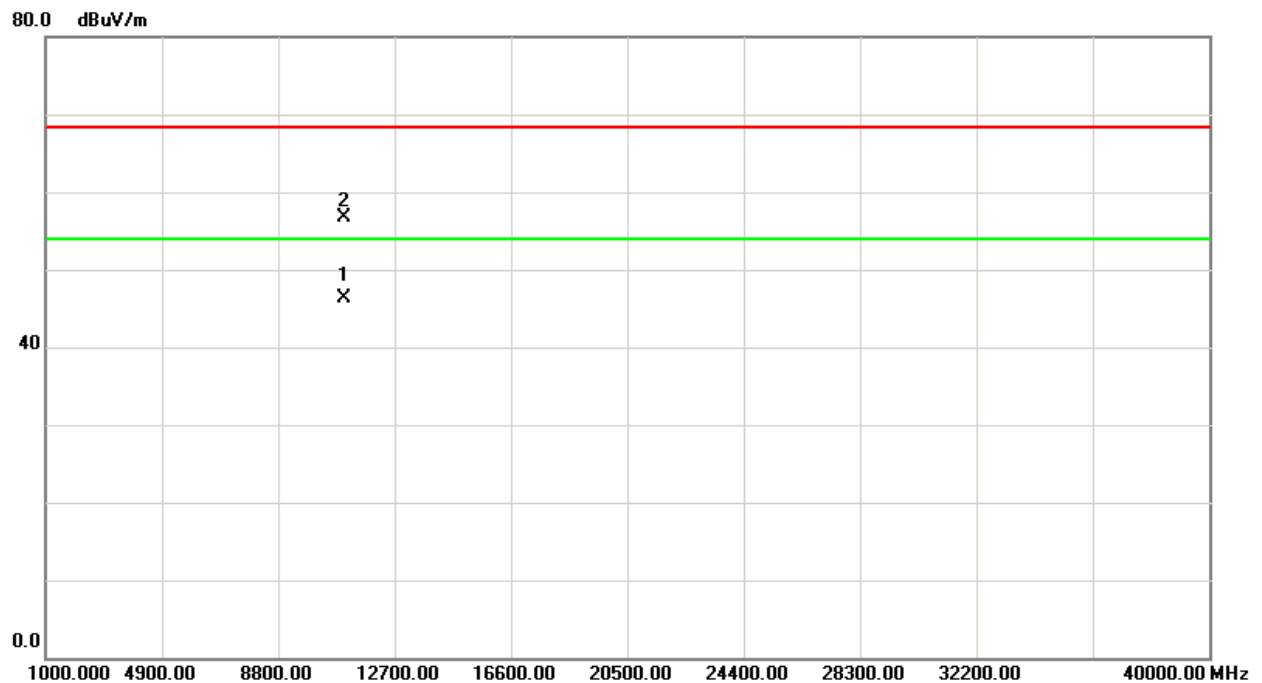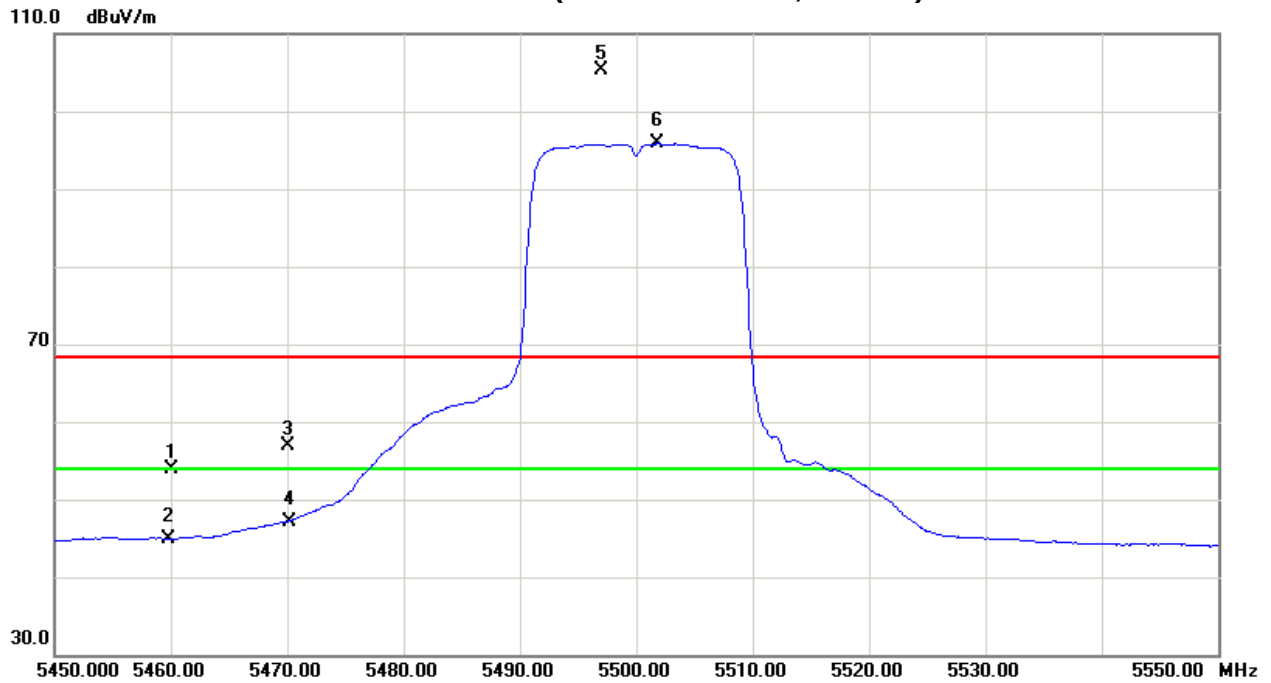



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5500MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	H	7.32	-0.65	43.49	50.81	42.84	-53.96	-61.93	68.30	54.00	-27.00	-41.30	X/E
5470.00	H	8.08	-0.15	43.50	51.58	43.35	-53.19	-61.42	68.30	54.00	-27.00	-41.30	X/E
5495.90	H	50.88	42.28	43.57	94.45	85.85	-10.32	-18.92					X/F
11011.44	H	38.65	28.37	17.28	55.93	45.65	-48.84	-59.12	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH100(Above 1000 MHz, Horizontal)

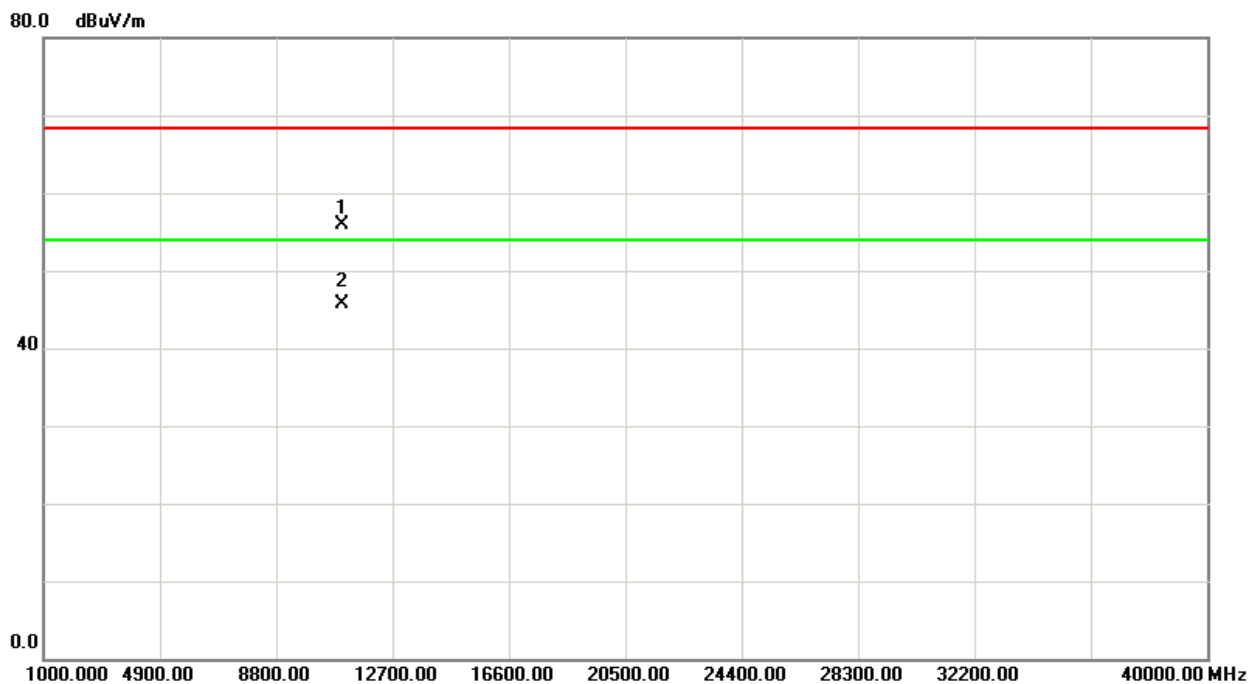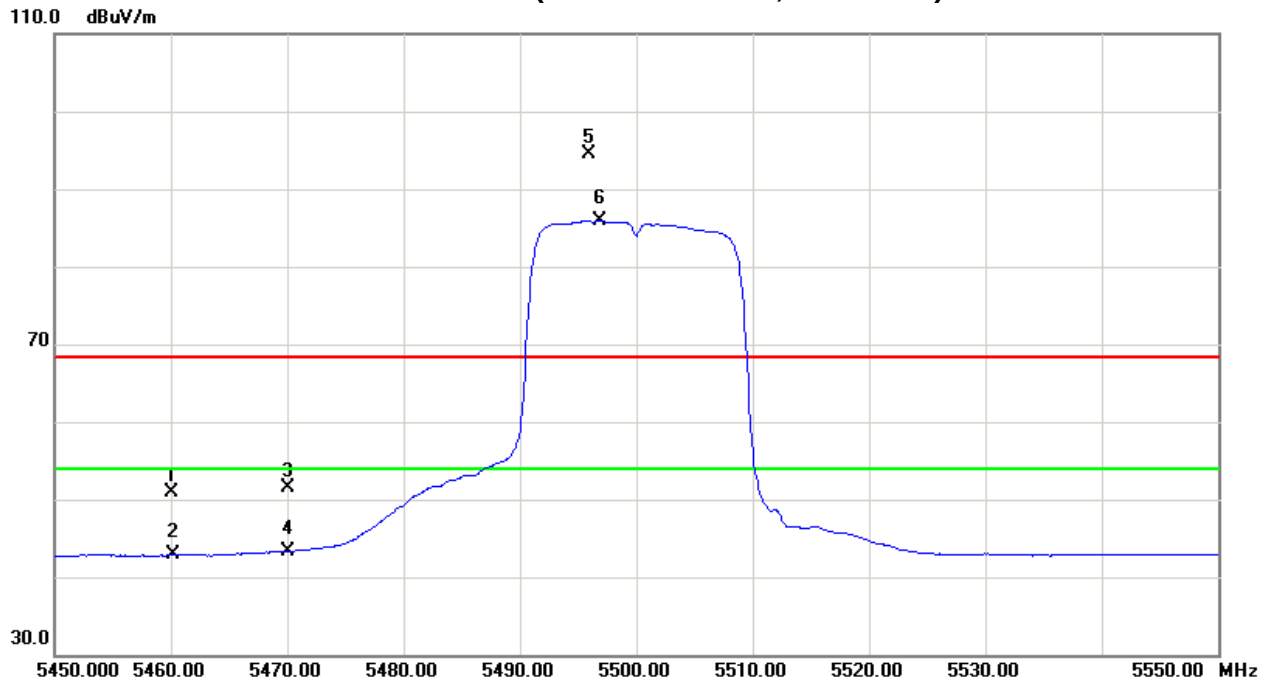



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5580MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5577.10	V	61.18	51.88	43.84	105.02	95.72	0.25	-9.05					X/F
11164.73	V	39.96	29.82	17.67	57.63	47.49	-47.14	-57.28	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH116(Above 1000 MHz, Vertical)

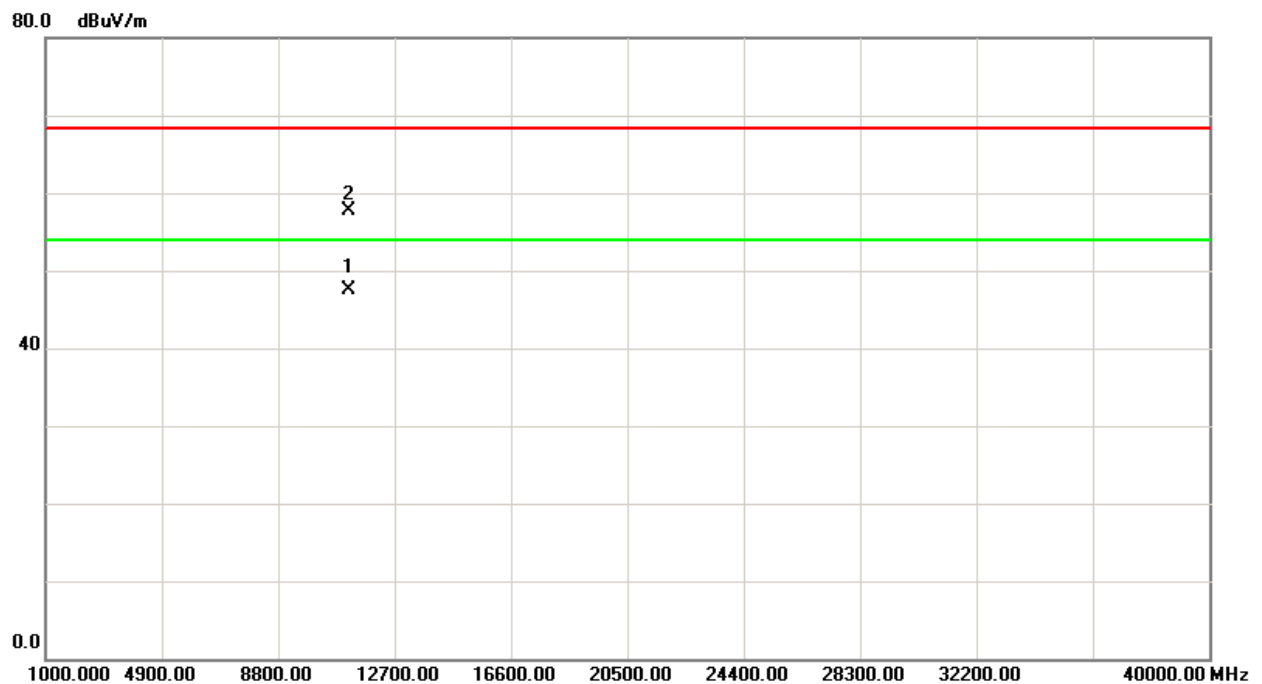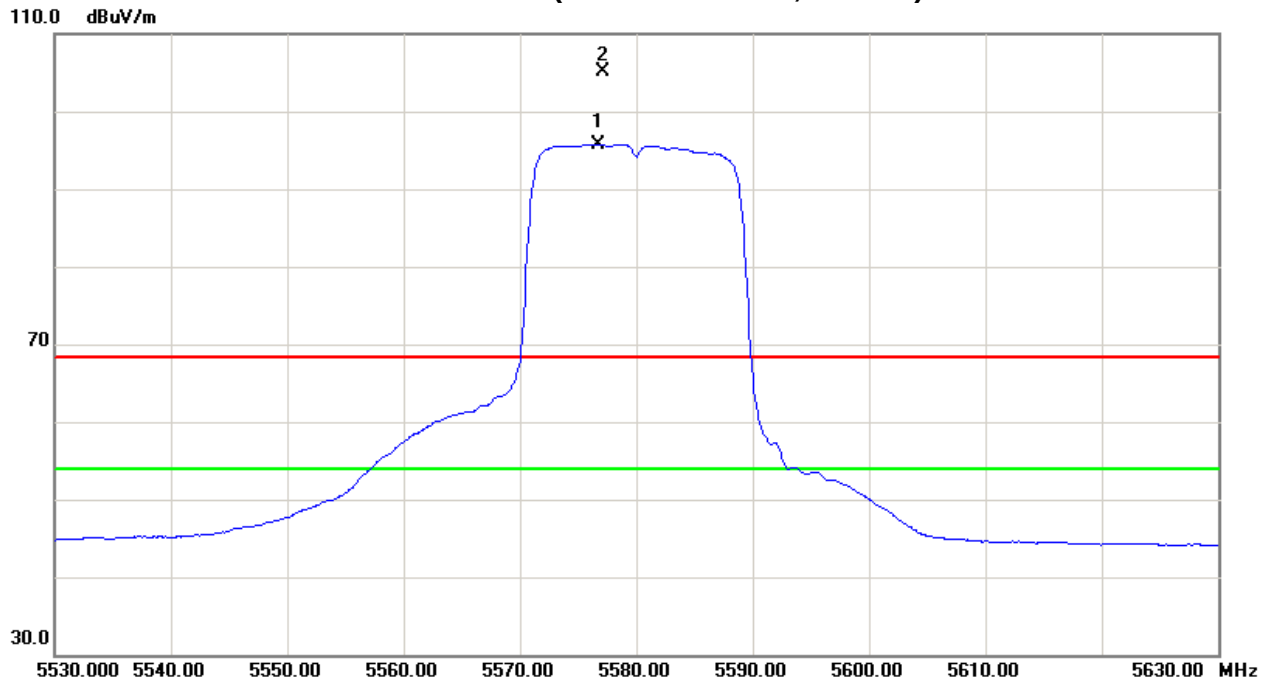



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5580MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5573.10	H	51.30	42.33	43.83	95.13	86.16	-9.64	-18.61					X/F
11165.75	H	38.28	28.32	17.67	55.95	45.99	-48.82	-58.78	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH116(Above 1000 MHz, Horizontal)

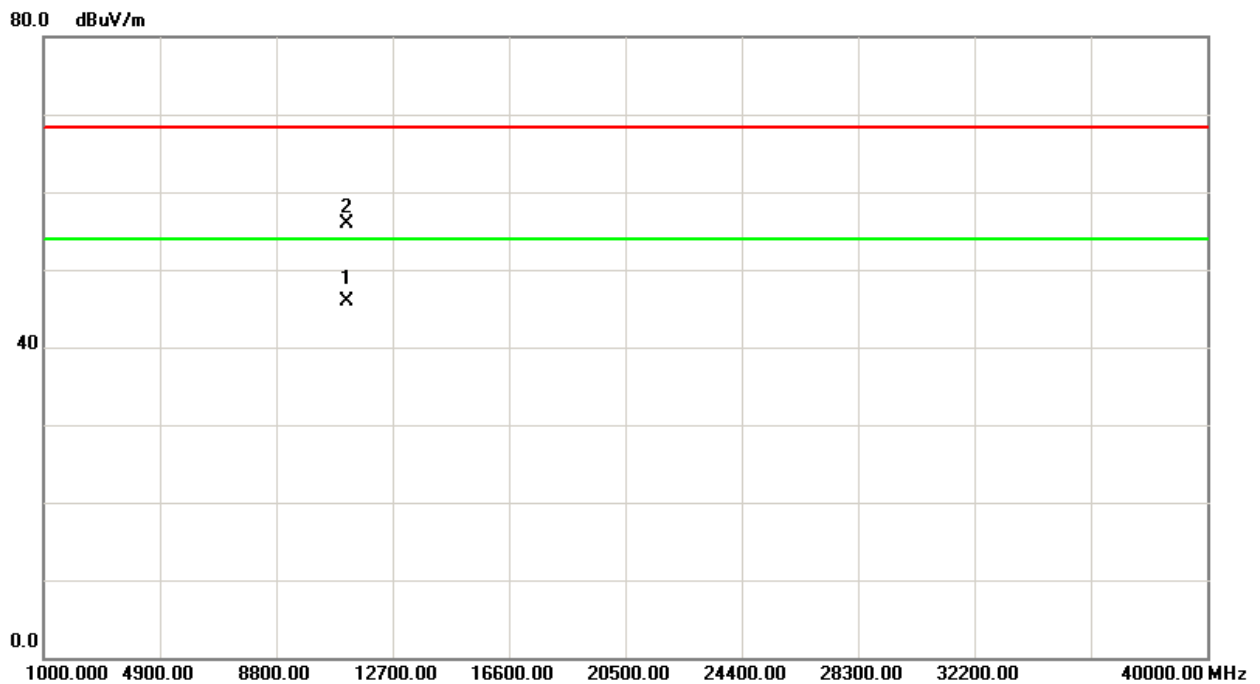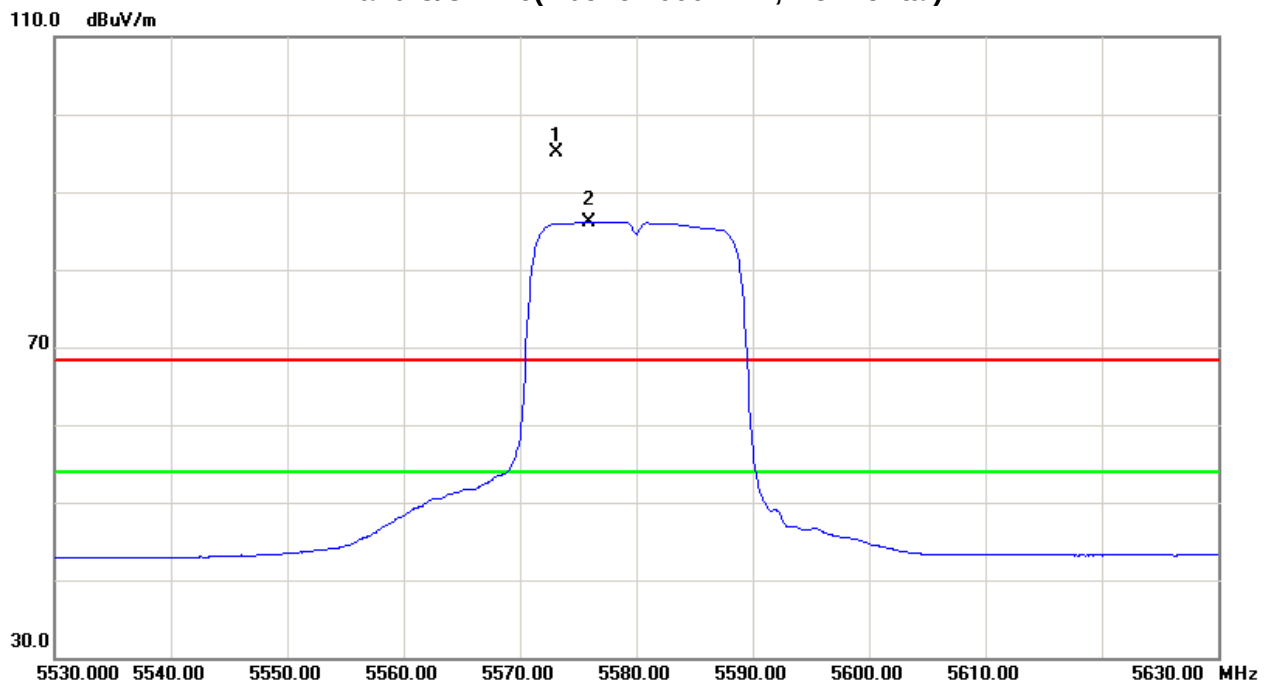



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5700MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5694.50	V	61.56	51.86	44.24	105.80	96.10	1.03	-8.67					X/F
5725.00	V	9.99	2.40	44.34	54.33	46.74	-50.44	-58.03	68.30	54.00	-27.00	-41.30	X/E
11405.67	V	39.21	29.15	18.26	57.47	47.41	-47.30	-57.36	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH140(Above 1000 MHz, Vertical)

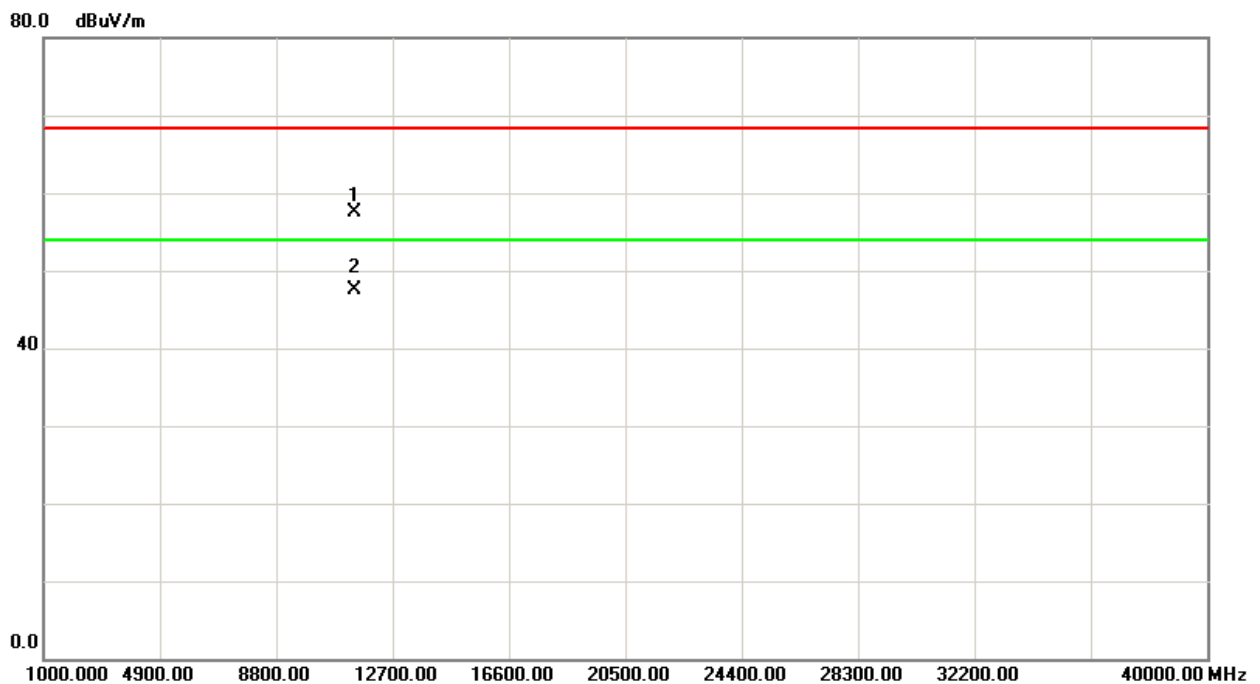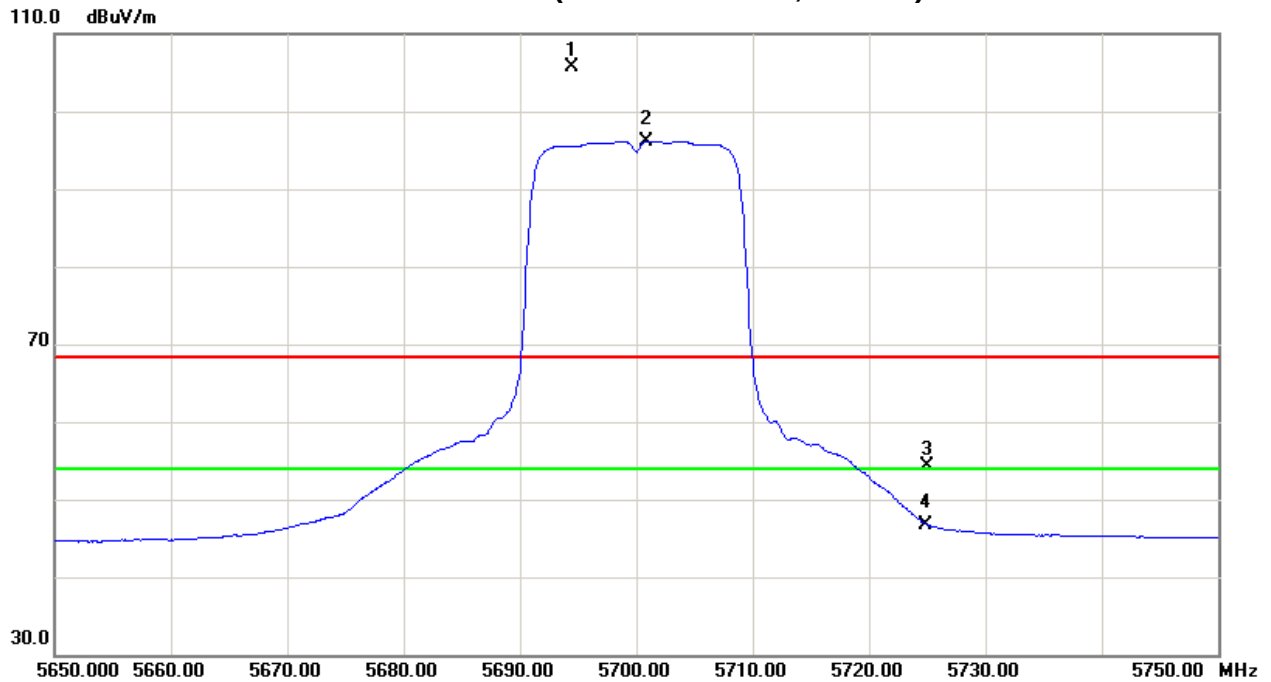




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N20 Mode 5700MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5706.30	H	50.12	42.47	44.29	94.41	86.76	-10.36	-18.01					X/F
5725.00	H	7.63	-0.45	44.34	51.97	43.89	-52.80	-60.88	68.30	54.00	-27.00	-41.30	X/E
11406.65	H	38.37	28.84	18.26	56.63	47.10	-48.14	-57.67	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

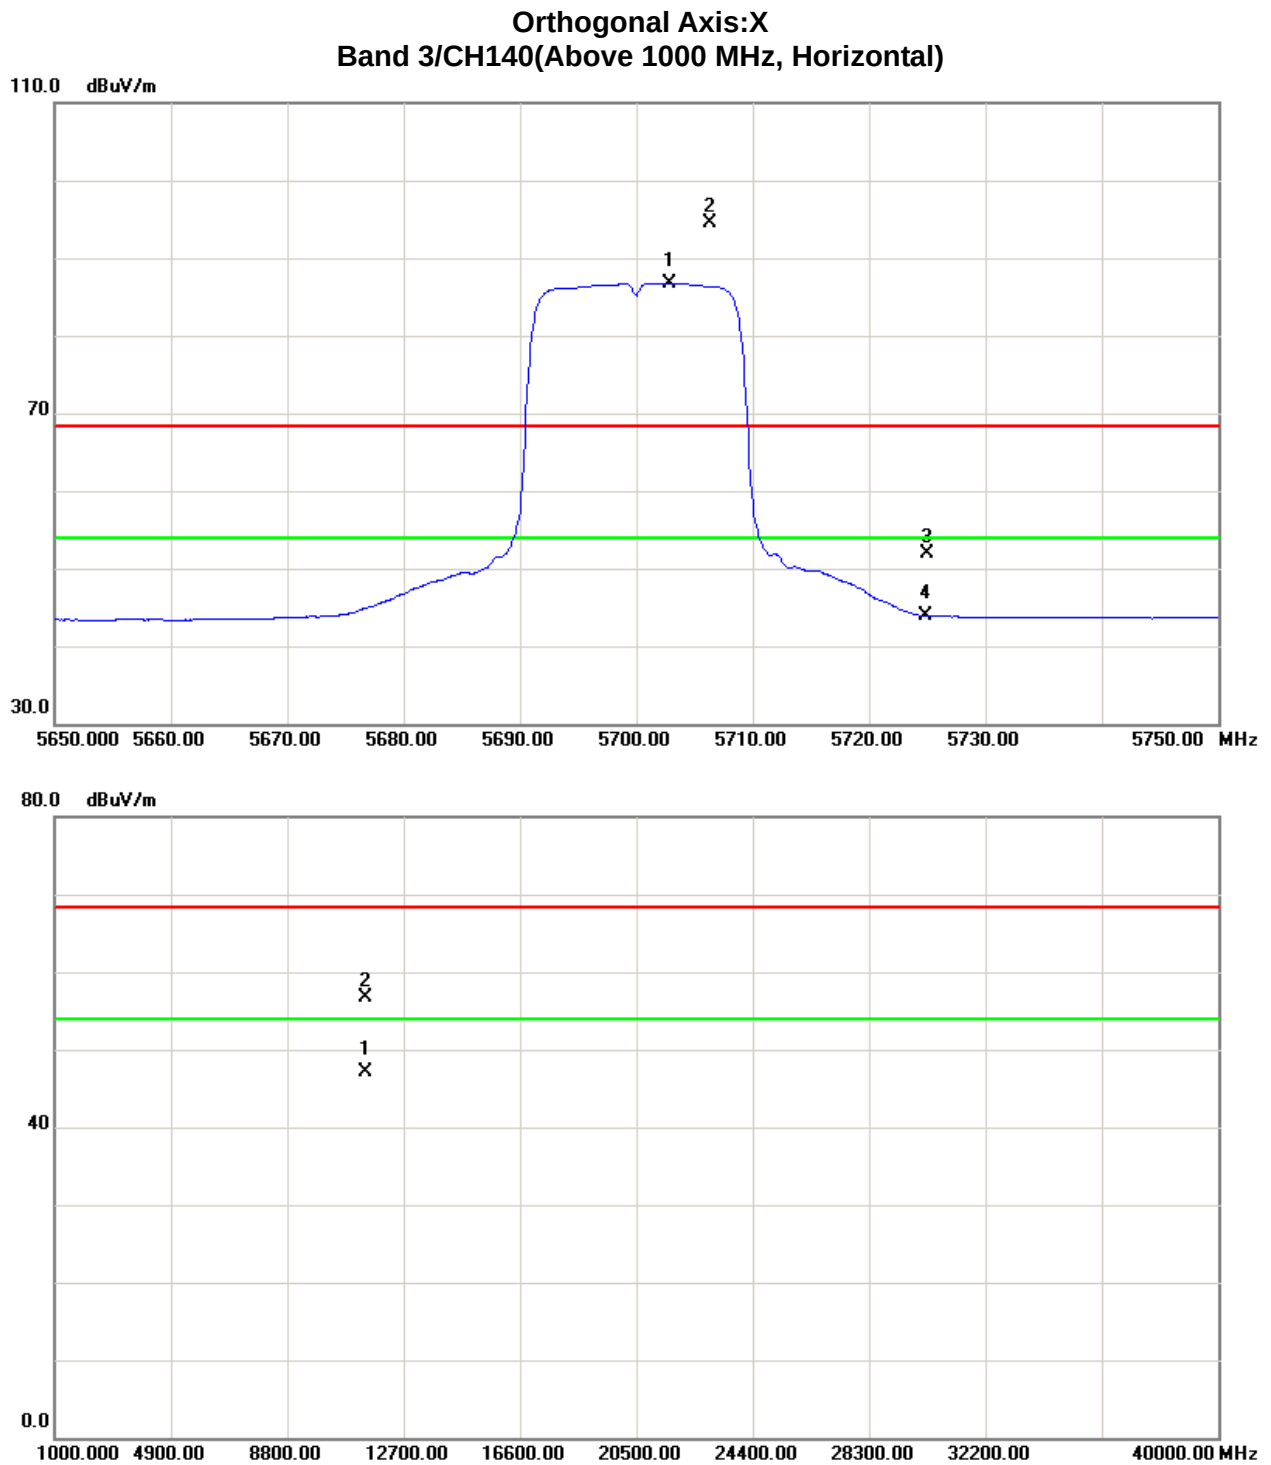



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5510MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	V	9.66	0.28	43.49	53.15	43.77	-51.62	-61.00	68.30	54.00	-27.00	-41.30	X/E
5470.00	V	13.47	3.44	43.50	56.97	46.94	-47.80	-57.83	68.30	54.00	-27.00	-41.30	X/E
5521.40	V	53.15	43.97	43.63	96.78	87.60	-7.99	-17.17					X/F
11007.66	V	36.27	25.85	17.28	53.55	43.13	-51.22	-61.64	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH102(Above 1000 MHz, Vertical)

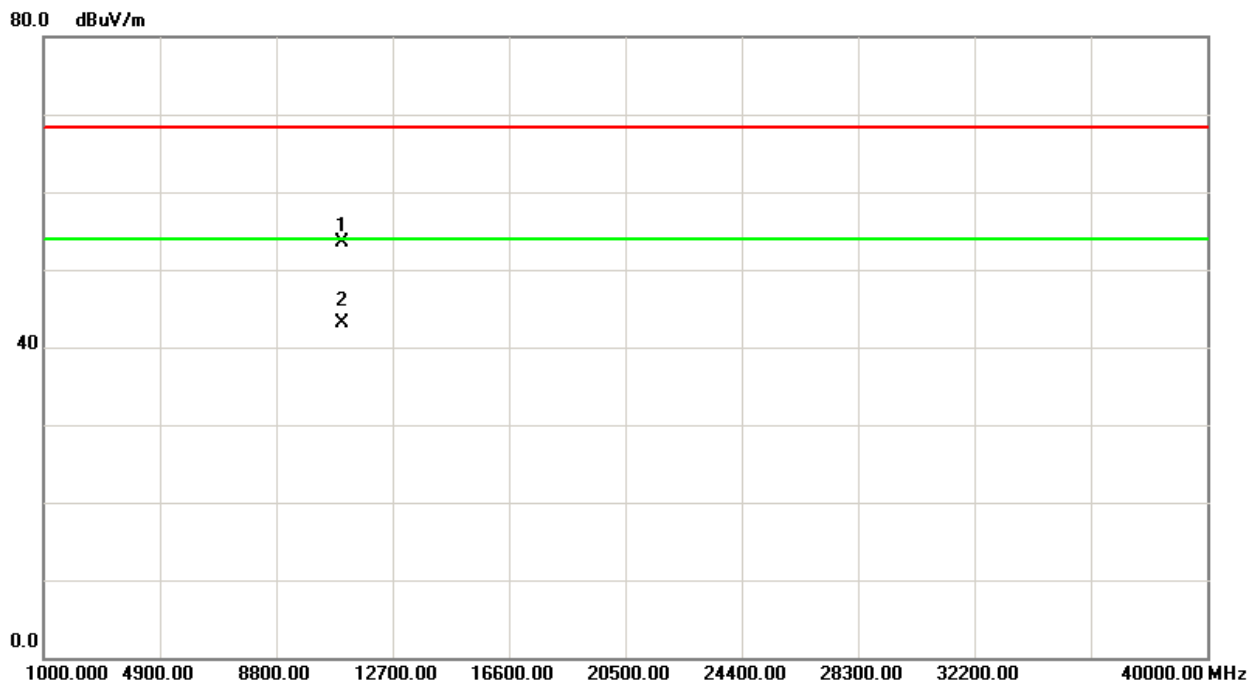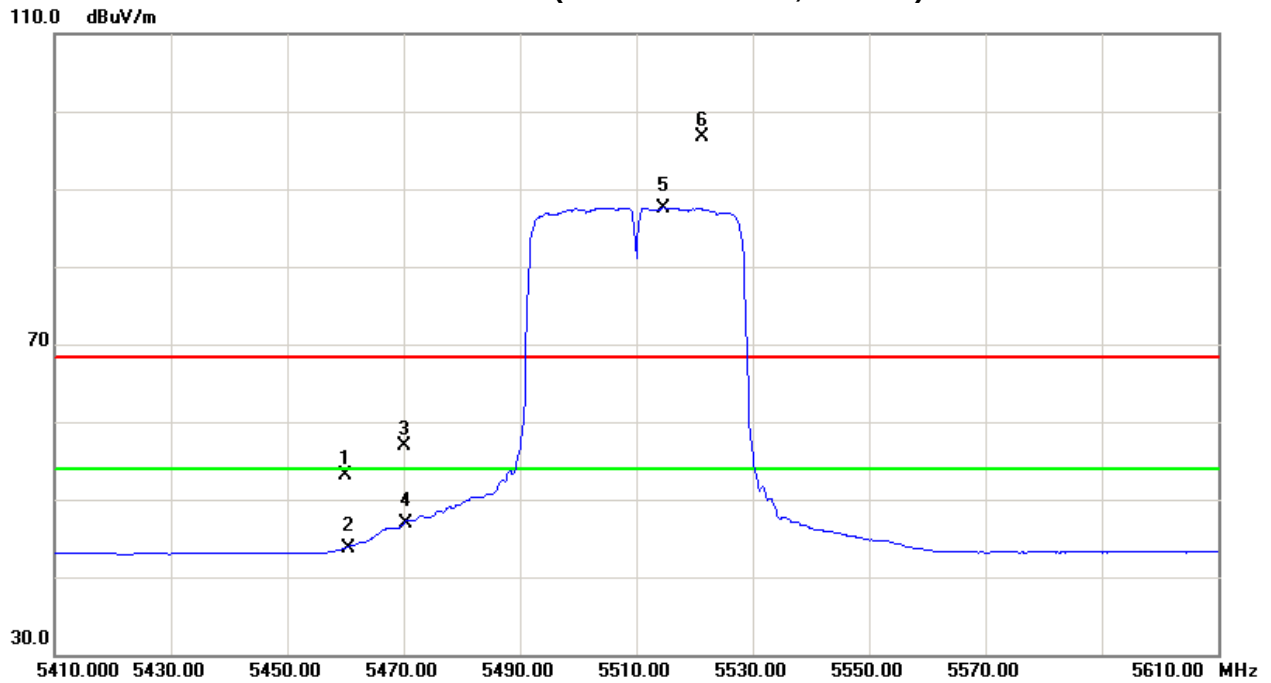



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5510MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant. Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5460.00	H	9.24	0.20	43.49	52.73	43.69	-52.04	-61.08	68.30	54.00	-27.00	-41.30	X/E
5470.00	H	14.93	3.20	43.50	58.43	46.70	-46.34	-58.07	68.30	54.00	-27.00	-41.30	X/E
5499.60	H	45.02	37.29	43.58	88.60	80.87	-16.17	-23.90					X/F
11028.66	H	35.34	25.42	17.33	52.67	42.75	-52.10	-62.02	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH102(Above 1000 MHz, Horizontal)

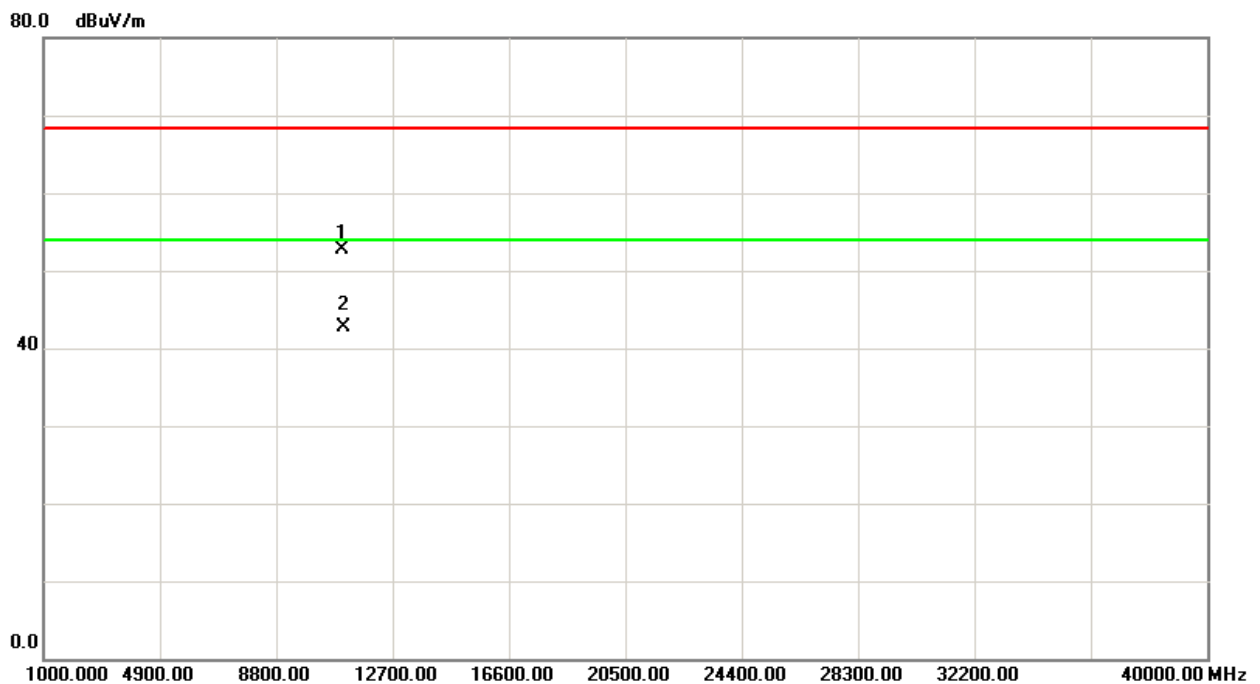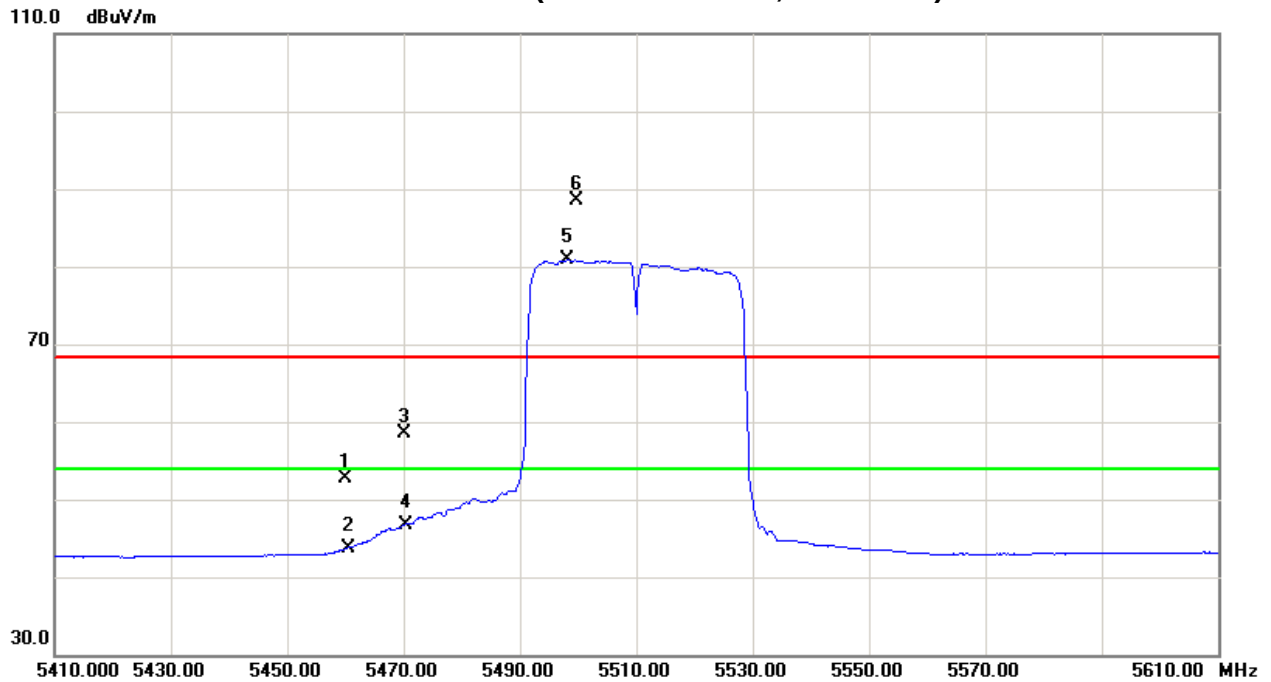



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5550MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5543.40	V	53.90	44.70	43.73	97.63	88.43	-7.14	-16.34					X/F
11107.65	V	36.13	25.74	17.52	53.65	43.26	-51.12	-61.51	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH110(Above 1000 MHz, Vertical)

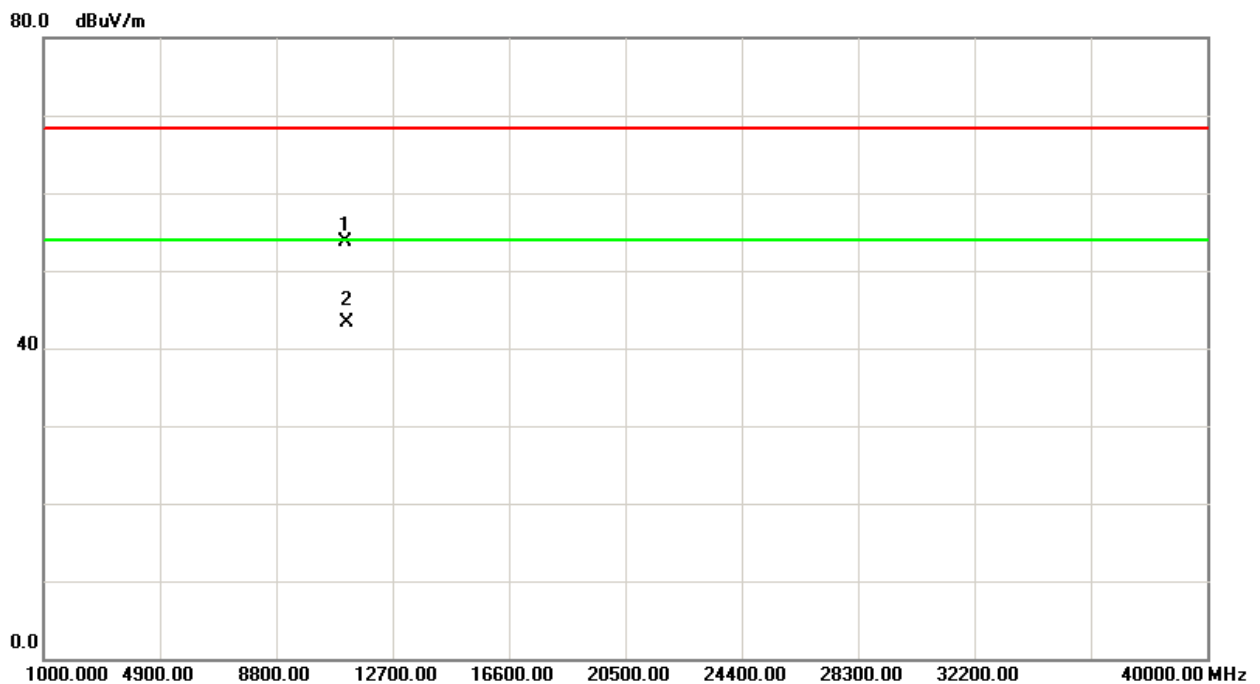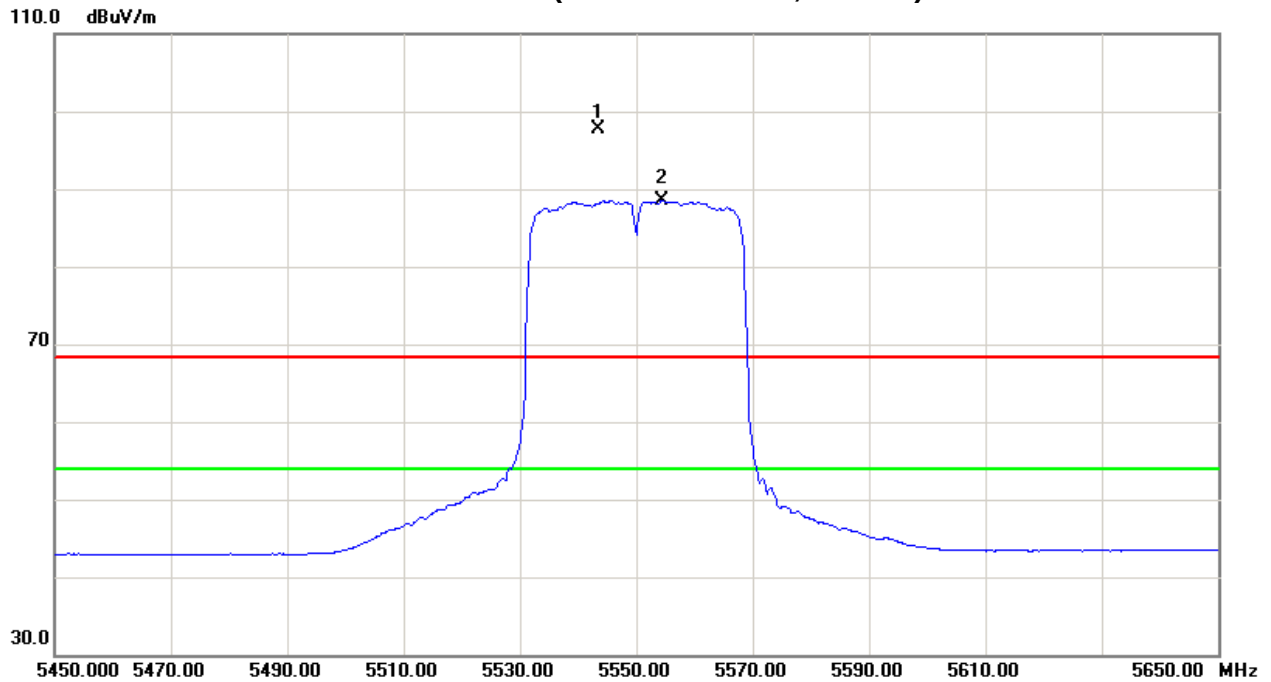



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	58 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5550MHz/Dipole Antenna with external cable		



Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5546.80	H	44.39	35.60	43.74	88.13	79.34	-16.64	-25.43					X/F
11109.67	H	35.42	25.32	17.53	52.95	42.85	-51.82	-61.92	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



Orthogonal Axis:X
Band 3/CH110(Above 1000 MHz, Horizontal)

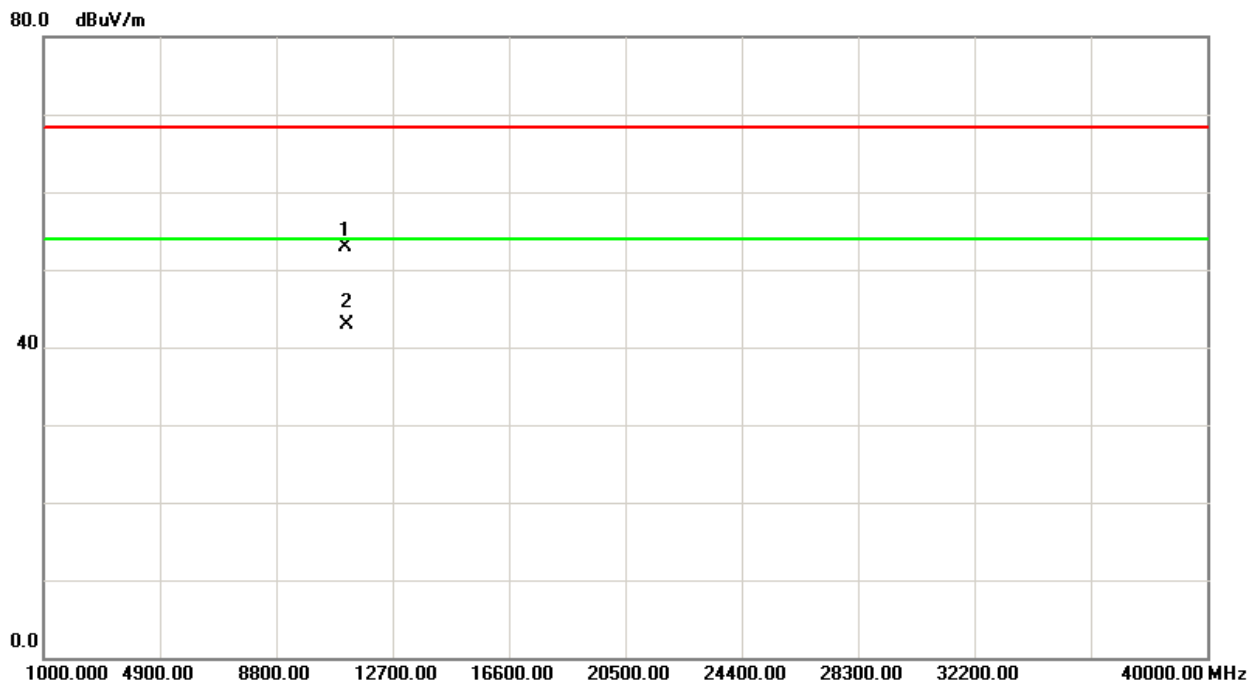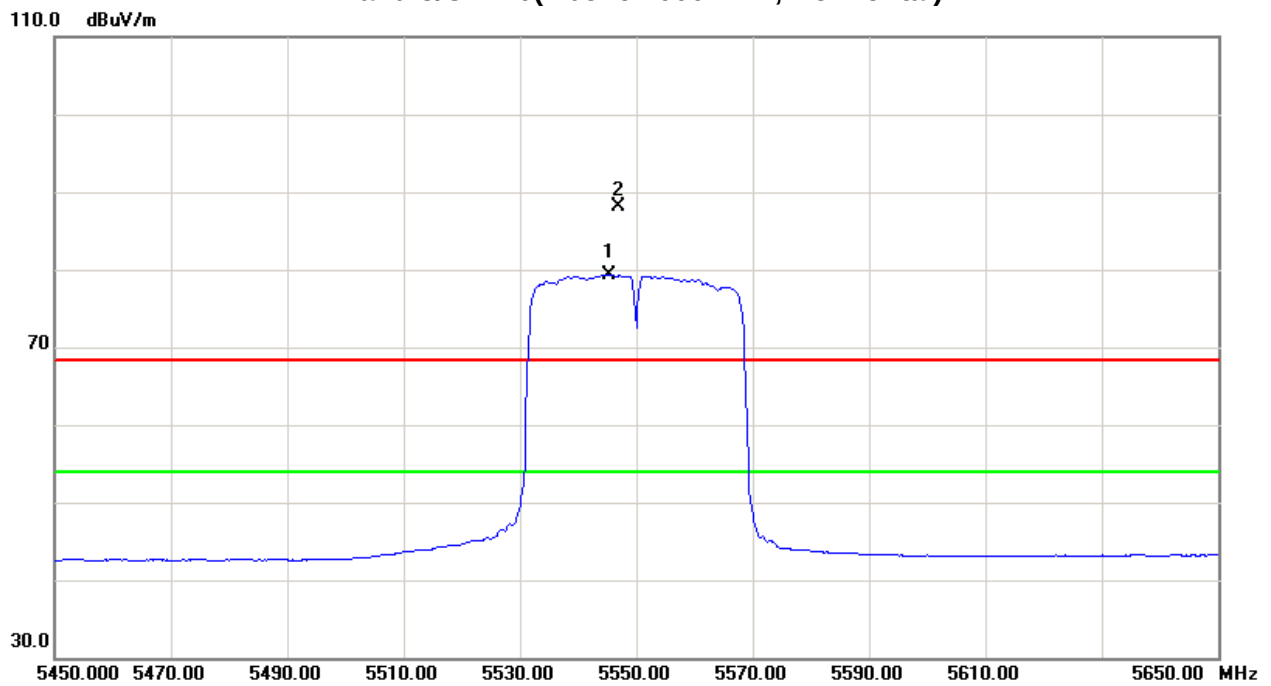




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5670MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5673.20	V	53.56	44.92	44.17	97.73	89.09	-7.04	-15.68					X/F
5725.00	V	8.33	-0.41	44.34	52.67	43.93	-52.10	-60.84	68.30	54.00	-27.00	-41.30	X/E
11345.64	V	36.21	25.56	18.11	54.32	43.67	-50.45	-61.10	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

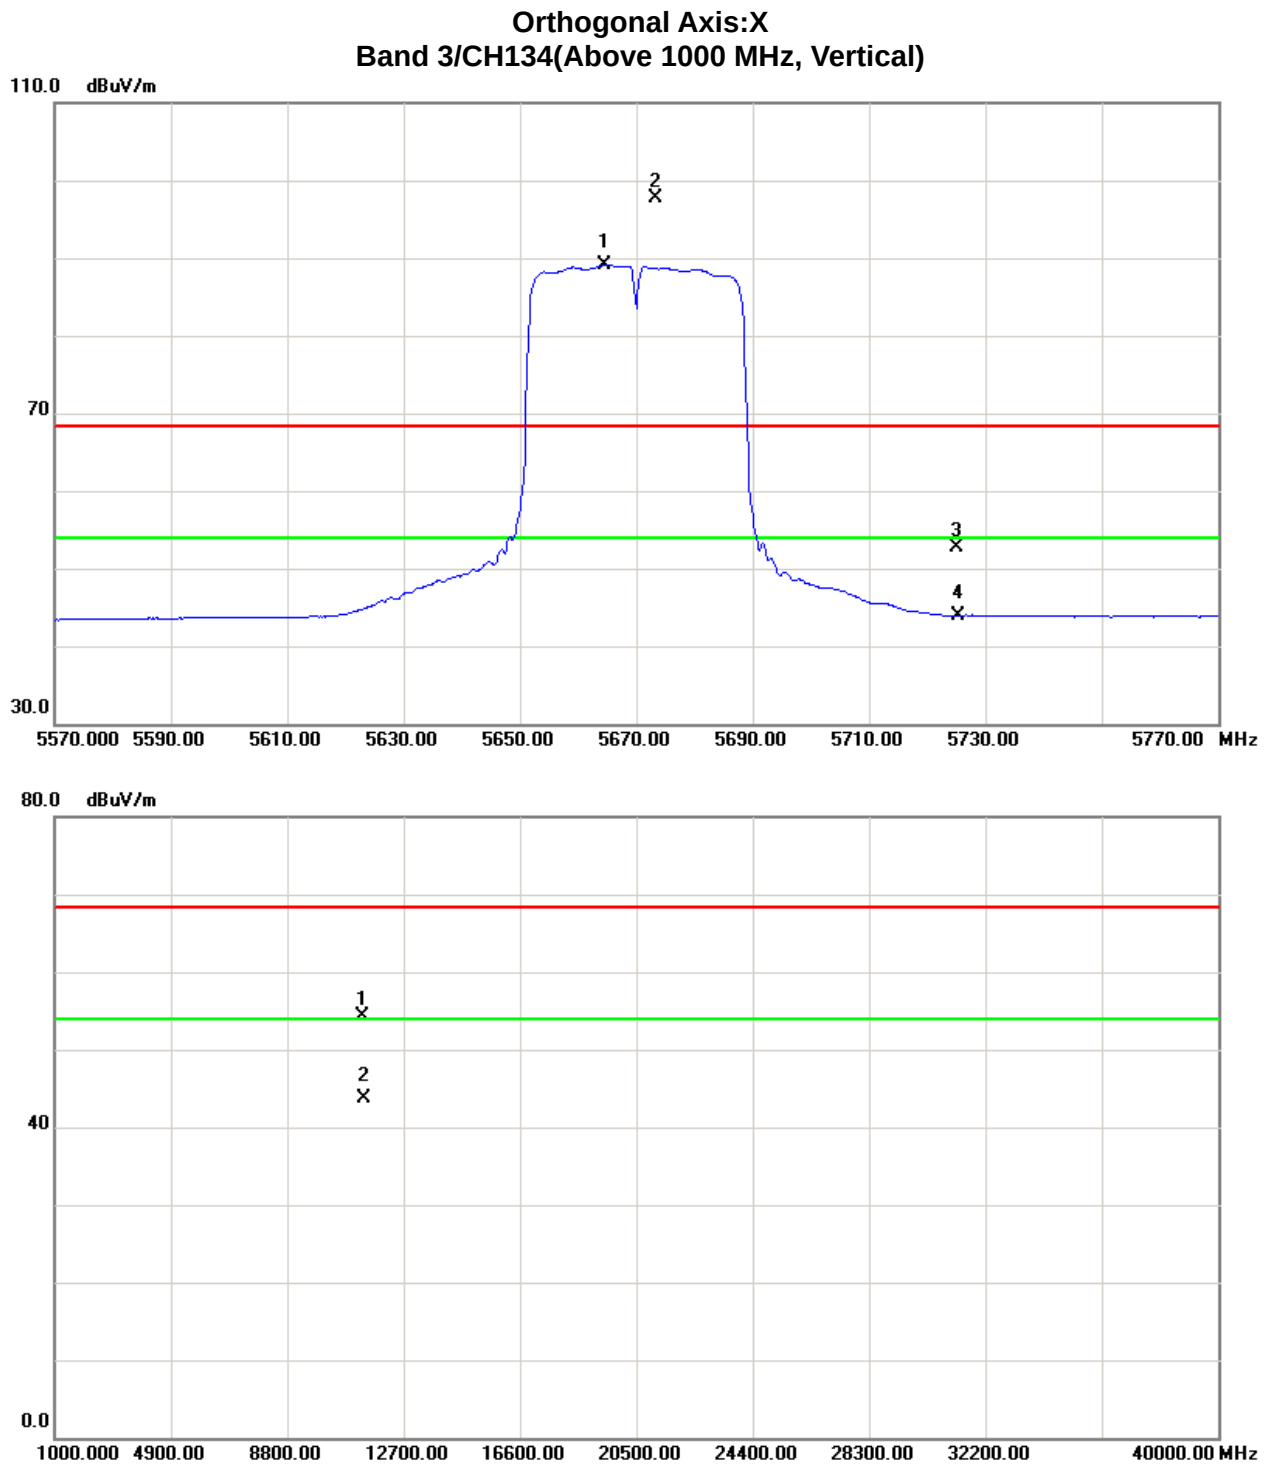




EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 ° C	Relative Humidity :	52 %
Test Voltage :	AC 120V/60Hz		
Test Mode :	Band 3/ TX N40 Mode 5670MHz/Dipole Antenna with external cable		

Freq. (MHz)	Ant.Pd. H/V	Reading		Ant./CF CF(dB)	Act.(dBuV/m)		Act.(dBm)		Limit(dBuV/m)		Limit(dBm)		Note
		Peak (dBuV)	AV (dBuV)		Peak	AV	Peak	AV	Peak	AV	Peak	AV	
5677.60	H	44.40	35.36	44.18	88.58	79.54	-16.19	-25.23					X/F
5725.00	H	7.89	-0.90	44.34	52.23	43.44	-52.54	-61.33	68.30	54.00	-27.00	-41.30	X/E
11336.64	H	35.75	25.13	18.08	53.83	43.21	-50.94	-61.56	68.30	54.00	-27.00	-41.30	X/H

Remark:

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 40GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated AV in column of 『Note 』 . Peak denotes that the Peak reading compliance with the AV Limits and then AV Mode measurement didn't perform.
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency. "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission .
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

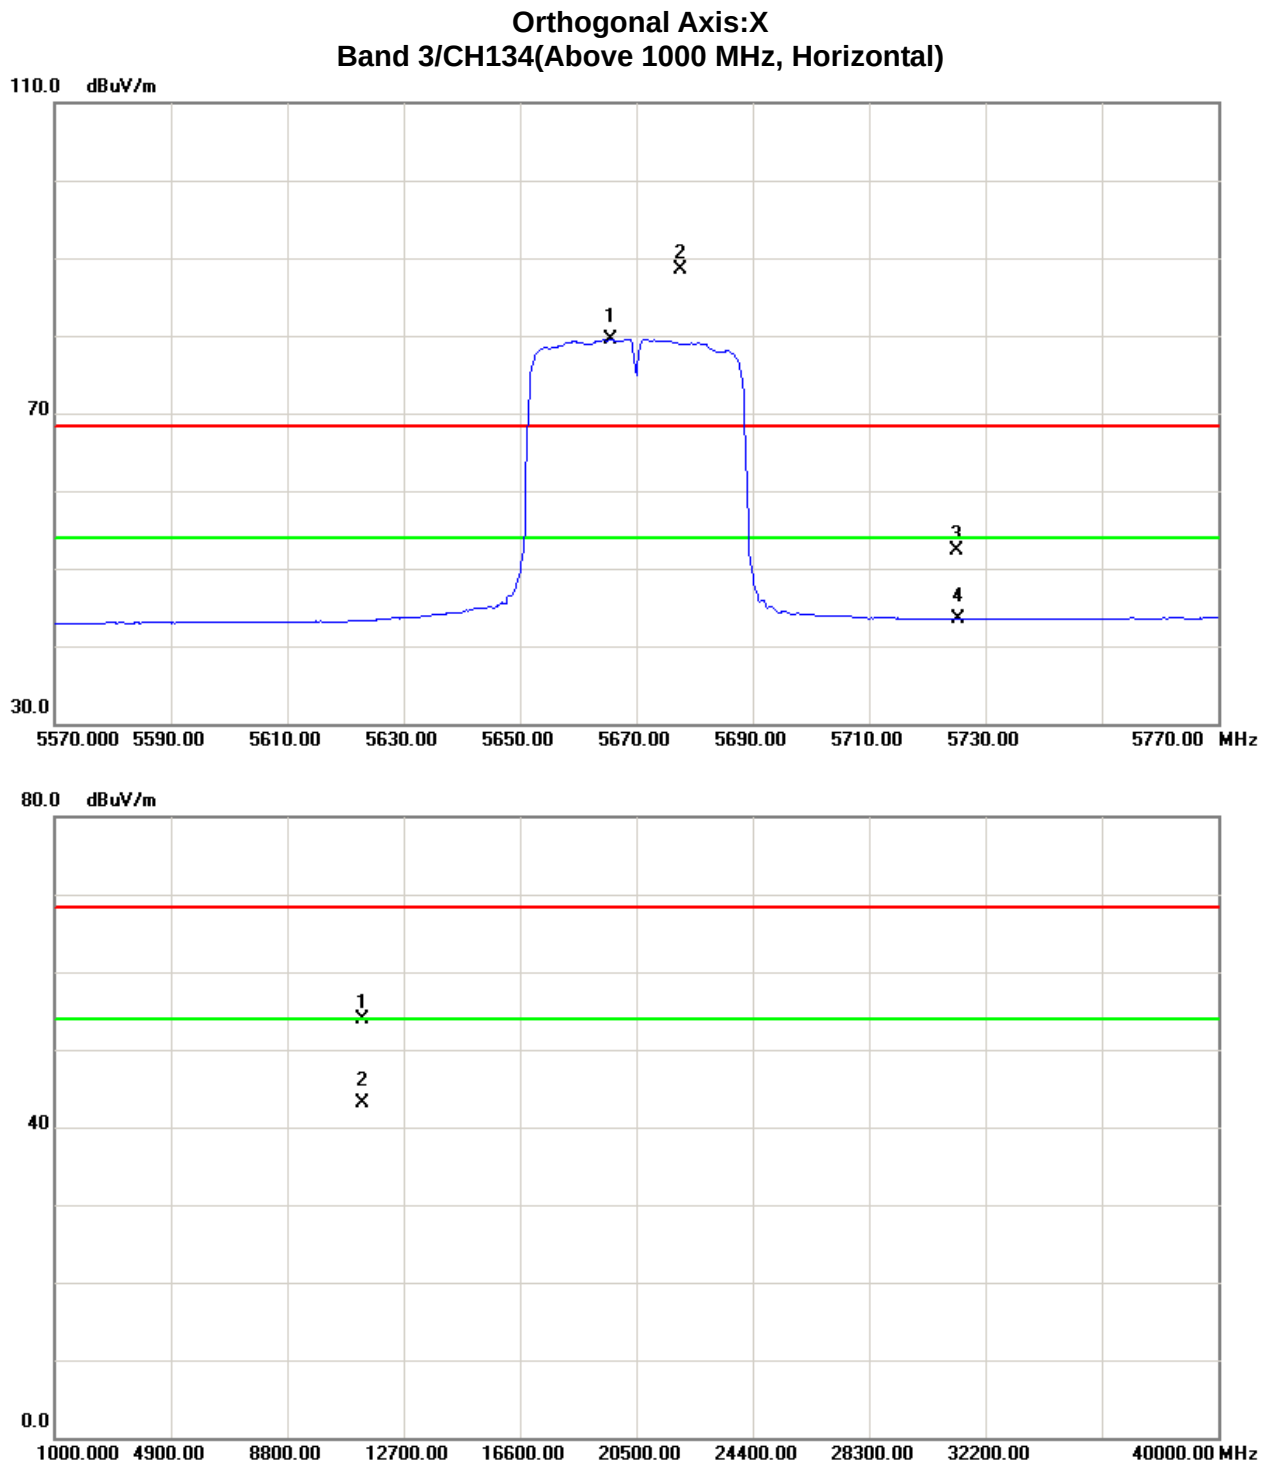



5. 26dB SPECTRUM BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart E			
Test Item	Limit	Frequency Range (MHz)	Result
26 dB Bandwidth	-----	5150MHz~5250 5250MHz~5350 5470MHz~5725	PASS

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP_40	100129	Nov.26.2013

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of Equipment List is One Year.

5.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,

b.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RB	300 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26dB below carrier

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP





5.1.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing.



5.1.6 TEST RESULTS

EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode /CH36, CH40, CH48/Integral Antenna		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	19.90	16.80
CH40	5200	20.20	16.90
CH48	5240	19.90	16.80

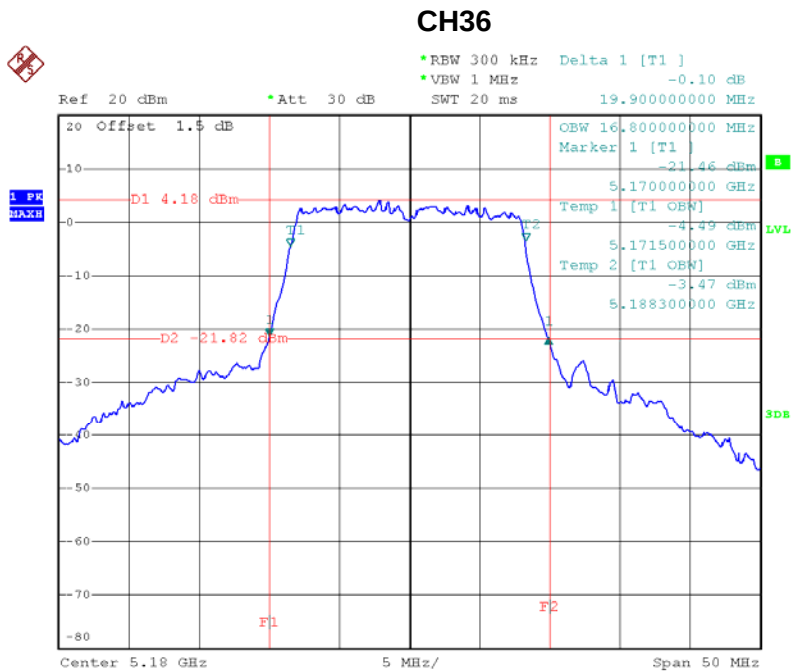

Date: 5.SEP.2013 16:18:18




CH40

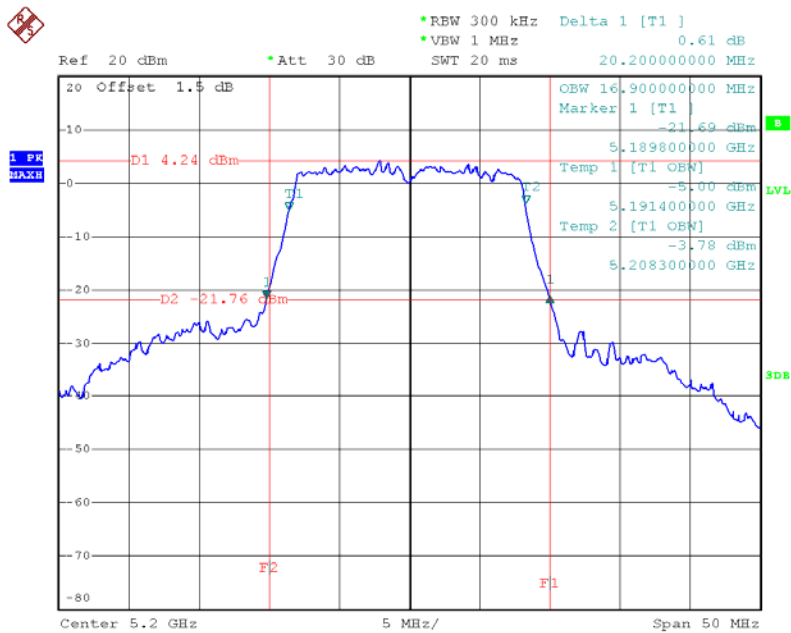

Date: 5.SEP.2013 16:22:52

CH48

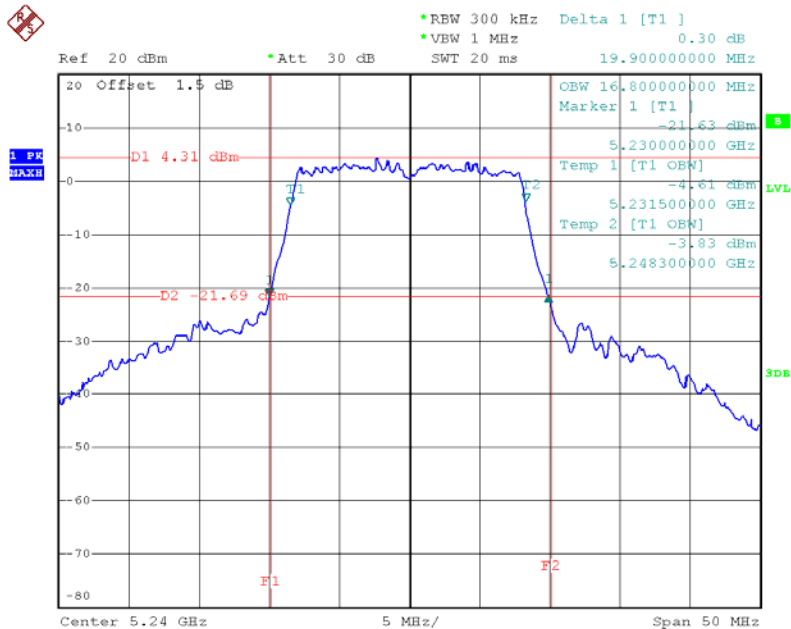


Date: 5.SEP.2013 16:26:06



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TXN20 Mode /CH36, CH40, CH48/Integral Antenna		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.80	17.70
CH40	5200	20.70	17.70
CH48	5240	20.90	17.70

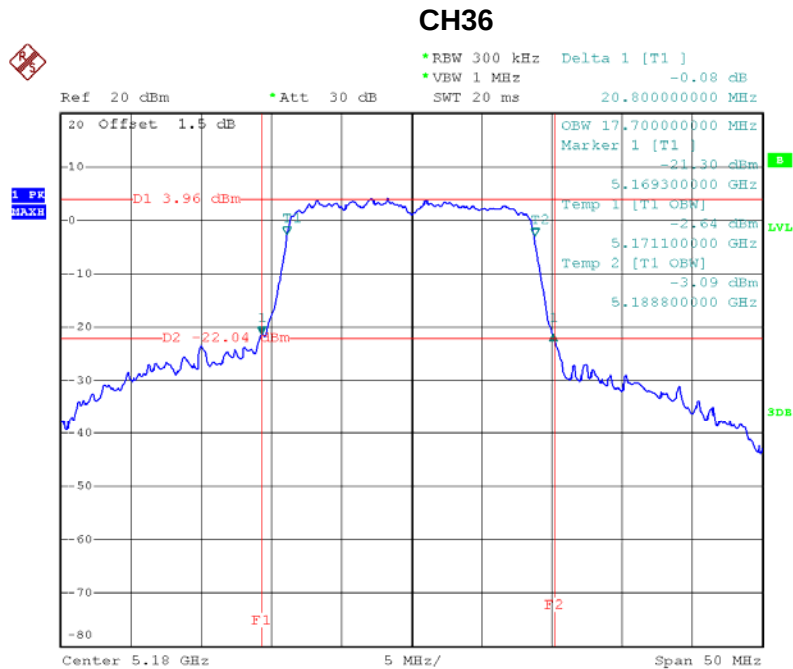

Date: 21.AUG.2013 17:07:32




CH40

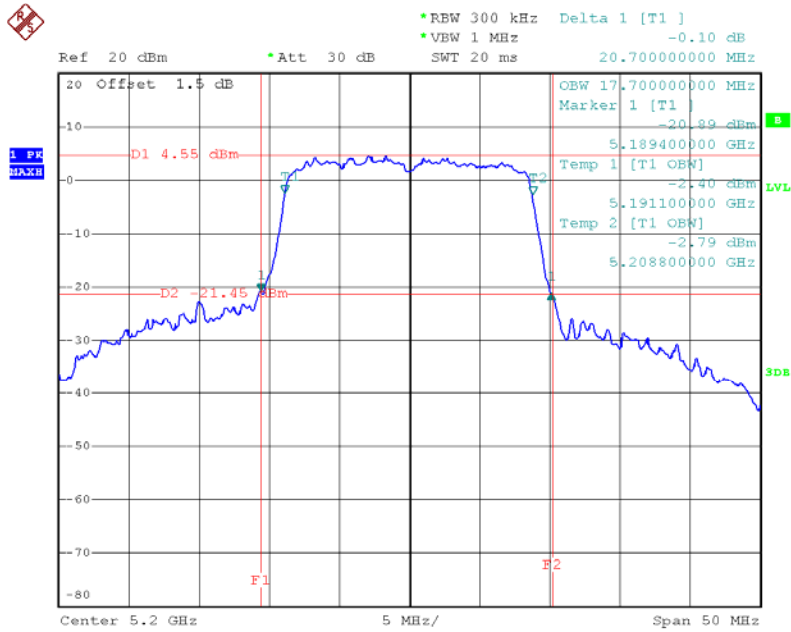

Date: 21.AUG.2013 17:19:15

CH48

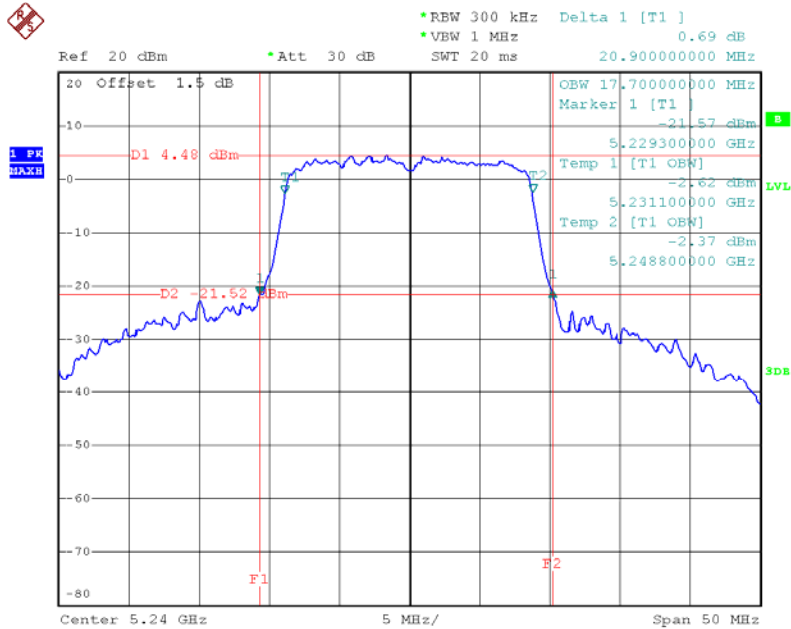


Date: 21.AUG.2013 17:22:57



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TXN40 Mode /CH38, CH46/Integral Antenna		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.60	36.20
CH46	5230	40.40	36.20

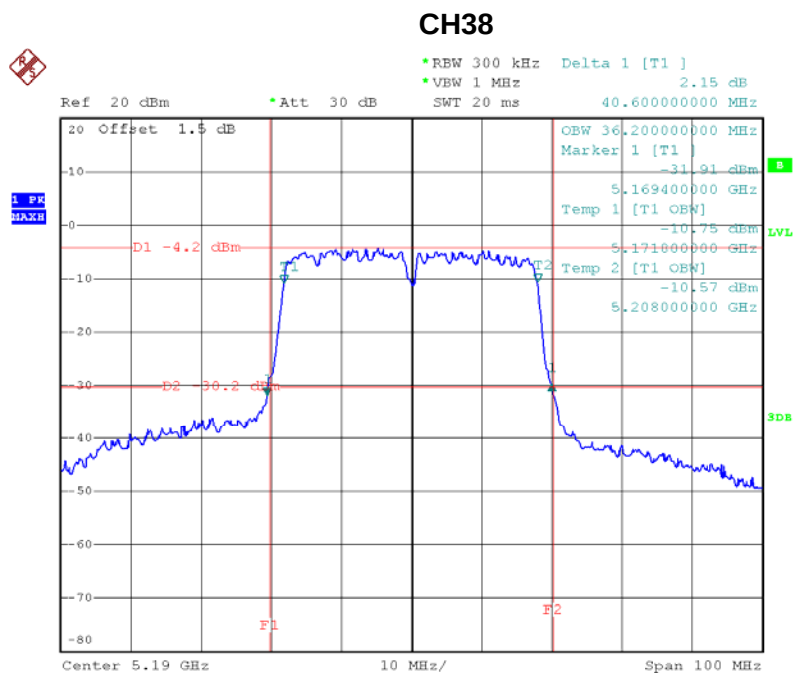

Date: 21.AUG.2013 18:00:15



CH46

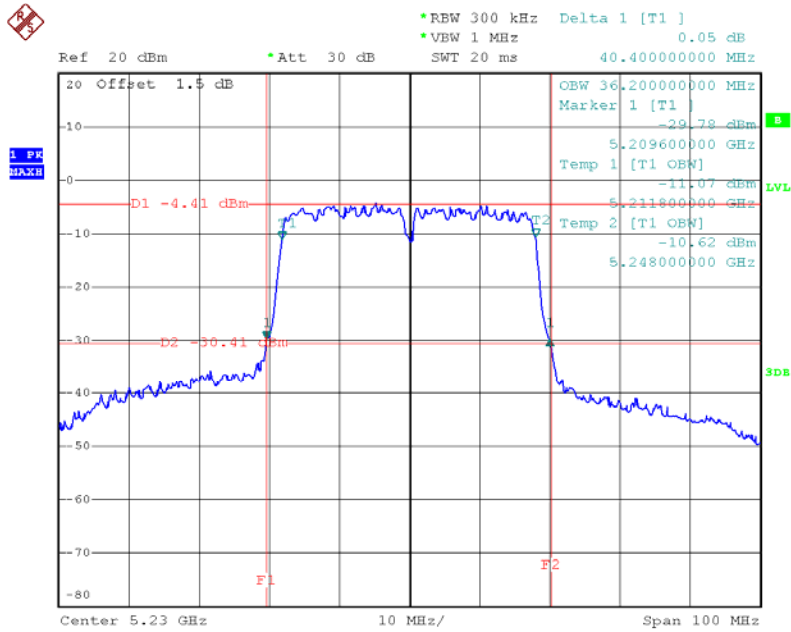


Date: 21.AUG.2013 18:02:23



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 2/TX A Mode /CH52, CH56, CH64/Integral Antenna		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	19.90	16.80
CH56	5280	20.00	16.80
CH64	5320	20.40	17.00

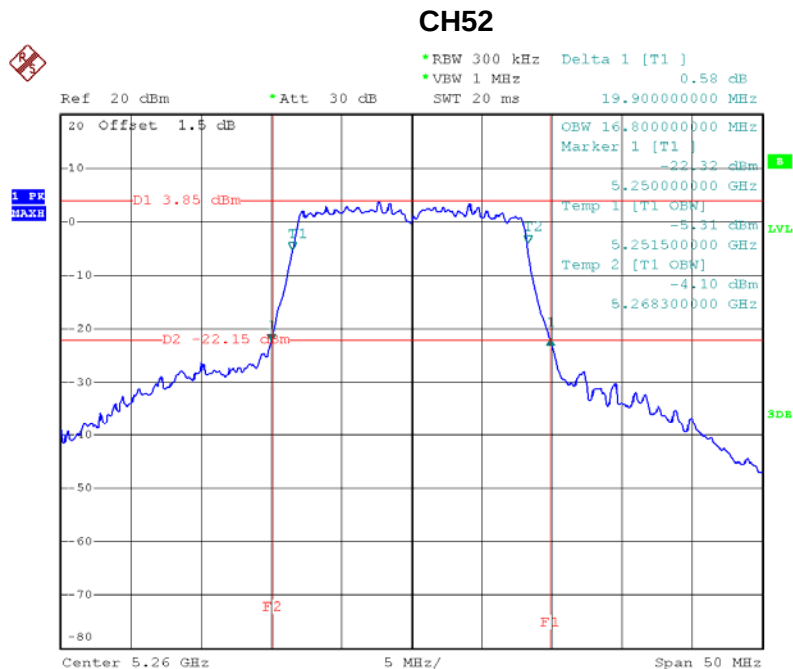

Date: 5.SEP.2013 16:29:39




CH56

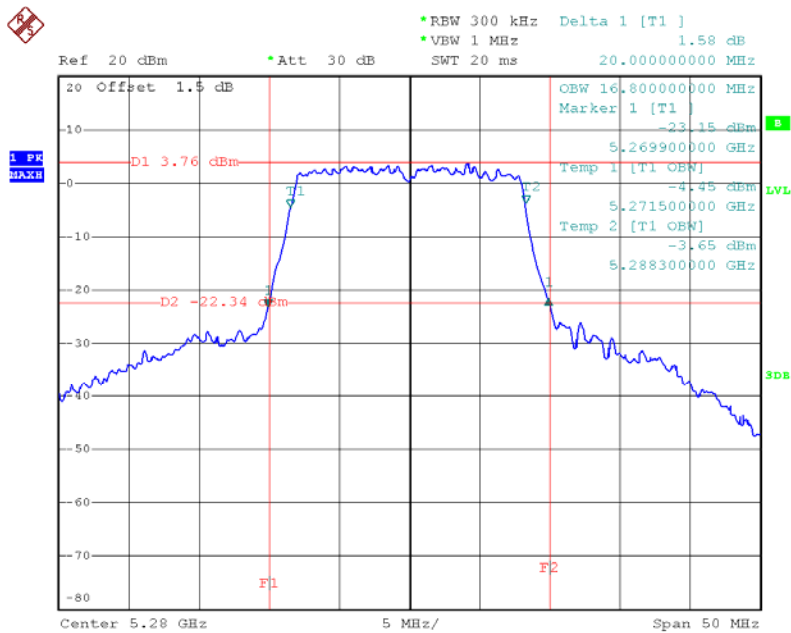

Date: 5.SEP.2013 16:33:49

CH64

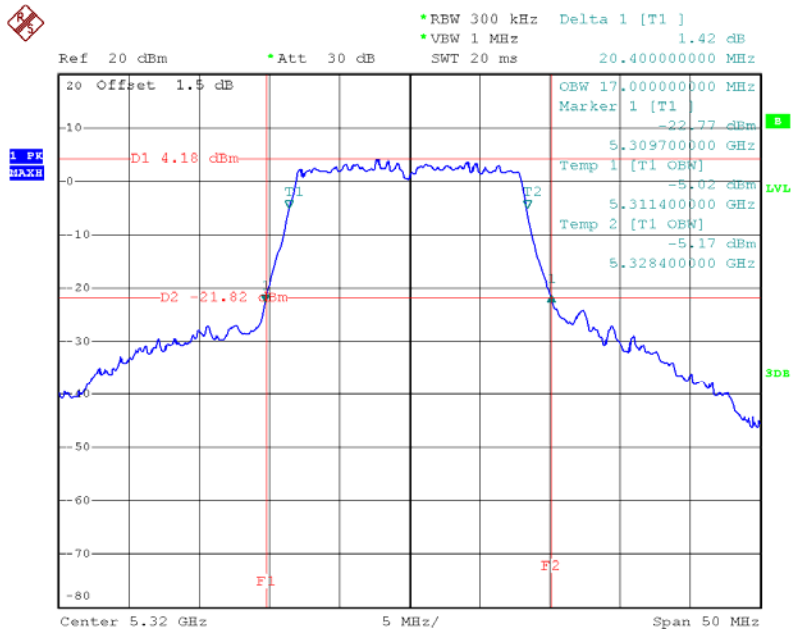


Date: 5.SEP.2013 16:37:03



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 2/TX N20 Mode /CH52, CH56, CH64/Integral Antenna		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.60	17.70
CH56	5280	20.70	17.70
CH64	5320	20.60	17.70

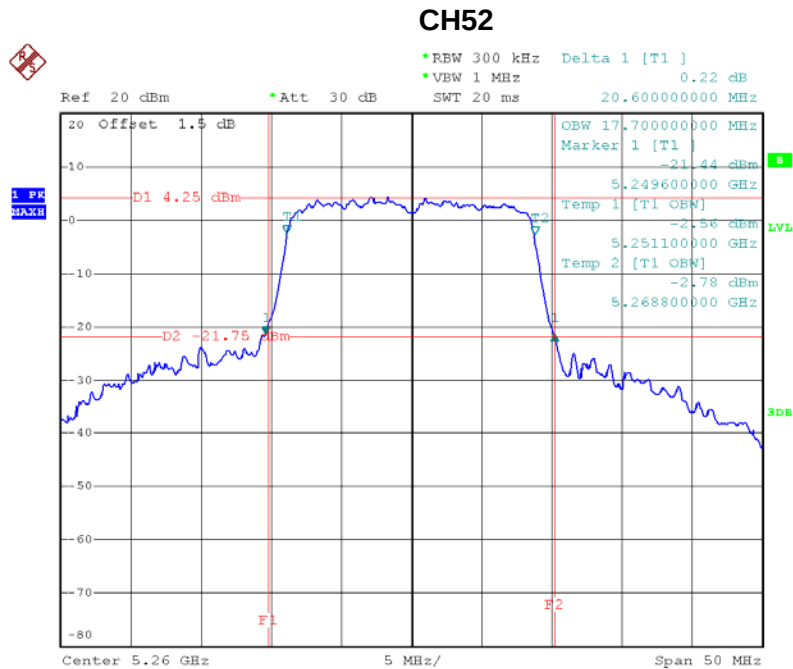

Date: 21.AUG.2013 17:27:42




CH56

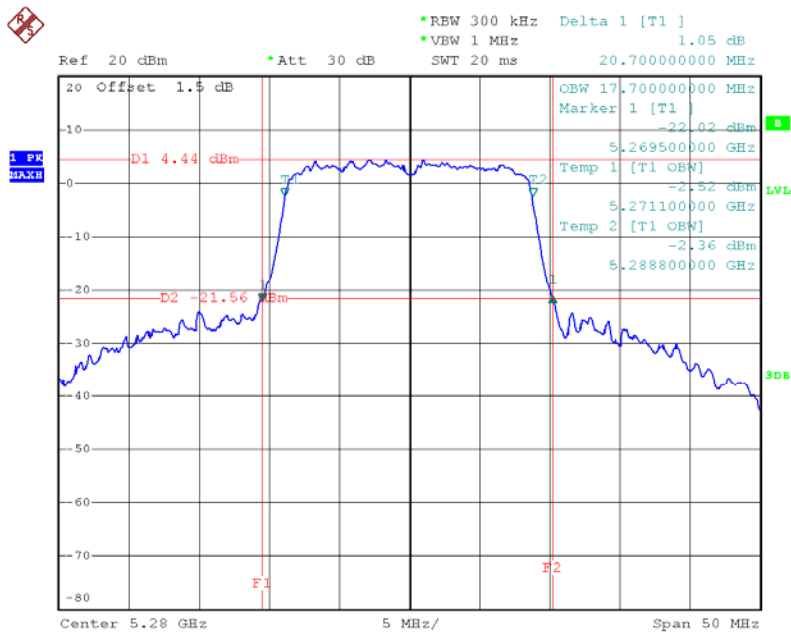

Date: 21.AUG.2013 17:29:38

CH64

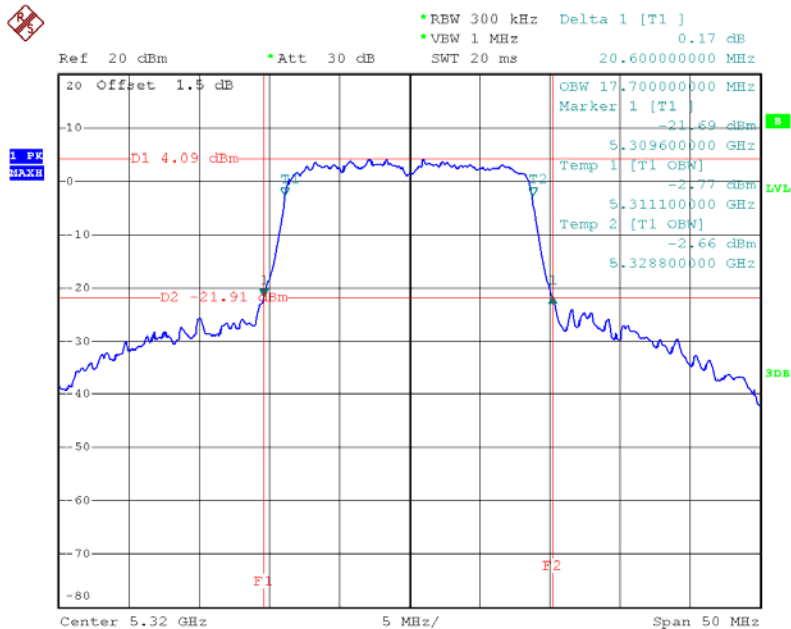


Date: 21.AUG.2013 17:34:35



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 2/TX N40 Mode /CH54, CH62/Integral Antenna		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.60	36.00
CH62	5310	40.20	36.00

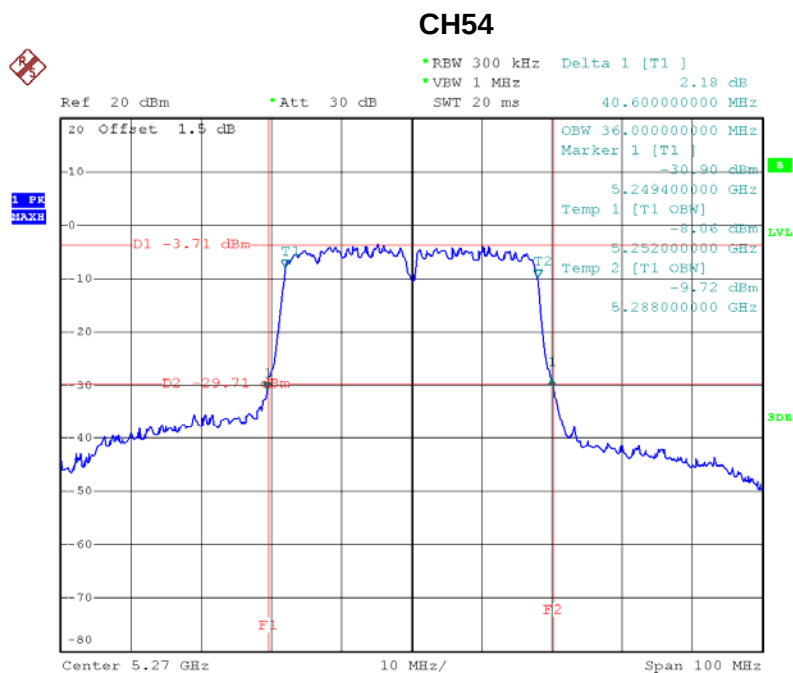

Date: 21.AUG.2013 18:06:36



CH62

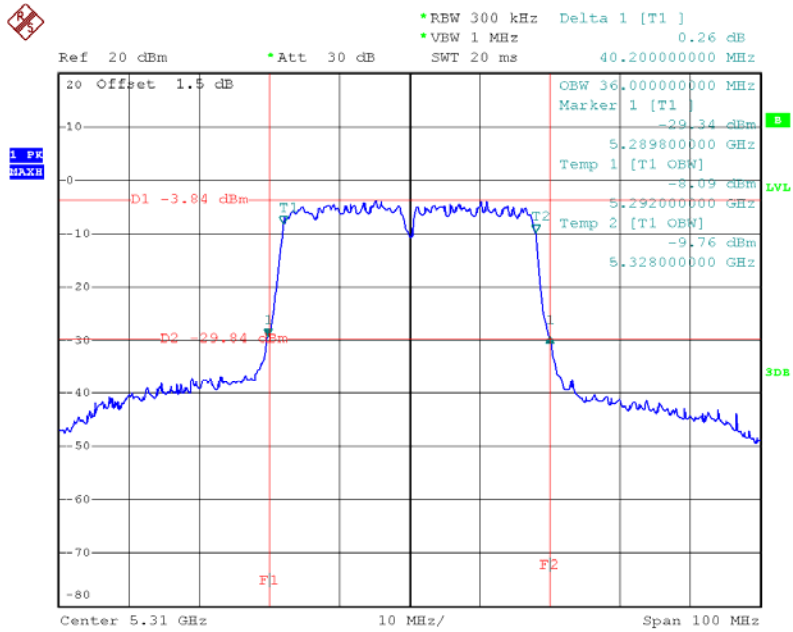


Date: 21.AUG.2013 18:08:05



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 3/TX A Mode /CH100, CH116,CH140/Integral Antenna		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	20.40	16.90
CH116	5580	20.10	16.80
CH140	5700	20.30	17.00


CH100

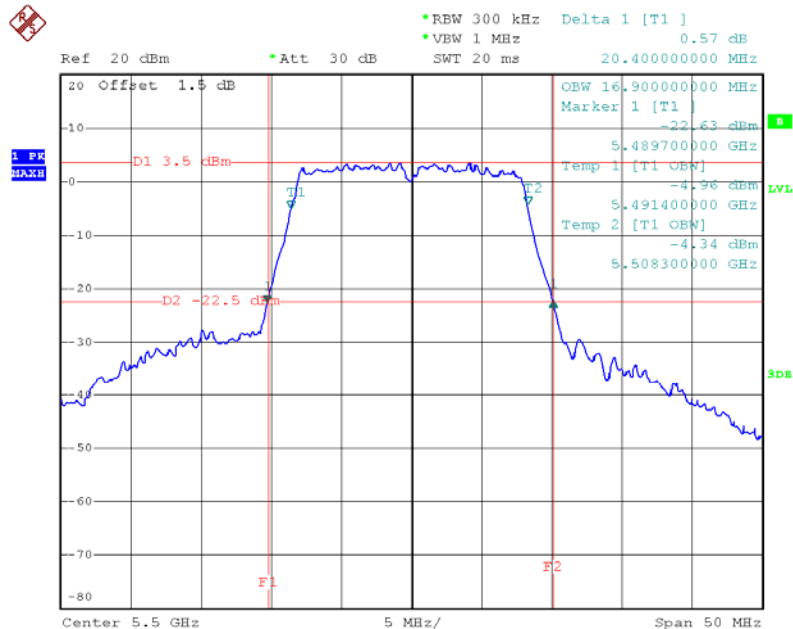

Date: 5.SEP.2013 16:39:37




CH116

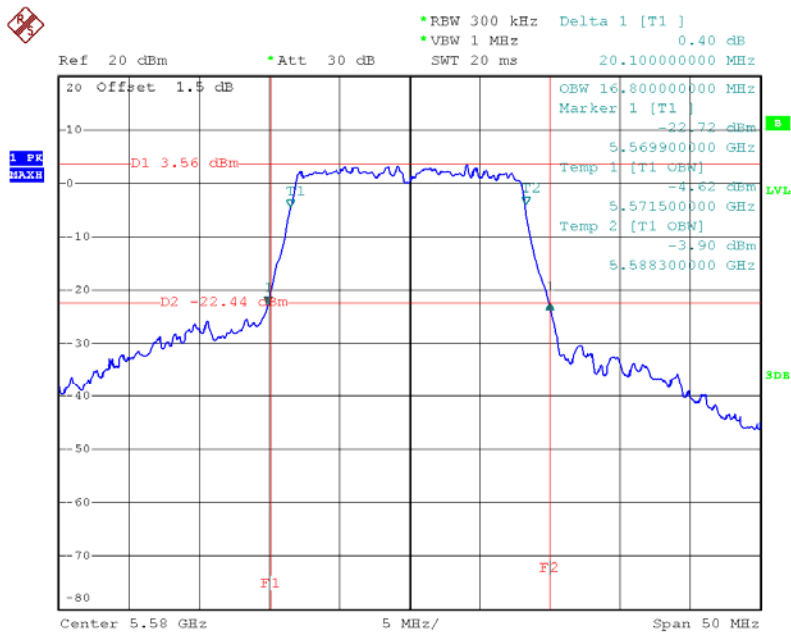

Date: 5.SEP.2013 16:43:35

CH140

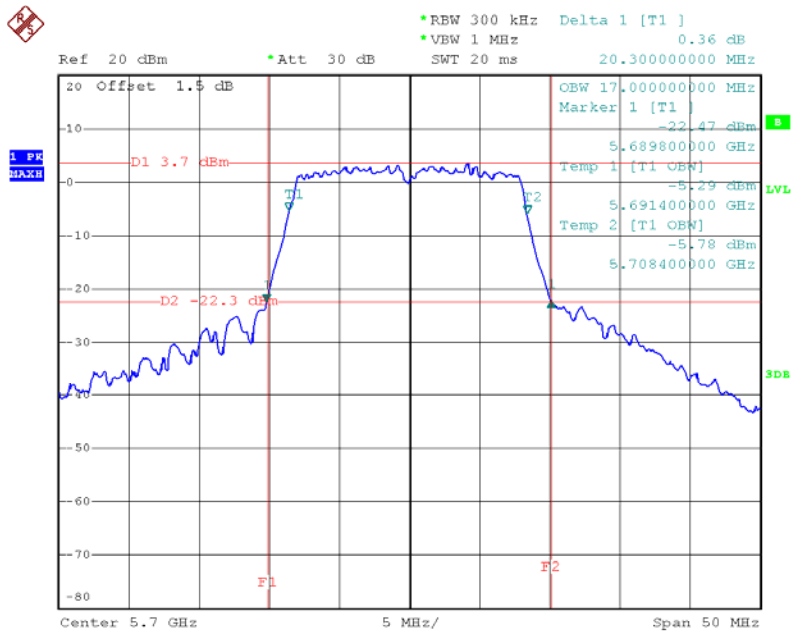


Date: 5.SEP.2013 16:46:32



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 3/TX N20 Mode /CH100, CH116,CH140/Integral Antenna		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	21.00	17.70
CH116	5580	20.80	17.70
CH140	5700	20.60	17.70

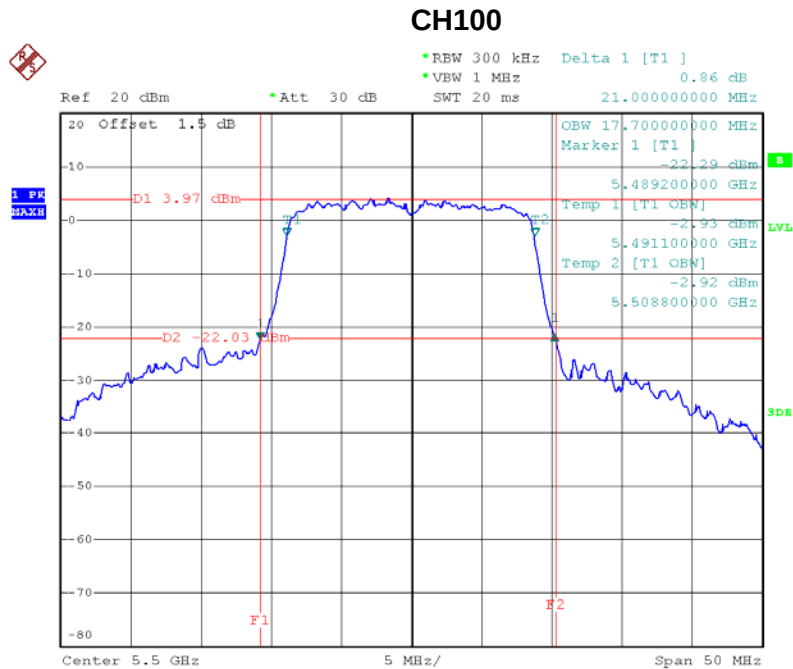

Date: 24.AUG.2013 17:23:13




CH116

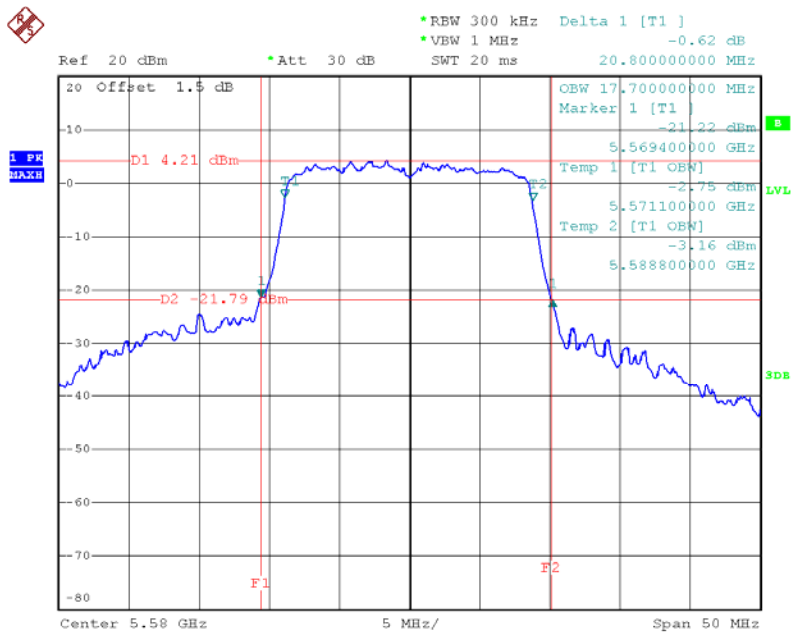

Date: 21.AUG.2013 17:36:04

CH140

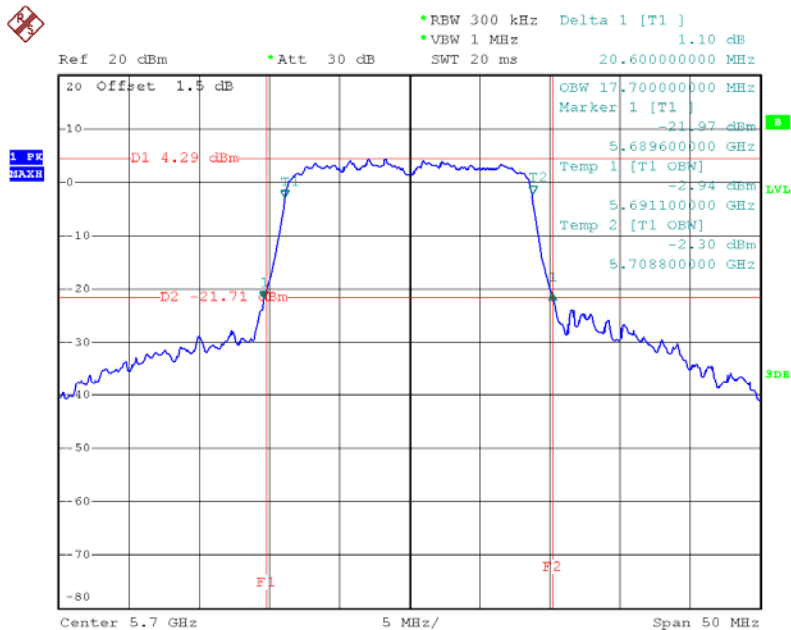


Date: 21.AUG.2013 17:40:02



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 3/TX N40 Mode /CH102, CH110,CH134/Integral Antenna		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH102	5510	40.40	35.80
CH110	5550	40.00	36.00
CH134	5670	40.60	36.00


CH102

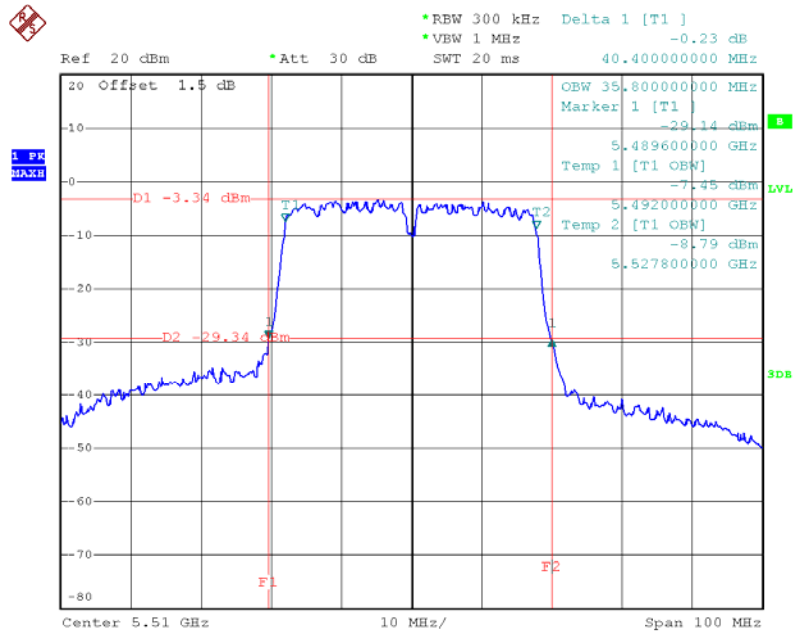

Date: 21.AUG.2013 18:11:45




CH110

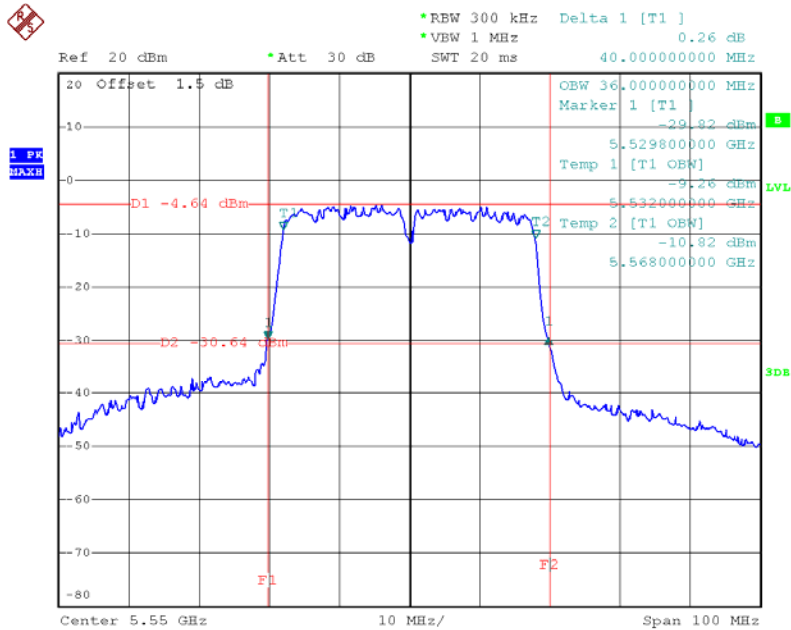

Date: 21.AUG.2013 18:14:27

CH134

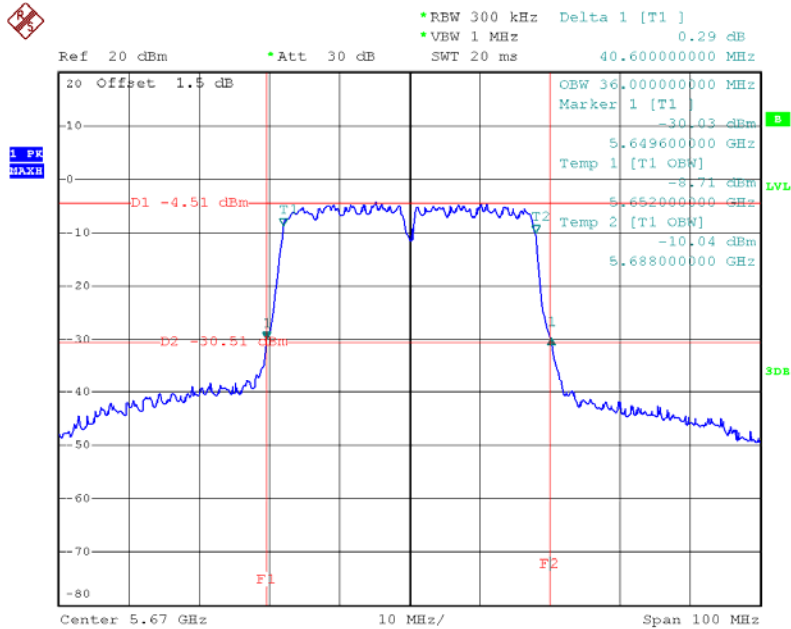


Date: 21.AUG.2013 18:18:10



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TX A Mode /CH36, CH40, CH48/Dipole Antenna with external cable		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	20.30	16.90
CH40	5200	20.20	16.80
CH48	5240	20.00	16.80

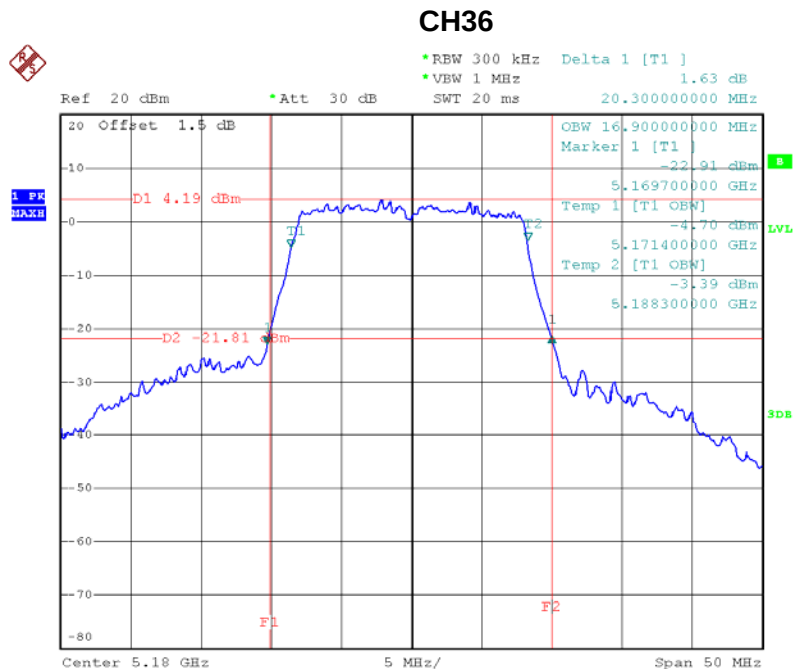

Date: 5.SEP.2013 16:52:35




CH40

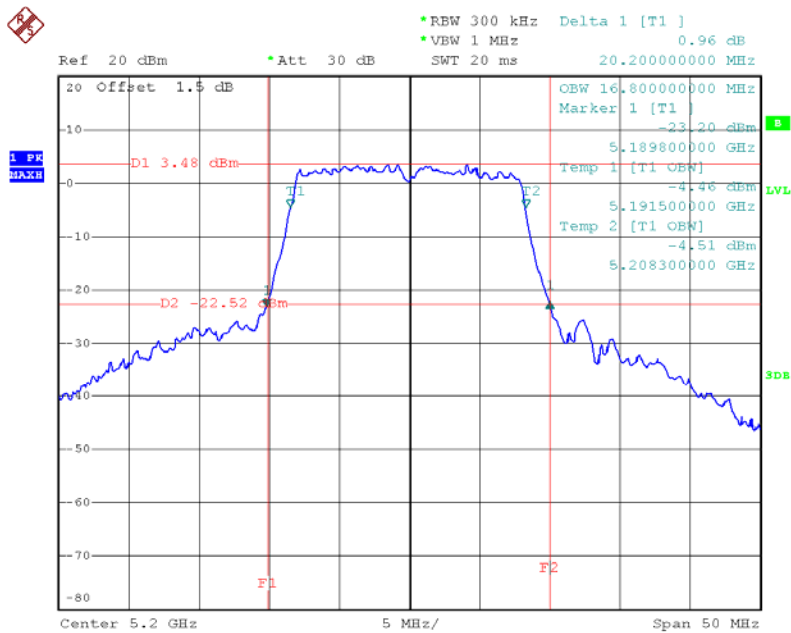

Date: 5.SEP.2013 16:55:22

CH48

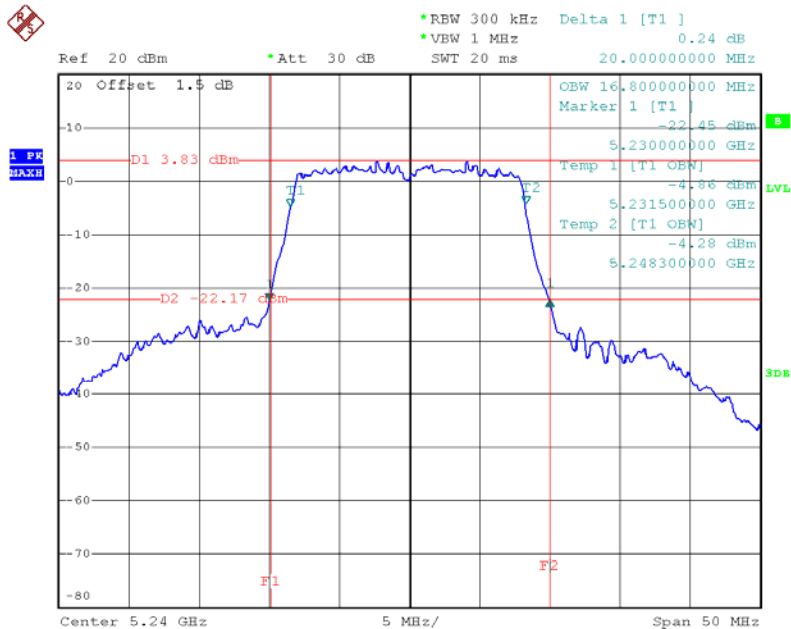


Date: 5.SEP.2013 16:57:40



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TXN20 Mode /CH36, CH40, CH48/Dipole Antenna with external cable		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH36	5180	21.00	17.70
CH40	5200	20.80	17.70
CH48	5240	20.90	17.70

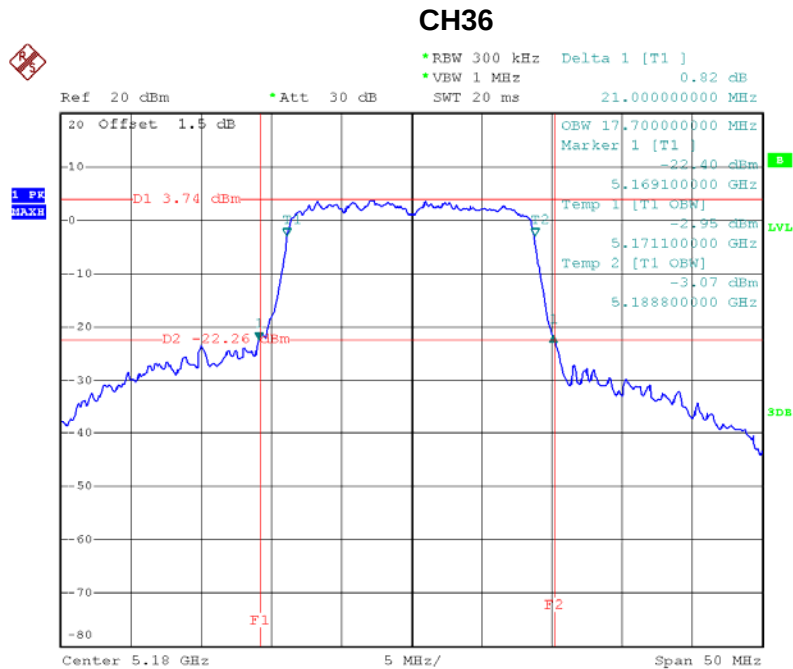

Date: 24.AUG.2013 17:00:20




CH40

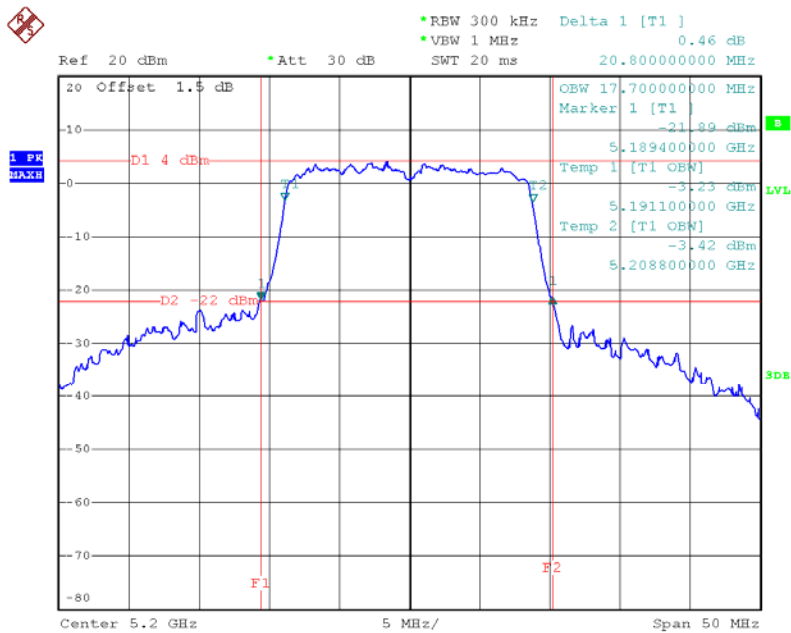

Date: 24.AUG.2013 17:06:54

CH48

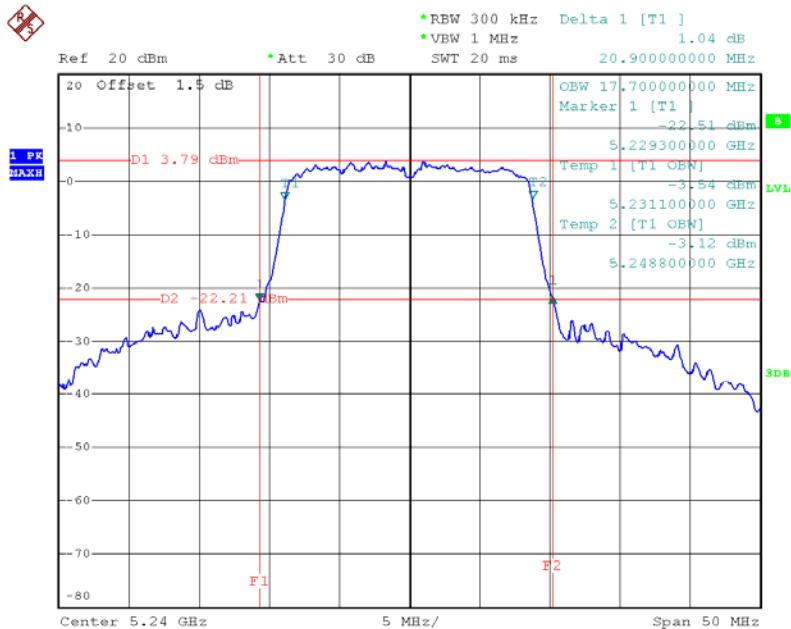


Date: 24.AUG.2013 17:09:13



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 1/TXN40 Mode /CH38, CH46/Dipole Antenna with external cable		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH38	5190	40.40	36.20
CH46	5230	40.40	36.20

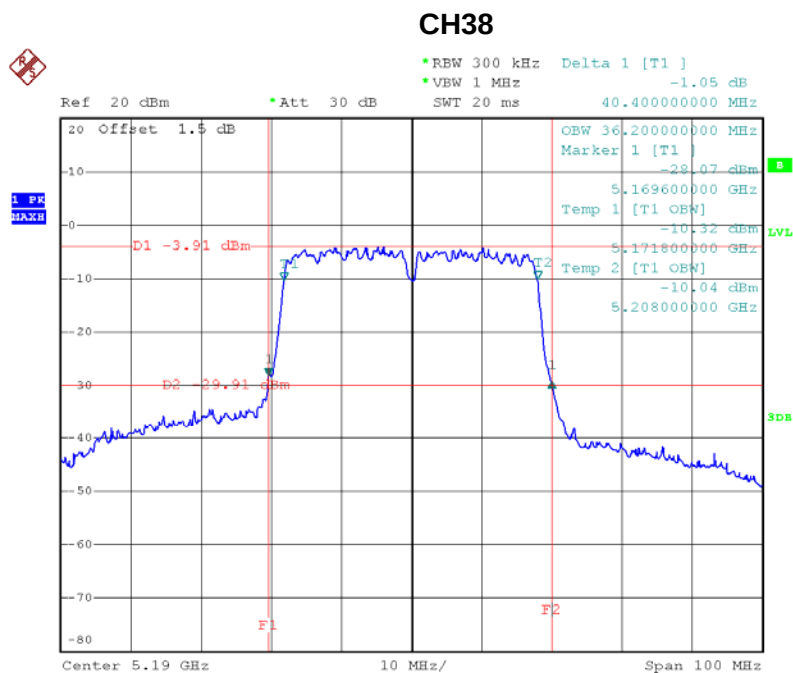

Date: 24.AUG.2013 17:38:03



CH46

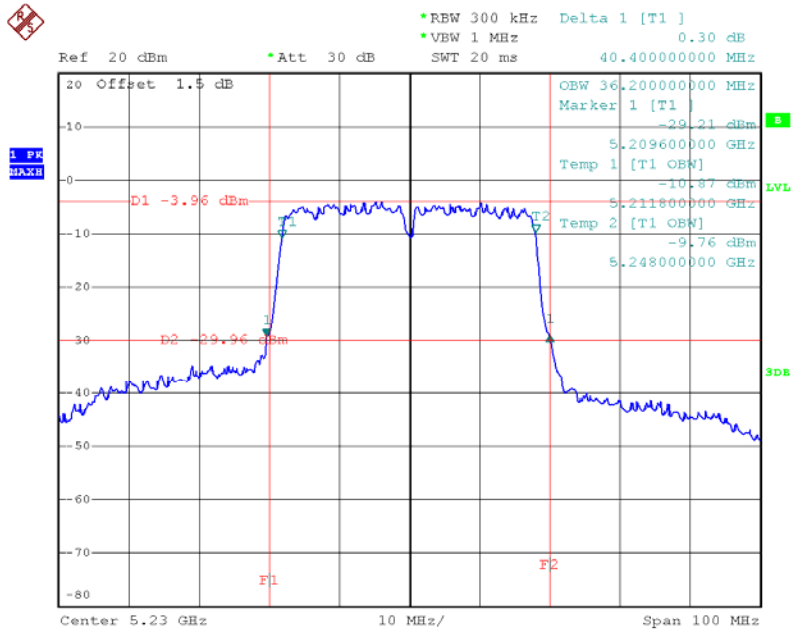


Date: 24.AUG.2013 17:47:23



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 2/TX A Mode /CH52, CH56, CH64/Dipole Antenna with external cable		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	19.90	16.80
CH56	5280	20.10	16.80
CH64	5320	20.00	16.80

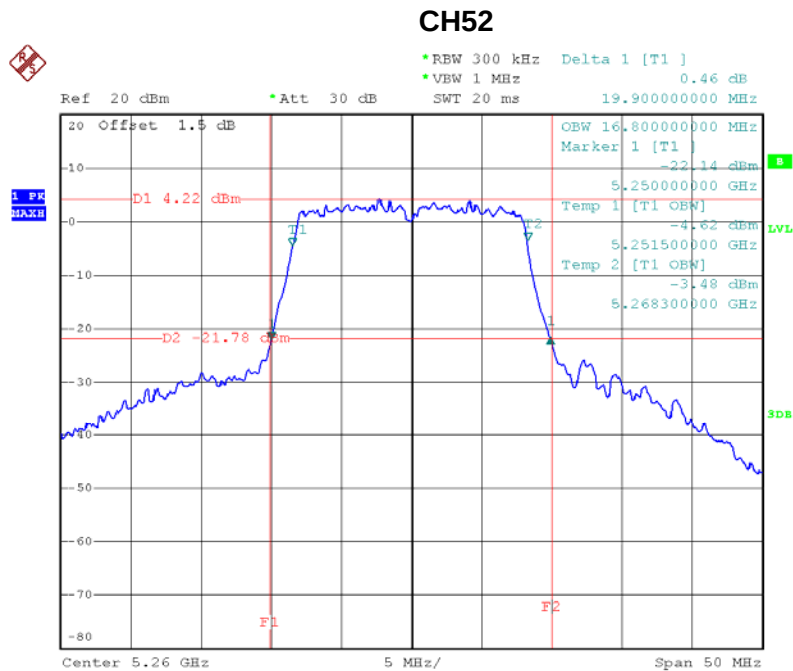

Date: 5.SEP.2013 17:00:39




CH56

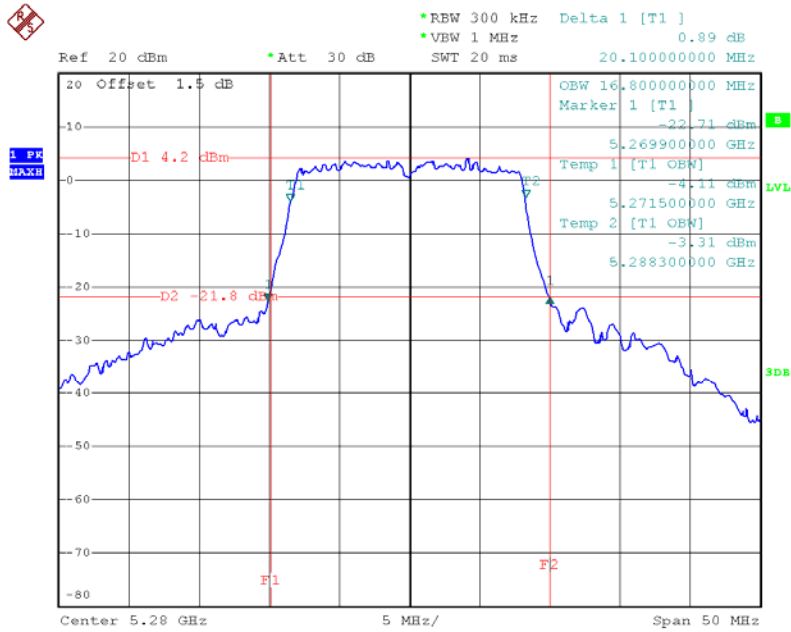

Date: 5.SEP.2013 17:02:50

CH64

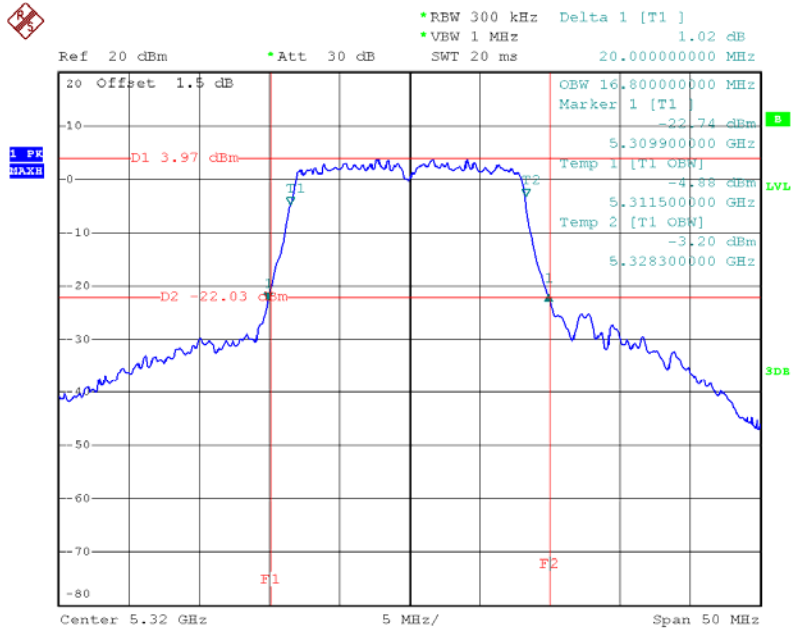


Date: 5.SEP.2013 17:05:56



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 2/TX N20 Mode /CH52, CH56, CH64/Dipole Antenna with external cable		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH52	5260	20.10	17.70
CH56	5280	20.20	17.70
CH64	5320	20.00	17.60

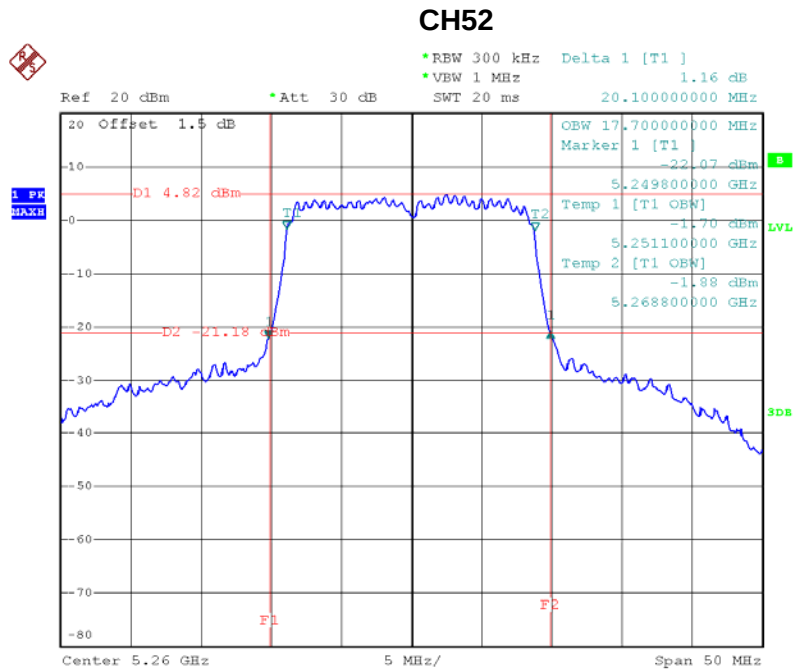

Date: 24.AUG.2013 17:12:23




CH56

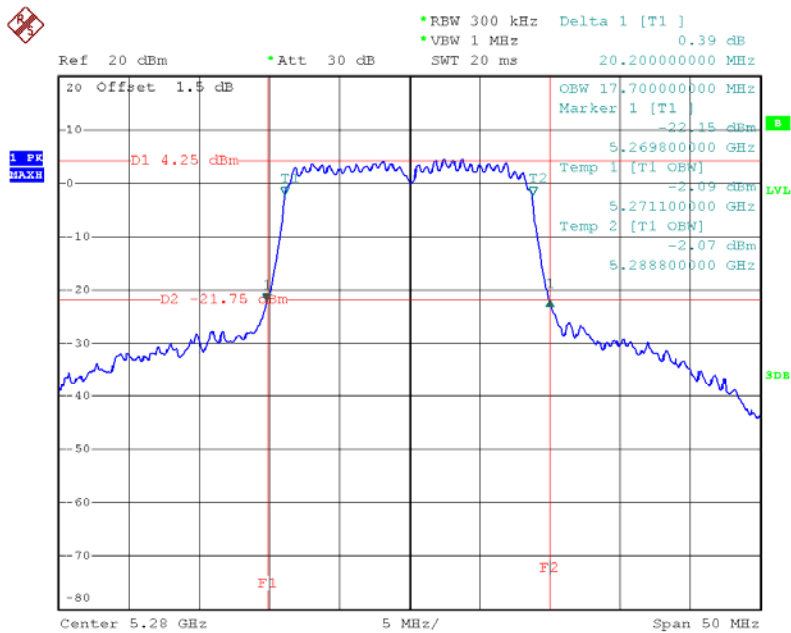

Date: 24.AUG.2013 17:17:43

CH64

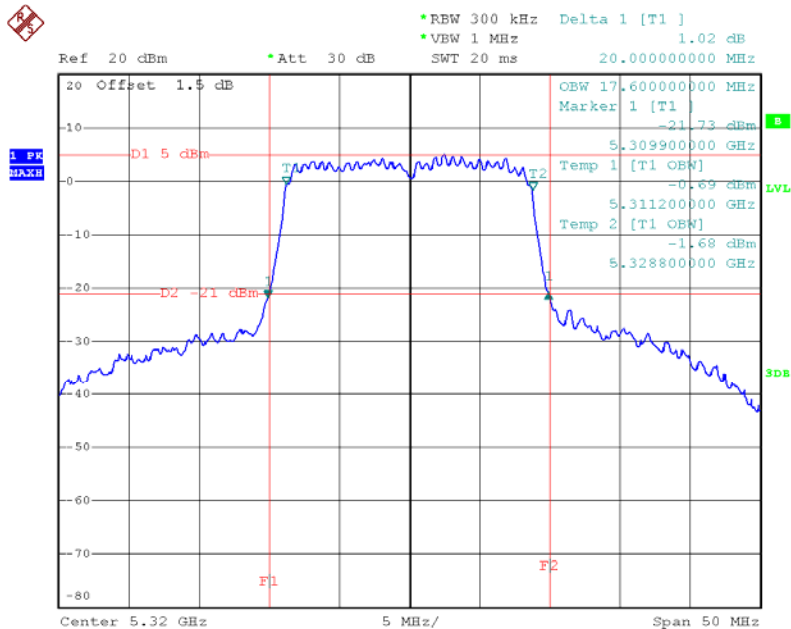


Date: 24.AUG.2013 17:20:19



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 2/TX N40 Mode /CH54, CH62/Dipole Antenna with external cable		


Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH54	5270	40.20	36.00
CH62	5310	40.40	36.00

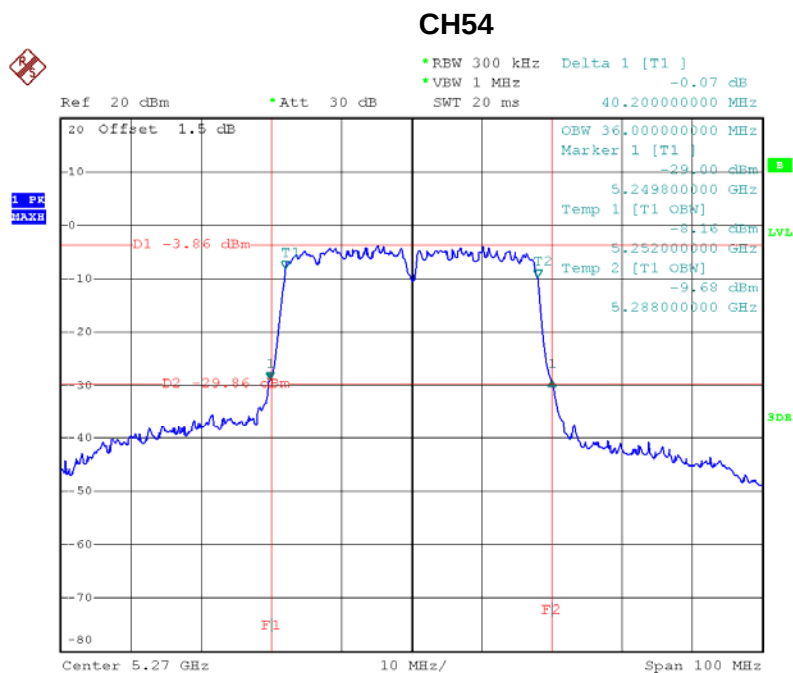

Date: 24.AUG.2013 17:51:00



CH62

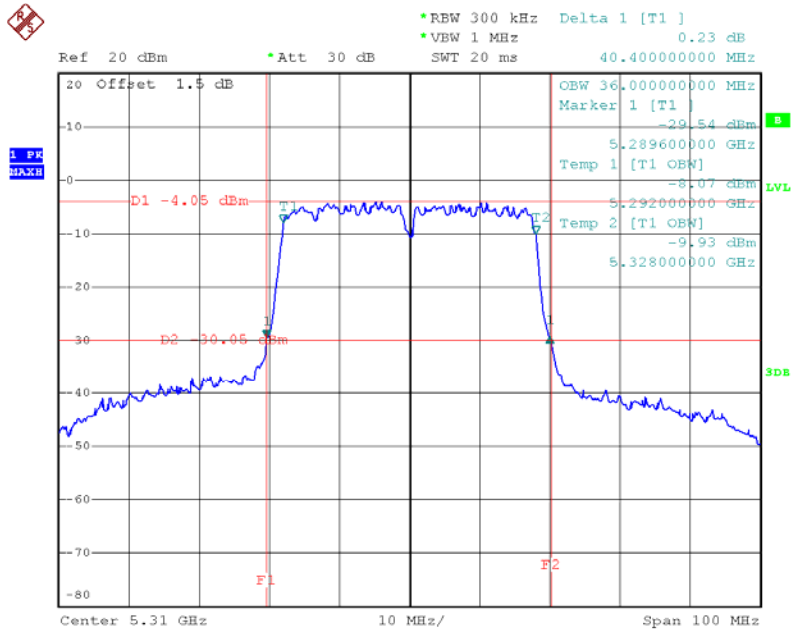


Date: 24.AUG.2013 17:52:44



EUT:	Cisco Edge 340	Model Name :	CS-E340W
Temperature:	25 °C	Relative Humidity:	58 %
Test Voltage:	AC 120V/60Hz		
Test Mode :	Band 3/TX A Mode /CH100, CH116,CH140/Dipole Antenna with external cable		

Channel	Frequency (MHz)	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
CH100	5500	19.90	16.80
CH116	5580	20.00	16.80
CH140	5700	20.20	16.80

CH100

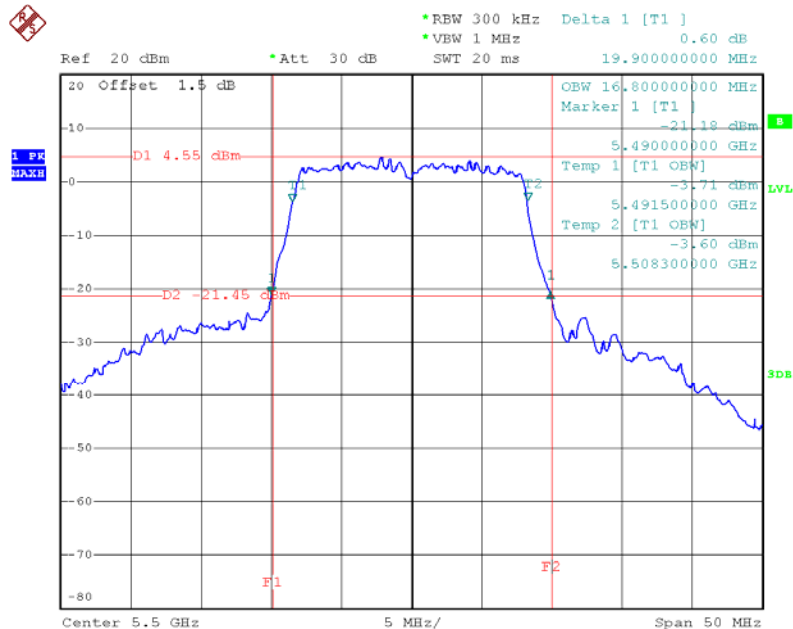

Date: 5.SEP.2013 17:08:19