


EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 1_5835MHz	Test Voltage	AC 120V/60Hz

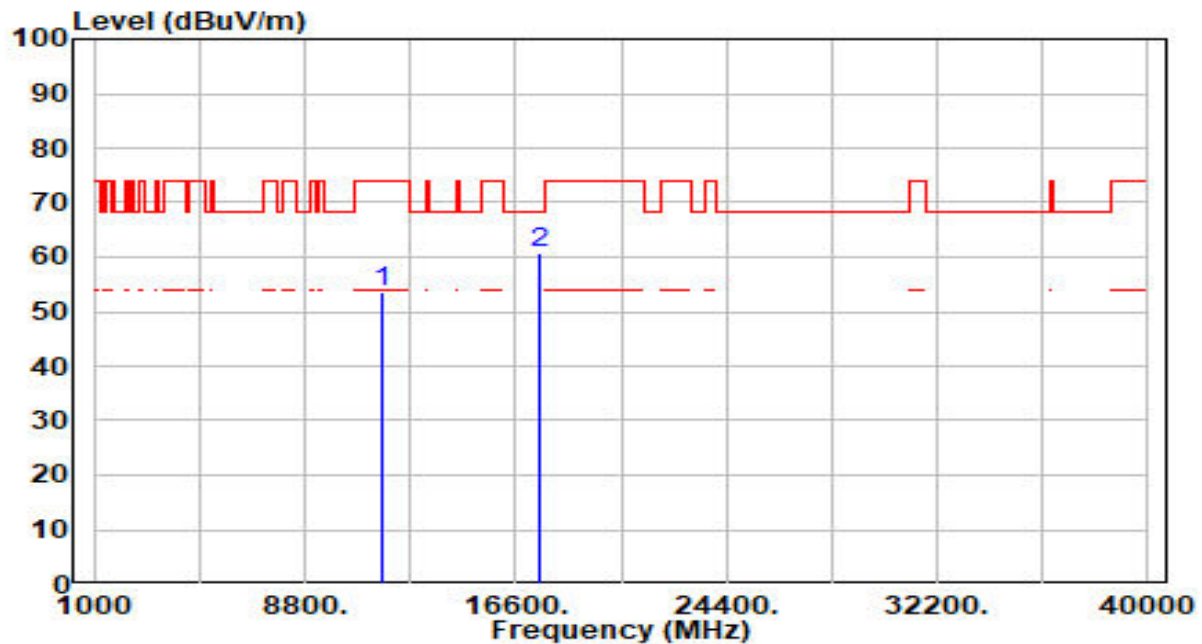


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11670.000	33.87	19.53	53.40	-20.60	74.00	300	350	Peak
2	* 17505.000	33.17	27.77	60.94	-7.26	68.20	300	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5735MHz	Test Voltage	AC 120V/60Hz

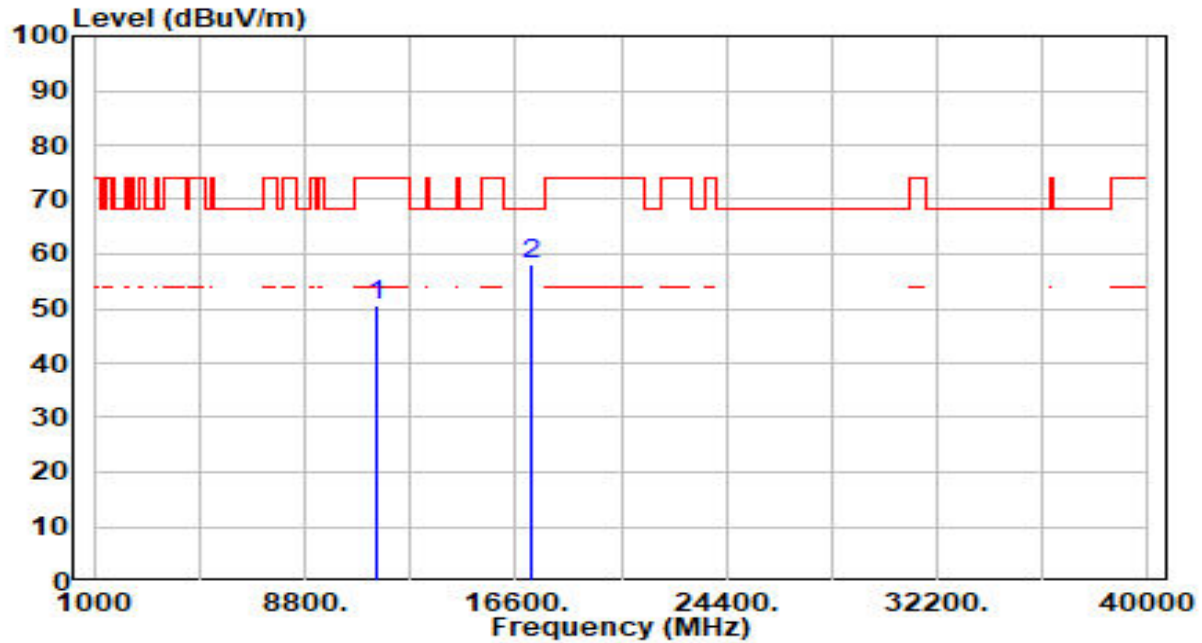


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11470.000	30.59	19.79	50.38	-23.62	74.00	300	172	Peak
2	* 17205.000	32.50	25.54	58.04	-10.16	68.20	300	326	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5735MHz	Test Voltage	AC 120V/60Hz

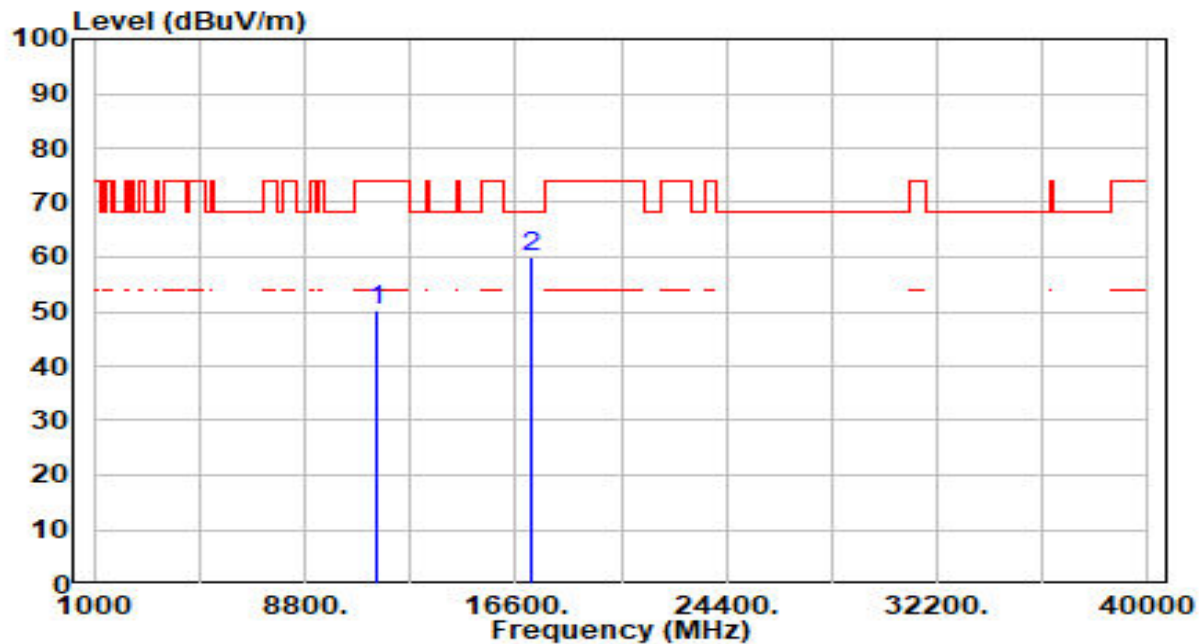


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11470.000	30.52	19.79	50.32	-23.68	74.00	300	355	Peak
2	* 17205.000	34.29	25.54	59.83	-8.37	68.20	300	323	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5760MHz	Test Voltage	AC 120V/60Hz

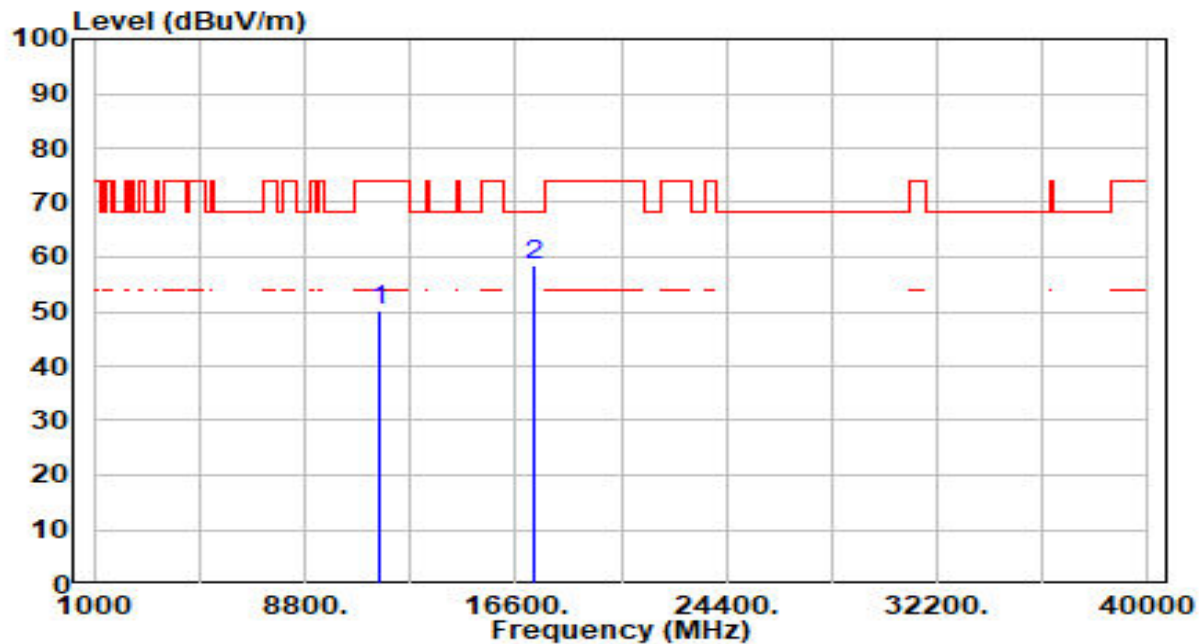


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11520.000	30.52	19.81	50.33	-23.67	74.00	300	123	Peak
2	* 17280.000	32.44	26.10	58.53	-9.67	68.20	300	272	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5760MHz	Test Voltage	AC 120V/60Hz

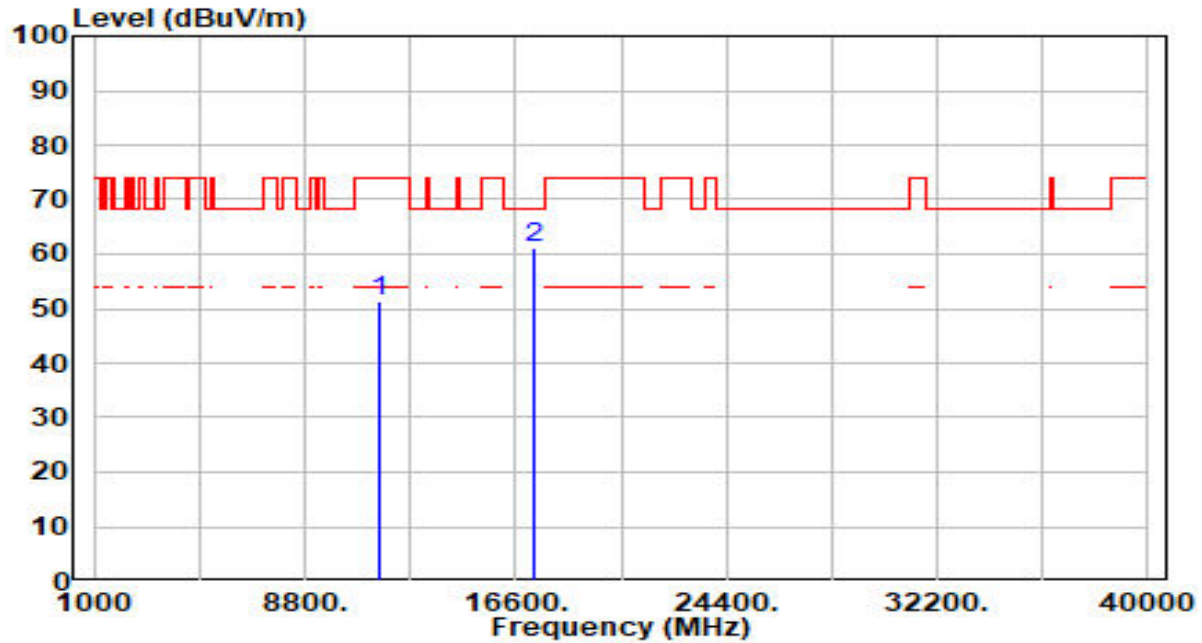


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11520.000	31.69	19.81	51.50	-22.50	74.00	300	240	Peak
2	* 17280.000	35.14	26.10	61.24	-6.96	68.20	300	215	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5785MHz	Test Voltage	AC 120V/60Hz

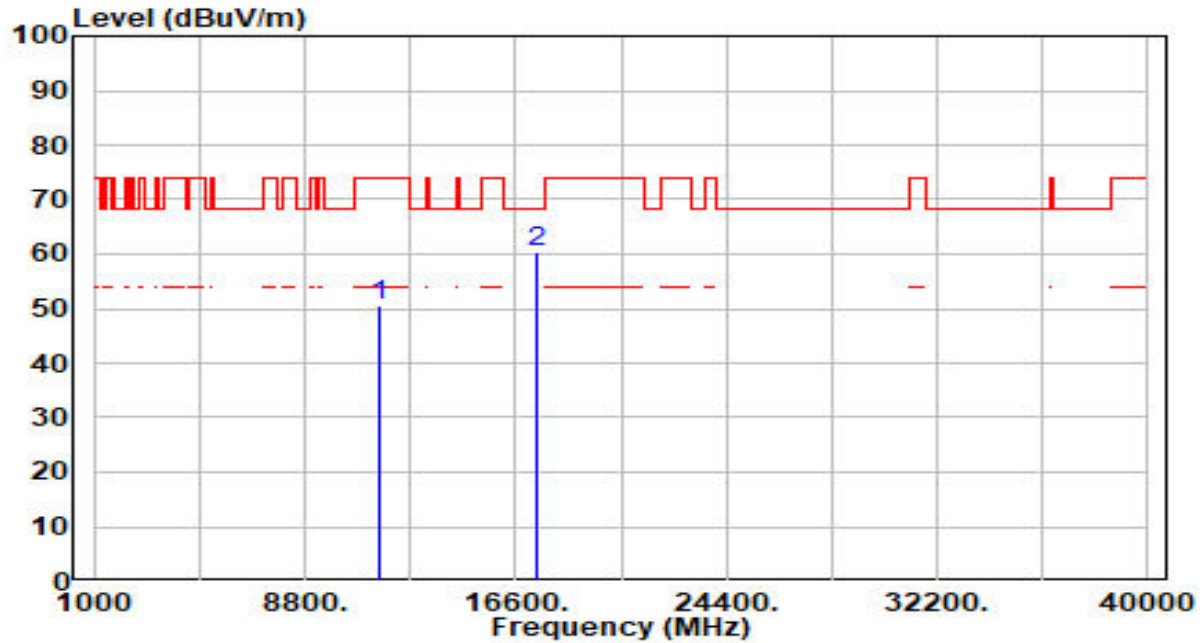


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	30.88	19.72	50.60	-23.40	74.00	300	255	Peak
2	* 17355.000	33.89	26.65	60.54	-7.66	68.20	300	319	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5785MHz	Test Voltage	AC 120V/60Hz

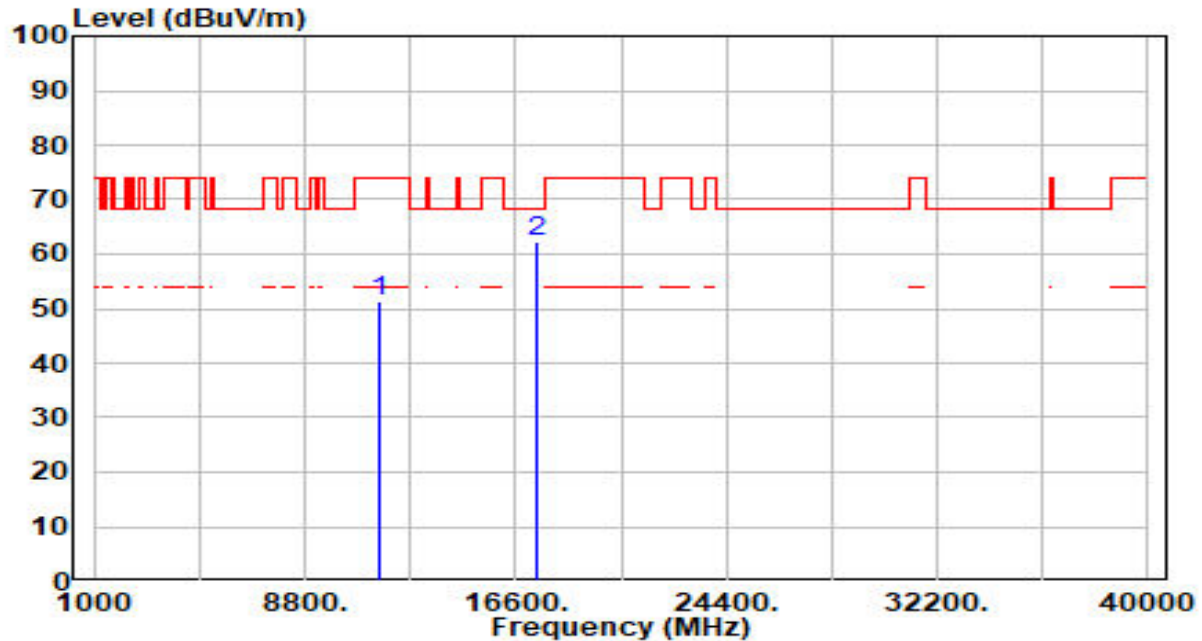


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	31.62	19.72	51.34	-22.66	74.00	300	7	Peak
2	* 17355.000	35.54	26.65	62.19	-6.01	68.20	300	210	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5810MHz	Test Voltage	AC 120V/60Hz

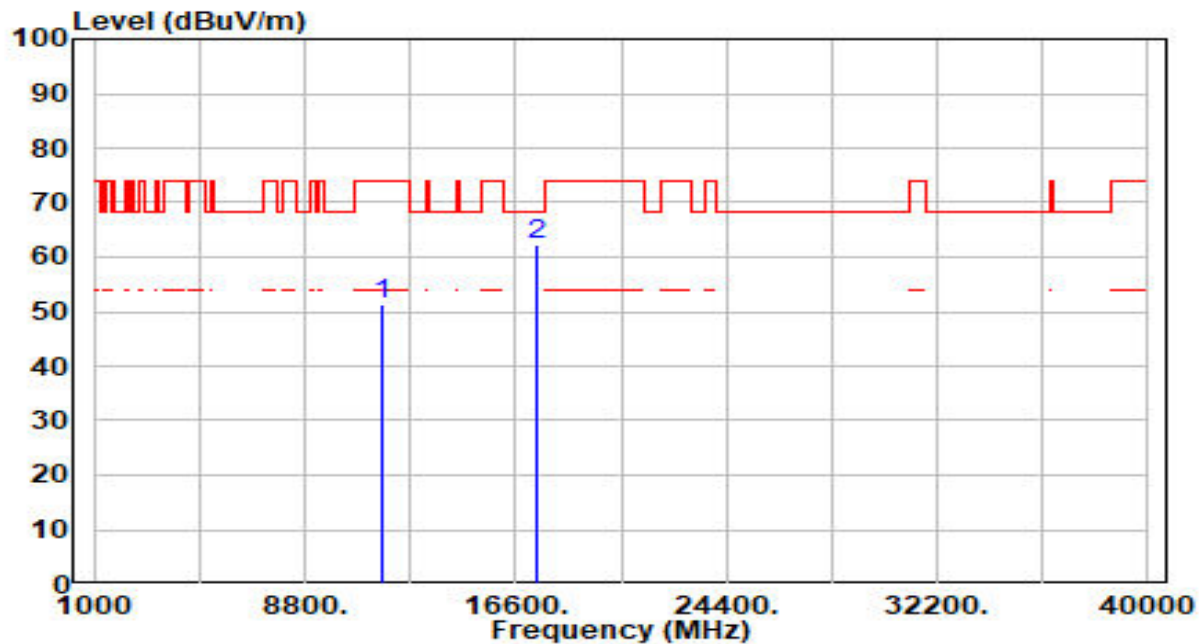


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11620.000	31.56	19.63	51.19	-22.81	74.00	300	282	Peak
2	* 17430.000	34.91	27.21	62.12	-6.08	68.20	300	297	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5810MHz	Test Voltage	AC 120V/60Hz

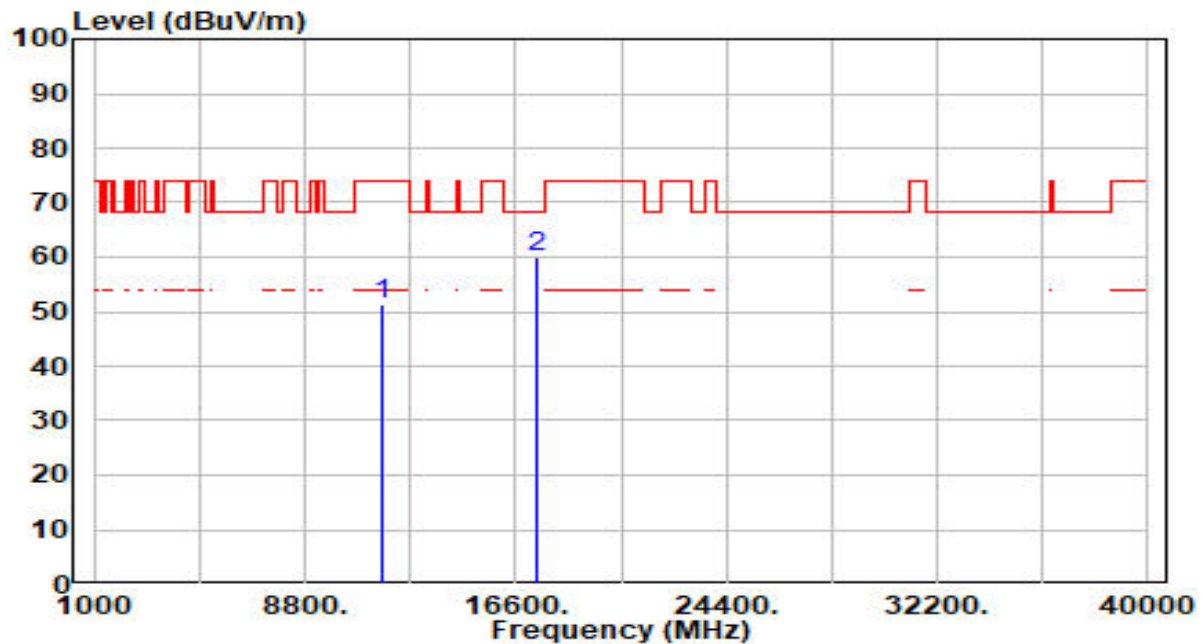


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11620.000	31.68	19.63	51.31	-22.69	74.00	300	333	Peak
2	* 17430.000	32.95	27.21	60.16	-8.04	68.20	300	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5835MHz	Test Voltage	AC 120V/60Hz

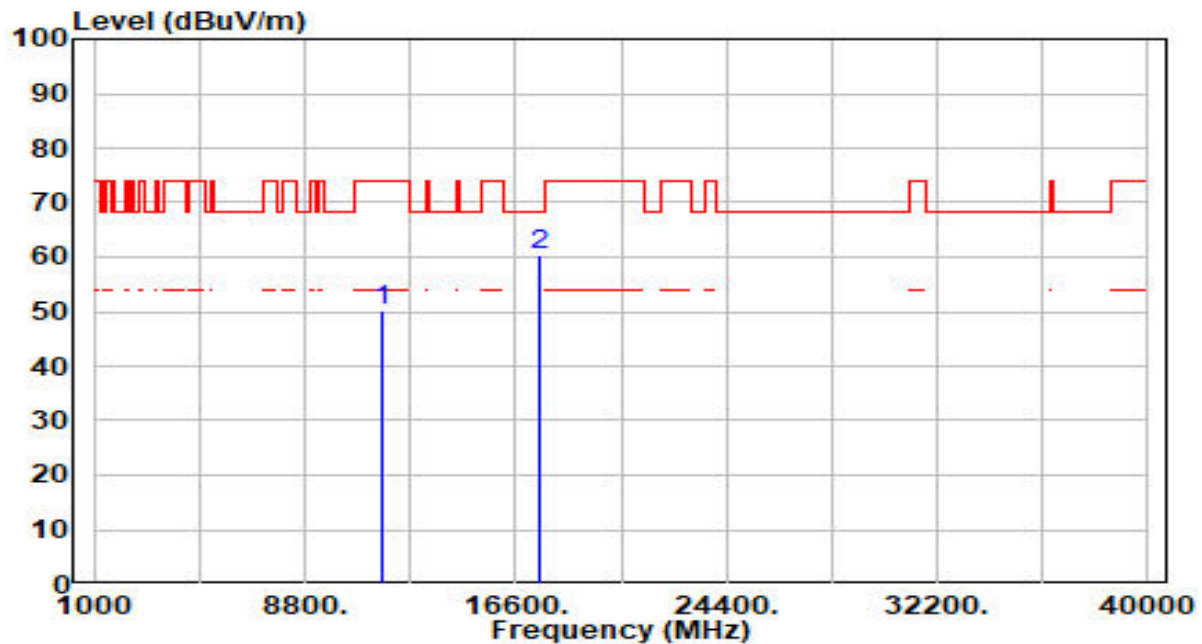


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11670.000	30.58	19.53	50.11	-23.89	74.00	300	148	Peak
2	* 17505.000	32.72	27.77	60.49	-7.71	68.20	300	165	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D & BBHA 9170	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5835MHz	Test Voltage	AC 120V/60Hz

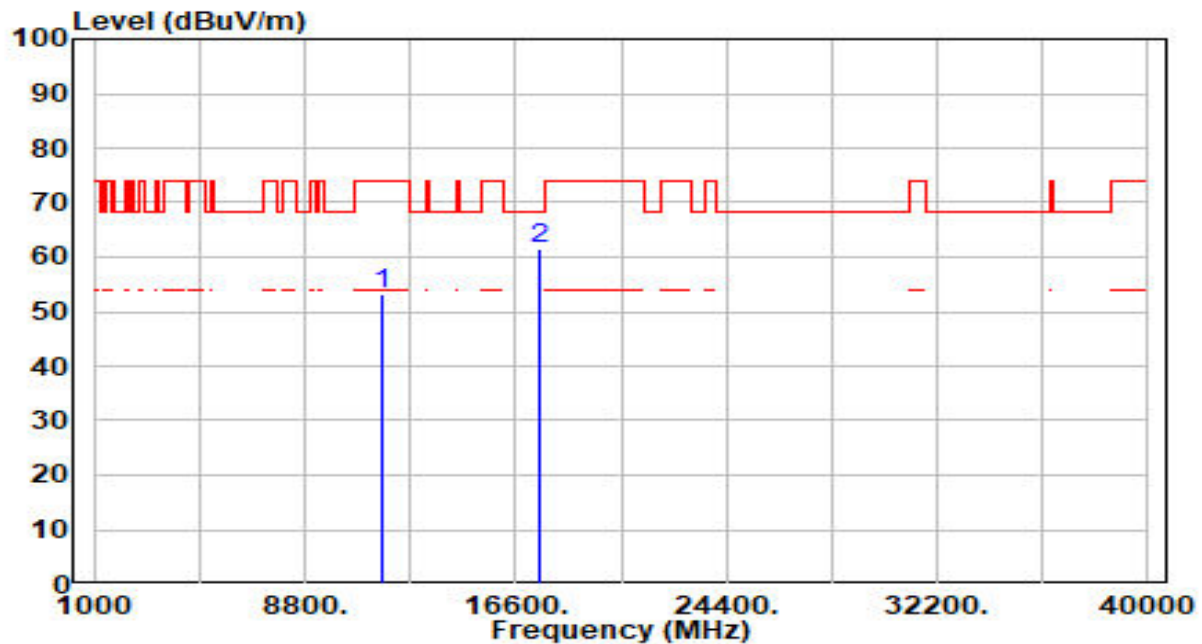

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11670.000	33.59	19.53	53.12	-20.88	74.00	300	360	Peak
2	* 17505.000	33.58	27.77	61.35	-6.85	68.20	300	237	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. Radiated Restricted Band Edge Measurement

7.8.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.25 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For FCC transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

For IC transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.


All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC-Radiated emission limits; general requirements

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [V/m]	Measured Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

7.8.2. Test Result

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 1_5735MHz	Test Voltage	AC 120V/60Hz

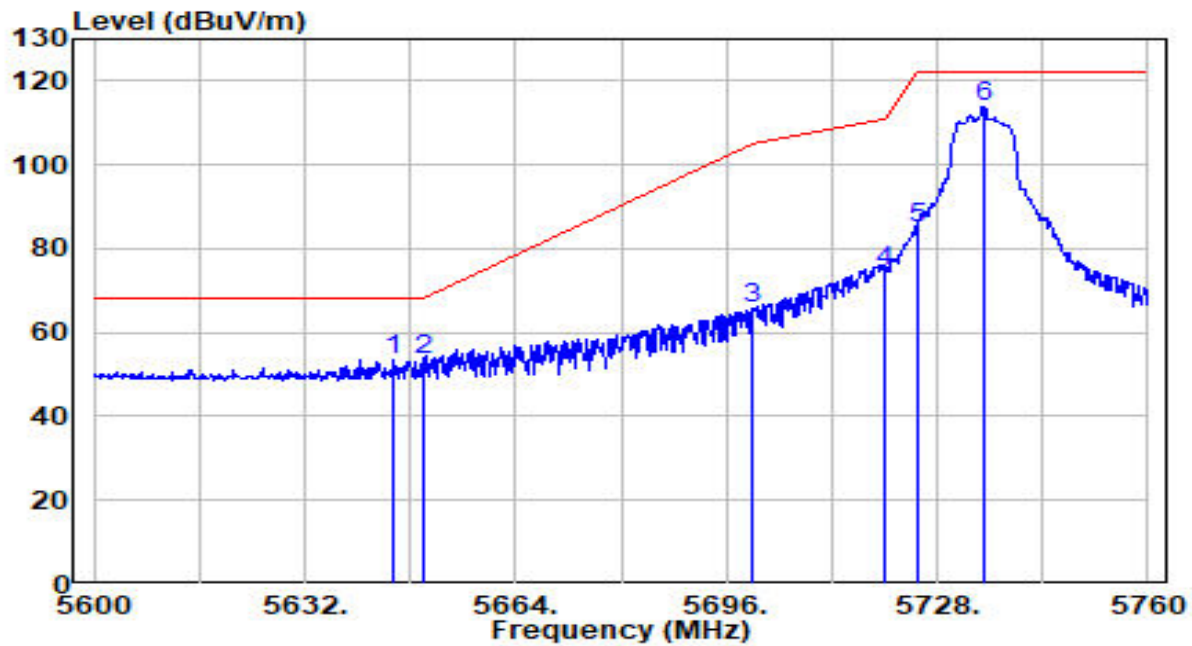


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5645.600	48.36	5.26	53.62	-14.58	68.20	145	230	Peak
2	5650.000	48.02	5.27	53.30	-14.90	68.20	145	230	Peak
3	5700.000	60.12	5.44	65.56	-39.64	105.20	145	230	Peak
4	5720.000	68.89	5.51	74.40	-36.40	110.80	145	230	Peak
5	5725.000	79.17	5.53	84.70	-37.50	122.20	145	230	Peak
6	5735.040	108.36	5.56	113.92	N/A	N/A	145	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 1_5735MHz	Test Voltage	AC 120V/60Hz

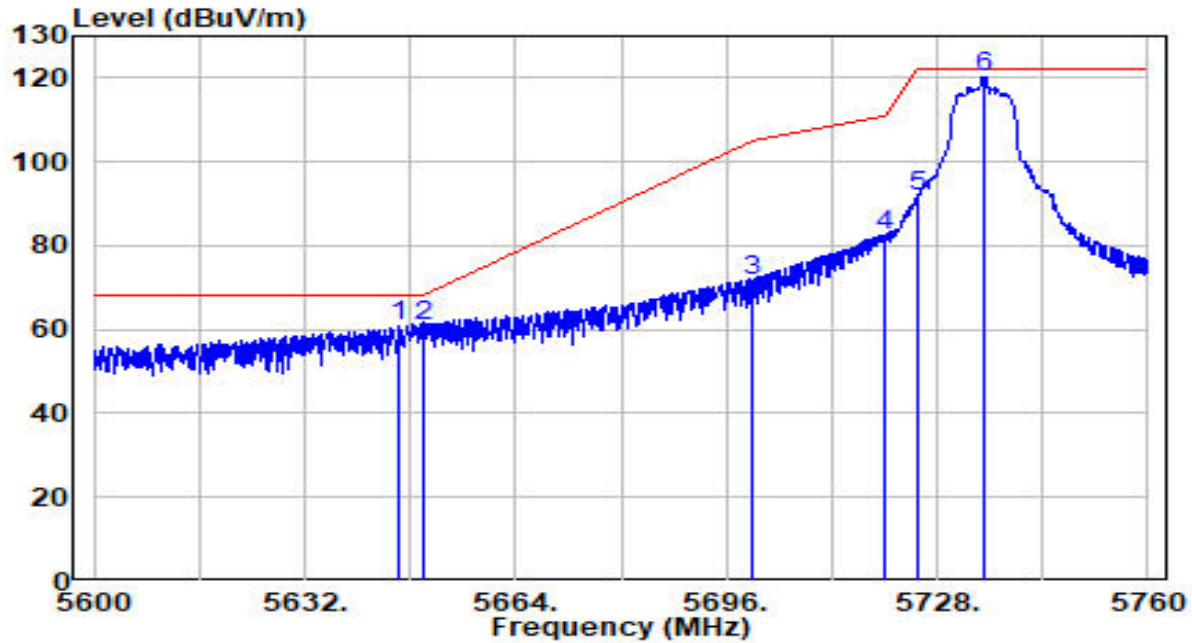


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5646.400	55.62	5.26	60.88	-7.32	68.20	185	200	Peak
2	* 5650.000	55.69	5.27	60.97	-7.23	68.20	185	200	Peak
3	5700.000	66.37	5.44	71.81	-33.39	105.20	185	200	Peak
4	5720.000	77.03	5.51	82.53	-28.27	110.80	185	200	Peak
5	5725.000	86.24	5.53	91.76	-30.44	122.20	185	200	Peak
6	5735.040	114.65	5.56	120.21	N/A	N/A	185	200	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 1_5835MHz	Test Voltage	AC 120V/60Hz

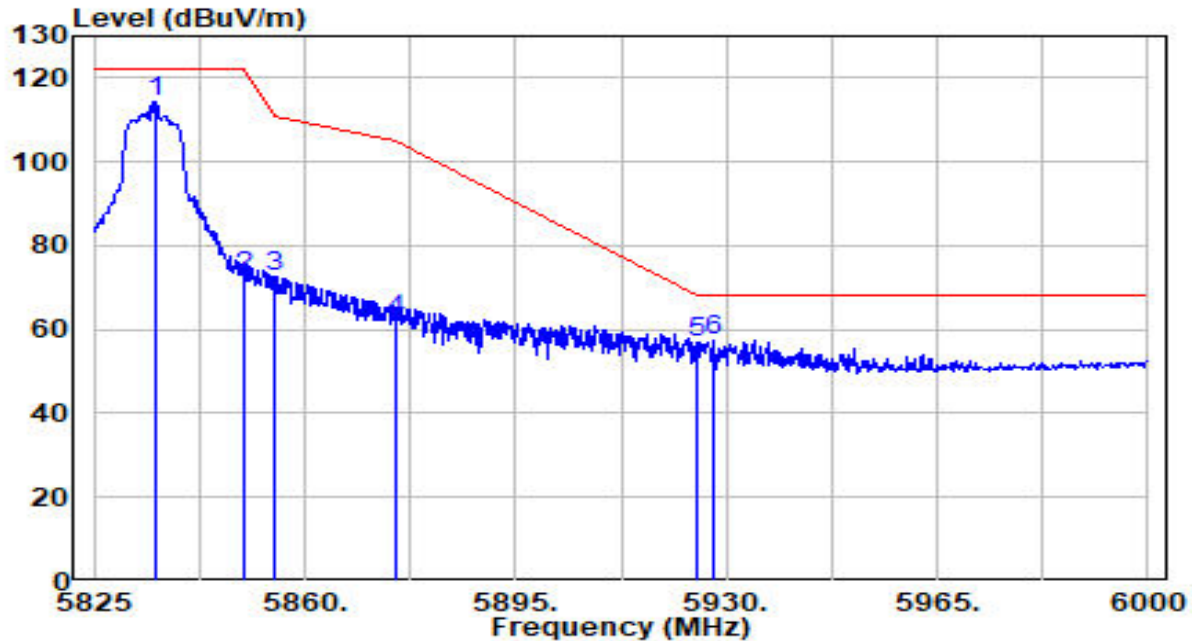


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5835.325	108.35	5.90	114.25	N/A	N/A	150	220	Peak
2	5850.000	66.45	5.95	72.39	-49.81	122.20	150	220	Peak
3	5855.000	66.71	5.96	72.67	-38.13	110.80	150	220	Peak
4	5875.000	56.50	6.03	62.53	-42.67	105.20	150	220	Peak
5	5925.000	50.67	6.20	56.87	-11.33	68.20	150	220	Peak
6	* 5927.900	51.27	6.21	57.48	-10.72	68.20	150	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 1_5835MHz	Test Voltage	AC 120V/60Hz

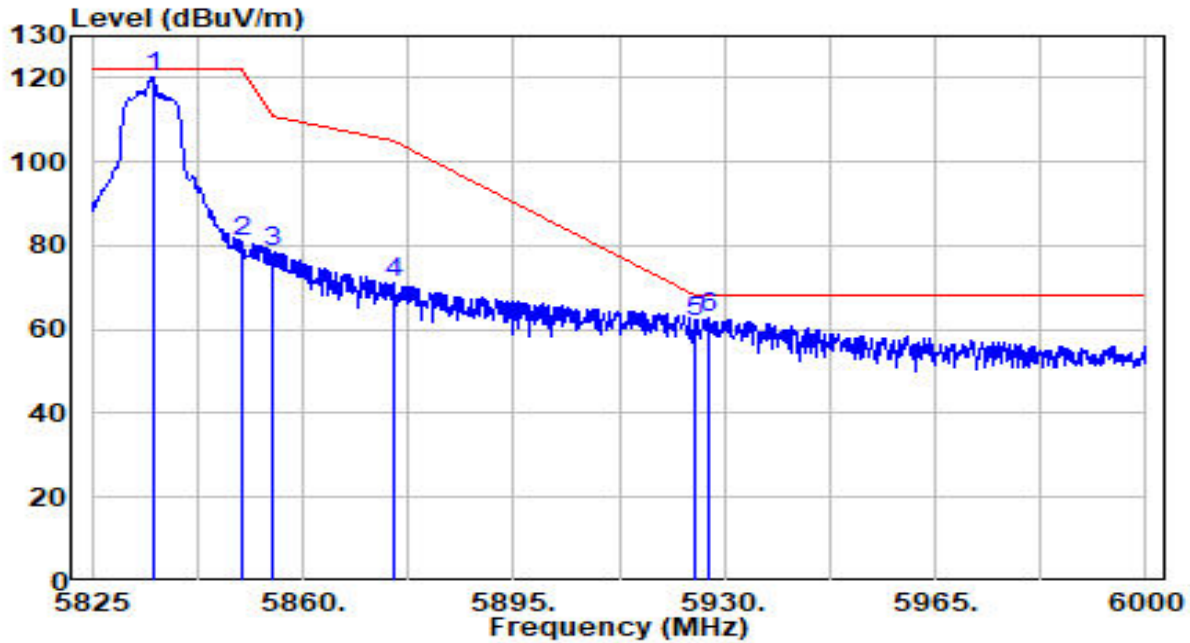


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5835.150	114.17	5.90	120.06	N/A	N/A	290	205	Peak
2	5850.000	75.11	5.95	81.06	-41.14	122.20	290	205	Peak
3	5855.000	72.36	5.96	78.32	-32.48	110.80	290	205	Peak
4	5875.000	65.06	6.03	71.09	-34.11	105.20	290	205	Peak
5	5925.000	55.54	6.20	61.74	-6.46	68.20	290	205	Peak
6	* 5927.200	56.38	6.21	62.59	-5.61	68.20	290	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5735MHz	Test Voltage	AC 120V/60Hz

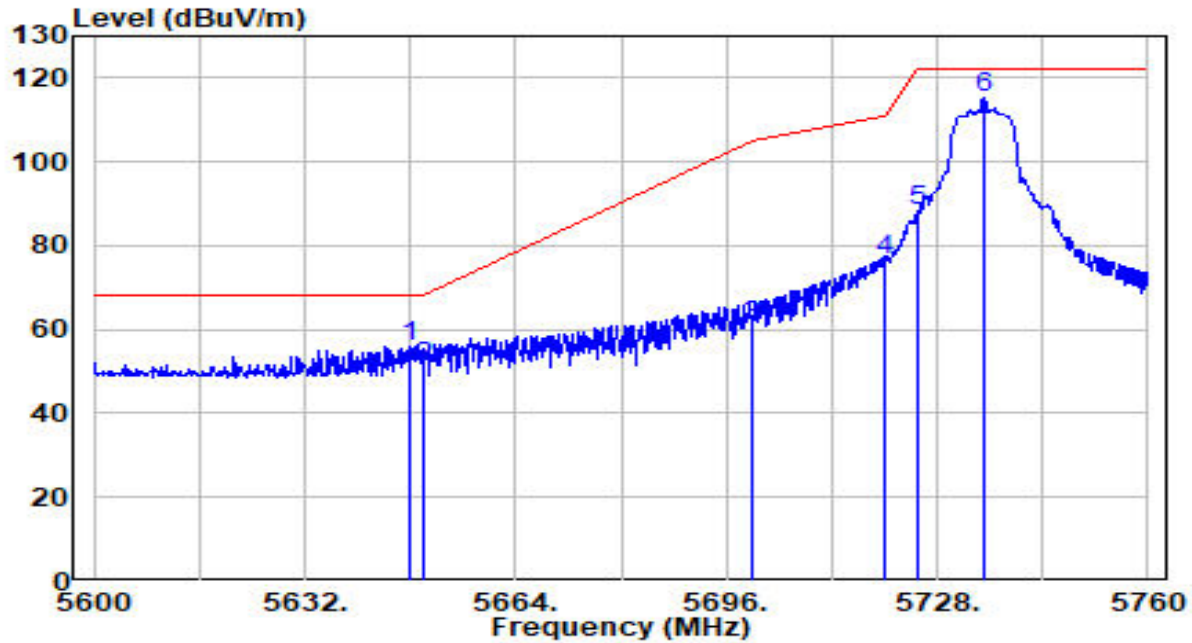


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.840	50.83	5.27	56.09	-12.11	68.20	220	245	Peak
2		5650.000	45.84	5.27	51.11	-17.09	68.20	220	245	Peak
3		5700.000	55.19	5.44	60.63	-44.57	105.20	220	245	Peak
4		5720.000	71.06	5.51	76.57	-34.23	110.80	220	245	Peak
5		5725.000	82.67	5.53	88.19	-34.01	122.20	220	245	Peak
6		5735.040	109.48	5.56	115.04	N/A	N/A	220	245	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5735MHz	Test Voltage	AC 120V/60Hz

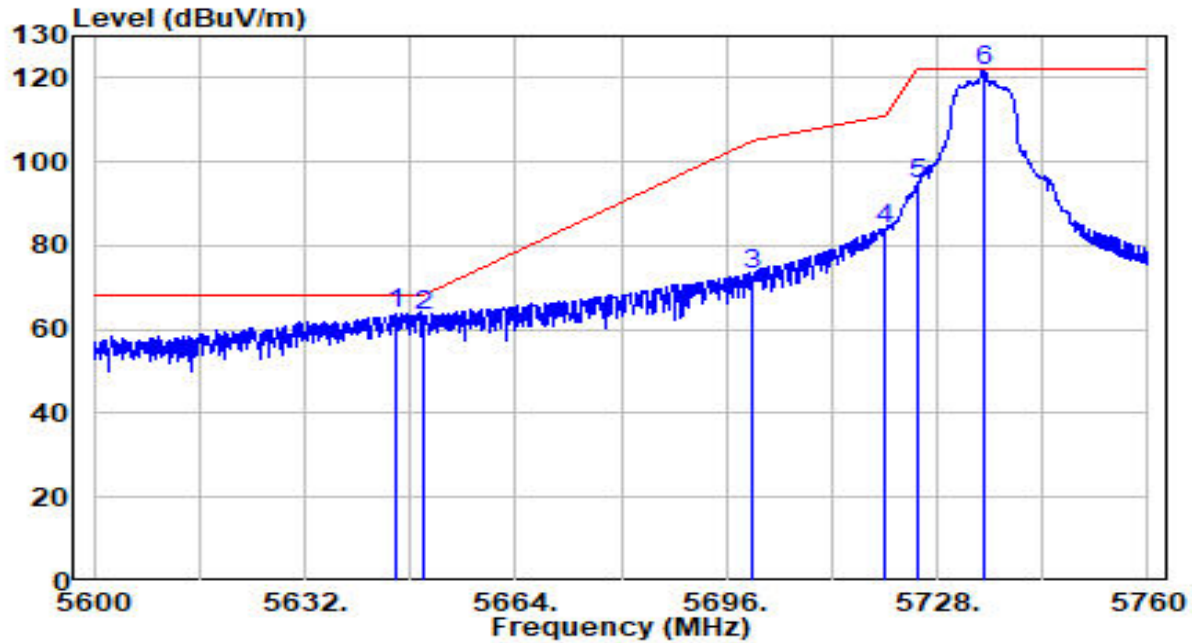


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.760	58.51	5.26	63.77	-4.43	68.20	210	165	Peak
2		5650.000	58.25	5.27	63.53	-4.67	68.20	210	165	Peak
3		5700.000	67.79	5.44	73.24	-31.96	105.20	210	165	Peak
4		5720.000	78.37	5.51	83.88	-26.92	110.80	210	165	Peak
5		5725.000	89.09	5.53	94.62	-27.58	122.20	210	165	Peak
6		5735.200	116.14	5.56	121.70	N/A	N/A	210	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /60%
Polarity	Horizontal	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5735MHz	Test Voltage	AC 120V/60Hz

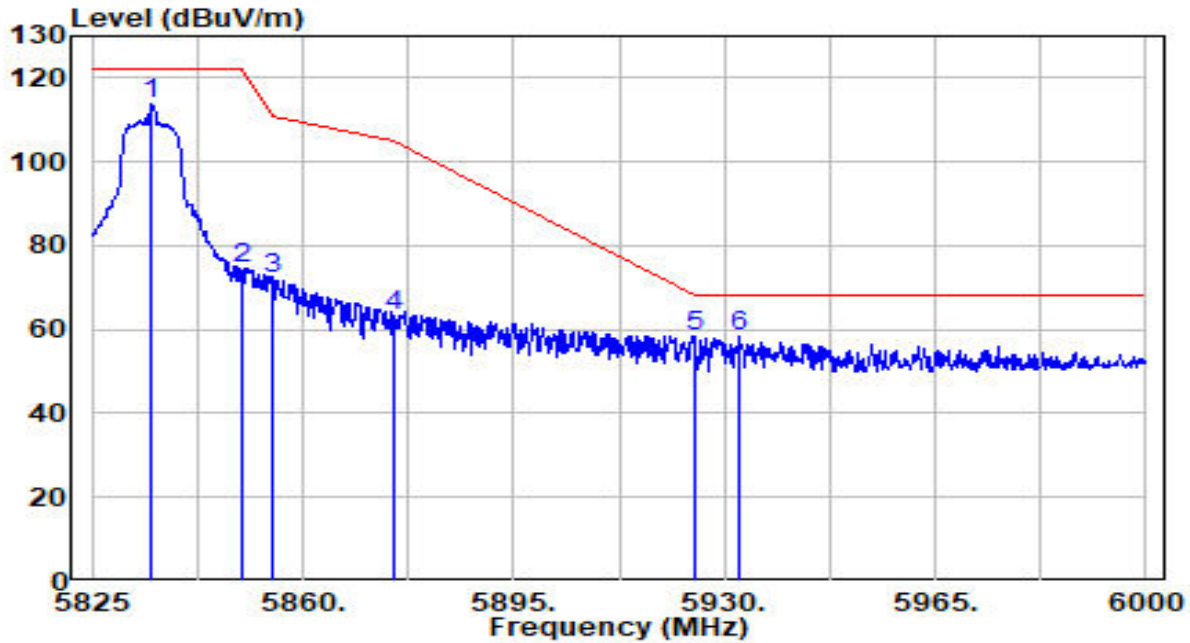


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5834.975	107.71	5.90	113.61	N/A	N/A	185	240	Peak
2		5850.000	68.38	5.95	74.33	-47.87	122.20	185	240	Peak
3		5855.000	66.01	5.96	71.97	-38.83	110.80	185	240	Peak
4		5875.000	57.45	6.03	63.48	-41.72	105.20	185	240	Peak
5	*	5925.000	52.33	6.20	58.53	-9.67	68.20	185	240	Peak
6		5932.450	52.05	6.22	58.27	-9.93	68.20	185	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	Fides-Link2	Date of Test	2024-12-22
Factor	BBHA 9120D	Temp. / Humidity	22°C /60%
Polarity	Vertical	Site / Test Engineer	AC1 / Todd
Test Mode	SRD 5.8G_TX_Ant 2_5735MHz	Test Voltage	AC 120V/60Hz

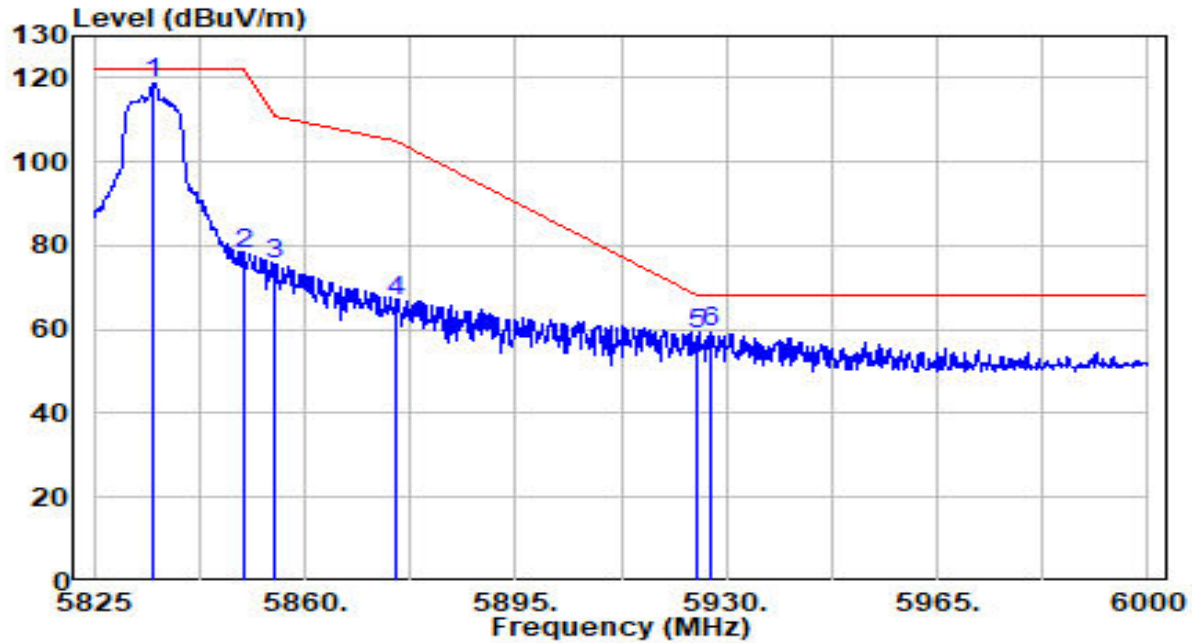

No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5834.800	112.94	5.89	118.83	N/A	N/A	235	220	Peak
2	5850.000	72.18	5.95	78.12	-44.08	122.20	235	220	Peak
3	5855.000	69.36	5.96	75.33	-35.47	110.80	235	220	Peak
4	5875.000	60.83	6.03	66.86	-38.34	105.20	235	220	Peak
5	5925.000	52.68	6.20	58.88	-9.32	68.20	235	220	Peak
6	* 5927.375	53.10	6.21	59.31	-8.89	68.20	235	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. AC Conducted Emissions Measurement

7.9.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 ~ 0.50	66 ~ 56	56 ~ 46
0.50 ~ 5.0	56	46
5.0 ~ 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.9.2. Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.

7.9.3. Test Setup

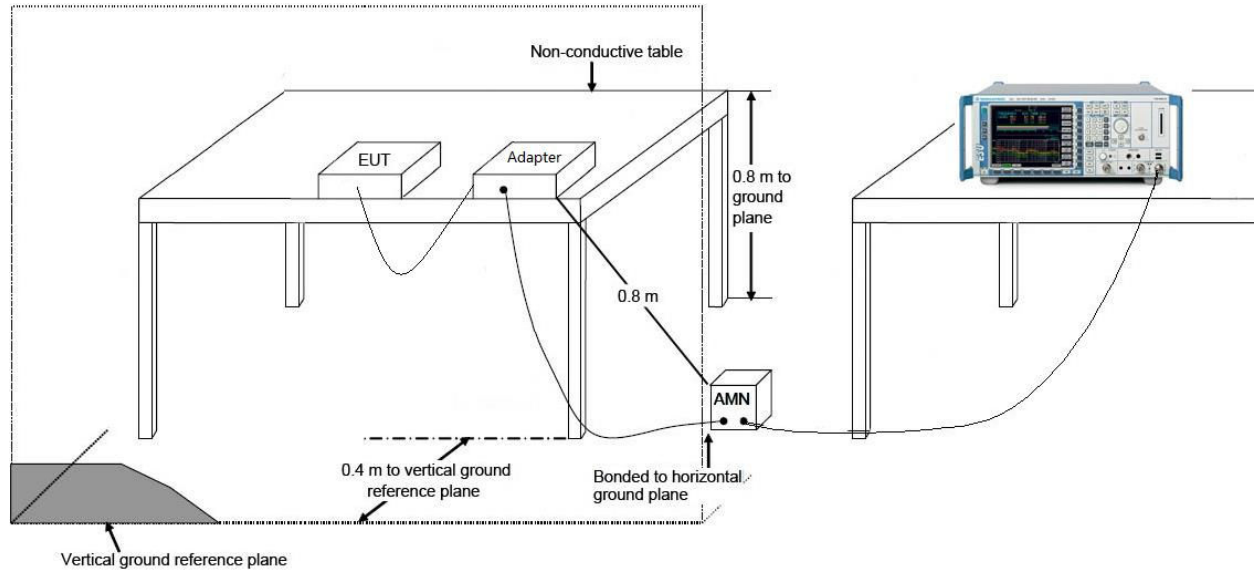

7.9.4. Test Result

EUT	Fides-Link2	Date of Test	2024-12-25
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	24.3°C /65%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	SRD 5.8G_TX_Ant 1_5785MHz	Test Voltage	AC 120V/60Hz

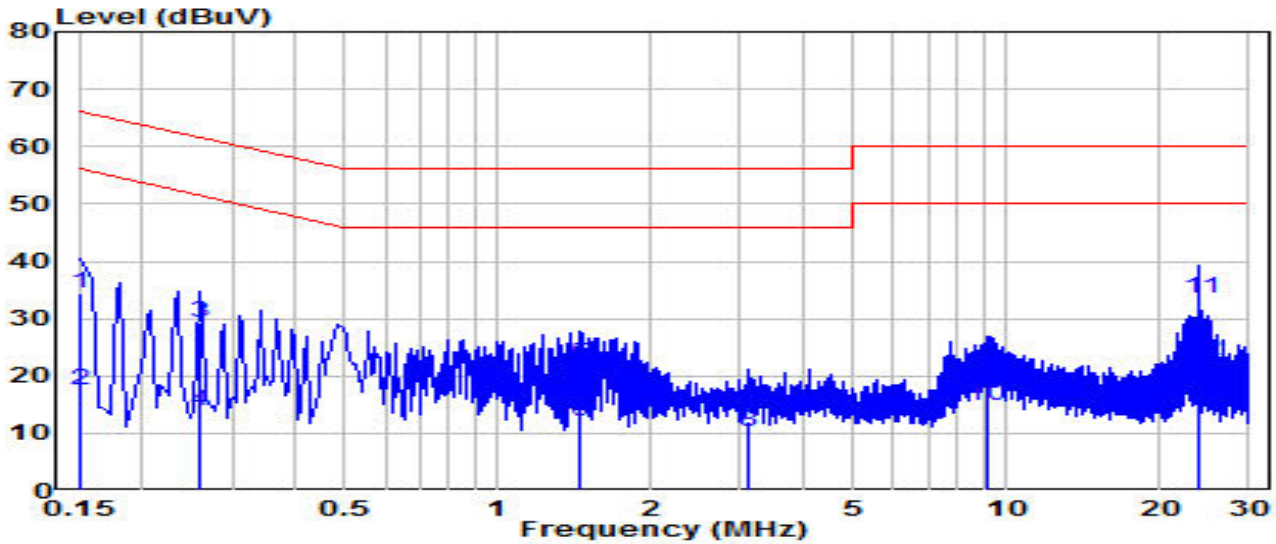


No		Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1		0.150	24.66	9.63	34.29	-31.71	66.00	QP
2		0.150	7.76	9.63	17.39	-38.61	56.00	Average
3		0.258	19.64	9.64	29.27	-32.22	61.50	QP
4		0.258	4.19	9.64	13.82	-37.67	51.50	Average
5		1.441	12.34	9.69	22.03	-33.97	56.00	QP
6		1.441	2.40	9.69	12.09	-33.91	46.00	Average
7		3.124	2.31	9.72	12.02	-43.98	56.00	QP
8		3.124	0.45	9.72	10.17	-35.83	46.00	Average
9		9.118	10.98	9.85	20.83	-39.17	60.00	QP
10		9.118	5.06	9.85	14.91	-35.09	50.00	Average
11	*	23.993	23.61	9.92	33.53	-26.47	60.00	QP
12	*	23.993	12.68	9.92	22.60	-27.40	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	Fides-Link2	Date of Test	2024-12-25
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	24.3°C /65%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	SRD 5.8G_TX_Ant 1_5785MHz	Test Voltage	AC 120V/60Hz

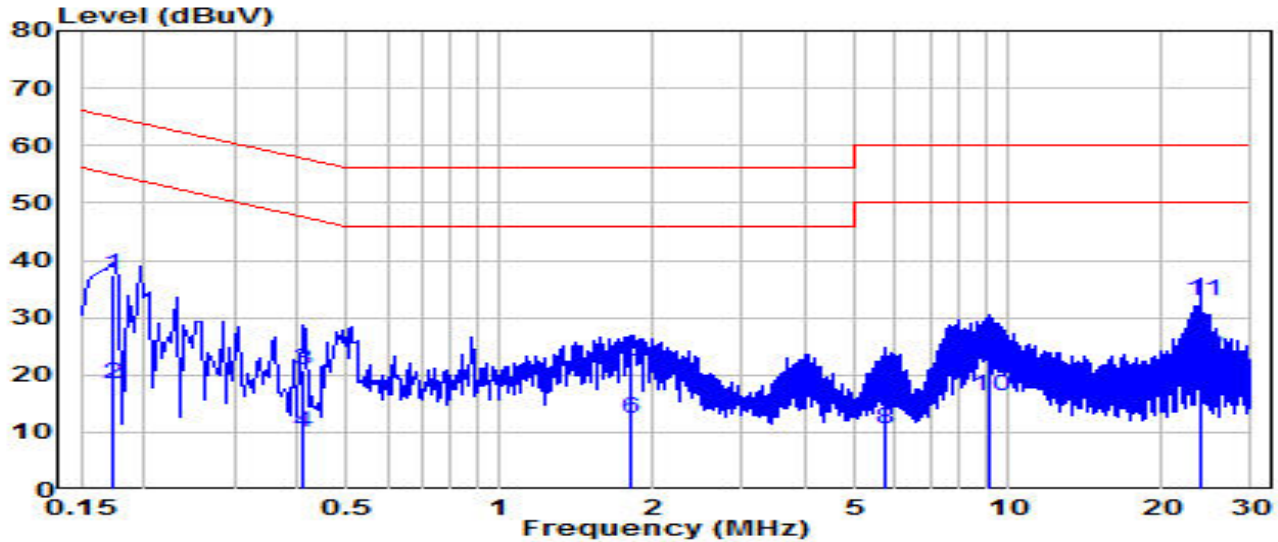

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.172	27.66	9.63	37.29	-27.55	64.84	QP
2	0.172	8.69	9.63	18.32	-36.52	54.84	Average
3	0.411	11.24	9.65	20.89	-36.74	57.63	QP
4	0.411	0.22	9.65	9.87	-37.76	47.63	Average
5	1.806	12.58	9.70	22.29	-33.71	56.00	QP
6	1.806	2.71	9.70	12.41	-33.59	46.00	Average
7	5.729	7.40	9.78	17.17	-42.83	60.00	QP
8	5.729	0.84	9.78	10.62	-39.38	50.00	Average
9	9.154	13.76	9.87	23.63	-36.37	60.00	QP
10	9.154	6.43	9.87	16.30	-33.70	50.00	Average
11	* 23.989	23.01	10.01	33.03	-26.97	60.00	QP
12	* 23.989	13.22	10.01	23.24	-26.76	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Fides-Link2**, is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Photograph

Refer to “2412TW0114-UTfile.

Appendix B : External Photograph

Refer to “2412TW0114-UE file.

Appendix C : Internal Photograph

Refer to “2412TW0114-UI file.

————— The End —————