



EMC TEST REPORT

Applicant Hangzhou Ruze e-commerce Co., Ltd
FCC ID 2A8B6W00
Product Smart Bracelet
Brand PitPat
Model W00
Report No. R2206A0550-E1V2
Issue Date September 5, 2022

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC Code CFR47 Part15B (2021)/ ANSI C63.4-2014**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Liu Wei

Prepared by: Liu Wei

Fan Guangchang

Approved by: Fan Guangchang

TA Technology (Shanghai) Co., Ltd.

Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	5
1.1	Notes of the Test Report.....	5
1.2	Test facility.....	5
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
2.1	Applicant and Manufacturer Information.....	6
2.2	General information.....	6
2.3	Applied Standards.....	7
2.4	Test Mode.....	8
3	Test Case Results	9
3.1	Radiated Emission	9
3.2	Conducted Emission	14
4	Uncertainty Measurement	17
5	Main Test Instruments	18
	ANNEX A: The EUT Appearance.....	19
	ANNEX B: Test Setup Photos.....	20



Version	Revision description	Issue Date
Rev.0	Initial issue of report.	August 15 2022
Rev.1	Update information.	September 2, 2022
Rev.2	Update information.	September 5, 2022
Note: This revised report (Report No. R2206A0550-E1V2) supersedes and replaces the previously issued report (Report No. R2206A0550-E1V1). Please discard or destroy the previously issued report and dispose of it accordingly.		



Summary of measurement results

Number	Test Case	Clause in FCC Rules	Conclusion
1	Radiated Emission	FCC Part15.109, ANSI C63.4-2014	PASS
2	Conducted Emission	FCC Part15.107, ANSI C63.4-2014	PASS
Date of Testing: August 3, 2022 ~ August 5, 2022			
Date of Sample Received: June 21, 2022			
Note: All indications of Pass/Fail in this report are opinions expressed by TA Technology (Shanghai) Co., Ltd. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only.			



1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform measurements.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform measurement.

1.3 Testing Location

Company:	TA Technology (Shanghai) Co., Ltd.
Address:	Building 3, No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City:	Shanghai
Post code:	201201
Country:	P. R. China
Contact:	Fan Guangchang
Telephone:	+86-021-50791141/2/3
Fax:	+86-021-50791141/2/3-8000
Website:	http://www.ta-shanghai.com
E-mail:	fanguangchang@ta-shanghai.com

2 General Description of Equipment under Test

2.1 Applicant and Manufacturer Information

Applicant	Hangzhou Ruze e-commerce Co., Ltd
Applicant address	Room 801-3, building 5, information port phase 6,NO.666, Jianshe 2nd Road,HANGZHOU, China
Manufacturer	Hangzhou Ruze e-commerce Co., Ltd
Manufacturer address	Room 801-3, building 5, information port phase 6,NO.666, Jianshe 2nd Road,HANGZHOU ,China

2.2 General information

EUT Description			
Device Type	Portable Device		
Model	W00		
Lab internal SN	R2206A0550/S01		
HW Version	XM-M3-8810-V1_2		
SW Version	V14		
Power Rating	DC 3.7V		
Connecting I/O Port(s)	Please refer to the User's Manual.		
Antenna Type	Internal Antenna		
Frequency	Band	Tx (MHz)	Rx (MHz)
	Bluetooth LE	2400 ~ 2483.5	2400 ~ 2483.5
Auxiliary test equipment			
supercharge	Manufacturer: HONOR Model: HW-100225E00 SN: HF54L7LCA00024		
Note: 1. The EUT is sent from the applicant to TA and the information of the EUT is declared by the applicant.			



2.3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC Code CFR47 Part15B (2021)

ANSI C63.4-2014

2.4 Test Mode

Test Mode	
Mode 1	Adapter + EUT + BT Receiver
Mode 2	Adapter + EUT + BT Traffic

During the test, the preliminary test was performed in all modes, mode 1 is selected as the worst condition. The test data of the worst-case condition was recorded in this report.

3 Test Case Results

3.1 Radiated Emission

Ambient condition

Temperature	Relative humidity	Pressure
15°C~35°C	30%~60%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table 0.8m above the horizontal metal reference ground plane. The distance between EUT and receive antenna should be 3 meters. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier. During the test, the height of receive antenna shall be moved from 1 to 4 meters, and the antenna shall be performed under horizontal and vertical polarization. The turn table shall be rotated from 0 to 360 degrees for detecting the maximum of radiated signal level.

The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. During the test, the EUT is worked at maximum output power.

Set the spectrum analyzer in the following:

Below 1GHz:

RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:


(a) PEAK Detector: RBW=1MHz / VBW=3MHz/ Sweep=AUTO

(b) AVERAGE Detector: RBW=1MHz / VBW=3MHz / Sweep=AUTO


The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

Test Setup

Below 1GHz

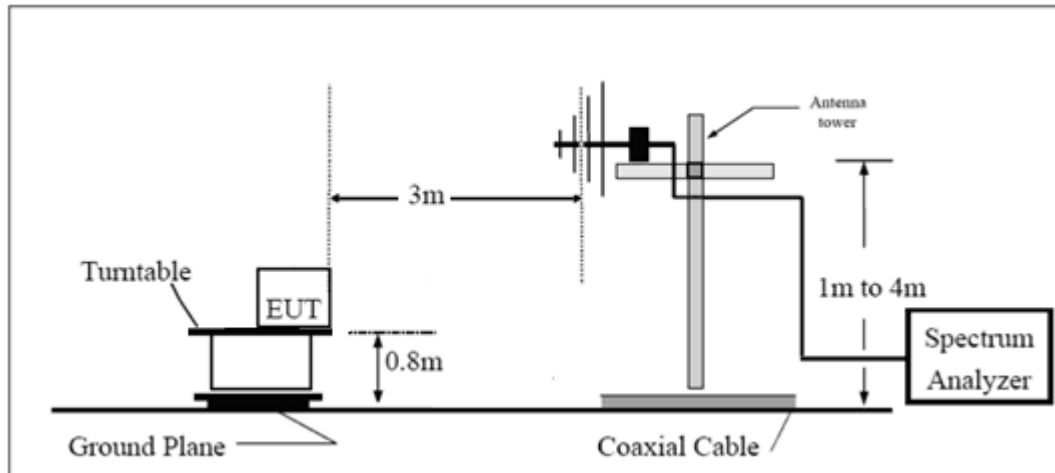

Above 1GHz

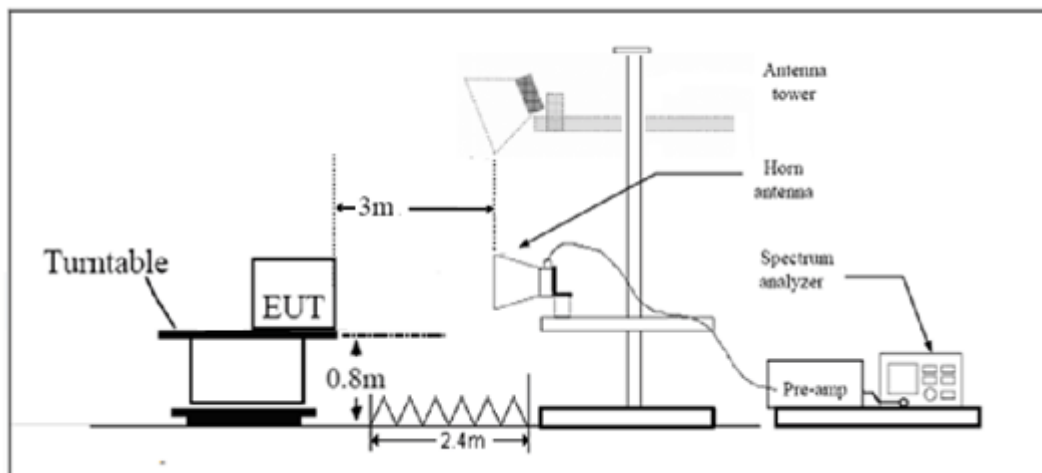

Note: Area side: 2.4mX3.6m

Antenna Tower meets ANSI C63.4 requirements for measurements above 1 GHz by keeping the antenna aimed at the EUT during the antenna's ascent/ descent along the antenna mast.

Limits

Class B

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	40.0	Quasi-peak
88-216	43.5	Quasi-peak
216 – 960	46.0	Quasi-peak
960-1000	54.0	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	54 74	Average Peak

Class A

Frequency (MHz)	Field Strength (dB μ V/m)	Detector
30 -88	49.08	Quasi-peak
88-216	53.52	Quasi-peak
216 – 960	56.40	Quasi-peak
960-1000	59.50	Quasi-peak
1000-5 th harmonic of the highest frequency or 40GHz, which is lower	59.50 79.50	Average Peak


Test Results

Sweep the whole frequency band through the range from 30MHz to the 5th harmonic of the carrier.

The following graphs display the maximum values of horizontal and vertical by software.

For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.

A symbol (dB V/) in the test plot below means (dBuV/m)

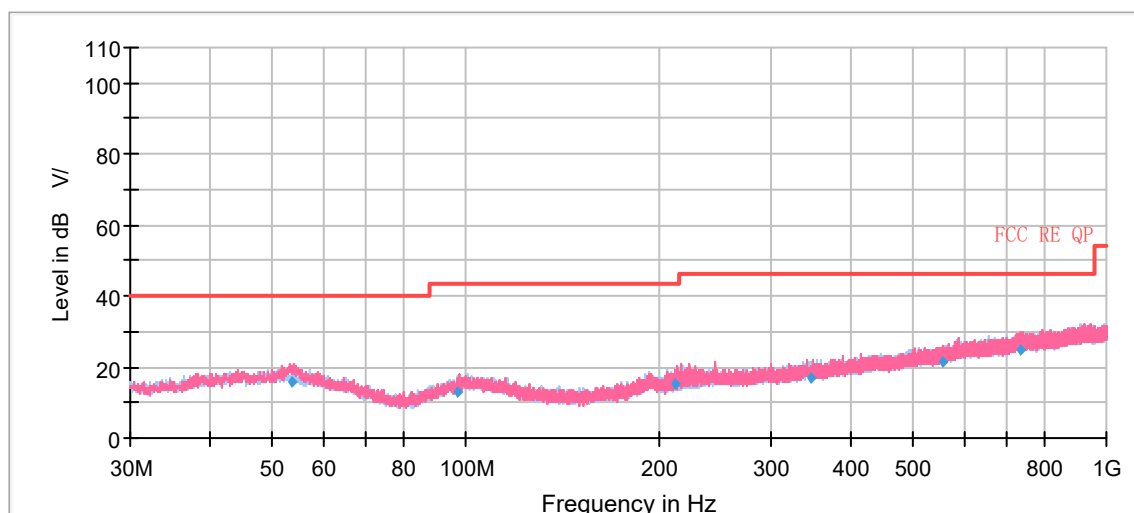


Radiated Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
53.65	16.07	40.00	23.93	175.0	V	1.00	20
97.21	12.95	43.50	30.55	184.0	V	324.00	18
213.09	15.06	43.50	28.44	175.0	V	140.00	18
346.98	16.96	46.00	29.05	225.0	H	41.00	22
554.31	21.32	46.00	24.68	100.0	V	183.00	26
736.73	24.61	46.00	21.39	110.0	V	44.00	29

Remark: 1. Correction Factor = Antenna factor + Insertion loss(cable loss+amplifier gain)

2. Margin = Limit – Quasi-Peak

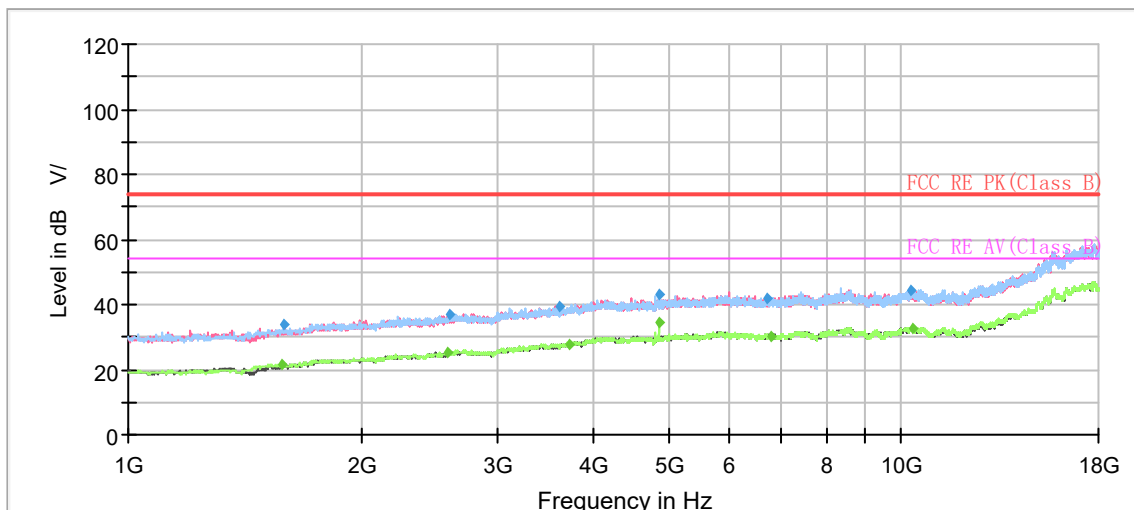

Radiated Emission from 1GHz to 18GHz

Frequency (MHz)	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1580.13	---	21.76	54.00	32.24	500.00	100.0	H	305.00	-15
1592.88	34.14	---	74.00	39.86	500.00	200.0	V	168.00	-15
2593.75	---	25.26	54.00	28.74	500.00	100.0	H	246.00	-10
2608.63	36.75	---	74.00	37.25	500.00	100.0	V	0.00	-10
3622.25	39.45	---	74.00	34.55	500.00	200.0	V	336.00	-6
3726.38	---	27.95	54.00	26.05	500.00	200.0	V	100.00	-5
4850.50	42.86	---	74.00	31.14	500.00	200.0	H	252.00	-2
4852.63	---	34.73	54.00	19.27	500.00	200.0	H	252.00	-2
6697.13	42.14	---	74.00	31.86	500.00	200.0	H	196.00	0
6767.25	---	30.21	54.00	23.79	500.00	200.0	V	291.00	0
10301.13	44.08	---	74.00	29.92	500.00	200.0	V	346.00	6
10335.13	---	32.82	54.00	21.18	500.00	100.0	H	0.00	6

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)

2. Peak Margin = Limit - MAX Peak/ Average

3.2 Conducted Emission


Ambient condition

Temperature	Relative humidity	Pressure
15°C~35°C	30%~60%	101.5kPa

Methods of Measurement

The EUT is placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.4-2014. Connect the AC power line of the EUT to the L.I.S.N. Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9 kHz, VBW is set to 30kHz. The measurement result should include both L line and N line.

Test Setup

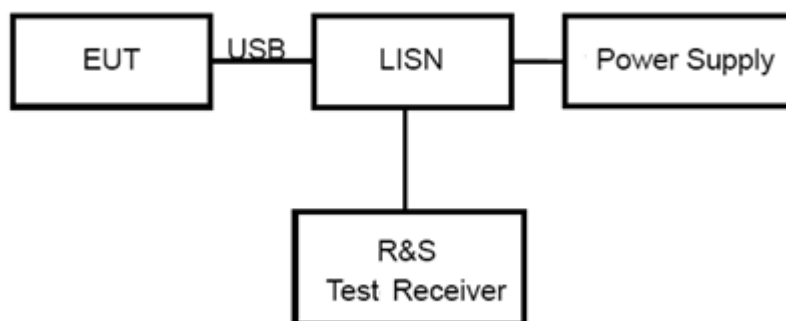


Note: Power Supply is AC Power source and it is used to change the voltage 120V/60Hz.

Limits

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50
*: Decreases with the logarithm of the frequency.		

Test Results

Following plots, Blue trace uses the peak detection; Green trace uses the average detection.

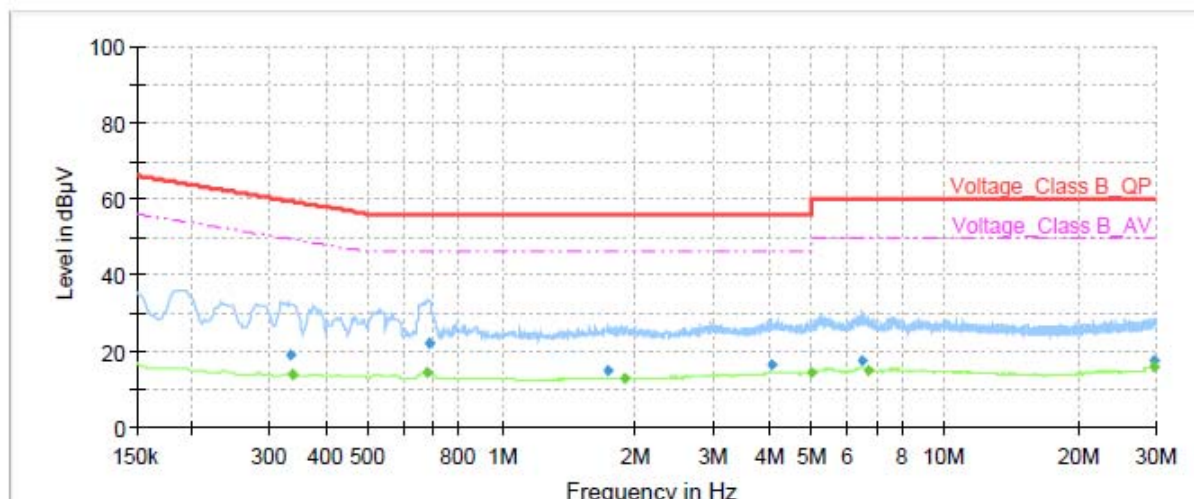


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.33	19.22	---	59.34	40.12	1000.00	9.000	L1	ON	21
0.34	---	13.96	49.28	35.32	1000.00	9.000	L1	ON	21
0.67	---	14.46	46.00	31.54	1000.00	9.000	L1	ON	20
0.69	21.95	---	56.00	34.05	1000.00	9.000	L1	ON	20
1.73	14.90	---	56.00	41.10	1000.00	9.000	L1	ON	20
1.89	---	12.86	46.00	33.14	1000.00	9.000	L1	ON	20
4.04	16.51	---	56.00	39.49	1000.00	9.000	L1	ON	19
4.99	---	14.42	46.00	31.58	1000.00	9.000	L1	ON	19
6.53	17.65	---	60.00	42.35	1000.00	9.000	L1	ON	19
6.69	---	14.95	50.00	35.05	1000.00	9.000	L1	ON	20
29.81	---	15.71	50.00	34.29	1000.00	9.000	L1	ON	20
29.83	17.57	---	60.00	42.43	1000.00	9.000	L1	ON	20

Remark: Correct factor=cable loss + LISN factor

L line

Conducted Emission from 150 KHz to 30 MHz

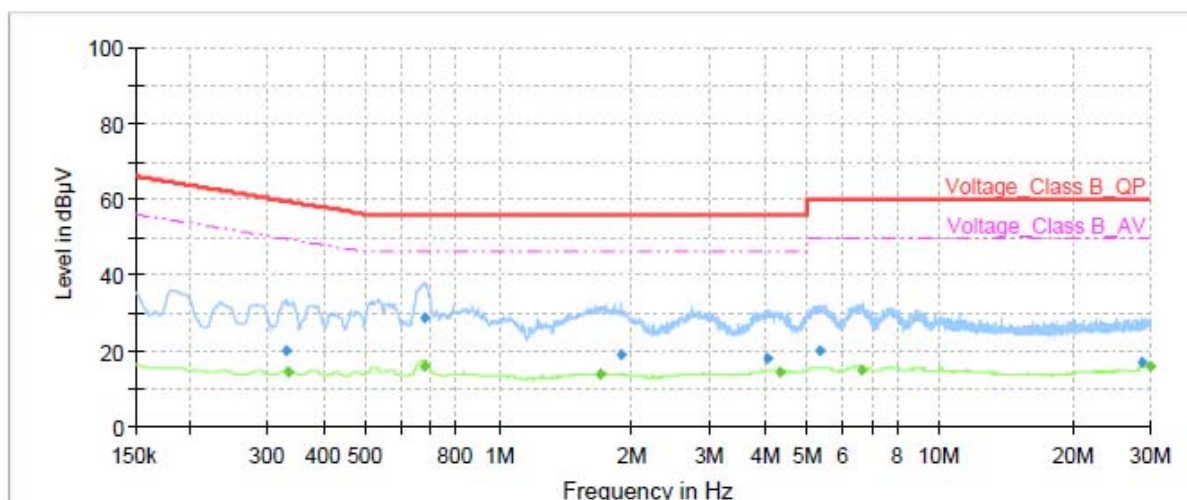

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.33	20.09	---	59.45	39.36	1000.00	9.000	N	ON	21
0.33	---	14.40	49.34	34.94	1000.00	9.000	N	ON	21
0.67	---	16.02	46.00	29.98	1000.00	9.000	N	ON	20
0.68	28.59	---	56.00	27.41	1000.00	9.000	N	ON	20
1.70	---	13.61	46.00	32.39	1000.00	9.000	N	ON	20
1.89	18.95	---	56.00	37.05	1000.00	9.000	N	ON	20
4.06	17.92	---	56.00	38.08	1000.00	9.000	N	ON	19
4.35	---	14.45	46.00	31.55	1000.00	9.000	N	ON	19
5.35	19.81	---	60.00	40.19	1000.00	9.000	N	ON	19
6.62	---	15.11	50.00	34.89	1000.00	9.000	N	ON	20
28.57	16.92	---	60.00	43.08	1000.00	9.000	N	ON	20
29.99	---	15.69	50.00	34.31	1000.00	9.000	N	ON	20

Remark: Correct factor=cable loss + LISN factor

N line

Conducted Emission from 150 KHz to 30 MHz

4 Uncertainty Measurement

Case	Uncertainty	Factor k
Radiated Emission 30MHz – 200MHz	4.17 dB	1.96
Radiated Emission 200MHz – 1GHz	4.84 dB	1.96
Radiated Emission 1GHz – 18GHz	4.35 dB	1.96
Conducted Emission	2.57 dB	2



5 Main Test Instruments

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Date	Expiration Time
Radiated Emission					
EMI Test Receiver	R&S	ESCI7	100936	2021-12-12	2022-12-11
Signal Analyzer	R&S	FSV40	100816	2021-12-12	2022-12-11
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	391	2019-12-16	2022-12-15
Horn Antenna	Schwarzbeck	BBHA 9120D	430	2021-07-26	2024-07-25
Horn Antenna	ETS-Lindgren	3160-09	00102643	2021-10-10	2024-10-09
Software	R&S	EMC32	9.26.01	/	/
Conducted Emission					
Artificial main network	R&S	ENV216	102191	2020-12-13	2022-12-12
EMI Test Receiver	R&S	ESR	101667	2022-05-25	2023-05-24
Software	R&S	EMC32	10.35.10	/	/

*****END OF REPORT *****



ANNEX A: The EUT Appearance

The EUT Appearance are submitted separately.



ANNEX B: Test Setup Photos

The Test Setup Photos are submitted separately.