

Test Plot 1#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.782$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/GSM 850 Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.230 W/kg


Head Left Cheek/GSM 850 Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.312 V/m; Power Drift = 0.14dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.153 W/kg

Maximum value of SAR (measured) = 0.221 W/kg

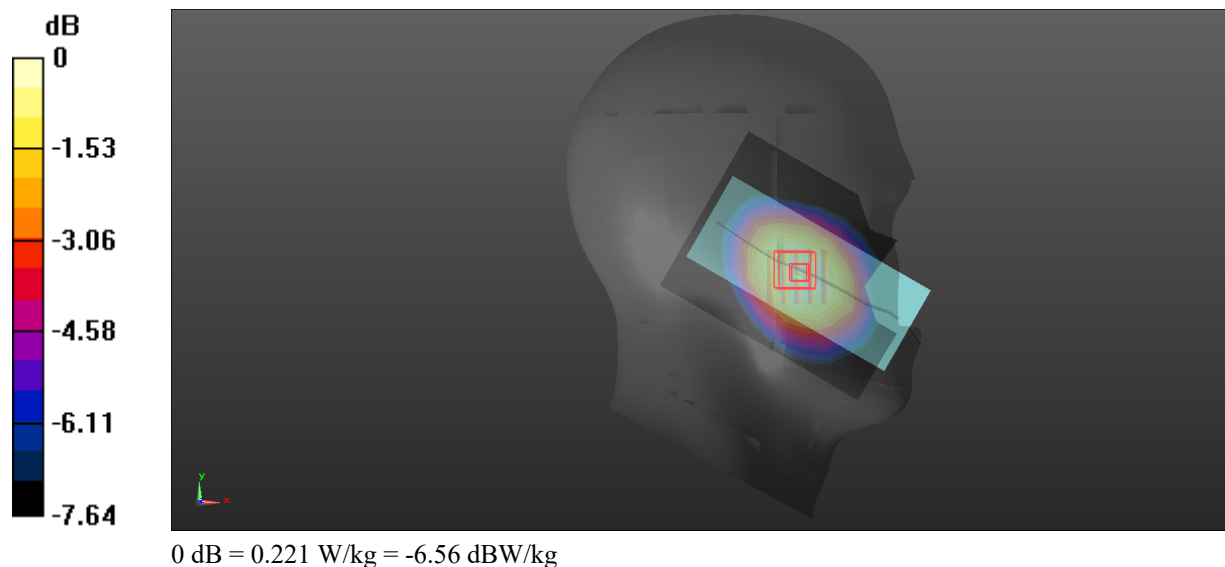

Test Plot 2#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 824.2 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 40.821$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @824.2 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/GSM 850 Low/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.893 W/kg


Body Back/GSM 850 Low/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.88 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.979 W/kg

SAR(1 g) = 0.795 W/kg; SAR(10 g) = 0.604 W/kg

Maximum value of SAR (measured) = 0.921 W/kg

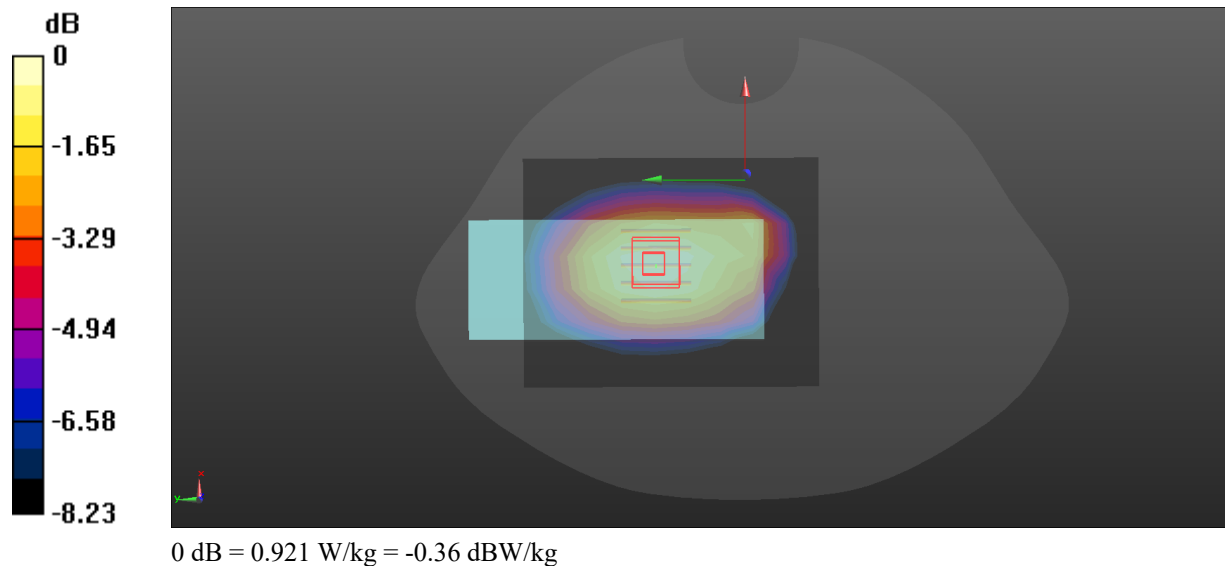

Test Plot 3#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.608$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.96, 7.29, 7.3) @1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/GSM 1900 Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0481 W/kg


Head Right Cheek/GSM 1900 Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.4340 V/m; Power Drift = 0.07dB

Peak SAR (extrapolated) = 0.0570 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.030 W/kg

Maximum value of SAR (measured) = 0.0526 W/kg

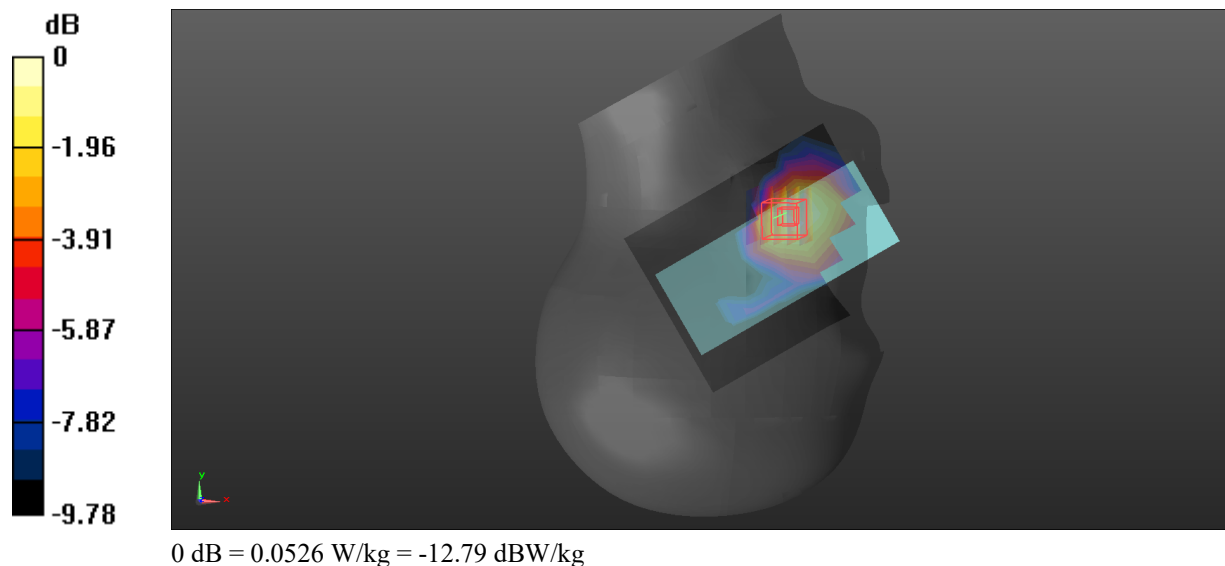

Test Plot 4#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic GPRS-4 slots (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2

Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.386 \text{ S/m}$; $\epsilon_r = 40.542$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.96, 7.29, 7.3) @1909.8 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/GSM 1900 High/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.14 W/kg


Body Back/GSM 1900 High/Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.795 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.528 W/kg

Maximum value of SAR (measured) = 1.53 W/kg

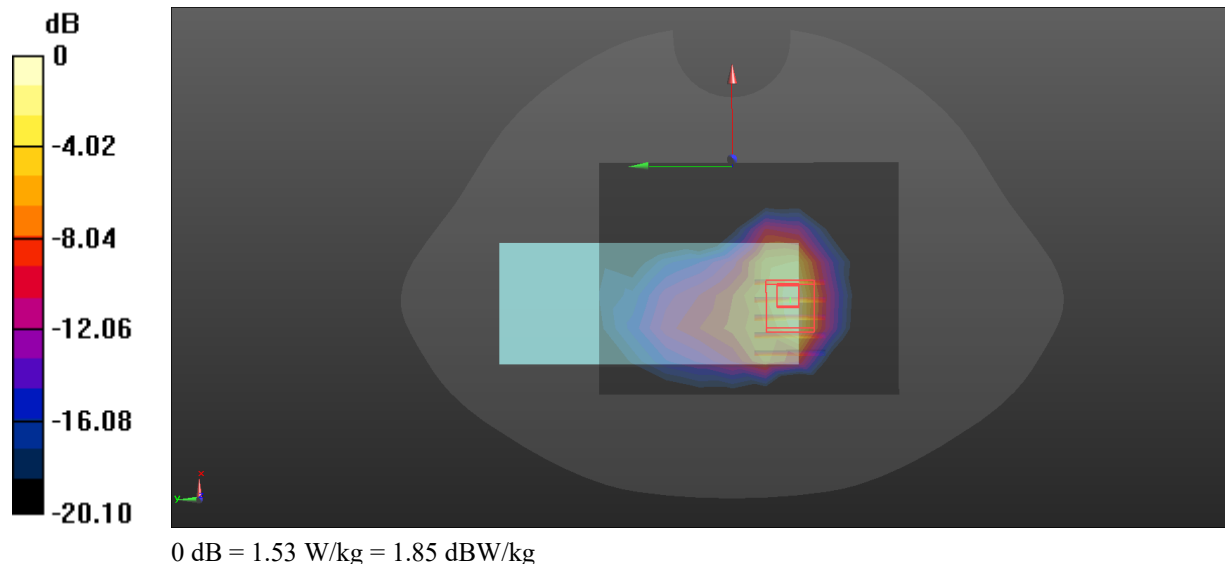

Test Plot 5#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.608$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.96, 7.29, 7.3) @1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/WCDMA Band 2 Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.0948 W/kg


Head Right Cheek/WCDMA Band 2 Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.760 V/m; Power Drift = 0.17dB

Peak SAR (extrapolated) = 0.107 W/kg

SAR(1 g) = 0.077 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.0970 W/kg

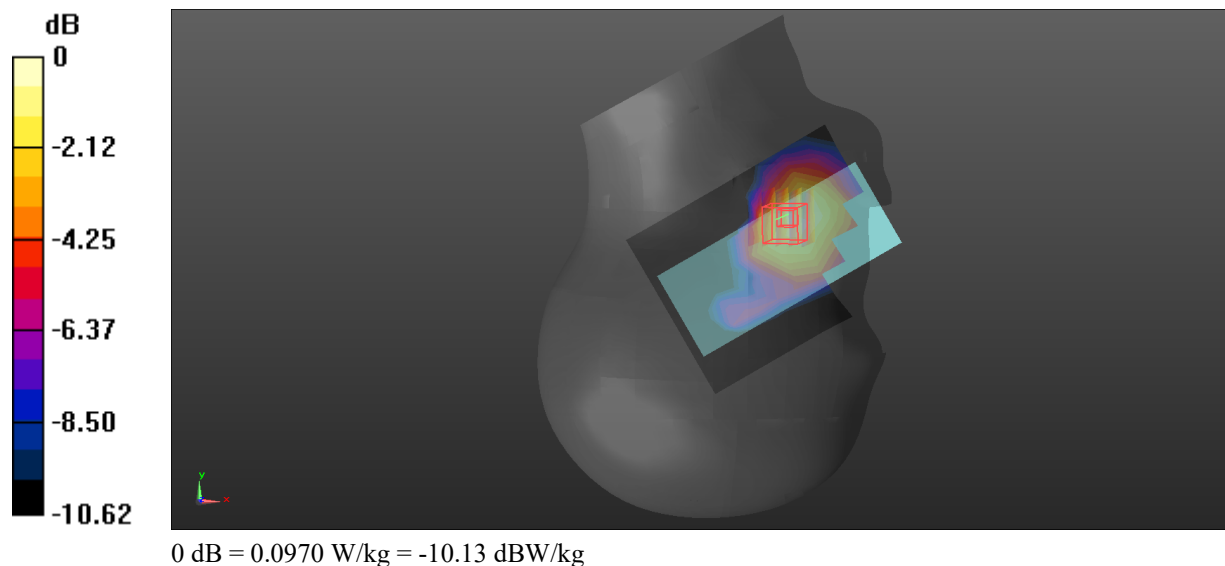

Test Plot 6#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.547$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.96, 7.29, 7.3) @1907.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WCDMA Band 2 High/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.16 W/kg


Body Back/WCDMA Band 2 High/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.48 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.628 W/kg

Maximum value of SAR (measured) = 1.76 W/kg

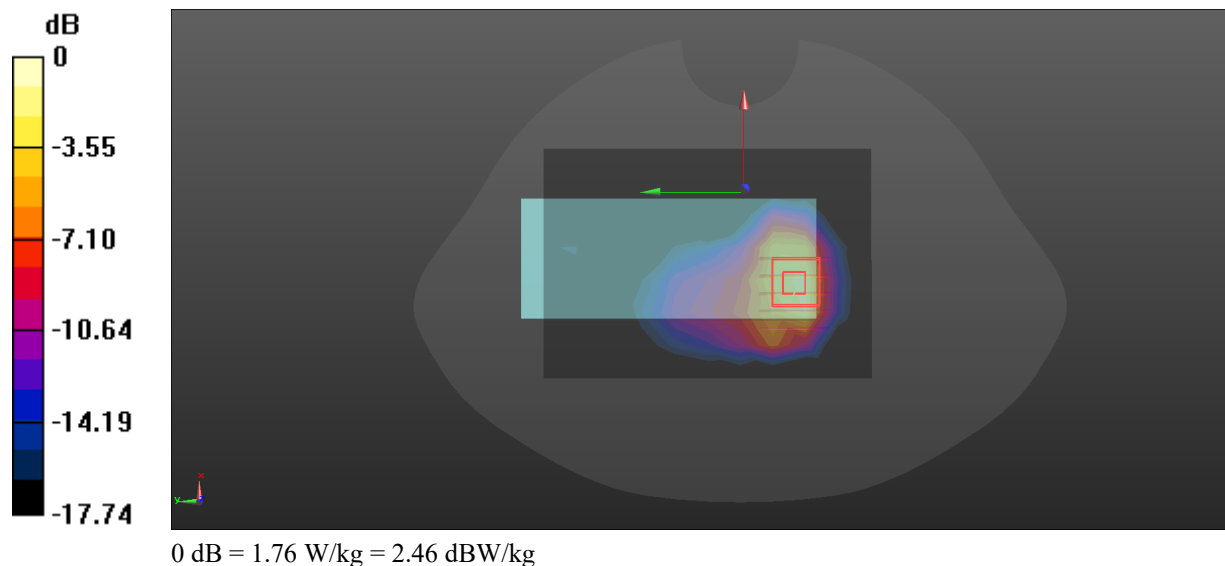

Test Plot 7#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.782$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/WCDMA Band 5 Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.239 W/kg


Head Left Cheek/WCDMA Band 5 Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.497 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.205 W/kg; SAR(10 g) = 0.161 W/kg

Maximum value of SAR (measured) = 0.233 W/kg

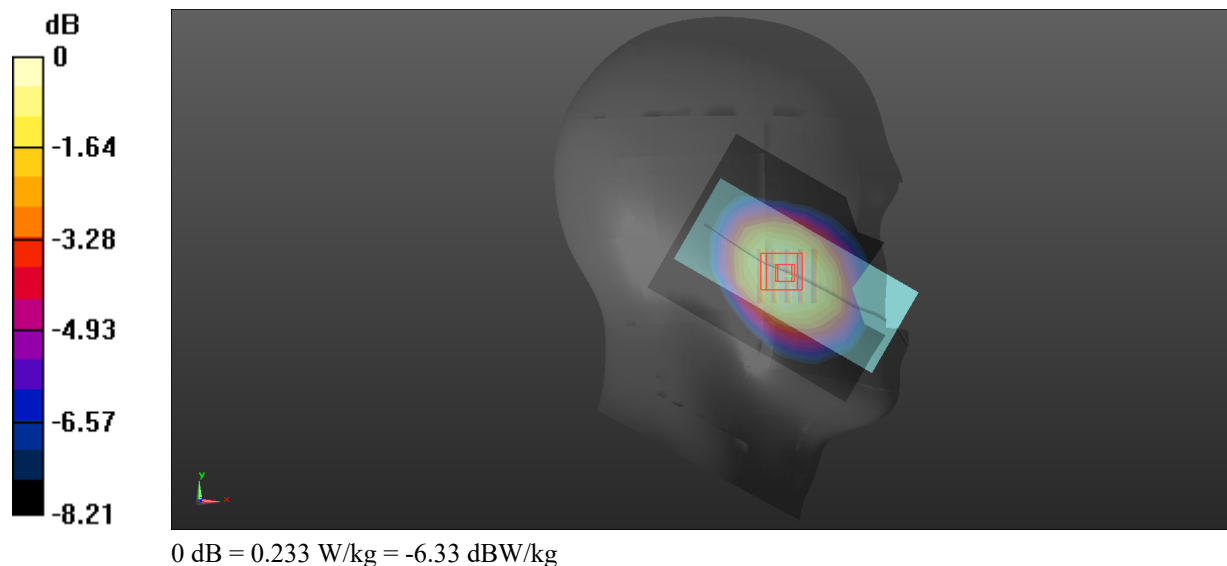

Test Plot 8#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 40.782$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @836.6 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/WCDMA Band 5 Mid/Area Scan (8x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.396 W/kg


Body Back/WCDMA Band 5 Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.53 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.442 W/kg

SAR(1 g) = 0.338 W/kg; SAR(10 g) = 0.252 W/kg

Maximum value of SAR (measured) = 0.411 W/kg

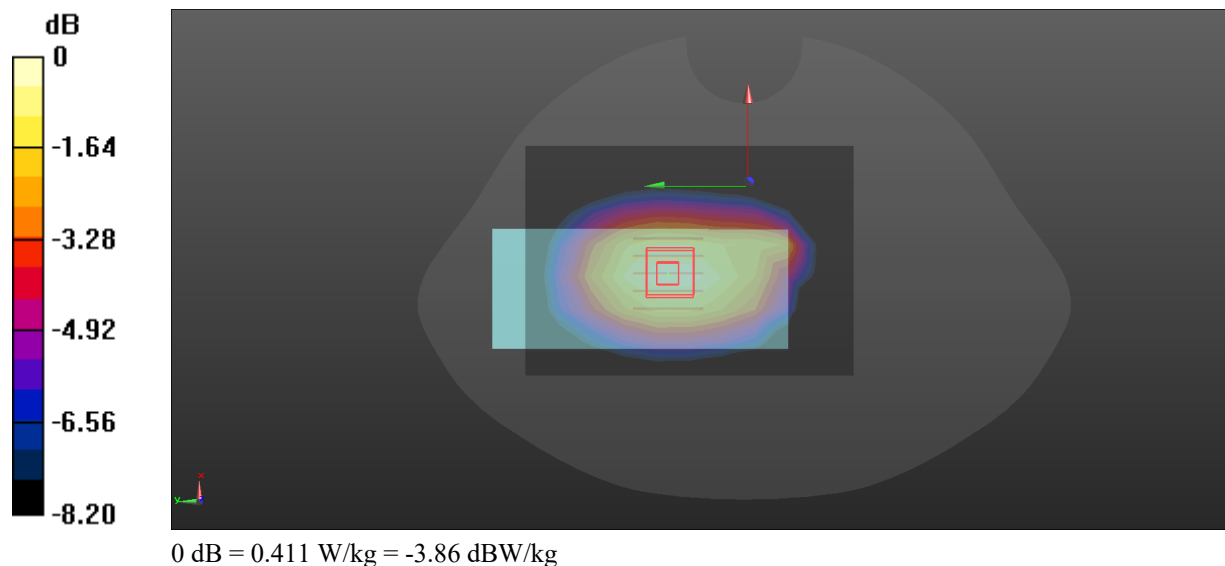

Test Plot 9#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.608$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.96, 7.29, 7.3) @1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/LTE Band 2 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0810 W/kg


Head Right Cheek/LTE Band 2 1RB Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.7960 V/m; Power Drift = 0.10dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.066 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.0836 W/kg

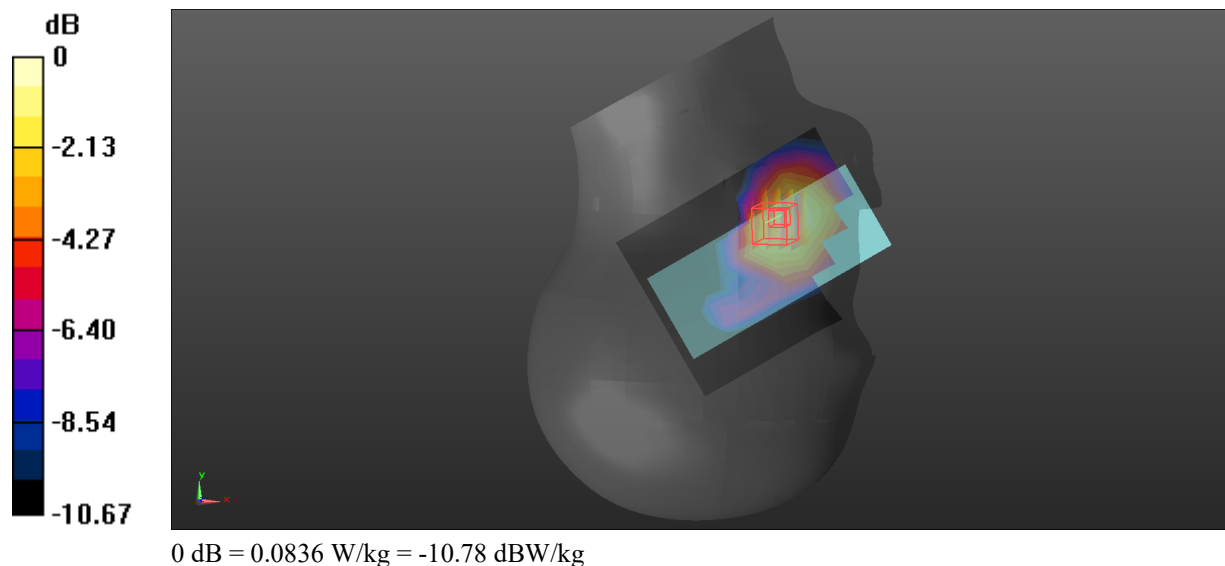

Test Plot 10#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic FDD-LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.386$ S/m; $\epsilon_r = 40.608$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.96, 7.29, 7.3) @1880 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/LTE Band 2 100%RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.872 W/kg


Body Back/LTE Band 2 100%RB Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.87 V/m; Power Drift = 0.03dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.841 W/kg; SAR(10 g) = 0.419 W/kg

Maximum value of SAR (measured) = 1.26 W/kg

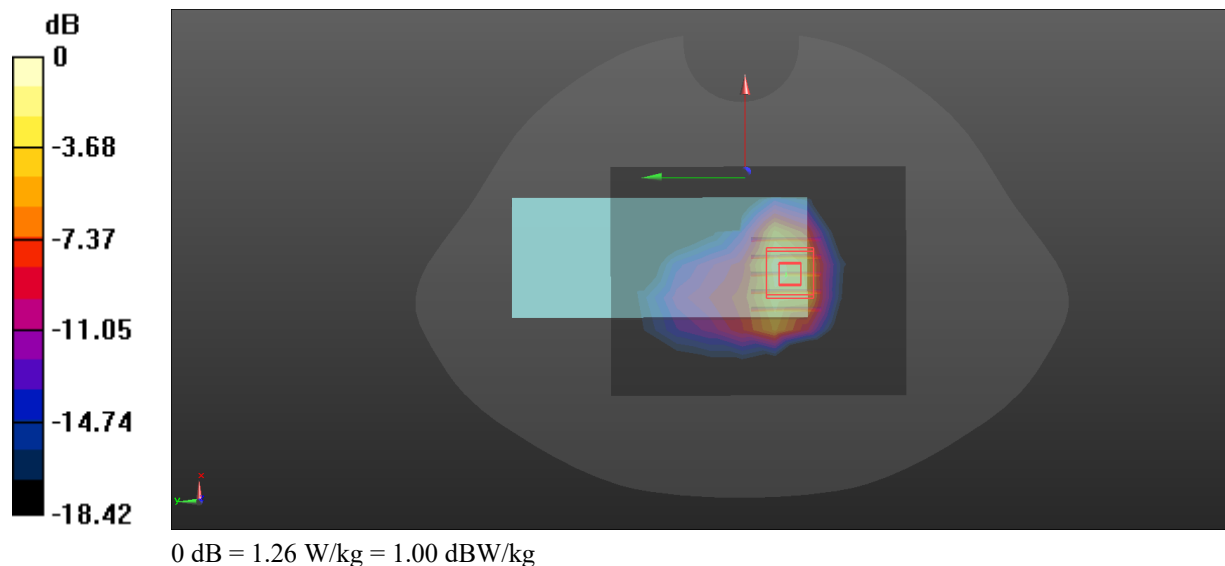

Test Plot 11#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 41.187$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/LTE Band 12 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.189 W/kg


Head Left Cheek/LTE Band 12 1RB Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.432 V/m; Power Drift = 0.16dB

Peak SAR (extrapolated) = 0.191 W/kg

SAR(1 g) = 0.159 W/kg; SAR(10 g) = 0.124 W/kg

Maximum value of SAR (measured) = 0.180 W/kg

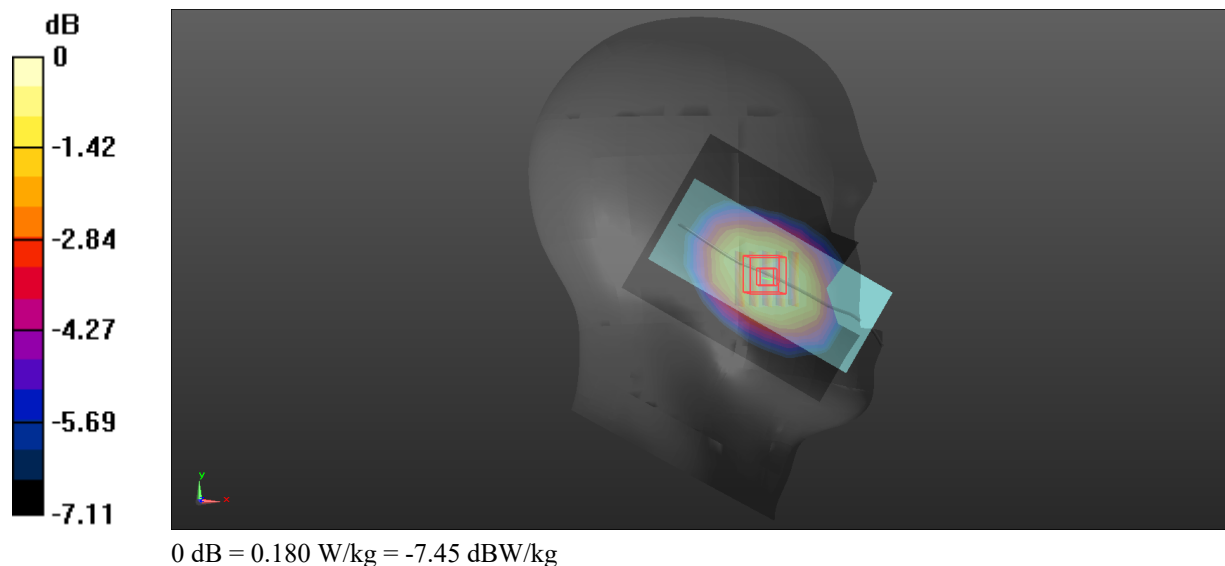

Test Plot 12#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**


Communication System: Generic FDD-LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 707.5 \text{ MHz}$; $\sigma = 0.874 \text{ S/m}$; $\epsilon_r = 41.187$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @707.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

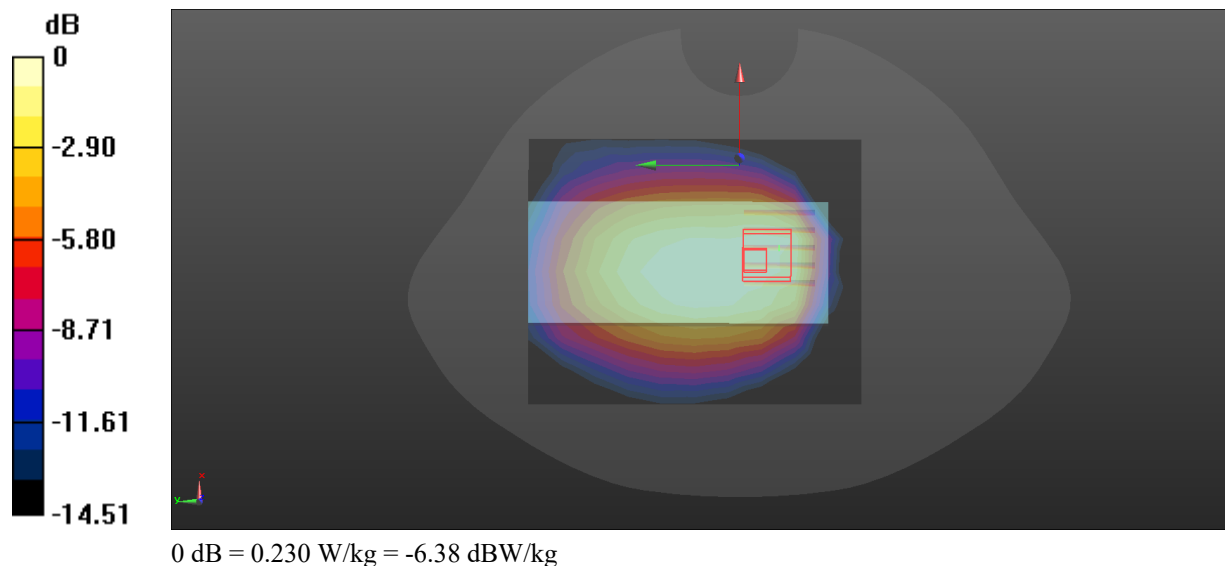Body Back/LTE Band 12 1RB Mid/Area Scan (9x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.230 W/kg **Body Back/LTE Band 12 1RB Mid/Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 14.81 V/m ; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.281 W/kg **SAR(1 g) = 0.170 W/kg ; SAR(10 g) = 0.116 W/kg** Maximum value of SAR (measured) = 0.230 W/kg 

Test Plot 13#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.881 \text{ S/m}$; $\epsilon_r = 41.151$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @782 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/LTE Band 13 1RB Mid/Area Scan (8x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.0651 W/kg


Head Left Cheek/LTE Band 13 1RB Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.256 V/m; Power Drift = 0.17dB

Peak SAR (extrapolated) = 0.0670 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.043 W/kg

Maximum value of SAR (measured) = 0.0625 W/kg

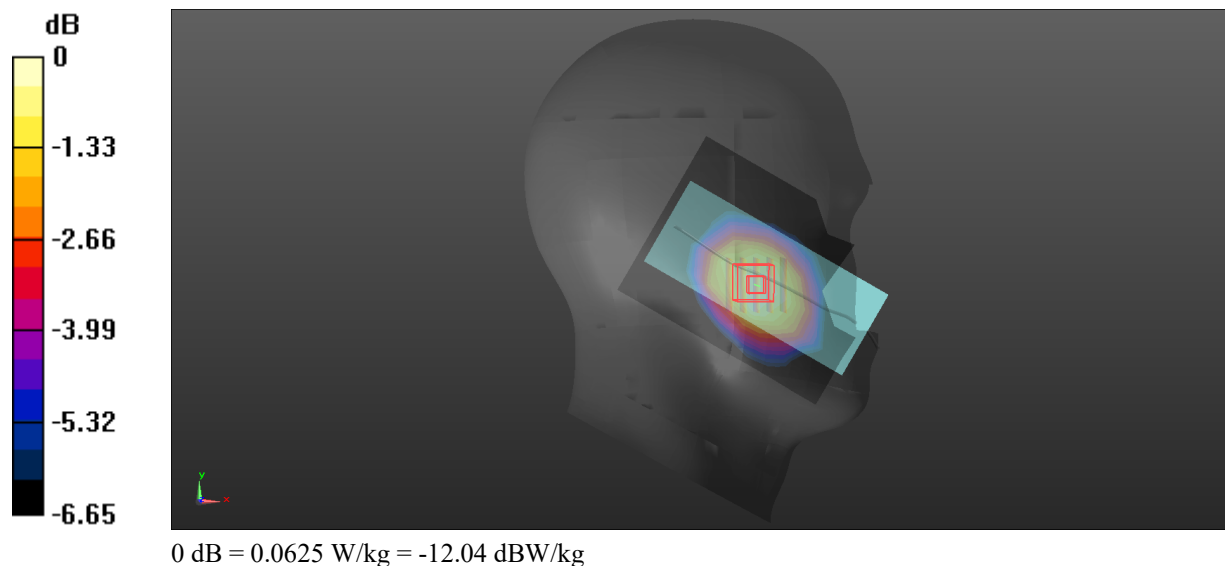

Test Plot 14#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**


Communication System: Generic FDD-LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.881 \text{ S/m}$; $\epsilon_r = 41.151$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @782 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

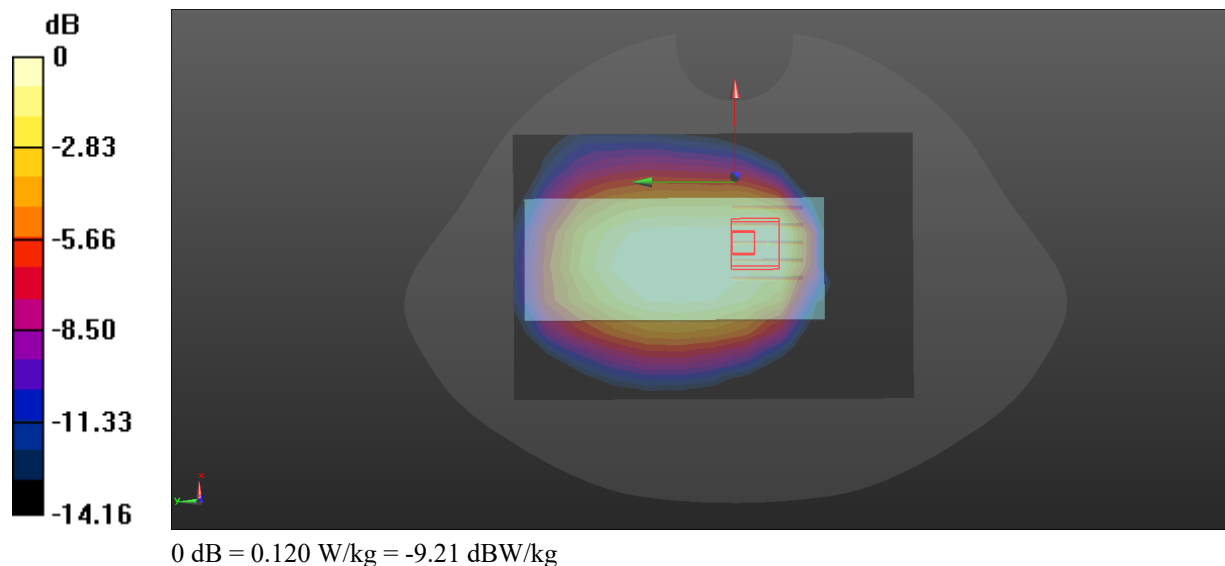Body Back/LTE Band 13 1RB Mid/Area Scan (9x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.135 W/kg **Body Back/LTE Band 13 1RB Mid/Zoom Scan (5x5x7) /Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 10.79 V/m ; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.154 W/kg **SAR(1 g) = 0.093 W/kg ; SAR(10 g) = 0.063 W/kg** Maximum value of SAR (measured) = 0.120 W/kg 

Test Plot 15#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.798$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @831.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/LTE Band 26 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.251 W/kg


Head Left Cheek/LTE Band 26 1RB Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.445 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.215 W/kg; SAR(10 g) = 0.168 W/kg

Maximum value of SAR (measured) = 0.244 W/kg

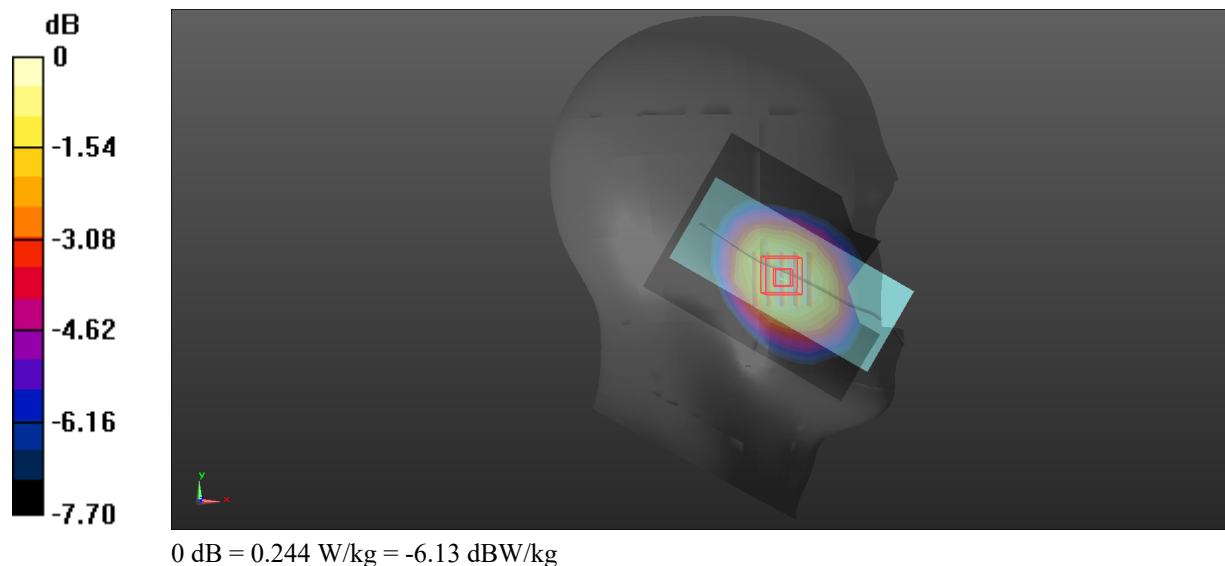

Test Plot 16#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic FDD-LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 40.798$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.08, 8.47, 8.48) @831.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/LTE Band 26 1RB Mid/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.352 W/kg


Body Back/LTE Band 26 1RB Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.19 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.337 W/kg

SAR(1 g) = 0.273 W/kg; SAR(10 g) = 0.208 W/kg

Maximum value of SAR (measured) = 0.319 W/kg

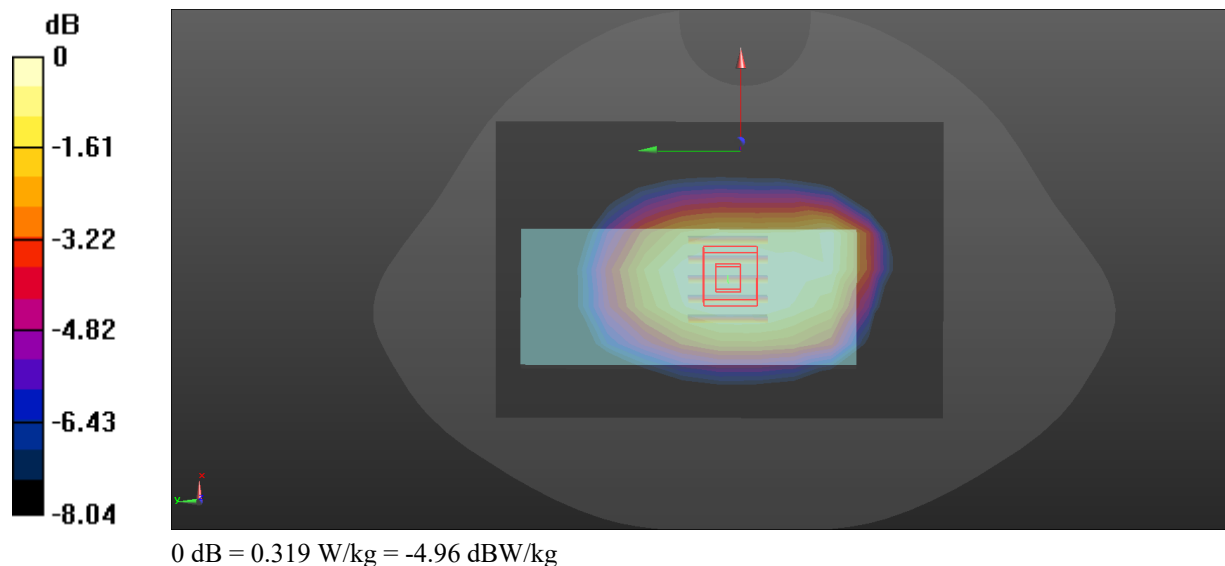

Test Plot 17#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic TDD-LTE (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2595$ MHz; $\sigma = 1.928$ S/m; $\epsilon_r = 37.995$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @2595 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/LTE Band 41 1RB Mid/Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.0611 W/kg


Head Right Cheek/LTE Band 41 1RB Mid/Zoom Scan (7x7x7) /Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.070 V/m; Power Drift = 0.00dB

Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.0628 W/kg

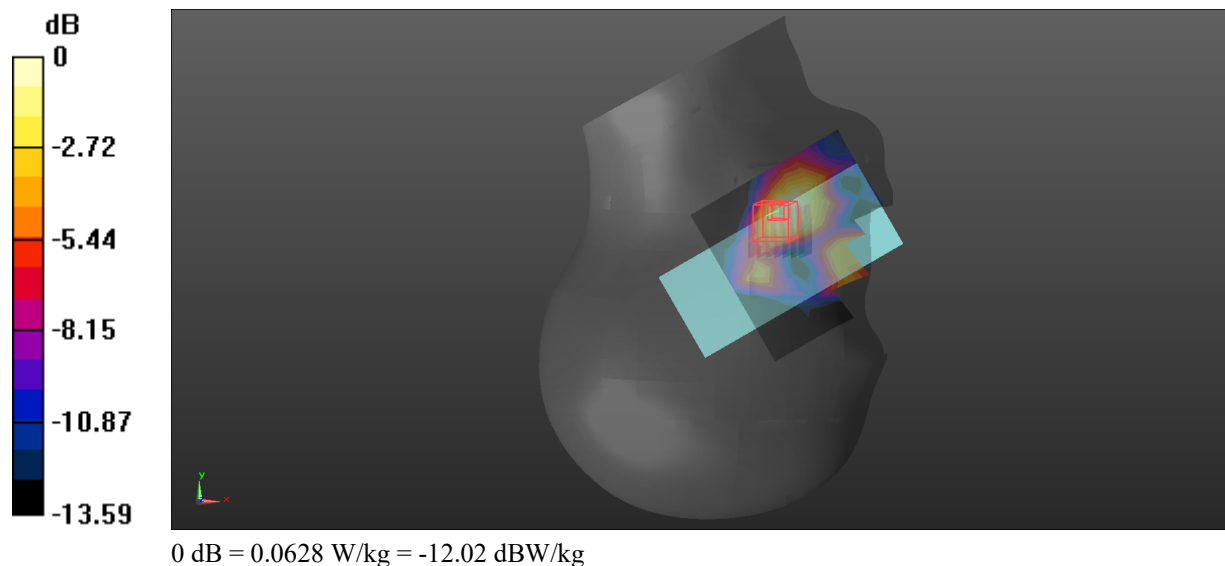

Test Plot 18#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic TDD-LTE (0); Frequency: 2545 MHz; Duty Cycle: 1:1.58

Medium parameters used: $f = 2545 \text{ MHz}$; $\sigma = 1.866 \text{ S/m}$; $\epsilon_r = 38.13$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(6.6, 6.92, 6.93) @2545 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/LTE Band 41 1RB Low/Area Scan (12x17x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.27 W/kg


Body Back/LTE Band 41 1RB Low/Zoom Scan (7x7x7) /Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 8.899 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.773 W/kg; SAR(10 g) = 0.341 W/kg

Maximum value of SAR (measured) = 1.25 W/kg

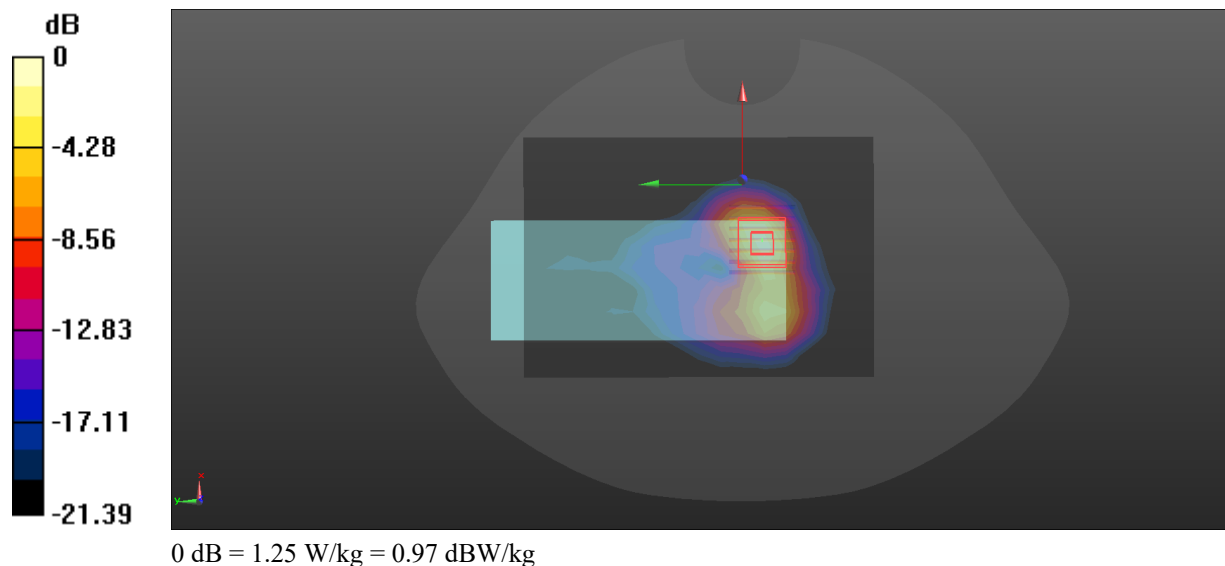

Test Plot 19#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 39.389$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.2, 7.55, 7.56) @1745 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Right Cheek/LTE Band 66 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.0711 W/kg


Head Right Cheek/LTE Band 66 1RB Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 0.7900 V/m; Power Drift = 0.18dB

Peak SAR (extrapolated) = 0.133 W/kg

SAR(1 g) = 0.050 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.0638 W/kg

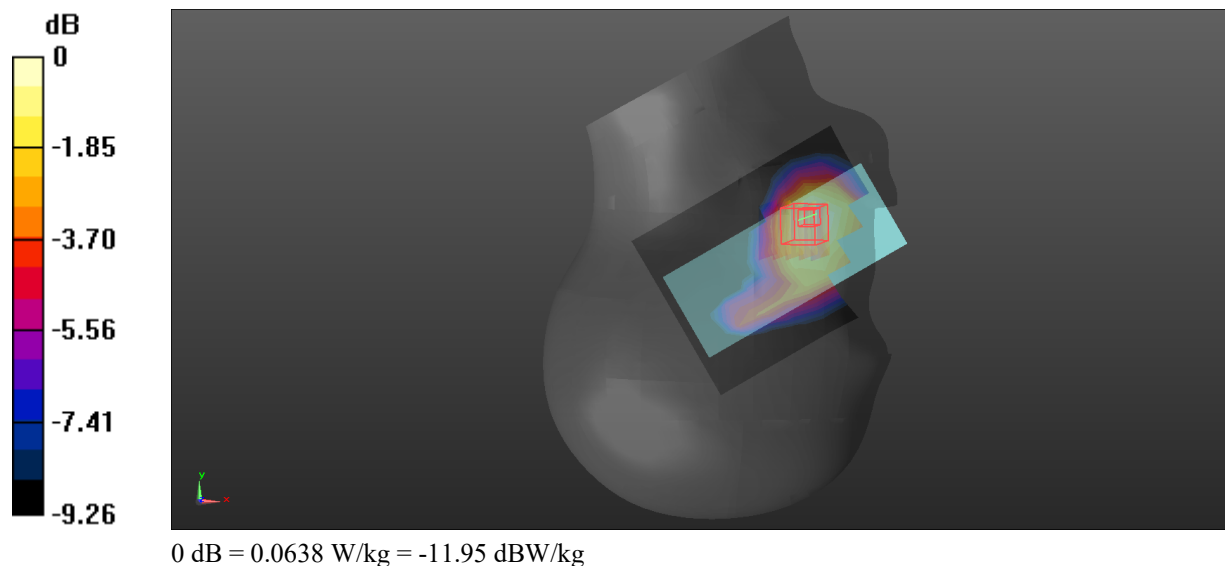

Test Plot 20#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic FDD-LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.418$ S/m; $\epsilon_r = 39.316$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(7.2, 7.55, 7.56) @1770 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/LTE Band 66 100%RB High/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.976 W/kg


Body Back/LTE Band 66 100%RB High/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.44 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.25 W/kg

SAR(1 g) = 0.707 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

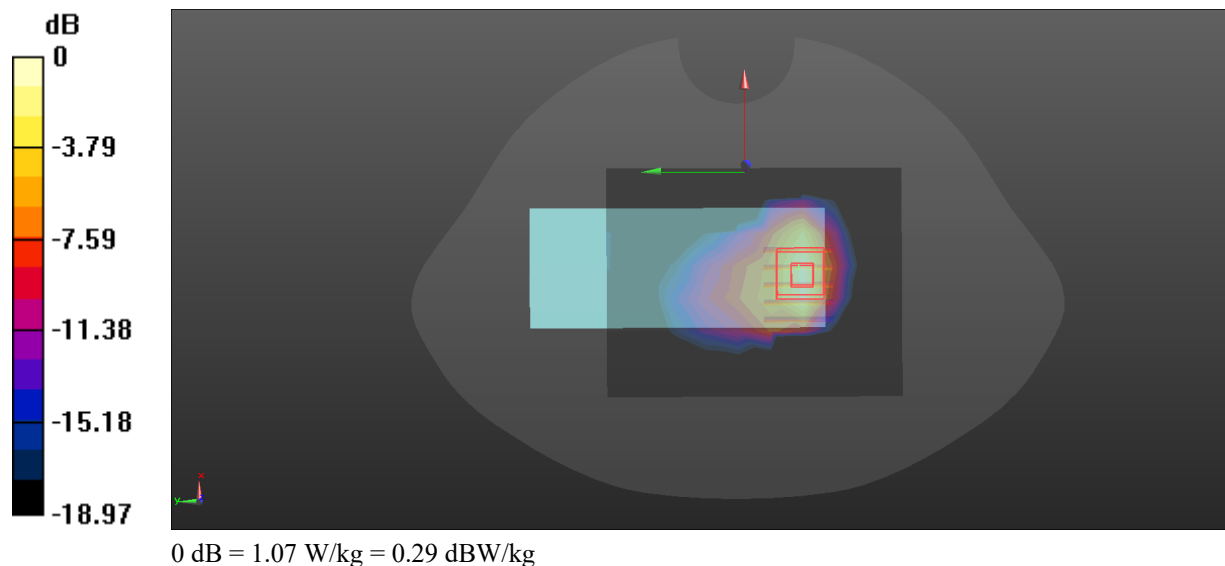

Test Plot 21#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 680.5 \text{ MHz}$; $\sigma = 0.871 \text{ S/m}$; $\epsilon_r = 41.199$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @680.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Head Left Cheek/LTE Band 71 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.172 W/kg


Head Left Cheek/LTE Band 71 1RB Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.677 V/m; Power Drift = 0.17dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.172 W/kg

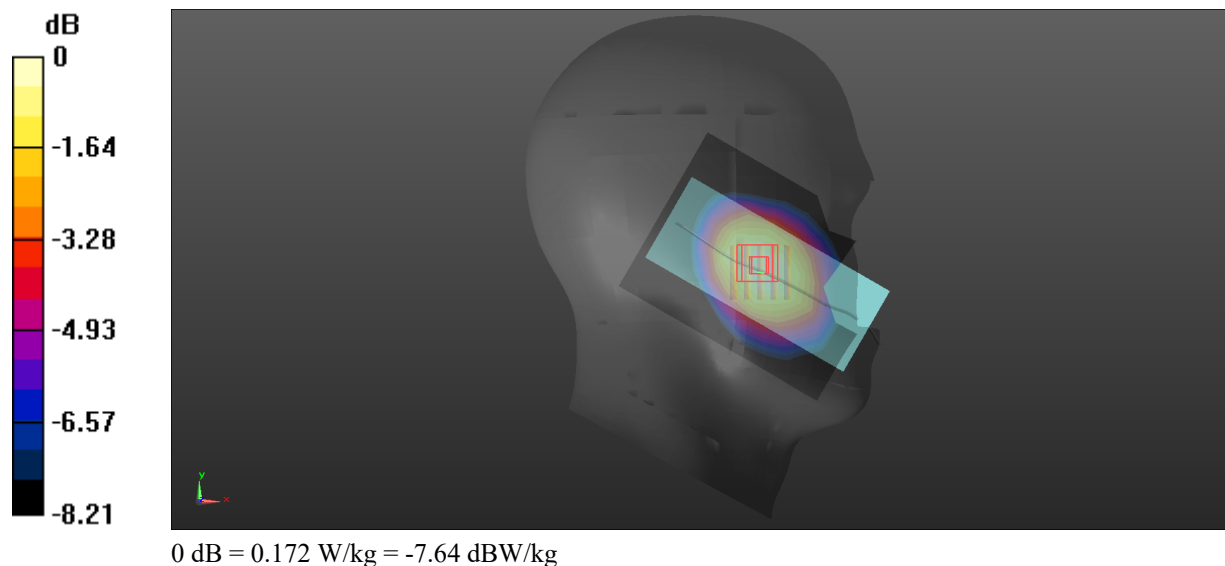

Test Plot 22#:**DUT: Mobile Phone; Type: B1; Serial: 2YCW-1**

Communication System: Generic FDD-LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 680.5 \text{ MHz}$; $\sigma = 0.871 \text{ S/m}$; $\epsilon_r = 41.199$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7896; ConvF(8.72, 9.14, 9.15) @680.5 MHz;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1325; Calibrated: 10/08/2024
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- Measurement SW: DASY52, Version 52.10 (2);

Body Back/LTE Band 71 1RB Mid/Area Scan (8x10x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.315 W/kg

Body Back/LTE Band 71 1RB Mid/Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.83 V/m; Power Drift = 0.13dB

Peak SAR (extrapolated) = 0.341 W/kg

SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.203 W/kg

Maximum value of SAR (measured) = 0.317 W/kg

