



Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

2.250000000 GHz

Freq Offset


Scale Type

Auto

Log

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



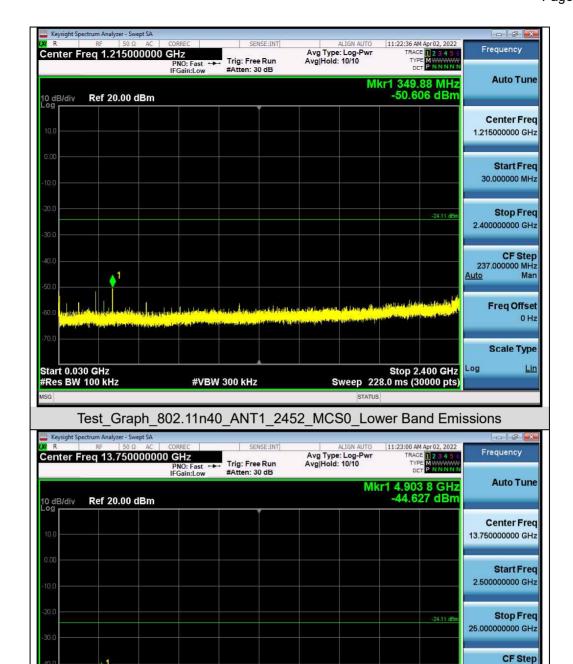


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11n40 ANT1 2452 MCS0 Higher Band Emissions

#VBW 300 kHz

Start 2.50 GHz #Res BW 100 kHz






Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Web: http://www.agccert.com/



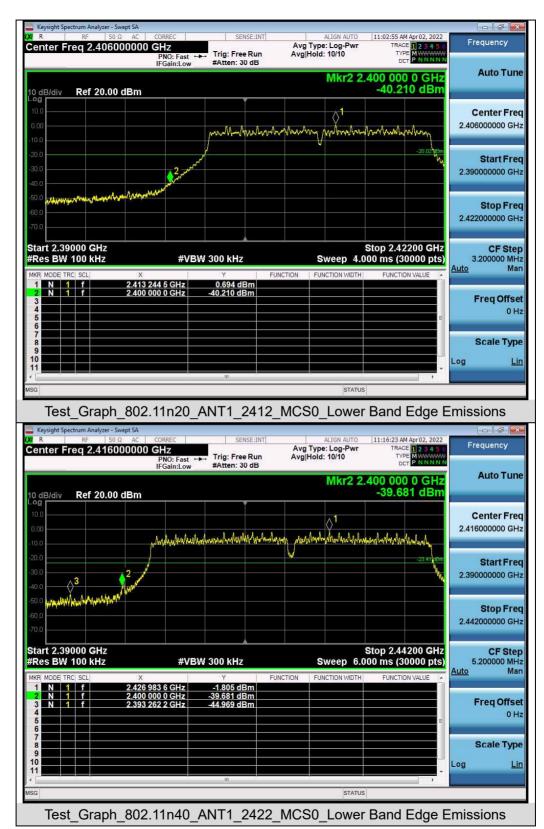

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.



Page 45 of 80

10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1 MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the ANSI C63.10 (2013) item 11.10 was used in this testing.

10.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 8.2.

10.3 MEASUREMENT EQUIPMENT USED

Refer to Section 6.


10.4 LIMITS AND MEASUREMENT RESULT

	Test Data of Conducted Output Power Spectral Density								
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail				
	2412	-0.654	-8.893	≤8	Pass				
802.11b	2437	0.024	-8.215	≤8	Pass				
	2462	-0.812	-9.051	≤8	Pass				
	2412	-4.286	-12.525	≤8	Pass				
802.11g	2437	-4.106	-12.345	≤8	Pass				
	2462	-4.425	-12.664	≤8	Pass				
	2412	-5.792	-14.031	≤8	Pass				
802.11n20	2437	-5.727	-13.966	≤8	Pass				
	2462	-6.130	-14.369	≤8	Pass				
	2422	-8.416	-16.655	≤8	Pass				
802.11n40	2437	-8.238	-16.477	≤8	Pass				
	2452	-8.967	-17.206	≤8	Pass				

Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).



Test Graphs of Conducted Output Power Spectral Density

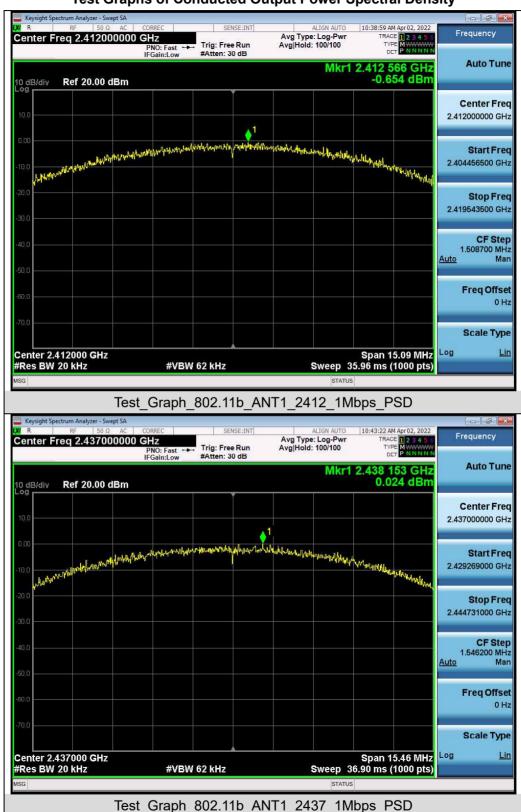


Scale Type

Log

Span 24.62 MHz Sweep 58.67 ms (1000 pts)



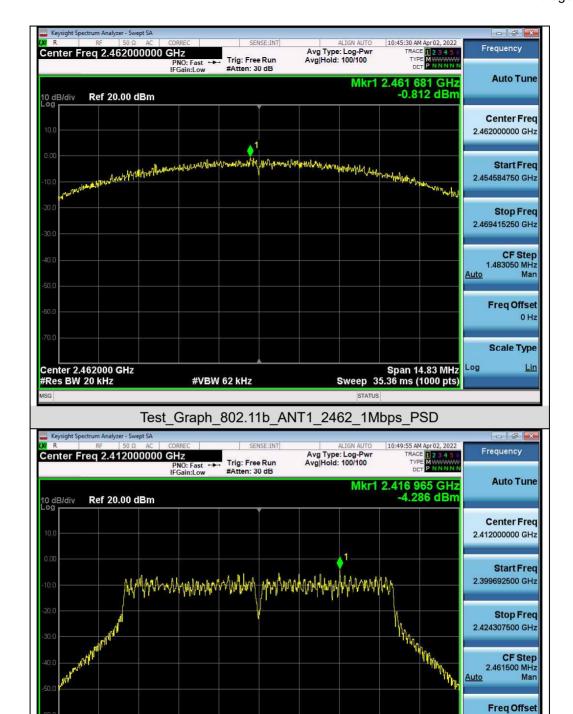


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test_Graph_802.11g_ANT1_2412_6Mbps_PSD

#VBW 62 kHz

Center 2.41200 GHz #Res BW 20 kHz



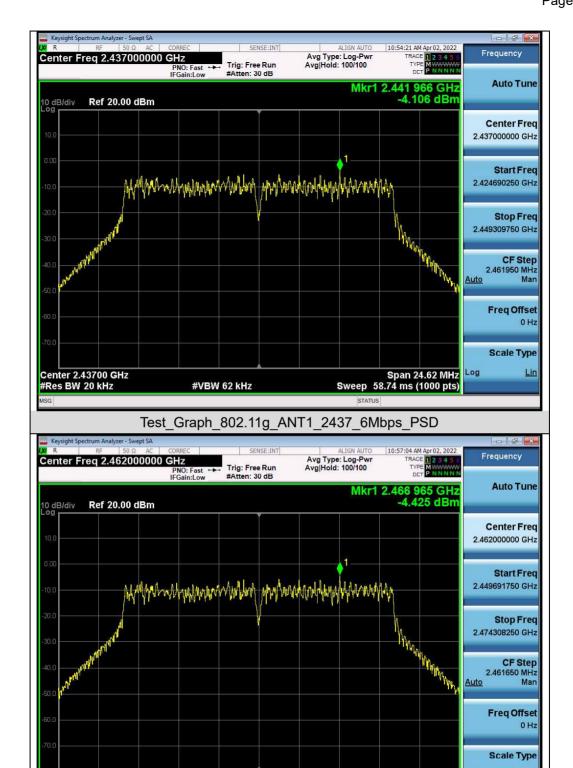

Test_Graph_802.11g_ANT1_2462_6Mbps_PSD

#VBW 62 kHz

Span 24.62 MHz Sweep 58.74 ms (1000 pts)

Log

Center 2.46200 GHz #Res BW 20 kHz

2.636550 MHz Mar

Freq Offset


Scale Type

Auto

Log

Span 26.37 MHz Sweep 62.87 ms (1000 pts)



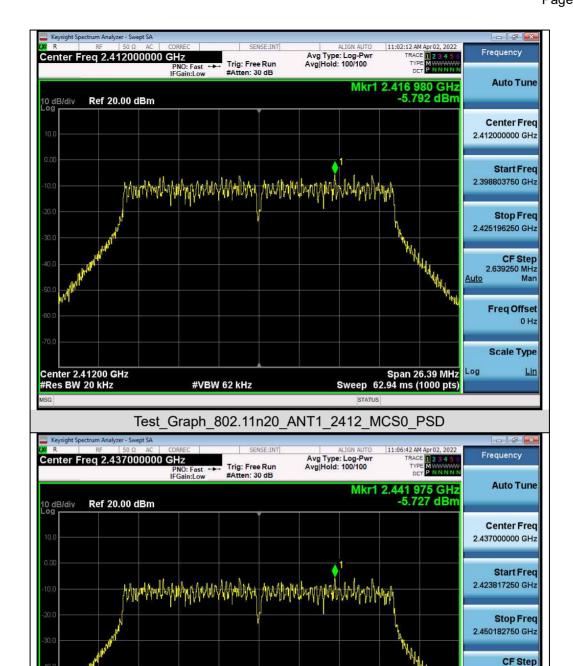

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11n20 ANT1 2437 MCS0 PSD

#VBW 62 kHz

Center 2.43700 GHz #Res BW 20 kHz


Freq Offset

Scale Type

Log

Span 52.75 MHz Sweep 125.8 ms (1000 pts)



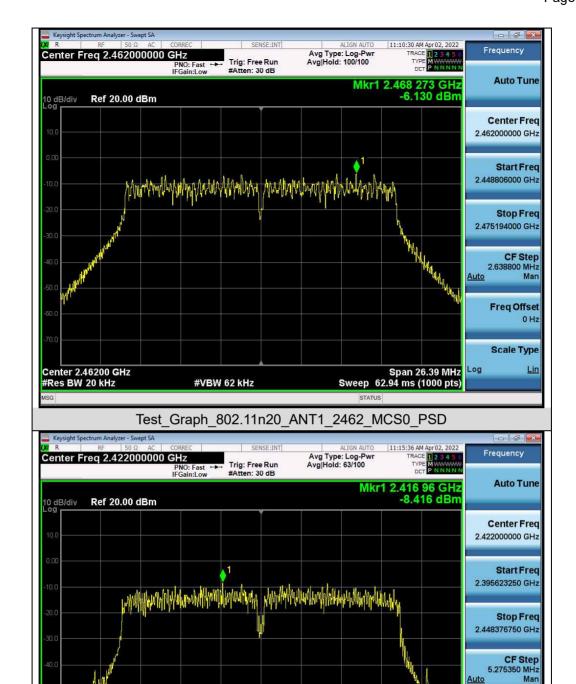


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test Graph 802.11n40 ANT1 2422 MCS0 PSD

#VBW 62 kHz

Center 2.42200 GHz #Res BW 20 kHz



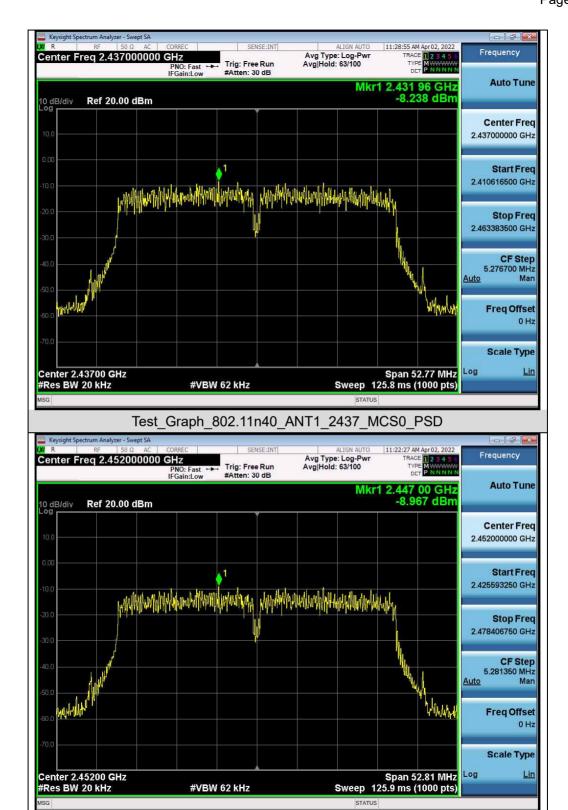

Test Graph 802.11n40 ANT1 2452 MCS0 PSD



Page 52 of 80

11. RADIATED EMISSION


11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




11.2. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

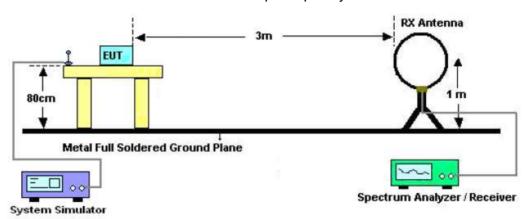

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

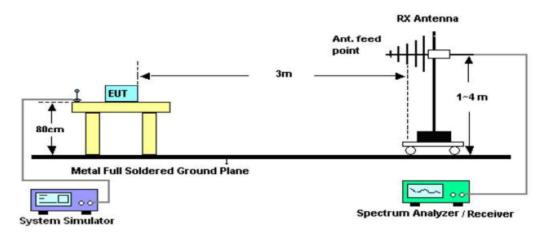

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

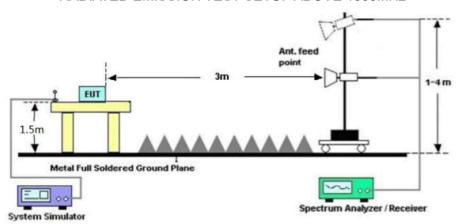



Page 54 of 80

11.3. LIMITS AND MEASUREMENT RESULT

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission.

the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



Radiated emission from 30MHz to 1000MHz

EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

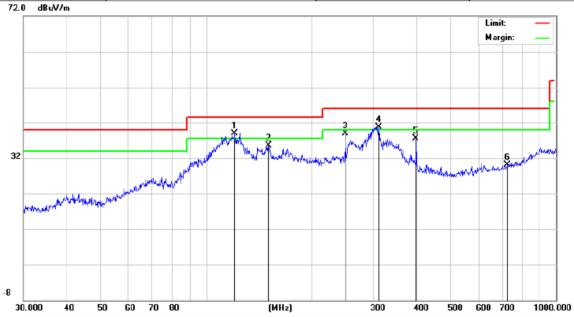


Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
*	120.6991	19.85	18.96	38.81	43.50	-4.69	peak
	151.0665	17.69	17.84	35.53	43.50	-7.97	peak
	250.3012	21.49	17.48	38.97	46.00	-7.03	peak
İ	311.0867	16.31	24.36	40.67	46.00	-5.33	peak
	397.6334	13.90	23.70	37.60	46.00	-8.40	peak
	726.8052	5.55	24.49	30.04	46.00	-15.96	peak
	*	* 120.6991 151.0665 250.3012 ! 311.0867 397.6334	Mk. Freq. Level MHz dBuV * 120.6991 19.85 151.0665 17.69 250.3012 21.49 ! 311.0867 16.31 397.6334 13.90	Mk. Freq. Level Factor MHz dBuV dB * 120.6991 19.85 18.96 151.0665 17.69 17.84 250.3012 21.49 17.48 ! 311.0867 16.31 24.36 397.6334 13.90 23.70	Mk. Freq. Level Factor ment MHz dBuV dB dBuV/m * 120.6991 19.85 18.96 38.81 151.0665 17.69 17.84 35.53 250.3012 21.49 17.48 38.97 ! 311.0867 16.31 24.36 40.67 397.6334 13.90 23.70 37.60	Mk. Freq. Level Factor ment Limit MHz dBuV dB dBuV/m dBuV/m * 120.6991 19.85 18.96 38.81 43.50 151.0665 17.69 17.84 35.53 43.50 250.3012 21.49 17.48 38.97 46.00 ! 311.0867 16.31 24.36 40.67 46.00 397.6334 13.90 23.70 37.60 46.00	Mk. Freq. Level Factor ment Limit Over MHz dBuV dB dBuV/m dBuV/m dB dBuV/m dB * 120.6991 19.85 18.96 38.81 43.50 -4.69 151.0665 17.69 17.84 35.53 43.50 -7.97 250.3012 21.49 17.48 38.97 46.00 -7.03 ! 311.0867 16.31 24.36 40.67 46.00 -5.33 397.6334 13.90 23.70 37.60 46.00 -8.40

RESULT: PASS



EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

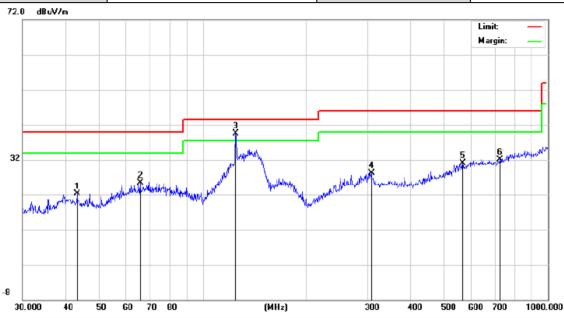

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		43.2017	6.85	15.54	22.39	40.00	-17.61	peak
2		65.8031	7.57	18.01	25.58	40.00	-14.42	peak
3	*	124.5690	20.51	19.03	39.54	43.50	-3.96	peak
4		307.8313	7.95	20.43	28.38	46.00	-17.62	peak
5		566.6223	6.22	24.96	31.18	46.00	-14.82	peak
6		726.8052	5.44	26.76	32.20	46.00	-13.80	peak

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. All test modes had been pre-tested. The 802.11b at middle channel is the worst case and recorded in the report.



Page 57 of 80


Radiated emission above 1GHz

EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level Limits Margin		Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4824.000	56.38	0.08	56.46	74	-17.54	peak
4824.000	47.51	0.08	47.59	54	-6.41	AVG
7236.000	50.24	2.21	52.45	74	-21.55	peak
7236.000	41.58	2.21	43.79	54	-10.21	AVG
emark.						
emark:						
actor = Anter	nna Factor + Cable	e Loss - Pre-	amplifier.			

EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2412MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Limits Margin		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type	
4824.000	55.97	0.08	56.05	74	-17.95	peak	
4824.000	46.37	0.08	46.45	54	-7.55	AVG	
7236.000	51.08	2.21	53.29	74	-20.71	peak	
7236.000	40.71	2.21	42.92	54	-11.08	AVG	
Pomorla							
Remark:							
actor = Anter	nna Factor + Cable	e Loss - Pre-	amplifier.				





EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Horizontal

Frequency	ncy Meter Reading F	Factor	ctor Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	- value Type	
4874.000	56.37	0.14	56.51	74	-17.49	peak	
4874.000	47.51	0.14	47.65	54	-6.35	AVG	
7311.000	51.06	2.36	53.42	74	-20.58	peak	
7311.000	40.37	2.36	42.73	54	-11.27	AVG	
Remark:							

EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2437MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value rype
4874.000	56.38	0.14	56.52	74	-17.48	peak
4874.000	46.28	0.14	46.42	54	-7.58	AVG
7311.000	50.27	2.36	52.63	74	-21.37	peak
7311.000	40.19	2.36	42.55	54	-11.45	AVG
emark:						
Hilaik.						



Page 59 of 80

EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	55.29	0.22	55.51	74	-18.49	peak
4924.000	45.87	0.22	46.09	54	-7.91	AVG
7386.000	49.62	2.64	52.26	74	-21.74	peak
7386.000	40.27	2.64	42.91	54	-11.09	AVG
Remark:						-
actor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.	•	•	•

EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	58%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with date rate 1 2462MHz	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4924.000	56.38	0.22	56.6	74	-17.4	peak
4924.000	46.28	0.22	46.5	54	- 7.5	AVG
7386.000	51.27	2.64	53.91	74	-20.09	peak
7386.000	42.16	2.64	44.8	54	-9.2	AVG
om ork:						
emark:						

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been pre-tested. The 802.11b mode is the worst case and recorded in the report.



Test result for band edge emission at restricted bands

EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: PASS



EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2412MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement





EUT	wifi module	Model Name	F89ESSM23
Temperature	25°C	Relative Humidity	60%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	802.11b with data rate 1 2462MHz	Antenna	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement

