

Test Plots 1#:2.4G WLAN Mid Body Back**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**


Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.826 \text{ S/m}$; $\epsilon_r = 41.059$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.05, 7.92, 7.22) @ 2437 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

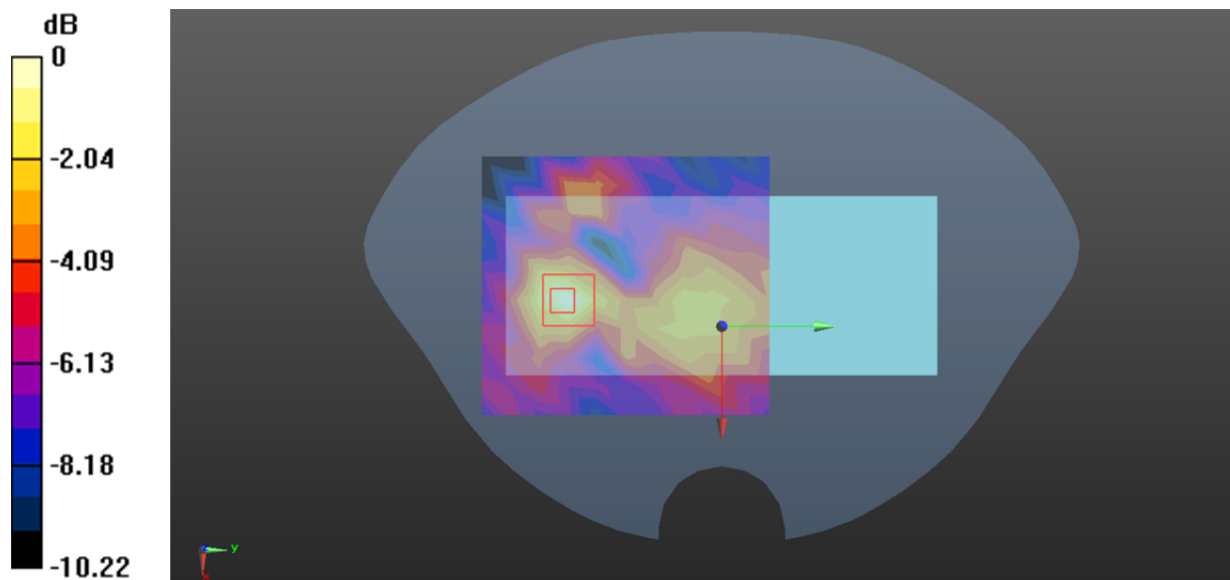Area Scan (10x11x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$ Maximum value of SAR (measured) = 0.0297 W/kg **Zoom Scan (7x7x7)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 2.907 V/m ; Power Drift = -0.16 dB Peak SAR (extrapolated) = 0.0370 W/kg **SAR(1 g) = 0.017 W/kg ; SAR(10 g) = 0.00672 W/kg** Maximum value of SAR (measured) = 0.0290 W/kg 0 dB = 0.0290 W/kg = -15.38 dBW/kg

Test Plots 2#:2.4G WLAN Mid Handheld Front**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 41.059$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.05, 7.92, 7.22) @ 2437 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.101 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.844 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.113 W/kg

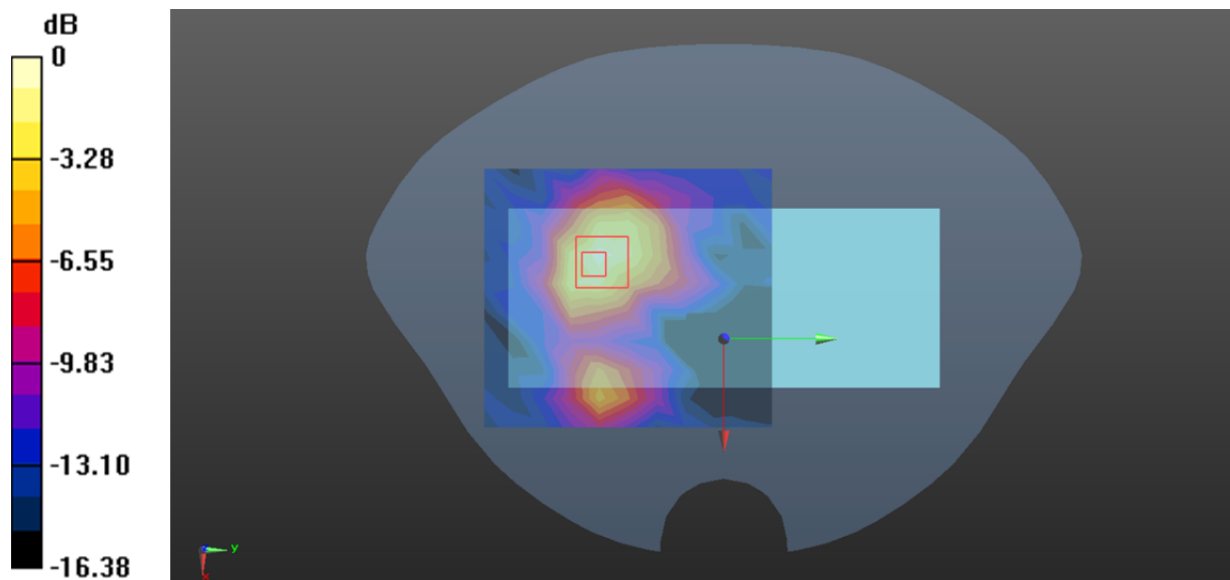

0 dB = 0.113 W/kg = -9.47 dBW/kg

Test Plots 3#:2.4G WLAN Mid Handheld Left**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System: 802.11b (0); Frequency: 2437 MHz; Duty Cycle: 1:1.01

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 41.059$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.05, 7.92, 7.22) @ 2437 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x13x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.457 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.205 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.277 W/kg; SAR(10 g) = 0.110 W/kg

Maximum value of SAR (measured) = 0.540 W/kg

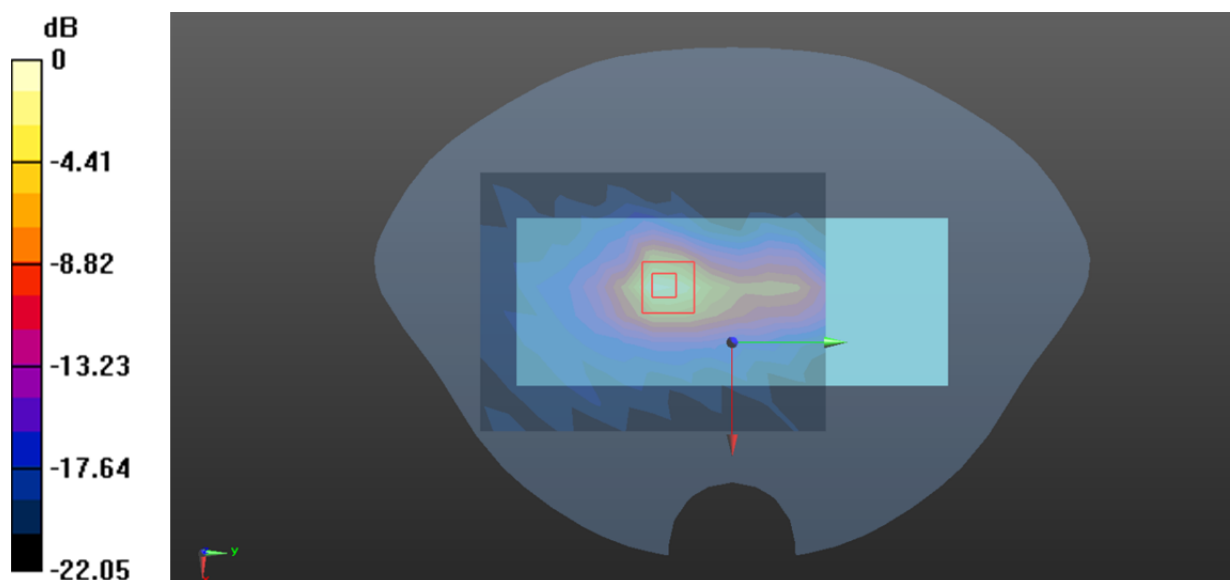

0 dB = 0.540 W/kg = -2.68 dBW/kg

Test Plots 4#:2.4G WLAN Mid Handheld Bottom**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System:802.11b (0); Frequency: 2437 MHz;Duty Cycle: 1:1.01

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.826$ S/m; $\epsilon_r = 41.059$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.05, 7.92, 7.22) @ 2437 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0605 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.620 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.0880 W/kg

SAR(1 g) = 0.042 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0673 W/kg

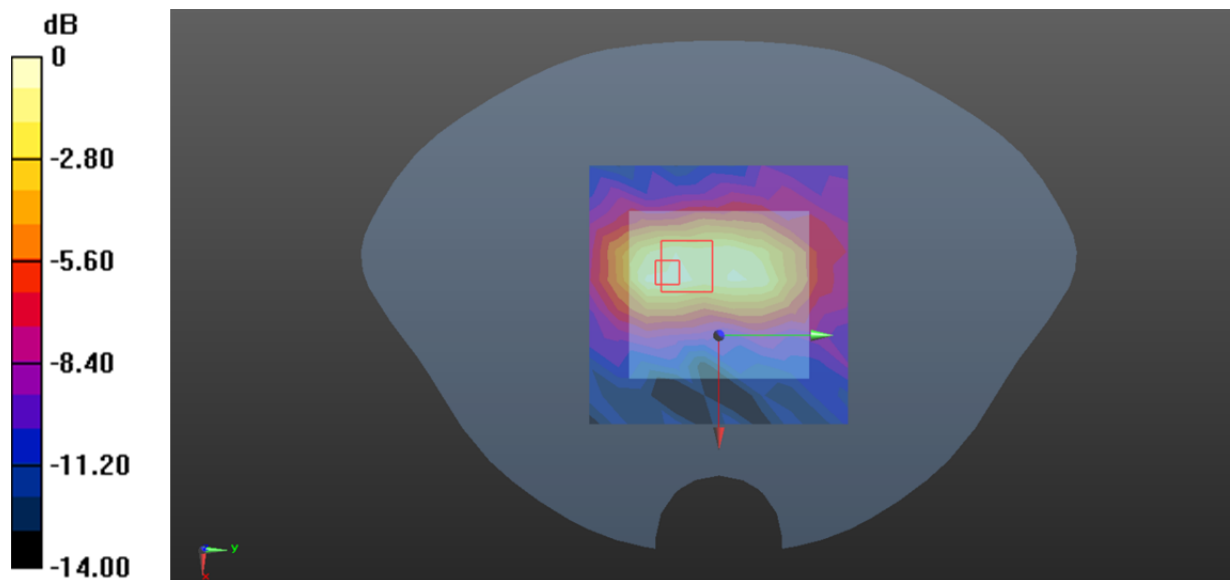

0 dB = 0.0673 W/kg = -11.72 dBW/kg

Test Plots 5#:5.2G WLAN Low Body Back**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System: 802.11n40 (0); Frequency: 5190 MHz; Duty Cycle: 1:1.15

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.491$ S/m; $\epsilon_r = 37.205$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5190 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.752 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.308 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.388 W/kg; SAR(10 g) = 0.151 W/kg

Maximum value of SAR (measured) = 0.773 W/kg

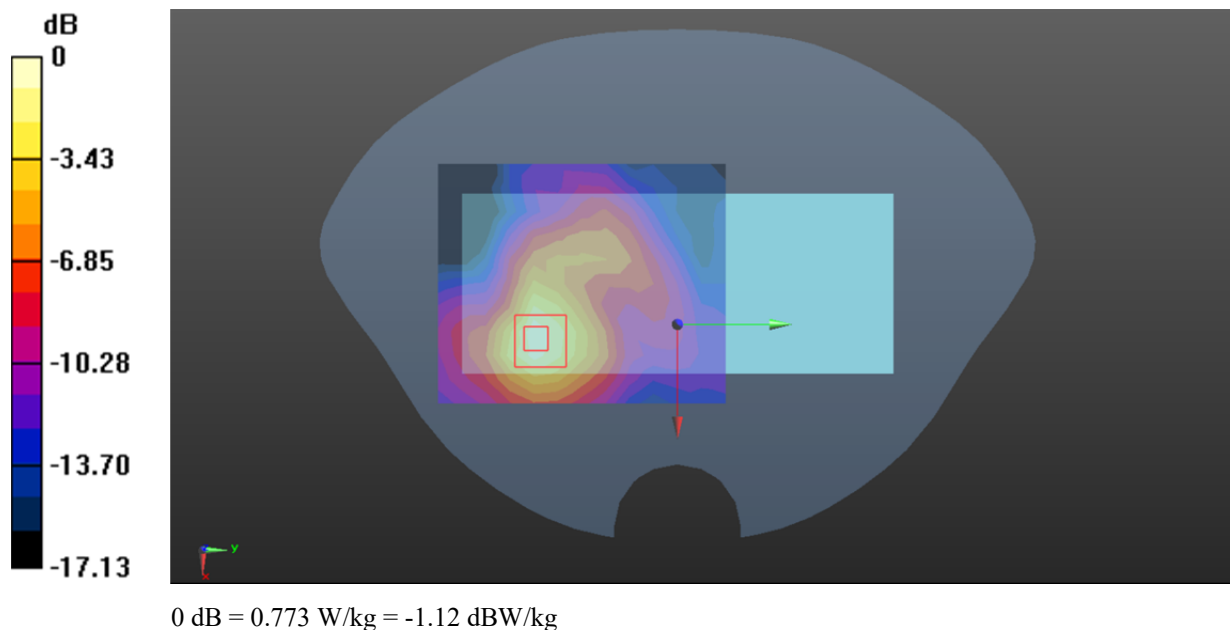

Test Plots 6#:5.2G WLAN Low Handheld Front**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System:802.11n40 (0); Frequency: 5190 MHz;Duty Cycle: 1:1.15

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.491$ S/m; $\epsilon_r = 37.205$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5190 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.356 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.636 W/kg

SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.393 W/kg

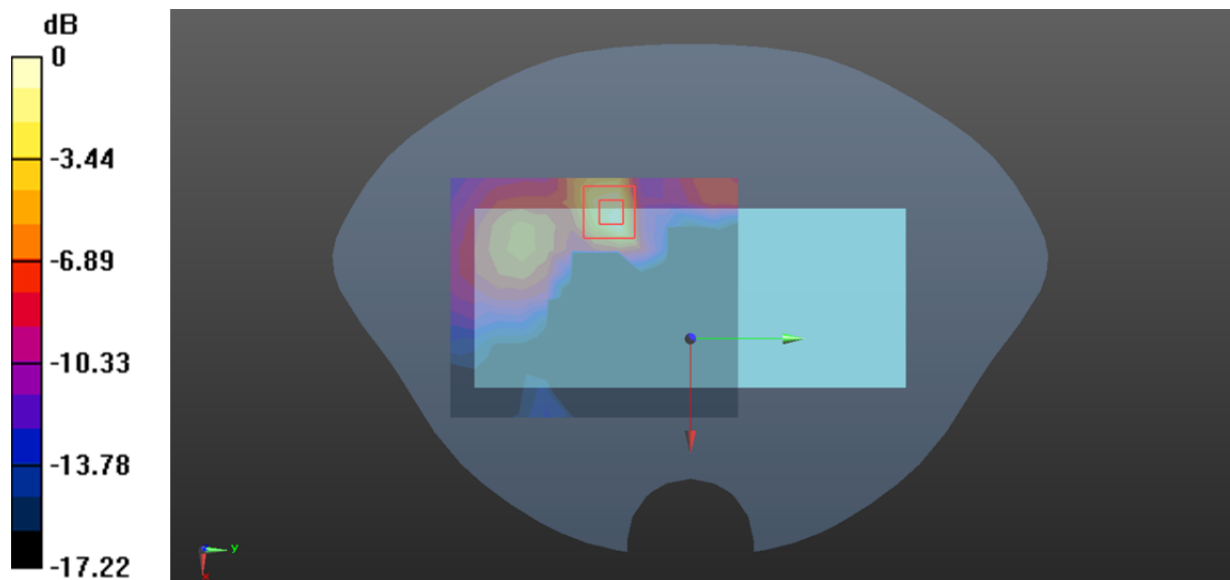

0 dB = 0.393 W/kg = -4.06 dBW/kg

Test Plots 7#:5.2G WLAN Low Handheld Left**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System: 802.11n40 (0); Frequency: 5190 MHz; Duty Cycle: 1:1.15

Medium parameters used: $f = 5190 \text{ MHz}$; $\sigma = 4.491 \text{ S/m}$; $\epsilon_r = 37.205$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5190 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x16x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 3.42 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.271 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 6.89 W/kg

SAR(1 g) = 1.87 W/kg; SAR(10 g) = 0.556 W/kg

Maximum value of SAR (measured) = 4.29 W/kg

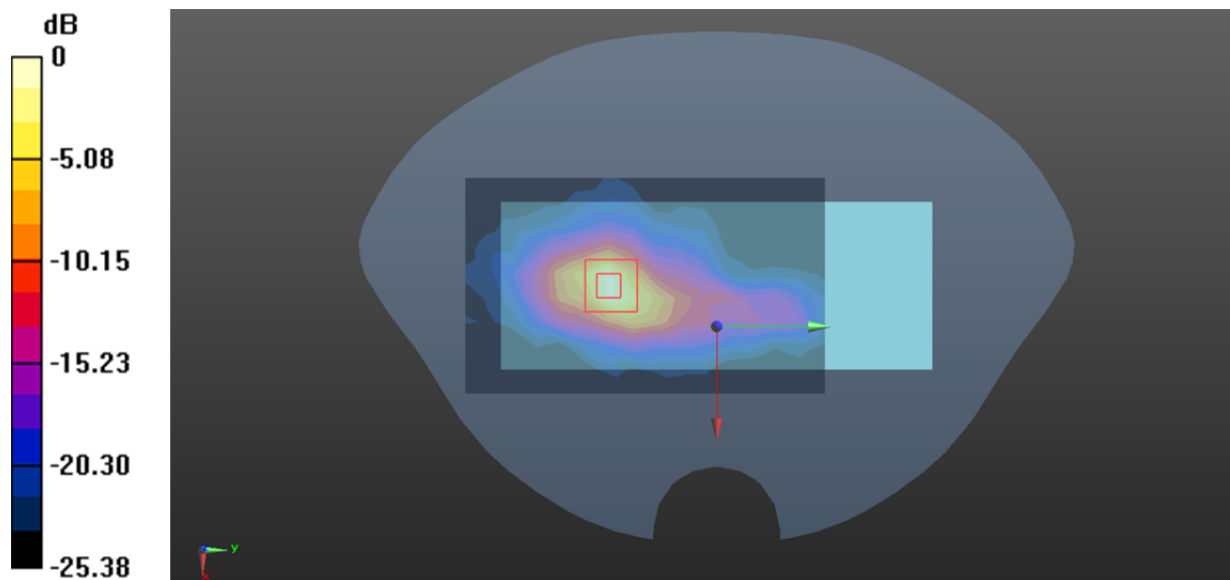

0 dB = 4.29 W/kg = 6.32 dBW/kg

Test Plots 8#:5.2G WLAN Low Handheld Bottom**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System: 802.11n40 (0); Frequency: 5190 MHz; Duty Cycle: 1:1.15

Medium parameters used: $f = 5190$ MHz; $\sigma = 4.491$ S/m; $\epsilon_r = 37.205$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5190 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.397 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.253 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.069 W/kg

Maximum value of SAR (measured) = 0.400 W/kg

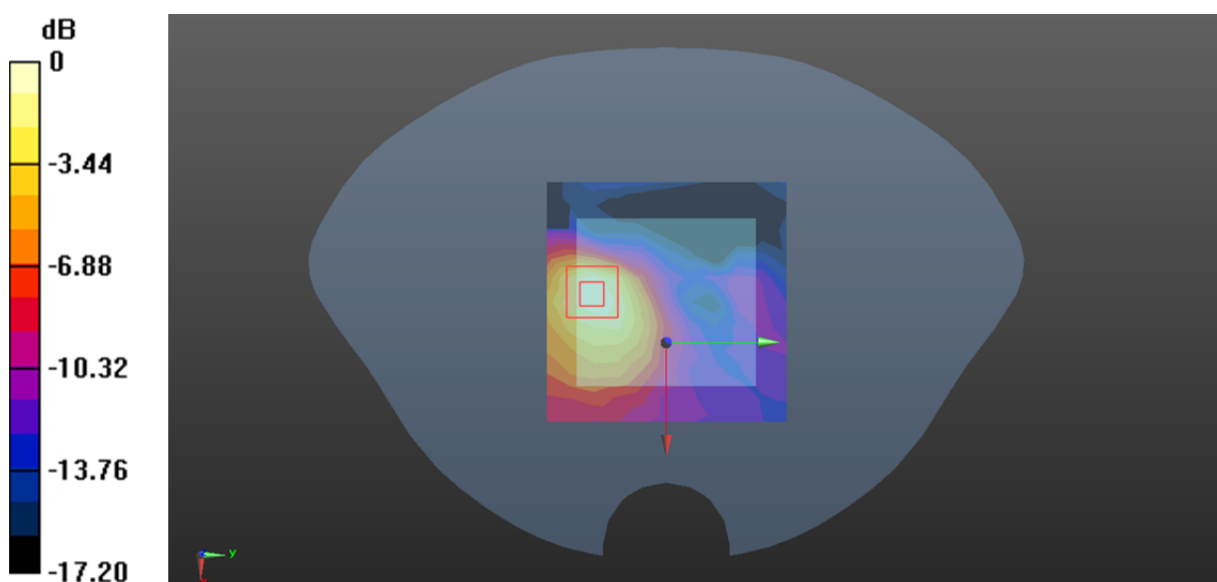

0 dB = 0.400 W/kg = -3.98 dBW/kg

Test Plots 9#:5.3G WLAN Low Body Back**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System: 802.11n40 (0); Frequency: 5270 MHz; Duty Cycle: 1:1.15

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.574$ S/m; $\epsilon_r = 36.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5270 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.948 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.319 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.488 W/kg; SAR(10 g) = 0.191 W/kg

Maximum value of SAR (measured) = 0.978 W/kg

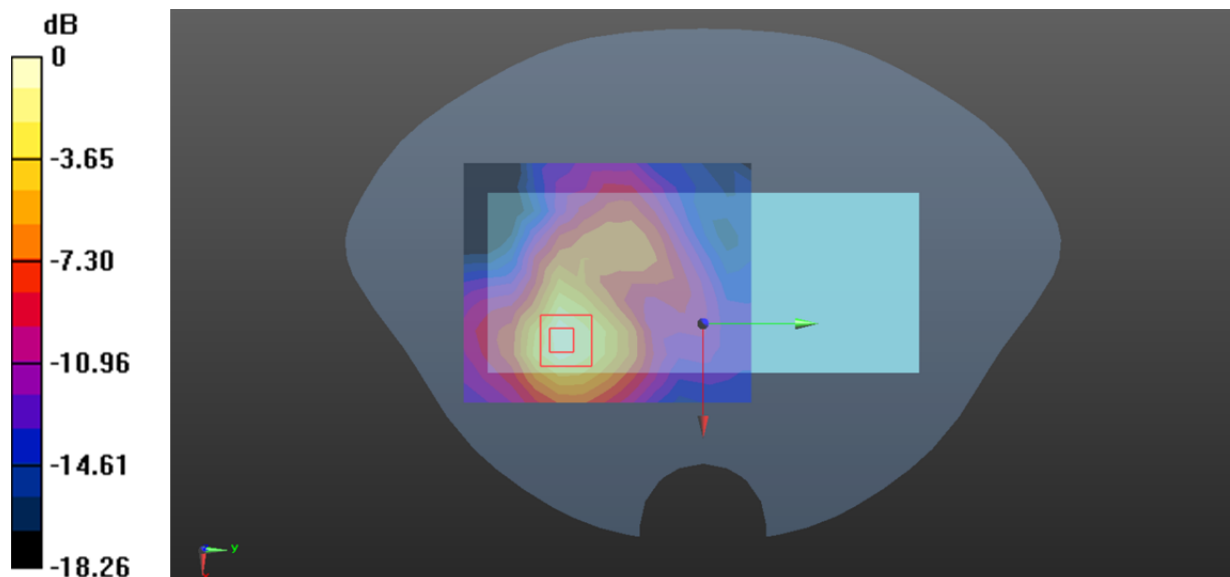

0 dB = 0.978 W/kg = -0.10 dBW/kg

Test Plots 10#:5.3G WLAN Low Handheld Front**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System:802.11n40 (0); Frequency: 5270 MHz;Duty Cycle: 1:1.15

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.574$ S/m; $\epsilon_r = 36.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5270 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.378 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.659 W/kg

SAR(1 g) = 0.177 W/kg; SAR(10 g) = 0.052 W/kg

Maximum value of SAR (measured) = 0.431 W/kg

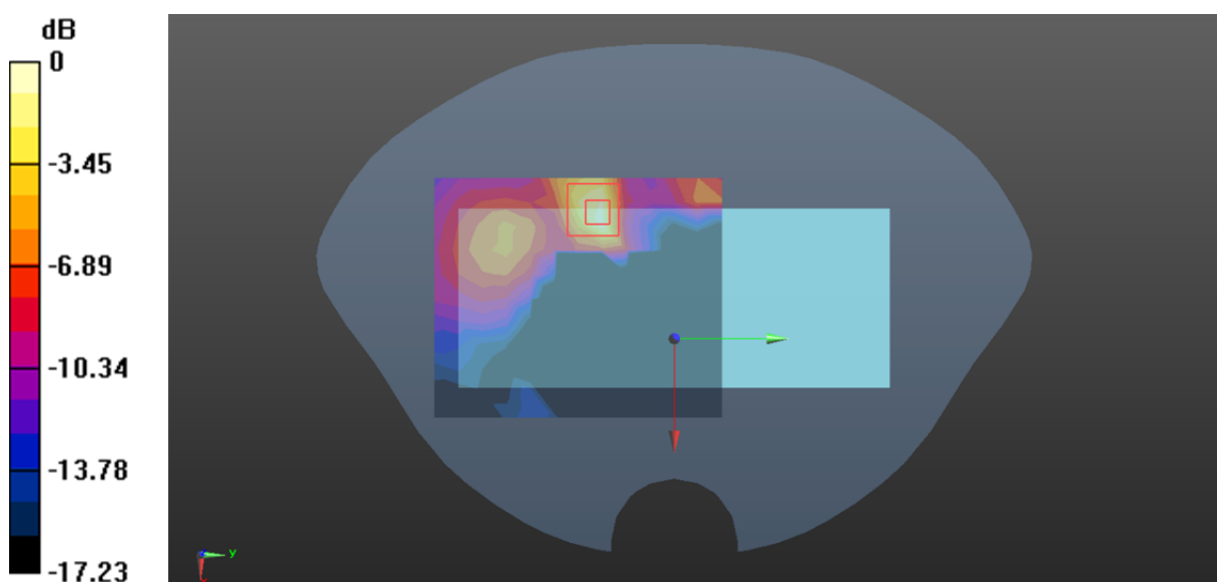

0 dB = 0.431 W/kg = -3.66 dBW/kg

Test Plots 11#:5.3G WLAN Low Handheld Left**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System: 802.11n40 (0); Frequency: 5270 MHz; Duty Cycle: 1:1.15

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.574$ S/m; $\epsilon_r = 36.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5270 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 4.14 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.856 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 8.99 W/kg

SAR(1 g) = 2.34 W/kg; SAR(10 g) = 0.650 W/kg

Maximum value of SAR (measured) = 5.61 W/kg

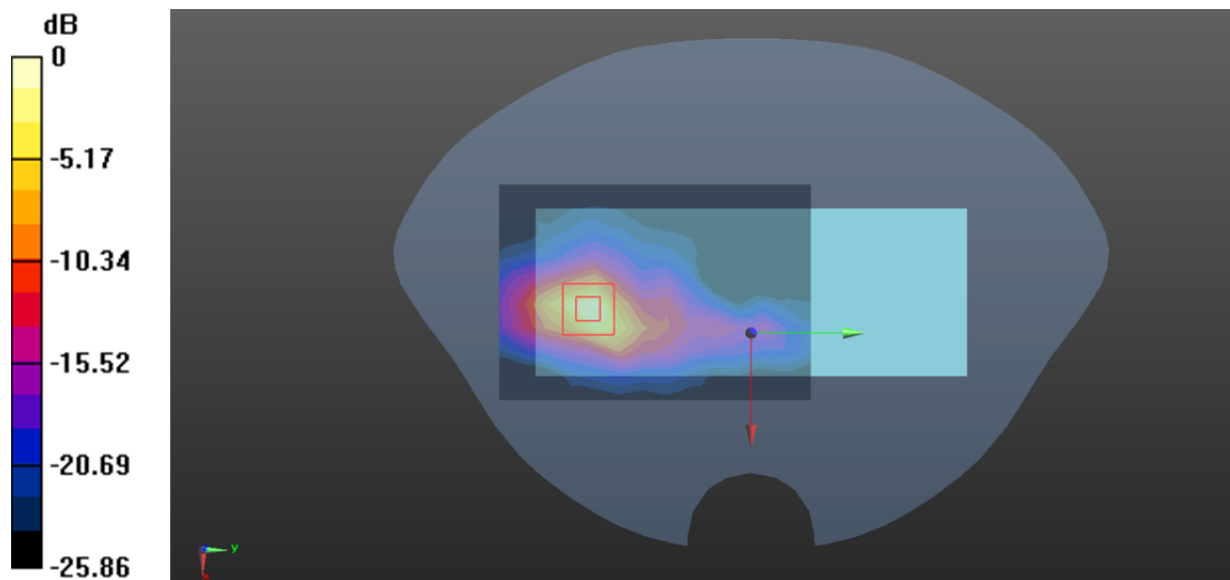

0 dB = 5.61 W/kg = 7.49 dBW/kg

Test Plots 12#:5.3G WLAN Low Handheld Bottom**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System:802.11n40 (0); Frequency: 5270 MHz;Duty Cycle: 1:1.15

Medium parameters used: $f = 5270$ MHz; $\sigma = 4.574$ S/m; $\epsilon_r = 36.907$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.96, 5.61, 5.16) @ 5270 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.473 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 1.061 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.672 W/kg

SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.086 W/kg

Maximum value of SAR (measured) = 0.461 W/kg

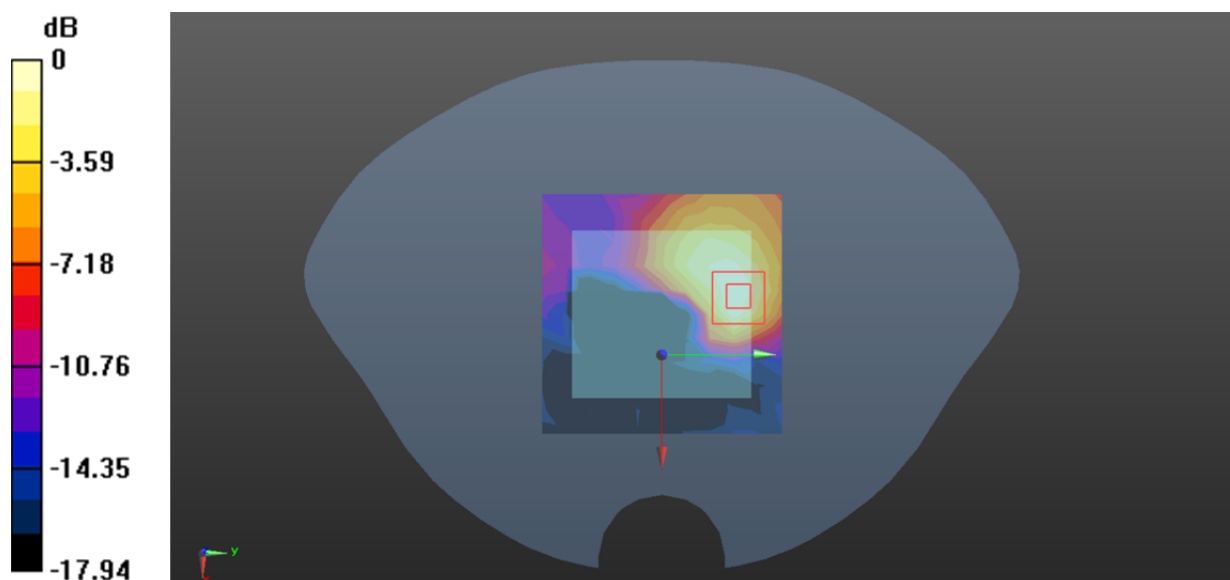

0 dB = 0.461 W/kg = -3.36 dBW/kg

Test Plots 13#: 5.6G WLAN Low Body Back**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System: 802.11a (0); Frequency: 5500 MHz; Duty Cycle: 1:1.07

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.141$ S/m; $\epsilon_r = 36.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @ 5500 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.703 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.878 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.378 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.853 W/kg

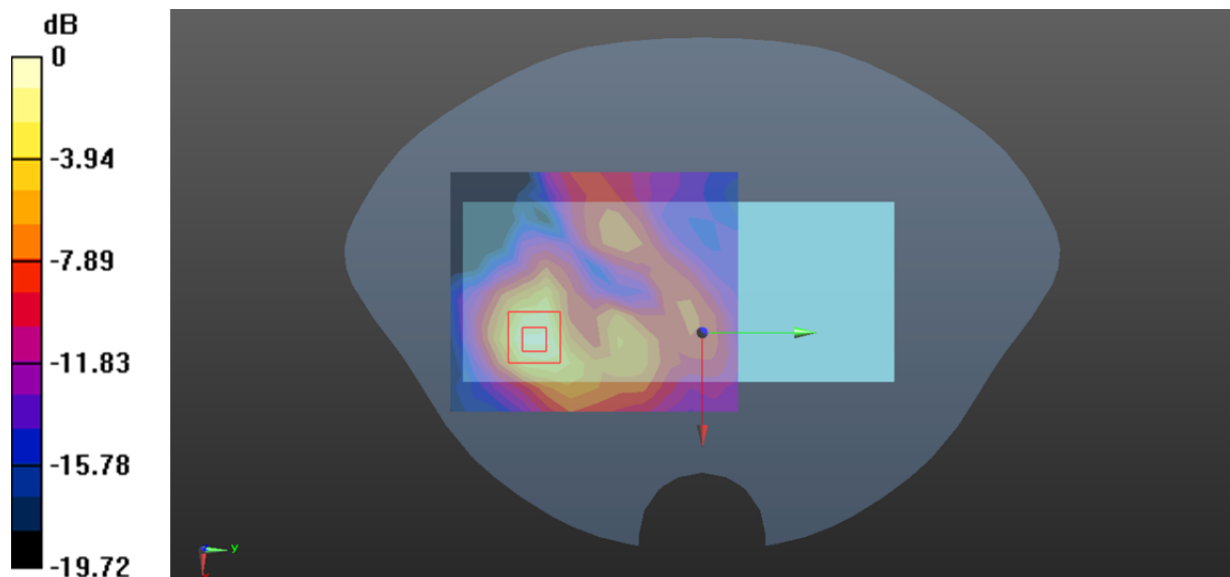

0 dB = 0.853 W/kg = -0.69 dBW/kg

Test Plots 14#:5.6G WLAN Low Handheld Front**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System:802.11a (0); Frequency: 5500 MHz;Duty Cycle: 1:1.07

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.141$ S/m; $\epsilon_r = 36.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @ 5500 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.280 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.888 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.034 W/kg

Maximum value of SAR (measured) = 0.357 W/kg

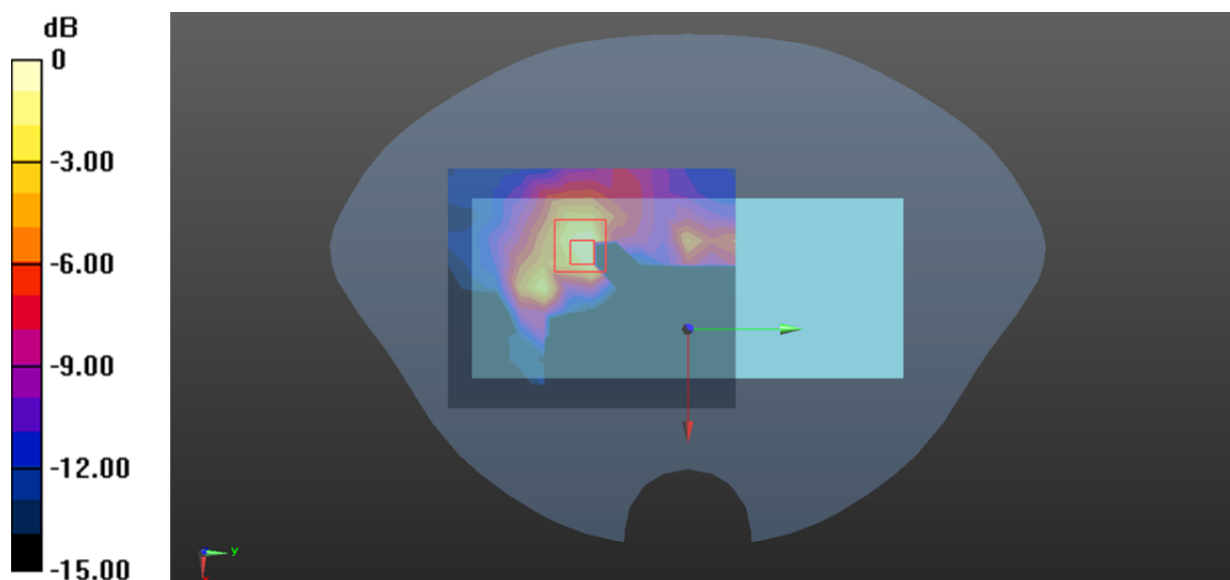

0 dB = 0.357 W/kg = -4.47 dBW/kg

Test Plots 15#:5.6G WLAN Low Handheld Left**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System:802.11a (0); Frequency: 5500 MHz;Duty Cycle: 1:1.07

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.141$ S/m; $\epsilon_r = 36.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @ 5500 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 7.62 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 7.297 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 12.6 W/kg

SAR(1 g) = 2.71 W/kg; SAR(10 g) = 0.688 W/kg

Maximum value of SAR (measured) = 7.81 W/kg

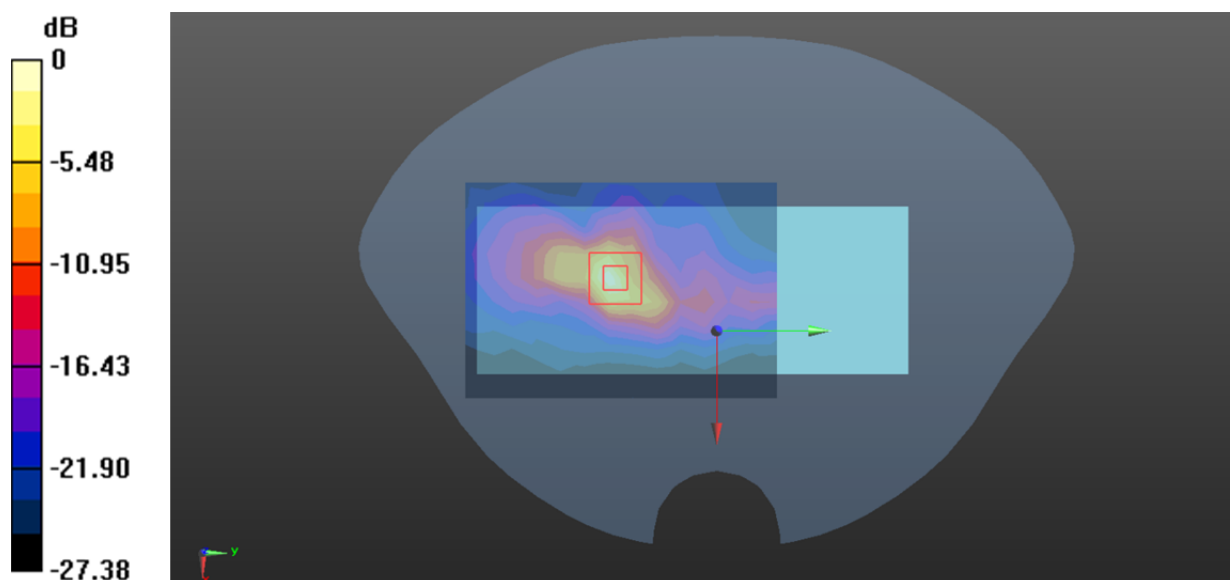

0 dB = 7.81 W/kg = 8.93 dBW/kg

Test Plots 16#:5.6G WLAN Low Handheld Bottom**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System:802.11a (0); Frequency: 5500 MHz;Duty Cycle: 1:1.07

Medium parameters used: $f = 5500$ MHz; $\sigma = 5.141$ S/m; $\epsilon_r = 36.422$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.38, 4.98, 4.56) @ 5500 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x10x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.660 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.959 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.10 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.725 W/kg

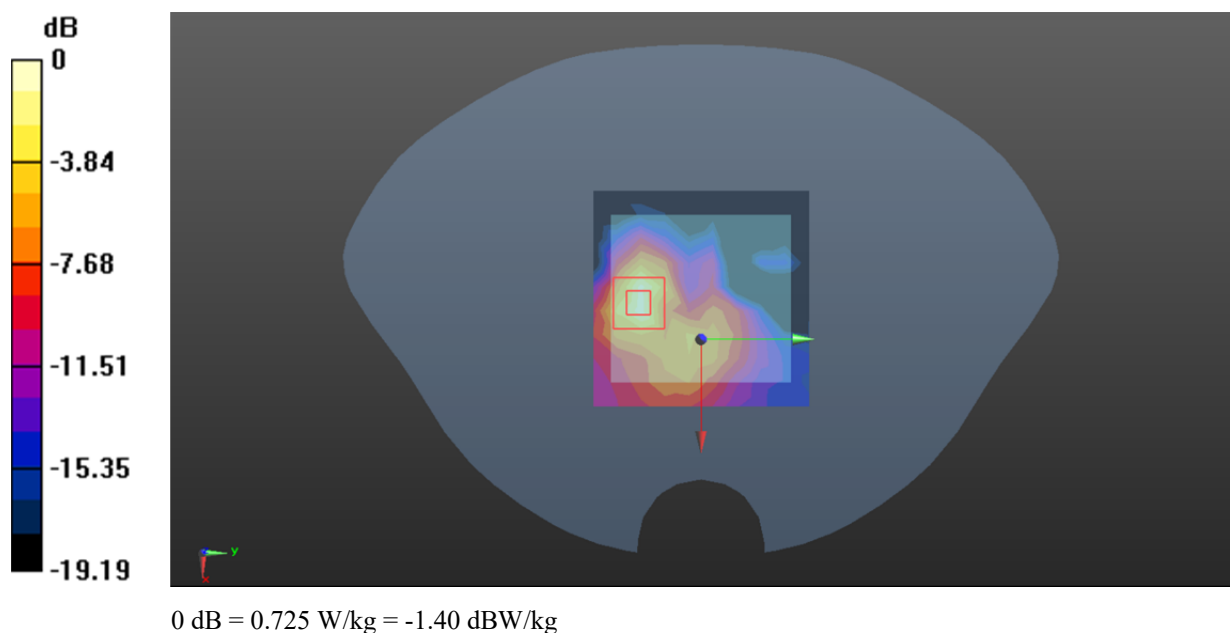

Test Plots 17#: 5.8G WLAN High Body Back**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System: 802.11a (0); Frequency: 5825 MHz; Duty Cycle: 1:1.07

Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.532 \text{ S/m}$; $\epsilon_r = 36.407$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @ 5825 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.304 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 4.740 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.116 W/kg; SAR(10 g) = 0.044 W/kg

Maximum value of SAR (measured) = 0.312 W/kg

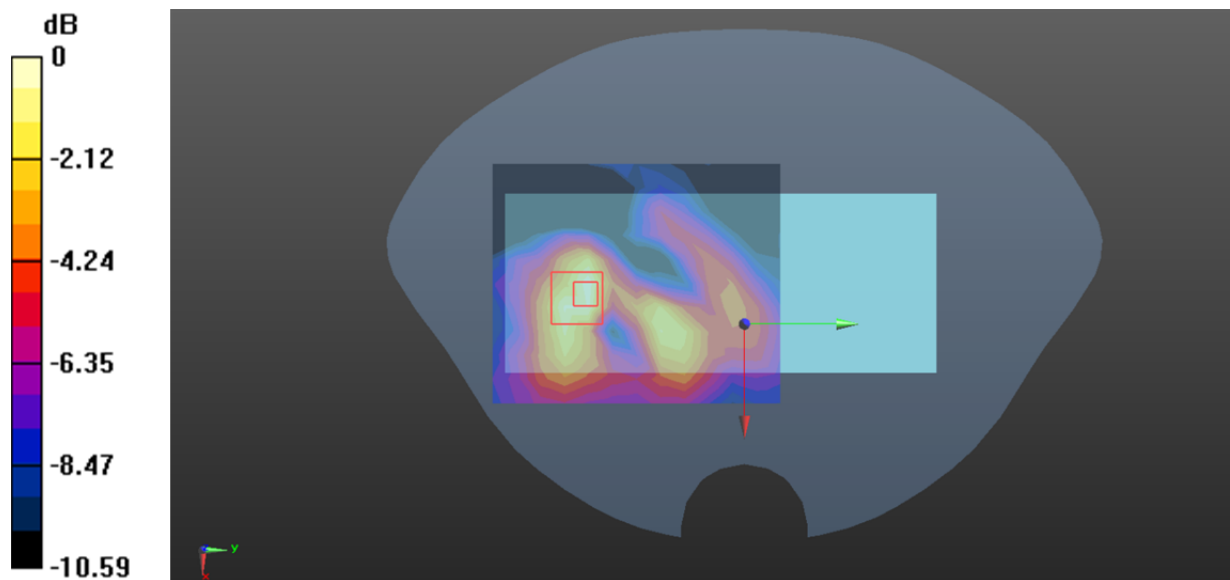

0 dB = 0.312 W/kg = -5.06 dBW/kg

Test Plots 18#:5.8G WLAN High Handheld Front**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System:802.11a (0); Frequency: 5825 MHz;Duty Cycle: 1:1.07

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.532$ S/m; $\epsilon_r = 36.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @ 5825 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (11x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.382 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 0.9610 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.136 W/kg; SAR(10 g) = 0.042 W/kg

Maximum value of SAR (measured) = 0.390 W/kg

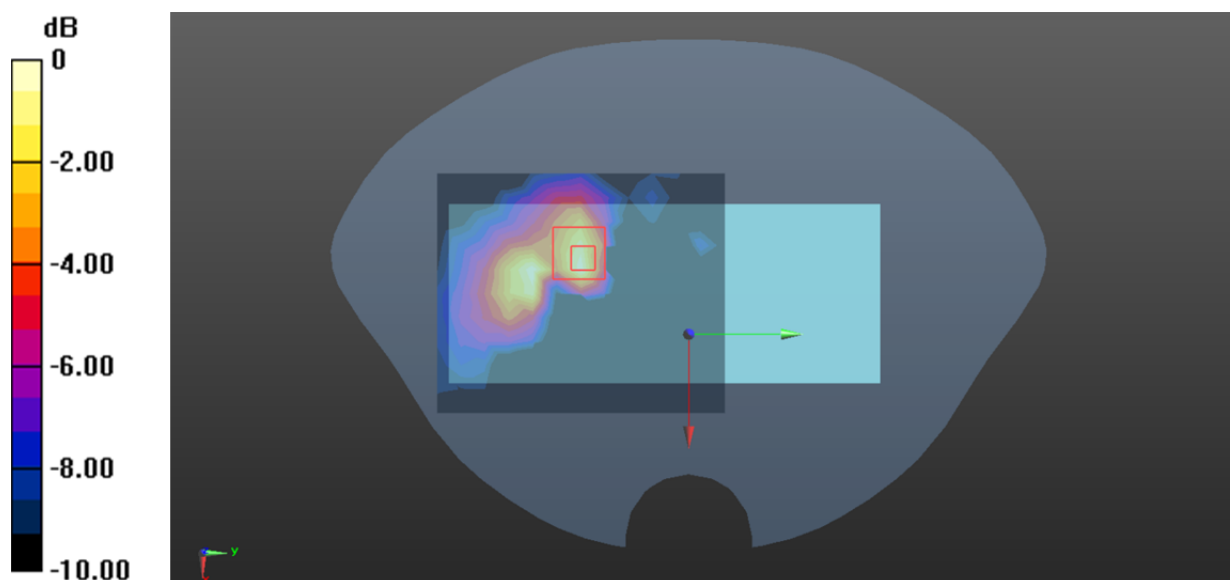

0 dB = 0.390 W/kg = -4.09 dBW/kg

Test Plots 19#:5.8G WLAN High Handheld Left**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System:802.11a (0); Frequency: 5825 MHz;Duty Cycle: 1:1.07

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.532$ S/m; $\epsilon_r = 36.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @ 5825 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x14x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 3.09 W/kg


Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 5.974 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 7.38 W/kg

SAR(1 g) = 1.70 W/kg; SAR(10 g) = 0.434 W/kg

Maximum value of SAR (measured) = 4.42 W/kg

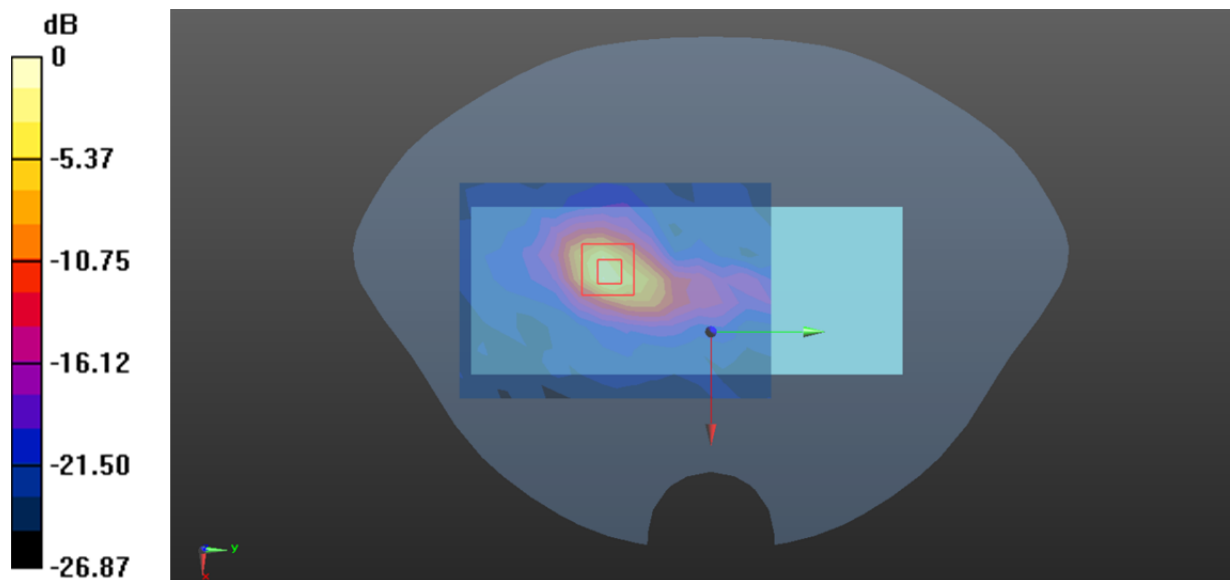

0 dB = 4.42 W/kg = 6.45 dBW/kg

Test Plots 20#:5.8G WLAN High Handheld Bottom**DUT: POS Terminal; Type: N950S; Serial: 2NQ1-1**

Communication System:802.11a (0); Frequency: 5825 MHz;Duty Cycle: 1:1.07

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.532$ S/m; $\epsilon_r = 36.407$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @ 5825 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2023/11/17
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.653 W/kg

Zoom Scan (8x8x16)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 4.711 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.322 W/kg; SAR(10 g) = 0.105 W/kg

Maximum value of SAR (measured) = 0.710 W/kg

