



# FCC TEST REPORT

Test report  
On Behalf of  
DeltaTrak Inc.  
For  
Real-time data logger  
Model No.: FlashLink RTL 22370,FlashLink RTL 22371,FlashLink  
RTL 22372

FCC ID: 2ATXY-2237X

Prepared for : DeltaTrak Inc.  
1236 Doker Drive, Modesto, CA 95351 US

Prepared By : Shenzhen Tongzhou Testing Co.,Ltd  
1th Floor, Building 1, Haomai High-tech Park, Huating Road 387, Dalang  
Street, Longhua, Shenzhen, China

Date of Test: July 1, 2021 - July 28, 2021

Date of Report: July 28, 2021

Report Number: TZ210602335-E1



## TEST RESULT CERTIFICATION

**Applicant's name** ..... : **DeltaTrak Inc.**

Address ..... : 1236 Doker Drive, Modesto, CA 95351 US

**Manufacture's Name** ..... : **DeltaTrak Inc.**

Address ..... : 1236 Doker Drive, Modesto, CA 95351 US

**Product description**

Trade Mark ..... : DeltaTrak

Product name ..... : Real-time data logger

Model and/or type reference .. : FlashLink RTL 22370,FlashLink RTL 22371,FlashLink RTL 22372

**Standards**..... : FCC Rules and Regulations Part 22, Part 24 & Part 27  
ANSI C63.26:2015

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Tongzhou Testing Co.,Ltd is acknowledged as copyright owner and source of the material. Shenzhen Tongzhou Testing Co.,Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :

Date (s) of performance of tests ..... : July 1, 2021 - July 28, 2021

Date of Issue ..... : July 28, 2021

Test Result..... : **Pass**

Testing Engineer :

*Anna Hu*

(Anna Hu)

Technical Manager :

*Hugo Chen*

(Hugo Chen)

Authorized Signatory :

*Andy Zhang*

(Andy Zhang)

**Revision History**

| Revision | Issue Date    | Revisions     | Revised By |
|----------|---------------|---------------|------------|
| 000      | July 28, 2021 | Initial Issue | Andy Zhang |
|          |               |               |            |
|          |               |               |            |



## Contents

|          |                                                           |           |
|----------|-----------------------------------------------------------|-----------|
| <b>1</b> | <b>TEST STANDARDS .....</b>                               | <b>5</b>  |
| <b>2</b> | <b>SUMMARY .....</b>                                      | <b>6</b>  |
| 2.1      | PRODUCT DESCRIPTION .....                                 | 6         |
| 2.2      | HOST SYSTEM CONFIGURATION LIST AND DETAILS .....          | 8         |
| 2.3      | SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT) ..... | 8         |
| 2.4      | NORMAL ACCESSORY SETTING .....                            | 8         |
| 2.5      | EUT CONFIGURATION .....                                   | 8         |
| 2.6      | RELATED SUBMITTAL(S) / GRANT (S) .....                    | 8         |
| 2.7      | MODIFICATIONS .....                                       | 8         |
| <b>3</b> | <b>TEST ENVIRONMENT .....</b>                             | <b>9</b>  |
| 3.1      | TEST FACILITY .....                                       | 9         |
| 3.2      | ENVIRONMENTAL CONDITIONS .....                            | 9         |
| 3.3      | TEST DESCRIPTION .....                                    | 10        |
| 3.4      | EQUIPMENTS USED DURING THE TEST .....                     | 11        |
| 3.5      | MEASUREMENT UNCERTAINTY .....                             | 12        |
| <b>4</b> | <b>DESCRIPTION OF TEST MODES .....</b>                    | <b>13</b> |
| <b>5</b> | <b>TEST CONDITIONS AND RESULTS .....</b>                  | <b>13</b> |
| 5.1      | OUTPUT POWER .....                                        | 13        |
| 5.1.1    | CONDUCTED OUTPUT POWER .....                              | 13        |
| 5.1.2    | RADIATED OUTPUT POWER .....                               | 20        |
| 5.2      | PEAK-TO-AVERAGE RATIO .....                               | 23        |
| 5.2.1    | MEASUREMENT METHOD .....                                  | 23        |
| 5.2.2    | PROVISIONS APPLICABLE .....                               | 23        |
| 5.2.3    | MEASUREMENT RESULT .....                                  | 24        |
| 5.3      | OCCUPIED BANDWIDTH .....                                  | 25        |
| 5.3.1    | MEASUREMENT METHOD .....                                  | 25        |
| 5.3.2    | PROVISIONS APPLICABLE .....                               | 25        |
| 5.3.3    | MEASUREMENT RESULT .....                                  | 25        |
| 5.4      | BAND EDGE .....                                           | 37        |
| 5.4.1    | MEASUREMENT METHOD .....                                  | 37        |
| 5.4.2    | PROVISIONS APPLICABLE .....                               | 37        |
| 5.4.3    | TEST RESULTS .....                                        | 37        |
| 5.5      | SPURIOUS EMISSION .....                                   | 45        |
| 5.5.1    | CONDUCTED SPURIOUS EMISSION .....                         | 45        |
| 5.5.2    | RADIATED SPURIOUS EMISSION .....                          | 72        |
| 5.5.2.4  | MEASUREMENT RESULT .....                                  | 75        |
| 5.6      | FREQUENCY STABILITY .....                                 | 77        |
| 5.6.1    | MEASUREMENT METHOD .....                                  | 77        |
| 5.6.2    | PROVISIONS APPLICABLE .....                               | 77        |
| 5.6.3    | MEASUREMENT RESULT .....                                  | 79        |
| <b>6</b> | <b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>        | <b>86</b> |



## 1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 2:](#) FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

[FCC Part 22 Subpart H:](#) PRIVATE LAND MOBILE RADIO SERVICES.

[FCC Part 24 Subpart E:](#) PUBLIC MOBILE SERVICES

[FCC Part 27 Subpart L:](#) MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[ANSI/TIA-603-E-2016:](#) Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[ANSI C63.26-2015:](#) IEEE/ANSI Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

[FCCKDB971168D01](#) Power Meas License Digital Systems



## 2 SUMMARY

### 2.1 Product Description

|                              |                                                                                                                                                            |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EUT                          | : Real-time data logger                                                                                                                                    |
| Model Number                 | : FlashLink RTL 22370,FlashLink RTL 22371,FlashLink RTL 22372                                                                                              |
| Model Difference Declaration | : FlashLink RTL 22370 with one temperature probe,<br>FlashLink RTL 22372 with dual temperature probe and<br>FlashLink RTL 22371 without temperature probe. |
| Test Model                   | : FlashLink RTL 22372                                                                                                                                      |
| Power Supply                 | : DC 3.70V by Battery                                                                                                                                      |
| Hardware version             | : T70MR41F                                                                                                                                                 |
| Software version             | : T72_3_DeltaTrak_L04                                                                                                                                      |
| Sample ID                    | : TZ210602335-1#, TZ210602335-2#                                                                                                                           |

#### Bluetooth

|                       |                                          |
|-----------------------|------------------------------------------|
| Bluetooth Version     | : V5.0[only support BLE in this product] |
| Channel Number        | : 40 Channels for BLE (DTS)              |
| Modulation Technology | : GFSK for BLE (DTS)                     |
| Data Rates            | : BLE (DTS): 1Mbps                       |
| Antenna Type And Gain | Internal Antenna /0.0 dBi(Max)           |

#### GSM

|                             |                                                                                                                                                                                              |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Support Bands               | : <input checked="" type="checkbox"/> GSM 850<br><input checked="" type="checkbox"/> PCS 1900<br><input checked="" type="checkbox"/> GSM 900<br><input checked="" type="checkbox"/> PCS 1800 |
| GSM FCC Operation Frequency | : GSM 850(UL: 824 – 848 MHz/DL: 869 – 894 MHz)<br>GSM 1900(UL: 1850 –1910 MHz/DL: 1930 – 1990 MHz)                                                                                           |
| Channel Separation          | : 0.2MHz                                                                                                                                                                                     |
| Modulation Technology       | : GMSK, 8PSK                                                                                                                                                                                 |
| Antenna Type And Gain       | : Internal Antenna<br>GSM900: 0.3dBi<br>DCS1800: -0.9dBi<br>GSM850: -1.01dBi<br>PCS1900: 0.12dBi                                                                                             |

#### UTRA

|                              |                                                                                                                                                                                                                                                                         |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Support Bands                | : <input checked="" type="checkbox"/> WCDMA BAND I<br><input checked="" type="checkbox"/> WCDMA BAND II<br><input checked="" type="checkbox"/> WCDMA BAND IV<br><input checked="" type="checkbox"/> WCDMA BAND V<br><input checked="" type="checkbox"/> WCDMA BAND VIII |
| UTRA FCC Operation Frequency | : WCDMA BAND V (UL: 824 – 848 MHz/DL: 869 – 894 MHz)<br>WCDMA BAND II (UL: 1850 –1910 MHz/DL: 1930 – 1990 MHz)<br>WCDMA BAND IV(UL: 1710 –1755 MHz/DL: 2110 – 2155 MHz)                                                                                                 |
| Channel Separation           | : 0.2 MHz                                                                                                                                                                                                                                                               |
| Modulation Technology        | : OFDM (16QAM, QPSK)                                                                                                                                                                                                                                                    |
| Antenna Type And Gain        | : Internal Antenna<br>WCDMA BAND I: +0.21dBi<br>WCDMA BAND II: -0.27dBi<br>WCDMA BAND IV: -0.53dBi<br>WCDMA BAND V: +0.32dBi                                                                                                                                            |



## WCDMA BAND VIII: +0.86dBi

*Note: Antenna position refer to EUT Photos.*

GSM/WCDMA Card Slot :

|              | Maximum ERP/EIRP<br>(dBm) | Max. Peak Conducted<br>Power<br>(dBm) | Max. Average<br>Burst Power (dBm) |
|--------------|---------------------------|---------------------------------------|-----------------------------------|
| GPRS 850     | 26.66                     | 31.83                                 | 31.64                             |
| EGPRS 850    | 20.39                     | 26.83                                 | 24.60                             |
| GPRS 1900    | 24.43                     | 29.77                                 | 29.66                             |
| EGPRS 1900   | 19.62                     | 25.42                                 | 22.22                             |
| UMTS BAND II | 19.16                     | 25.33                                 | 22.44                             |
| UMTS BAND IV | 18.82                     | 25.12                                 | 22.49                             |
| UMTS BAND V  | 20.19                     | 24.95                                 | 22.54                             |



## 2.2 Host System Configuration List and Details

| Manufacturer | Description | Model | Serial Number | Certificate |
|--------------|-------------|-------|---------------|-------------|
|              |             |       |               |             |

## 2.3 Short description of the Equipment under Test (EUT)

EUT is subscriber equipment in the GSM/WCDMA system. Frequency bands Shows in section 2.1.

## 2.4 Normal Accessory setting

Fully charged battery was used during the test.

## 2.5 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |

## 2.6 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2ATXY-2237X** filing to comply with FCC Part 22 Rules, FCC Part 24 Rules and FCC Part 27 Rules.

## 2.7 Modifications

No modifications were implemented to meet testing criteria.





### 3 TEST ENVIRONMENT

#### 3.1 Test Facility

##### FCC

Designation Number: CN1275

Test Firm Registration Number: 167722

Shenzhen Tongzhou Testing Co.,Ltd has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

##### A2LA

Certificate Number: 5463.01

Shenzhen Tongzhou Testing Co.,Ltd has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

##### IC

ISED#: 22033

CAB identifier: CN0099

Shenzhen Tongzhou Testing Co.,Ltd has been listed by Innovation, Science and Economic Development Canada to perform electromagnetic emission measurement.

The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010

#### 3.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
|                       |              |
| Humidity:             | 30-60 %      |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |



### 3.3 Test Description

#### PCS 1900 and UMTS BAND II:

| Test Item                              | FCC Rule No.      | Requirements                                                          | Judgement | Sample ID      |
|----------------------------------------|-------------------|-----------------------------------------------------------------------|-----------|----------------|
| Effective (Isotropic) Radiated Power   | 2.1046, 24.232(c) | EIRP $\leq$ 2W(33dBm)                                                 | Pass      | TZ210602335-2# |
| Bandwidth                              | 2.1049, 24.238(a) | OBW: No limit.<br>EBW: No limit.                                      | Pass      | TZ210602335-1# |
| Band Edges                             | 2.1051, 24.238(a) | -13dBm                                                                | Pass      | TZ210602335-1# |
| Spurious Emission at Antenna Terminals | 2.1051, 24.238(a) | -13dBm                                                                | Pass      | TZ210602335-1# |
| Field Strength of Spurious Radiation   | 2.1053, 24.238(a) | -13dBm                                                                | Pass      | TZ210602335-2# |
| Frequency Stability                    | 2.1055, 24.235    | the fundamental emission stays within the authorized frequency block. | Pass      | TZ210602335-1# |
| Peak to average ratio                  | 24.232(d)         | <13dB                                                                 | Pass      | TZ210602335-1# |

#### GSM850 and UMTS BAND V:

| Test Item                              | FCC Rule No.         | Requirements                                                                                                                | Judgement | Sample ID      |
|----------------------------------------|----------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------|----------------|
| Effective (Isotropic) Radiated Power   | 2.1046, 2.913(a)     | EIRP $\leq$ 7W(33dBm)                                                                                                       | Pass      | TZ210602335-2# |
| Occupied Bandwidth                     | 2.1049               | OBW: No limit.                                                                                                              | Pass      | TZ210602335-1# |
| Emission Bandwidth                     | 22.917(b)            | EBW: No limit.                                                                                                              | Pass      | TZ210602335-1# |
| Band Edges Compliance                  | 2.1051, 22.917(a)(b) | KDB 971 168 D02 971168 D02<br>Misc OOBE License Digital Systems v01<br>&27.53(m) for detail the limit is upon different OBW | Pass      | TZ210602335-1# |
| Spurious Emission at Antenna Terminals | 2.1051, 22.917       | -13dBm                                                                                                                      | Pass      | TZ210602335-2# |
| Field Strength of Spurious Radiation   | 2.1053, 22.917       | -13dBm                                                                                                                      | Pass      | TZ210602335-1# |
| Frequency Stability                    | 2.1055, 22.355       | the fundamental emissions stay within the authorized bands of operation. (2.5ppm)                                           | Pass      | TZ210602335-1# |

#### UMTS BAND IV:

| Test Item                              | FCC Rule No.     | Requirements                                                                      | Judgement | Sample ID      |
|----------------------------------------|------------------|-----------------------------------------------------------------------------------|-----------|----------------|
| Effective (Isotropic) Radiated Power   | 2.1046, 27.50(d) | EIRP $\leq$ 2W(33dBm)                                                             | Pass      | TZ210602335-2# |
| Bandwidth                              | 2.1049           | OBW: No limit.<br>EBW: No limit.                                                  | Pass      | TZ210602335-1# |
| Band Edges                             | 2.1051, 27.53(h) | -13dBm                                                                            | Pass      | TZ210602335-1# |
| Spurious Emission at Antenna Terminals | 2.1051, 27.53(h) | -13dBm                                                                            | Pass      | TZ210602335-1# |
| Field Strength of Spurious Radiation   | 2.1053, 27.53(h) | -13dBm                                                                            | Pass      | TZ210602335-2# |
| Frequency Stability                    | 2.1055, 27.54    | the fundamental emissions stay within the authorized bands of operation. (2.5ppm) | Pass      | TZ210602335-1# |
| Peak to average ratio                  | 27.50(d)         | <13dB                                                                             | Pass      | TZ210602335-1# |



### 3.4 Equipments Used during the Test

| Item | Test Equipment                | Manufacturer | Model No.    | Serial No.   | Calibration Date | Calibration Due Date |
|------|-------------------------------|--------------|--------------|--------------|------------------|----------------------|
| 1    | MXA Signal Analyzer           | Keysight     | N9020A       | MY52091623   | 2021/1/4         | 2022/1/3             |
| 2    | Power Sensor                  | Agilent      | U2021XA      | MY5365004    | 2021/1/4         | 2022/1/3             |
| 3    | Power Meter                   | Agilent      | U2531A       | TW53323507   | 2021/1/4         | 2022/1/3             |
| 4    | Loop Antenna                  | schwarzbeck  | FMZB1519B    | 00023        | 2019/11/16       | 2022/11/15           |
| 5    | Wideband Antenna              | schwarzbeck  | VULB 9163    | 958          | 2019/11/16       | 2022/11/15           |
| 6    | Horn Antenna                  | schwarzbeck  | 9120D-1141   | 1574         | 2019/11/16       | 2022/11/15           |
| 7    | EMI Test Receiver             | R&S          | ESCI         | 100849/003   | 2021/1/4         | 2022/1/3             |
| 8    | Controller                    | MF           | MF7802       | N/A          | N/A              | N/A                  |
| 9    | Amplifier                     | schwarzbeck  | BBV 9743     | 209          | 2021/1/4         | 2022/1/3             |
| 10   | Amplifier                     | Tonscend     | TSAMP-0518SE | --           | 2021/1/4         | 2022/1/3             |
| 11   | RF Cable(below 1GHz)          | HUBER+SUHNER | RG214        | N/A          | 2021/1/4         | 2022/1/3             |
| 12   | RF Cable(above 1GHz)          | HUBER+SUHNER | RG214        | N/A          | 2021/1/4         | 2022/1/3             |
| 12   | RE test software              | Tonscend     | JS32-RE      | V2.0.2.0     | N/A              | N/A                  |
| 14   | Test Software                 | Tonscend     | JS1120-3     | V2.5.77.0418 | N/A              | N/A                  |
| 15   | Horn Antenna                  | A-INFO       | LB-180400-KF | J211020657   | 2020/10/12       | 2022/10/11           |
| 16   | Amplifier                     | CDSA         | PAP-1840     | 17021        | 2020/10/10       | 2021/10/09           |
| 17   | Spectrum Analyzer             | R&S          | FSP40        | 100550       | 2021/1/10        | 2022/1/9             |
| 18   | UNIVERSAL RADIO COMMUNICATION | R&S          | CMW500       | 101855       | 2021/1/4         | 2022/1/3             |
| 19   | Signal Generator              | Keysight     | N5182A       | MY4620709    | 2021/1/4         | 2022/1/3             |



### 3.5 Measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to ETSI TR 100 028 " Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics" and is documented in the HUAK quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for HUAK is reported:

| Test                                | Range      | Measurement        | Note |
|-------------------------------------|------------|--------------------|------|
| Radiated Emission                   | 30~1000MHz | 3.10 dB            | (1)  |
| Radiated Emission                   | 1~18GHz    | 3.70 dB            | (1)  |
| Radiated Emission                   | 18-40GHz   | 3.90 dB            | (1)  |
| Conducted Disturbance               | 0.15~30MHz | 1.63 dB            | (1)  |
| Conducted Power                     | 9KHz~18GHz | 0.61 dB            | (1)  |
| Spurious RF Conducted Emission      | 9KHz~40GHz | 1.22 dB            | (1)  |
| Band Edge Compliance of RF Emission | 9KHz~40GHz | 1.22 dB            | (1)  |
| Occupied Bandwidth                  | 9KHz~40GHz | -                  | (1)  |
| Frequency Error                     | 9KHz~40GHz | $1 \times 10^{-7}$ | (1)  |

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .



## 4 DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

**\*\*\*Note:** GPRS 850, GPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band IV, WCDMA/HSPA band V mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.

## 5 TEST CONDITIONS AND RESULTS

### 5.1 OUTPUT POWER

#### 5.1.1 CONDUCTED OUTPUT POWER

##### 5.1.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS 850, GSM/GPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band IV, WCDMA/HSPA band V) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

##### 5.1.1.2 MEASUREMENT RESULT



## GSM850

| Mode              | Frequency (MHz) | Peak Power   | Avg.Burst Power | Duty cycle Factor(dB) | Frame Power (dBm) | Peak to Average Ratio |
|-------------------|-----------------|--------------|-----------------|-----------------------|-------------------|-----------------------|
| GPRS850 (1 Slot)  | 824.2           | <b>31.83</b> | <b>31.64</b>    | -9                    | 22.64             | 0.19                  |
|                   | 836.6           | 31.59        | 31.38           | -9                    | 22.38             | 0.21                  |
|                   | 848.8           | 31.79        | 31.51           | -9                    | 22.51             | 0.28                  |
| GPRS850 (2 Slot)  | 824.2           | 30.14        | 30.03           | -6                    | 24.03             | 0.11                  |
|                   | 836.6           | 30.38        | 30.17           | -6                    | 24.17             | 0.20                  |
|                   | 848.8           | 30.28        | 30.02           | -6                    | 24.02             | 0.26                  |
| GPRS850 (3 Slot)  | 824.2           | 29.50        | 29.39           | -4.26                 | <b>25.13</b>      | 0.11                  |
|                   | 836.6           | 29.45        | 29.23           | -4.26                 | 24.97             | 0.21                  |
|                   | 848.8           | 29.14        | 28.89           | -4.26                 | 24.63             | 0.25                  |
| GPRS850 (4 Slot)  | 824.2           | 27.09        | 26.81           | -3                    | 23.81             | 0.28                  |
|                   | 836.6           | 27.14        | 26.91           | -3                    | 23.91             | 0.23                  |
|                   | 848.8           | 27.38        | 27.18           | -3                    | 24.18             | 0.19                  |
| EGPRS850 (1 Slot) | 824.2           | 26.83        | 24.30           | -9                    | 15.30             | 2.53                  |
|                   | 836.6           | 26.77        | 24.60           | -9                    | 15.60             | 2.17                  |
|                   | 848.8           | 26.59        | 23.62           | -9                    | 14.62             | <b>2.97</b>           |
| EGPRS850 (2 Slot) | 824.2           | 25.12        | 22.90           | -6                    | 16.90             | 2.22                  |
|                   | 836.6           | 25.35        | 22.95           | -6                    | 16.95             | 2.40                  |
|                   | 848.8           | 25.37        | 23.29           | -6                    | 17.29             | 2.07                  |
| EGPRS850 (3 Slot) | 824.2           | 23.20        | 20.60           | -4.26                 | 16.34             | 2.60                  |
|                   | 836.6           | 23.21        | 21.03           | -4.26                 | 16.77             | 2.18                  |
|                   | 848.8           | 23.32        | 21.31           | -4.26                 | 17.05             | 2.01                  |
| EGPRS850 (4 Slot) | 824.2           | 21.81        | 19.01           | -3                    | 16.01             | 2.80                  |
|                   | 836.6           | 21.98        | 19.90           | -3                    | 16.90             | 2.08                  |
|                   | 848.8           | 21.87        | 19.65           | -3                    | 16.65             | 2.21                  |

**GSM1900**

| Mode               | Frequency (MHz) | Peak Power   | Avg.Burst Power | Duty cycle Factor(dB) | Frame Power(dBm) | Peak to Average Ratio |
|--------------------|-----------------|--------------|-----------------|-----------------------|------------------|-----------------------|
| GPRS1900 (1 Slot)  | 1850.2          | 29.70        | 29.47           | -9                    | 20.47            | 0.23                  |
|                    | 1880            | <b>29.77</b> | <b>29.66</b>    | -9                    | 20.66            | 0.11                  |
|                    | 1909.8          | 29.59        | 29.29           | -9                    | 20.29            | 0.30                  |
| GPRS1900 (2 Slot)  | 1850.2          | 27.83        | 27.58           | -6                    | 21.58            | 0.25                  |
|                    | 1880            | 27.90        | 27.71           | -6                    | 21.71            | 0.19                  |
|                    | 1909.8          | 27.91        | 27.80           | -6                    | 21.80            | 0.11                  |
| GPRS1900 (3 Slot)  | 1850.2          | 26.94        | 26.75           | -4.26                 | 22.49            | 0.19                  |
|                    | 1880            | 26.75        | 26.63           | -4.26                 | 22.37            | 0.13                  |
|                    | 1909.8          | 26.58        | 26.38           | -4.26                 | 22.12            | 0.20                  |
| GPRS1900 (4 Slot)  | 1850.2          | 25.78        | 25.55           | -3                    | 22.55            | 0.23                  |
|                    | 1880            | 25.89        | 25.60           | -3                    | 22.60            | 0.29                  |
|                    | 1909.8          | 25.56        | 25.32           | -3                    | 22.32            | 0.23                  |
| EGPRS1900 (1 Slot) | 1850.2          | 25.42        | 22.16           | -9                    | 13.16            | 3.26                  |
|                    | 1880            | 25.20        | 21.92           | -9                    | 12.92            | 3.28                  |
|                    | 1909.8          | 25.42        | 22.22           | -9                    | 13.22            | 3.20                  |
| EGPRS1900 (2 Slot) | 1850.2          | 24.85        | 21.72           | -6                    | 15.72            | 3.13                  |
|                    | 1880            | 24.79        | 21.07           | -6                    | 15.07            | <b>3.72</b>           |
|                    | 1909.8          | 24.75        | 21.55           | -6                    | 15.55            | 3.20                  |
| EGPRS1900 (3 Slot) | 1850.2          | 22.86        | 19.65           | -4.26                 | 15.39            | 3.21                  |
|                    | 1880            | 22.81        | 19.80           | -4.26                 | 15.54            | 3.01                  |
|                    | 1909.8          | 22.58        | 19.35           | -4.26                 | 15.09            | 3.23                  |
| EGPRS1900 (4 Slot) | 1850.2          | 21.69        | 18.12           | -3                    | 15.12            | 3.57                  |
|                    | 1880            | 21.73        | 18.48           | -3                    | 15.48            | 3.25                  |
|                    | 1909.8          | 21.91        | 18.35           | -3                    | 15.35            | 3.56                  |

**UMTS BAND II**

| Mode            | Frequency (MHz) | Peak Power   | Avg.Burst Power | Peak to Average Ratio |
|-----------------|-----------------|--------------|-----------------|-----------------------|
| RMC             | 1852.4          | <b>25.33</b> | <b>22.44</b>    | 2.89                  |
|                 | 1880            | 25.07        | 22.01           | 3.06                  |
|                 | 1907.6          | 24.08        | 21.98           | 2.10                  |
| HSDPA Subtest 1 | 1852.4          | 24.12        | 21.11           | 3.01                  |
|                 | 1880            | 23.01        | 20.80           | 2.20                  |
|                 | 1907.6          | 23.37        | 20.79           | 2.59                  |
| HSDPA Subtest 2 | 1852.4          | 22.36        | 20.10           | 2.26                  |
|                 | 1880            | 22.60        | 20.22           | 2.38                  |
|                 | 1907.6          | 22.98        | 20.78           | 2.20                  |
| HSDPA Subtest 3 | 1852.4          | 23.32        | 20.19           | <b>3.13</b>           |
|                 | 1880            | 22.59        | 20.05           | 2.54                  |
|                 | 1907.6          | 23.07        | 20.17           | 2.90                  |
| HSDPA Subtest 4 | 1852.4          | 22.98        | 20.01           | 2.96                  |
|                 | 1880            | 23.16        | 20.50           | 2.66                  |
|                 | 1907.6          | 23.59        | 20.69           | 2.90                  |
| HSUPA Subtest 1 | 1852.4          | 22.89        | 20.45           | 2.44                  |
|                 | 1880            | 22.45        | 20.30           | 2.15                  |
|                 | 1907.6          | 23.04        | 20.31           | 2.72                  |
| HSUPA Subtest 2 | 1852.4          | 23.92        | 21.46           | 2.46                  |
|                 | 1880            | 24.05        | 21.84           | 2.21                  |
|                 | 1907.6          | 23.89        | 21.30           | 2.60                  |
| HSUPA Subtest 3 | 1852.4          | 24.17        | 21.11           | 3.05                  |
|                 | 1880            | 23.67        | 21.30           | 2.37                  |
|                 | 1907.6          | 24.16        | 21.25           | 2.92                  |
| HSUPA Subtest 4 | 1852.4          | 23.66        | 21.27           | 2.38                  |
|                 | 1880            | 24.86        | 22.00           | 2.86                  |
|                 | 1907.6          | 25.01        | 22.36           | 2.65                  |
| HSUPA Subtest 5 | 1852.4          | 23.40        | 20.99           | 2.41                  |
|                 | 1880            | 23.92        | 21.61           | 2.30                  |
|                 | 1907.6          | 24.63        | 21.85           | 2.79                  |





## UMTS BAND IV

| Mode            | Frequency (MHz) | Peak Power   | Avg.Burst Power | Peak to Average Ratio |
|-----------------|-----------------|--------------|-----------------|-----------------------|
| RMC             | 1712.4          | 24.87        | <b>22.49</b>    | 2.38                  |
|                 | 1732.4          | <b>25.12</b> | 21.96           | <b>3.17</b>           |
|                 | 1752.6          | 24.78        | 22.25           | 2.52                  |
| HSDPA Subtest 1 | 1712.4          | 23.57        | 21.23           | 2.34                  |
|                 | 1732.4          | 23.50        | 20.92           | 2.58                  |
|                 | 1752.6          | 22.92        | 20.90           | 2.02                  |
| HSDPA Subtest 2 | 1712.4          | 22.72        | 20.29           | 2.42                  |
|                 | 1732.4          | 22.96        | 20.13           | 2.82                  |
|                 | 1752.6          | 23.16        | 20.73           | 2.43                  |
| HSDPA Subtest 3 | 1712.4          | 22.63        | 20.01           | 2.62                  |
|                 | 1732.4          | 22.05        | 19.95           | 2.10                  |
|                 | 1752.6          | 23.09        | 20.16           | 2.93                  |
| HSDPA Subtest 4 | 1712.4          | 22.60        | 20.38           | 2.22                  |
|                 | 1732.4          | 23.35        | 20.56           | 2.79                  |
|                 | 1752.6          | 23.28        | 20.93           | 2.35                  |
| HSUPA Subtest 1 | 1712.4          | 22.82        | 20.60           | 2.22                  |
|                 | 1732.4          | 23.36        | 20.25           | 3.12                  |
|                 | 1752.6          | 22.37        | 20.26           | 2.11                  |
| HSUPA Subtest 2 | 1712.4          | 24.34        | 21.54           | 2.80                  |
|                 | 1732.4          | 24.02        | 21.91           | 2.11                  |
|                 | 1752.6          | 23.87        | 21.45           | 2.41                  |
| HSUPA Subtest 3 | 1712.4          | 23.38        | 21.05           | 2.33                  |
|                 | 1732.4          | 24.10        | 21.17           | 2.93                  |
|                 | 1752.6          | 24.27        | 21.19           | 3.09                  |
| HSUPA Subtest 4 | 1712.4          | 23.35        | 21.24           | 2.11                  |
|                 | 1732.4          | 24.60        | 22.18           | 2.43                  |
|                 | 1752.6          | 25.14        | 22.01           | 3.14                  |
| HSUPA Subtest 5 | 1712.4          | 23.45        | 21.17           | 2.29                  |
|                 | 1732.4          | 24.03        | 21.59           | 2.43                  |
|                 | 1752.6          | 25.07        | 21.98           | 3.09                  |



## UMTS BAND V

| Mode            | Frequency (MHz) | Peak Power   | Avg.Burst Power | Peak to Average Ratio |
|-----------------|-----------------|--------------|-----------------|-----------------------|
| WCDMA1900 RMC   | 826.4           | <b>24.95</b> | <b>22.54</b>    | 2.41                  |
|                 | 836.4           | 23.99        | 21.90           | 2.09                  |
|                 | 846.6           | 24.56        | 22.10           | 2.46                  |
| HSDPA Subtest 1 | 826.4           | 23.61        | 21.05           | 2.56                  |
|                 | 836.4           | 23.16        | 20.84           | 2.32                  |
|                 | 846.6           | 23.85        | 20.98           | 2.88                  |
| HSDPA Subtest 2 | 826.4           | 23.43        | 20.41           | 3.02                  |
|                 | 836.4           | 22.91        | 20.17           | 2.73                  |
|                 | 846.6           | 23.53        | 20.45           | 3.08                  |
| HSDPA Subtest 3 | 826.4           | 22.74        | 20.07           | 2.68                  |
|                 | 836.4           | 22.56        | 19.83           | 2.72                  |
|                 | 846.6           | 22.99        | 20.20           | 2.79                  |
| HSDPA Subtest 4 | 826.4           | 22.55        | 20.32           | 2.23                  |
|                 | 836.4           | 23.00        | 20.63           | 2.37                  |
|                 | 846.6           | 23.63        | 20.70           | 2.93                  |
| HSUPA Subtest 1 | 826.4           | 23.67        | 20.79           | 2.88                  |
|                 | 836.4           | 23.40        | 20.36           | 3.04                  |
|                 | 846.6           | 23.22        | 20.45           | 2.77                  |
| HSUPA Subtest 2 | 826.4           | 23.95        | 21.40           | 2.54                  |
|                 | 836.4           | 25.00        | 21.86           | 3.13                  |
|                 | 846.6           | 23.66        | 21.33           | 2.33                  |
| HSUPA Subtest 3 | 826.4           | 23.43        | 21.25           | 2.18                  |
|                 | 836.4           | 23.43        | 20.91           | 2.52                  |
|                 | 846.6           | 23.51        | 20.98           | 2.53                  |
| HSUPA Subtest 4 | 826.4           | 24.05        | 21.16           | 2.89                  |
|                 | 836.4           | <b>25.36</b> | 22.36           | 2.99                  |
|                 | 846.6           | 25.13        | 21.99           | <b>3.14</b>           |
| HSUPA Subtest 5 | 826.4           | 24.09        | 20.97           | 3.11                  |
|                 | 836.4           | 24.13        | 21.83           | 2.31                  |
|                 | 846.6           | 24.07        | 21.82           | 2.25                  |



According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

| UE Transmit Channel Configuration                                                                                                                                                               | CM(db)               | MPR(db)              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------|
| For all combinations of ,DPDCH,DPCCH<br>HS-DPDCH,E-DPDCH and E-DPCCH                                                                                                                            | $0 \leq CM \leq 3.5$ | $\text{MAX}(CM-1,0)$ |
| Note: CM=1 for $\beta_c/\beta_d=12/15$ , $\beta_{hs}/\beta_c=24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. |                      |                      |

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



## 5.1.2 RADIATED OUTPUT POWER

### 5.1.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl} = P_{in} + 2.15 - P_r$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$
4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
6. The EUT is then put into continuously transmitting mode at its maximum power level.
7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
9. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15 \text{ dBi} \dots$

### 5.1.2.2 PROVISIONS APPLICABLE

| Mode          | FCC Part Section(s) | Nominal Peak Power                 |
|---------------|---------------------|------------------------------------|
| GSM/GPRS 850  | 22.913(a)(2)        | $\leq 38.45 \text{ dBm}$ (7W). ERP |
| GSM/GPRS 1900 | 24.232(c)           | $\leq 33 \text{ dBm}$ (2W). EIRP   |
| UMTS BAND II  | 24.232(c)           | $\leq 33 \text{ dBm}$ (2W), EIRP   |
| UMTS BAND IV  | 27.50(d)            | $\leq 30 \text{ dBm}$ (1W), EIRP   |
| UMTS BAND V   | 22.913(a)(2)        | $\leq 38.45 \text{ dBm}$ (7W). ERP |



## 5.1.2.3 Measurement Result

| Radiated Power (ERP) for GPRS/EGPRS 850 |           |                     |                          |            |
|-----------------------------------------|-----------|---------------------|--------------------------|------------|
| Mode                                    | Frequency | Result              |                          | Conclusion |
|                                         |           | Max. Peak ERP (dBm) | Polarization Of Max. ERP |            |
| GPRS                                    | 824.2     | <b>26.66</b>        | Horizontal               | Pass       |
|                                         | 836.6     | 26.54               | Horizontal               | Pass       |
|                                         | 848.8     | 24.78               | Horizontal               | Pass       |
|                                         | 824.2     | 24.26               | Vertical                 | Pass       |
|                                         | 836.6     | 24.15               | Vertical                 | Pass       |
|                                         | 848.8     | 25.10               | Vertical                 | Pass       |
| EGPRS                                   | 824.2     | 20.26               | Horizontal               | Pass       |
|                                         | 836.6     | 19.58               | Horizontal               | Pass       |
|                                         | 848.8     | <b>20.39</b>        | Horizontal               | Pass       |
|                                         | 824.2     | 17.73               | Vertical                 | Pass       |
|                                         | 836.6     | 18.99               | Vertical                 | Pass       |
|                                         | 848.8     | 18.66               | Vertical                 | Pass       |

| Radiated Power (E.I.R.P) for GPRS/EGPRS 1900 |           |                         |                               |            |
|----------------------------------------------|-----------|-------------------------|-------------------------------|------------|
| Mode                                         | Frequency | Result                  |                               | Conclusion |
|                                              |           | Max. Peak E.I.R.P.(dBm) | Polarization Of Max. E.I.R.P. |            |
| GPRS                                         | 1850.2    | 24.08                   | Horizontal                    | Pass       |
|                                              | 1880.0    | <b>24.43</b>            | Horizontal                    | Pass       |
|                                              | 1909.8    | 22.81                   | Horizontal                    | Pass       |
|                                              | 1850.2    | 20.55                   | Vertical                      | Pass       |
|                                              | 1880.0    | 21.45                   | Vertical                      | Pass       |
|                                              | 1909.8    | 21.20                   | Vertical                      | Pass       |
| EGPRS                                        | 1850.2    | 19.32                   | Horizontal                    | Pass       |
|                                              | 1880.0    | 19.22                   | Horizontal                    | Pass       |
|                                              | 1909.8    | 18.85                   | Horizontal                    | Pass       |
|                                              | 1850.2    | 18.95                   | Vertical                      | Pass       |
|                                              | 1880.0    | 18.85                   | Vertical                      | Pass       |
|                                              | 1909.8    | <b>19.62</b>            | Vertical                      | Pass       |



| Radiated Power (E.I.R.P) for UMTS band II |           |                            |                                 |            |
|-------------------------------------------|-----------|----------------------------|---------------------------------|------------|
| Mode                                      | Frequency | Result                     |                                 | Conclusion |
|                                           |           | Max. Peak E.I.R.P<br>(dBm) | Polarization<br>Of Max. E.I.R.P |            |
| UMTS                                      | 1852.4    | 18.90                      | Horizontal                      | Pass       |
|                                           | 1880      | <b>19.16</b>               | Horizontal                      | Pass       |
|                                           | 1907.6    | 18.38                      | Horizontal                      | Pass       |
|                                           | 1852.4    | 18.17                      | Vertical                        | Pass       |
|                                           | 1880      | 17.54                      | Vertical                        | Pass       |
|                                           | 1907.6    | 17.70                      | Vertical                        | Pass       |

| Radiated Power (E.I.R.P) for UMTS band IV |           |                            |                                 |            |
|-------------------------------------------|-----------|----------------------------|---------------------------------|------------|
| Mode                                      | Frequency | Result                     |                                 | Conclusion |
|                                           |           | Max. Peak E.I.R.P<br>(dBm) | Polarization<br>Of Max. E.I.R.P |            |
| UMTS                                      | 1712.4    | 18.74                      | Horizontal                      | Pass       |
|                                           | 1732.4    | <b>18.82</b>               | Horizontal                      | Pass       |
|                                           | 1752.6    | 18.14                      | Horizontal                      | Pass       |
|                                           | 1712.4    | 16.89                      | Vertical                        | Pass       |
|                                           | 1732.4    | 18.03                      | Vertical                        | Pass       |
|                                           | 1752.6    | 16.07                      | Vertical                        | Pass       |

| Radiated Power (ERP) for UMTS band V |           |                        |                             |            |
|--------------------------------------|-----------|------------------------|-----------------------------|------------|
| Mode                                 | Frequency | Result                 |                             | Conclusion |
|                                      |           | Max. Peak ERP<br>(dBm) | Polarization<br>Of Max. ERP |            |
| UMTS                                 | 826.4     | <b>20.19</b>           | Horizontal                  | Pass       |
|                                      | 836.4     | 18.29                  | Horizontal                  | Pass       |
|                                      | 846.6     | 19.62                  | Horizontal                  | Pass       |
|                                      | 826.4     | 18.37                  | Vertical                    | Pass       |
|                                      | 836.4     | 17.38                  | Vertical                    | Pass       |
|                                      | 846.6     | 17.45                  | Vertical                    | Pass       |

Note: Above is the worst mode data.



## 5.2 PEAK-TO-AVERAGE RATIO

### 5.2.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

### 5.2.2 PROVISIONS APPLICABLE

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

**5.2.3 MEASUREMENT RESULT**

| Modes                              | Max<br>Peak to Average<br>Ratio(dB) | Upper limit(dB) | Result |
|------------------------------------|-------------------------------------|-----------------|--------|
| GSM850                             | 2.97                                | 13              | Pass   |
| PCS1900                            | 3.72                                | 13              | Pass   |
| UMTS BAND II                       | 3.13                                | 13              | Pass   |
| UMTS BAND IV                       | 3.17                                | 13              | Pass   |
| UMTS BAND V                        | 3.14                                | 13              | Pass   |
| Note: refer to section of 5.1.1.2. |                                     |                 |        |





### 5.3 OCCUPIED BANDWIDTH

#### 5.3.1 MEASUREMENT METHOD

1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.
2. RBW=1~5% of the expected OBW, VBW $\geq$ 3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

#### 5.3.2 PROVISIONS APPLICABLE


The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power

#### 5.3.3 MEASUREMENT RESULT


| Type         | Frequency(MHz) | Mode  | Occupied Bandwidth(KHz) | Emission Bandwidth(KHz) | Limit    |
|--------------|----------------|-------|-------------------------|-------------------------|----------|
| GSM850       | 824.2          | GPRS  | 242.88                  | 310.5                   | No limit |
| GSM850       | 836.6          | GPRS  | 245.46                  | 310.8                   | No limit |
| GSM850       | 848.8          | GPRS  | 247.43                  | 306.4                   | No limit |
| GSM850       | 824.2          | EGPRS | 252.53                  | 316.6                   | No limit |
| GSM850       | 836.6          | EGPRS | 251.15                  | 310.3                   | No limit |
| GSM850       | 848.8          | EGPRS | 253.95                  | 306                     | No limit |
| GSM1900      | 1850.2         | GPRS  | 246.85                  | 321.9                   | No limit |
| GSM1900      | 1880           | GPRS  | 247.05                  | 320.4                   | No limit |
| GSM1900      | 1909.8         | GPRS  | 247.74                  | 313.6                   | No limit |
| GSM1900      | 1850.2         | EGPRS | 251.62                  | 317.7                   | No limit |
| GSM1900      | 1880           | EGPRS | 256.14                  | 303.2                   | No limit |
| GSM1900      | 1909.8         | EGPRS | 251.93                  | 306.4                   | No limit |
| UMTS BAND II | 1852.4         | RMC   | 4163.6                  | 4670                    | No limit |
| UMTS BAND II | 1880           | RMC   | 4159.3                  | 4678                    | No limit |
| UMTS BAND II | 1907.6         | RMC   | 4145.7                  | 4650                    | No limit |
| UMTS BAND V  | 826.4          | RMC   | 4182.7                  | 4651                    | No limit |
| UMTS BAND V  | 836.4          | RMC   | 4161.6                  | 4650                    | No limit |
| UMTS BAND V  | 846.6          | RMC   | 4166.5                  | 4635                    | No limit |
| UMTS BAND IV | 1712.4         | RMC   | 4156.1                  | 4646                    | No limit |
| UMTS BAND IV | 1732.4         | RMC   | 4163.9                  | 4652                    | No limit |
| UMTS BAND IV | 1752.6         | RMC   | 4162.2                  | 4651                    | No limit |



## GSM850-824.2MHz-GPRS

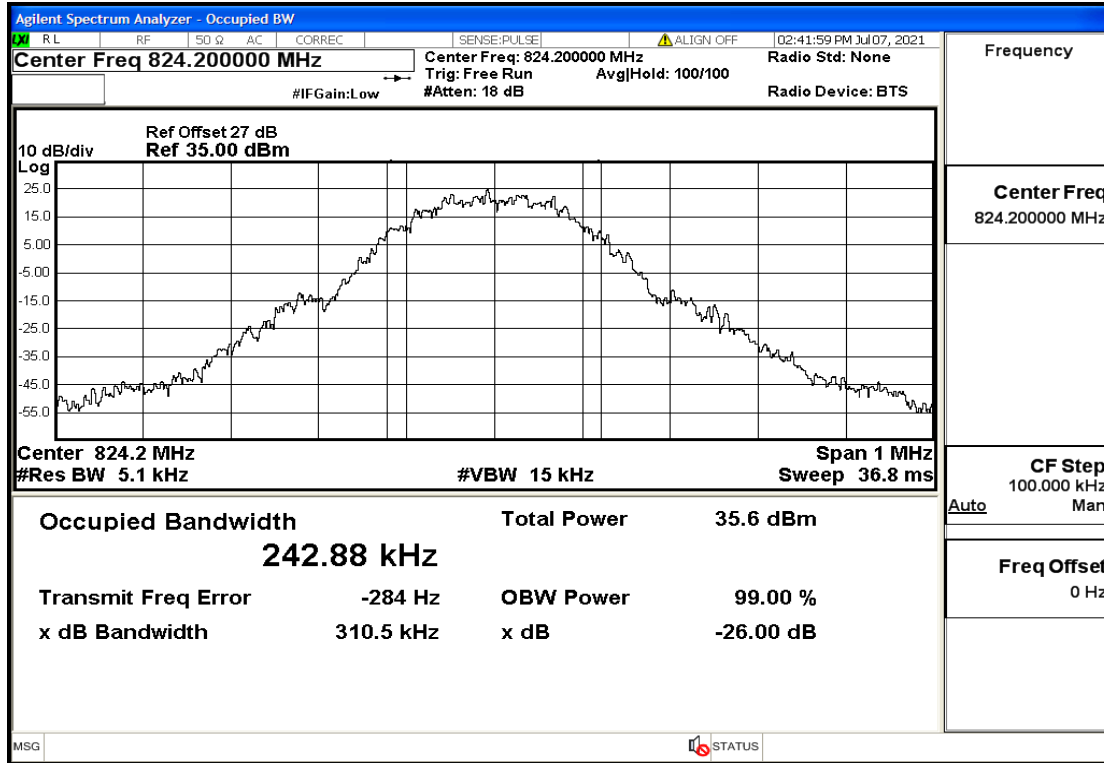


## GSM850-836.6MHz-GPRS

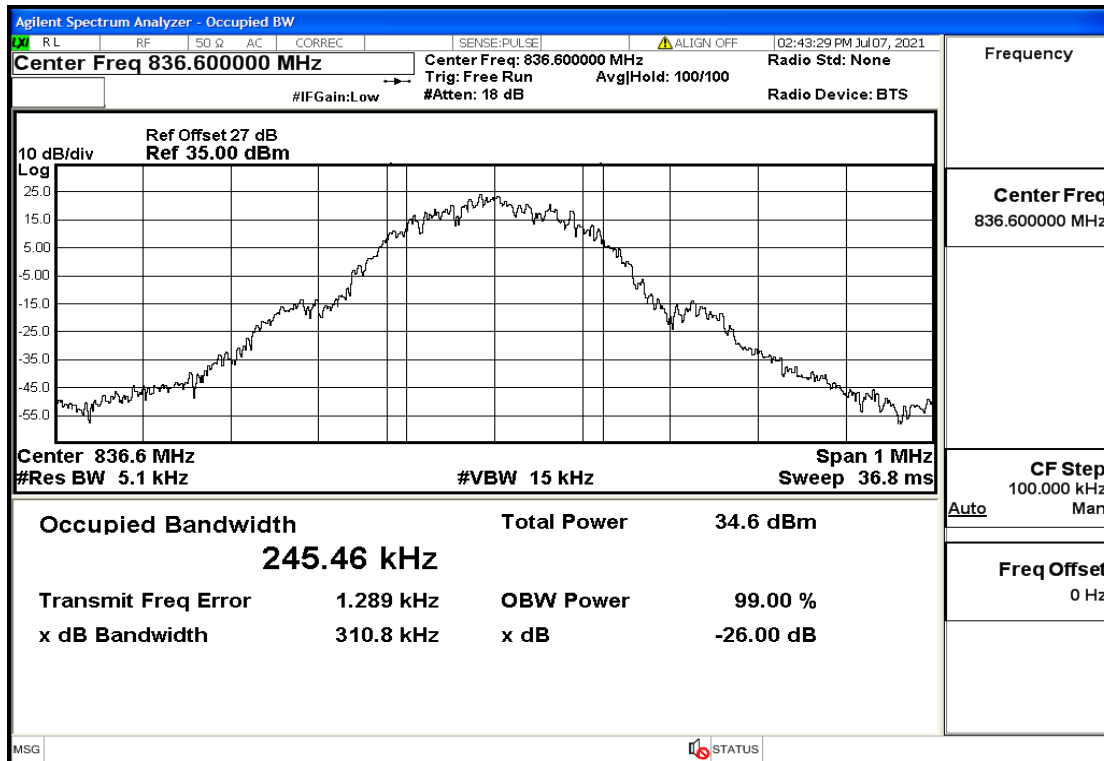




## GSM850-848.8MHz-GPRS

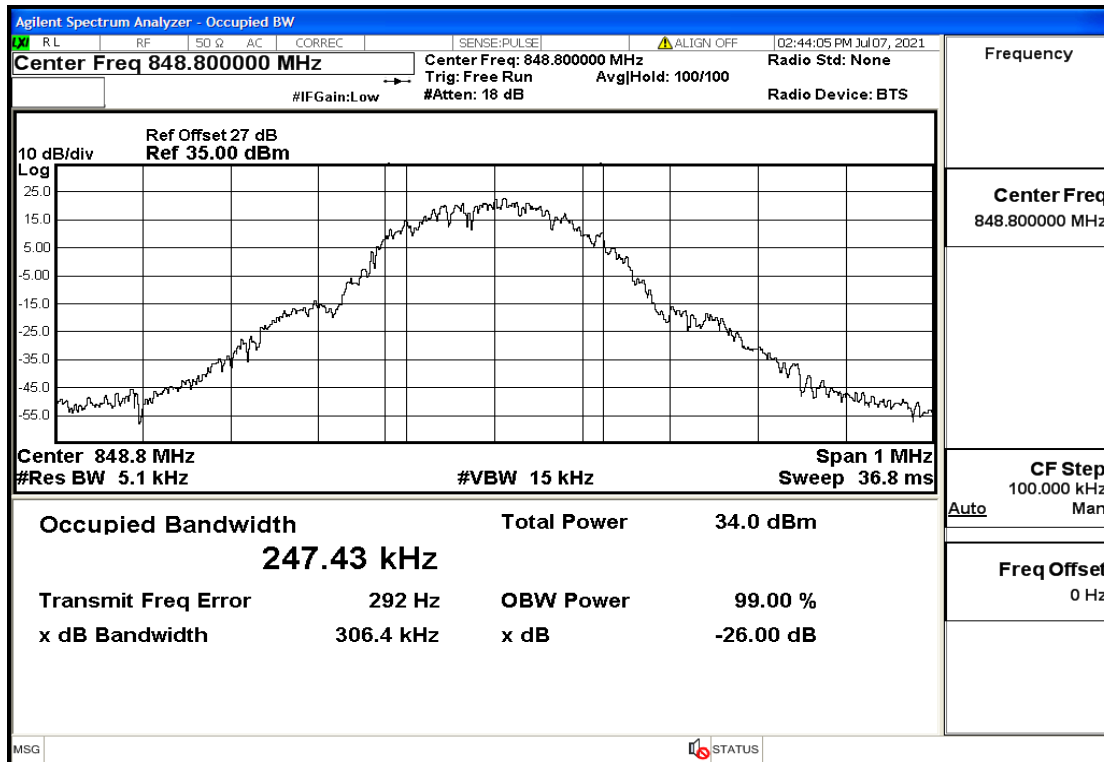


## GSM850-824.2MHz-EGPRS

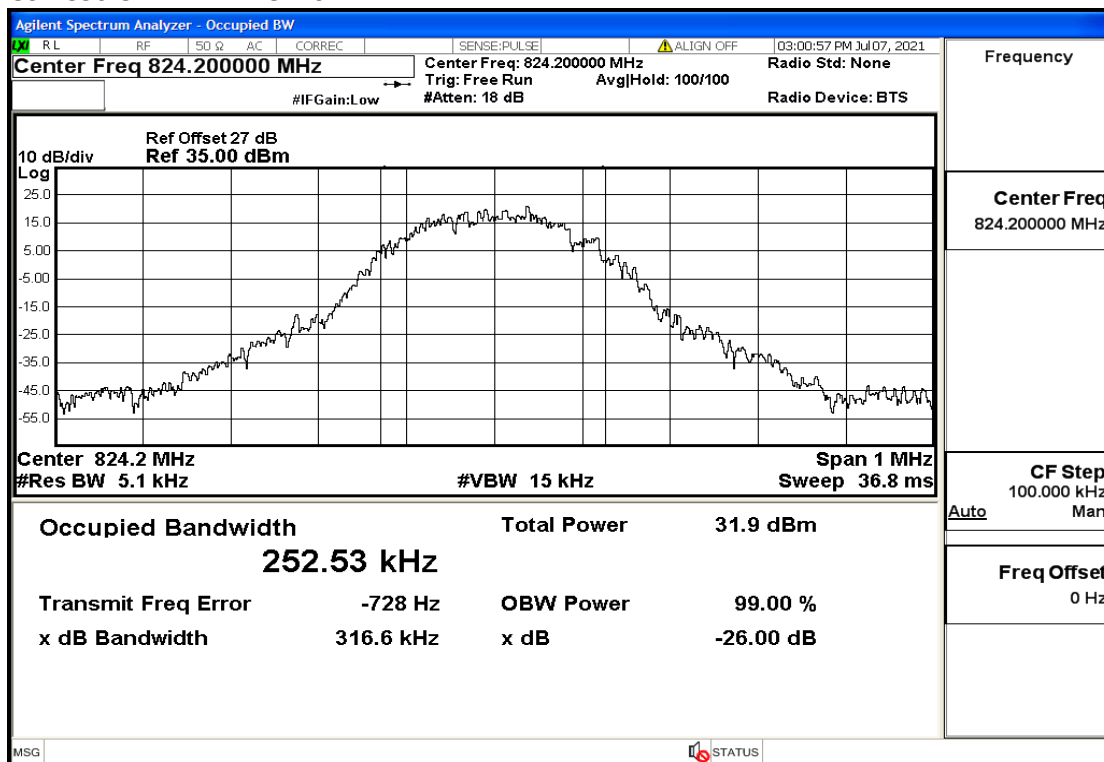




GSM850-836.6MHz-EGPRS

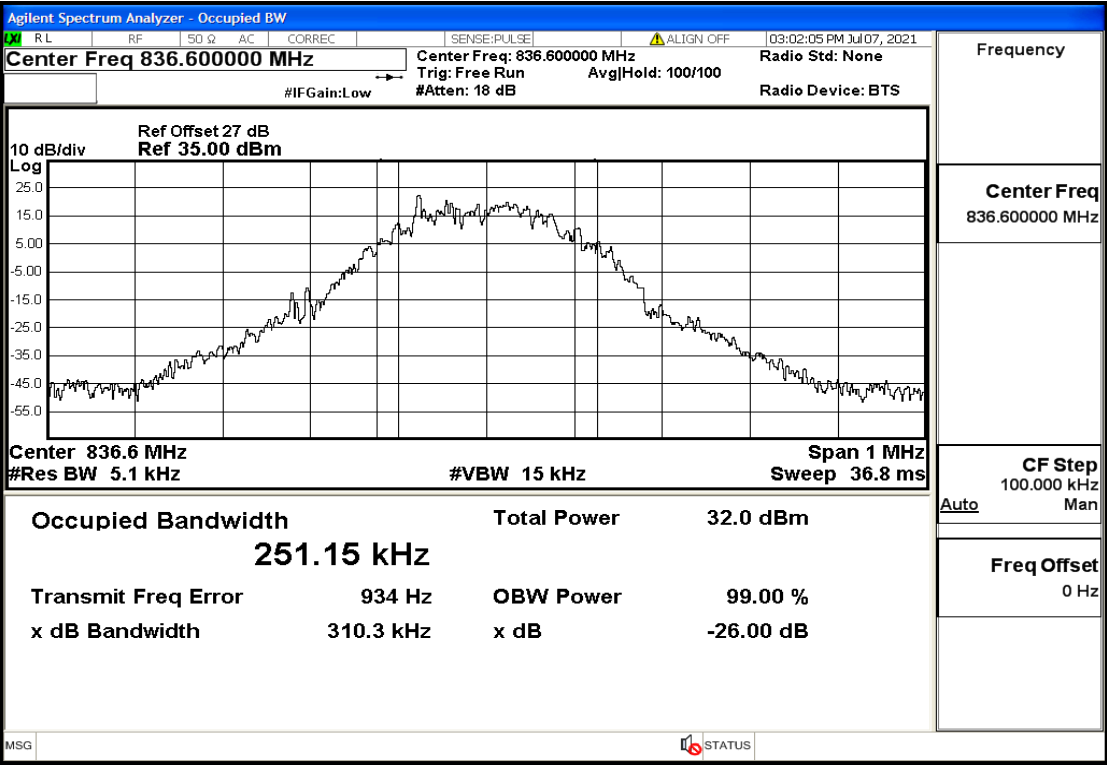


GSM850-848.8MHz-EGPRS

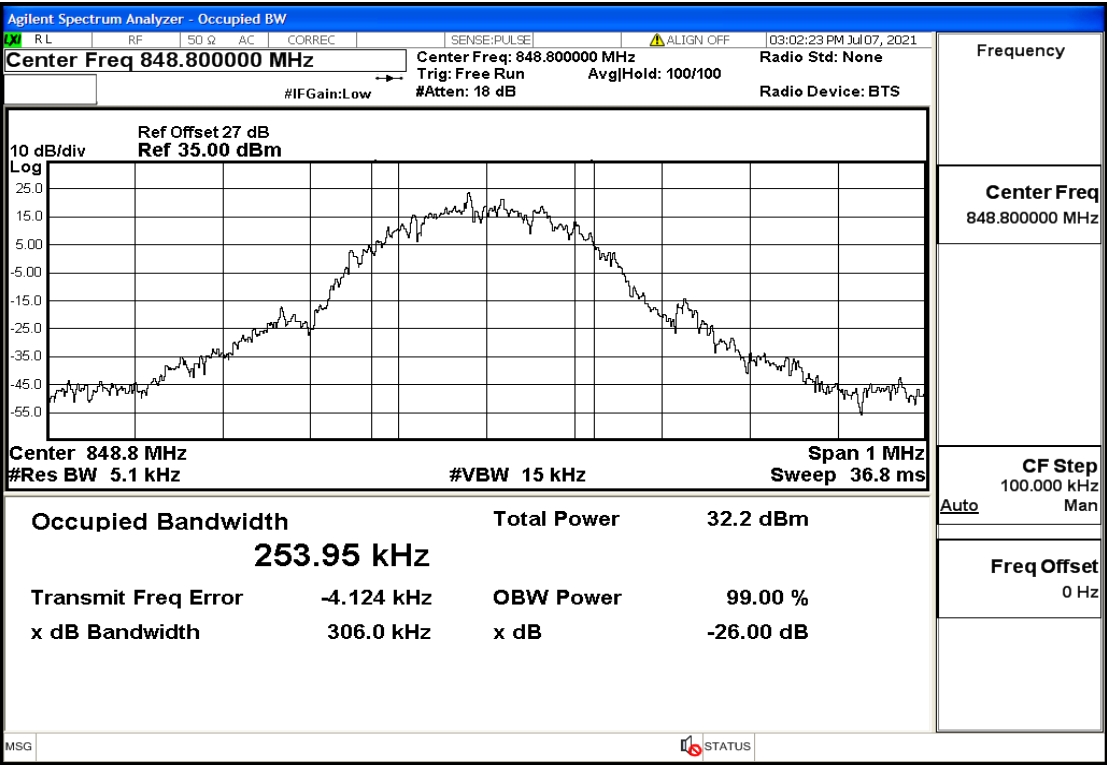




## GSM1900-1850.2MHz-GPRS

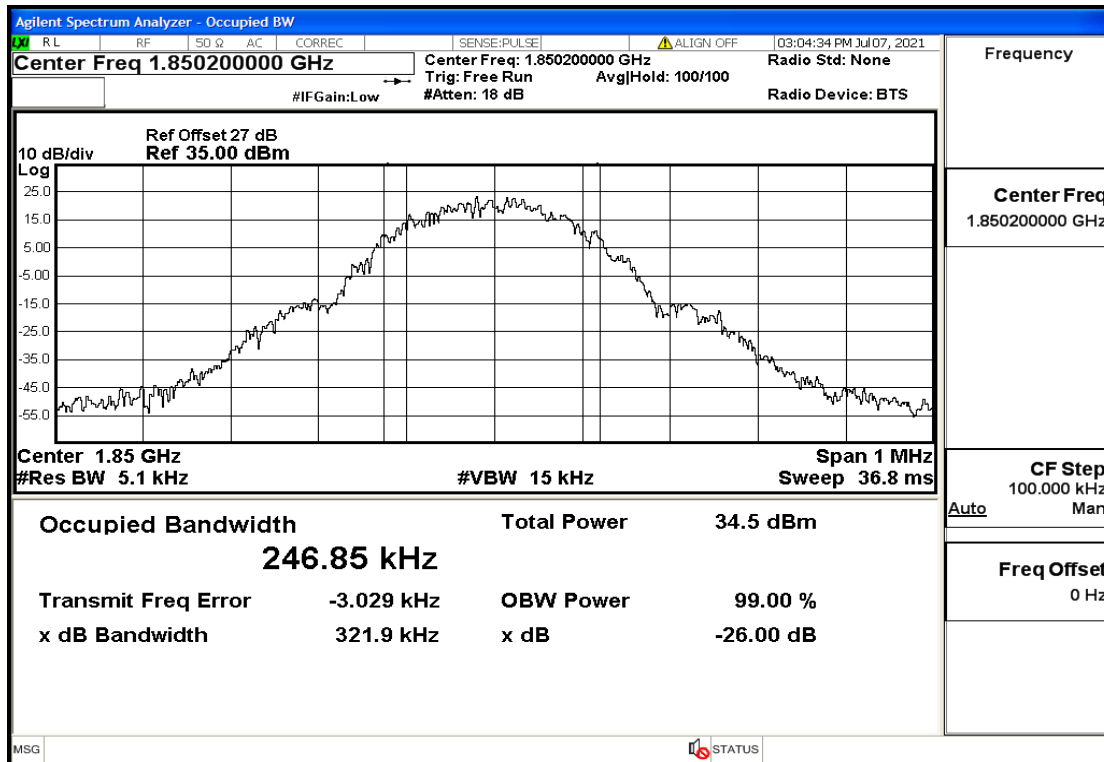


## GSM1900-1880MHz-GPRS

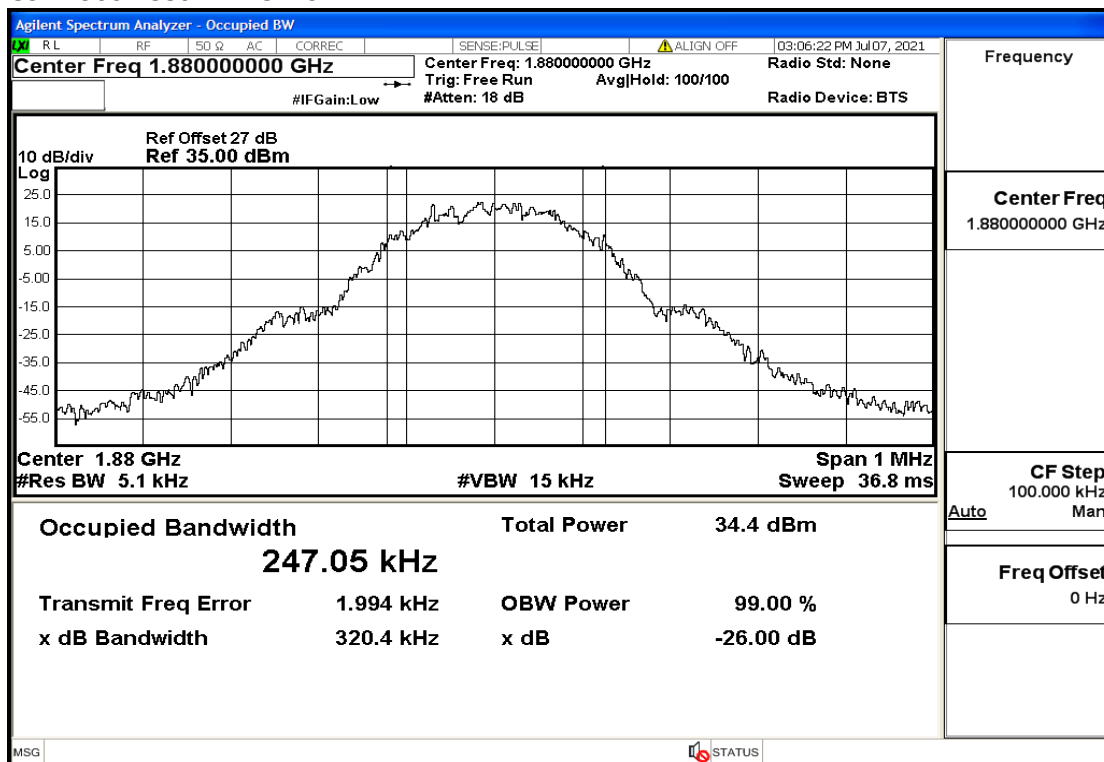




## GSM1900-1909.8MHz-GPRS

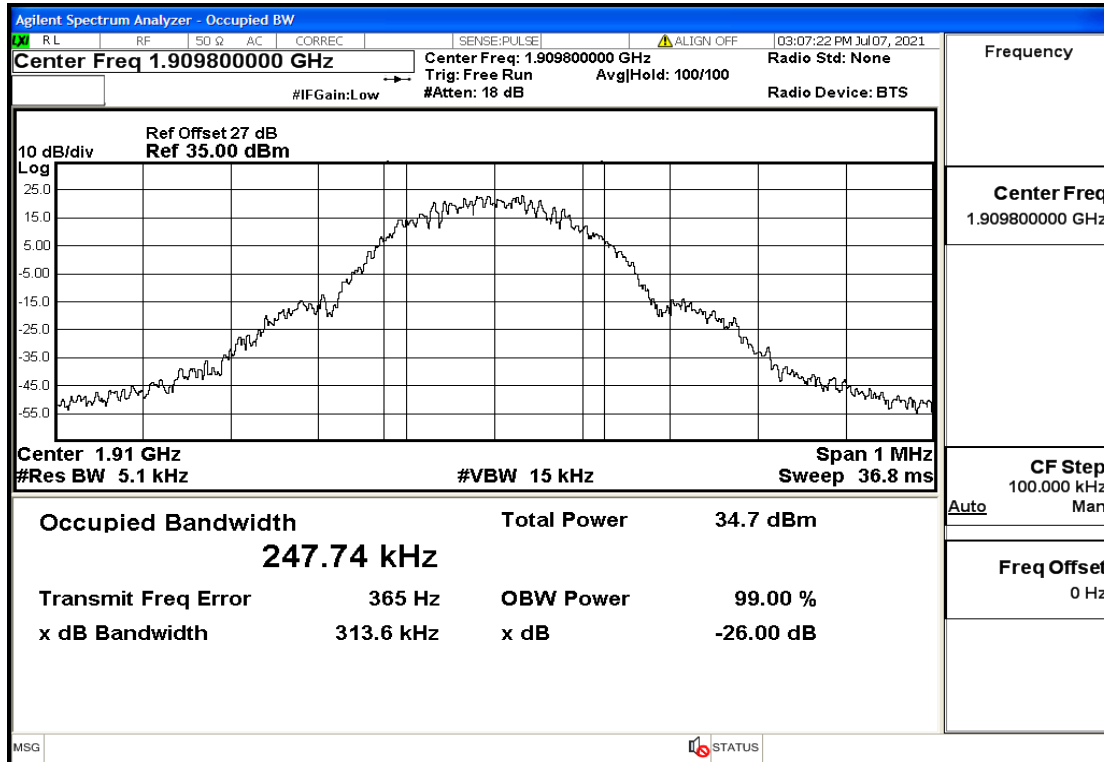


## GSM1900-1850.2MHz-EGPRS

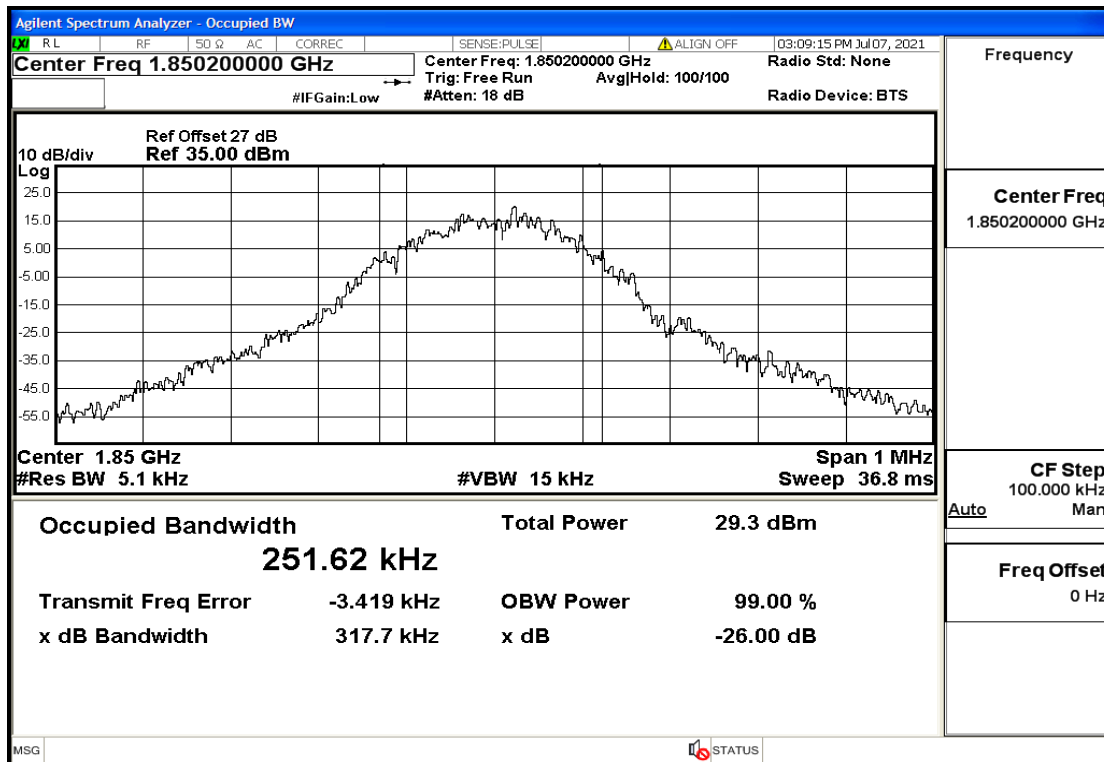




## GSM1900-1880MHz-EGPRS

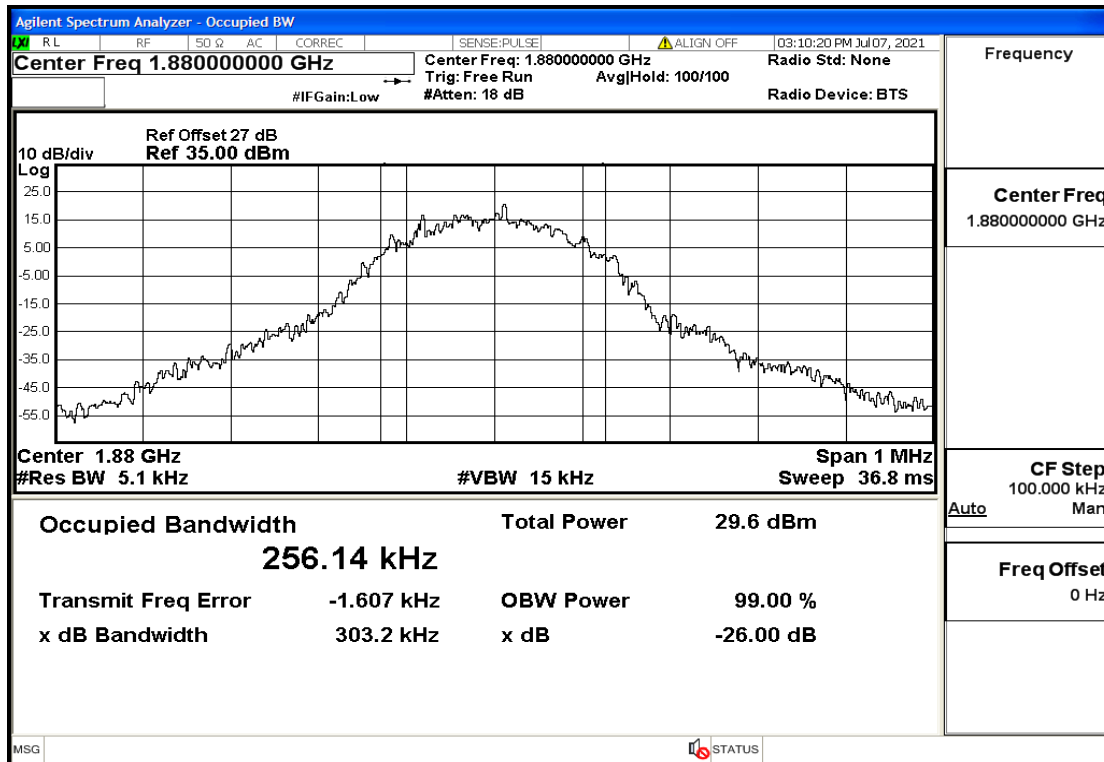


## GSM1900-1909.8MHz-EGPRS

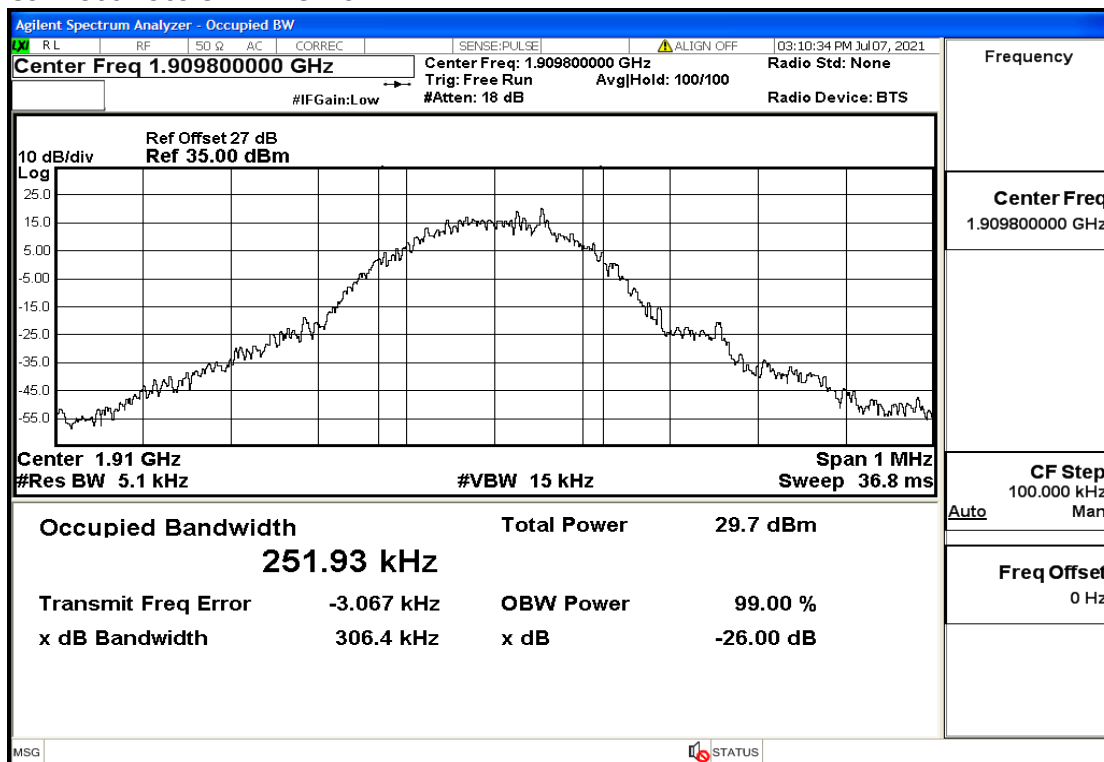




## UMTS BAND II-1852.4MHz-RMC

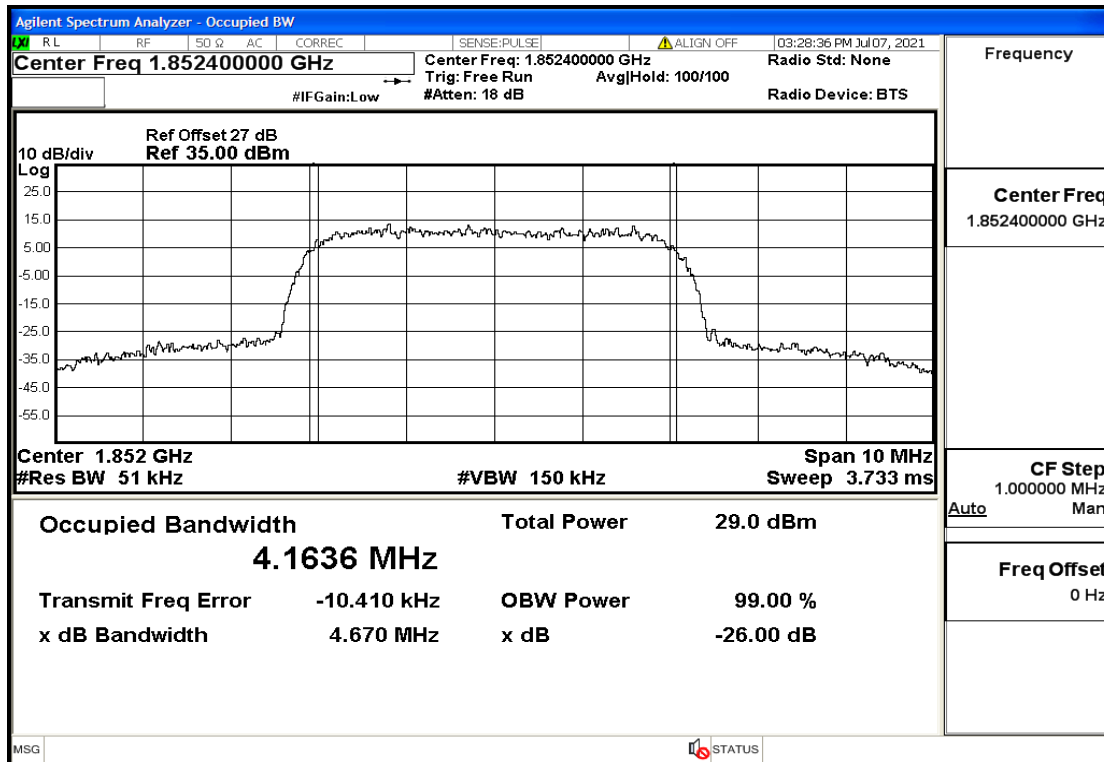


## UMTS BAND II-1880MHz-RMC

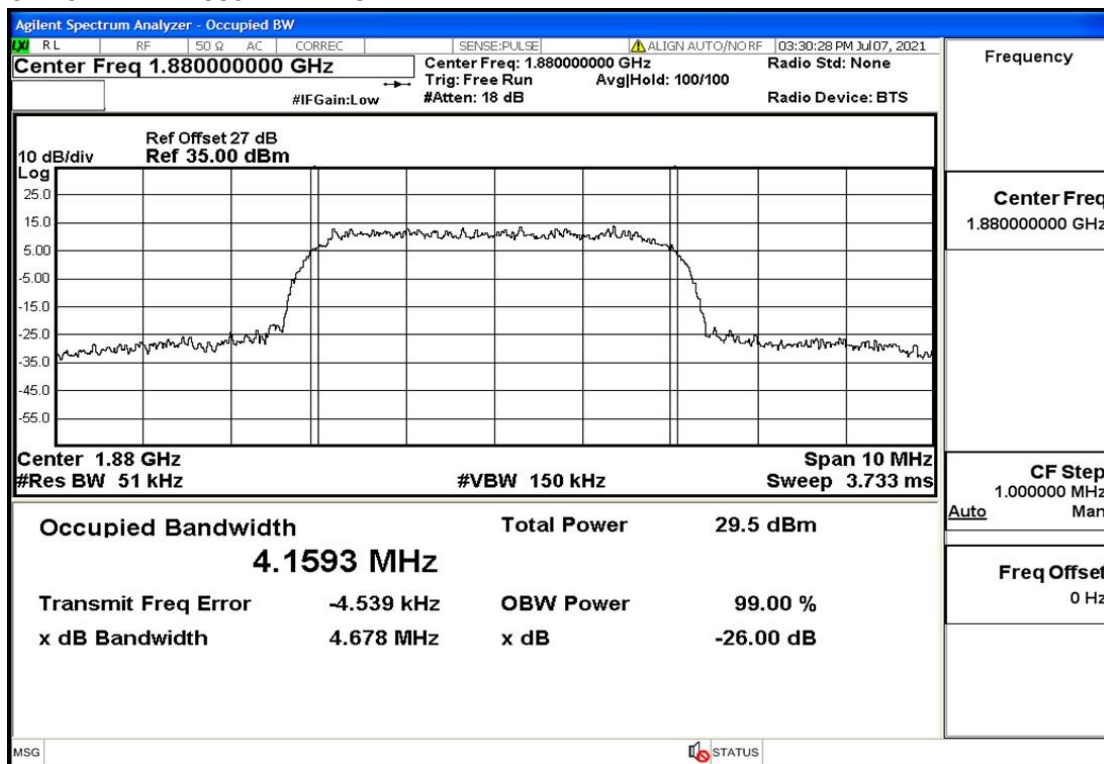






## UMTS BAND II-1907.6MHz-RMC

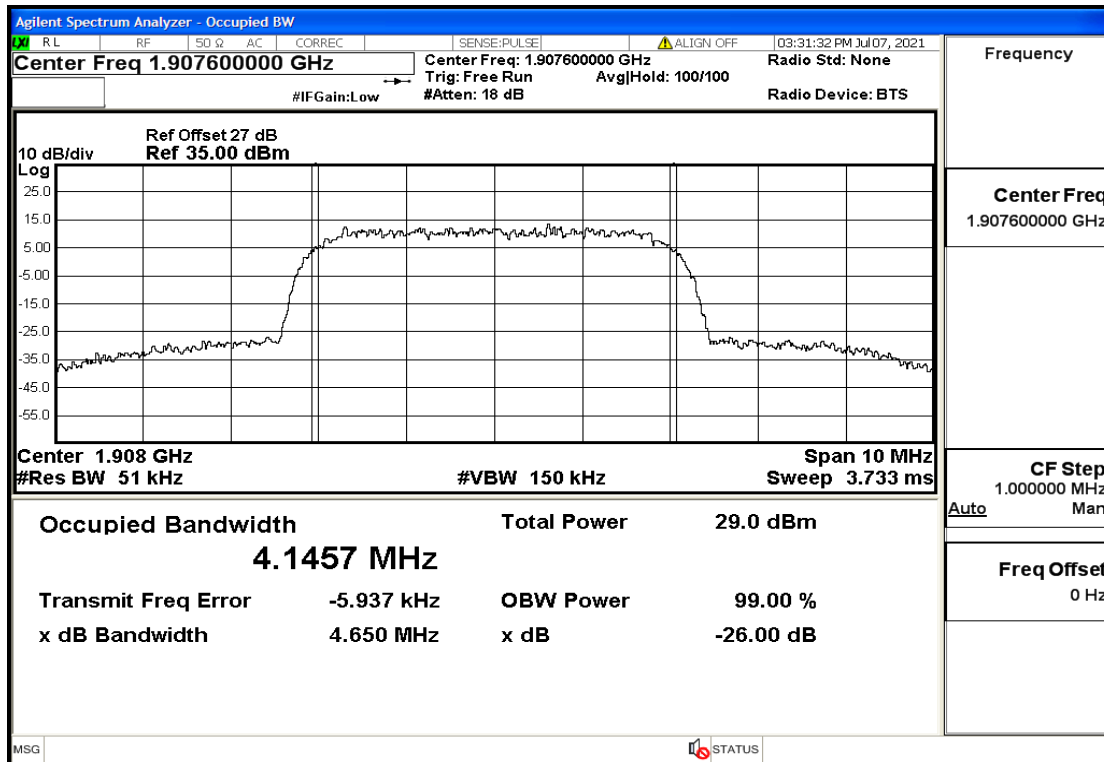


## UMTS BAND V-826.4MHz-RMC

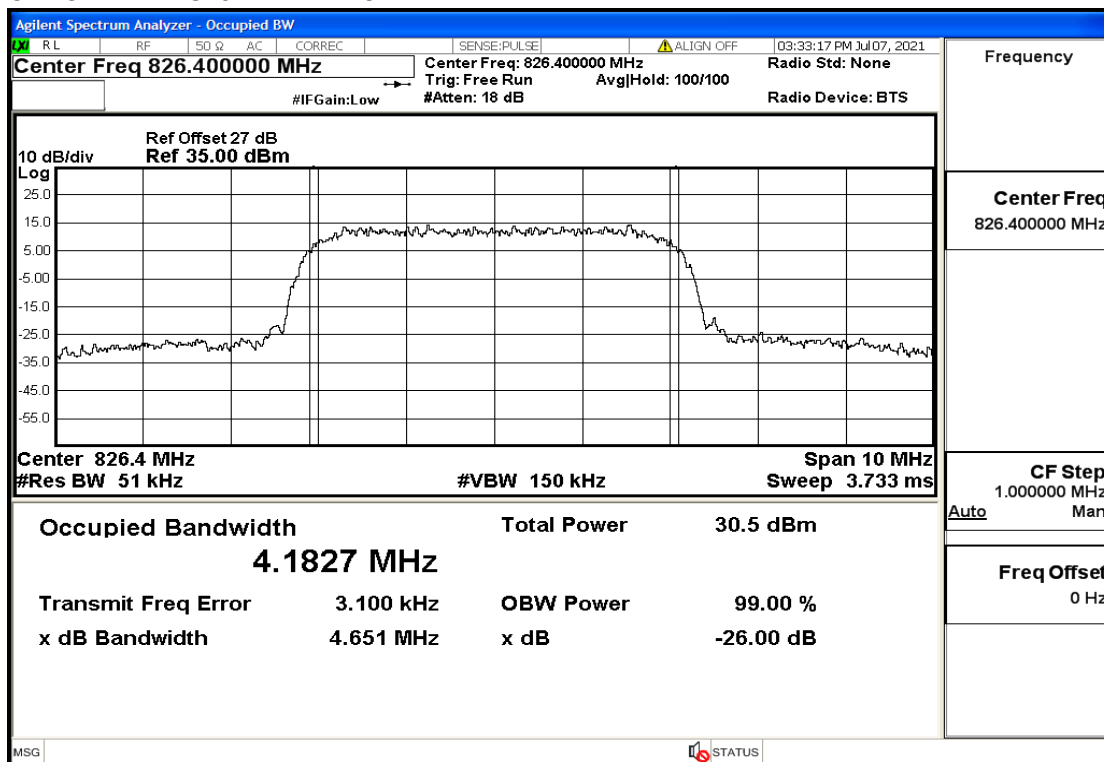




## UMTS BAND V-836.4MHz-RMC

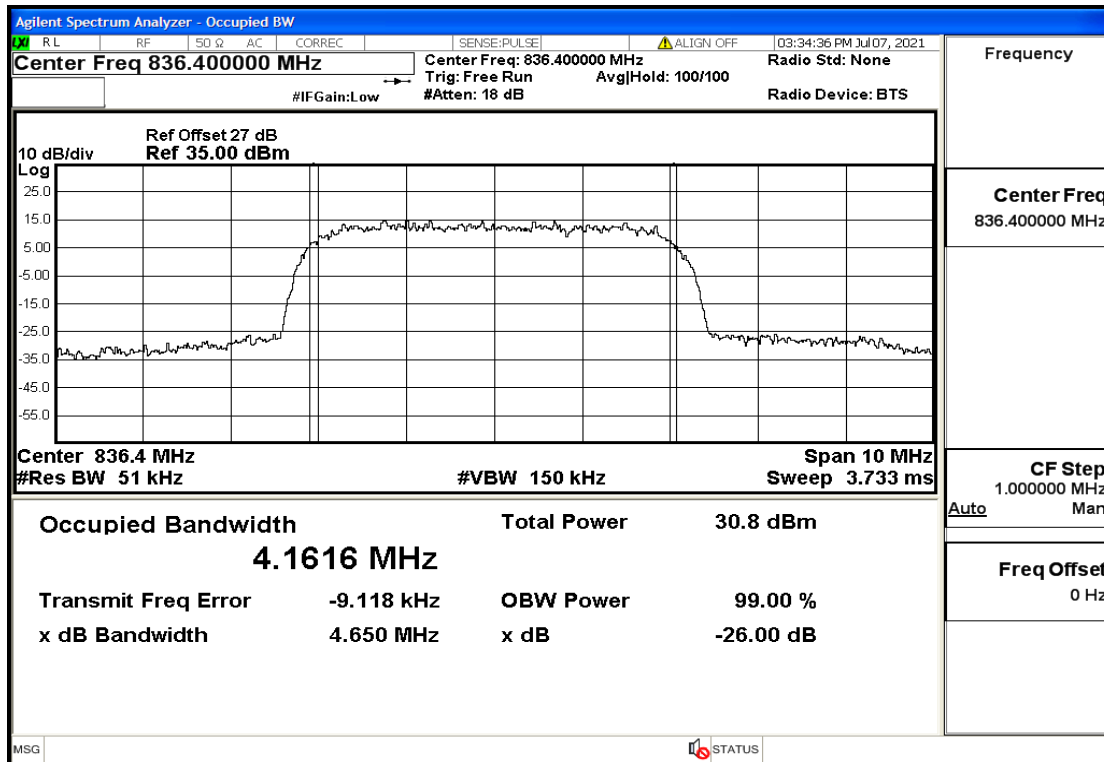


## UMTS BAND V-846.6MHz-RMC

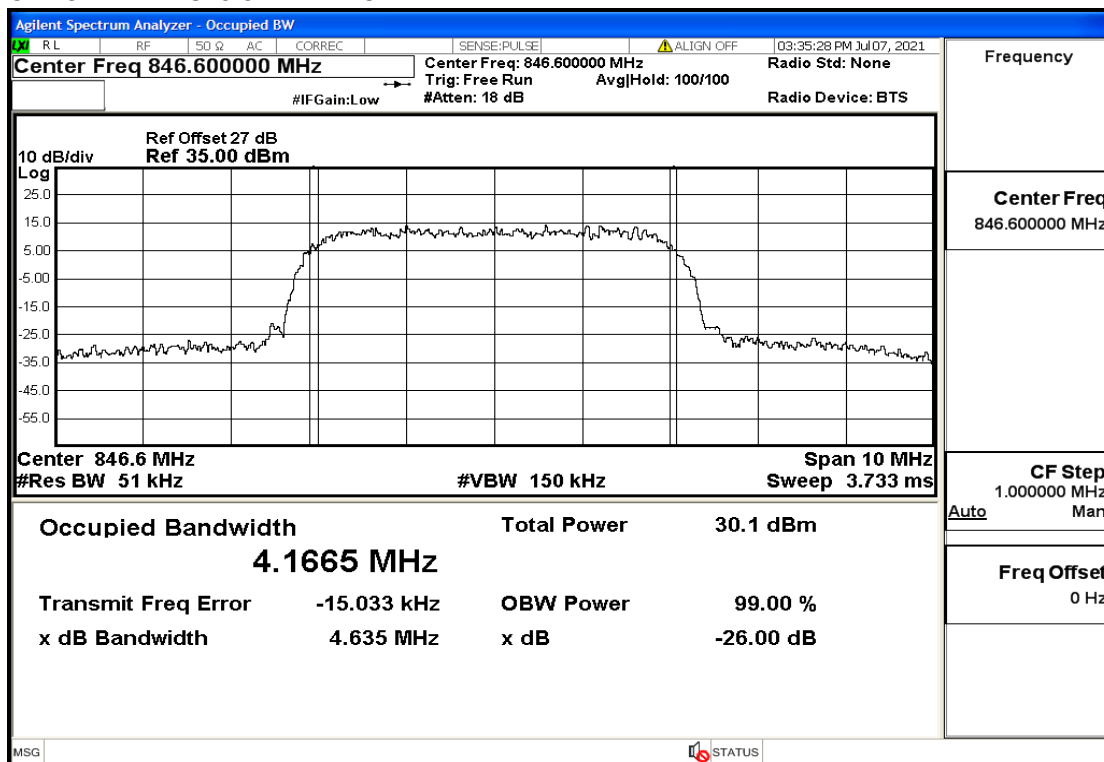




## UMTS BAND IV-1712.4MHz-RMC

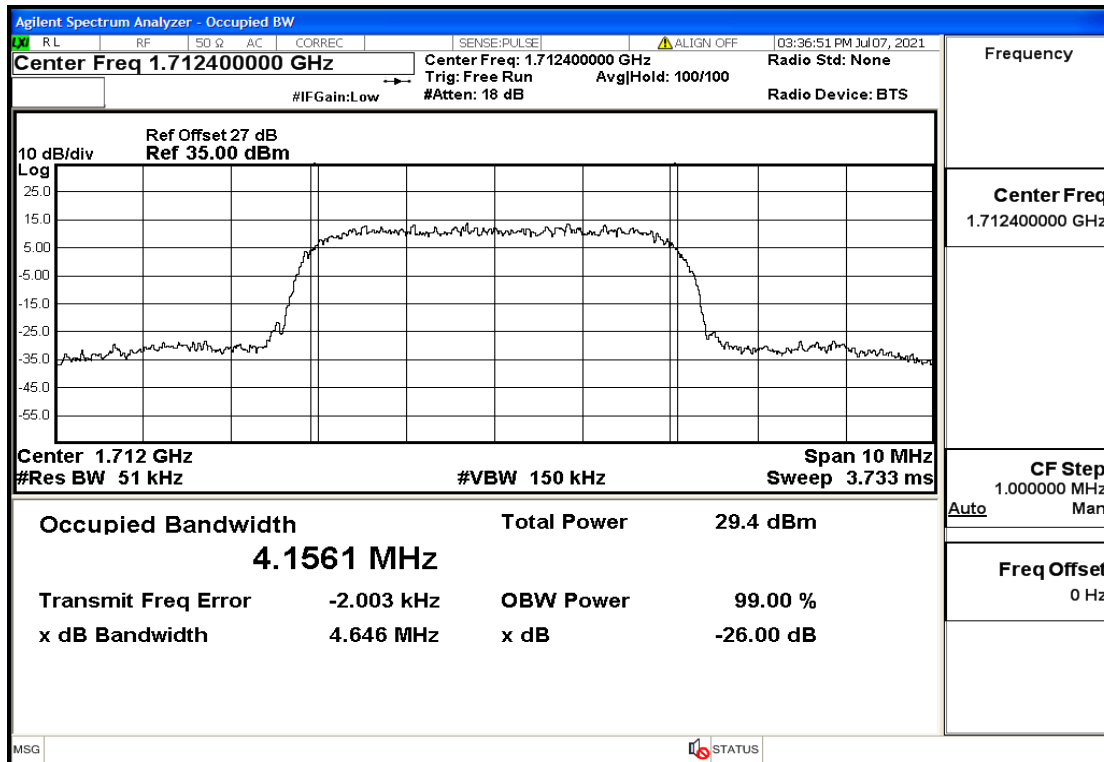


## UMTS BAND IV-1732.4MHz-RMC

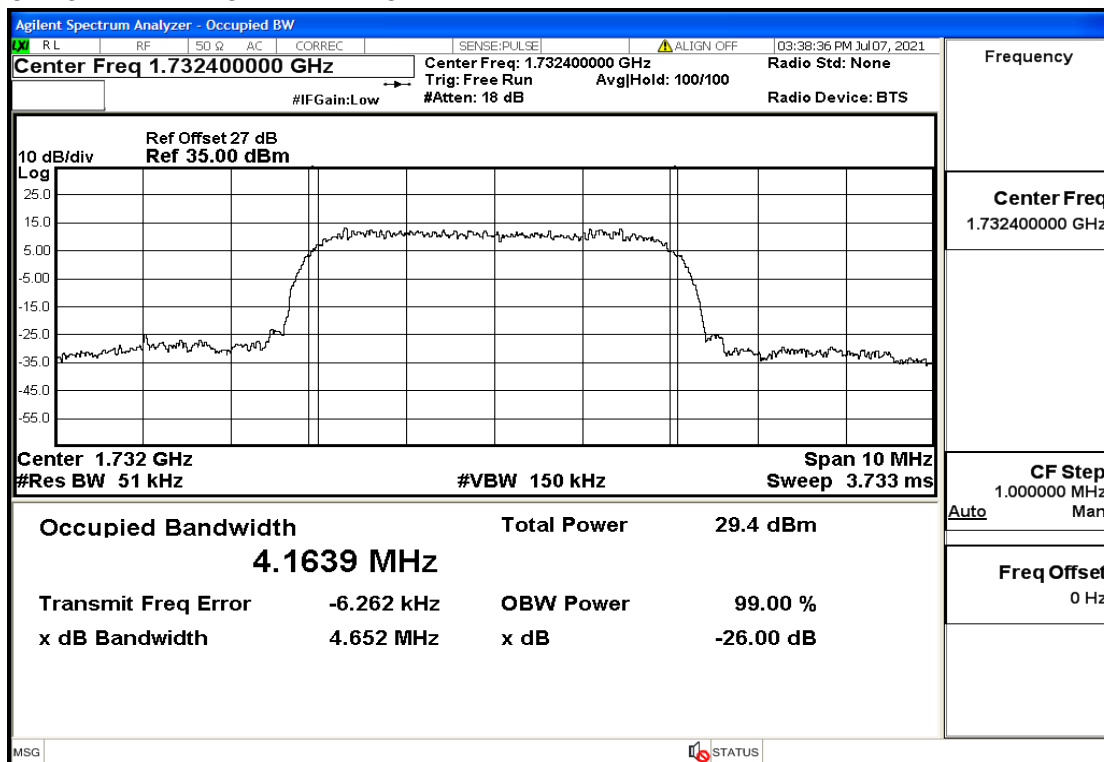



## UMTS BAND IV-1752.6MHz-RMC

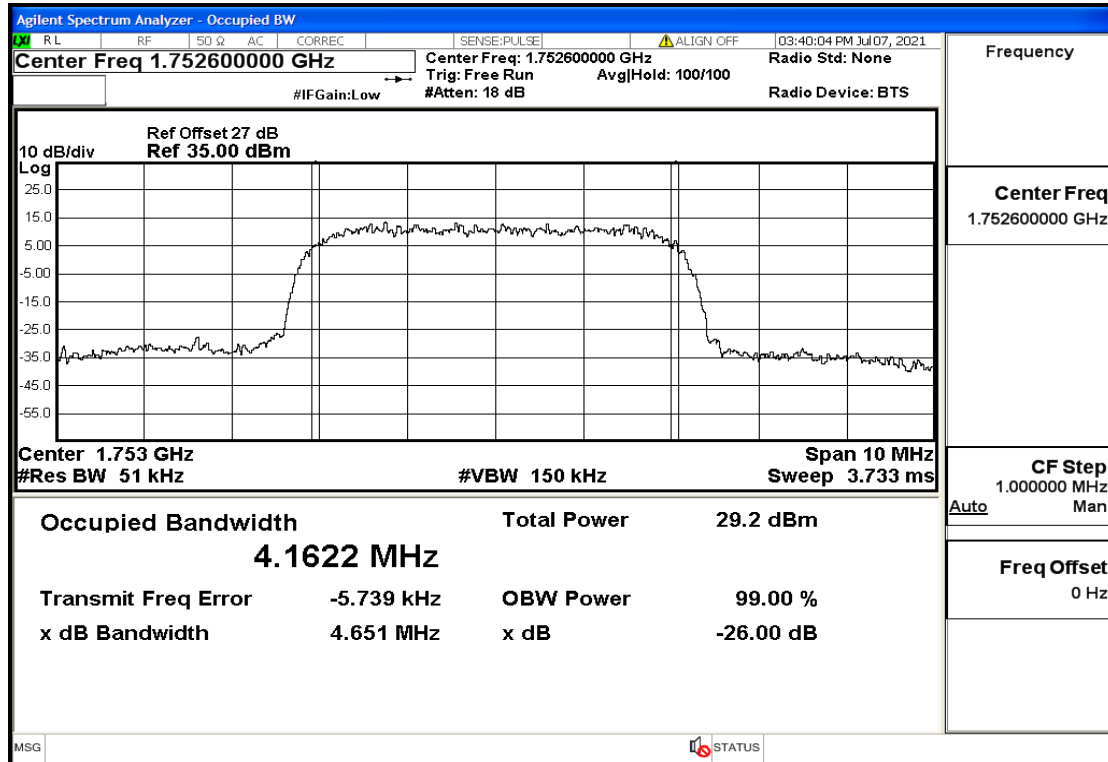



## **5.4 BAND EDGE**

### **5.4.1 MEASUREMENT METHOD**

1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration
2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
4. Span was set large enough so as to capture all out of band emissions near the band edge.
5. RBW>1% of the emission bandwidth, VBW  $\geq 3 \times$  RBW, Detector=RMS, Number of points  $\geq 2 \times$  Span/RBW, Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

### **5.4.2 PROVISIONS APPLICABLE**


As Specified in FCC rules of 22.917(a), 24.238(a) and KDB 971168 D1 V03R01.

### **5.4.3 Test Results**


**Pass**



## GSM850-824.2MHz-GPRS

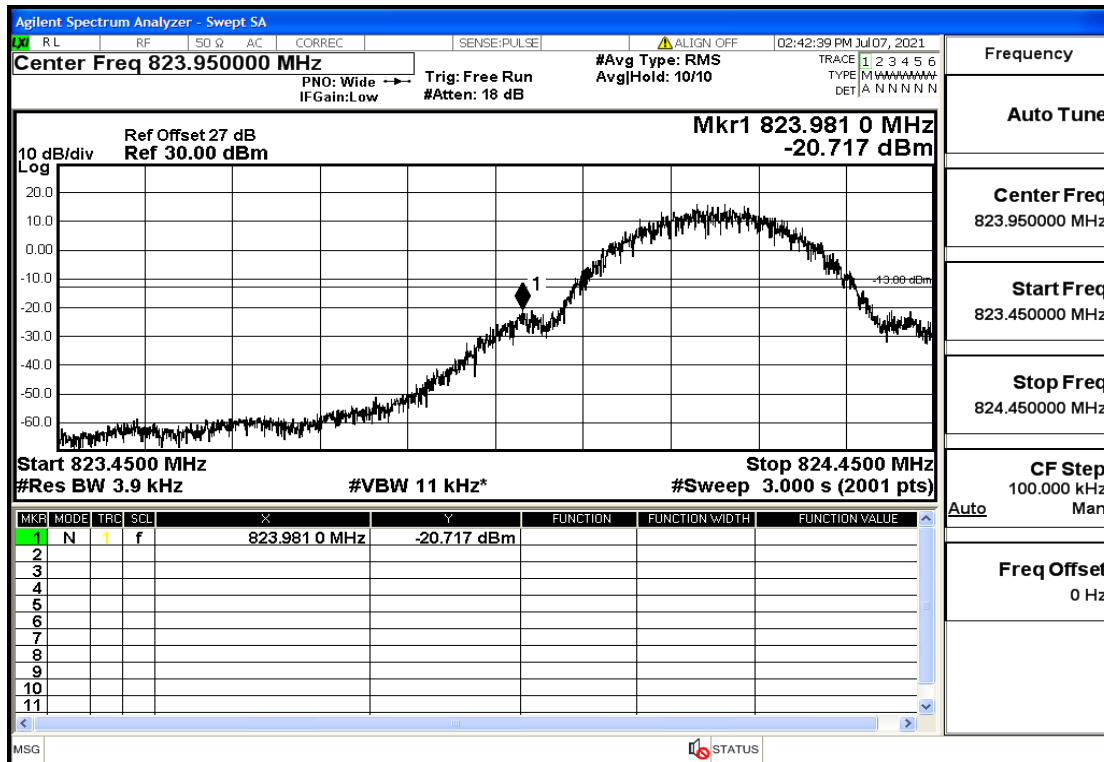


## GSM850-848.8MHz-GPRS

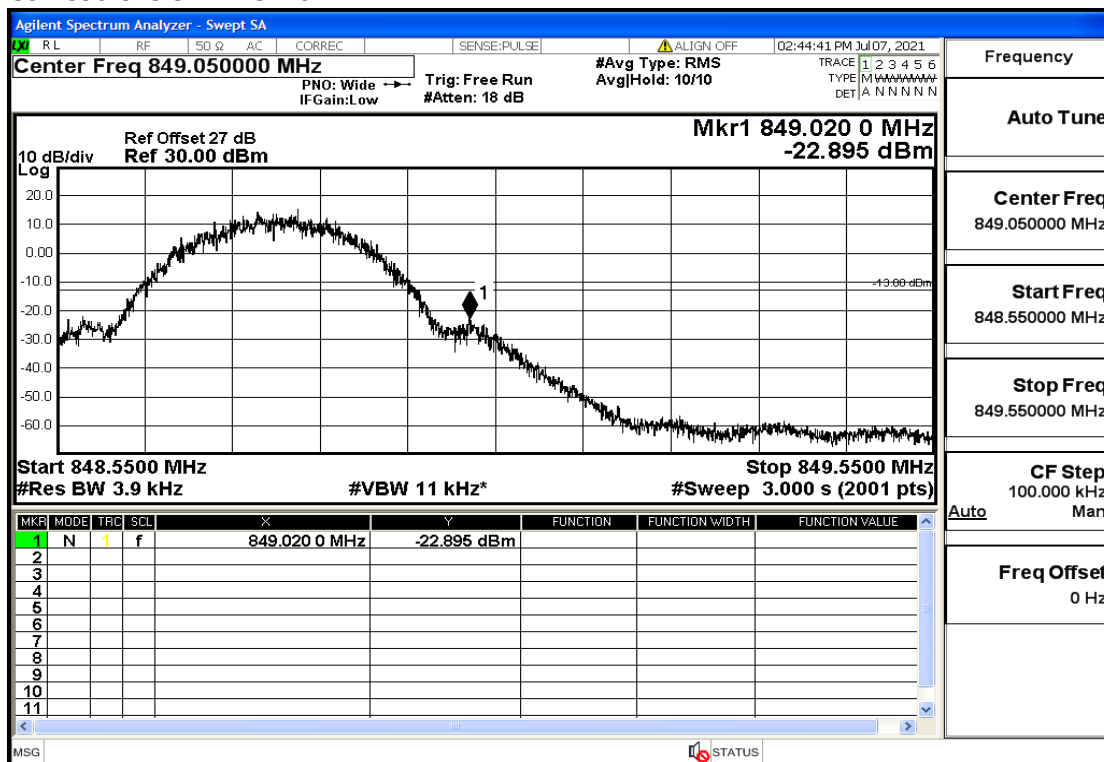




## GSM850-824.2MHz-EGPRS

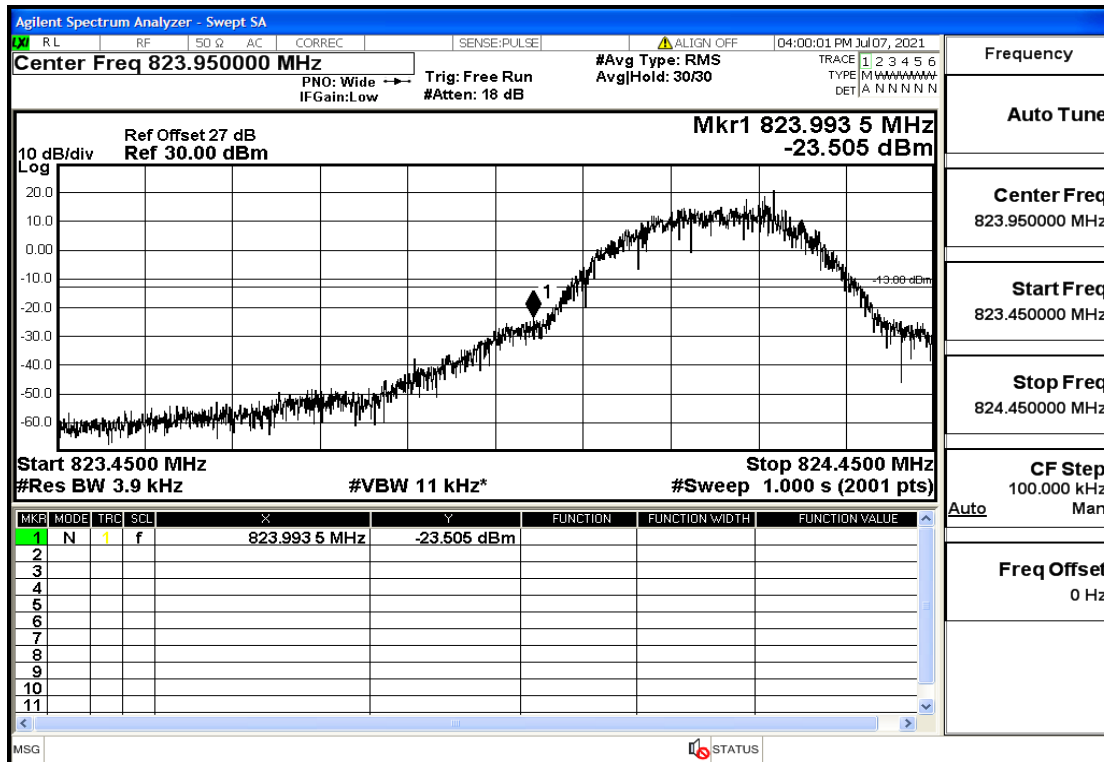


## GSM850-848.8MHz-EGPRS

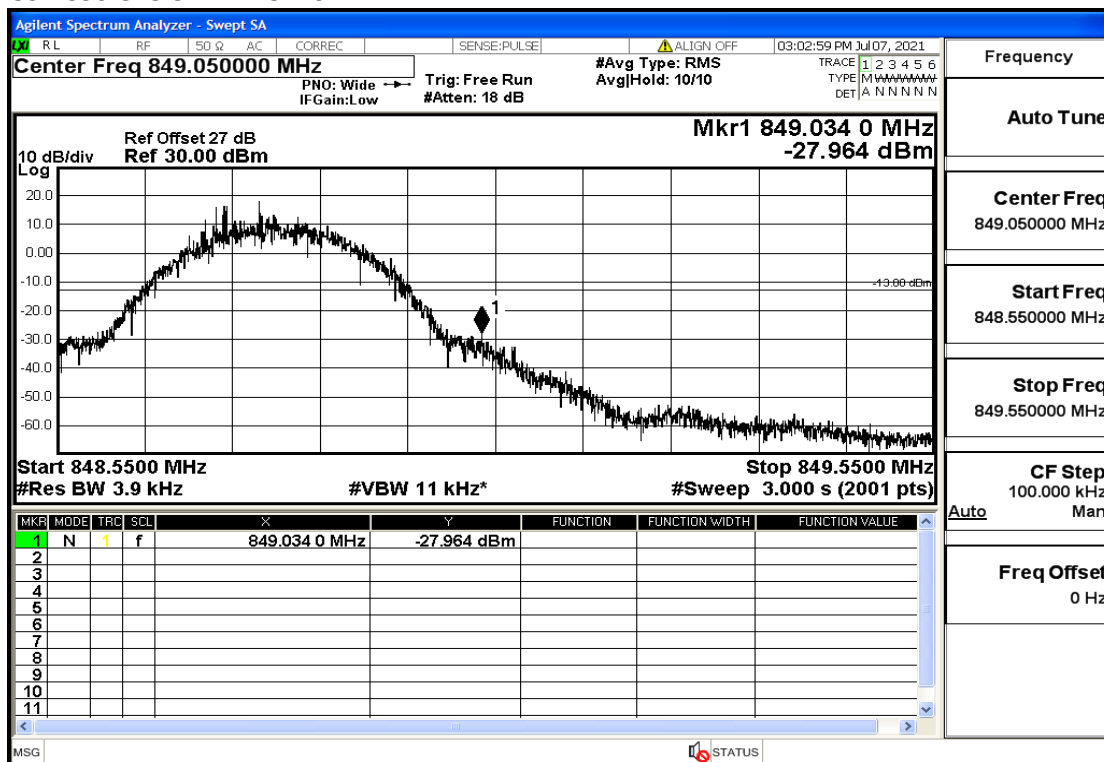




## GSM1900-1850.2MHz-GPRS

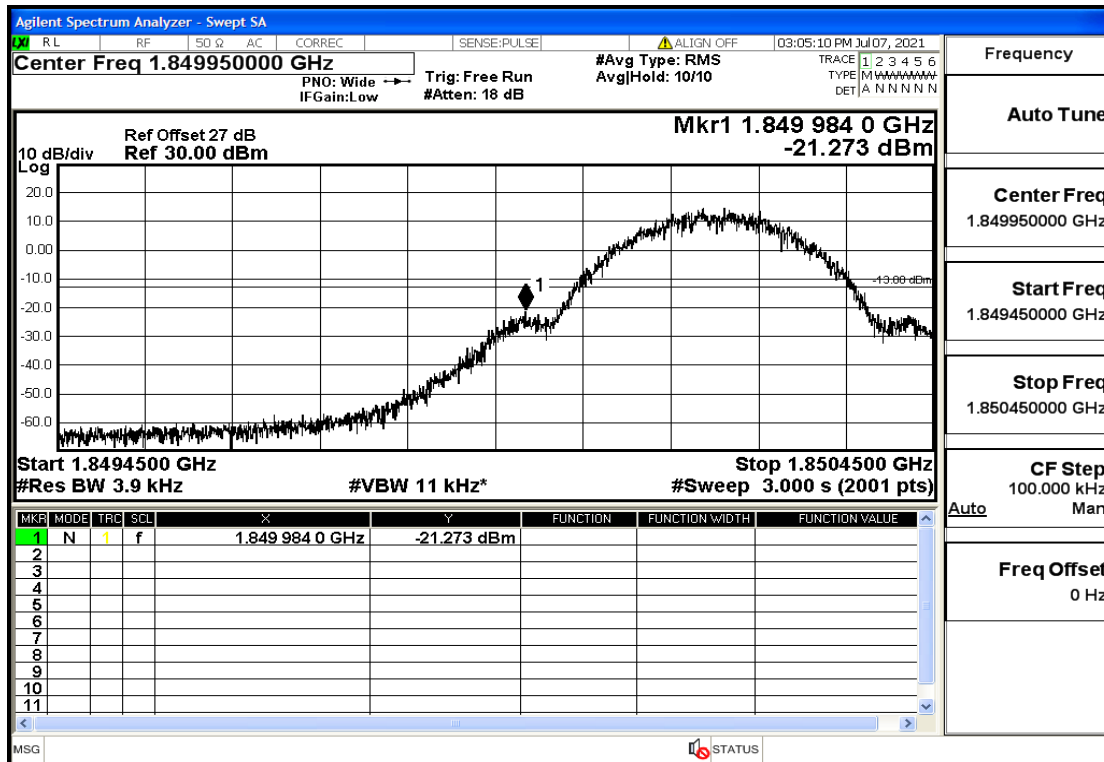


## GSM1900-1909.8MHz-GPRS

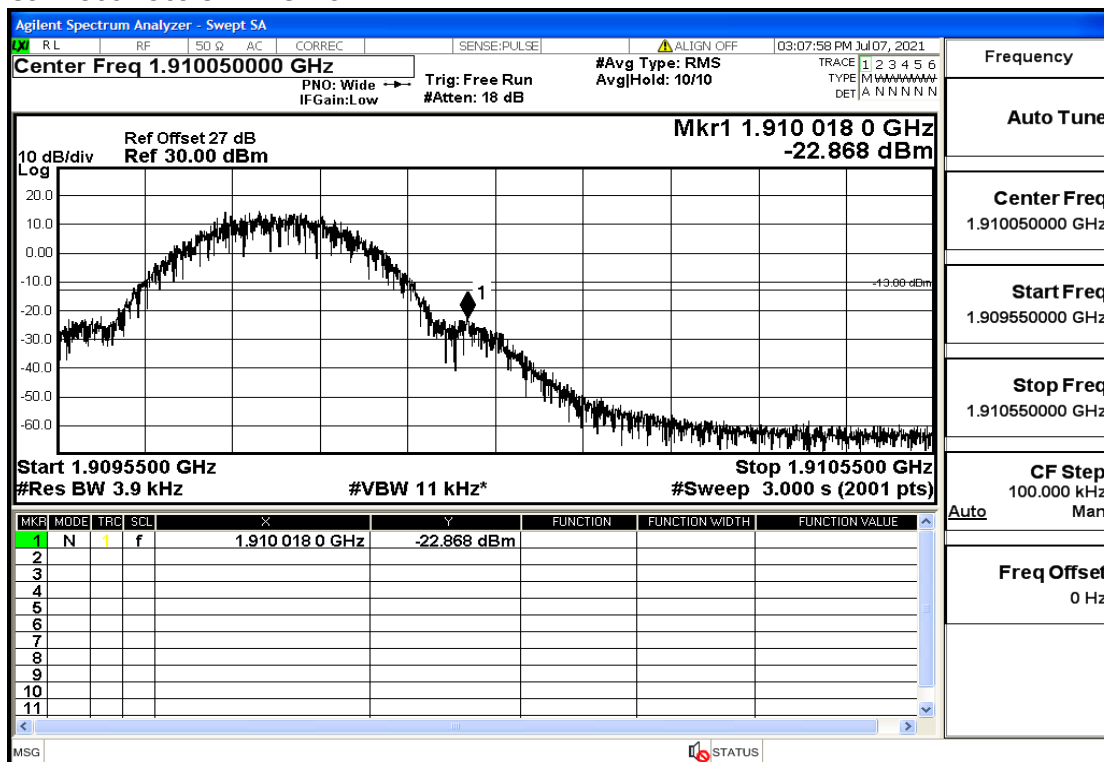






## GSM1900-1850.2MHz-EGPRS

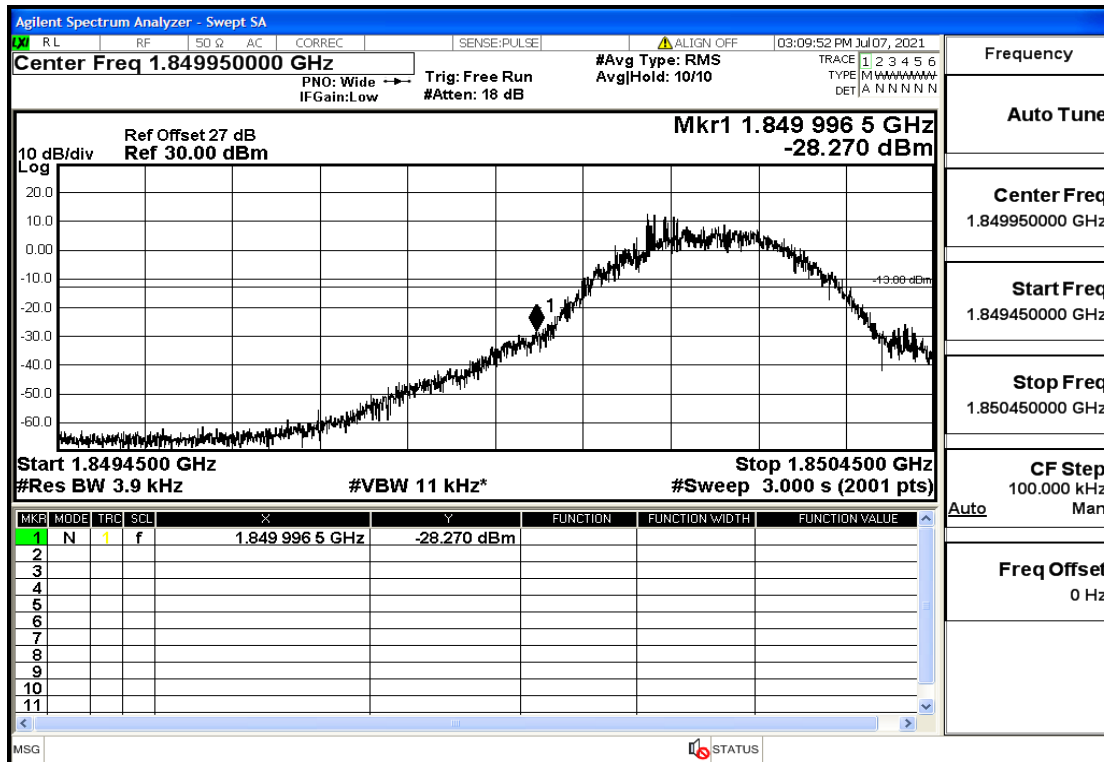


## GSM1900-1909.8MHz-EGPRS

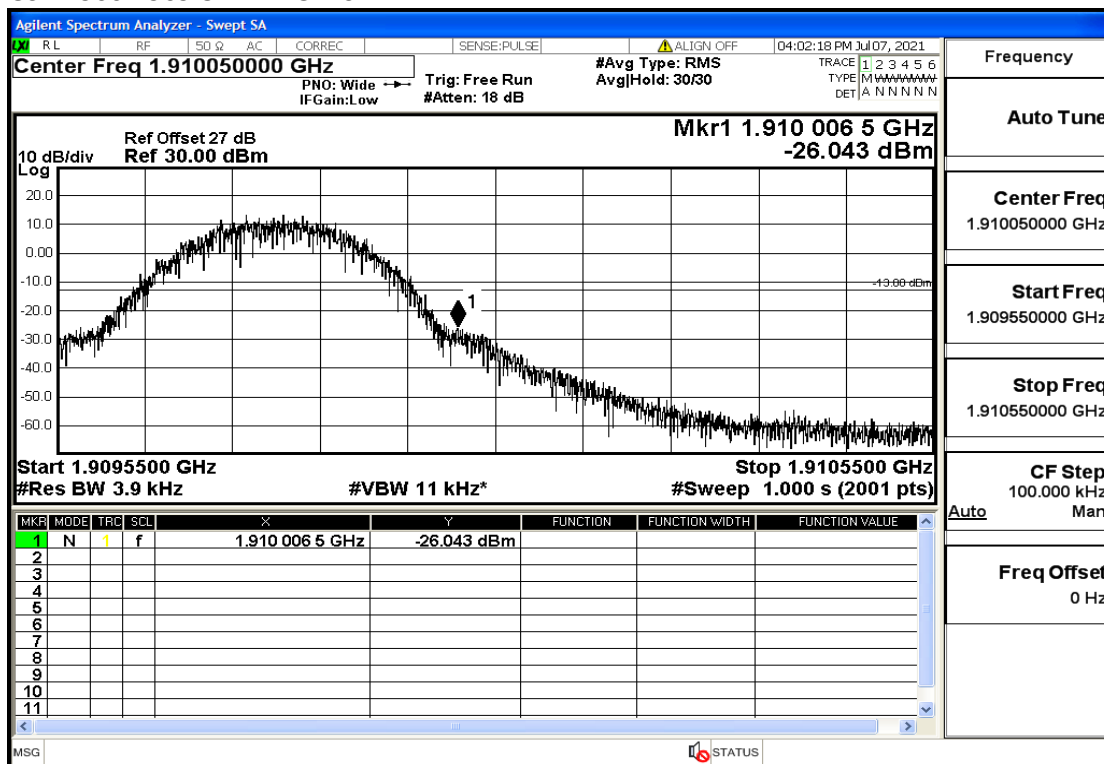




## UMTS BAND II-1852.4MHz-RMC

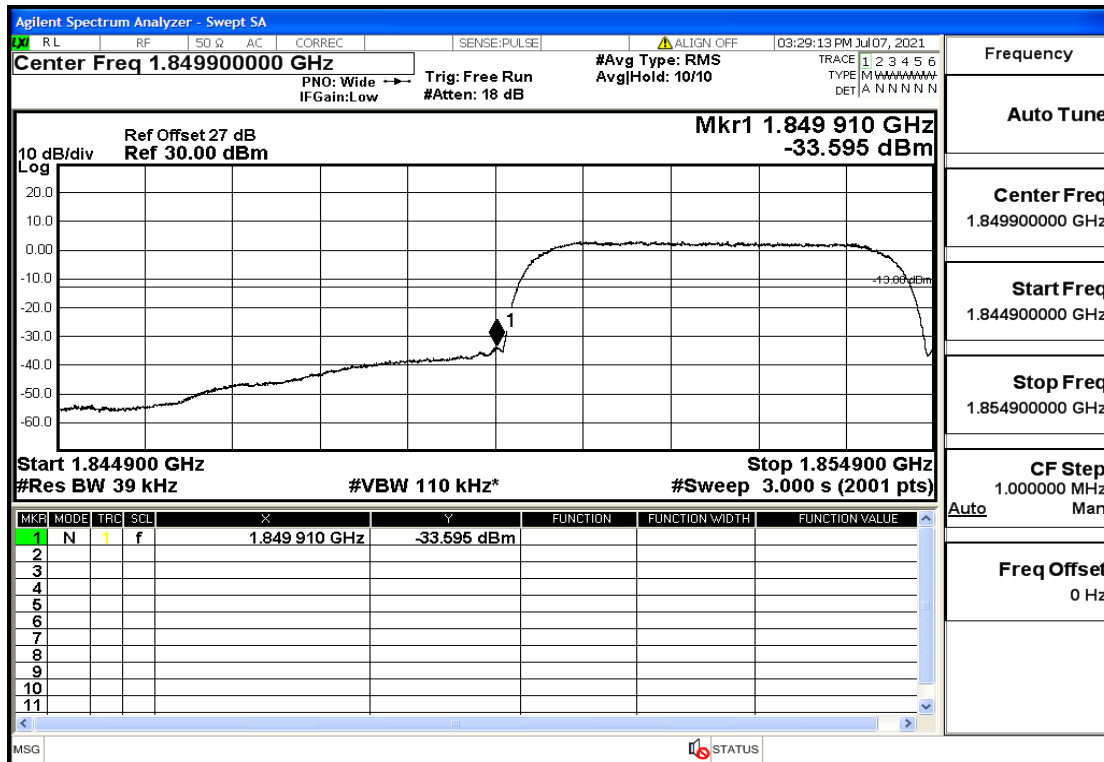


## UMTS BAND II-1907.6MHz-RMC

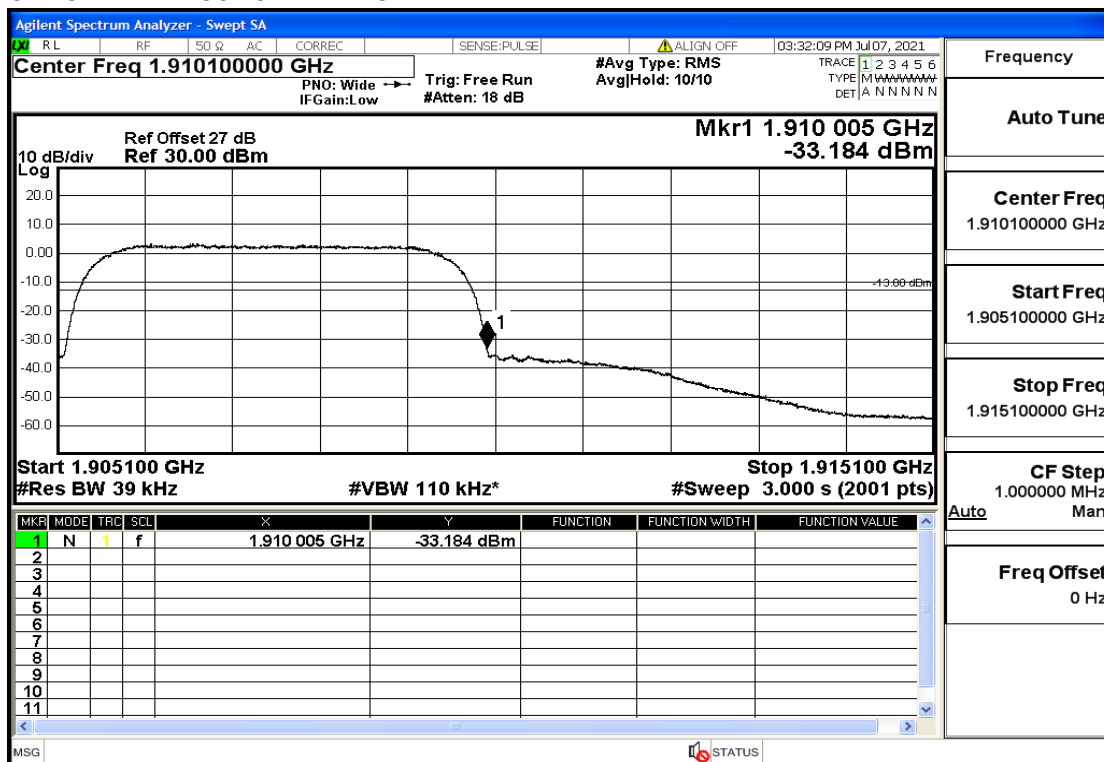




## UMTS BAND V-826.4MHz-RMC

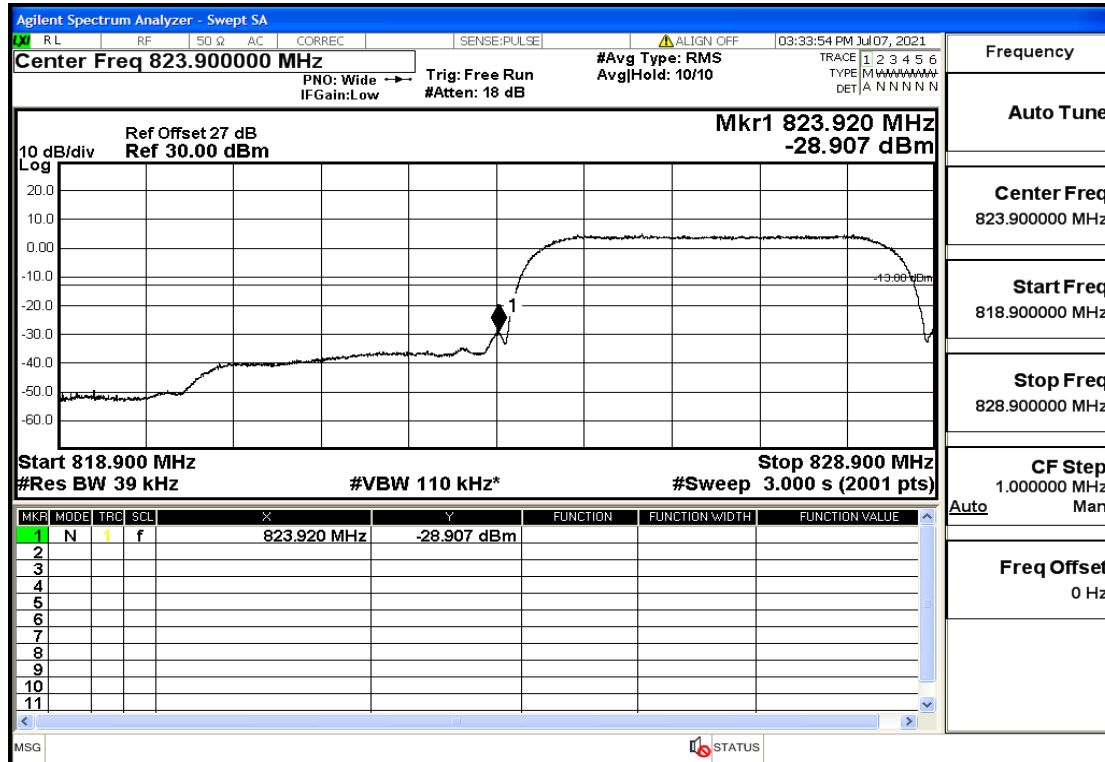


## UMTS BAND V-846.6MHz-RMC

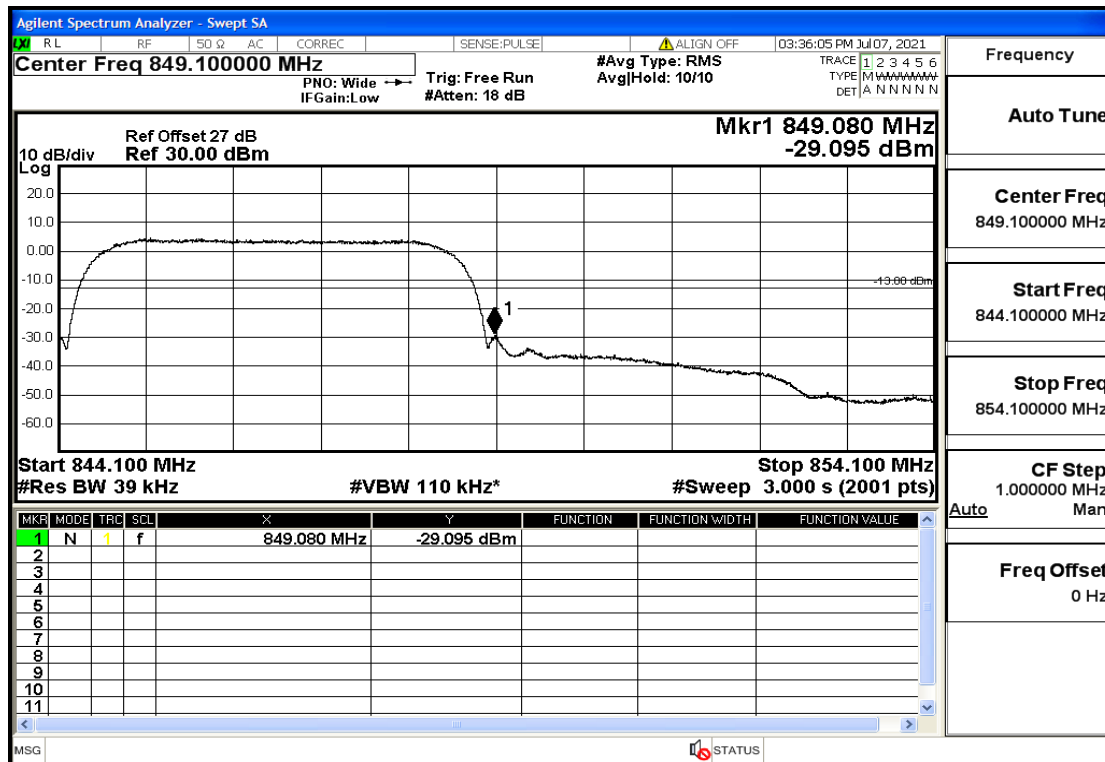




## UMTS BAND IV-1712.4MHz-RMC

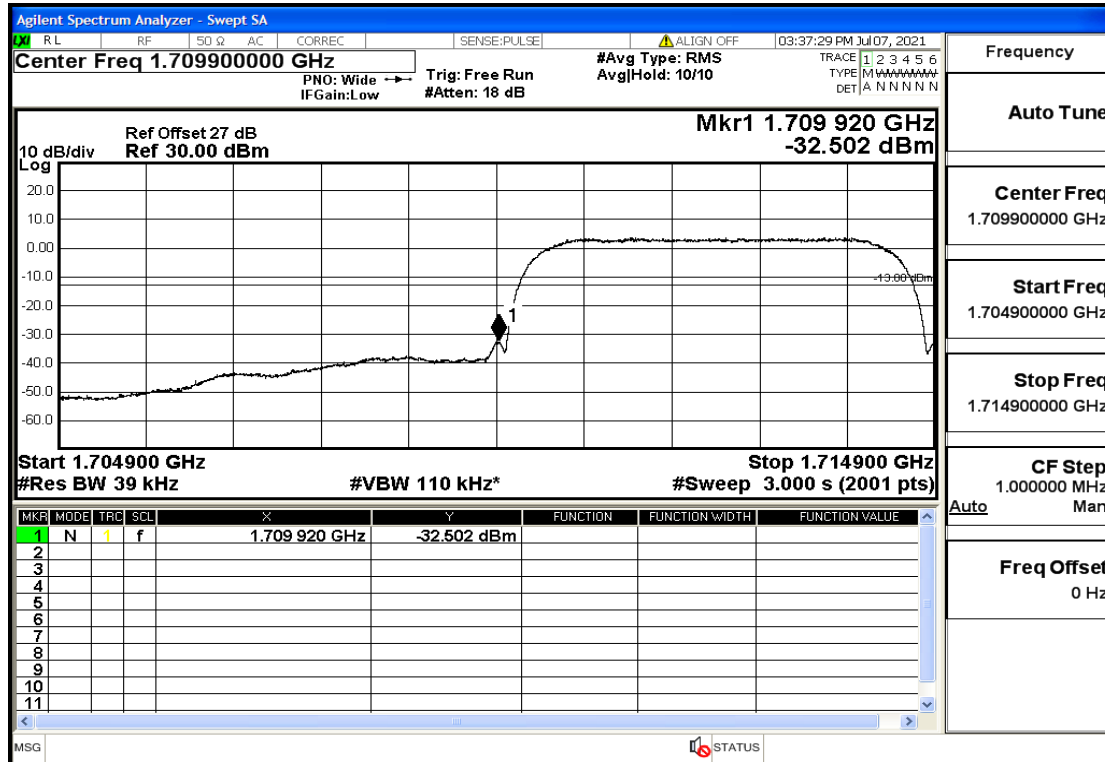

## UMTS BAND IV-1752.6MHz-RMC

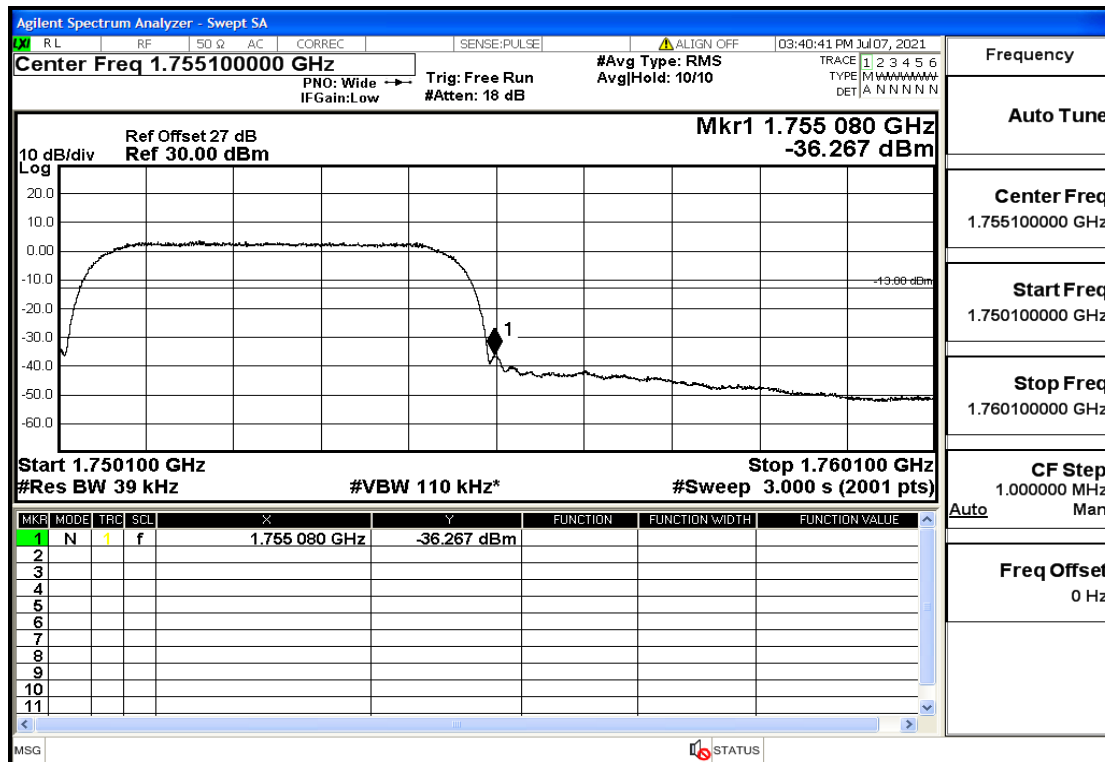

## 5.5 SPURIOUS EMISSION

### 5.5.1 CONDUCTED SPURIOUS EMISSION

#### 5.5.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. The level of the carrier and the various conducted spurious and harmonic frequency is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration.

2. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.

3. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

**Typical Channels for testing of GSM 850**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 128     | 824.2           |
| 190     | 836.6           |
| 251     | 848.8           |

**Typical Channels for testing of PCS 1900**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 512     | 1850.2          |
| 661     | 1880.0          |
| 810     | 1909.8          |

**Typical Channels for testing of UMTS band II**

| Channel | Frequency (MHz) |
|---------|-----------------|
| 9262    | 1852.4          |
| 9400    | 1880            |
| 9538    | 1907.6          |



| Typical Channels for testing of UMTS band IV |                 |
|----------------------------------------------|-----------------|
| Channel                                      | Frequency (MHz) |
| 1312                                         | 1712.4          |
| 1412                                         | 1732.4          |
| 1513                                         | 1752.6          |

| Typical Channels for testing of UMTS band V |                 |
|---------------------------------------------|-----------------|
| Channel                                     | Frequency (MHz) |
| 4132                                        | 826.4           |
| 4182                                        | 836.4           |
| 4233                                        | 846.6           |

#### 5.5.1.2 PROVISIONS APPLICABLE


On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.




## 5.5.1.3 MEASUREMENT RESULT

Pass

GSM850-824.2MHz-GPRS@30mHz-1GHz@Pass

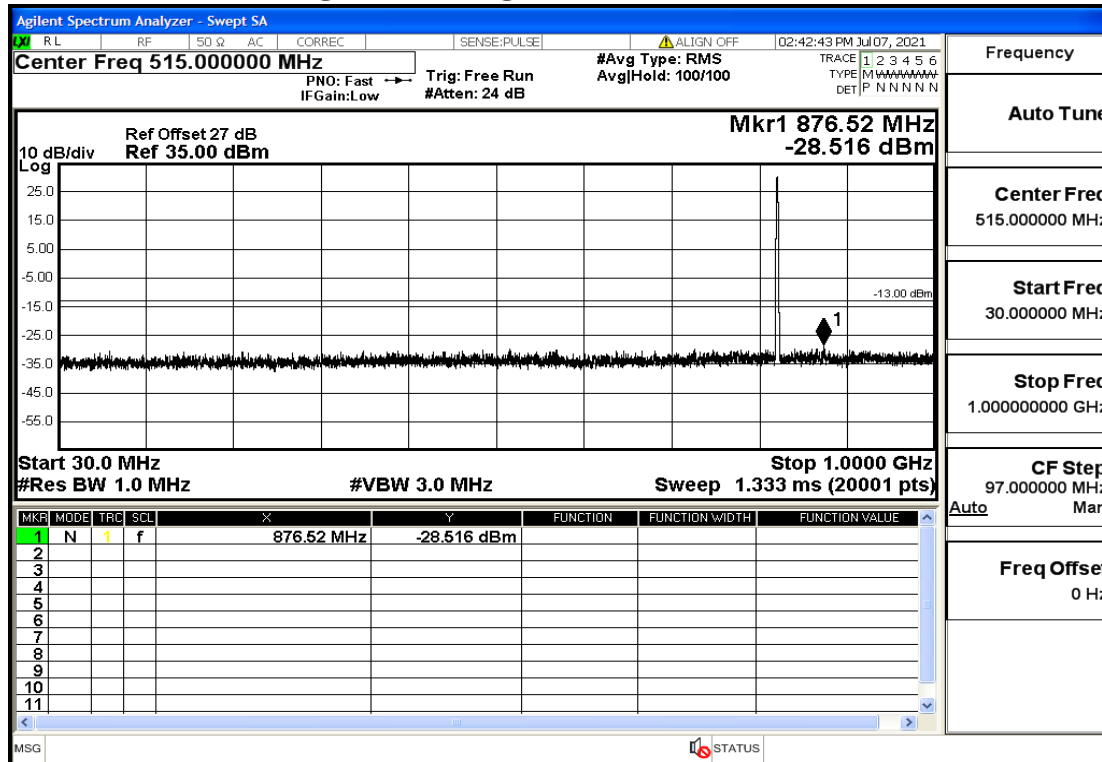


GSM850-824.2MHz-GPRS@1GHz-9GHz@Pass

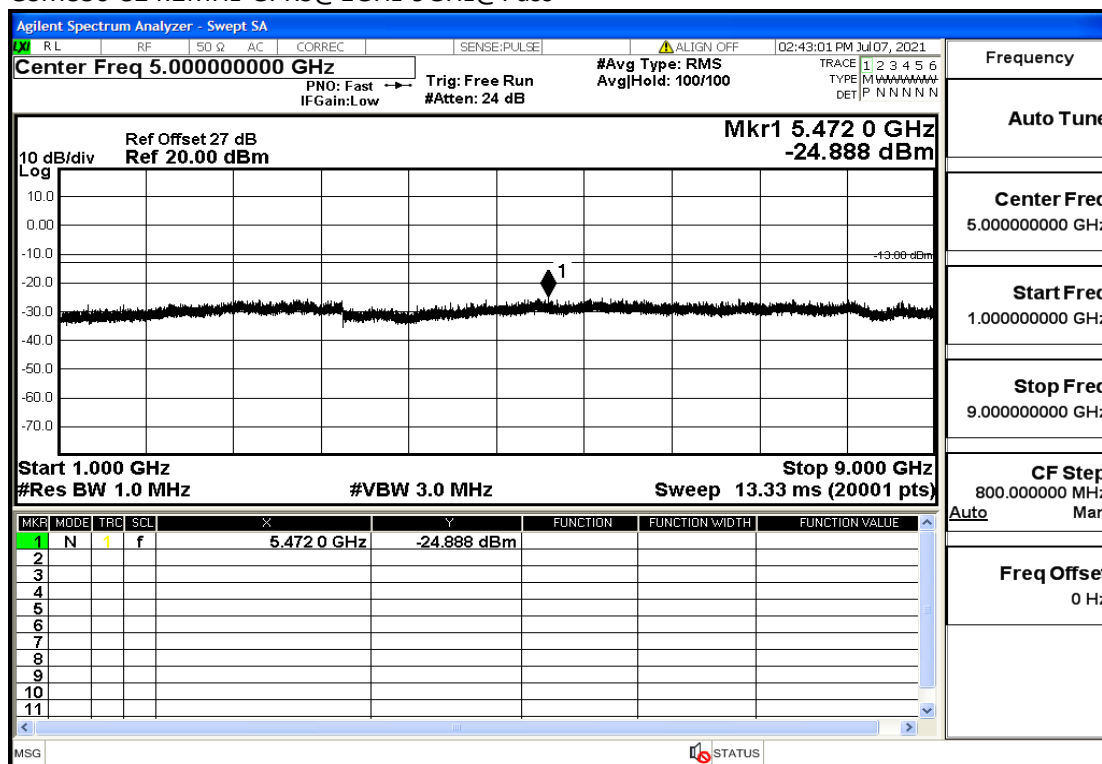




## GSM850-836.6MHz-GPRS@30mHz-1GHz@Pass

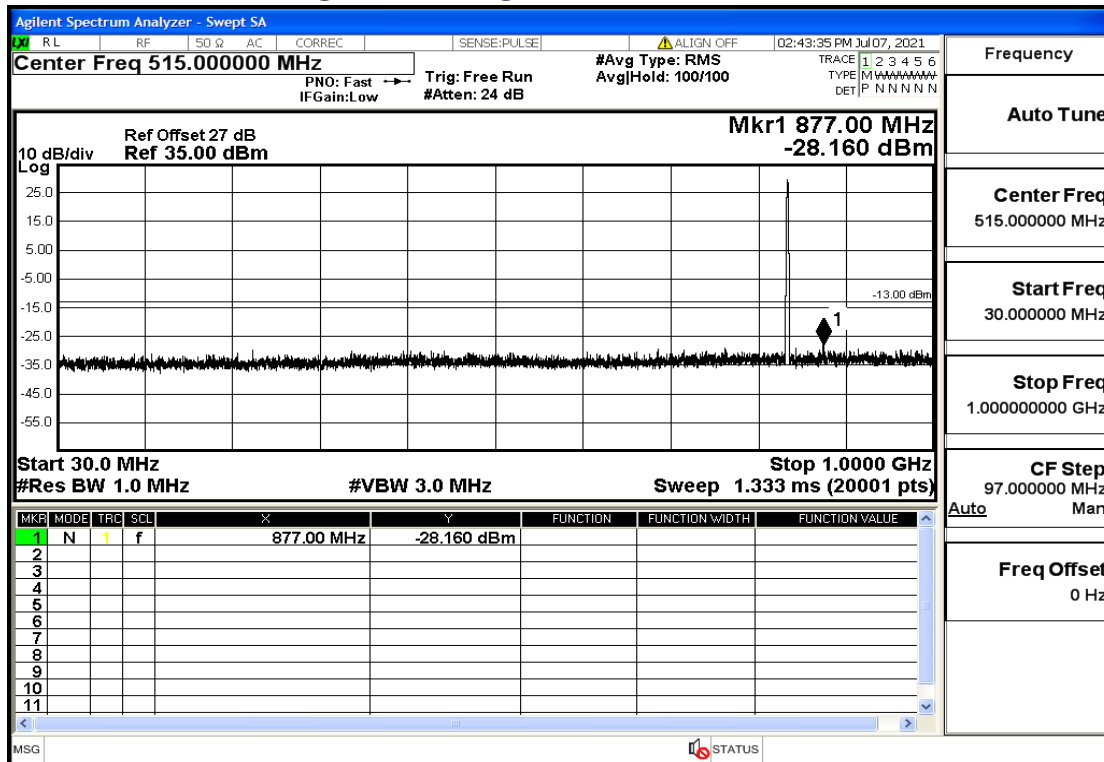


## GSM850-836.6MHz-GPRS@1GHz-9GHz@Pass

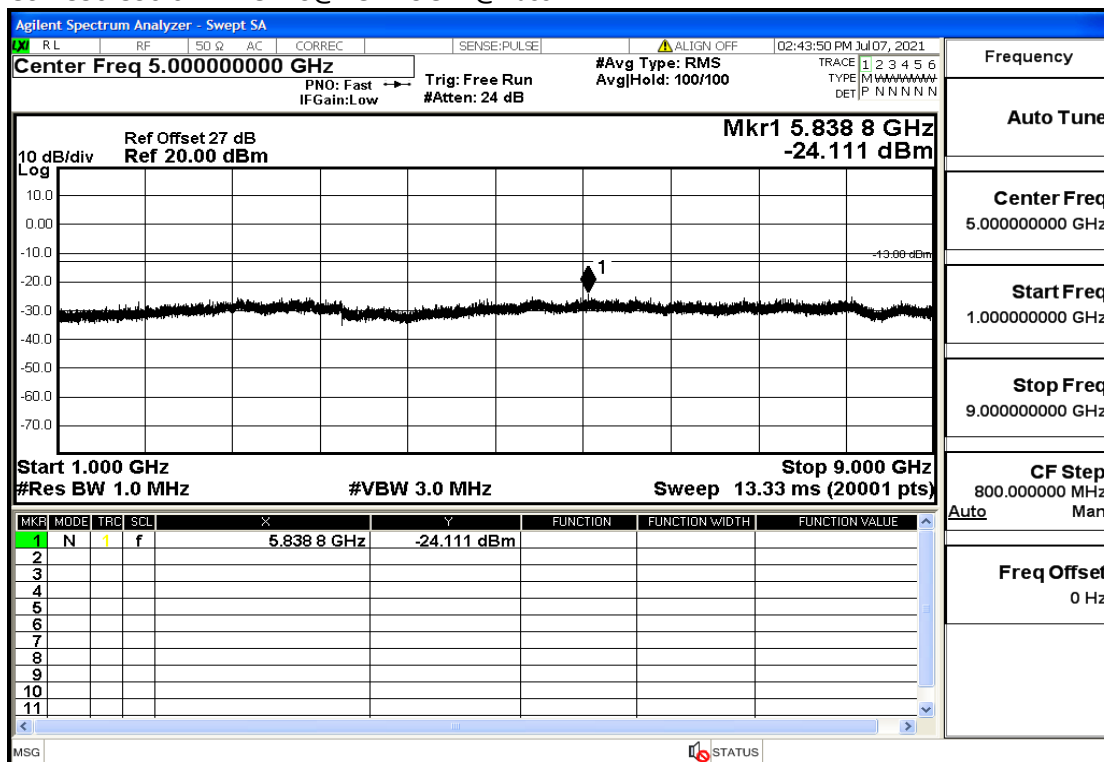






## GSM850-848.8MHz-GPRS@30mHz-1GHz@Pass

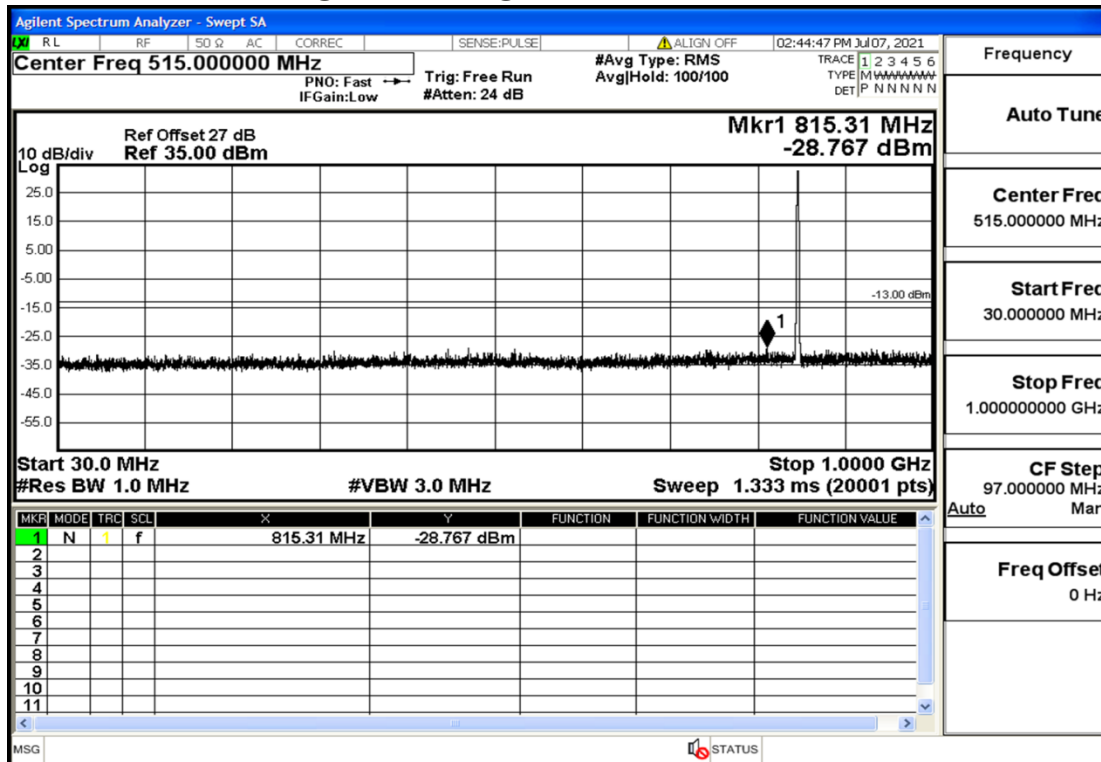


## GSM850-848.8MHz-GPRS@1GHz-9GHz@Pass

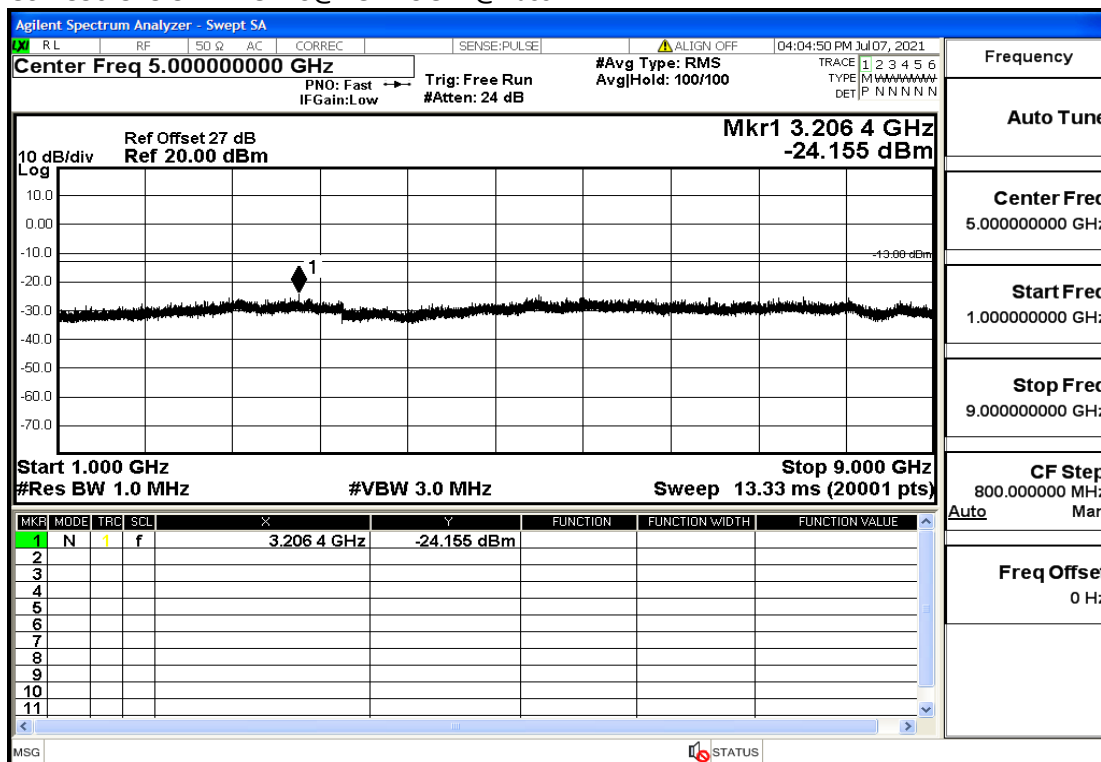




## GSM1900-1850.2MHz-GPRS@30mHz-1GHz@Pass

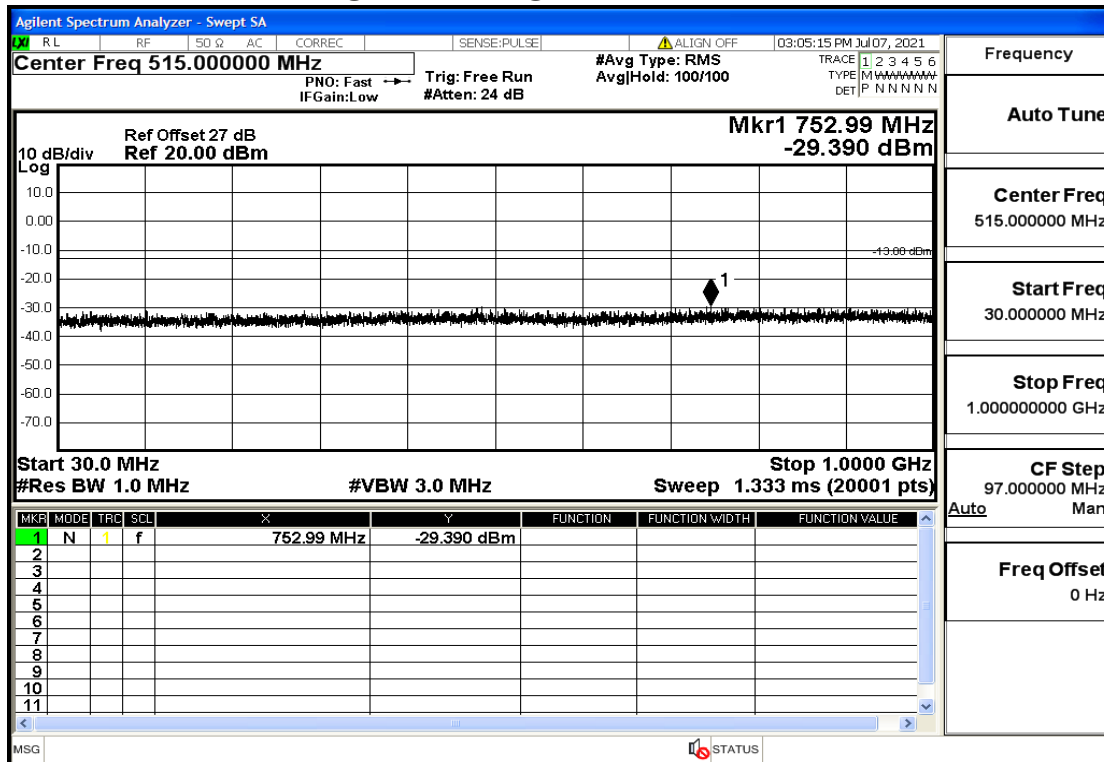


## GSM1900-1850.2MHz-GPRS@1GHz-7GHz@Pass

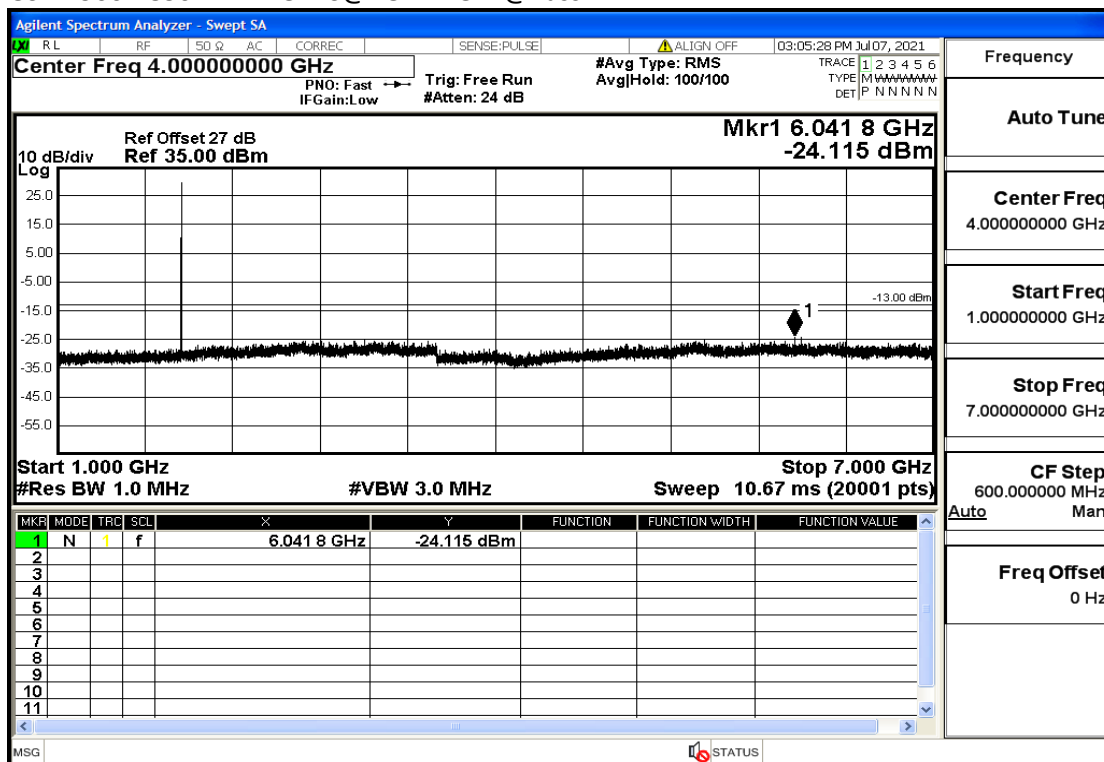




## GSM1900-1850.2MHz-GPRS@7GHz-13.6GHz@Pass

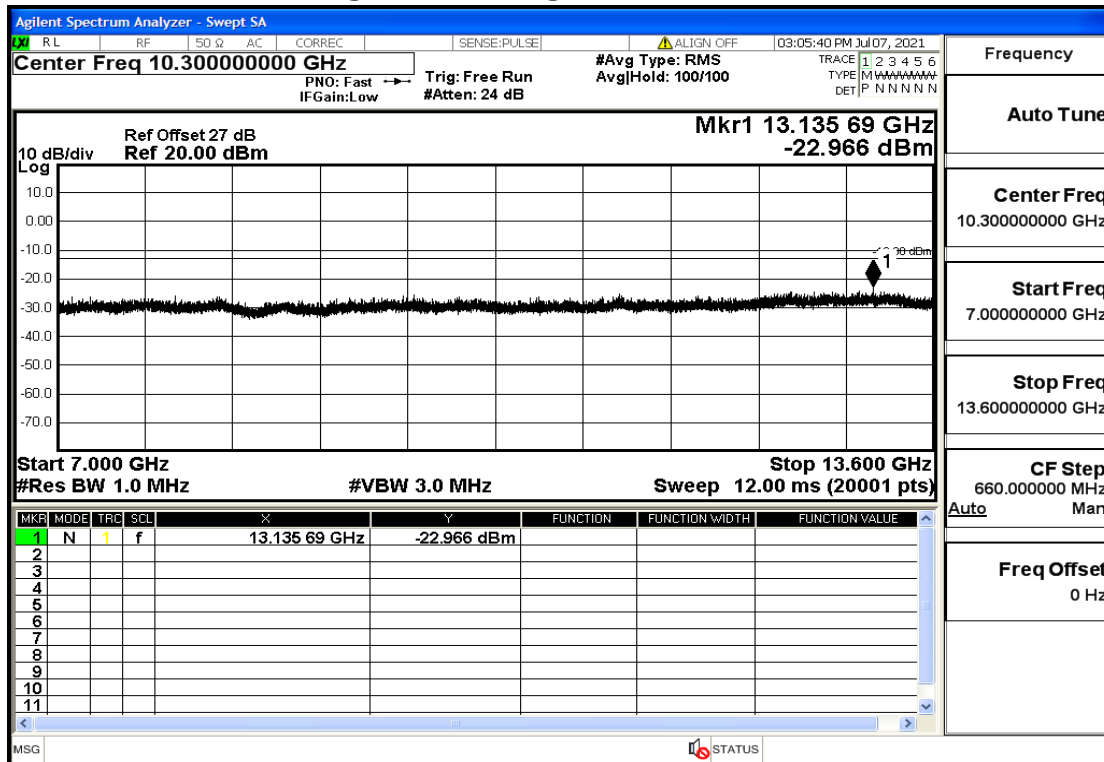


## GSM1900-1850.2MHz-GPRS@13.6GHz-20GHz@Pass

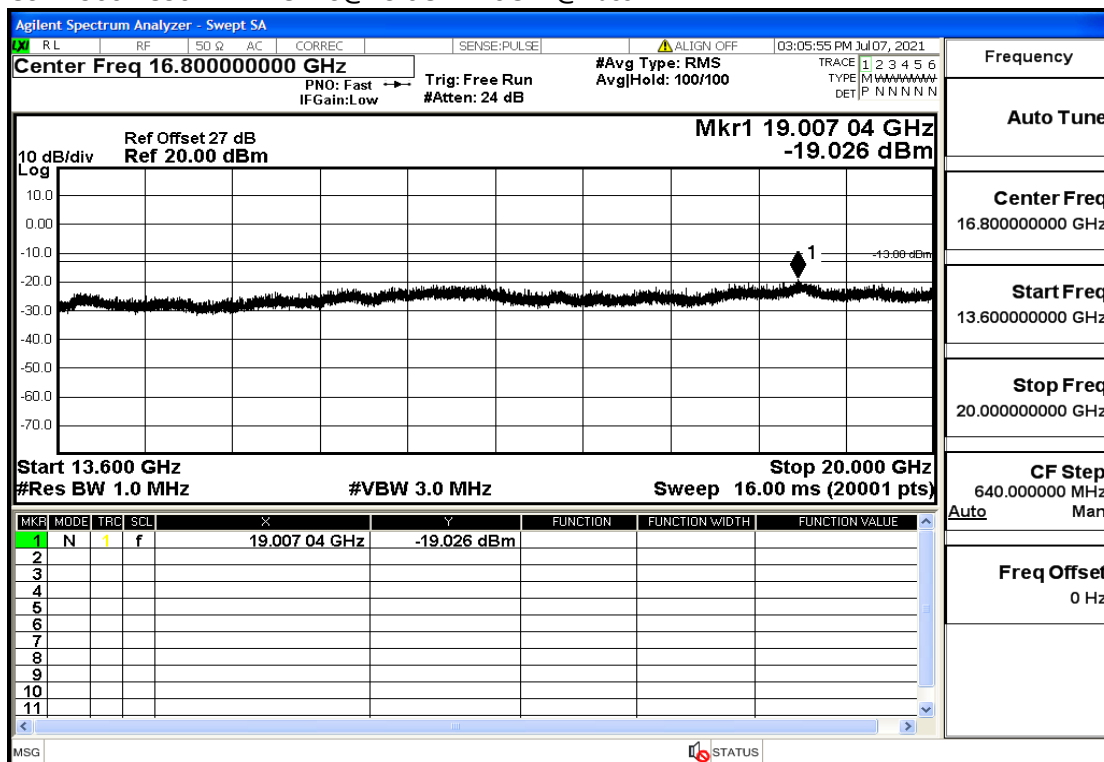




## GSM1900-1880MHz-GPRS@30mHz-1GHz@Pass

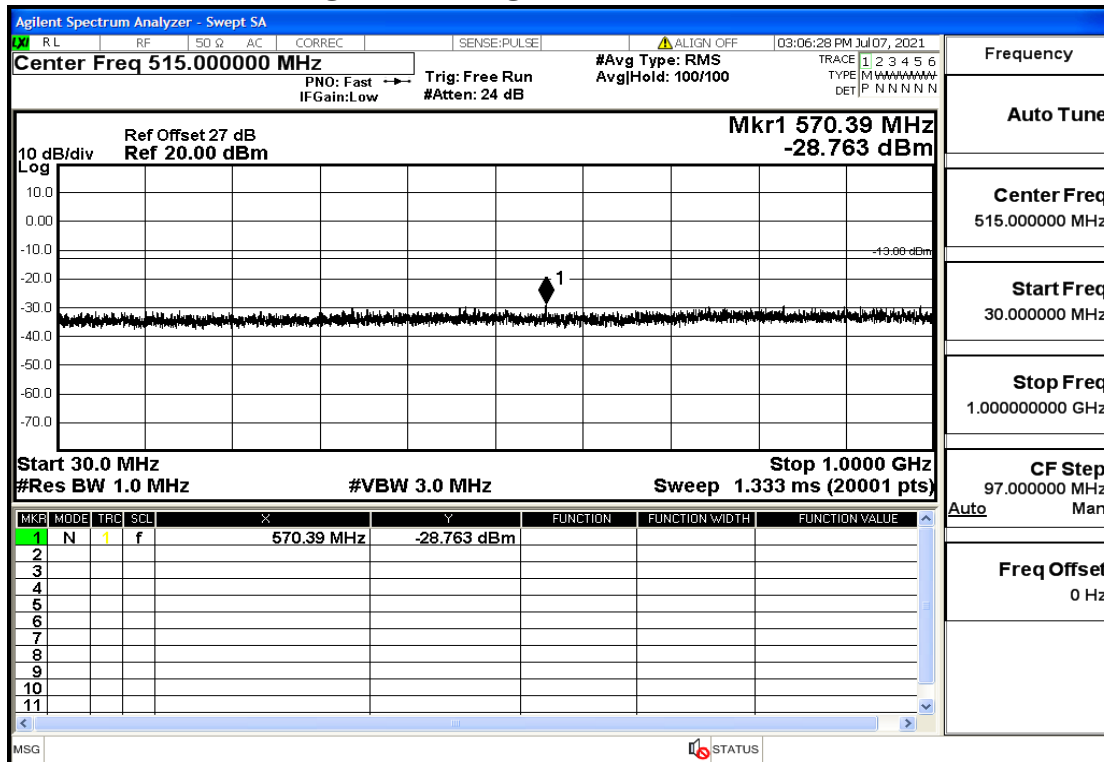


## GSM1900-1880MHz-GPRS@1GHz-7GHz@Pass

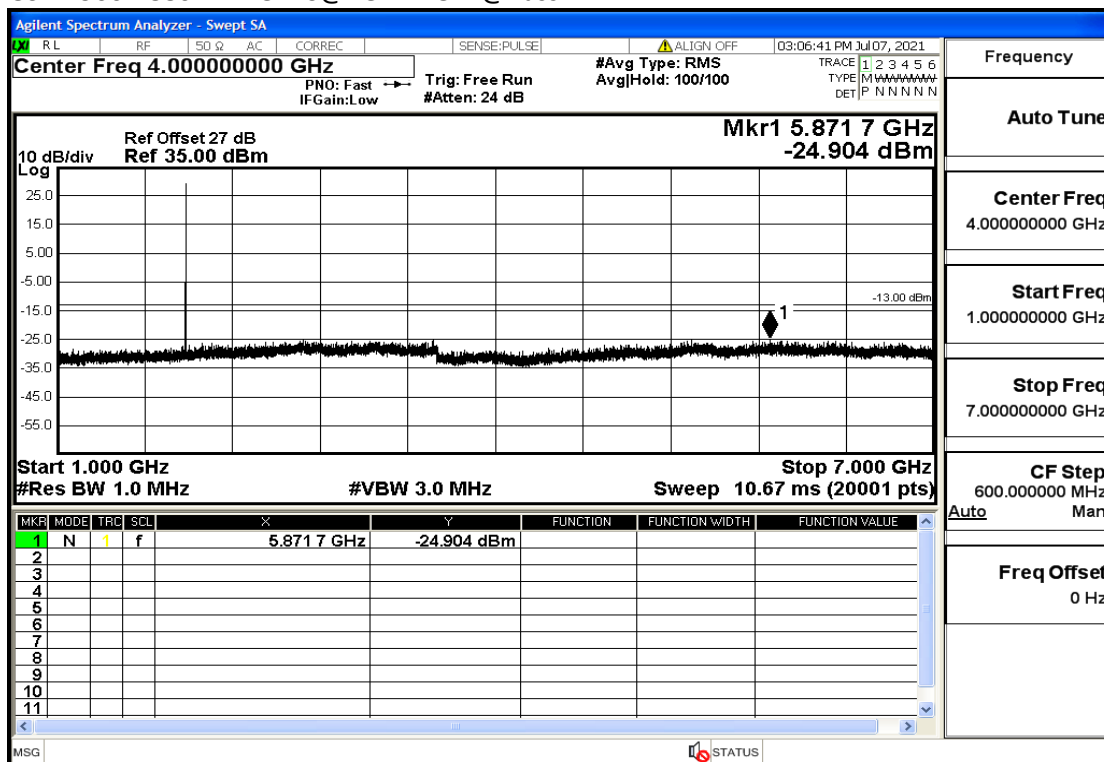




## GSM1900-1880MHz-GPRS@7GHz-13.6GHz@Pass

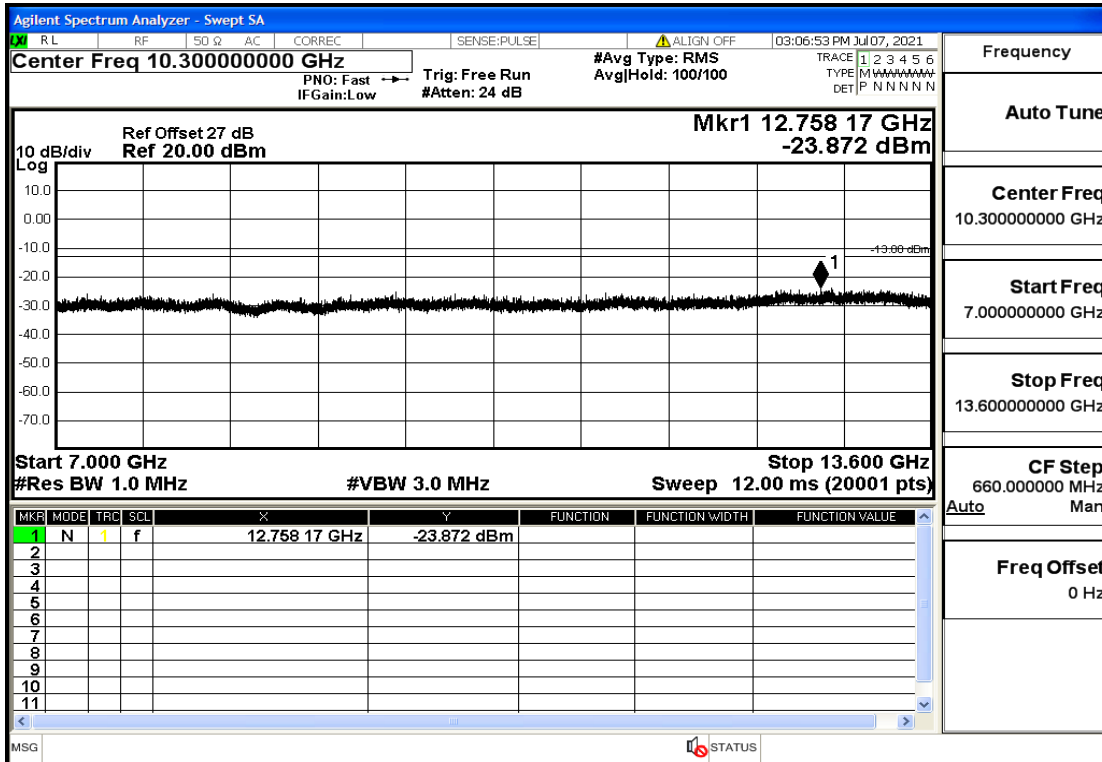


## GSM1900-1880MHz-GPRS@13.6GHz-20GHz@Pass

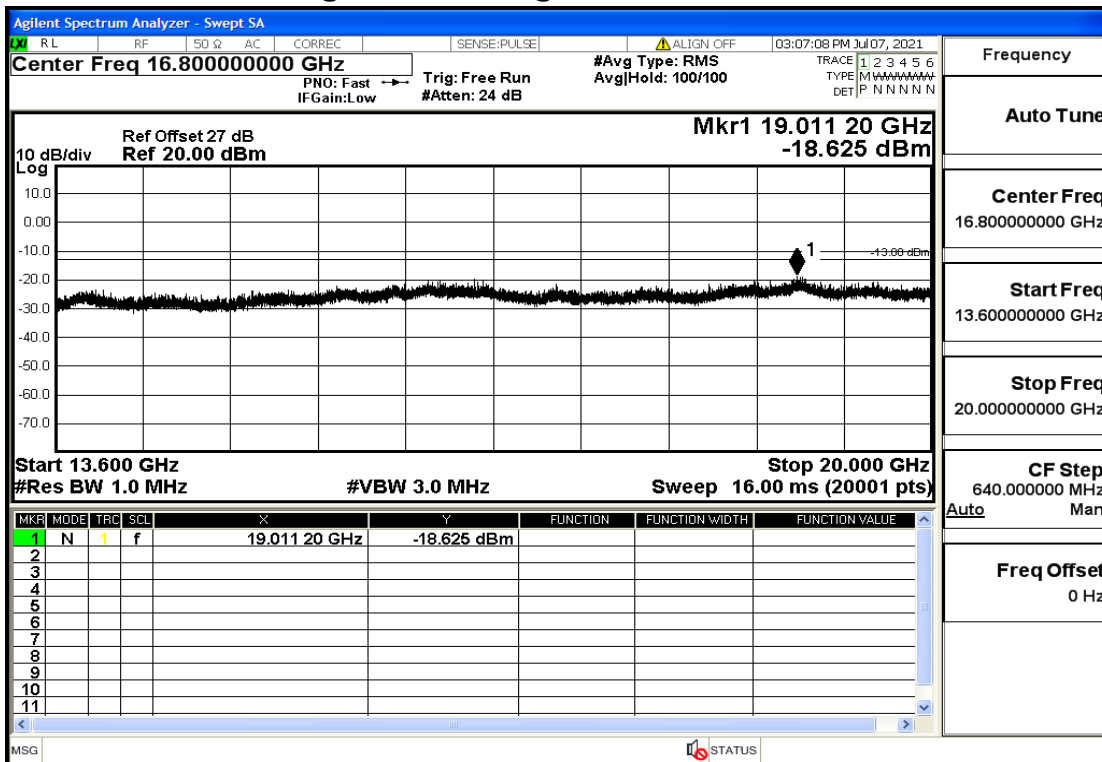




## GSM1900-1909.8MHz-GPRS@30mHz-1GHz@Pass

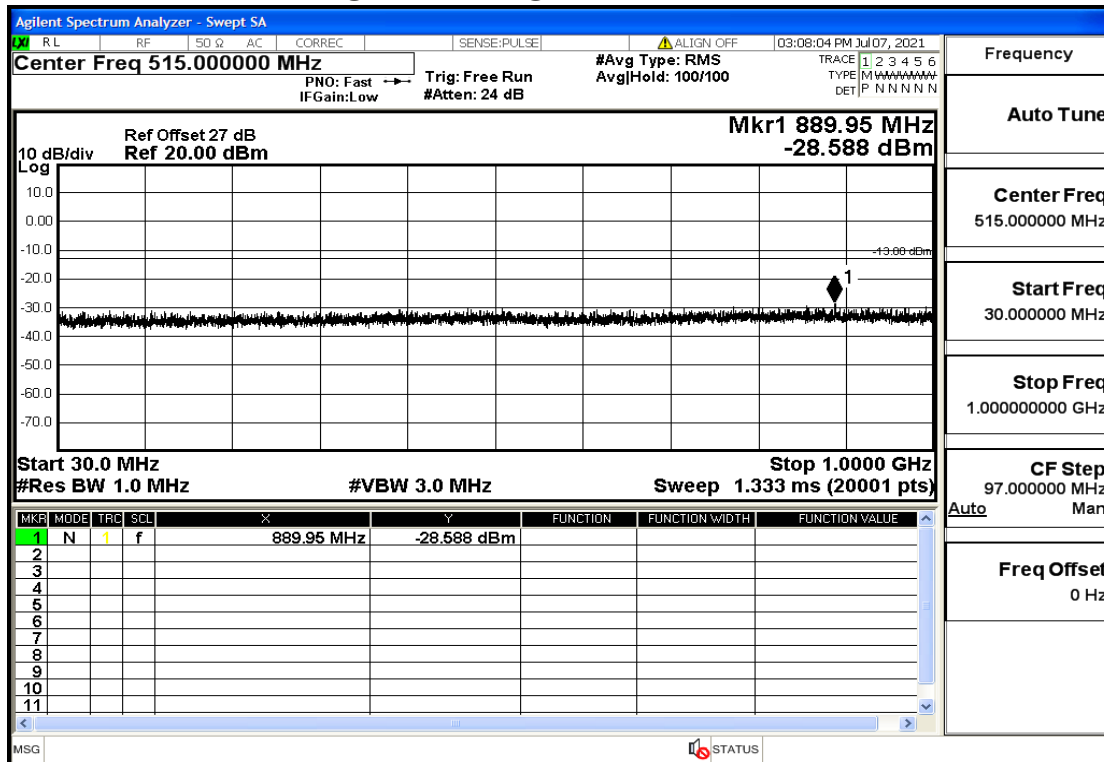


## GSM1900-1909.8MHz-GPRS@1GHz-7GHz@Pass

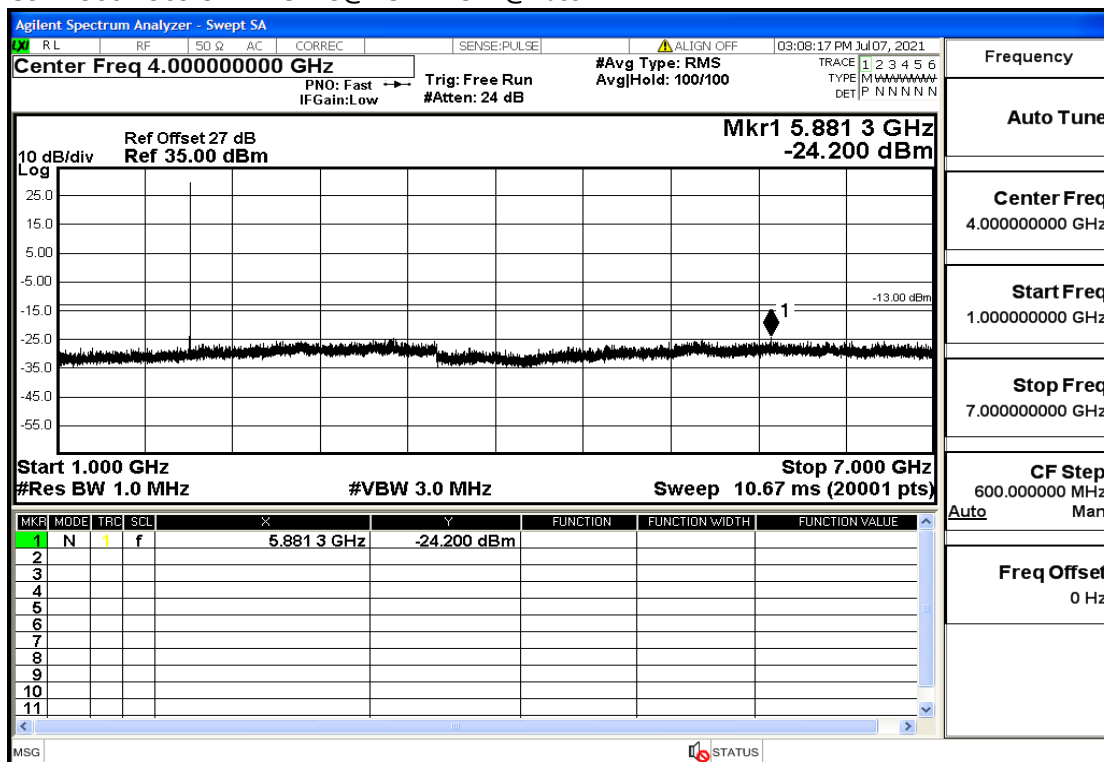





## GSM1900-1909.8MHz-GPRS@7GHz-13.6GHz@Pass

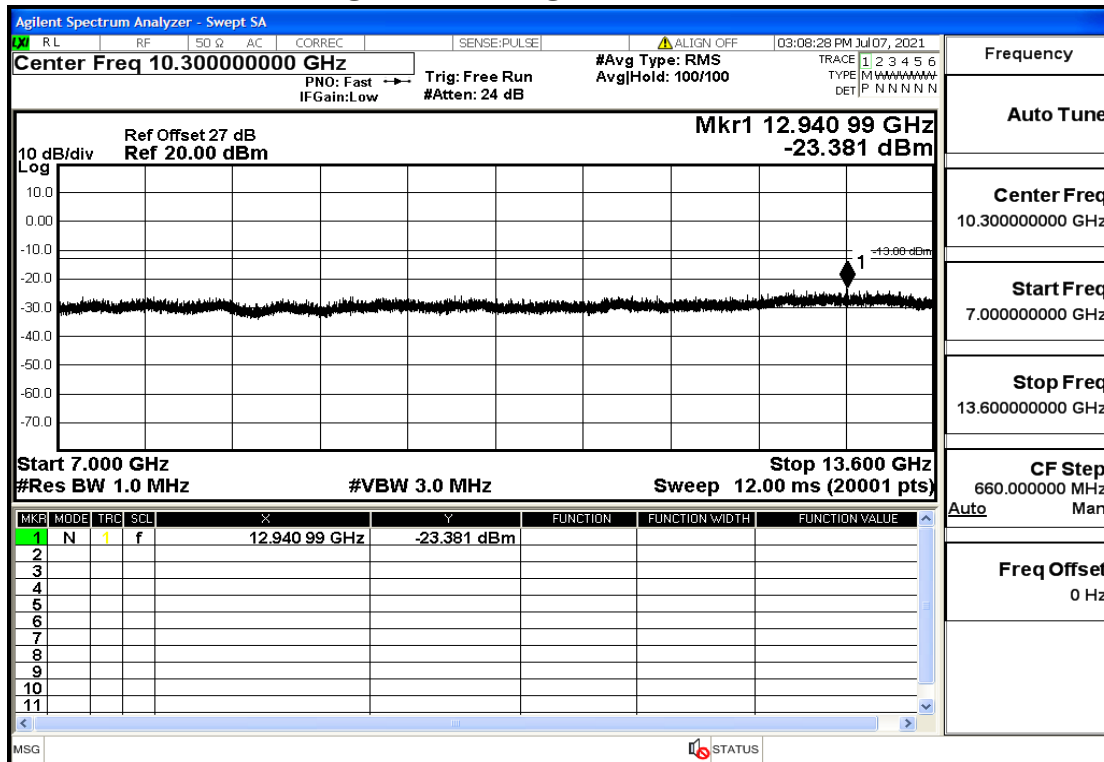


## GSM1900-1909.8MHz-GPRS@13.6GHz-20GHz@Pass

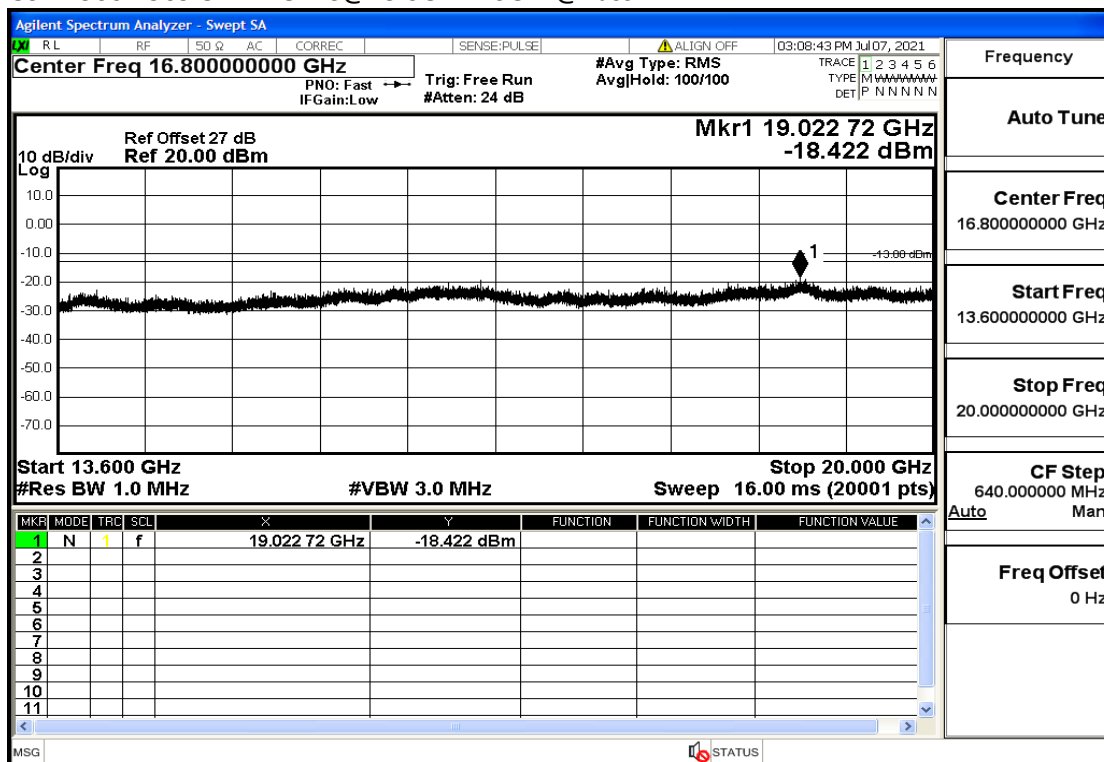

UMTS BAND II-1852.4MHz-RMC@30mHz-1GHz@Pass

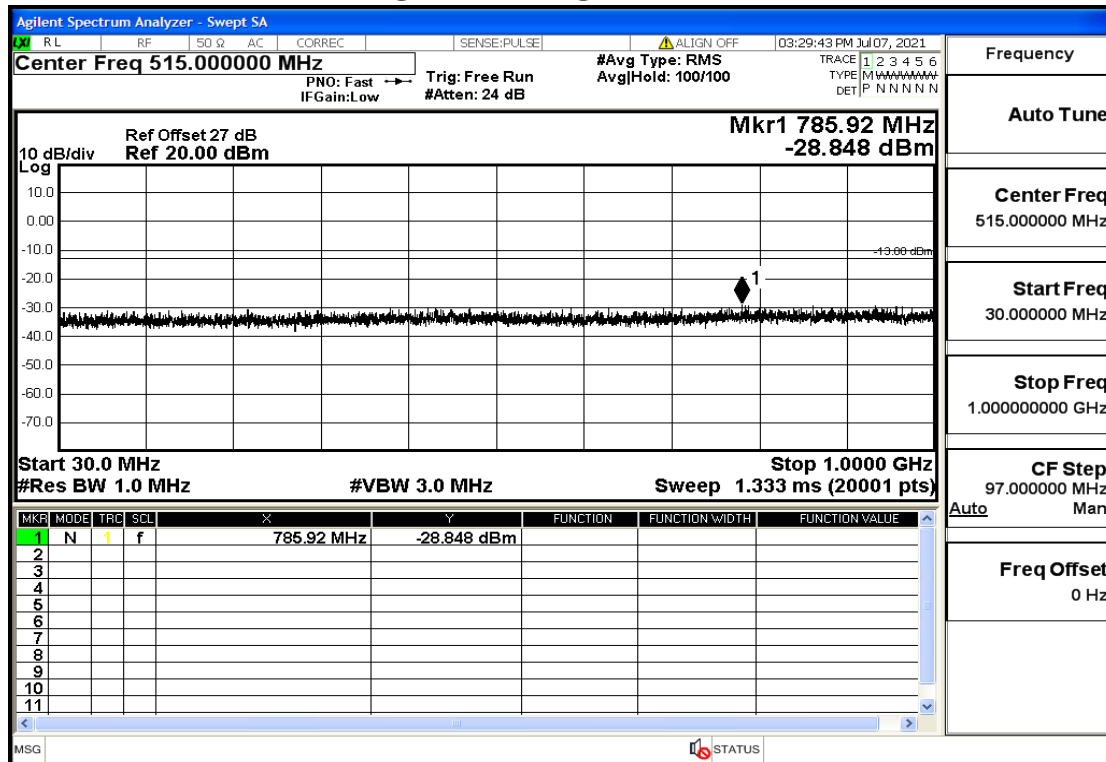


UMTS BAND II-1852.4MHz-RMC@1GHz-7GHz@Pass

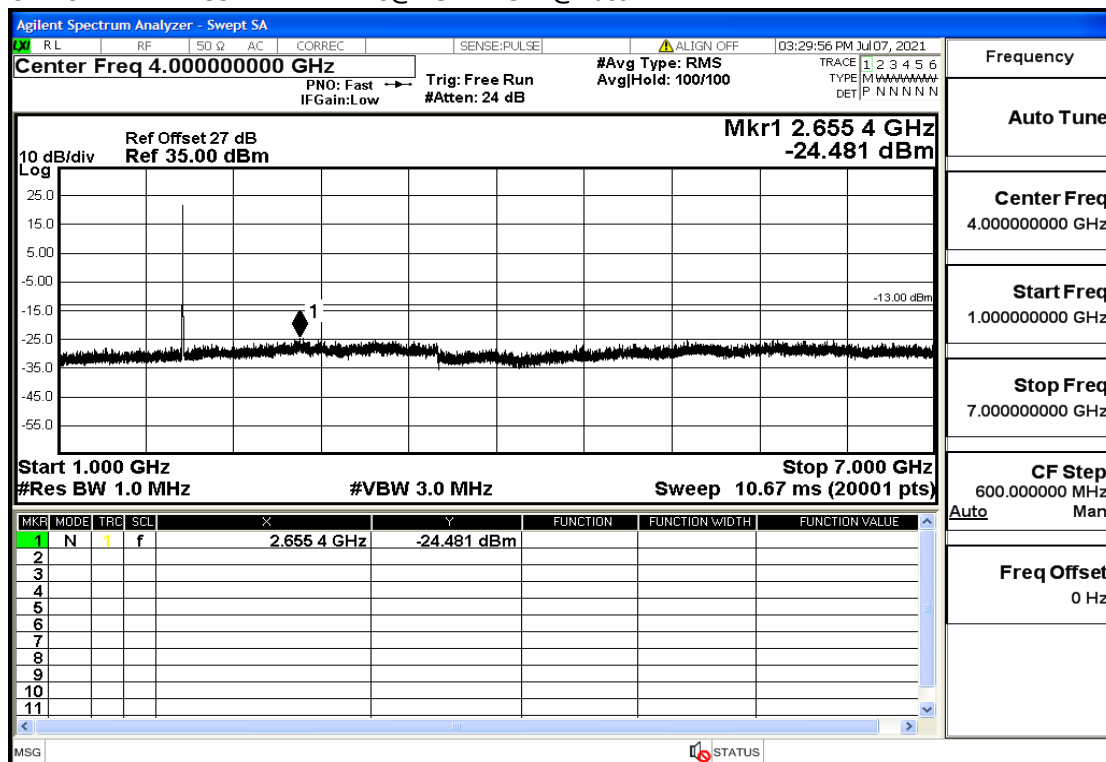






## UMTS BAND II-1852.4MHz-RMC@7GHz-13.6GHz@Pass

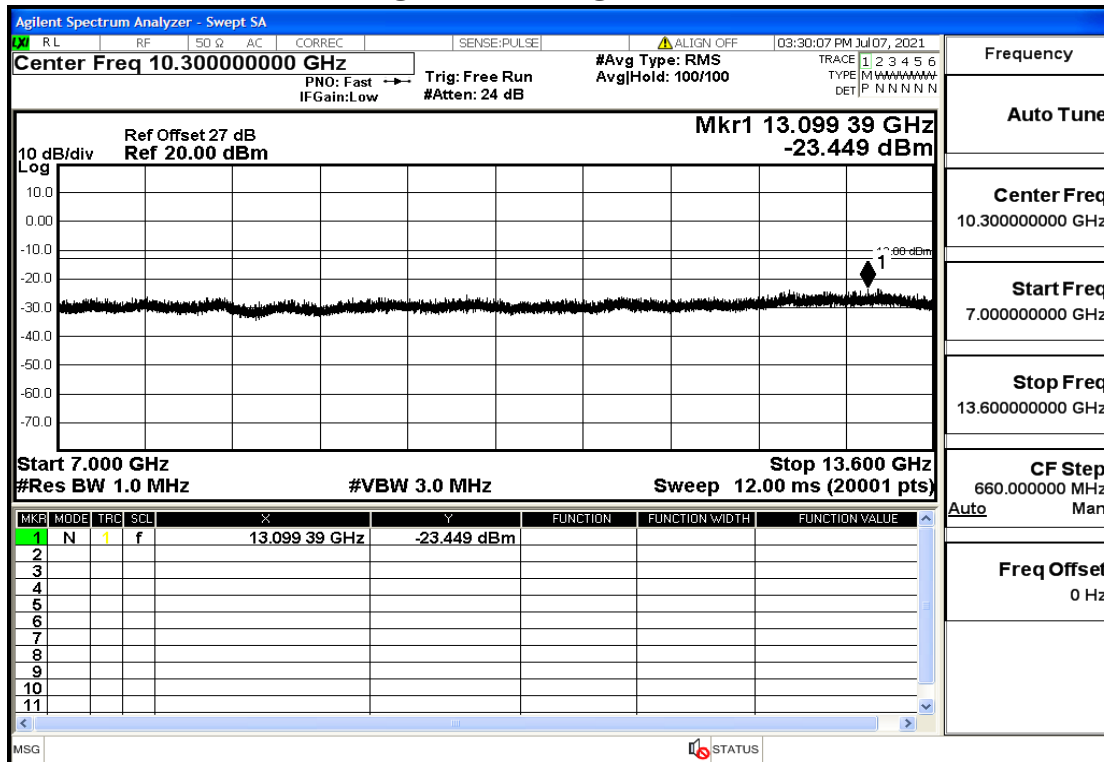


## UMTS BAND II-1852.4MHz-RMC@13.6GHz-20GHz@Pass

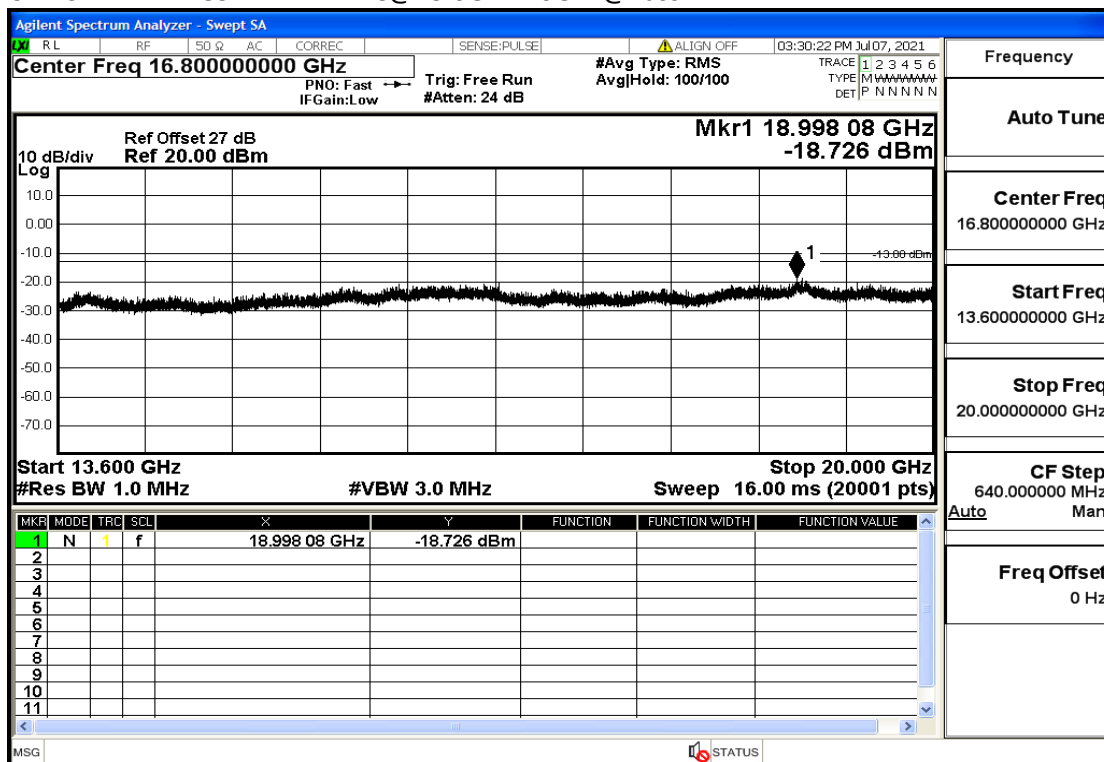




## UMTS BAND II-1880MHz-RMC@30mHz-1GHz@Pass

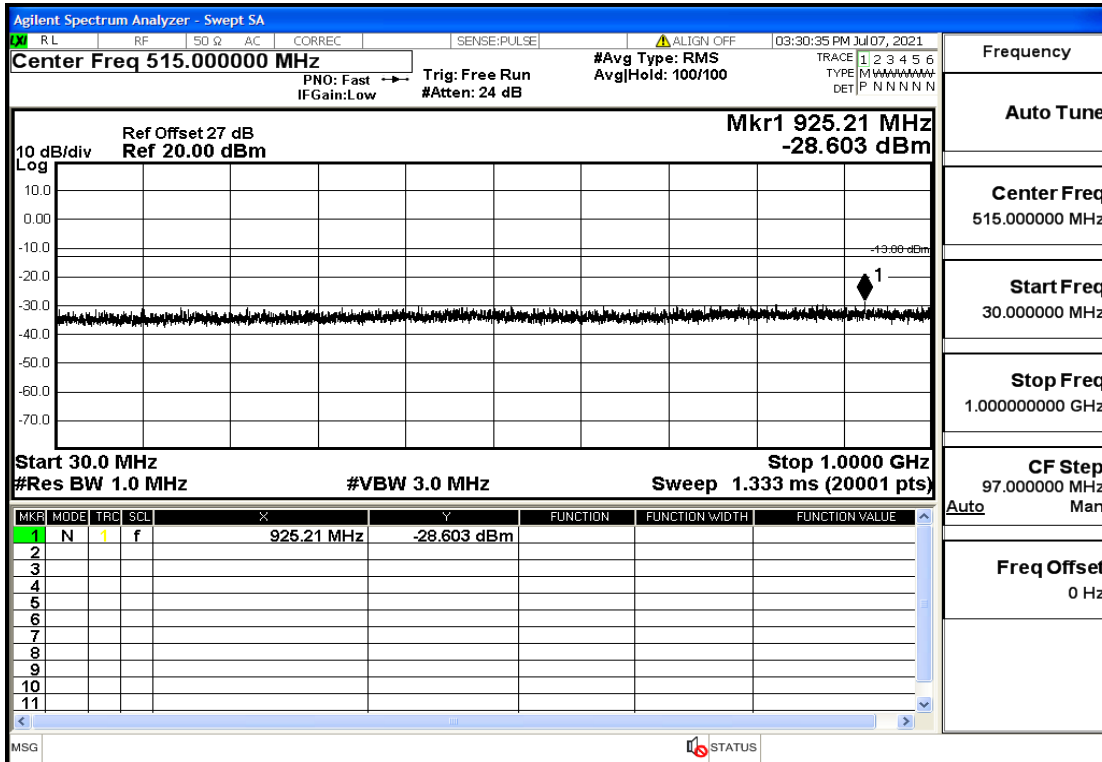


## UMTS BAND II-1880MHz-RMC@1GHz-7GHz@Pass

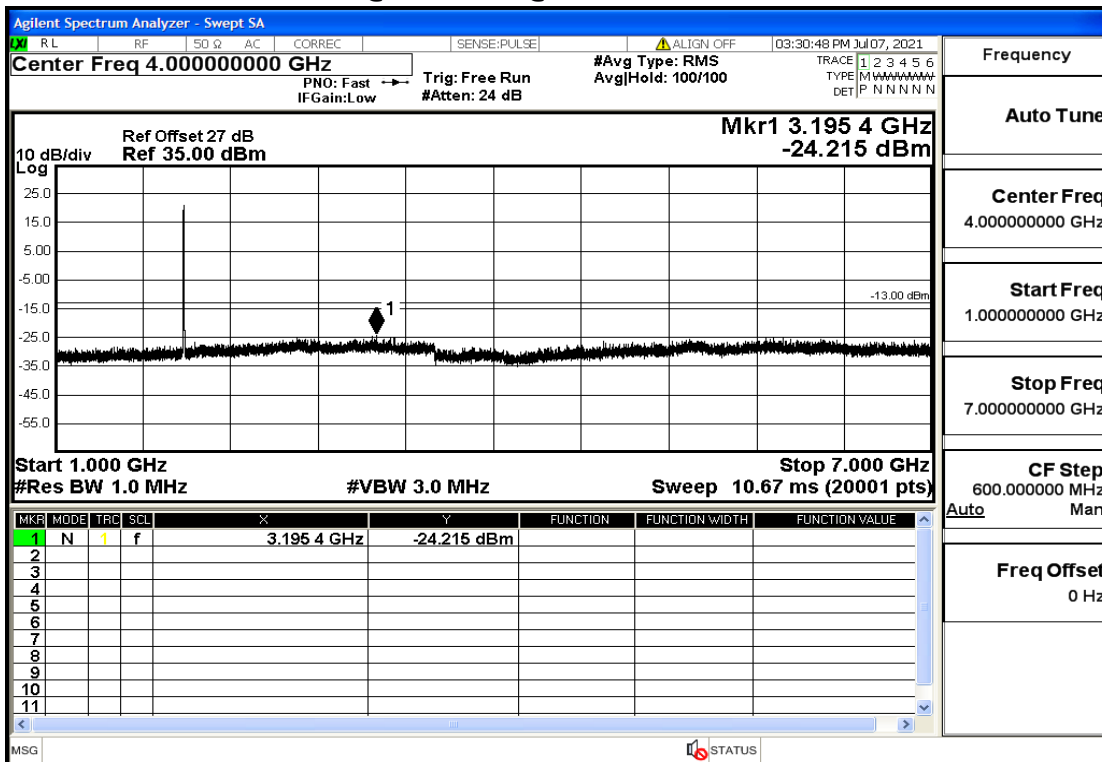





## UMTS BAND II-1880MHz-RMC@7GHz-13.6GHz@Pass

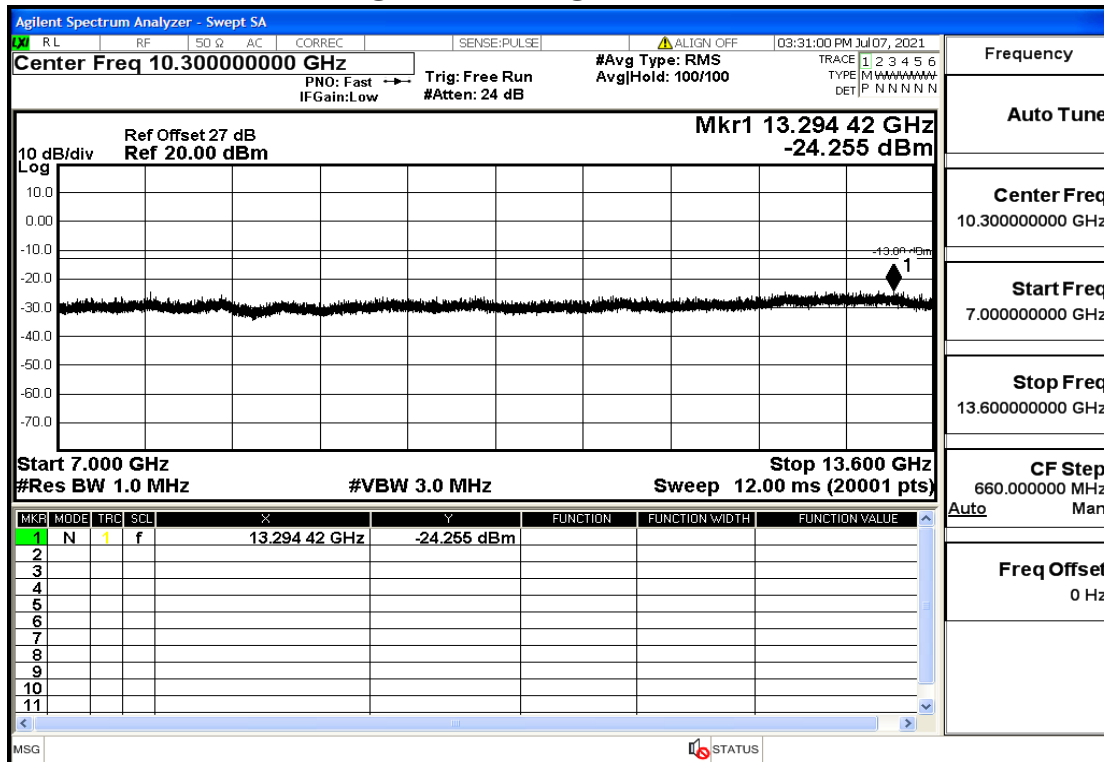


## UMTS BAND II-1880MHz-RMC@13.6GHz-20GHz@Pass

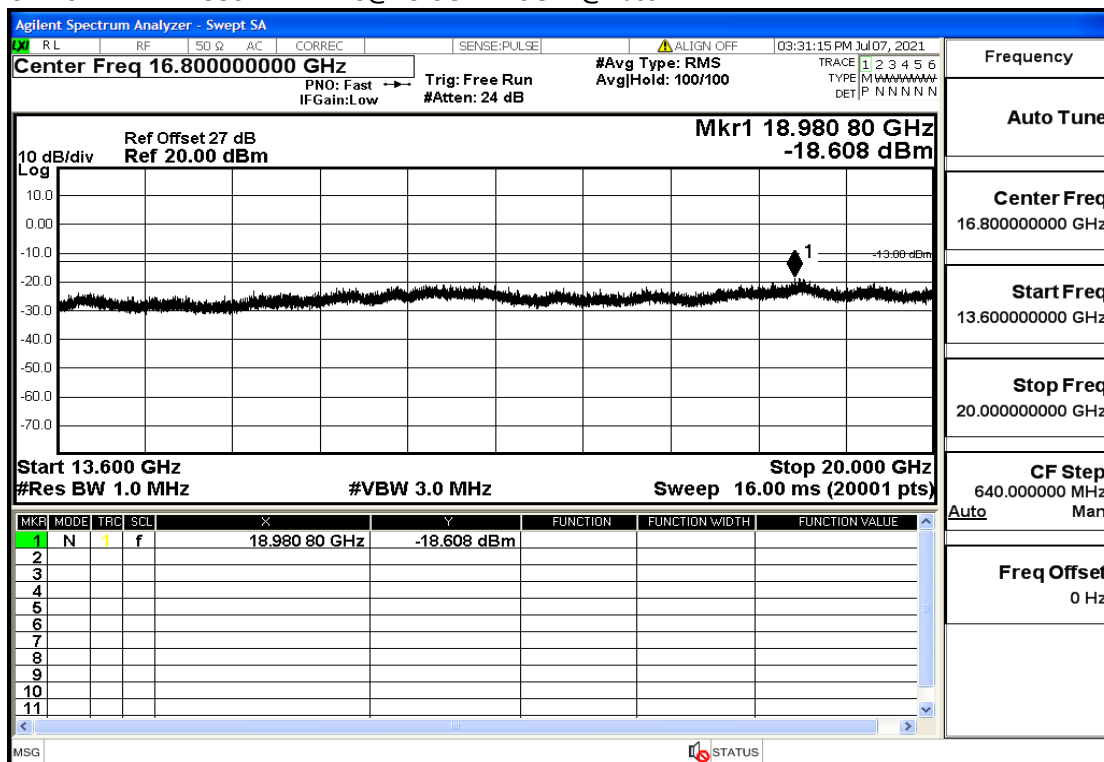

UMTS BAND II-1907.6MHz-RMC@30mHz-1GHz@Pass

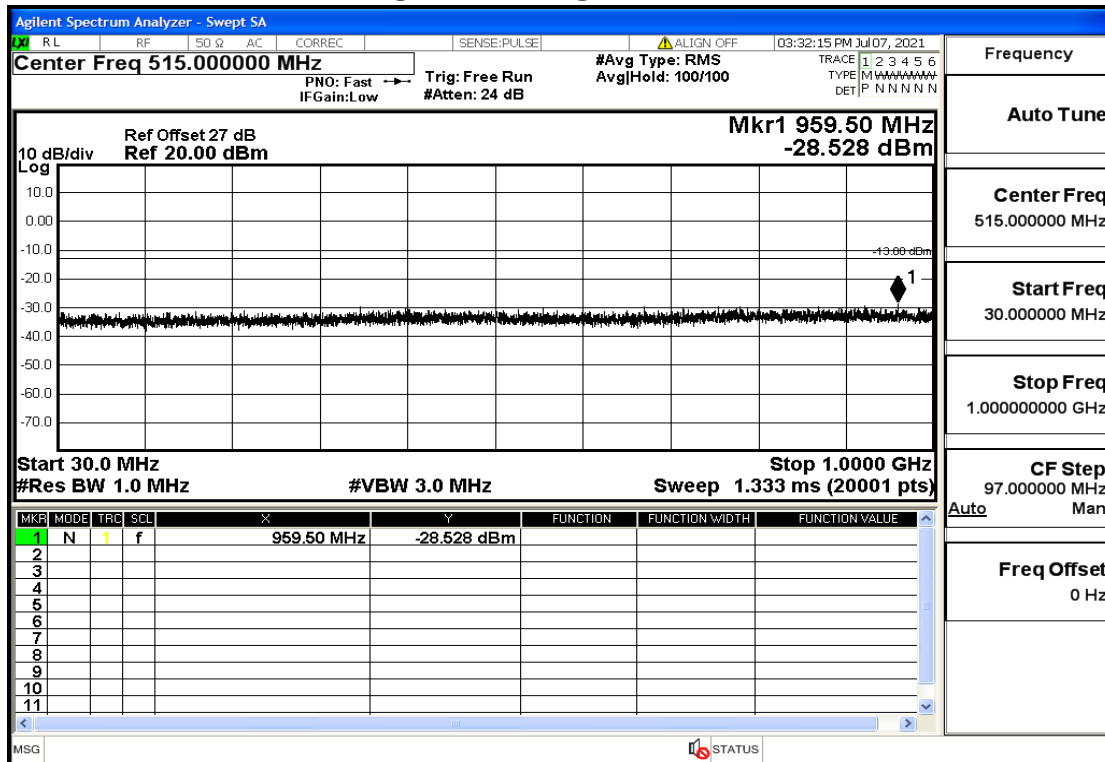


UMTS BAND II-1907.6MHz-RMC@1GHz-7GHz@Pass

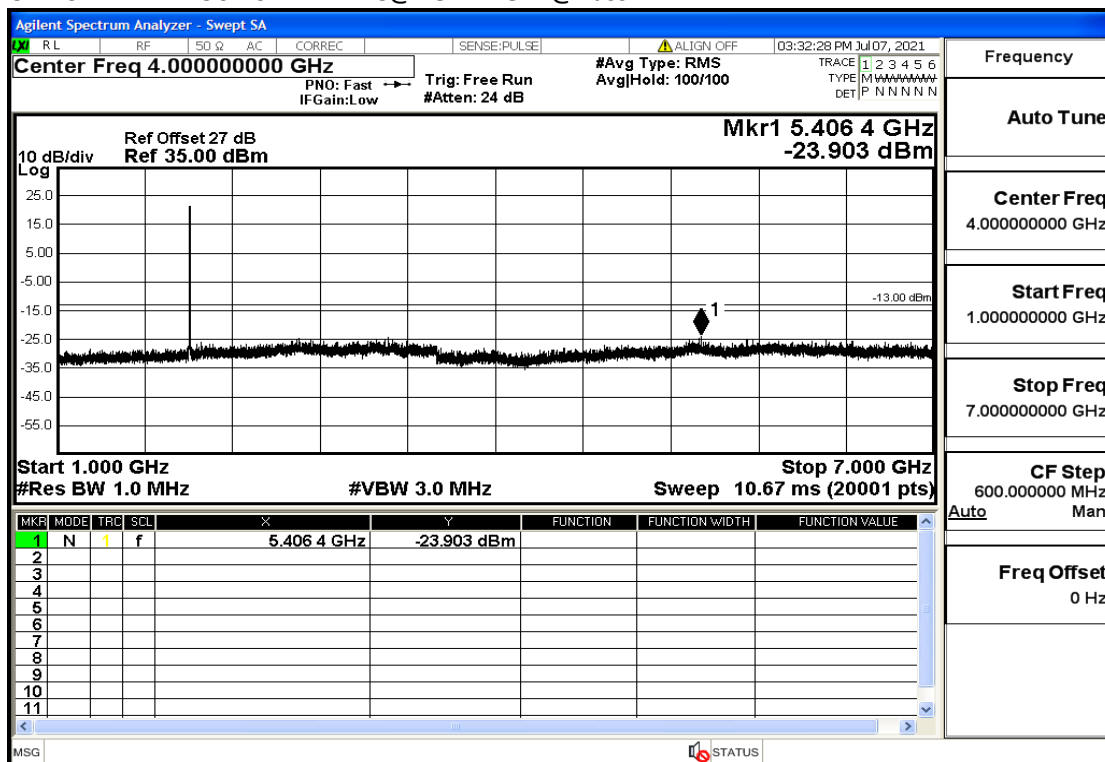




## UMTS BAND II-1907.6MHz-RMC@7GHz-13.6GHz@Pass

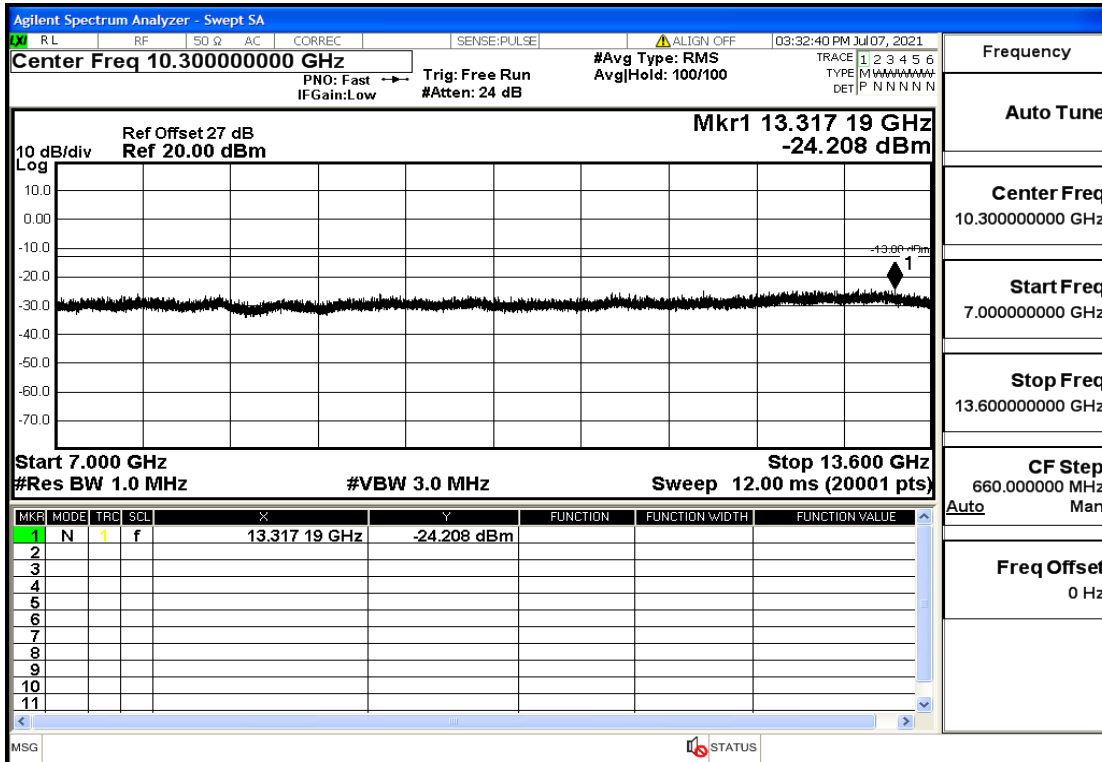


## UMTS BAND II-1907.6MHz-RMC@13.6GHz-20GHz@Pass

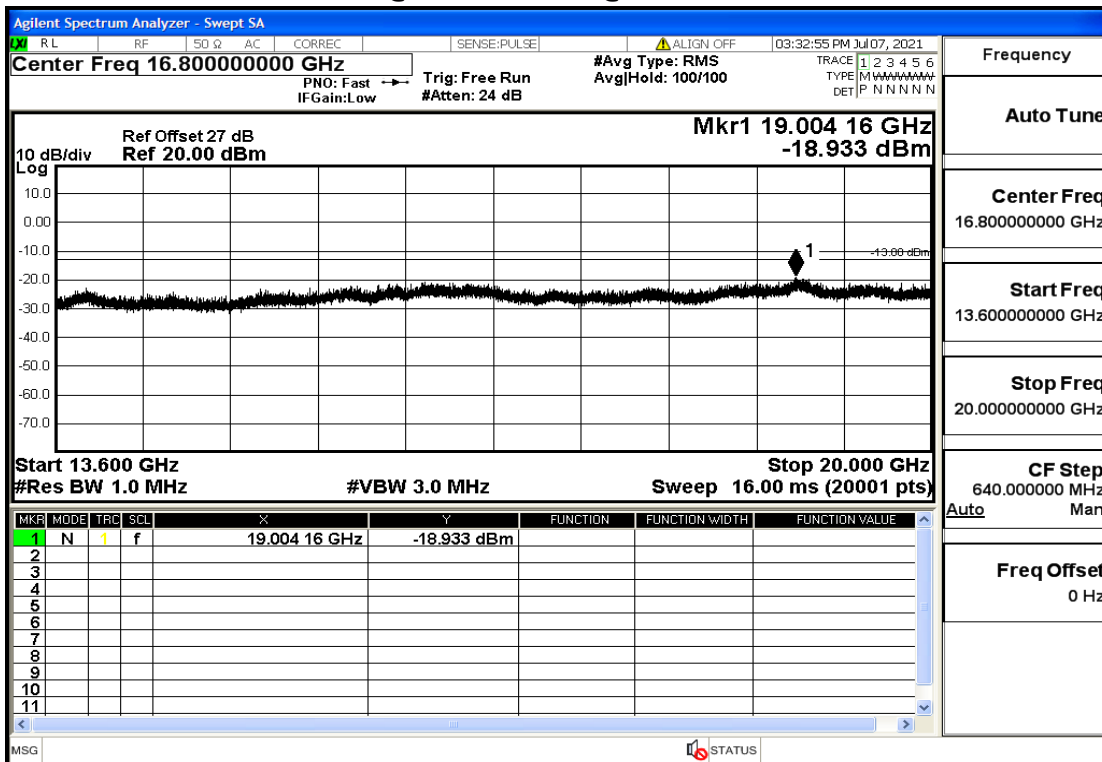




## UMTS BAND V-826.4MHz-RMC@30mHz-1GHz@Pass

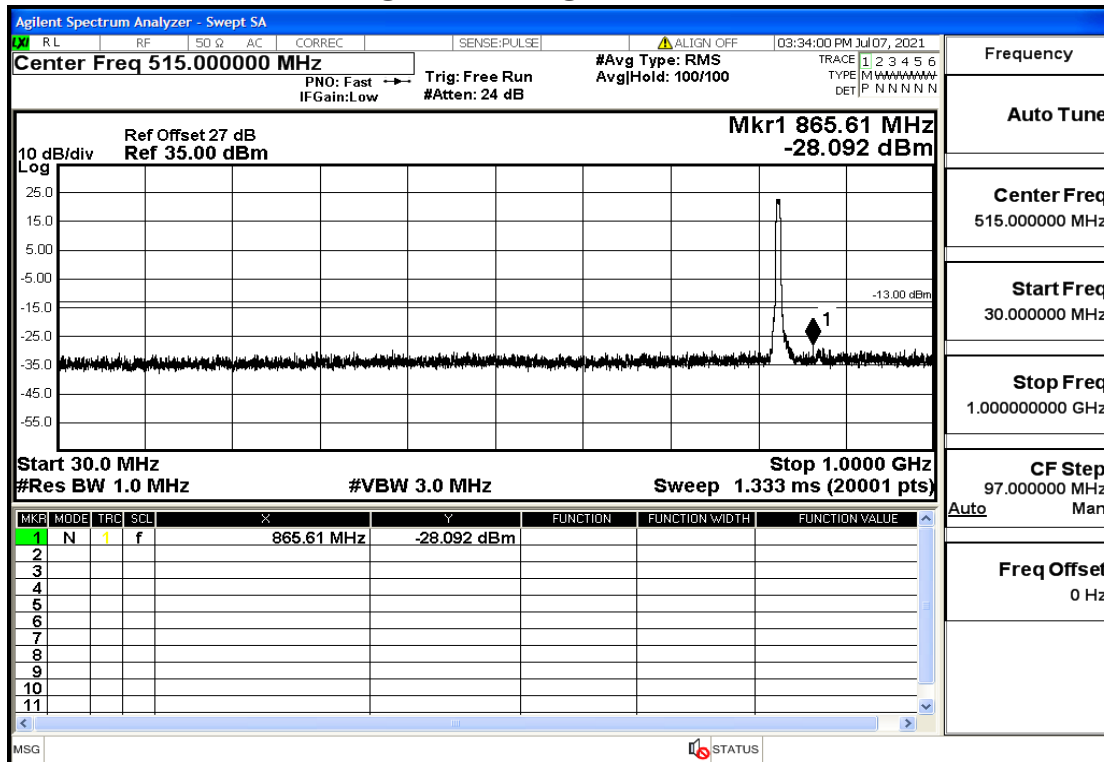


## UMTS BAND V-826.4MHz-RMC@1GHz-9GHz@Pass

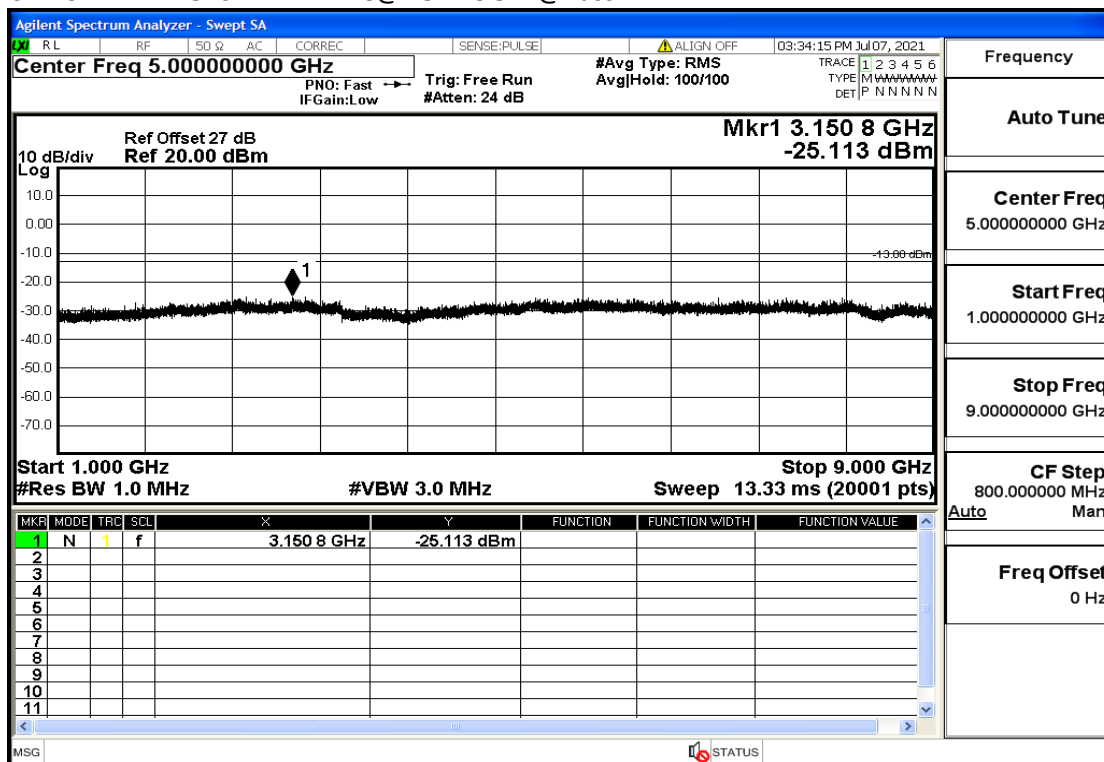




## UMTS BAND V-836.4MHz-RMC@30mHz-1GHz@Pass

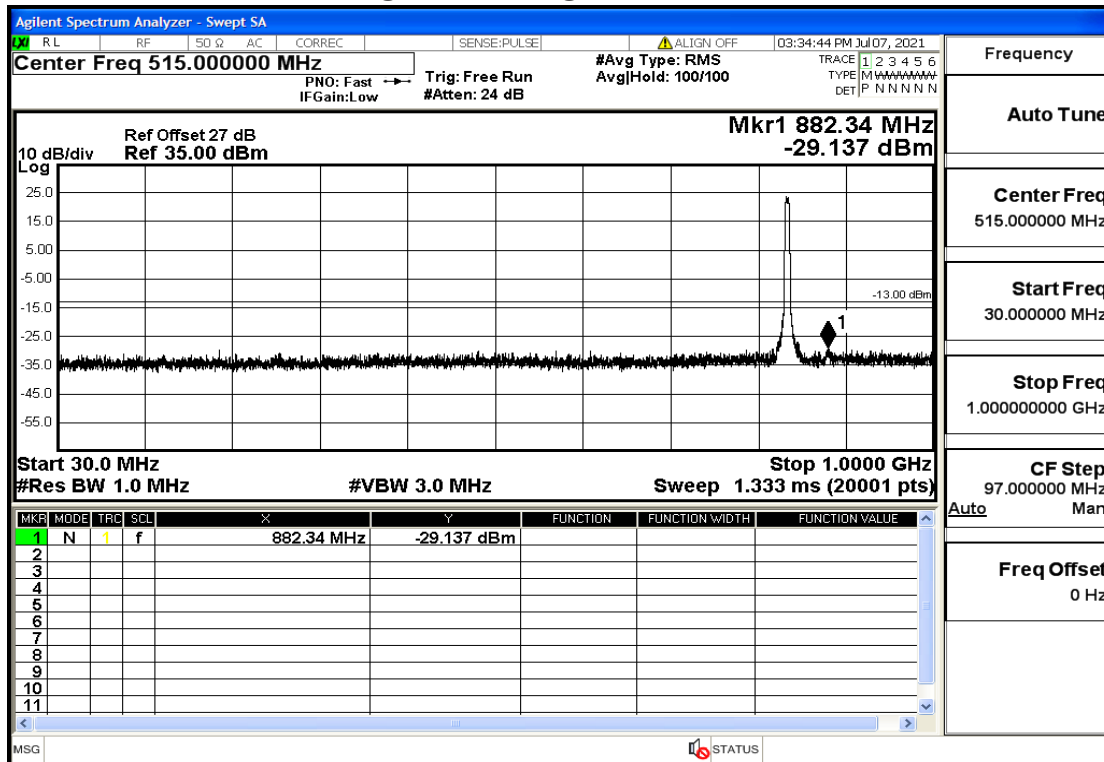


## UMTS BAND V-836.4MHz-RMC@1GHz-9GHz@Pass

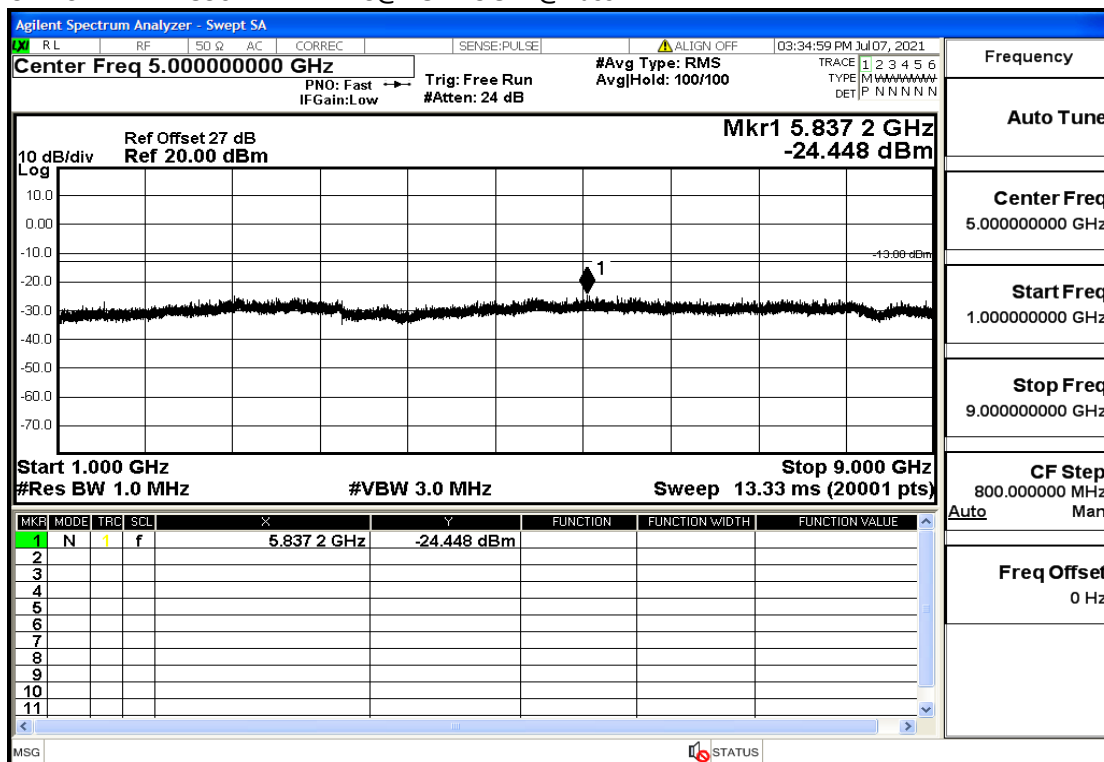




## UMTS BAND V-846.6MHz-RMC@30mHz-1GHz@Pass

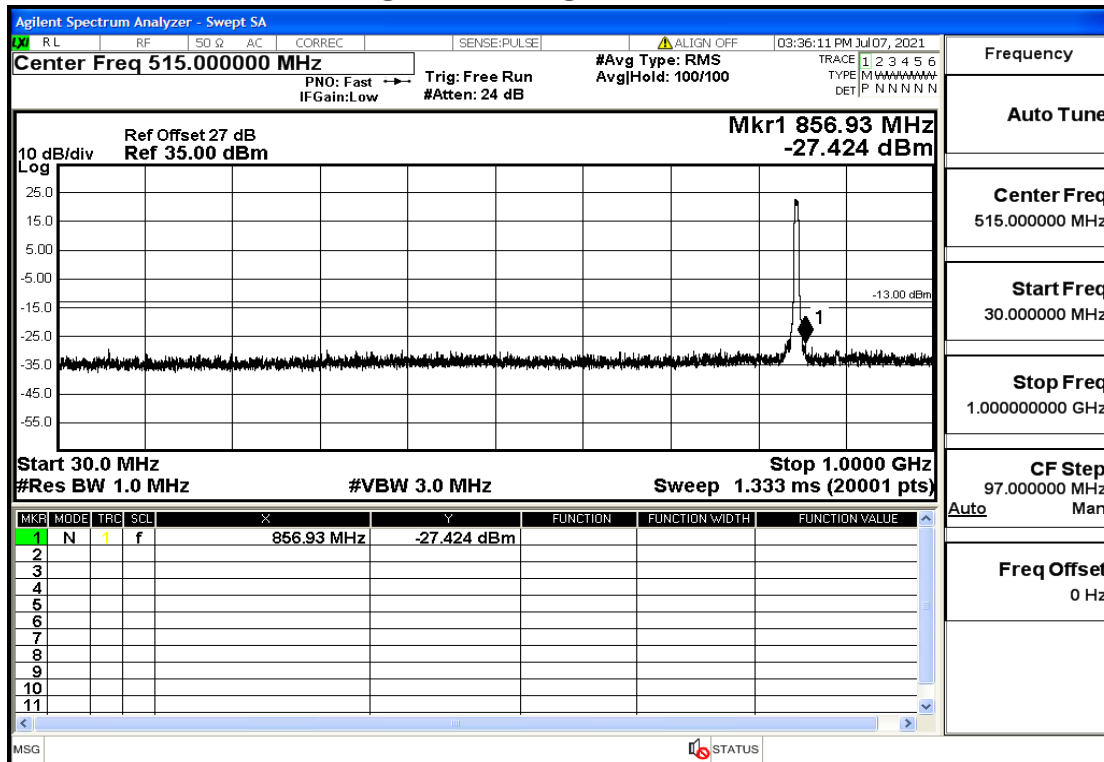


## UMTS BAND V-846.6MHz-RMC@1GHz-9GHz@Pass

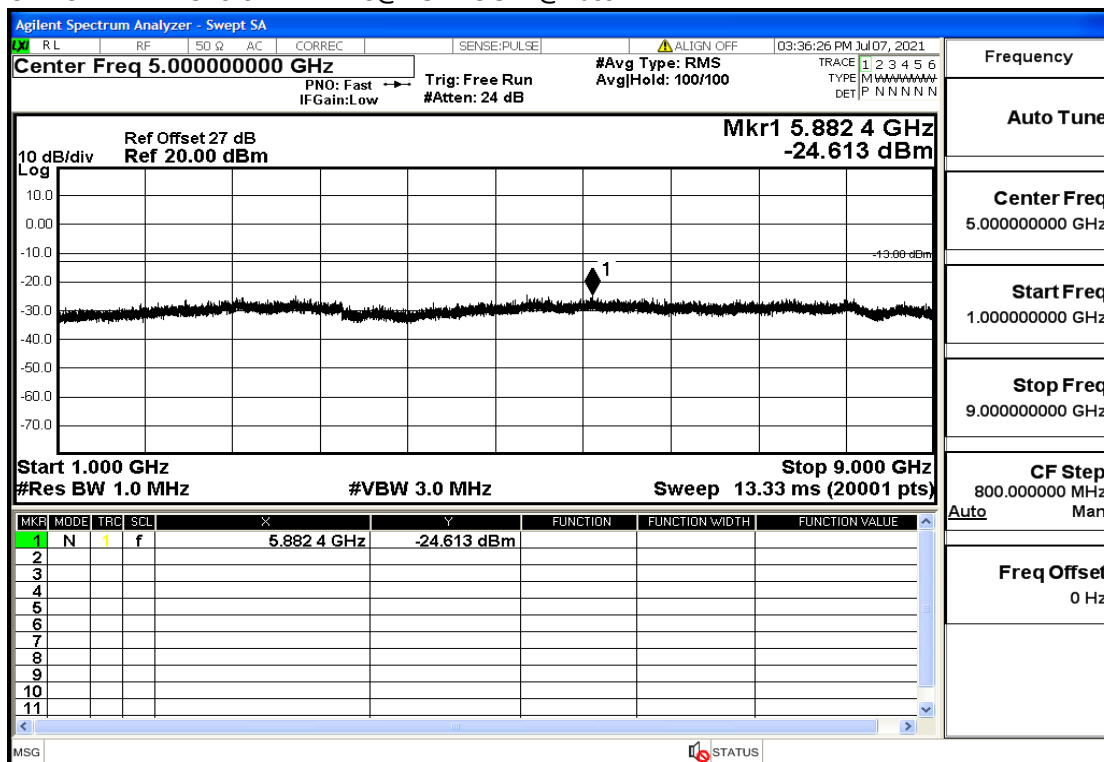






## UMTS BAND IV-1712.4MHz-RMC@30mHz-1GHz@Pass

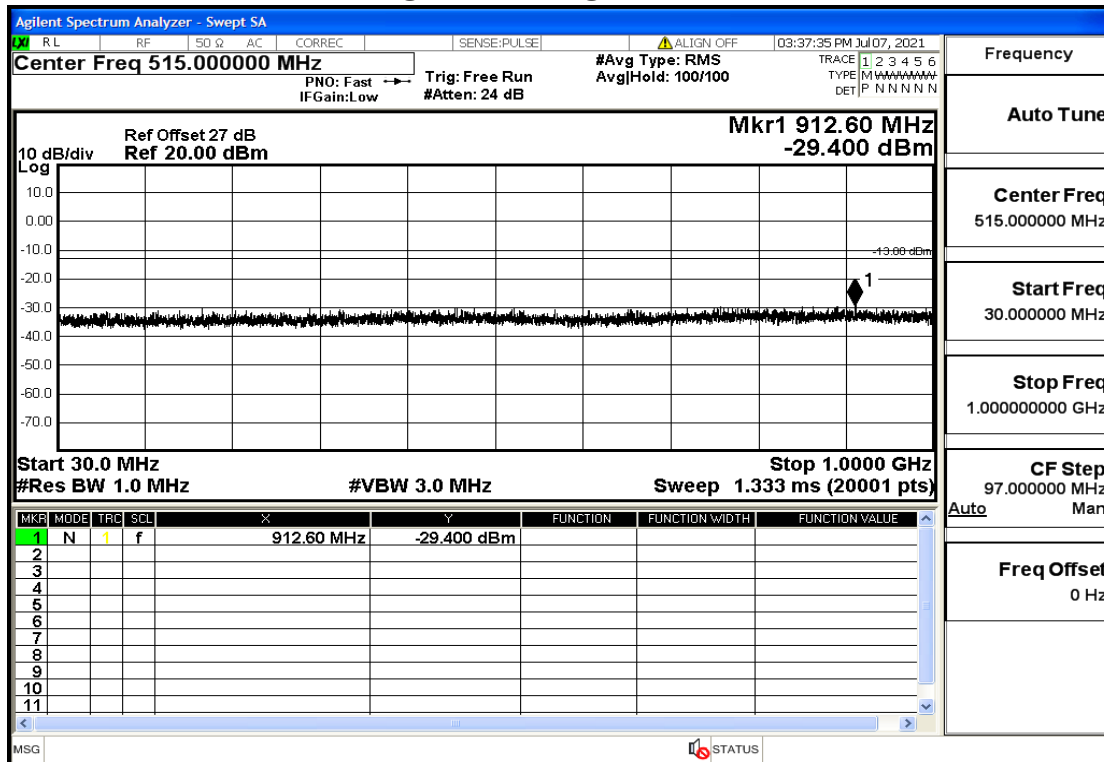


## UMTS BAND IV-1712.4MHz-RMC@1GHz-7GHz@Pass

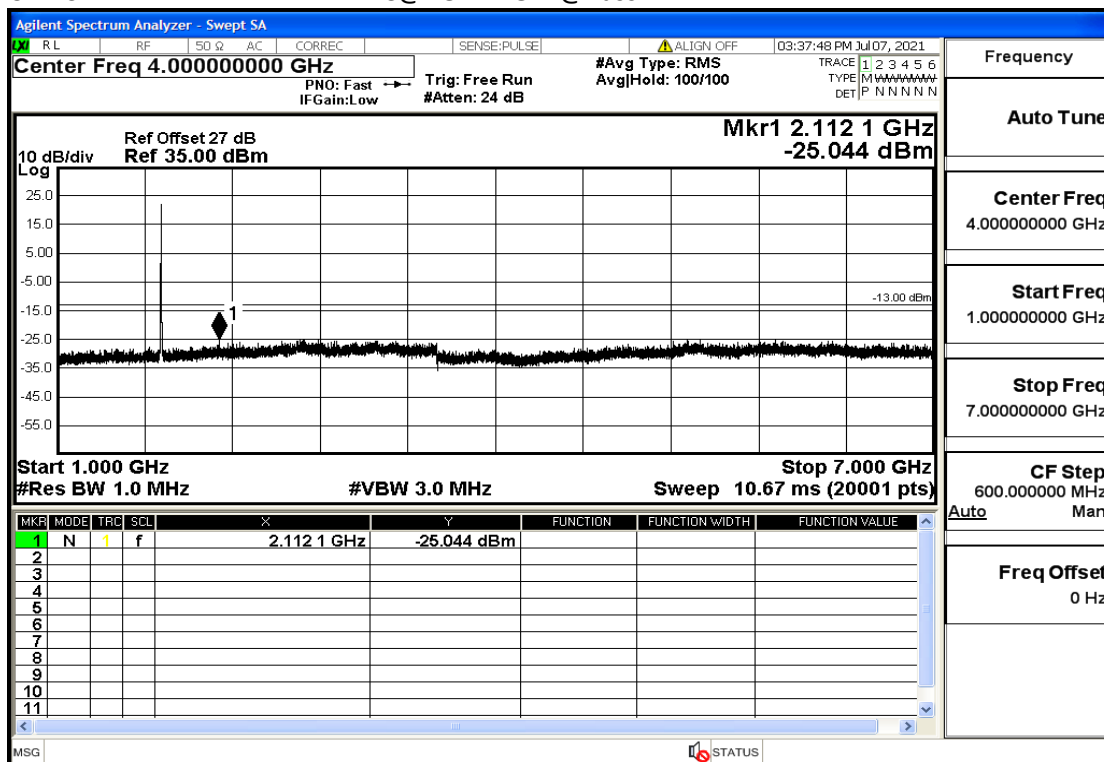




## UMTS BAND IV-1712.4MHz-RMC@7GHz-13.6GHz@Pass

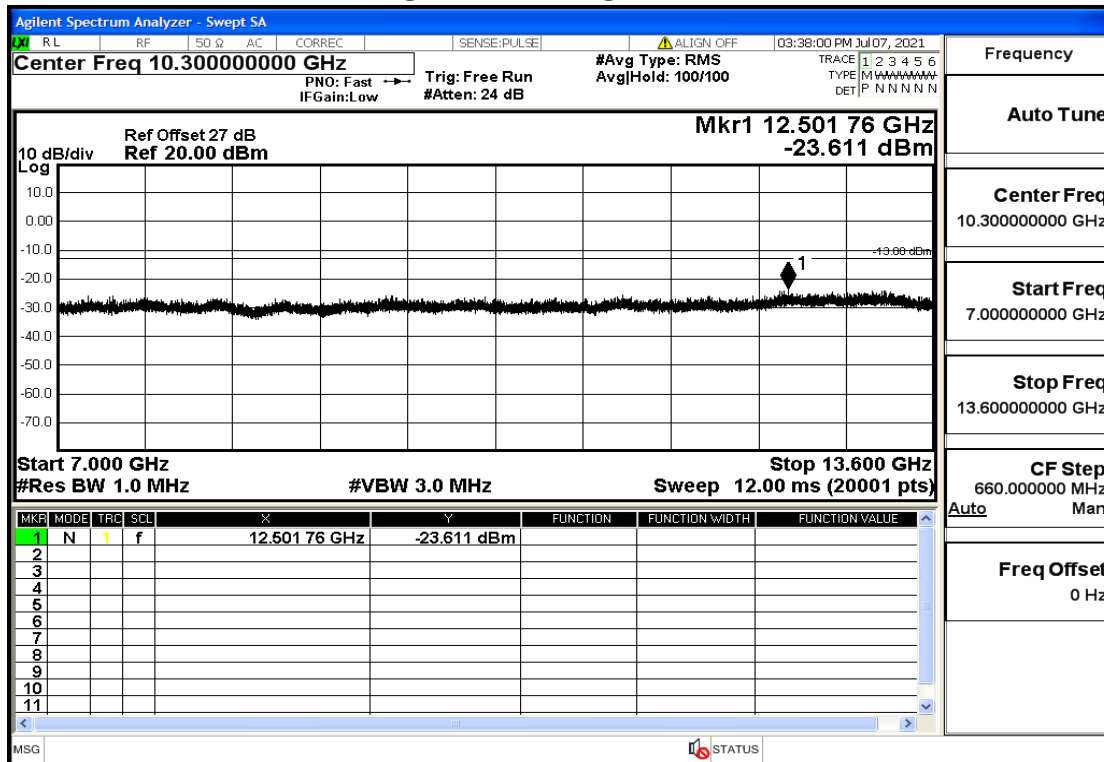


## UMTS BAND IV-1712.4MHz-RMC@13.6GHz-20GHz@Pass

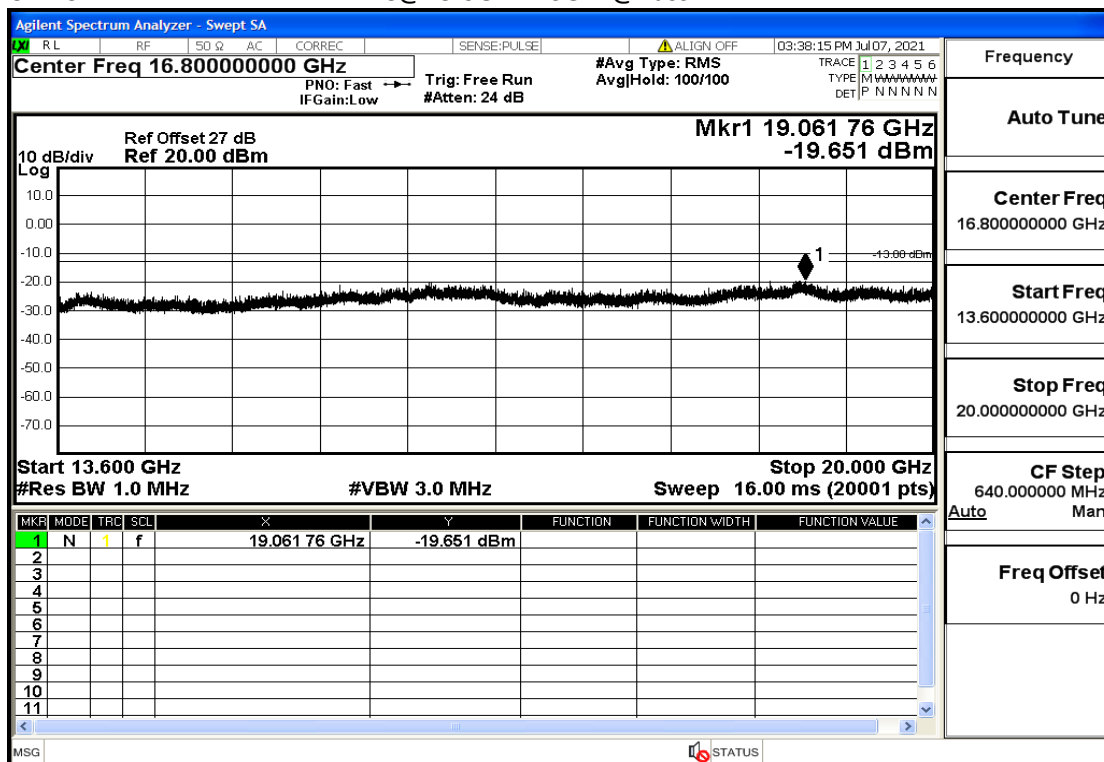




## UMTS BAND IV-1732.4MHz-RMC@30mHz-1GHz@Pass

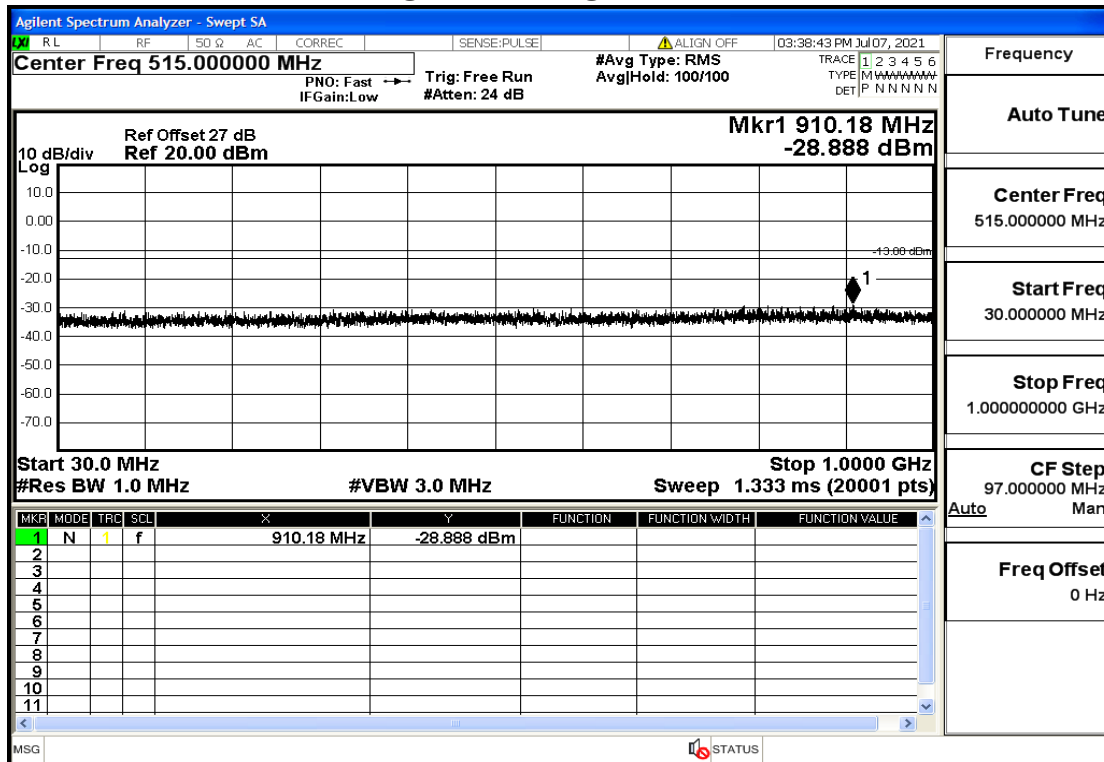


## UMTS BAND IV-1732.4MHz-RMC@1GHz-7GHz@Pass

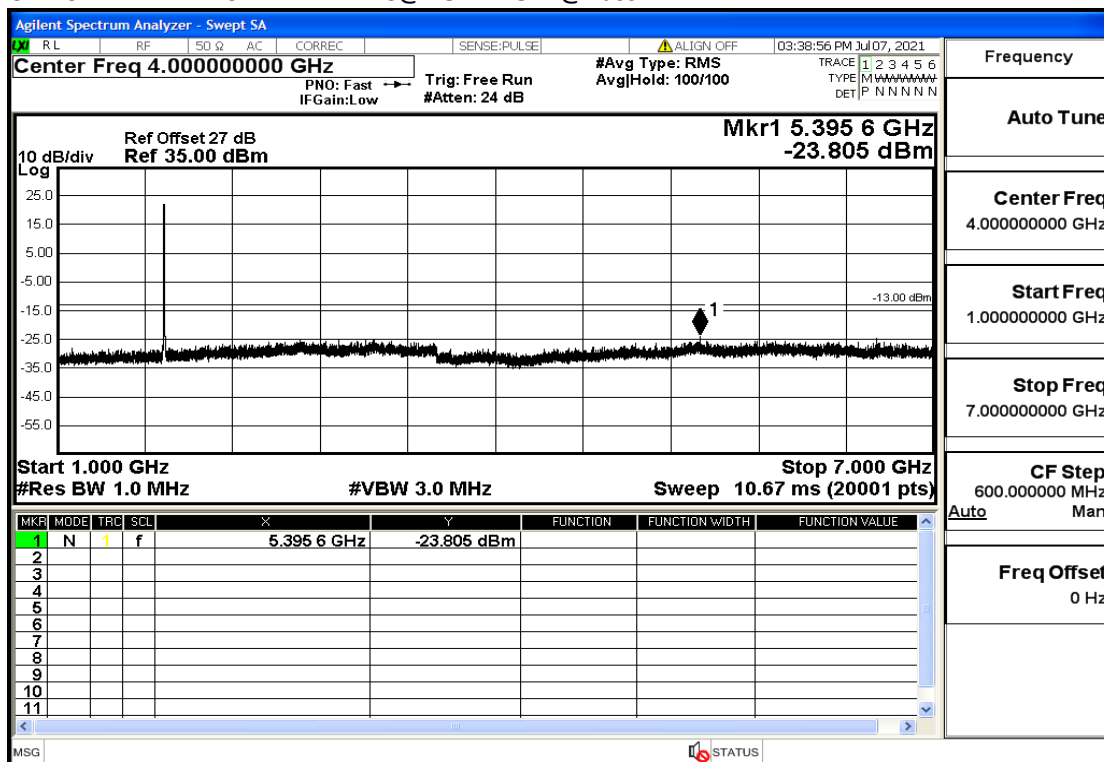




## UMTS BAND IV-1732.4MHz-RMC@7GHz-13.6GHz@Pass

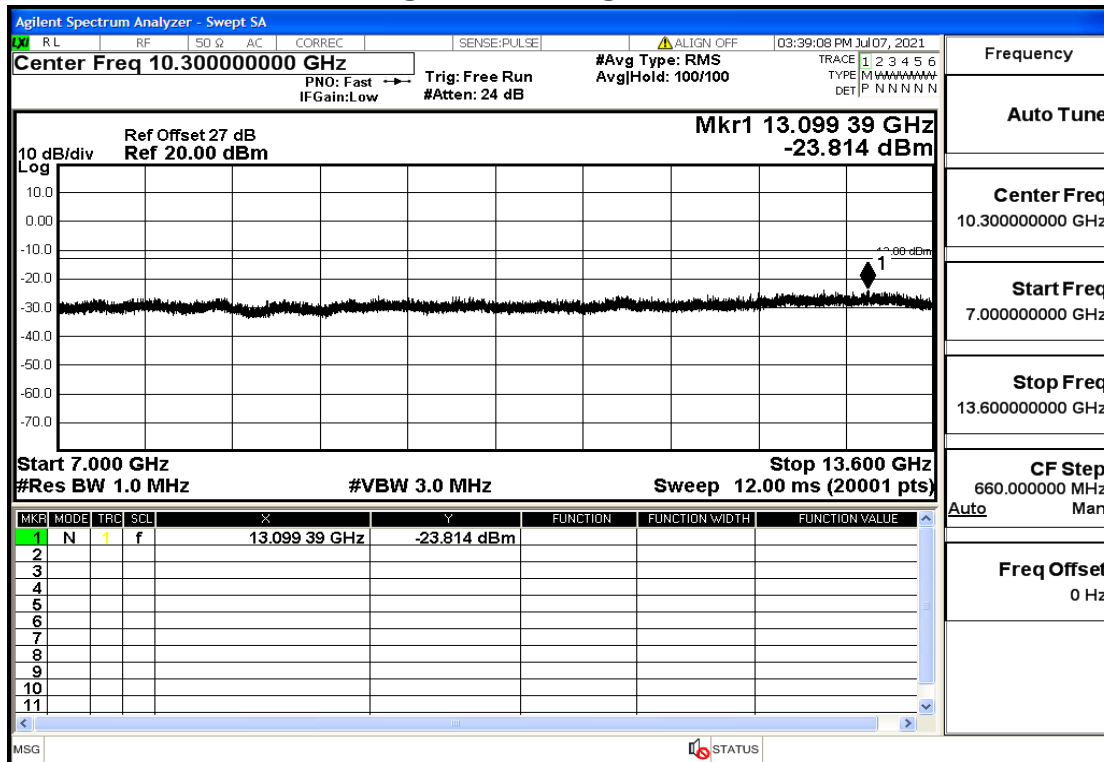


## UMTS BAND IV-1732.4MHz-RMC@13.6GHz-20GHz@Pass

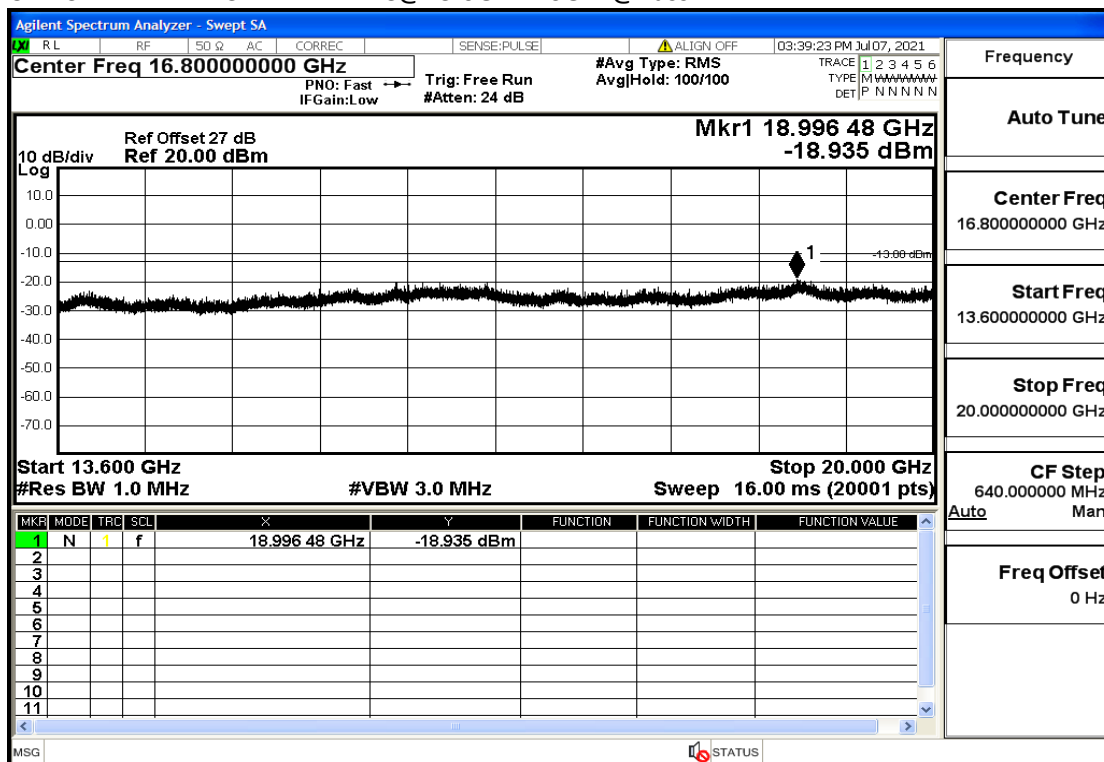




## UMTS BAND IV-1752.6MHz-RMC@30mHz-1GHz@Pass

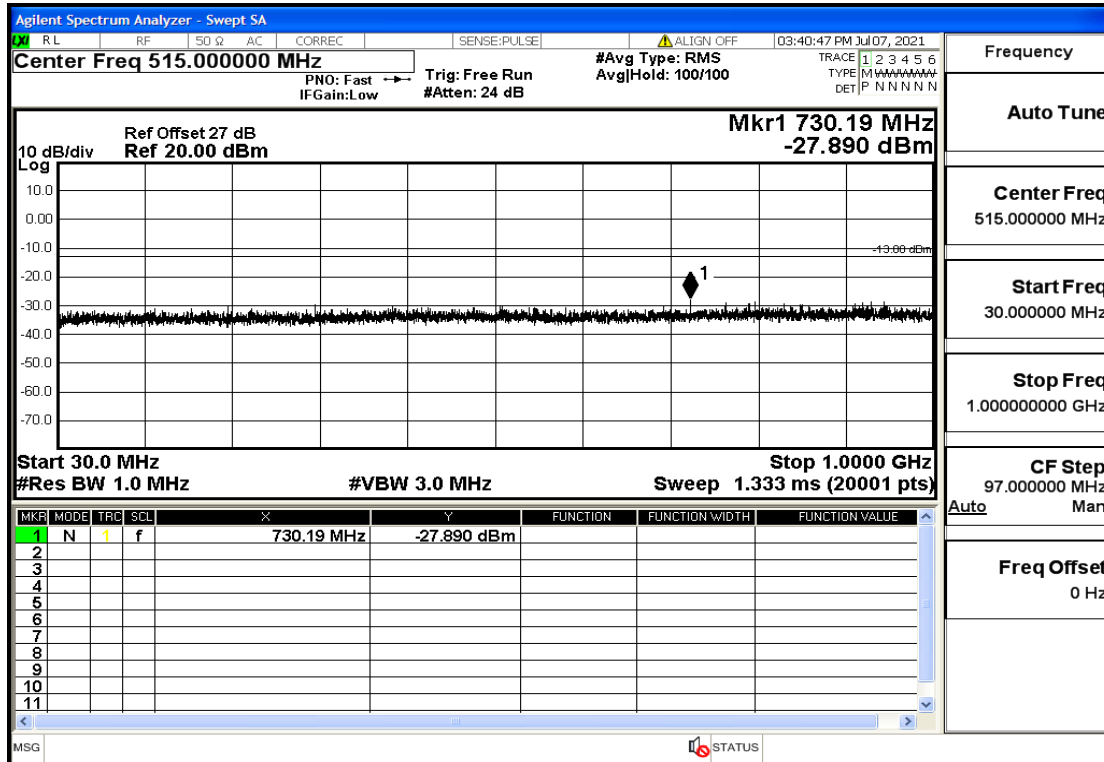


## UMTS BAND IV-1752.6MHz-RMC@1GHz-7GHz@Pass

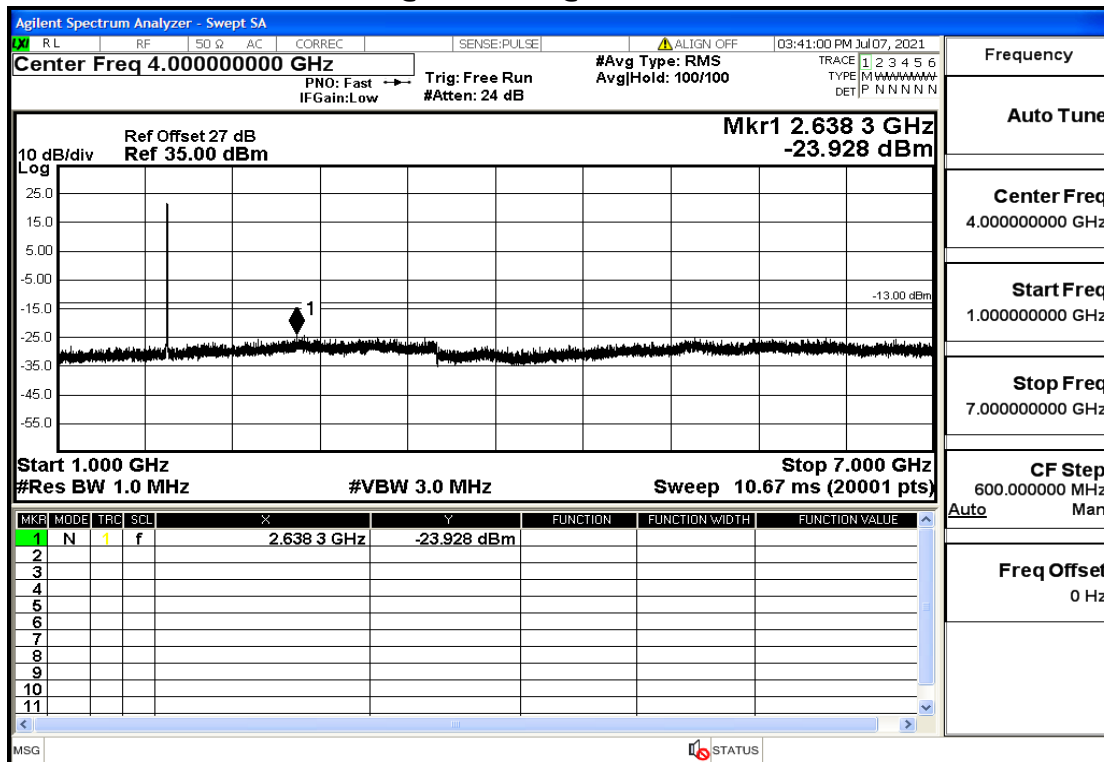




## UMTS BAND IV-1752.6MHz-RMC@7GHz-13.6GHz@Pass

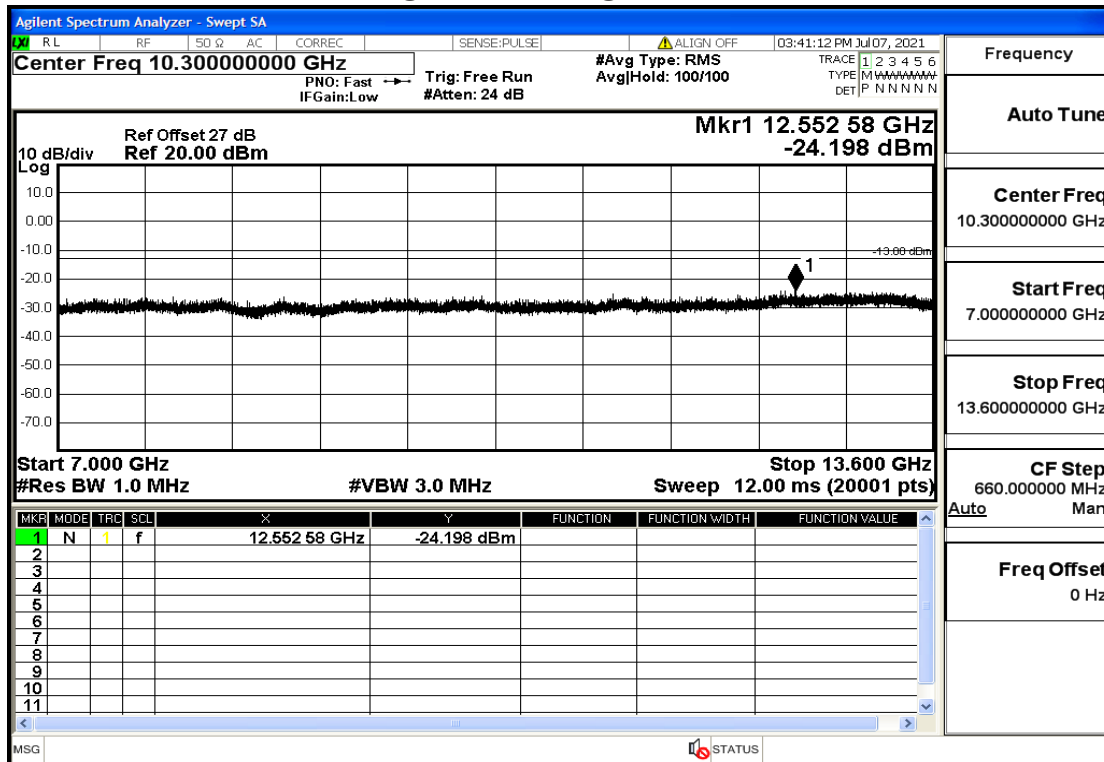

## UMTS BAND IV-1752.6MHz-RMC@13.6GHz-20GHz@Pass

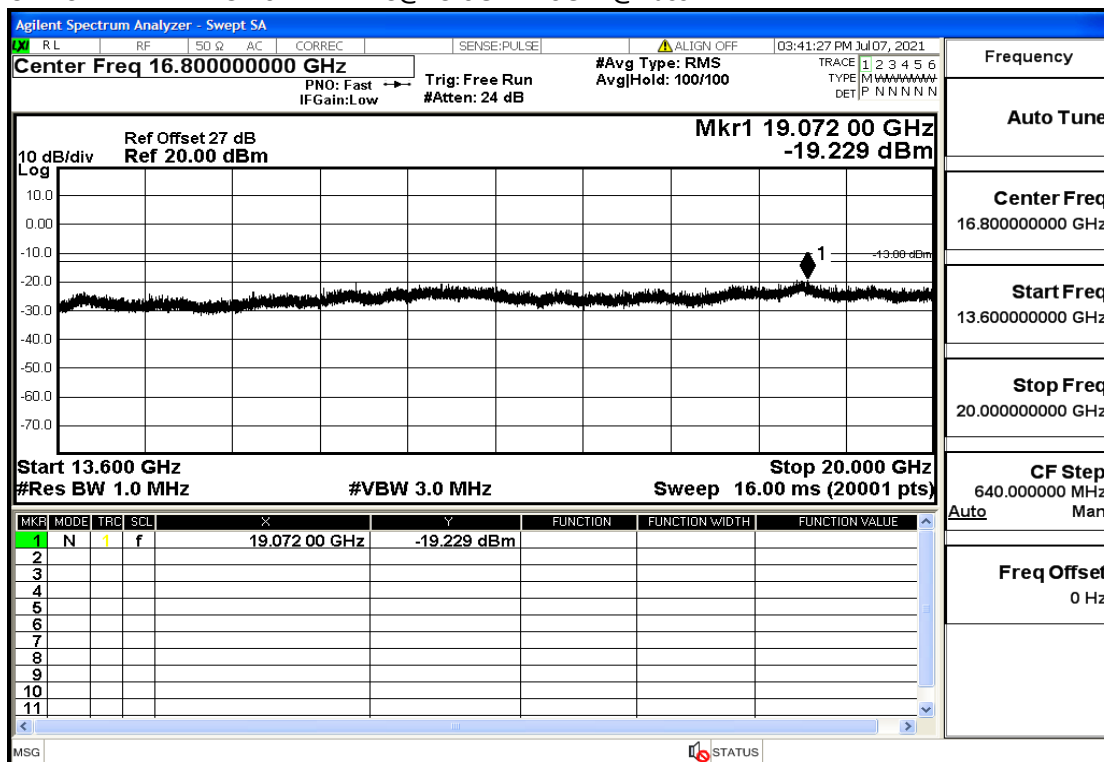



- Note:**1. Below 30MHZ no Spurious found and Above is the worst mode data.  
2. As no emission found in standby or receive mode, no recording in this report.

## **5.5.2 RADIATED SPURIOUS EMISSION**


### **5.5.2.1 MEASUREMENT METHOD**

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.


### **5.5.2.2 TEST SETUP**




### Radiated Emission Test-Setup Frequency Below 30MHz

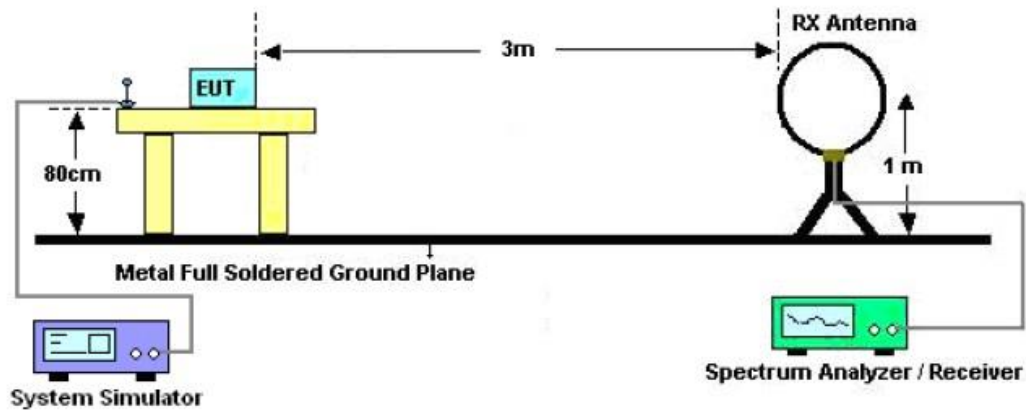

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

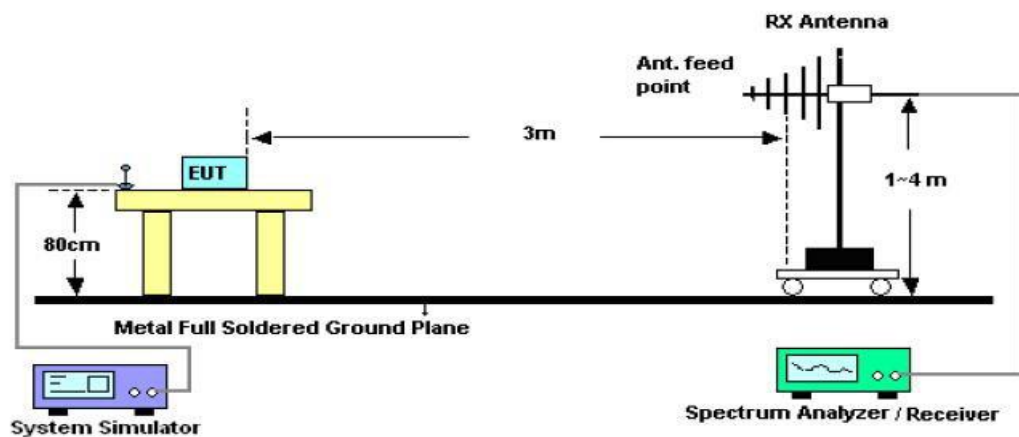

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

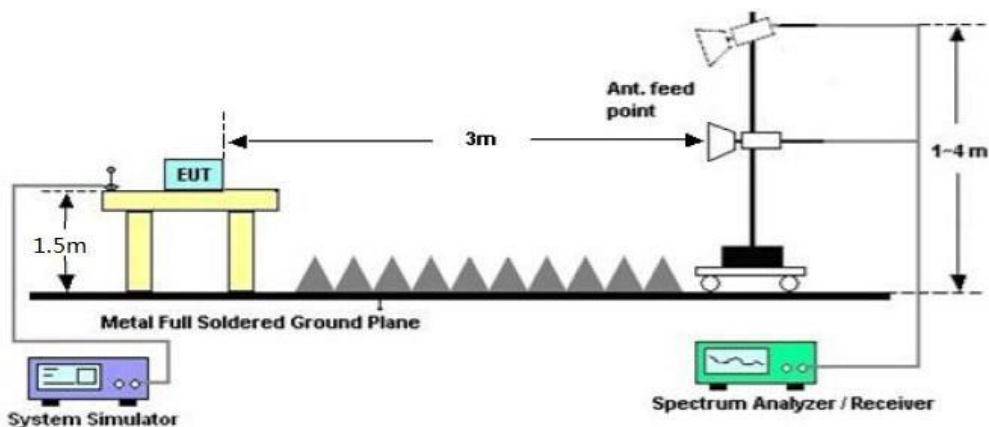

#### 5.5.2.3 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43 + 10 \log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power ( $P$ ) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of



-13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** only result the worst condition of each test mode:

**5.5.2.4 MEASUREMENT RESULT****GSM 850:**

| The Worst Test Results for Channel 128/824.2 MHz |                |        |        |            |
|--------------------------------------------------|----------------|--------|--------|------------|
| Frequency                                        | Emission Level | Limits | Margin | Comment    |
| (MHz)                                            | (dBm)          | (dBm)  | (dB)   |            |
| 1648.19                                          | -58.40         | -13    | 45.40  | Horizontal |
| 3296.50                                          | -41.54         | -13    | 28.54  | Horizontal |
| 4944.93                                          | -51.92         | -13    | 38.92  | Horizontal |
| 1648.05                                          | -42.08         | -13    | 29.08  | Vertical   |
| 3296.47                                          | -48.71         | -13    | 35.71  | Vertical   |
| 4944.95                                          | -45.58         | -13    | 32.58  | Vertical   |

**PCS 1900:**

| The Worst Test Results for Channel 661/1880.0 MHz |                |        |        |            |
|---------------------------------------------------|----------------|--------|--------|------------|
| Frequency                                         | Emission Level | Limits | Margin | Comment    |
| (MHz)                                             | (dBm)          | (dBm)  | (dB)   |            |
| 3759.68                                           | -58.68         | -13    | 45.68  | Horizontal |
| 7519.63                                           | -39.20         | -13    | 26.20  | Horizontal |
| 11279.63                                          | -53.69         | -13    | 40.69  | Horizontal |
| 3759.77                                           | -39.84         | -13    | 26.84  | Vertical   |
| 7519.68                                           | -49.37         | -13    | 36.37  | Vertical   |
| 11279.69                                          | -44.60         | -13    | 31.60  | Vertical   |

**WCDMA BAND II:**

| The Worst Test Results for Channel 9400/1880MHz |                |        |        |            |
|-------------------------------------------------|----------------|--------|--------|------------|
| Frequency                                       | Emission Level | Limits | Margin | Comment    |
| (MHz)                                           | (dBm)          | (dBm)  | (dB)   |            |
| 3750.08                                         | -60.10         | -13    | 47.10  | Horizontal |
| 7512.98                                         | -38.45         | -13    | 25.45  | Horizontal |
| 11271.70                                        | -52.61         | -13    | 39.61  | Horizontal |
| 3754.36                                         | -39.83         | -13    | 26.83  | Vertical   |
| 7512.98                                         | -49.37         | -13    | 36.37  | Vertical   |
| 11271.73                                        | -46.59         | -13    | 33.59  | Vertical   |

**WCDMA BAND IV:**

| The Worst Test Results for Channel 1412/1732.4MHz |                |        |        |            |
|---------------------------------------------------|----------------|--------|--------|------------|
| Frequency                                         | Emission Level | Limits | Margin | Comment    |
| (MHz)                                             | (dBm)          | (dBm)  | (dB)   |            |
| 3458.30                                           | -57.63         | -13    | 44.63  | Horizontal |
| 6921.54                                           | -40.32         | -13    | 27.32  | Horizontal |
| 10388.68                                          | -54.51         | -13    | 41.51  | Horizontal |
| 3455.54                                           | -41.41         | -13    | 28.41  | Vertical   |
| 6923.62                                           | -49.46         | -13    | 36.46  | Vertical   |
| 10387.61                                          | -44.30         | -13    | 31.30  | Vertical   |

**WCDMA BAND V:**

| The Worst Test Results for Channel 4132/826.4MHz |                |        |        |            |
|--------------------------------------------------|----------------|--------|--------|------------|
| Frequency                                        | Emission Level | Limits | Margin | Comment    |
| (MHz)                                            | (dBm)          | (dBm)  | (dB)   |            |
| 1645.50                                          | -58.28         | -13    | 45.28  | Horizontal |
| 3298.78                                          | -40.32         | -13    | 27.32  | Horizontal |
| 4952.92                                          | -53.97         | -13    | 40.97  | Horizontal |
| 1645.23                                          | -40.39         | -13    | 27.39  | Vertical   |
| 3298.02                                          | -49.45         | -13    | 36.45  | Vertical   |
| 4952.85                                          | -44.81         | -13    | 31.81  | Vertical   |

**RESULT: PASS****Note:**

11. Margin = Limit - Emission Level
12. Below 30MHZ no Spurious found and Above is the worst mode data.



## 5.6 FREQUENCY STABILITY

### 5.6.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 Measure the carrier frequency at room temperature.
- 2 Subject the EUT to overnight soak at -10°C.
- 3 With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band, channel 190 for GSM 850 band, channel 9400 for UMTS band II, channel 1412 for UMTS band IV and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 Subject the EUT to overnight soak at +50°C.
- 7 With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### 5.6.2 PROVISIONS APPLICABLE

#### 5.6.2.1 FOR HAND CARRIED BATTERY POWERED EQUIPMENT

According to the ANSI/TIA-603-E-2016, the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.4VDC and 4.2VDC, with a nominal voltage of 3.7VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

**5.6.2.2 FOR EQUIPMENT POWERED BY PRIMARY SUPPLY VOLTAGE**

According to the ANSI/TIA-603-E-2016, the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

**5.6.3 MEASUREMENT RESULT****For GSM****Test Band=GSM850/GSM1900**

| Voltage   |         |               |                  |                |                 |             |         |
|-----------|---------|---------------|------------------|----------------|-----------------|-------------|---------|
| Band      | Channel | Voltage (Vdc) | Temperature (°C) | Deviation (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
| GPRS850   | 128     | VL            | TN               | 3.31           | 0.0040          | 2.5         | PASS    |
| GPRS850   | 128     | VN            | TN               | 3.82           | 0.0046          | 2.5         | PASS    |
| GPRS850   | 128     | VH            | TN               | 5.18           | 0.0062          | 2.5         | PASS    |
| GPRS850   | 190     | VL            | TN               | 6.52           | 0.0078          | 2.5         | PASS    |
| GPRS850   | 190     | VN            | TN               | 5.35           | 0.0064          | 2.5         | PASS    |
| GPRS850   | 190     | VH            | TN               | 1.61           | 0.0019          | 2.5         | PASS    |
| GPRS850   | 251     | VL            | TN               | 6.04           | 0.0072          | 2.5         | PASS    |
| GPRS850   | 251     | VN            | TN               | 6.44           | 0.0077          | 2.5         | PASS    |
| GPRS850   | 251     | VH            | TN               | 4.93           | 0.0059          | 2.5         | PASS    |
| EGPRS850  | 128     | VL            | TN               | 12.53          | 0.0150          | 2.5         | PASS    |
| EGPRS850  | 128     | VN            | TN               | 11.15          | 0.0133          | 2.5         | PASS    |
| EGPRS850  | 128     | VH            | TN               | 12.55          | 0.0150          | 2.5         | PASS    |
| EGPRS850  | 190     | VL            | TN               | 13.12          | 0.0157          | 2.5         | PASS    |
| EGPRS850  | 190     | VN            | TN               | 13.25          | 0.0158          | 2.5         | PASS    |
| EGPRS850  | 190     | VH            | TN               | 11.11          | 0.0133          | 2.5         | PASS    |
| EGPRS850  | 251     | VL            | TN               | 12.25          | 0.0147          | 2.5         | PASS    |
| EGPRS850  | 251     | VN            | TN               | 11.93          | 0.0143          | 2.5         | PASS    |
| EGPRS850  | 251     | VH            | TN               | 10.1           | 0.0121          | 2.5         | PASS    |
| GPRS1900  | 512     | VL            | TN               | 7.17           | 0.0038          | 2.5         | PASS    |
| GPRS1900  | 512     | VN            | TN               | 9.66           | 0.0051          | 2.5         | PASS    |
| GPRS1900  | 512     | VH            | TN               | 13.76          | 0.0073          | 2.5         | PASS    |
| GPRS1900  | 661     | VL            | TN               | 23.28          | 0.0124          | 2.5         | PASS    |
| GPRS1900  | 661     | VN            | TN               | 26.83          | 0.0143          | 2.5         | PASS    |
| GPRS1900  | 661     | VH            | TN               | 30.92          | 0.0164          | 2.5         | PASS    |
| GPRS1900  | 810     | VL            | TN               | 25.14          | 0.0134          | 2.5         | PASS    |
| GPRS1900  | 810     | VN            | TN               | 22.66          | 0.0121          | 2.5         | PASS    |
| GPRS1900  | 810     | VH            | TN               | 28.38          | 0.0151          | 2.5         | PASS    |
| EGPRS1900 | 512     | VL            | TN               | 31             | 0.0165          | 2.5         | PASS    |
| EGPRS1900 | 512     | VN            | TN               | 29.85          | 0.0159          | 2.5         | PASS    |
| EGPRS1900 | 512     | VH            | TN               | 31.63          | 0.0168          | 2.5         | PASS    |
| EGPRS1900 | 661     | VL            | TN               | 36.01          | 0.0192          | 2.5         | PASS    |
| EGPRS1900 | 661     | VN            | TN               | 31.05          | 0.0165          | 2.5         | PASS    |
| EGPRS1900 | 661     | VH            | TN               | 32.8           | 0.0174          | 2.5         | PASS    |
| EGPRS1900 | 810     | VL            | TN               | 33.7           | 0.0179          | 2.5         | PASS    |
| EGPRS1900 | 810     | VN            | TN               | 31.5           | 0.0168          | 2.5         | PASS    |
| EGPRS1900 | 810     | VH            | TN               | 28.38          | 0.0151          | 2.5         | PASS    |



| Temperature |         |               |                  |                |                 |             |         |
|-------------|---------|---------------|------------------|----------------|-----------------|-------------|---------|
| Band        | Channel | Voltage (Vdc) | Temperature (°C) | Deviation (Hz) | Deviation (ppm) | Limit (ppm) | Verdict |
| GPRS850     | 128     | VN            | -30              | 5.01           | 0.0060          | 2.5         | PASS    |
| GPRS850     | 128     | VN            | -20              | 9.04           | 0.0108          | 2.5         | PASS    |
| GPRS850     | 128     | VN            | -10              | 8.54           | 0.0102          | 2.5         | PASS    |
| GPRS850     | 128     | VN            | 0                | 9.69           | 0.0116          | 2.5         | PASS    |
| GPRS850     | 128     | VN            | 10               | 9.25           | 0.0111          | 2.5         | PASS    |
| GPRS850     | 128     | VN            | 20               | 7.89           | 0.0094          | 2.5         | PASS    |
| GPRS850     | 128     | VN            | 30               | 9.84           | 0.0118          | 2.5         | PASS    |
| GPRS850     | 128     | VN            | 40               | 7.51           | 0.0090          | 2.5         | PASS    |
| GPRS850     | 128     | VN            | 50               | 9.64           | 0.0115          | 2.5         | PASS    |
| GPRS850     | 190     | VN            | -30              | 5.5            | 0.0066          | 2.5         | PASS    |
| GPRS850     | 190     | VN            | -20              | 7.48           | 0.0089          | 2.5         | PASS    |
| GPRS850     | 190     | VN            | -10              | 3.51           | 0.0042          | 2.5         | PASS    |
| GPRS850     | 190     | VN            | 0                | 0.66           | 0.0008          | 2.5         | PASS    |
| GPRS850     | 190     | VN            | 10               | -0.18          | -0.0002         | 2.5         | PASS    |
| GPRS850     | 190     | VN            | 20               | 2.57           | 0.0031          | 2.5         | PASS    |
| GPRS850     | 190     | VN            | 30               | -1.11          | -0.0013         | 2.5         | PASS    |
| GPRS850     | 190     | VN            | 40               | 0.06           | 0.0001          | 2.5         | PASS    |
| GPRS850     | 190     | VN            | 50               | -0.32          | -0.0004         | 2.5         | PASS    |
| GPRS850     | 251     | VN            | -30              | 9.68           | 0.0116          | 2.5         | PASS    |
| GPRS850     | 251     | VN            | -20              | 7.01           | 0.0084          | 2.5         | PASS    |
| GPRS850     | 251     | VN            | -10              | 7.08           | 0.0085          | 2.5         | PASS    |
| GPRS850     | 251     | VN            | 0                | 7.19           | 0.0086          | 2.5         | PASS    |
| GPRS850     | 251     | VN            | 10               | 7.1            | 0.0085          | 2.5         | PASS    |
| GPRS850     | 251     | VN            | 20               | 5.55           | 0.0066          | 2.5         | PASS    |
| GPRS850     | 251     | VN            | 30               | 2.87           | 0.0034          | 2.5         | PASS    |
| GPRS850     | 251     | VN            | 40               | 5.79           | 0.0069          | 2.5         | PASS    |
| GPRS850     | 251     | VN            | 50               | 6.27           | 0.0075          | 2.5         | PASS    |
| EGPRS850    | 128     | VN            | -30              | 12.34          | 0.0148          | 2.5         | PASS    |
| EGPRS850    | 128     | VN            | -20              | 10.69          | 0.0128          | 2.5         | PASS    |
| EGPRS850    | 128     | VN            | -10              | 10.15          | 0.0121          | 2.5         | PASS    |
| EGPRS850    | 128     | VN            | 0                | 12.06          | 0.0144          | 2.5         | PASS    |
| EGPRS850    | 128     | VN            | 10               | 10.42          | 0.0125          | 2.5         | PASS    |
| EGPRS850    | 128     | VN            | 20               | 9.07           | 0.0108          | 2.5         | PASS    |
| EGPRS850    | 128     | VN            | 30               | 9.41           | 0.0113          | 2.5         | PASS    |
| EGPRS850    | 128     | VN            | 40               | 11.1           | 0.0133          | 2.5         | PASS    |
| EGPRS850    | 128     | VN            | 50               | 13.16          | 0.0157          | 2.5         | PASS    |
| EGPRS850    | 190     | VN            | -30              | 11.41          | 0.0136          | 2.5         | PASS    |
| EGPRS850    | 190     | VN            | -20              | 11.15          | 0.0133          | 2.5         | PASS    |
| EGPRS850    | 190     | VN            | -10              | 8.66           | 0.0104          | 2.5         | PASS    |
| EGPRS850    | 190     | VN            | 0                | 9.02           | 0.0108          | 2.5         | PASS    |
| EGPRS850    | 190     | VN            | 10               | 8.99           | 0.0108          | 2.5         | PASS    |
| EGPRS850    | 190     | VN            | 20               | 8.15           | 0.0097          | 2.5         | PASS    |
| EGPRS850    | 190     | VN            | 30               | 8.9            | 0.0106          | 2.5         | PASS    |
| EGPRS850    | 190     | VN            | 40               | 9.38           | 0.0112          | 2.5         | PASS    |





|           |     |    |     |       |        |     |      |
|-----------|-----|----|-----|-------|--------|-----|------|
| EGPRS850  | 190 | VN | 50  | 9.26  | 0.0111 | 2.5 | PASS |
| EGPRS850  | 251 | VN | -30 | 11.24 | 0.0134 | 2.5 | PASS |
| EGPRS850  | 251 | VN | -20 | 11.09 | 0.0133 | 2.5 | PASS |
| EGPRS850  | 251 | VN | -10 | 9.95  | 0.0119 | 2.5 | PASS |
| EGPRS850  | 251 | VN | 0   | 8.69  | 0.0104 | 2.5 | PASS |
| EGPRS850  | 251 | VN | 10  | 8.9   | 0.0106 | 2.5 | PASS |
| EGPRS850  | 251 | VN | 20  | 8.45  | 0.0101 | 2.5 | PASS |
| EGPRS850  | 251 | VN | 30  | 8.09  | 0.0097 | 2.5 | PASS |
| EGPRS850  | 251 | VN | 40  | 8.93  | 0.0107 | 2.5 | PASS |
| EGPRS850  | 251 | VN | 50  | 6.45  | 0.0077 | 2.5 | PASS |
| GPRS1900  | 512 | VN | -30 | 13.15 | 0.0070 | 2.5 | PASS |
| GPRS1900  | 512 | VN | -20 | 13.3  | 0.0071 | 2.5 | PASS |
| GPRS1900  | 512 | VN | -10 | 16.64 | 0.0089 | 2.5 | PASS |
| GPRS1900  | 512 | VN | 0   | 16.55 | 0.0088 | 2.5 | PASS |
| GPRS1900  | 512 | VN | 10  | 19.82 | 0.0105 | 2.5 | PASS |
| GPRS1900  | 512 | VN | 20  | 11.1  | 0.0059 | 2.5 | PASS |
| GPRS1900  | 512 | VN | 30  | 18.58 | 0.0099 | 2.5 | PASS |
| GPRS1900  | 512 | VN | 40  | 19.82 | 0.0105 | 2.5 | PASS |
| GPRS1900  | 512 | VN | 50  | 18    | 0.0096 | 2.5 | PASS |
| GPRS1900  | 661 | VN | -30 | 26.37 | 0.0140 | 2.5 | PASS |
| GPRS1900  | 661 | VN | -20 | 24.31 | 0.0129 | 2.5 | PASS |
| GPRS1900  | 661 | VN | -10 | 23.4  | 0.0124 | 2.5 | PASS |
| GPRS1900  | 661 | VN | 0   | 28.23 | 0.0150 | 2.5 | PASS |
| GPRS1900  | 661 | VN | 10  | 26.05 | 0.0139 | 2.5 | PASS |
| GPRS1900  | 661 | VN | 20  | 26.69 | 0.0142 | 2.5 | PASS |
| GPRS1900  | 661 | VN | 30  | 35.93 | 0.0191 | 2.5 | PASS |
| GPRS1900  | 661 | VN | 40  | 22.56 | 0.0120 | 2.5 | PASS |
| GPRS1900  | 661 | VN | 50  | 29.87 | 0.0159 | 2.5 | PASS |
| GPRS1900  | 810 | VN | -30 | 22.91 | 0.0122 | 2.5 | PASS |
| GPRS1900  | 810 | VN | -20 | 22.73 | 0.0121 | 2.5 | PASS |
| GPRS1900  | 810 | VN | -10 | 28.91 | 0.0154 | 2.5 | PASS |
| GPRS1900  | 810 | VN | 0   | 27.55 | 0.0147 | 2.5 | PASS |
| GPRS1900  | 810 | VN | 10  | 31.65 | 0.0168 | 2.5 | PASS |
| GPRS1900  | 810 | VN | 20  | 27.18 | 0.0145 | 2.5 | PASS |
| GPRS1900  | 810 | VN | 30  | 26.7  | 0.0142 | 2.5 | PASS |
| GPRS1900  | 810 | VN | 40  | 33.61 | 0.0179 | 2.5 | PASS |
| GPRS1900  | 810 | VN | 50  | 29.98 | 0.0159 | 2.5 | PASS |
| EGPRS1900 | 512 | VN | -30 | 33.97 | 0.0181 | 2.5 | PASS |
| EGPRS1900 | 512 | VN | -20 | 38.09 | 0.0203 | 2.5 | PASS |
| EGPRS1900 | 512 | VN | -10 | 34.41 | 0.0183 | 2.5 | PASS |
| EGPRS1900 | 512 | VN | 0   | 36.38 | 0.0194 | 2.5 | PASS |
| EGPRS1900 | 512 | VN | 10  | 28.62 | 0.0152 | 2.5 | PASS |
| EGPRS1900 | 512 | VN | 20  | 36.65 | 0.0195 | 2.5 | PASS |
| EGPRS1900 | 512 | VN | 30  | 34.44 | 0.0183 | 2.5 | PASS |
| EGPRS1900 | 512 | VN | 40  | 25.81 | 0.0137 | 2.5 | PASS |
| EGPRS1900 | 512 | VN | 50  | 32.86 | 0.0175 | 2.5 | PASS |
| EGPRS1900 | 661 | VN | -30 | 34.05 | 0.0181 | 2.5 | PASS |
| EGPRS1900 | 661 | VN | -20 | 30.28 | 0.0161 | 2.5 | PASS |



|           |     |    |     |       |        |     |      |
|-----------|-----|----|-----|-------|--------|-----|------|
| EGPRS1900 | 661 | VN | -10 | 27.94 | 0.0149 | 2.5 | PASS |
| EGPRS1900 | 661 | VN | 0   | 27.22 | 0.0145 | 2.5 | PASS |
| EGPRS1900 | 661 | VN | 10  | 31.98 | 0.0170 | 2.5 | PASS |
| EGPRS1900 | 661 | VN | 20  | 32.02 | 0.0170 | 2.5 | PASS |
| EGPRS1900 | 661 | VN | 30  | 31.01 | 0.0165 | 2.5 | PASS |
| EGPRS1900 | 661 | VN | 40  | 32.4  | 0.0172 | 2.5 | PASS |
| EGPRS1900 | 661 | VN | 50  | 35.41 | 0.0188 | 2.5 | PASS |
| EGPRS1900 | 810 | VN | -30 | 34.26 | 0.0182 | 2.5 | PASS |
| EGPRS1900 | 810 | VN | -20 | 24.86 | 0.0132 | 2.5 | PASS |
| EGPRS1900 | 810 | VN | -10 | 31.17 | 0.0166 | 2.5 | PASS |
| EGPRS1900 | 810 | VN | 0   | 24.51 | 0.0130 | 2.5 | PASS |
| EGPRS1900 | 810 | VN | 10  | 26.59 | 0.0141 | 2.5 | PASS |
| EGPRS1900 | 810 | VN | 20  | 30.82 | 0.0164 | 2.5 | PASS |
| EGPRS1900 | 810 | VN | 30  | 31.39 | 0.0167 | 2.5 | PASS |
| EGPRS1900 | 810 | VN | 40  | 30.53 | 0.0162 | 2.5 | PASS |
| EGPRS1900 | 810 | VN | 50  | 22.86 | 0.0122 | 2.5 | PASS |



## For WCDMA

## Test Band=WCDMA850/WCDMA1900/WCDMA1700

| Voltage |         |                  |                     |                   |                    |                |         |
|---------|---------|------------------|---------------------|-------------------|--------------------|----------------|---------|
| Band    | Channel | Voltage<br>(Vdc) | Temperature<br>(°C) | Deviation<br>(Hz) | Deviation<br>(ppm) | Limit<br>(ppm) | Verdict |
| Band II | 9262    | VL               | TN                  | -26.42            | -0.0141            | 2.5            | PASS    |
| Band II | 9262    | VN               | TN                  | -24.36            | -0.0130            | 2.5            | PASS    |
| Band II | 9262    | VH               | TN                  | -25.73            | -0.0137            | 2.5            | PASS    |
| Band II | 9400    | VL               | TN                  | -21.98            | -0.0117            | 2.5            | PASS    |
| Band II | 9400    | VN               | TN                  | -31.35            | -0.0167            | 2.5            | PASS    |
| Band II | 9400    | VH               | TN                  | -23.9             | -0.0127            | 2.5            | PASS    |
| Band II | 9538    | VL               | TN                  | -24.2             | -0.0129            | 2.5            | PASS    |
| Band II | 9538    | VN               | TN                  | -22.91            | -0.0122            | 2.5            | PASS    |
| Band II | 9538    | VH               | TN                  | -29.5             | -0.0157            | 2.5            | PASS    |
| Band IV | 1312    | VL               | TN                  | -25.94            | -0.0150            | 2.5            | PASS    |
| Band IV | 1312    | VN               | TN                  | -23.9             | -0.0138            | 2.5            | PASS    |
| Band IV | 1312    | VH               | TN                  | -20.19            | -0.0117            | 2.5            | PASS    |
| Band IV | 1413    | VL               | TN                  | -20.03            | -0.0116            | 2.5            | PASS    |
| Band IV | 1413    | VN               | TN                  | -22.66            | -0.0131            | 2.5            | PASS    |
| Band IV | 1413    | VH               | TN                  | -22.48            | -0.0130            | 2.5            | PASS    |
| Band IV | 1513    | VL               | TN                  | -19.15            | -0.0111            | 2.5            | PASS    |
| Band IV | 1513    | VN               | TN                  | -22.09            | -0.0128            | 2.5            | PASS    |
| Band IV | 1513    | VH               | TN                  | -23.91            | -0.0138            | 2.5            | PASS    |
| Band V  | 4132    | VL               | TN                  | -12.52            | -0.0150            | 2.5            | PASS    |
| Band V  | 4132    | VN               | TN                  | -10.51            | -0.0126            | 2.5            | PASS    |
| Band V  | 4132    | VH               | TN                  | -14.42            | -0.0172            | 2.5            | PASS    |
| Band V  | 4182    | VL               | TN                  | -3.8              | -0.0045            | 2.5            | PASS    |
| Band V  | 4182    | VN               | TN                  | -7.37             | -0.0088            | 2.5            | PASS    |
| Band V  | 4182    | VH               | TN                  | -13.49            | -0.0161            | 2.5            | PASS    |
| Band V  | 4233    | VL               | TN                  | -8.56             | -0.0102            | 2.5            | PASS    |
| Band V  | 4233    | VN               | TN                  | -9.15             | -0.0109            | 2.5            | PASS    |
| Band V  | 4233    | VH               | TN                  | -18.15            | -0.0217            | 2.5            | PASS    |




| Temperature |         |                  |                     |                   |                    |                |         |
|-------------|---------|------------------|---------------------|-------------------|--------------------|----------------|---------|
| Band        | Channel | Voltage<br>(Vdc) | Temperature<br>(°C) | Deviation<br>(Hz) | Deviation<br>(ppm) | Limit<br>(ppm) | Verdict |
| Band II     | 9262    | VN               | -30                 | -19.5             | -0.0104            | 2.5            | PASS    |
| Band II     | 9262    | VN               | -20                 | -24.28            | -0.0129            | 2.5            | PASS    |
| Band II     | 9262    | VN               | -10                 | -28.25            | -0.0150            | 2.5            | PASS    |
| Band II     | 9262    | VN               | 0                   | -18.24            | -0.0097            | 2.5            | PASS    |
| Band II     | 9262    | VN               | 10                  | -21.24            | -0.0113            | 2.5            | PASS    |
| Band II     | 9262    | VN               | 20                  | -28.97            | -0.0154            | 2.5            | PASS    |
| Band II     | 9262    | VN               | 30                  | -25.88            | -0.0138            | 2.5            | PASS    |
| Band II     | 9262    | VN               | 40                  | -18.27            | -0.0097            | 2.5            | PASS    |
| Band II     | 9262    | VN               | 50                  | -23.44            | -0.0125            | 2.5            | PASS    |
| Band II     | 9400    | VN               | -30                 | -29               | -0.0154            | 2.5            | PASS    |
| Band II     | 9400    | VN               | -20                 | -27.1             | -0.0144            | 2.5            | PASS    |
| Band II     | 9400    | VN               | -10                 | -27.31            | -0.0145            | 2.5            | PASS    |
| Band II     | 9400    | VN               | 0                   | -22.91            | -0.0122            | 2.5            | PASS    |
| Band II     | 9400    | VN               | 10                  | -21.71            | -0.0115            | 2.5            | PASS    |
| Band II     | 9400    | VN               | 20                  | -27.67            | -0.0147            | 2.5            | PASS    |
| Band II     | 9400    | VN               | 30                  | -22.66            | -0.0121            | 2.5            | PASS    |
| Band II     | 9400    | VN               | 40                  | -22.92            | -0.0122            | 2.5            | PASS    |
| Band II     | 9400    | VN               | 50                  | -20.25            | -0.0108            | 2.5            | PASS    |
| Band II     | 9538    | VN               | -30                 | -23.13            | -0.0123            | 2.5            | PASS    |
| Band II     | 9538    | VN               | -20                 | -23.54            | -0.0125            | 2.5            | PASS    |
| Band II     | 9538    | VN               | -10                 | -23.82            | -0.0127            | 2.5            | PASS    |
| Band II     | 9538    | VN               | 0                   | -21.28            | -0.0113            | 2.5            | PASS    |
| Band II     | 9538    | VN               | 10                  | -22.51            | -0.0120            | 2.5            | PASS    |
| Band II     | 9538    | VN               | 20                  | -23.82            | -0.0127            | 2.5            | PASS    |
| Band II     | 9538    | VN               | 30                  | -19.77            | -0.0105            | 2.5            | PASS    |
| Band II     | 9538    | VN               | 40                  | -20.47            | -0.0109            | 2.5            | PASS    |
| Band II     | 9538    | VN               | 50                  | -23.65            | -0.0126            | 2.5            | PASS    |
| Band V      | 4132    | VN               | -30                 | -9.55             | -0.0114            | 2.5            | PASS    |
| Band V      | 4132    | VN               | -20                 | -11.83            | -0.0142            | 2.5            | PASS    |
| Band V      | 4132    | VN               | -10                 | -10.8             | -0.0129            | 2.5            | PASS    |
| Band V      | 4132    | VN               | 0                   | -13.58            | -0.0162            | 2.5            | PASS    |
| Band V      | 4132    | VN               | 10                  | -11.99            | -0.0143            | 2.5            | PASS    |
| Band V      | 4132    | VN               | 20                  | -13.92            | -0.0167            | 2.5            | PASS    |
| Band V      | 4132    | VN               | 30                  | -9.99             | -0.0119            | 2.5            | PASS    |
| Band V      | 4132    | VN               | 40                  | -9.96             | -0.0119            | 2.5            | PASS    |
| Band V      | 4132    | VN               | 50                  | -14.5             | -0.0173            | 2.5            | PASS    |
| Band V      | 4182    | VN               | -30                 | -14.24            | -0.0170            | 2.5            | PASS    |
| Band V      | 4182    | VN               | -20                 | -10.66            | -0.0128            | 2.5            | PASS    |
| Band V      | 4182    | VN               | -10                 | -13.24            | -0.0158            | 2.5            | PASS    |
| Band V      | 4182    | VN               | 0                   | -6.55             | -0.0078            | 2.5            | PASS    |
| Band V      | 4182    | VN               | 10                  | -10.42            | -0.0125            | 2.5            | PASS    |
| Band V      | 4182    | VN               | 20                  | -13.64            | -0.0163            | 2.5            | PASS    |
| Band V      | 4182    | VN               | 30                  | -6.05             | -0.0072            | 2.5            | PASS    |
| Band V      | 4182    | VN               | 40                  | -5.87             | -0.0070            | 2.5            | PASS    |




|         |      |    |     |        |         |     |      |
|---------|------|----|-----|--------|---------|-----|------|
| Band V  | 4182 | VN | 50  | -8.83  | -0.0106 | 2.5 | PASS |
| Band V  | 4233 | VN | -30 | -11.69 | -0.0140 | 2.5 | PASS |
| Band V  | 4233 | VN | -20 | -7.91  | -0.0095 | 2.5 | PASS |
| Band V  | 4233 | VN | -10 | -9.65  | -0.0115 | 2.5 | PASS |
| Band V  | 4233 | VN | 0   | -9.78  | -0.0117 | 2.5 | PASS |
| Band V  | 4233 | VN | 10  | -10.61 | -0.0127 | 2.5 | PASS |
| Band V  | 4233 | VN | 20  | -4.44  | -0.0053 | 2.5 | PASS |
| Band V  | 4233 | VN | 30  | -7.33  | -0.0088 | 2.5 | PASS |
| Band V  | 4233 | VN | 40  | -2.59  | -0.0031 | 2.5 | PASS |
| Band V  | 4233 | VN | 50  | -7.68  | -0.0092 | 2.5 | PASS |
| Band IV | 1312 | VN | -30 | -21.12 | -0.0122 | 2.5 | PASS |
| Band IV | 1312 | VN | -20 | -23.82 | -0.0137 | 2.5 | PASS |
| Band IV | 1312 | VN | -10 | -29.49 | -0.0170 | 2.5 | PASS |
| Band IV | 1312 | VN | 0   | -18.77 | -0.0108 | 2.5 | PASS |
| Band IV | 1312 | VN | 10  | -22.58 | -0.0130 | 2.5 | PASS |
| Band IV | 1312 | VN | 20  | -26.67 | -0.0154 | 2.5 | PASS |
| Band IV | 1312 | VN | 30  | -23.34 | -0.0135 | 2.5 | PASS |
| Band IV | 1312 | VN | 40  | -19.94 | -0.0115 | 2.5 | PASS |
| Band IV | 1312 | VN | 50  | -27.31 | -0.0158 | 2.5 | PASS |
| Band IV | 1413 | VN | -30 | -26.89 | -0.0155 | 2.5 | PASS |
| Band IV | 1413 | VN | -20 | -26.59 | -0.0153 | 2.5 | PASS |
| Band IV | 1413 | VN | -10 | -24.93 | -0.0144 | 2.5 | PASS |
| Band IV | 1413 | VN | 0   | -22.74 | -0.0131 | 2.5 | PASS |
| Band IV | 1413 | VN | 10  | -19.56 | -0.0113 | 2.5 | PASS |
| Band IV | 1413 | VN | 20  | -26.58 | -0.0153 | 2.5 | PASS |
| Band IV | 1413 | VN | 30  | -20.11 | -0.0116 | 2.5 | PASS |
| Band IV | 1413 | VN | 40  | -25.72 | -0.0148 | 2.5 | PASS |
| Band IV | 1413 | VN | 50  | -17.08 | -0.0099 | 2.5 | PASS |
| Band IV | 1513 | VN | -30 | -21.56 | -0.0124 | 2.5 | PASS |
| Band IV | 1513 | VN | -20 | -21.92 | -0.0127 | 2.5 | PASS |
| Band IV | 1513 | VN | -10 | -25.04 | -0.0145 | 2.5 | PASS |
| Band IV | 1513 | VN | 0   | -19.1  | -0.0110 | 2.5 | PASS |
| Band IV | 1513 | VN | 10  | -22.81 | -0.0132 | 2.5 | PASS |
| Band IV | 1513 | VN | 20  | -26.44 | -0.0153 | 2.5 | PASS |
| Band IV | 1513 | VN | 30  | -19.9  | -0.0115 | 2.5 | PASS |
| Band IV | 1513 | VN | 40  | -22.48 | -0.0130 | 2.5 | PASS |
| Band IV | 1513 | VN | 50  | -24.53 | -0.0142 | 2.5 | PASS |

## 6 APPENDIX A: PHOTOGRAPHS OF TEST SETUP

### RADIATED SPURIOUS EMISSION Below 1GHz

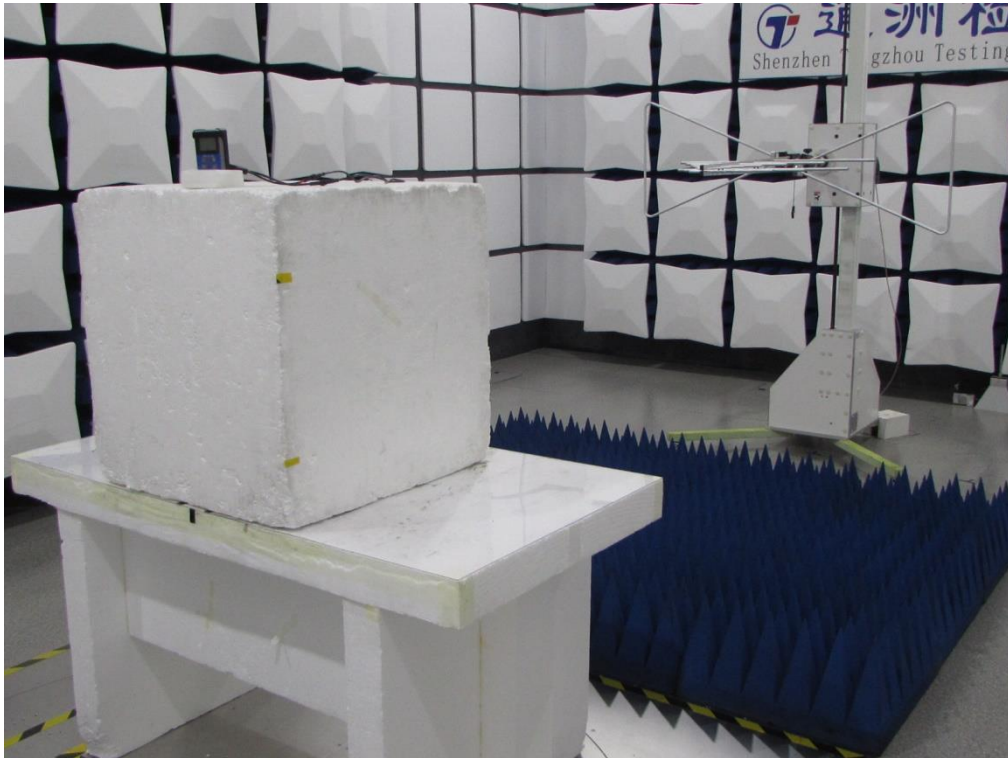

### RADIATED SPURIOUS ABOVE 1GHz EMISSION

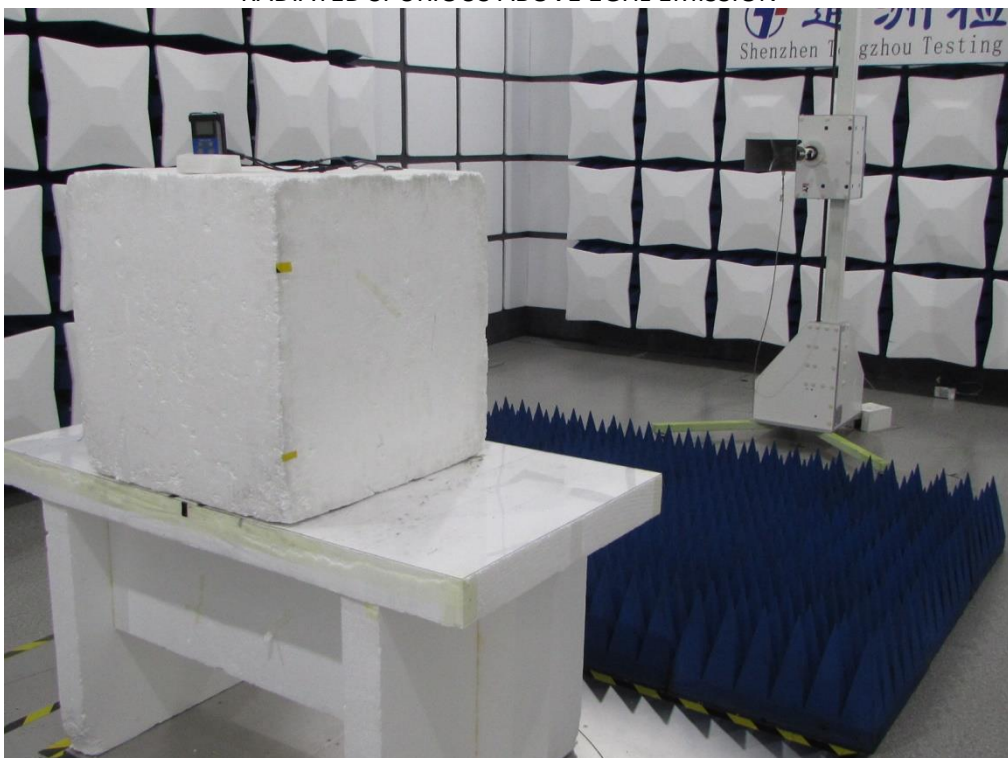

----END OF REPORT----