



TEST REPORT NUMBER: (8523)124-0051

TEST REPORT

Applicant:	GUANGDONG HENGDI TECHNOLOGY CORP.,LTD.	Fax:	/
		E-mail:	/
Address:	BUILDING C, JINHUI INDUSTRIAL BUILDING, SOUTH OF YUTING ROAD, EAST OF TAIAN ROAD, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, CHINA		
Test Date:	05 May, 2023 ---- 11 May, 2023		

Manufacturer or Supplier:	GUANGDONG HENGDI TECHNOLOGY CORP.,LTD.
Address:	BUILDING C, JINHUI INDUSTRIAL BUILDING, SOUTH OF YUTING ROAD, EAST OF TAIAN ROAD, CHENGHAI DISTRICT, SHANTOU CITY, GUANGDONG PROVINCE, CHINA
Sample Description:	RC TOYS
Model Number:	2305
Additional Model:	2301, 2302, 2303, 2304, 2306, 2307, 2308, 2309, 2310, 2311, 2312, 2313, 2314, 2315, 2316, 2317, 2318, 2319, 2320, 2201, 2202, 2203, 2204, 2205, 2205D, 2206, 2207, 2208, 2208H, 2209, 2210, 2211, 2212, 2213, 2214, 2215, 2216, 1336, 1340, 1306, 1343A, 1343W, 1339A, 1339W, 1332A, 1332W, 1331S, 1331W, 1335A, 1335W, 1806A, 1806W, 1704, 1706, 2003, 2106, 1319, H24, H36, H65, HM0707, HM0710, HM0930, HM1204, HM1304
Rated Voltage:	DC 4.5V(AAA*3)
FCC ID	2AWZK-2305
The submitted sample of the above equipment has been tested according to following standard(s)	
FCC Part 15, Subpart C, Section 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHZ, and 24.0-24.25 GHz	
ANSI C63,10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	
CONCLUSION: The submitted sample was found to COMPLY with the test requirement	

Assistant Manager



Name: Nick Lung
Date: JUN 06,2023



TEST REPORT NUMBER: (8523)124-0051

1 Test Standards

The tests were performed according to following standards:
FCC Part 15, Subpart C, Section 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz
ANSI C63,10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

2 Summary

2.1 General Remarks

Date of receipt of test sample	05 May, 2023
Testing commenced on	05 May, 2023 ---- 11 May, 2023
Testing concluded on	11 May, 2023

2.2 Final Assessment

Test Content:	Assessment
The RF requirements pertaining to the technical standards and tested operation modes are	Fulfilled
The equipment under test	Fulfilled the RF requirements

3 Equipment Under Test

3.1 Short description of the Equipment Under Test (EUT)

EUT Name	RC TOYS
Model No.	2305
FCC ID	2AWZK-2305
Number of Tested Samples	1
Power Supply Voltage	DC 4.5V(AAA*3)
Operating Mode	TX Mode
Operation Frequency	2420-2470MHz
Number of Channel	51
Modulation	GFSK
Antenna Type	Monopole Antenna
Antenna Gain	0dBi
NOTE:	1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual. The laboratory is not responsible for the accuracy of the information provided by manufacturer.



TEST REPORT NUMBER: (8523)124-0051

3.2 EUT Configuration

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurement:

Not Applicable



3.3 Description of Test Modes

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and packet type. The worst case was found when the EUT was positioned on Y axis for radiated emission. The EUT was tested under the following mode.

EUT Configure Mode	Applicable to				Description
	RE < 1G	RE ≥ 1G	PLC	BW	
A	√	√	N/A	√	DC 4.5V (AAA*3)

Where RE<1G: Radiated Emission below 1GHz RE ≥ 1G: Radiated Emission above 1GHz
 PLC: Power Line Conducted Emission BW: 20dB bandwidth

Following channel(s) was (were) selected for the test as listed below.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2420	20	2439	39	2458		
2	2421	21	2440	40	2459		
3	2422	22	2441	41	2460		
4	2423	23	2442	42	2461		
5	2424	24	2443	43	2462		
6	2425	25	2444	44	2463		
7	2426	26	2445	45	2464		
8	2427	27	2446	46	2465		
9	2428	28	2447	47	2466		
10	2429	29	2448	48	2467		
11	2430	30	2449	49	2468		
12	2431	31	2450	50	2469		
13	2432	32	2451	51	2470		
14	2433	33	2452				
15	2434	34	2453				
16	2435	35	2454				
17	2436	36	2455				
18	2437	37	2456				
19	2438	38	2457				



TEST REPORT NUMBER: (8523)124-0051

Channel List

Channel	Frequency (MHz)
The lowest channel	2420
The middle channel	2445
The highest channel	2470

Note: The more detailed channel, please refer to the product specifications

4 Test Environment

4.1 Address of the test Laboratory

Test Laboratory:	AJT Testing Services Limited
Test Site:	1-2/F., NO.1, WENHUA SOUTH ROAD, CHENGHUA INDUSTRIAL ZONE, CHENGHAI DISTRICT, SHANTOU, GUANGDONG, CHINA
Tel:	86-754-85860999
Fax:	86-754-86984098

4.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:	
CNAS Accreditation NO.:	L4735
A2LA Accreditation NO.:	5443.01
Designation Number:	CN1263
Test Firm Registration Number:	127385
Industry Canada Site Registration Number:	25345
FCC Registration NO.:	0028094555

4.3 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:	
Temperature	15~35°C
Humidity	30~75%



TEST REPORT NUMBER: (8523)124-0051

4.4 Statement of the Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. Furthermore, component and process variability of devices are similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Uncertainty (Standard: ETSI TR 100 028)	
Conducted Emission (CE)	±2.14dB
Radiated Emission below 1GHz	±4.44dB
Radiated Emission above 1GHz	±5.26dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

4.5 Test Types and Results

Standard: FCC PART 15, SUBPART C (SECTION 15.249)		
Standard Section	Test Type	Result
FCC Part 15 §15.209 & §15.249(a)	Radiated Emission (RE)	PASS
FCC Part 15 §15.215(c)	20dB Bandwidth	PASS
FCC Part 15 §15.207(a)	Conducted Emission (CE)	N/A
FCC Part 15 §15.203	Antenna Requirement	PASS
FCC Part 15 §15.205	Restricted Band Around Fundamental Frequency	PASS

5 Test Conditions and Results

5.1 Radiated Emission (RE)

For test instruments and accessories used see section 6

5.1.1 Test Procedures

- (1) The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.


TEST REPORT NUMBER: (8523)124-0051

- (5) The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- (6) For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- (7) If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. All modes of operation were investigated and the worst-case emissions are reported
4. The testing of the EUT was performed on all 3 orthogonal axes; the worst-case test configuration was reported on the file test setup photo.

5.1.2 Test Setup

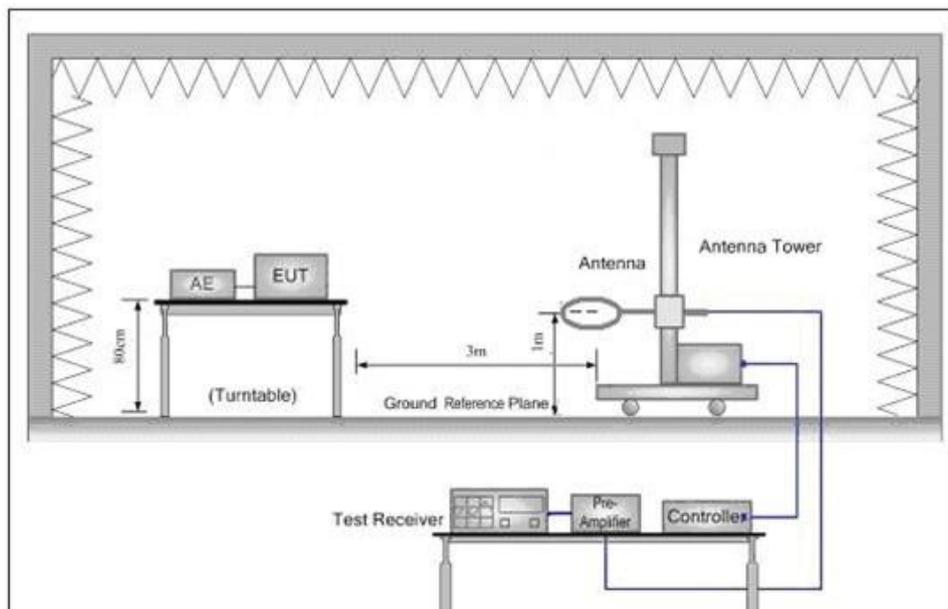


Below 30MHz

TEST REPORT NUMBER: (8523)124-0051

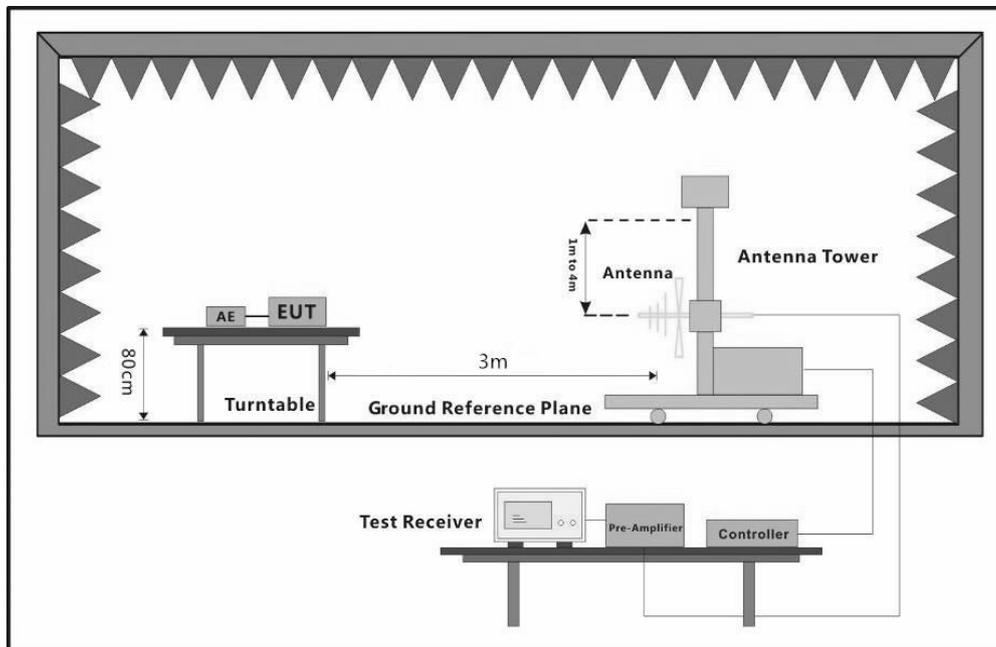

30MHz-1000MHz

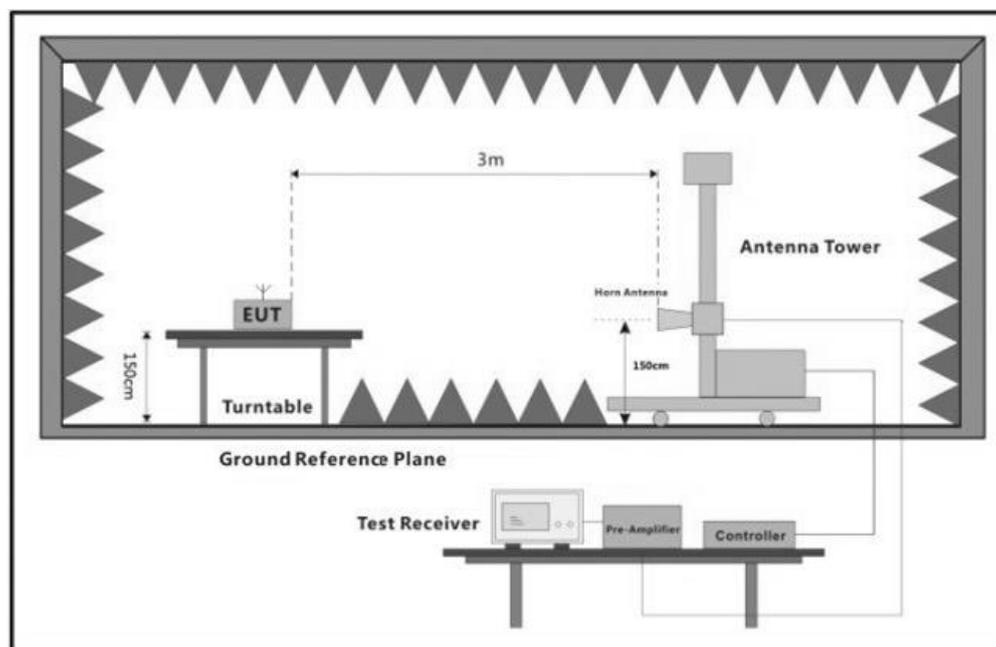

Above 1GHz



TEST REPORT NUMBER: (8523)124-0051

5.1.3 Test Limits

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Filed Strength of Fundamental (milli-volts/meter)	Field Strength of Harmonics (micro-volts/meter)
902 ~ 928 MHz	50	500
2400 ~ 2483.5 MHz	50	500
5725 ~5875 MHz	50	500
24.0 ~24.25 GHz	250	2500

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
4. Emission from 9kHz to 30MHz is more than 20dB below the limit.



TEST REPORT NUMBER: (8523)124-0051


5.1.4 Test Results

The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

5.1.4.1 Radiated Emissions Test (Below 1GHz)

Test Point	Operation Mode	Result
Horizontal	TX mode	PASS

EUT Name	RC TOYS
Operating Condition	DC: 4.5V(AAA*3)
Test Condition	Ambient Temperature: 23°C Humidity: 65%RH

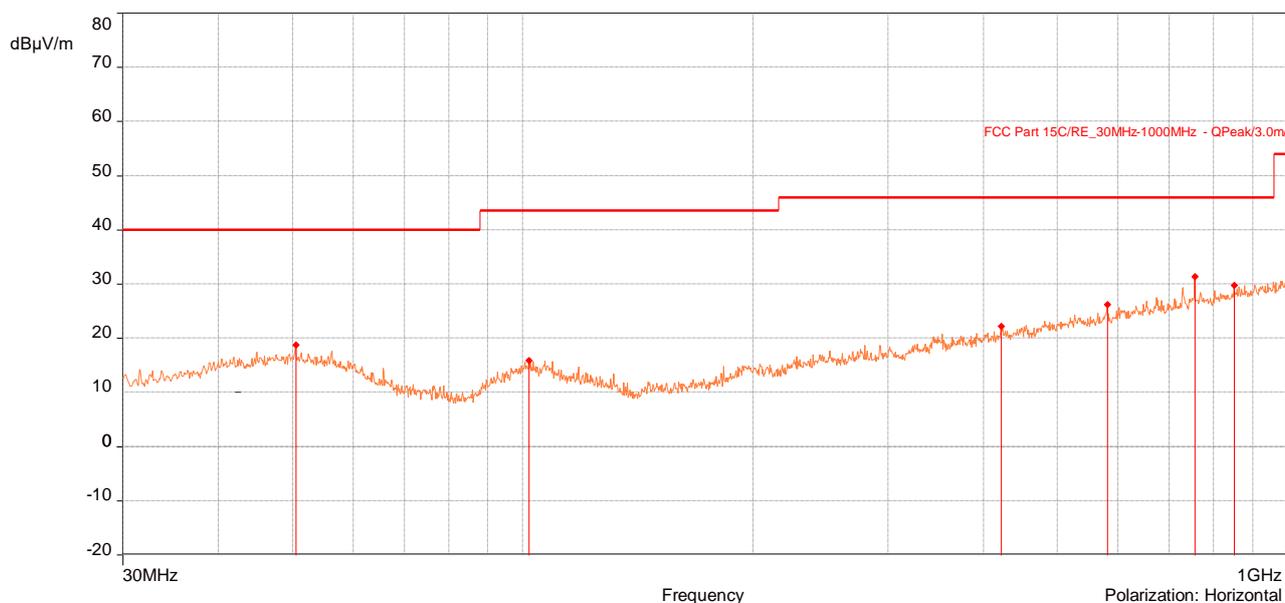

Frequency (MHz)	Peak (dBµV/m)	QP (dBµV/m)	QP Lim. (dBµV/m)	Margin (dB)	Angle (°)	Height (m)	Polarization
50.467	18.73	/	40.00	-21.27	5.00	1.99	Horizontal
101.877	15.95	/	43.50	-27.55	102.00	1.99	Horizontal
422.268	22.21	/	46.00	-23.79	98.00	1.00	Horizontal
580.378	26.25	/	46.00	-19.75	58.00	1.00	Horizontal
756.045	31.34	/	46.00	-14.66	164.00	1.00	Horizontal
850.329	29.74	/	46.00	-16.26	178.00	1.00	Horizontal


- 1.QP is abbreviation of Quasi-Peak
- 2.Margin = Emission Level - Limit Value
- 3.The emission levels of other frequencies were more than 20dB margin against the limit



TEST REPORT NUMBER: (8523)124-0051

Test Point	Operation Mode	Result
Vertical	TX mode	PASS

EUT Name	RC TOYS
Operating Condition	DC: 4.5V(AAA*3)
Test Condition	Ambient Temperature: 23°C Humidity: 65%RH

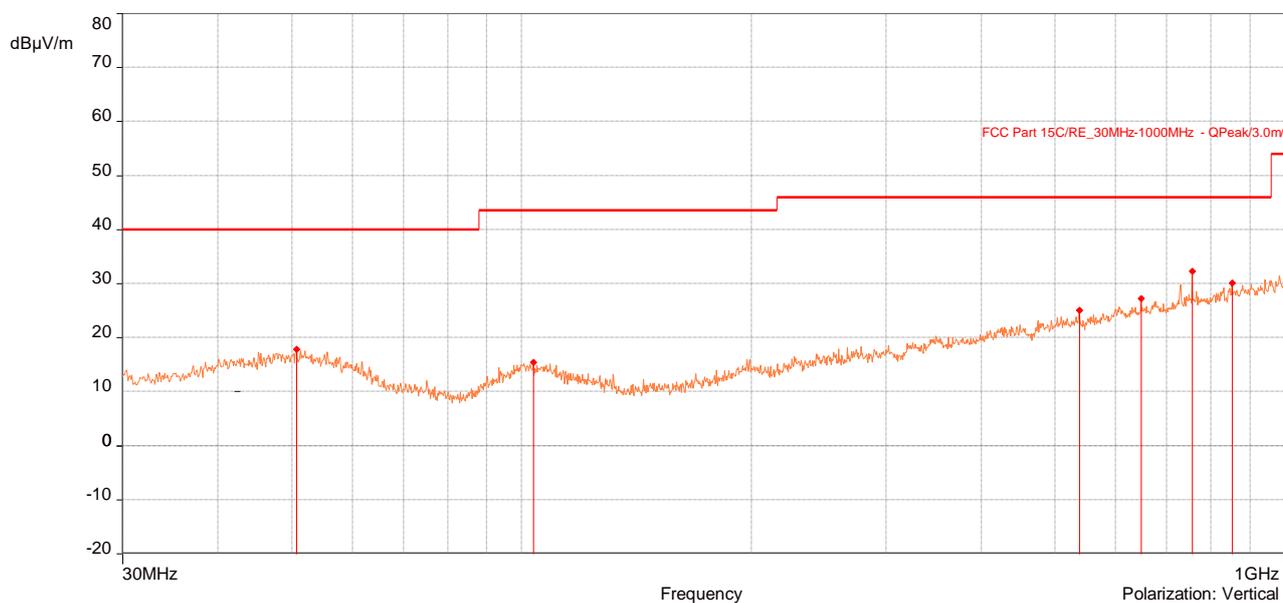

Frequency (MHz)	Peak (dBµV/m)	QP (dBµV/m)	QP Lim. (dBµV/m)	Margin (dB)	Angle (°)	Height (m)	Polarization
50.661	17.85	/	40.00	-22.15	130.00	1.00	Vertical
103.623	15.41	/	43.50	-28.09	158.00	1.00	Vertical
537.31	25.07	/	46.00	-20.93	251.00	1.99	Vertical
647.987	27.24	/	46.00	-18.76	273.00	1.00	Vertical
756.045	32.28	/	46.00	-13.72	58.00	1.99	Vertical
852.463	30.11	/	46.00	-15.89	40.00	1.00	Vertical

1. QP is abbreviation of Quasi-Peak
2. Margin = Emission Level - Limit Value
3. The emission levels of other frequencies were more than 20dB margin against the limit



TEST REPORT NUMBER: (8523)124-0051

5.1.4.2 Radiated Emissions Test (Above 1GHz)

EUT Name	RC TOYS		
Channel	The Lowest Channel (2420MHz)	Detector Function	Peak (PK) Average (AV)
Frequency Range	Above 1GHz	Result	PASS

Antenna Polarity & Test Distance: Horizontal At 3m								
Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (m)	Angle (°)	Polarization	Correction (dB)	Detector
2385.6	25.95	54.00	-28.05	1.52	38.00	Horizontal	-25.35	Average
2400	26.14	54.00	-27.86	1.52	30.00	Horizontal	-25.35	Average
*2420.04	65.82	94.00	-28.18	1.52	35.00	Horizontal	-25.35	Average
4839.85	35.86	54.00	-18.14	2.00	138.00	Horizontal	-25.35	Average
7260.6	23.74	54.00	-30.26	2.00	298.00	Horizontal	-25.35	Average
2385.6	51.30	74.00	-22.70	1.52	38.00	Horizontal	-3.72	Peak
2400	51.49	74.00	-22.51	1.52	30.00	Horizontal	-3.74	Peak
*2420.04	91.17	114.00	-22.83	1.52	35.00	Horizontal	-3.59	Peak
4839.85	61.21	74.00	-12.79	2.00	138.00	Horizontal	1.25	Peak
7260.6	49.09	74.00	-24.91	2.00	298.00	Horizontal	8.49	Peak

Antenna Polarity & Test Distance: Vertical At 3m								
Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (m)	Angle (°)	Polarization	Correction (dB)	Detector
2385.6	24.96	54.00	-29.04	1.48	253.00	Vertical	-25.35	Average
2400	22.74	54.00	-31.26	1.48	285.00	Vertical	-25.35	Average
*2420.04	61.84	94.00	-32.16	1.48	264.00	Vertical	-25.35	Average
4839.85	37.34	54.00	-16.66	1.99	74.00	Vertical	-25.35	Average
7260.6	20.57	54.00	-33.43	1.00	107.00	Vertical	-25.35	Average
2385.6	50.31	74.00	-23.69	1.48	253.00	Vertical	-3.72	Peak
2400	48.09	74.00	-25.91	1.48	285.00	Vertical	-3.74	Peak
*2420.04	87.19	114.00	-26.81	1.48	264.00	Vertical	-3.59	Peak
4839.85	62.69	74.00	-11.31	1.99	74.00	Vertical	1.25	Peak
7260.6	45.92	74.00	-28.08	1.00	107.00	Vertical	8.49	Peak



Remarks:

- Emission level (dB μ V/m) = Raw Value (dB μ V) + Correction Factor (dB/m)
- Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- The emission levels of other frequencies were more than 20dB margin against the limit.
- Margin = Emission level - Limit value
- " * ": Fundamental frequency.
- The average value of fundamental frequency is: Average value = Peak value +AV factor, where the AV factor is calculated from following formula: AV factor=20 log (Duty cycle) = 20 log (5.4%) = -25.35dB, please see 5.1.4.3.



TEST REPORT NUMBER: (8523)124-0051

Band Edge Plot

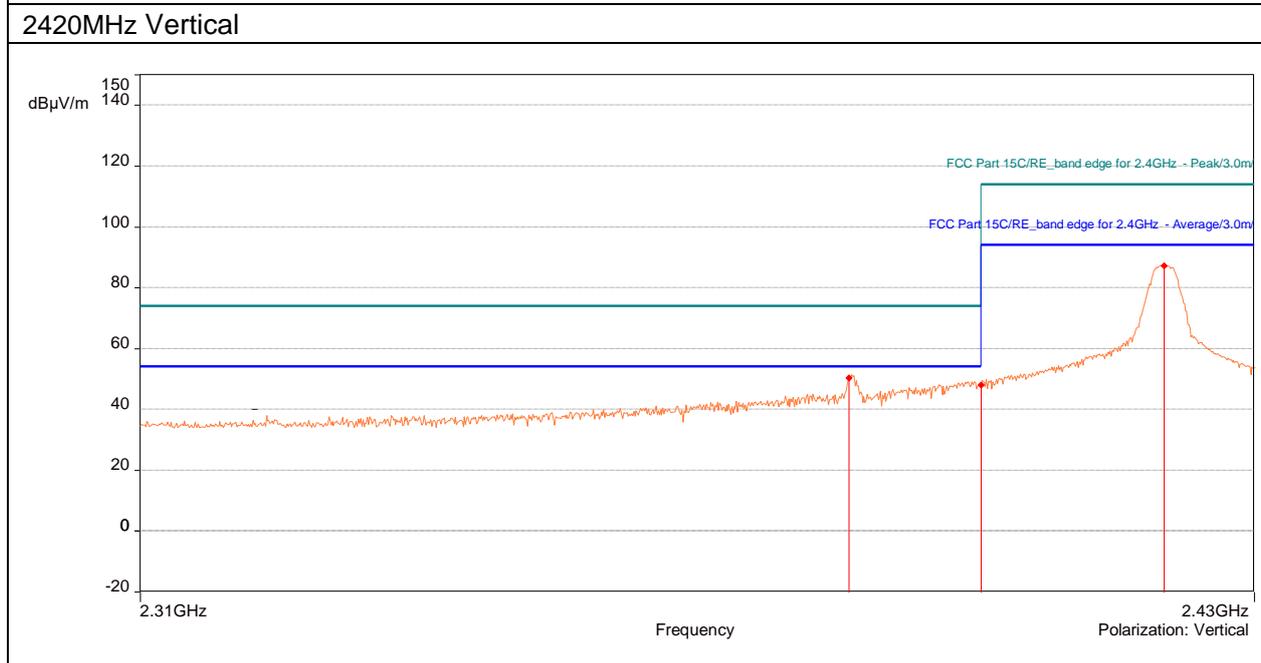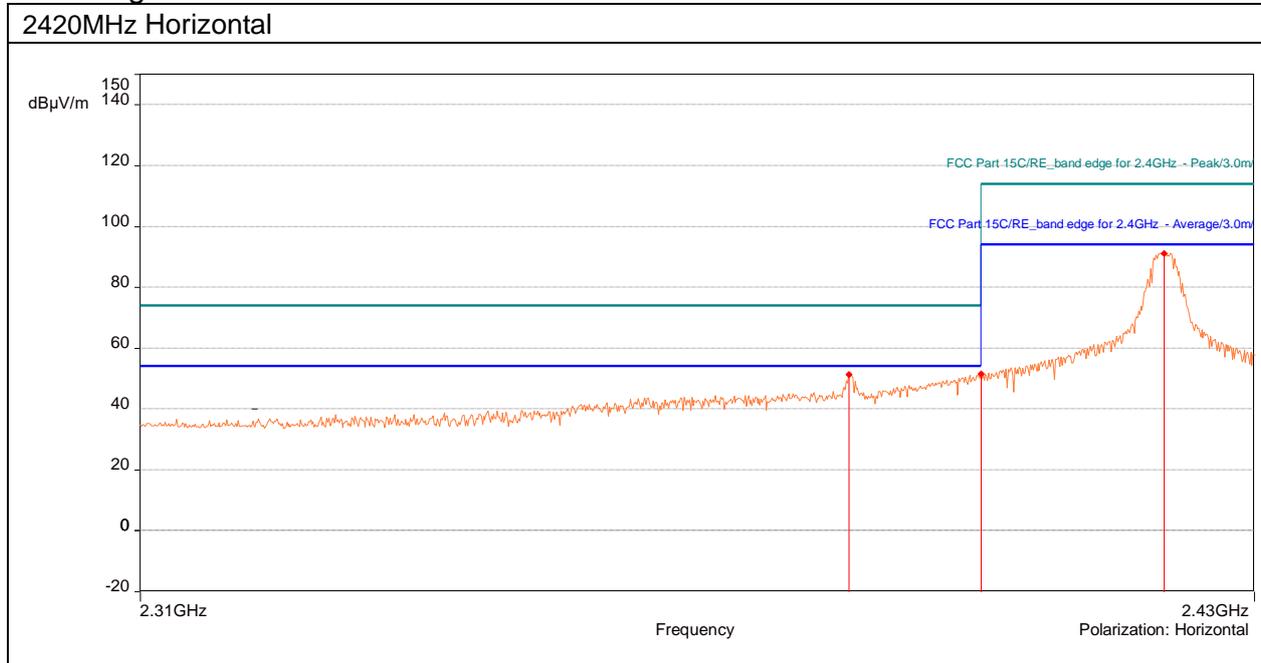



TEST REPORT NUMBER: (8523)124-0051

EUT Name	RC TOYS		
Channel	The Middle Channel (2445MHz)	Detector Function	Peak (PK) Average (AV)
Frequency Range	Above 1GHz	Result	PASS

Antenna Polarity & Test Distance: Horizontal At 3m								
Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (m)	Angle (°)	Polarization	Correction (dB)	Detector
*2445.0065	64.44	94.00	-29.56	1.52	37.00	Horizontal	-25.35	Average
4890.45	36.12	54.00	-17.88	1.98	114.00	Horizontal	-25.35	Average
7335.35	22.74	54.00	-31.26	1.98	298.00	Horizontal	-25.35	Average
*2445.0065	89.79	114.00	-24.21	1.52	37.00	Horizontal	-3.78	Peak
4890.45	61.47	74.00	-12.53	1.98	114.00	Horizontal	0.86	Peak
7335.35	48.09	74.00	-25.91	1.98	298.00	Horizontal	8.36	Peak
Antenna Polarity & Test Distance: Vertical At 3m								
Frequency (MHz)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (m)	Angle (°)	Polarization	Correction (dB)	Detector
*2445.0065	61.46	94.00	-32.54	1.50	280.00	Vertical	-25.35	Average
4890.45	37.15	54.00	-16.85	1.99	61.00	Vertical	-25.35	Average
7335.35	21.48	54.00	-32.52	1.99	229.00	Vertical	-25.35	Average
*2445.0065	86.81	114.00	-27.19	1.50	280.00	Vertical	-3.78	Peak
4890.45	62.50	74.00	-11.50	1.99	61.00	Vertical	0.86	Peak
7335.35	46.83	74.00	-27.17	1.99	229.00	Vertical	8.36	Peak
Remarks: 1. Emission level (dB μ V/m) = Raw Value (dB μ V) + Correction Factor (dB/m) 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) 3. The emission levels of other frequencies were more than 20dB margin against the limit. 4. Margin = Emission level - Limit value 5. " * ": Fundamental frequency. 6. The average value of fundamental frequency is: Average value = Peak value +AV factor, where the AV factor is calculated from following formula: AV factor=20 log (Duty cycle) = 20 log (5.4%) = -25.35dB, please see 5.1.4.3.								



TEST REPORT NUMBER: (8523)124-0051

EUT Name	RC TOYS		
Channel	The Highest Channel (2470MHz)	Detector Function	Peak (PK) Average (AV)
Frequency Range	Above 1GHz	Result	PASS

Antenna Polarity & Test Distance: Horizontal At 3m								
Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Polarization	Correction (dB)	Detector
*2470	64.01	94.00	-29.99	1.48	29.00	Horizontal	-25.35	Average
2483.5	28.91	54.00	-25.09	1.48	31.00	Horizontal	-25.35	Average
4890.45	36.12	54.00	-17.88	1.98	114.00	Horizontal	-25.35	Average
7335.35	22.74	54.00	-31.26	1.98	298.00	Horizontal	-25.35	Average
*2470	89.36	114.00	-24.64	1.48	29.00	Horizontal	-3.68	Peak
2483.5	54.26	74.00	-19.74	1.48	31.00	Horizontal	-3.76	Peak
4890.45	61.47	74.00	-12.53	1.98	114.00	Horizontal	0.86	Peak
7335.35	48.09	74.00	-25.91	1.98	298.00	Horizontal	8.36	Peak
Antenna Polarity & Test Distance: Vertical At 3m								
Frequency (MHz)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (m)	Angle (°)	Polarization	Correction (dB)	Detector
*2470	61.29	94.00	-32.71	1.50	274.00	Vertical	-25.35	Average
2483.5	26.88	54.00	-27.12	1.50	295.00	Vertical	-25.35	Average
4890.45	37.15	54.00	-16.85	1.99	61.00	Vertical	-25.35	Average
7335.35	21.48	54.00	-32.52	1.99	229.00	Vertical	-25.35	Average
*2470	86.64	114.00	-27.36	1.50	274.00	Vertical	-3.68	Peak
2483.5	52.23	74.00	-21.77	1.50	295.00	Vertical	-3.76	Peak
4890.45	62.50	74.00	-11.50	1.99	61.00	Vertical	0.86	Peak
7335.35	46.83	74.00	-27.17	1.99	229.00	Vertical	8.36	Peak


Remarks:

1. Emission level (dBμV/m) = Raw Value (dBμV) + Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The emission levels of other frequencies were more than 20dB margin against the limit.
4. Margin = Emission level - Limit value
5. " * " : Fundamental frequency.
6. The average value of fundamental frequency is: Average value = Peak value +AV factor, where the AV factor is calculated from following formula: AV factor=20 log (Duty cycle) = 20 log (5.4%) = -25.35dB, please see 5.1.4.3.



TEST REPORT NUMBER: (8523)124-0051

Band Edge Plot

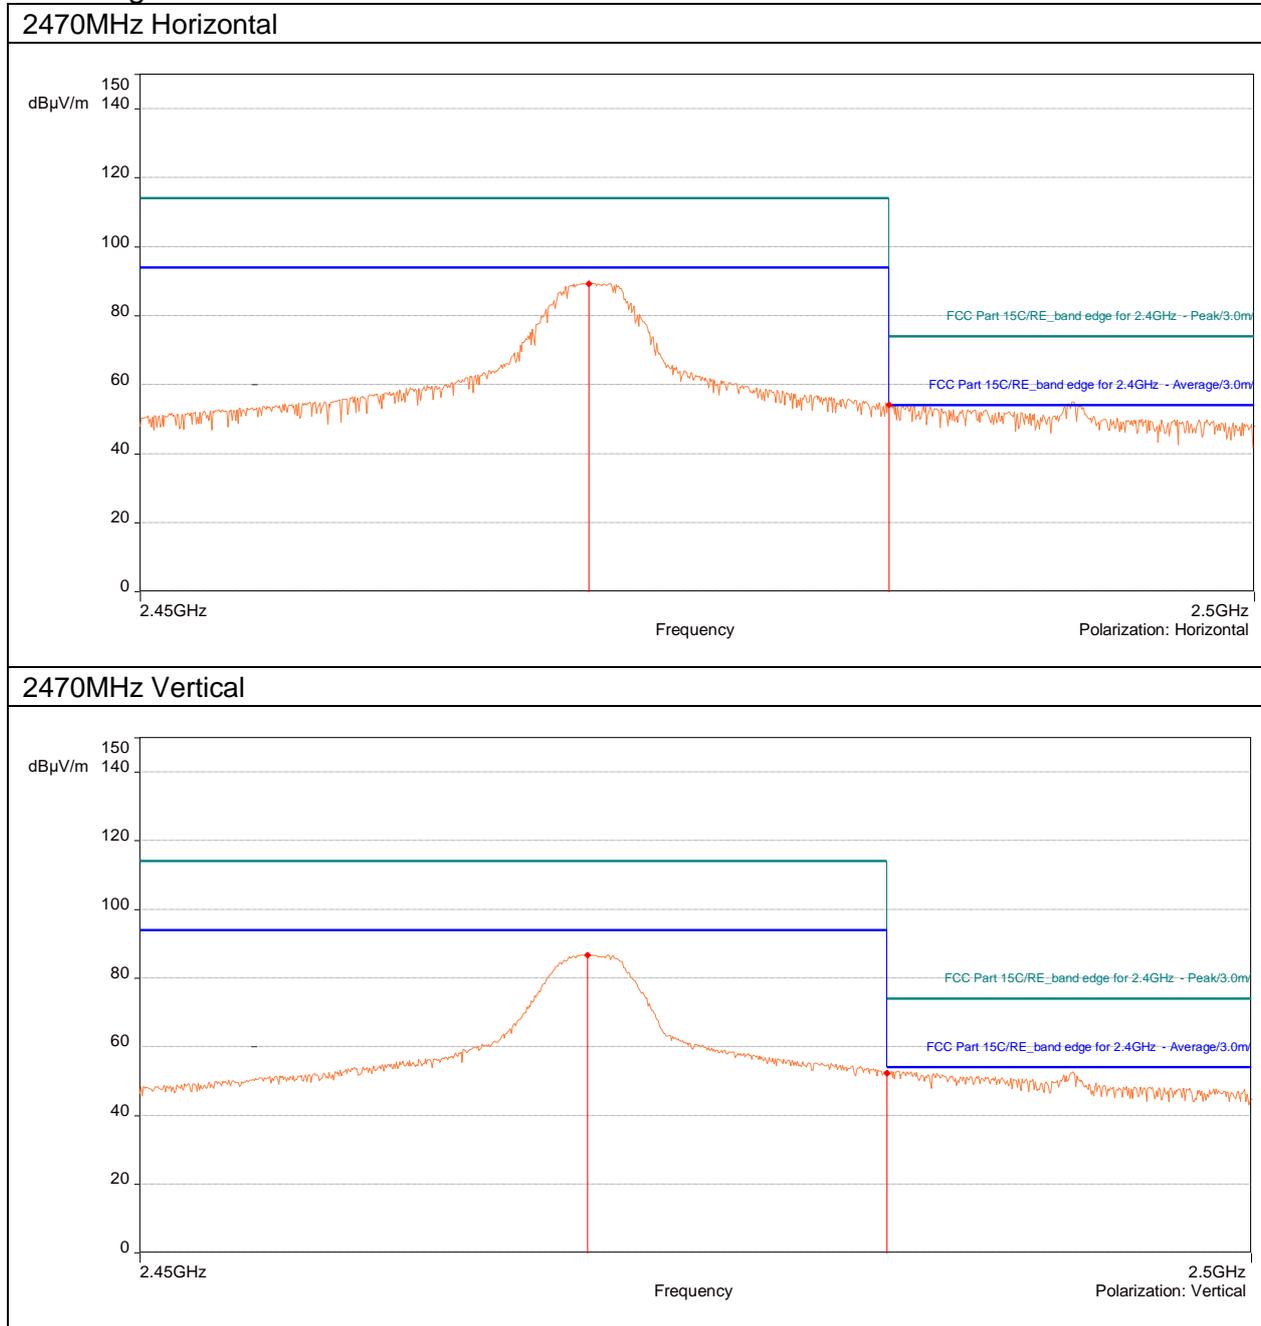



TEST REPORT NUMBER: (8523)124-0051

5.1.4.3 Calculation of Average Factor


Effective period of the cycle = 0.435ms

The duration of one cycle = 8.054ms

Duty Cycle = 0.435ms / 8.054ms = 5.4%


Averaging factor in dB = $20 \log(\text{duty cycle}) = 20 \log(5.4\%) = -25.35\text{dB}$

100ms Duty Cycle

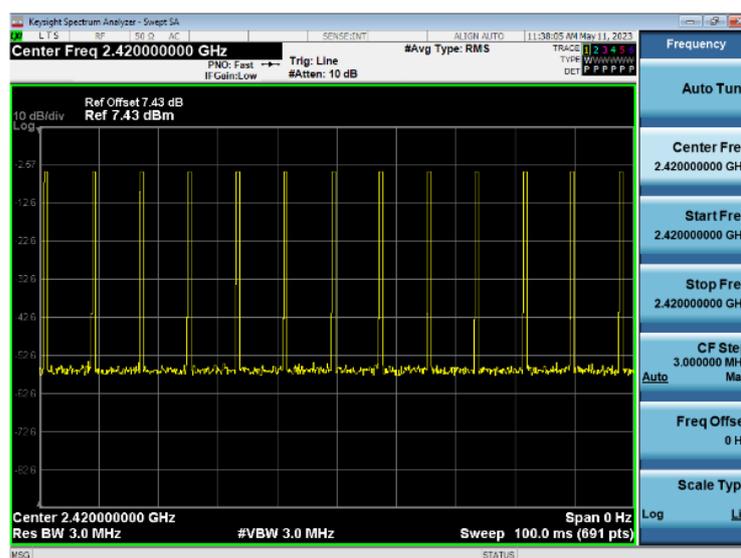


TEST REPORT NUMBER: (8523)124-0051

Ton of one cycle

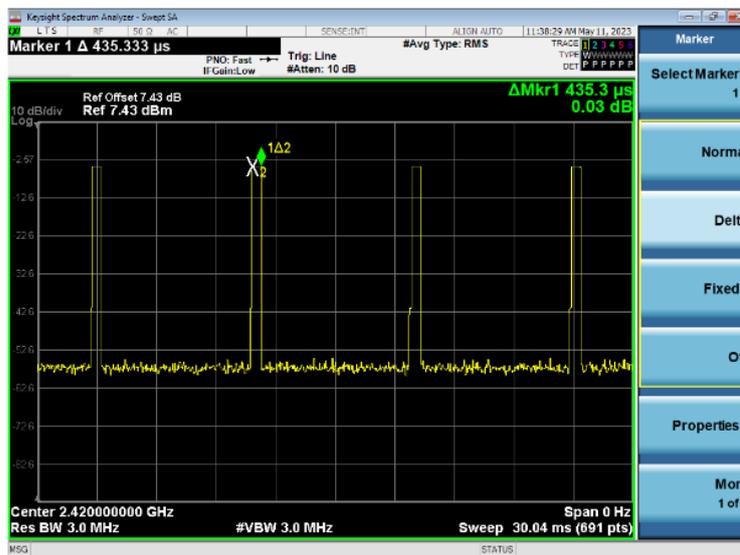

The duration of one cycle

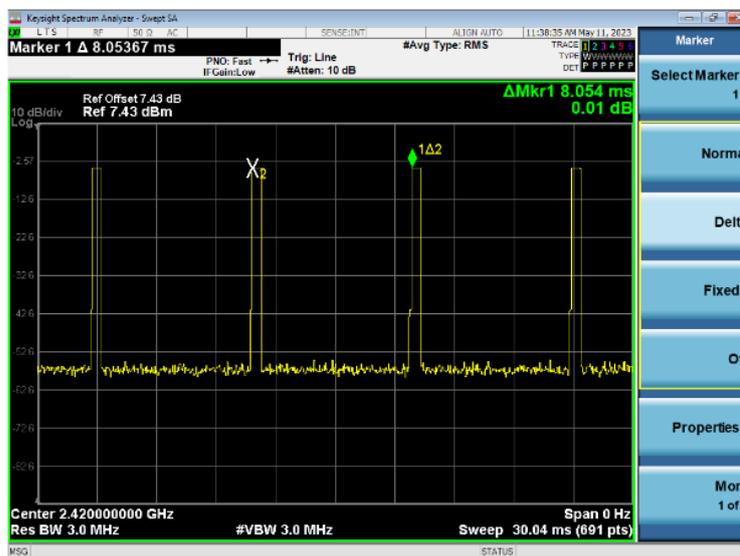



TEST REPORT NUMBER: (8523)124-0051

5.2 20dB Bandwidth

For test instruments and accessories used see section 6

5.2.1 Test Procedures

- (1) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- (2) Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- (3) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- (4) Repeat above procedures until all frequencies measured were complete.

5.2.2 Test Setup



5.2.3 Test Limits

According to FCC 15.215(c), must be designed to ensure that the 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

5.2.4 Test Results

Channel	Frequency (MHz)	20dB Bandwidth
The lowest channel	2420	3.90
The middle channel	2445	2.60
The highest channel	2470	3.02



TEST REPORT NUMBER: (8523)124-0051



2420MHz



2445MHz



TEST REPORT NUMBER: (8523)124-0051



2470MHz



TEST REPORT NUMBER: (8523)124-0051

5.3.3 Test Limits

Standard: FCC Part 15 §15.207(a)		
Frequency of emission (MHz)	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.
2. The lower limit shall apply at the transition frequencies.

5.3.4 Test Results

Not Applicable

Note: The device is a DC power supply and does not apply to conducted emissions.

5.4 Antenna Requirements

5.4.1 Test Standard:

FCC Part 15, Subpart C 15.203

5.4.2 Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user. but the use of a standard antenna jack or electrical connector is prohibited.

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropic ally radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

5.4.3 EUT Antenna:

The antenna is Monopole Antenna and no consideration of replacement. The best case gain of the antenna is 0dBi. Antenna location: Refer to Appendix (Internal photos).



TEST REPORT NUMBER: (8523)124-0051

6 Test Equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	Keysight	N9010A	MY51120099	2023/03/13	2024/03/13
2	JS0806-2 RF Control Unit	Tonscend	JS0806-2	188060124	2022/08/09	2023/08/09
3	Broadband Preamplifier	SCHWARZBECK	BBV 9743B	00067	2023/03/14	2024/03/14
4	Broadband Preamplifier	SCHWARZBECK	BBV 9718B	00002	2023/03/14	2024/03/14
5	EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102452	2023/03/13	2024/03/13
6	Trilog Broadband Antenna	SCHWARZBECK	VULB 9163	9163-1127	2021/07/12	2023/07/12
7	Horn Antenna	SCHWARZBECK	BBHA 9120D	01829	2023/03/08	2024/03/08
8	DC Power Supply	MAISEN	MP5030D	2018121557	2022/08/02	2023/08/02
9	Vector Signal Generator	Keysight	N5172B	MY53052255	2023/03/13	2024/03/13
10	Analog Signal Generator	Keysight	N5171B	MY53051692	2023/03/13	2024/03/13
11	Temperature Humidity Chamber	Yiheng	BPS-50CB	191005684	2022/07/28	2023/07/28
12	Temperature and Humidity Indicator	JianDaRenKe	Cos-03	612058	2022/08/02	2023/08/02
13	BAT-EMC Testing (Test Software)	NEXIO	BAT-EMC	Version: 3.16.0.74	N/A	N/A
14	JS1120-3 Test System (Test Software)	Tonscend	JS1120-3	Version: 2.5.77.0418	N/A	N/A
15	Double Ridge Guide Horn Antennas	A.H.Systems	SAS-574	588	2021/06/28	2023/06/28
16	Active Loop Antenna	HRTY	HR8913A	69331322060 23	2022/07/15	2023/07/15



TEST REPORT NUMBER: (8523)124-0051

7 Test Photographs

Referring to – “(8523)124-0051(C)”.

8 Photos of the EUT

Referring to – “(8523)124-0051(A)” and “(8523)124-0051(B)”.

END OF TEST REPORT