

S

T

S

L

A

B



## FCC SAR TEST REPORT

Report No: STS1607013H01

Issued for

Shenzhen Jingwah Information Technology Co., Ltd.  
4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian  
District, Shenzhen, China

|                              |                             |
|------------------------------|-----------------------------|
| <b>Product Name:</b>         | Tablet PC                   |
| <b>Brand Name:</b>           | Smartab, Polaroid           |
| <b>Model Name:</b>           | F102                        |
| <b>Series Model:</b>         | ST1009x, M10, ST1009        |
| <b>FCC ID:</b>               | RBD-F102                    |
| <b>Test Standard:</b>        | ANSI/IEEE Std. C95.1        |
|                              | FCC 47 CFR Part 2 ( 2.1093) |
|                              | IEEE 1528: 2013             |
| <b>Max. Report SAR (1g):</b> | Body:1.207 W/kg             |

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.





## Test Report Certification

**Applicant's name** ..... : Shenzhen Jingwah Information Technology Co., Ltd.  
**Address** ..... : 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District, Shenzhen, China  
**Manufacture's Name** ..... : Shenzhen Jingwah Information Technology Co., Ltd.  
**Address** ..... : 4F, Bldg 4, Jinghua Square, No.1 Huafa North Road, Futian District, Shenzhen, China

### Product description

**Product name** ..... : Tablet PC  
**Trademark** ..... : Smartab, Polaroid  
**Model and/or type reference** : F102  
**Series Model** : ST1009x, M10, ST1009

**Standards** ..... : ANSI/IEEE Std. C95.1-1992  
FCC 47 CFR Part 2 ( 2.1093)  
IEEE 1528: 2013

The device was tested by Shenzhen STS Test Services Co., Ltd. in accordance with the measurement methods and procedures specified in KDB 865664 The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Date of Test** ..... :  
**Date (s) of performance of tests** ..... : 11 July 2016  
**Date of Issue** ..... : 12 July 2016  
**Test Result** ..... : **Pass**

Testing Engineer :

*Allen Chen*

(Allen Chen)

Technical Manager :

*John Zou*

(John Zou)

Authorized Signatory :

*Bovey Yang*

(Bovey Yang)





## Table of Contents

|                                                                    |           |
|--------------------------------------------------------------------|-----------|
| <b>1.General Information</b>                                       | <b>4</b>  |
| 1.1 EUT Description                                                | 4         |
| 1.2 Test Environment                                               | 5         |
| 1.3 Test Factory                                                   | 5         |
| <b>2.Test Standards And Limits</b>                                 | <b>6</b>  |
| <b>3. SAR Measurement System</b>                                   | <b>7</b>  |
| 3.1 Definition Of Specific Absorption Rate (SAR)                   | 7         |
| 3.2 SAR System                                                     | 7         |
| <b>4. Tissue Simulating Liquids</b>                                | <b>10</b> |
| 4.1 Simulating Liquids Parameter Check                             | 10        |
| <b>5. SAR System Validation</b>                                    | <b>12</b> |
| 5.1 Validation System                                              | 12        |
| 5.2 Validation Result                                              | 12        |
| <b>6. SAR Evaluation Procedures</b>                                | <b>13</b> |
| <b>7. EUT Antenna Location Sketch</b>                              | <b>14</b> |
| 7.1 SAR test exclusion consider table                              | 15        |
| <b>8. EUT Test Position</b>                                        | <b>16</b> |
| 8.1Body-worn Position Conditions:                                  | 16        |
| 8.2 Hotspot mode exposure position condition                       | 16        |
| <b>9. Uncertainty</b>                                              | <b>17</b> |
| 9.1 Measurement Uncertainty                                        | 17        |
| 9.2 System validation Uncertainty                                  | 19        |
| <b>10. Conducted Power Measurement</b>                             | <b>21</b> |
| 10.1 Test power                                                    | 21        |
| 10.2 Tune-up Power                                                 | 22        |
| 10.3 SAR Test Exclusions Applied                                   | 23        |
| <b>11. EUT And Test Setup Photo</b>                                | <b>24</b> |
| 11.1 EUT Photo                                                     | 24        |
| 11.2 Setup Photo                                                   | 27        |
| <b>12. SAR Result Summary</b>                                      | <b>29</b> |
| 12.1 Body SAR                                                      | 29        |
| 12.2 repeated SAR measurement                                      | 29        |
| <b>13. Equipment List</b>                                          | <b>30</b> |
| <b>Appendix A. System Validation Plots</b>                         | <b>31</b> |
| <b>Appendix B. SAR Test Plots</b>                                  | <b>33</b> |
| <b>Appendix C. Probe Calibration And Dipole Calibration Report</b> | <b>42</b> |



## 1. General Information

Environmental evaluation measurements of specific absorption rate (SAR) distributions in emulated human head and body tissues exposed to radio frequency (RF) radiation from wireless portable devices for compliance with the rules and regulations of the U.S. Federal Communications Commission (FCC).

### 1.1 EUT Description

|                                                                                                                    |                                                                                                      |      |                             |
|--------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|------|-----------------------------|
| Equipment                                                                                                          | Tablet PC                                                                                            |      |                             |
| Brand Name                                                                                                         | Smartab, Polaroid                                                                                    |      |                             |
| Model No.                                                                                                          | F102                                                                                                 |      |                             |
| Series Model                                                                                                       | ST1009x, M10, ST1009                                                                                 |      |                             |
| FCC ID                                                                                                             | RBD-F102                                                                                             |      |                             |
| Model Difference                                                                                                   | Only different in model name and brand name                                                          |      |                             |
| Adapter                                                                                                            | Input: AC100-240V,300mA, 50/60 Hz<br>Output: DC 5V, 1500mA                                           |      |                             |
| Battery                                                                                                            | Rated Voltage: 3.7V;<br>Charge Limit: 4.2V;<br>Capacity: 4000mAh                                     |      |                             |
| Device Category                                                                                                    | Portable                                                                                             |      |                             |
| Product stage                                                                                                      | Production unit                                                                                      |      |                             |
| RF Exposure Environment                                                                                            | General Population / Uncontrolled                                                                    |      |                             |
| Hardware Version                                                                                                   | Android version 6.0.1                                                                                |      |                             |
| Software Version                                                                                                   | EM-SK8811-MB-V2.0                                                                                    |      |                             |
| Frequency Range                                                                                                    | IEEE 802.11b/g/n 20: 2412 MHz to 2472 MHz<br>Bluetooth:2402 MHz to 2480MHz                           |      |                             |
| Max. Reported SAR(1g):                                                                                             | Band                                                                                                 | Mode | Body Worn and Hotspot(W/kg) |
|                                                                                                                    | DTS                                                                                                  | WIFI | 1.207                       |
| FCC Equipment Class                                                                                                | Digital Transmission System (DTS)<br>Part 15 Spread Spectrum Transmitter (DSS)                       |      |                             |
| Operating Mode:                                                                                                    | WLAN: 802.11 b/g/n(HT20);<br>Bluetooth: V3.0 + EDR (GFSK + $\pi$ /4DQPSK+8DPSK) ;<br>Bluetooth: V4.0 |      |                             |
| Antenna Specification:                                                                                             | BT,WIFI: PIFA Antenna                                                                                |      |                             |
| Hotspot Mode:                                                                                                      | Support                                                                                              |      |                             |
| DTM Mode:                                                                                                          | Not Support                                                                                          |      |                             |
| Note:<br>The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power |                                                                                                      |      |                             |



## 1.2 Test Environment

Ambient conditions in the SAR laboratory:

| Items            | Required | Actual |
|------------------|----------|--------|
| Temperature (°C) | 18-25    | 22~23  |
| Humidity (%RH)   | 30-70    | 55~65  |

## 1.3 Test Factory

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F, Building B, Zhuoke Science Park, No.190, Chongqing Road, Fuyong, Baoan District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649;

FCC Registration No.: 842334;

IC Registration No.: 12108A-1





## 2. Test Standards And Limits

| No. | Identity                            | Document Title                                                                                                                                                              |
|-----|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | 47 CFR Part 2                       | Frequency Allocations and Radio Treaty Matters; General Rules and Regulations                                                                                               |
| 2   | ANSI/IEEE Std. C95.1-1992           | IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz                                                  |
| 3   | IEEE Std. 1528-2013                 | Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques |
| 4   | FCC KDB 447498 D01 v06              | Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies                                                                                      |
| 5   | FCC KDB 865664 D01 v01r04           | SAR Measurement 100 MHz to 6 GHz                                                                                                                                            |
| 6   | FCC KDB 865664 D02 v01r02           | RF Exposure Reporting                                                                                                                                                       |
| 7   | FCC KDB 941225 D06 v02r01           | Hotspot Mode SAR                                                                                                                                                            |
| 8   | FCC KDB 648474 D04 v01r03           | SAR Evaluation Considerations for Wireless Handsets                                                                                                                         |
| 9   | FCC KDB 248227 D01 Wi-Fi SAR v02r02 | SAR Considerations for 802.11 Devices                                                                                                                                       |

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body   Partial-Body   Hands, Wrists, Feet and Ankles

0.4                      8.0                      20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body   Partial-Body   Hands, Wrists, Feet and Ankles

0.08                      1.6                      4.0

NOTE: Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

**Population/Uncontrolled Environments:**

are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Occupational/Controlled Environments:**

are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**NOTE**

**GENERAL POPULATION/UNCONTROLLED EXPOSURE**

**PARTIAL BODY LIMIT**

**1.6 W/kg**


### 3.1 Definition Of Specific Absorption Rate (SAR)

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

SAR is expressed in units of Watts per kilogram (W/kg) SAR measurement can be related to the electrical field in the tissue by

Where:  $\sigma$  is the conductivity of the tissue,  
 $\rho$  is the mass density of the tissue and  $E$  is the RMS electrical field strength.

### SATIMO SAR System Diagram:



- Main computer to control all the system
- 6 axis robot
- Data acquisition system
- Miniature E-field probe
- Phone holder
- Head simulating tissue

The following figure shows the system.



The EUT under test operating at the maximum power level is placed in the phone holder, under the phantom, which is filled with head simulating liquid. The E-Field probe measures the electric field inside the phantom. The OpenSAR software computes the results to give a SAR value in a 1g or 10g mass.

### 3.2.1 Probe

For the measurements the Specific Dosimetric E-Field Probe SN 45/15 EPGO281 with following specifications is used

- Dynamic range: 0.01-100 W/kg
- Tip Diameter: 2.5 mm
- Length of Individual Dipoles: 2 mm
- Maximum external diameter: 8 mm
- Distance between dipoles / probe extremity: 2.7 mm (repeatability better than +/- 1mm)
- Probe linearity:  $0 \pm 2.60\%$  ( $\pm 0.11$  dB)
- Axial Isotropy:  $< 0.25$  dB
- Spherical Isotropy:  $< 0.25$  dB
- Calibration range: 450MHz to 6GHz for head & body simulating liquid.
- Angle between probe axis (evaluation axis) and surface normal line: less than  $30^\circ$



**Figure 1** – MVG COMOSAR Dosimetric E-field Dipole

### 3.2.2 Phantom

For the measurements the Specific Anthropomorphic Mannequin (SAM) defined by the IEEE SCC-34/SC2 group is used. The phantom is a polyurethane shell integrated in a wooden table. The thickness of the phantom amounts to 2mm +/- 0.2mm. It enables the dosimetric evaluation of left and right phone usage and includes an additional flat phantom part for the simplified performance check. The phantom set-up includes a cover, which prevents the evaporation of the liquid.

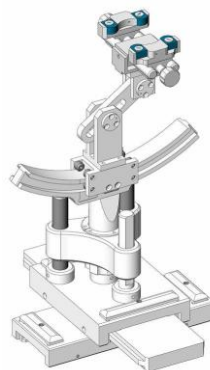


Figure-SN 32/14 SAM115



Figure-SN 32/14 SAM116

### 3.2.3 Device Holder



The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.



## 4. Tissue Simulating Liquids

### 4.1 Simulating Liquids Parameter Check

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

| Frequency (MHz) | Bactericide | DGBE  | HEC | NaCl | Sucrose | 1,2-Propanediol | X100  | Water | Conductivity | Permittivity |
|-----------------|-------------|-------|-----|------|---------|-----------------|-------|-------|--------------|--------------|
|                 | %           | %     | %   | %    | %       | %               | %     | %     | $\sigma$     | $\epsilon_r$ |
| 750             | /           | /     | /   | 0.79 | /       | 64.81           | /     | 34.40 | 0.97         | 41.8         |
| 835             | /           | /     | /   | 0.79 | /       | 64.81           | /     | 34.40 | 0.97         | 41.8         |
| 900             | /           | /     | /   | 0.79 | /       | 64.81           | /     | 34.40 | 0.97         | 41.8         |
| 1800            | /           | 13.84 | /   | 0.35 | /       | /               | 30.45 | 55.36 | 1.38         | 41.0         |
| 1900            | /           | 13.84 | /   | 0.35 | /       | /               | 30.45 | 55.36 | 1.38         | 41.0         |
| 2000            | /           | 7.99  | /   | 0.16 | /       | /               | 19.97 | 71.88 | 1.55         | 41.1         |
| 2450            | /           | 7.99  | /   | 0.16 | /       | /               | 19.97 | 71.88 | 1.88         | 40.3         |
| 2600            | /           | 7.99  | /   | 0.16 | /       | /               | 19.97 | 71.88 | 1.88         | 40.3         |

| Tissue dielectric parameters for head and body phantoms |              |      |          |      |
|---------------------------------------------------------|--------------|------|----------|------|
| Frequency                                               | $\epsilon_r$ |      | $\sigma$ |      |
|                                                         | Head         | Body | Head     | Body |
| 300                                                     | 45.3         | 58.2 | 0.87     | 0.92 |
| 450                                                     | 43.5         | 58.7 | 0.87     | 0.94 |
| 900                                                     | 41.5         | 55.0 | 0.97     | 1.05 |
| 1450                                                    | 40.5         | 54.0 | 1.20     | 1.30 |
| 1800                                                    | 40.0         | 53.3 | 1.40     | 1.52 |
| 2450                                                    | 39.2         | 52.7 | 1.80     | 1.95 |
| 3000                                                    | 38.5         | 52.0 | 2.40     | 2.73 |
| 5800                                                    | 35.3         | 48.2 | 5.27     | 6.00 |

**LIQUID MEASUREMENT RESULTS****Date:** 11 July 2016 **Ambient condition:** Temperature 22.7°C **Relative humidity:** 49%

| Body Simulating Liquid |               | Parameters    | Target | Measured | Deviation[%] | Limited[%] |
|------------------------|---------------|---------------|--------|----------|--------------|------------|
| Frequency              | Temp.<br>[°C] |               |        |          |              |            |
| 2450 MHz               | 22.30         | Permittivity: | 52.70  | 53.41    | 1.35         | ± 5        |
|                        |               | Conductivity: | 1.95   | 1.93     | -1.03        | ± 5        |




## 5. SAR System Validation

### 5.1 Validation System

Each SATIMO system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the SATIMO software, enable the user to conduct the system performance check and system validation. System kit includes a dipole, and dipole device holder.

The system check verifies that the system operates within its specifications. It's performed daily or before every SAR measurement. The system check uses normal SAR measurement in the flat section of the phantom with a matched dipole at a specified distance. The system validation setup is shown as below.

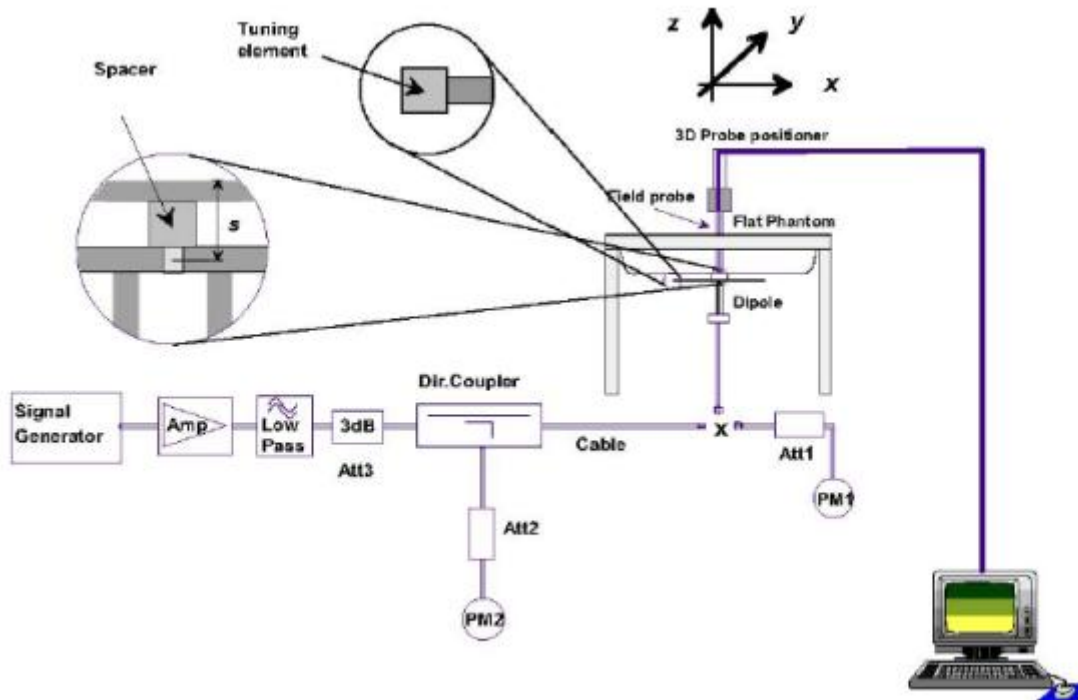

### 5.2 Validation Result

Comparing to the original SAR value provided by SATIMO, the validation data should be within its specification of 10 %.

**Ambient condition:** Temperature 22.7°C Relative humidity: 49%

| Freq.(MHz) | Power(mW) | Tested Value (W/Kg) | Normalized SAR (W/kg) | Target(W/Kg) | Tolerance(%) | Date       |
|------------|-----------|---------------------|-----------------------|--------------|--------------|------------|
| 2450 Body  | 100       | 5.317               | 53.17                 | 52.4         | 1.47         | 2016-07-11 |

Note: The tolerance limit of System validation  $\pm 10\%$ .



## 6. SAR Evaluation Procedures

The procedure for assessing the average SAR value consists of the following steps:


The following steps are used for each test position

- Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface
- Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
- Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
- Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

Area Scan& Zoom Scan:

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR -distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01r01 quoted below.


When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

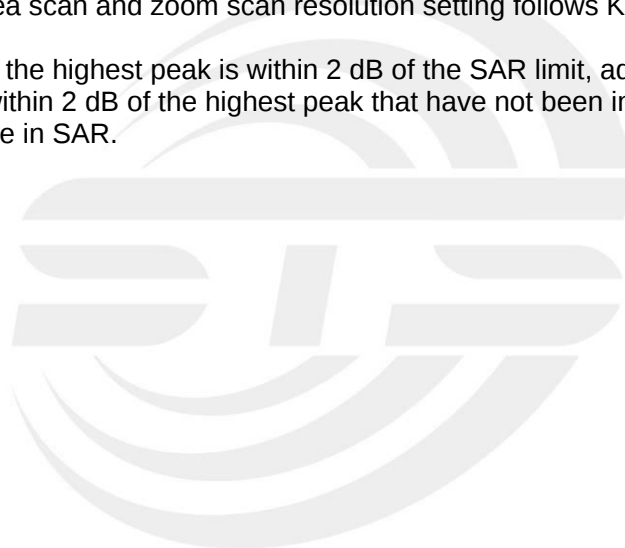



## 7. EUT Antenna Location Sketch

It is a Tablet PC, support WIFI/BT mode.

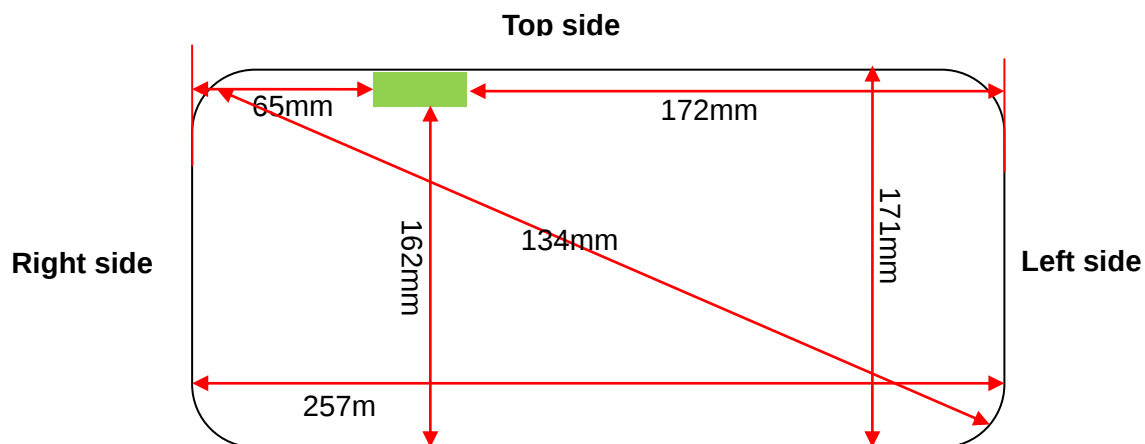

**Bottom side  
(Back view)**



WIFI/BT Antenna



## 7.1 SAR test exclusion consider table

According with FCC KDB 447498 D01, appendix A, <SAR test exclusion thresholds for 100MHz ~ 6GHz and  $\leq 50\text{mm}$ > table, this device SAR test configurations consider as following:

| Band    | Test position configurations |      |            |           |          |             |
|---------|------------------------------|------|------------|-----------|----------|-------------|
|         | Front                        | Back | Right edge | Left edge | Top edge | Bottom edge |
| WIFI/BT | <5mm                         | <5mm | 65mm       | 172mm     | <5mm     | 162mm       |
|         | Yes                          | Yes  | No         | No        | Yes      | No          |

### Note:

1. maximum power is the source-based time-average power and represents the maximum RF output power among production units.
2. per KDB 447498 D01, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
3. per KDB 447498 D01, standalone SAR test exclusion threshold is applied; if the distance of the antenna to the user is <5mm, 5mm is user to determine SAR exclusion threshold
4. per KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distance  $\leq 50\text{mm}$  are determined by:  
$$[(\text{max.power of channel, including tune-up tolerance, Mw})/(\text{min. test separation distance, mm})] \times [f(\text{GHz})] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR}$$
$$f(\text{GHz}) \text{ is the RF channel transmit frequency in GHz. Power and distance are rounded to the nearest mW and mm before calculation. The result is rounded to one decimal place for comparison}$$


For <50mm distance, we just calculate mW of the exclusion threshold value(3.0)to do compare
5. per KDB 447498 D01, at 100 MHz to 6GHz and for test separation distances >50mm, the SAR test exclusion threshold is determined according to the following
  - a)[threshold at 50mm in step 1]+(test separation distance -50mm)\*(f (MHz)/150)]Mw, at 100 MHz to 1500 MHz
  - b) [threshold at 50mm in step1]+( test separation distance -50mm) \*10]mW at > 1500MHz and  $\leq 6\text{GHz}$
6. Per KDB 447498 D02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/ HSUPA/DC-HSDPA output power is <0.25db higher than RMC 12.2Kbps,or reported SAR with RMC 12.2kbps setting is  $\leq 1.2\text{W/Kg}$ , HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
7. Per KDB 248227 D01, choose the highest output power channel to test SAR and determine further SAR exclusion 8.for each frequency band ,testing at higher data rates and higher order modulations is not required when the maximum average output power for each of each of these configurations is less than 1/4db higher than those measured at the lower data rate than 11b mode ,thus the SAR can be excluded.

## 8. EUT Test Position

This EUT was tested in Front Face and Rear Face.

### 8.1 Body-worn Position Conditions:


Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in KDB Publication 447498 D01 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. When the same wireless transmission configuration is used for testing body-worn accessory and hotspot mode SAR, respectively, in voice and data mode, SAR results for the most conservative *test separation distance* configuration may be used to support both SAR conditions. When the *reported* SAR for a body-worn accessory, measured without a headset connected to the handset, is  $> 1.2 \text{ W/kg}$ , the highest *reported* SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

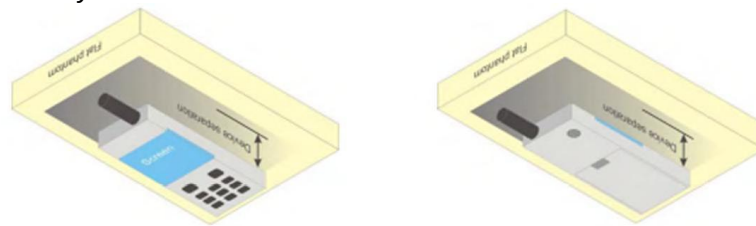

### 8.2 Hotspot mode exposure position condition

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing function, the relevant hand and body exposure condition are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surface and edges with a transmitting antenna located within 25 mm from that surface or edge.

When form factor of a handset is smaller than 9cm x 5cm, a test separation distance of 5mm (instead of 10mm) is required for testing hotspot mode. When the separate distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration(surface).

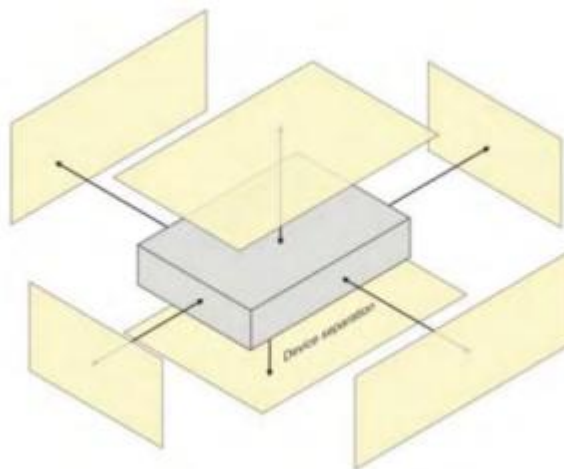



## 9. Uncertainty

### 9.1 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in IEEE 1528: 2013. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

| NO                                          | Source                                          | Tol(%) | Prob. Dist. | Div. k     | ci (1g)        | ci (10g)       | 1gUi | 10gUi | Veff     |
|---------------------------------------------|-------------------------------------------------|--------|-------------|------------|----------------|----------------|------|-------|----------|
| Measurement System <input type="checkbox"/> |                                                 |        |             |            |                |                |      |       |          |
| 1                                           | Probe calibration                               | 5.8    | N           | 1          | 1              | 1              | 5.8  | 5.8   | $\infty$ |
| 2                                           | Axial isotropy                                  | 3.5    | R           | $\sqrt{3}$ | $(1-cp)^{1/2}$ | $(1-cp)^{1/2}$ | 1.43 | 1.43  | $\infty$ |
| 3                                           | Hemispherical isotropy                          | 5.9    | R           | $\sqrt{3}$ | $\sqrt{C_p}$   | $\sqrt{C_p}$   | 2.41 | 2.41  | $\infty$ |
| 4                                           | Boundary effect                                 | 1.0    | R           | $\sqrt{3}$ | 1              | 1              | 0.58 | 0.58  | $\infty$ |
| 5                                           | Linearity                                       | 4.7    | R           | $\sqrt{3}$ | 1              | 1              | 2.71 | 2.71  | $\infty$ |
| 6                                           | System Detection limits                         | 1.0    | R           | $\sqrt{3}$ | 1              | 1              | 0.58 | 0.58  | $\infty$ |
| 7                                           | Readout electronics                             | 0.5    | N           | 1          | 1              | 1              | 0.50 | 0.50  | $\infty$ |
| 8                                           | Response time                                   | 0      | R           | $\sqrt{3}$ | 1              | 1              | 0    | 0     | $\infty$ |
| 9                                           | Integration time                                | 1.4    | R           | $\sqrt{3}$ | 1              | 1              | 0.81 | 0.81  | $\infty$ |
| 10                                          | Ambient noise                                   | 3.0    | R           | $\sqrt{3}$ | 1              | 1              | 1.73 | 1.73  | $\infty$ |
| 11                                          | Ambient reflections                             | 3.0    | R           | $\sqrt{3}$ | 1              | 1              | 1.73 | 1.73  | $\infty$ |
| 12                                          | Probe positioner mech. restrictions             | 1.4    | R           | $\sqrt{3}$ | 1              | 1              | 0.81 | 0.81  | $\infty$ |
| 13                                          | Probe positioning with respect to phantom shell | 1.4    | R           | $\sqrt{3}$ | 1              | 1              | 0.81 | 0.81  | $\infty$ |
| 14                                          | Max.SAR evaluation                              | 1.0    | R           | $\sqrt{3}$ | 1              | 1              | 0.6  | 0.6   | $\infty$ |
| Test sample related                         |                                                 |        |             |            |                |                |      |       |          |



|                              |                              |                  |     |                                         |      |      |        |        |    |
|------------------------------|------------------------------|------------------|-----|-----------------------------------------|------|------|--------|--------|----|
| 15                           | Device positioning           | 2.6              | N   | 1                                       | 1    | 1    | 2.6    | 2.6    | 11 |
| 16                           | Device holder                | 3                | N   | 1                                       | 1    | 1    | 3.0    | 3.0    | 7  |
| 17                           | Drift of output power        | 5.0              | R   | √3                                      | 1    | 1    | 2.89   | 2.89   | ∞  |
| Phantom and set-up           |                              |                  |     |                                         |      |      |        |        |    |
| 18                           | Phantom uncertainty          | 4.0              | R   | √3                                      | 1    | 1    | 2.31   | 2.31   | ∞  |
| 19                           | Liquid conductivity (target) | 2.5              | N   | 1                                       | 0.78 | 0.71 | 1.95   | 1.78   | 5  |
| 20                           | Liquid conductivity (meas)   | 4                | N   | 1                                       | 0.23 | 0.26 | 0.92   | 1.04   | 5  |
| 21                           | Liquid Permittivity (target) | 2.5              | N   | 1                                       | 0.78 | 0.71 | 1.95   | 1.78   | ∞  |
| 22                           | Liquid Permittivity (meas)   | 5.0              | N   | 1                                       | 0.23 | 0.26 | 1.15   | 1.30   | ∞  |
| Combined standard            |                              |                  | RSS | $U_c = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$ |      |      | 10.63% | 10.54% |    |
| Expanded uncertainty (P=95%) |                              | $U = k U_c, k=2$ |     |                                         |      |      | 21.26% | 21.08% |    |



## 9.2 System validation Uncertainty

| NO                                          | Source                                          | Tol(%) | Prob. Dist. | Div. k     | ci (1g)         | ci (10g)        | 1gUi | 10gUi | Veff     |
|---------------------------------------------|-------------------------------------------------|--------|-------------|------------|-----------------|-----------------|------|-------|----------|
| Measurement System <input type="checkbox"/> |                                                 |        |             |            |                 |                 |      |       |          |
| 1                                           | Probe calibration                               | 5.8    | N           | 1          | 1               | 1               | 5.8  | 5.8   | $\infty$ |
| 2                                           | Axial isotropy                                  | 3.5    | R           | $\sqrt{3}$ | $(1-c_p)^{1/2}$ | $(1-c_p)^{1/2}$ | 1.43 | 1.43  | $\infty$ |
| 3                                           | Hemispherical isotropy                          | 5.9    | R           | $\sqrt{3}$ | $\sqrt{C_p}$    | $\sqrt{C_p}$    | 2.41 | 2.41  | $\infty$ |
| 4                                           | Boundary effect                                 | 1.0    | R           | $\sqrt{3}$ | 1               | 1               | 0.58 | 0.58  | $\infty$ |
| 5                                           | Linearity                                       | 4.7    | R           | $\sqrt{3}$ | 1               | 1               | 2.71 | 2.71  | $\infty$ |
| 6                                           | System Detection limits                         | 1.0    | R           | $\sqrt{3}$ | 1               | 1               | 0.58 | 0.58  | $\infty$ |
| 7                                           | Modulation response                             | 0      | N           | 1          | 1               | 1               | 0    | 0     | $\infty$ |
| 8                                           | Readout electronics                             | 0.5    | N           | 1          | 1               | 1               | 0.50 | 0.50  | $\infty$ |
| 9                                           | Response time                                   | 0      | R           | $\sqrt{3}$ | 1               | 1               | 0    | 0     | $\infty$ |
| 10                                          | Integration time                                | 1.4    | R           | $\sqrt{3}$ | 1               | 1               | 0.81 | 0.81  | $\infty$ |
| 11                                          | Ambient noise                                   | 3.0    | R           | $\sqrt{3}$ | 1               | 1               | 1.73 | 1.73  | $\infty$ |
| 12                                          | Ambient reflections                             | 3.0    | R           | $\sqrt{3}$ | 1               | 1               | 1.73 | 1.73  | $\infty$ |
| 13                                          | Probe positioner mech. restrictions             | 1.4    | R           | $\sqrt{3}$ | 1               | 1               | 0.81 | 0.81  | $\infty$ |
| 14                                          | Probe positioning with respect to phantom shell | 1.4    | R           | $\sqrt{3}$ | 1               | 1               | 0.81 | 0.81  | $\infty$ |
| 15                                          | Max.SAR evaluation                              | 1.0    | R           | $\sqrt{3}$ | 1               | 1               | 0.6  | 0.6   | $\infty$ |
| Dipole                                      |                                                 |        |             |            |                 |                 |      |       |          |
| 16                                          | Deviation of experimental source from           | 4      | N           | 1          | 1               | 1               | 4.00 | 4.00  | $\infty$ |



|                              |                                                |                  |     |                                         |      |      |        |        |   |
|------------------------------|------------------------------------------------|------------------|-----|-----------------------------------------|------|------|--------|--------|---|
| 17                           | Input power and SAR drit measurement           | 5                | R   | √3                                      | 1    | 1    | 2.89   | 2.89   | ∞ |
| 18                           | Dipole Axis to liquid Distance                 | 2                | R   | √3                                      | 1    | 1    |        |        | ∞ |
| Phantom and set-up           |                                                |                  |     |                                         |      |      |        |        |   |
| 19                           | Phantom uncertainty                            | 4.0              | R   | √3                                      | 1    | 1    | 2.31   | 2.31   | ∞ |
| 20                           | Uncertainty in SAR correction for deviation(in | 2.0              | N   | 1                                       | 1    | 0.84 | 2      | 1.68   | ∞ |
| 21                           | Liquid conductivity (target)                   | 2                | N   | 1                                       | 1    | 0.84 | 2.00   | 1.68   | ∞ |
| 22                           | Liquid conductivity (temperature uncertainty)  | 2.5              | N   | 1                                       | 0.78 | 0.71 | 1.95   | 1.78   | 5 |
| 23                           | Liquid conductivity (meas)                     | 4                | N   | 1                                       | 0.23 | 0.26 | 0.92   | 1.04   | 5 |
| 24                           | Liquid Permittivity (target)                   | 2.5              | N   | 1                                       | 0.78 | 0.71 | 1.95   | 1.78   | ∞ |
| 25                           | Liquid Permittivity (temperature uncertainty)  | 2.5              | N   | 1                                       | 0.78 | 0.71 | 1.95   | 1.78   | 5 |
| 26                           | Liquid Permittivity (meas)                     | 5.0              | N   | 1                                       | 0.23 | 0.26 | 1.15   | 1.30   | ∞ |
| Combined standard            |                                                |                  | RSS | $U_C = \sqrt{\sum_{i=1}^n C_i^2 U_i^2}$ |      |      | 10.15% | 10.05% |   |
| Expanded uncertainty (P=95%) |                                                | $U = k U_C, k=2$ |     |                                         |      |      | 20.29% | 20.10% |   |



## 10. Conducted Power Measurement

### 10.1 Test power

#### WIFI 2.4G power

| Mode           | Channel Number | Frequency (MHz) | Average Power (dBm) |
|----------------|----------------|-----------------|---------------------|
| 802.11b        | 1              | 2412            | 11.67               |
|                | 6              | 2437            | 13.25               |
|                | 11             | 2462            | 13.67               |
| 802.11g        | 1              | 2412            | 5.77                |
|                | 6              | 2437            | 5.68                |
|                | 11             | 2462            | 5.74                |
| 802.11n(HT 20) | 1              | 2412            | 5.41                |
|                | 6              | 2437            | 5.33                |
|                | 11             | 2462            | 5.52                |

#### Bluetooth

| Mode                  | Channel Number | Frequency (MHz) | Average Power (dBm) |
|-----------------------|----------------|-----------------|---------------------|
| GFSK(1Mbps)           | 0              | 2402            | -4.48               |
|                       | 39             | 2441            | -3.03               |
|                       | 78             | 2480            | -1.85               |
| $\pi/4$ -DQPSK(2Mbps) | 0              | 2402            | -5.22               |
|                       | 39             | 2441            | -3.87               |
|                       | 78             | 2480            | -2.44               |
| 8-DPSK(3Mbps)         | 0              | 2402            | -5.26               |
|                       | 39             | 2441            | -3.86               |
|                       | 78             | 2480            | -2.60               |

#### BT 4.0

| Mode        | Channel Number | Frequency (MHz) | Average Power (dBm) |
|-------------|----------------|-----------------|---------------------|
| GFSK(1Mbps) | 0              | 2402            | -7.40               |
|             | 19             | 2440            | -6.50               |
|             | 39             | 2480            | -4.40               |




## 10.2 Tune-up Power

| Mode              | WIFI    |         |         |
|-------------------|---------|---------|---------|
| Detector          | AVG     |         |         |
| Frequency (MHz)   | 2412    | 2437    | 2462    |
| IEEE 802.11b      | 11±1dBm | 13±1dBm | 13±1dBm |
| IEEE 802.11g      | 5±1dBm  | 5±1dBm  | 5±1dBm  |
| IEEE 802.11n HT20 | 5±1dBm  | 5±1dBm  | 5±1dBm  |

| Mode            | BT      |         |         |
|-----------------|---------|---------|---------|
| Detector        | AVG     |         |         |
| Frequency (MHz) | 2402    | 2411    | 2480    |
| GFSK            | -4±1dBm | -3±1dBm | -1±1dBm |
| $\pi/4$ -DQPSK  | -5±1dBm | -3±1dBm | -2±1dBm |
| 8DPSK           | -5±1dBm | -3±1dBm | -2±1dBm |

| Mode            | BT4.0   |         |         |
|-----------------|---------|---------|---------|
| Detector        | AVG     |         |         |
| Frequency (MHz) | 2402    | 2440    | 2480    |
| GFSK            | -7±1dBm | -6±1dBm | -4±1dBm |

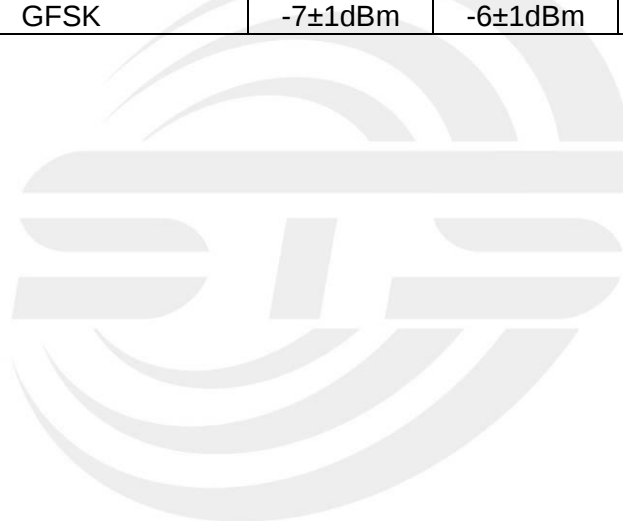



### 10.3 SAR Test Exclusions Applied

Per FCC KDB 447498D01, the 1-g SAR and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where:

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm is applied to determine SAR test exclusion.

$$\frac{\text{Max Power of Channel (mW)}}{\text{Test Separation Dist (mm)}} * \sqrt{\text{Frequency (GHz)}} \leq 3.0$$


Based on the maximum conducted power of **Bluetooth Body** (rounded to the nearest mW) and the antenna to user separation distance,

**Bluetooth Body SAR was not required;**  $[(0.653/5) * \sqrt{2.480}] = 0.21 < 3.0$ .

## 11. EUT And Test Setup Photo

### 11.1 EUT Photo


Front side

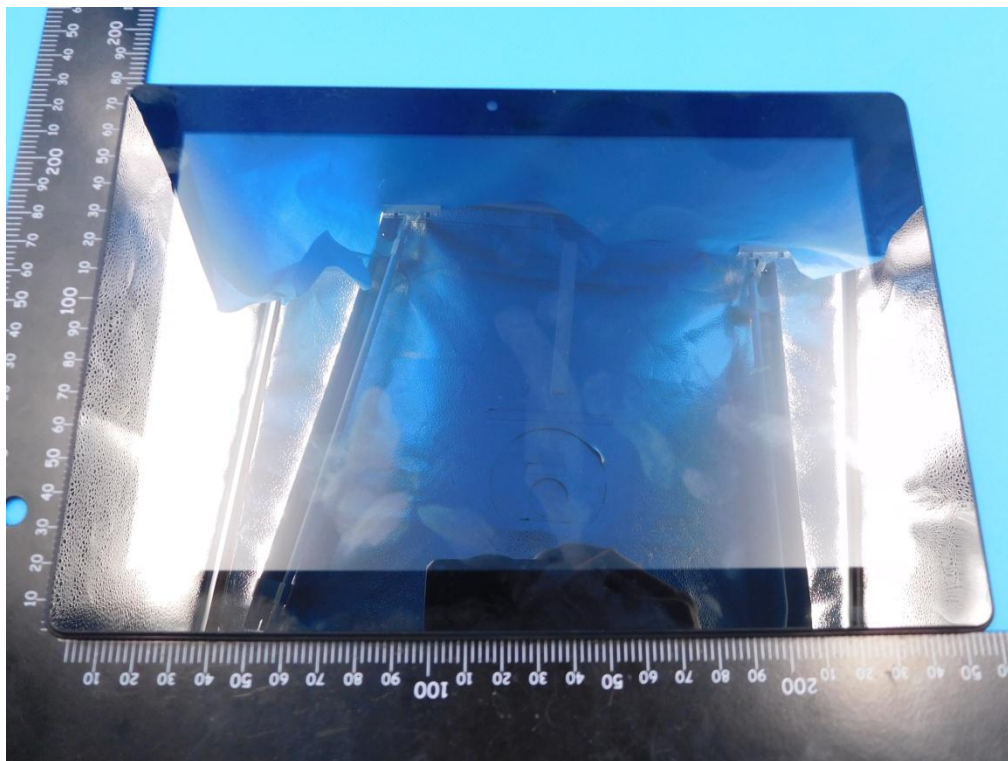


Back side




Top side

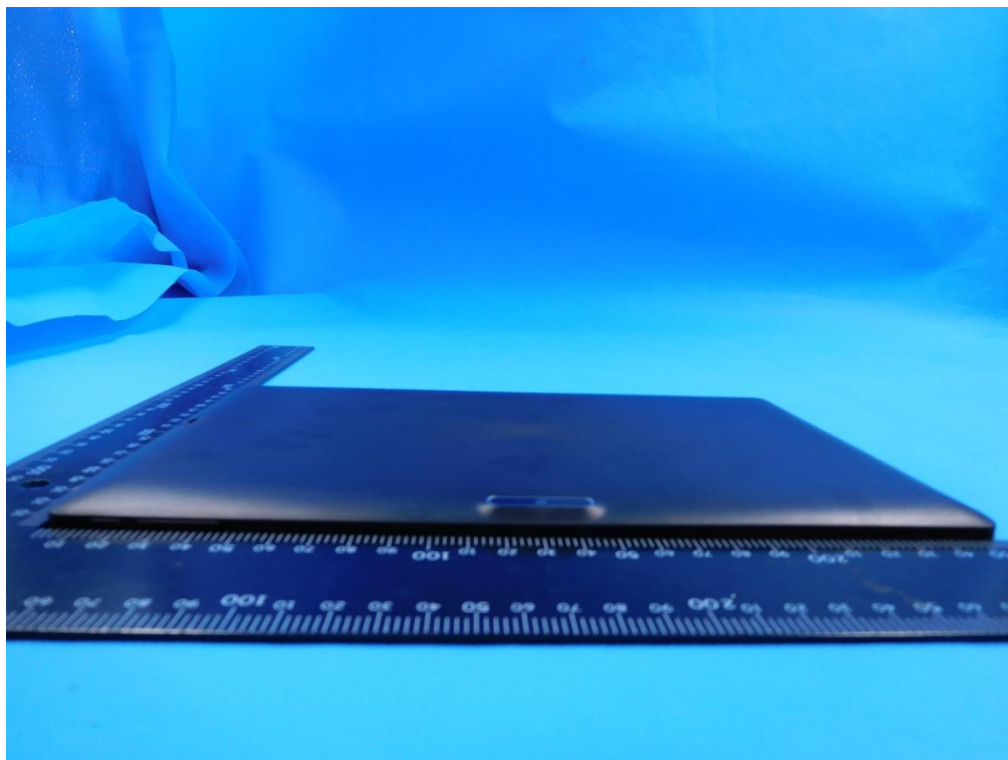


Bottom side

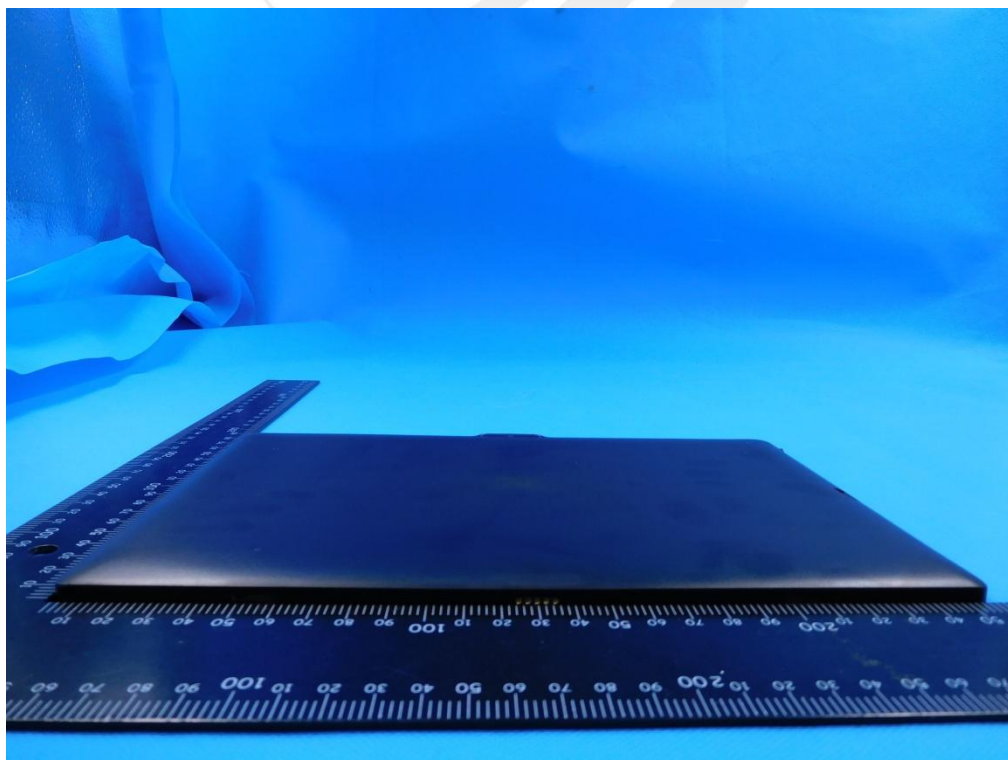

Left side

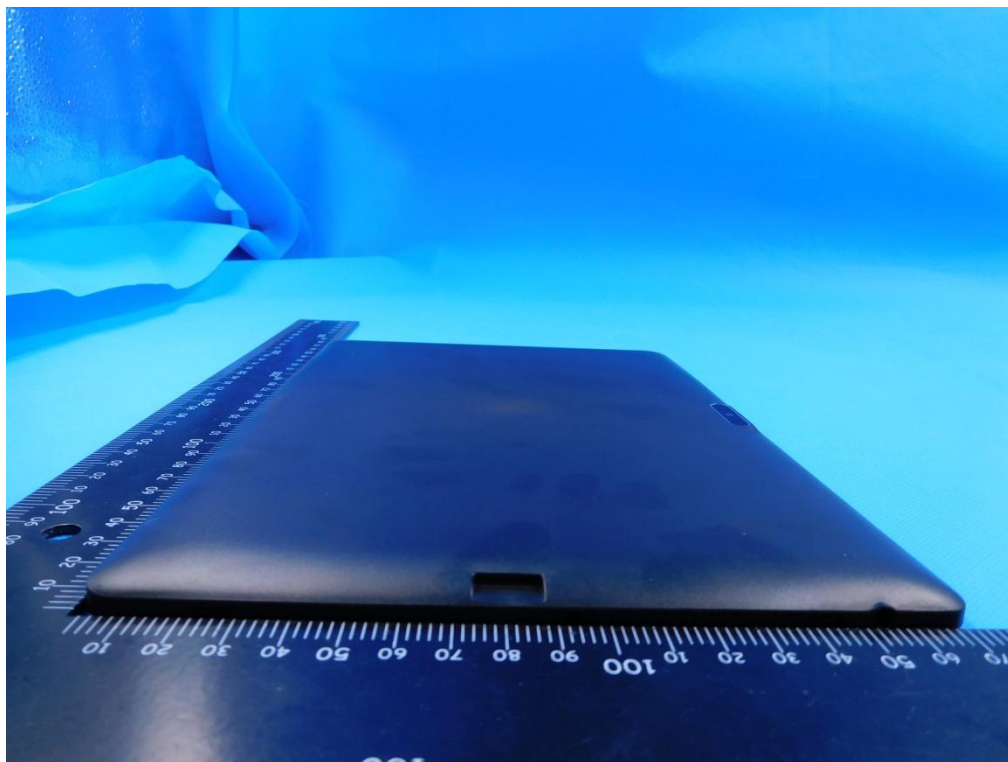

Right side

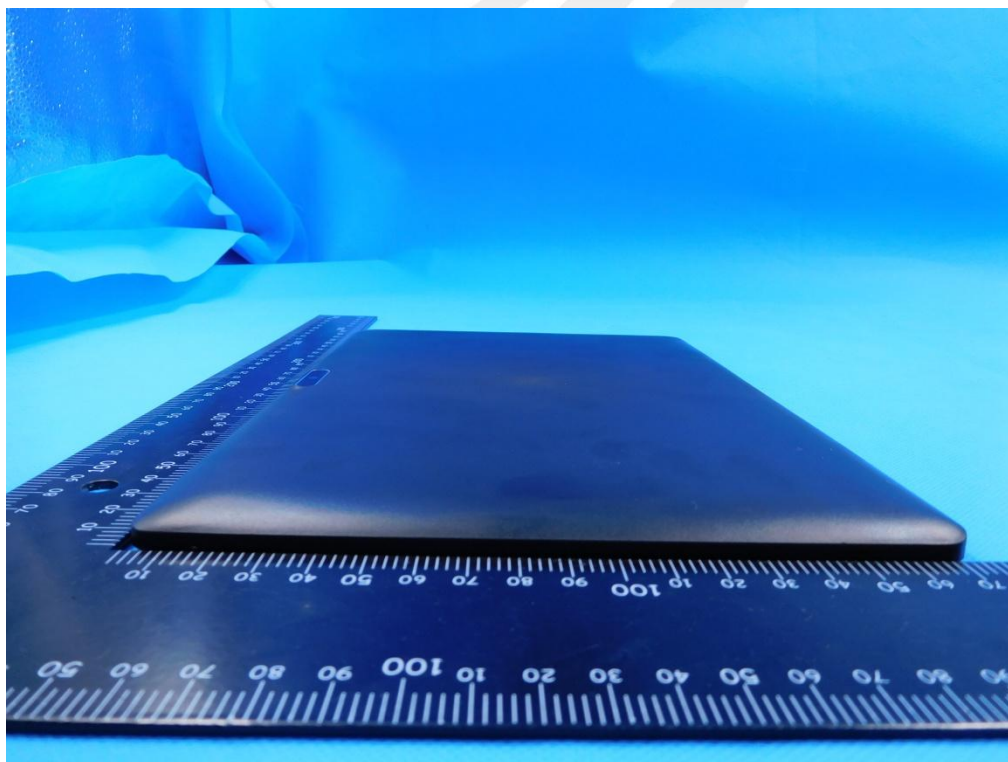

## 11.2 Setup Photo

Body Front side(separation distance is 0mm)




Body Back side(separation distance is 0mm)



Body top side(separation distance is 0mm)



Liquid depth (15 cm)

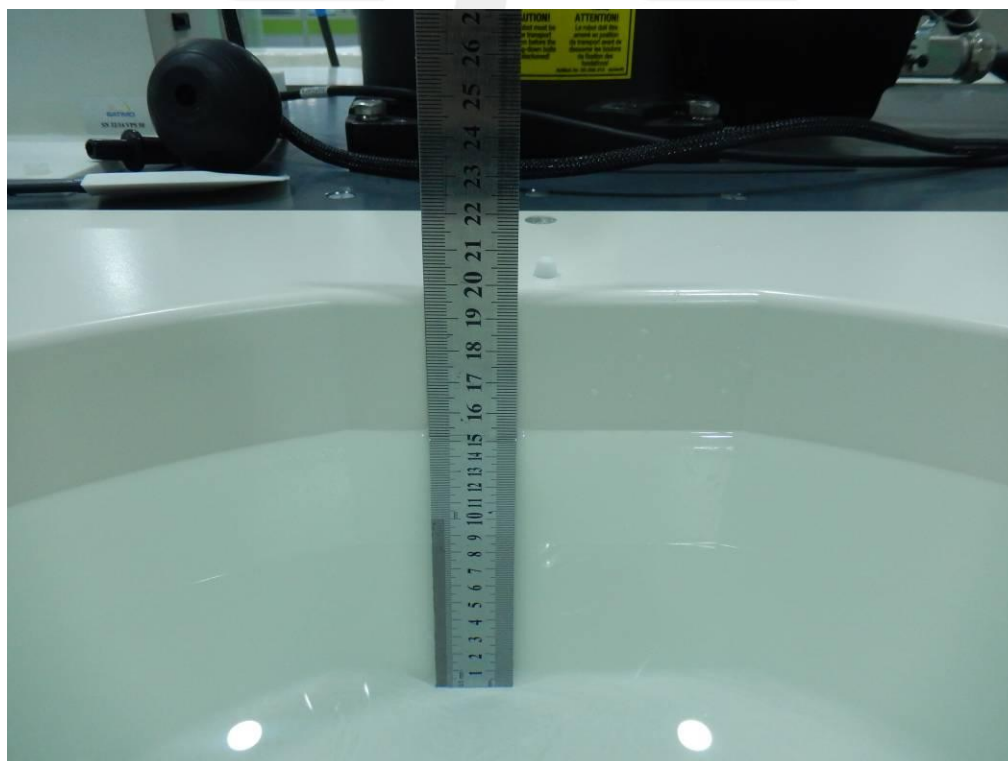



## 12. SAR Result Summary

### 12.1 Body SAR

| Band | Mode    | Test Position | Ch. | Result 1g (W/Kg) | Power Drift(%) | Max.Turn-up Power(dBm) | Meas.Output Power(dBm) | Duty cycle(%) | Scaled SAR (W/Kg) | Meas. No. |
|------|---------|---------------|-----|------------------|----------------|------------------------|------------------------|---------------|-------------------|-----------|
| WIFI | 802.11b | Front side    | 1   | 0.773            | -2.97          | 12                     | 11.67                  | 100           | 0.857             | 1         |
|      |         | Front side    | 6   | 0.867            | 1.00           | 14                     | 13.25                  | 100           | 0.946             | 2         |
|      |         | Front side    | 11  | 0.689            | -3.57          | 14                     | 13.76                  | 100           | 0.819             | 4         |
|      |         | Back side     | 1   | 1.067            | -1.25          | 12                     | 11.67                  | 100           | 1.183             | 5         |
|      |         | Back side     | 6   | 1.106            | 0.55           | 14                     | 13.25                  | 100           | <b>1.207</b>      | 6         |
|      |         | Back side     | 11  | 0.996            | 3.25           | 14                     | 13.76                  | 100           | 1.184             | 8         |
|      |         | Top side      | 6   | 0.467            | -0.62          | 14                     | 13.25                  | 100           | 0.510             | 9         |

Note:

1. The test separation of all above table is 0mm.
2. Per KDB 248227- When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg. (The highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power was **0.166** W/Kg for Body)

### Repeated SAR

| Band | Mode    | Test Position | Ch. | Result 1g (W/Kg) | Power Drift(%) | Max.Turn-up Power(dBm) | Meas.Output Power(dBm) | Scaled SAR (W/Kg) | Meas. No. |
|------|---------|---------------|-----|------------------|----------------|------------------------|------------------------|-------------------|-----------|
| WIFI | 802.11b | Front Side    | 6   | 0.854            | -1.24          | 14                     | 13.25                  | 0.932             | 3         |
| WIFI | 802.11b | Back Side     | 6   | 1.089            | 2.01           | 14                     | 13.25                  | 1.189             | 7         |

### 12.2 repeated SAR measurement

| Band | Mode    | Test Position | Ch. | Original Measured SAR 1g(mW/g) | 1st Repeated SAR 1g | Ratio | Original Measured SAR 1g(mW/g) | 2nd Repeated SAR 1g | Ratio |
|------|---------|---------------|-----|--------------------------------|---------------------|-------|--------------------------------|---------------------|-------|
| WIFI | 802.11b | Front Side    | 6   | 0.867                          | 0.854               | 1.02  | -                              | -                   | -     |
| WIFI | 802.11b | Back Side     | 6   | 1.106                          | 1.089               | 1.02  | -                              | -                   | -     |

Note:

1. Per KDB 865664 D01V01,for each frequency band ,repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$ W/Kg.
2. Per KDB 865664 D01V01,if the ratio of largest to smallest SAR for the original and first repeated measurement is  $\leq 1.2$  and the measured SAR  $< 1.45$ W/Kg, only one repeated measurement is required.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$ W/Kg
4. The ratio is the difference in percentage between original and repeated measured SAR.



### 13. Equipment List

| Kind of Equipment           | Manufacturer | Type No.                                                    | Serial No.               | Last Calibration | Calibrated Until |
|-----------------------------|--------------|-------------------------------------------------------------|--------------------------|------------------|------------------|
| 2450MHzDipole               | SATIMO       | SID2450                                                     | SN 30/14<br>DIP2G450-335 | 2014.09.01       | 2017.08.31       |
| E-Field Probe               | MVG          | SSE2                                                        | SN 45/15<br>EPMO281      | 2015.10.12       | 2016.10.11       |
| Antenna                     | SATIMO       | ANTA3                                                       | SN 07/13<br>ZNTA52       | 2014.09.01       | 2017.08.31       |
| Waveguide                   | SATIMO       | SWG5500                                                     | SN 13/14<br>WGA32        | 2014.09.01       | 2017.08.31       |
| Phantom1                    | SATIMO       | SAM                                                         | SN 32/14<br>SAM115       | N/A              | N/A              |
| Phantom2                    | SATIMO       | SAM                                                         | SN 32/14<br>SAM116       | N/A              | N/A              |
| SAR TEST BENCH              | SATIMO       | GSM and<br>WCDMA<br>mobile phone<br>POSITIONNIN<br>G SYSTEM | SN 32/14<br>MSH97        | N/A              | N/A              |
| SAR TEST BENCH              | SATIMO       | LAPTOP<br>POSITIONNIN<br>G SYSTEM                           | SN 32/14<br>LSH29        | N/A              | N/A              |
| Dielectric Probe Kit        | SATIMO       | SCLMP                                                       | SN 32/14<br>OCPG52       | 2015.09.01       | 2016.08.31       |
| Multi Meter                 | Keithley     | Multi Meter<br>2000                                         | 4050073                  | 2015.11.20       | 2016.11.19       |
| Signal Generator            | Agilent      | N5182A                                                      | MY50140530               | 2015.11.18       | 2016.11.17       |
| Power Meter                 | R&S          | NRP                                                         | 100510                   | 2015.10.25       | 2016.10.24       |
| Power Meter                 | HP           | EPM-442A                                                    | GB37170267               | 2015.10.24       | 2016.10.23       |
| Power Sensor                | R&S          | NRP-Z11                                                     | 101919                   | 2015.10.24       | 2016.10.23       |
| Power Sensor                | HP           | 8481A                                                       | 2702A65976               | 2015.10.24       | 2016.10.23       |
| Network Analyzer            | Agilent      | 5071C                                                       | EMY46103472              | 2015.12.12       | 2016.12.11       |
| Attenuator 1                | PE           | PE7005-10                                                   | N/A                      | 2015.10.25       | 2016.10.24       |
| Attenuator 2                | PE           | PE7005-3                                                    | N/A                      | 2015.10.24       | 2016.10.23       |
| Attenuator 3                | Woken        | WK0602-XX                                                   | N/A                      | 2015.12.12       | 2016.12.11       |
| Dual Directional<br>Coupler | Agilent      | 778D                                                        | 50422                    | 2015.11.18       | 2016.11.17       |



## Appendix A. System Validation Plots

### System Performance Check Data (2450MHz Body)

Type: Phone measurement (Complete)

Area scan resolution: dx=8mm,dy=8mm


Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement: 2016-07-11

Measurement duration: 14 minutes 23 seconds

### Experimental conditions.


|                                   |                  |
|-----------------------------------|------------------|
| Device Position                   | Validation plane |
| Band                              | 2450 MHz         |
| Channels                          | -                |
| Signal                            | CW               |
| Frequency (MHz)                   | 2450             |
| Relative permittivity (real part) | 53.416002        |
| Relative permittivity             | 12.930000        |
| Conductivity (S/m)                | 1.93             |
| Power drift (%)                   | -1.200000        |
| Ambient Temperature               | 22.7°C           |
| Liquid Temperature                | 22.3°C           |
| Probe                             | SN 45/15 EPGO281 |
| ConvF                             | 2.28             |
| Crest factor:                     | 1:1              |

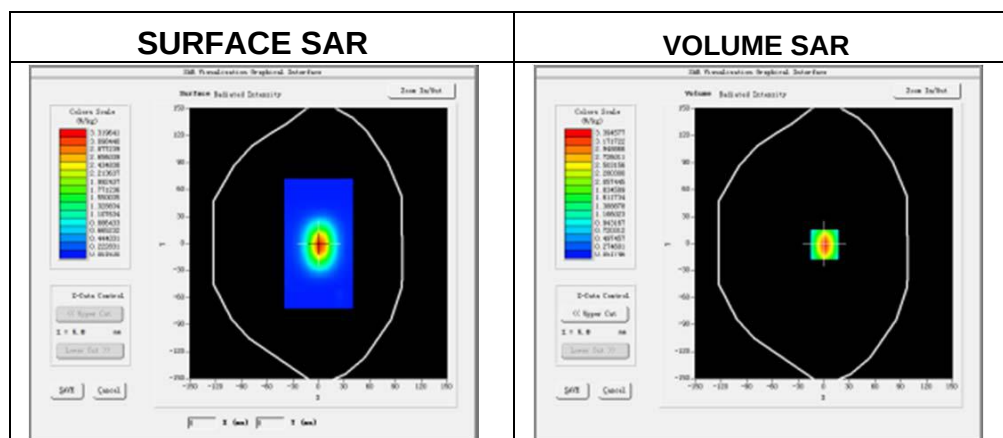

Maximum location: X=3.00, Y=1.00

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 2.338810 |
| SAR 1g (W/Kg)  | 5.316861 |

## Z Axis Scan

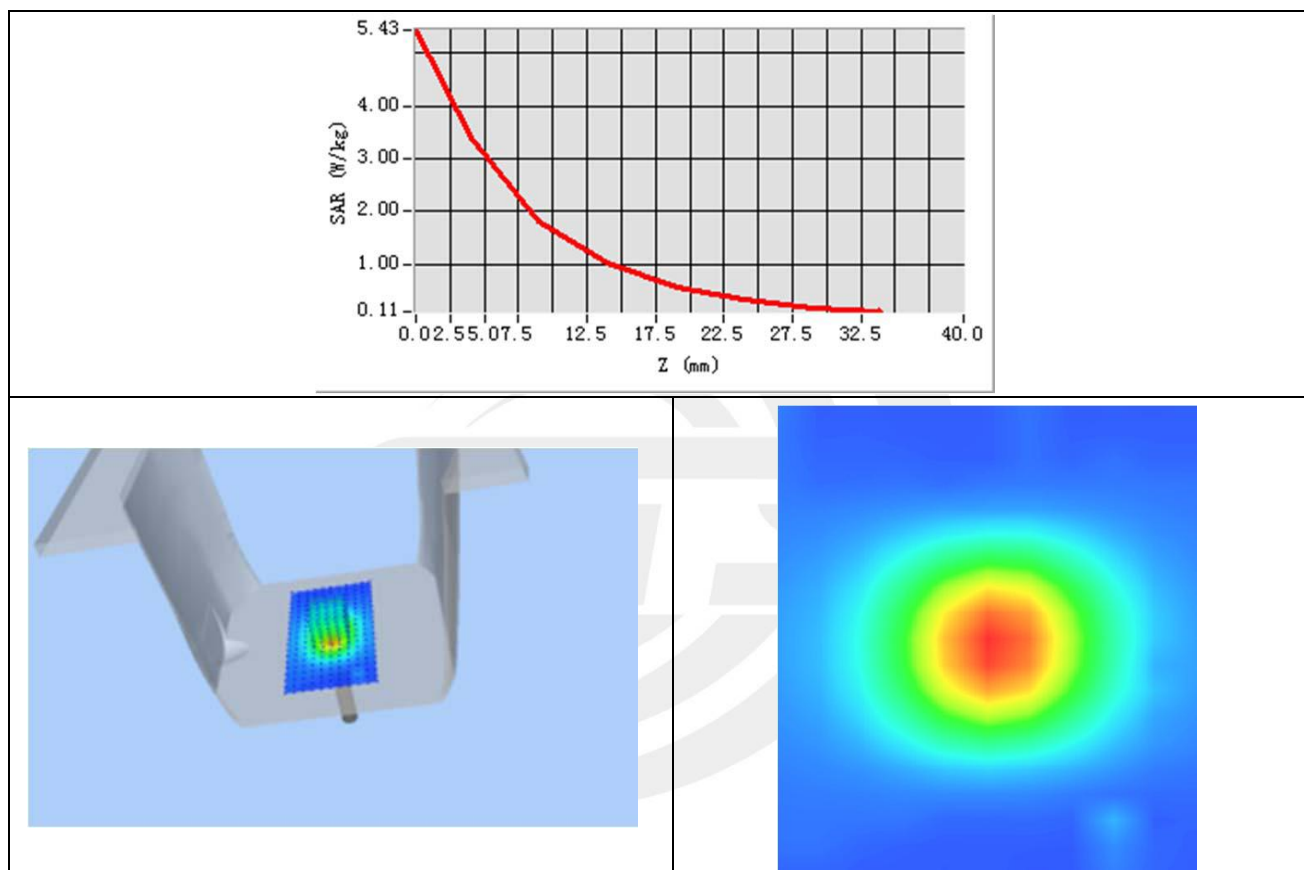



## Appendix B. SAR Test Plots


### Plot 1: DUT: Tablet PC; EUT Model: F102

|                                   |                                                                    |
|-----------------------------------|--------------------------------------------------------------------|
| Test Date                         | 2016-07-11                                                         |
| Probe                             | SN 45/15 EPGO281                                                   |
| ConvF                             | 2.28                                                               |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                          |
| ZoomScan                          | 5x5x7,dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                   |
| Device Position                   | Body Front side                                                    |
| Band                              | IEEE 802.11b ISM                                                   |
| Channels                          | Low                                                                |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                      |
| Frequency (MHz)                   | 2412                                                               |
| Relative permittivity (real part) | 52.40                                                              |
| Conductivity (S/m)                | 1.94                                                               |
| Variation (%)                     | -2.97                                                              |

Maximum location: X=1.00, Y=5.00

SAR Peak: 1.50 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.324865 |
| SAR 1g (W/Kg)  | 0.773248 |

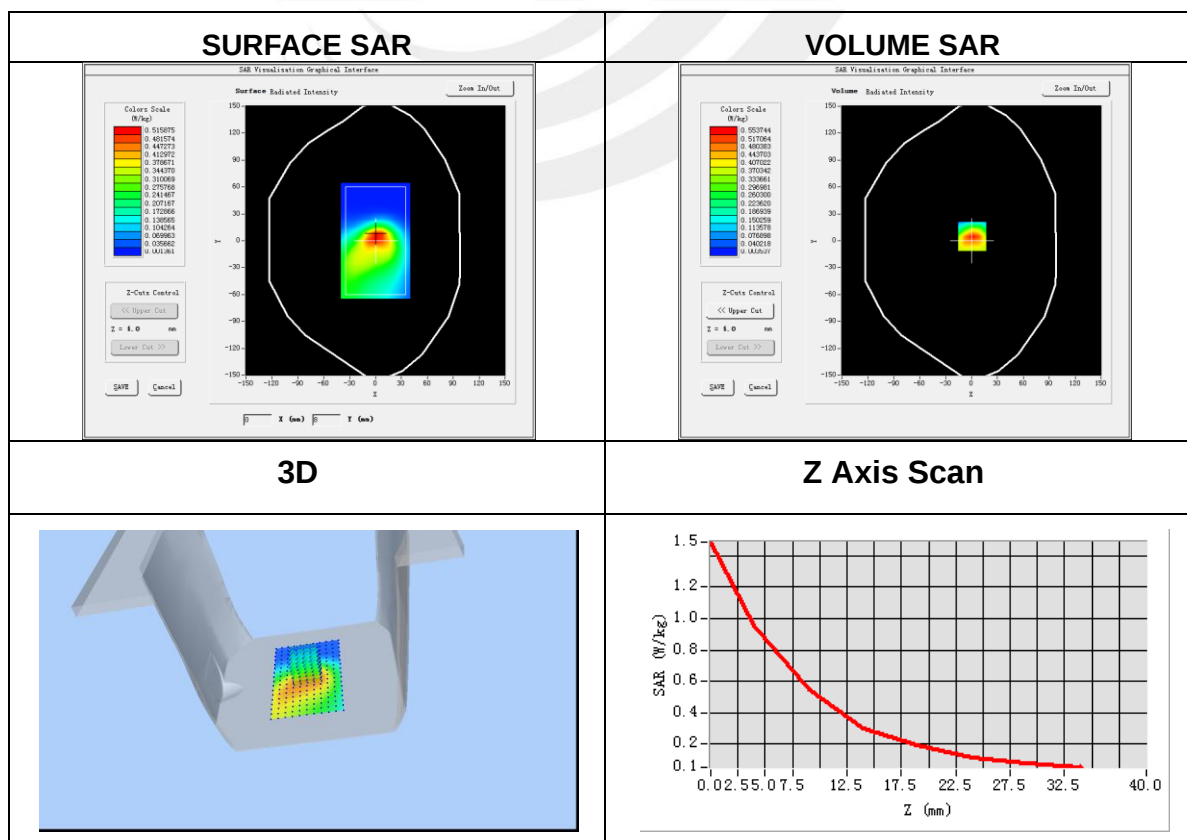




## Plot 2: DUT: Tablet PC; EUT Model: F102

|                                   |                                                                  |
|-----------------------------------|------------------------------------------------------------------|
| Test Date                         | 2016-07-11                                                       |
| Probe                             | SN 45/15 EPGO281                                                 |
| ConvF                             | 2.28                                                             |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                        |
| ZoomScan                          | 5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                 |
| Device Position                   | Body Front side                                                  |
| Band                              | IEEE 802.11b ISM                                                 |
| Channels                          | Middle                                                           |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                    |
| Frequency (MHz)                   | 2437                                                             |
| Relative permittivity (real part) | 52.40                                                            |
| Conductivity (S/m)                | 1.94                                                             |
| Variation (%)                     | 1.00                                                             |

Maximum location: X=-9.00, Y=5.00

SAR Peak: 1.73 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.378013 |
| SAR 1g (W/Kg)  | 0.867164 |

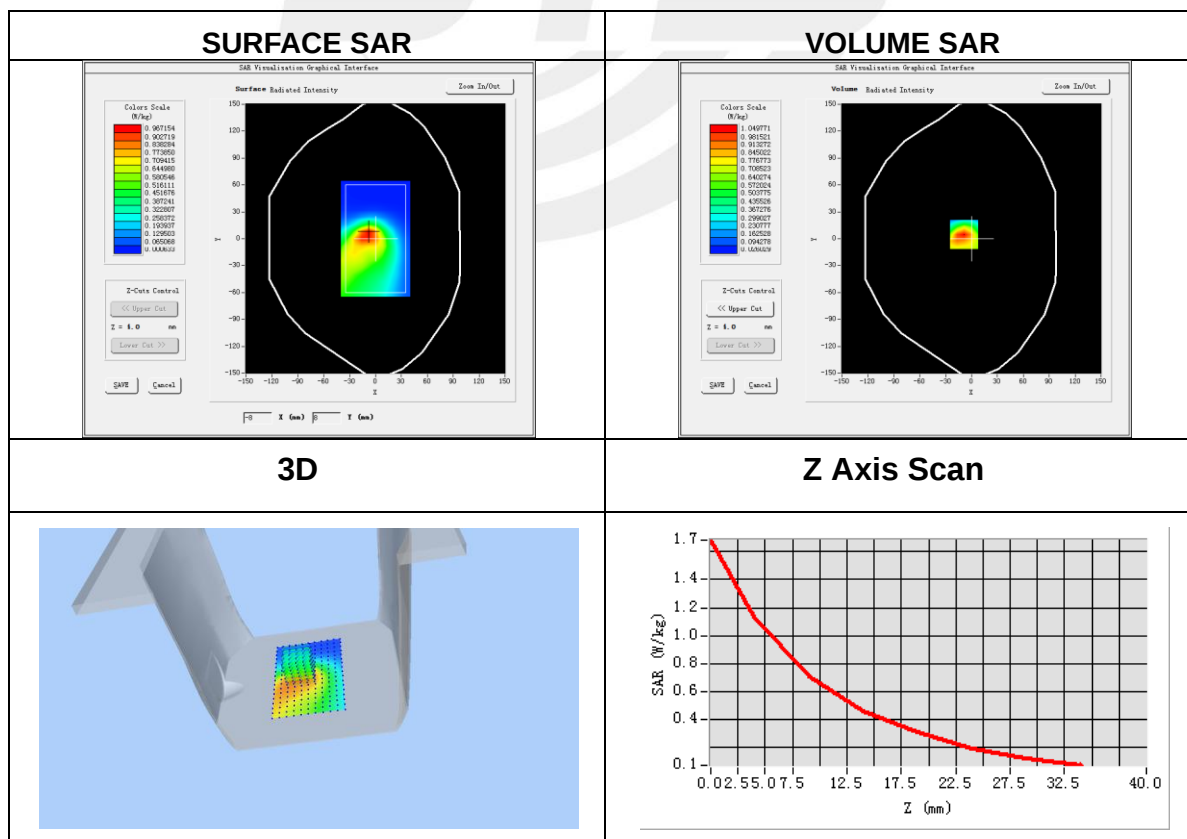



**Plot 3: DUT: Tablet PC; EUT Model: F102**

|                                   |                                                                  |
|-----------------------------------|------------------------------------------------------------------|
| Test Date                         | 2016-07-11                                                       |
| Probe                             | SN 45/15 EPGO281                                                 |
| ConvF                             | 2.28                                                             |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                        |
| ZoomScan                          | 5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                 |
| Device Position                   | Body Front side-repeated                                         |
| Band                              | IEEE 802.11b ISM                                                 |
| Channels                          | Middle                                                           |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                    |
| Frequency (MHz)                   | 2437                                                             |
| Relative permittivity (real part) | 52.40                                                            |
| Conductivity (S/m)                | 1.94                                                             |
| Variation (%)                     | -1.24                                                            |

Maximum location: X=-9.00, Y=5.00

SAR Peak: 1.73 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.352486 |
| SAR 1g (W/Kg)  | 0.854186 |

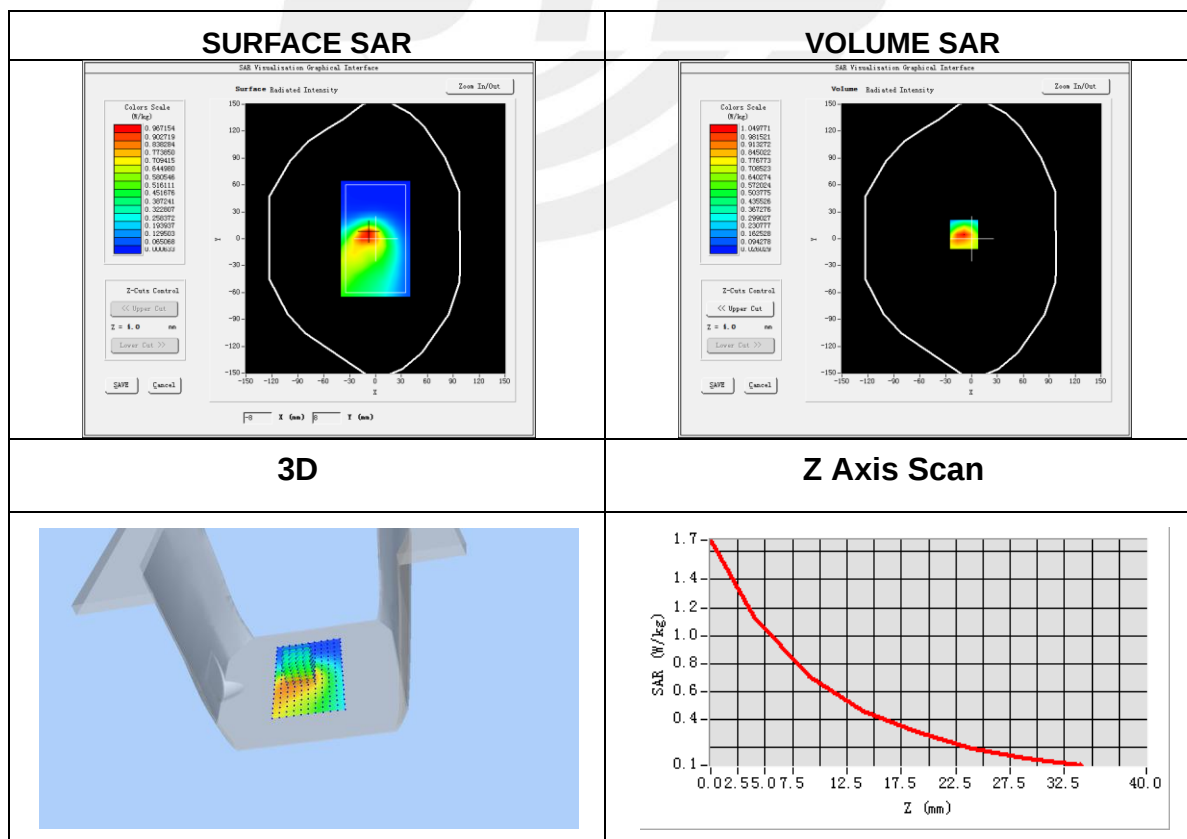


**Plot 4: DUT: Tablet PC; EUT Model: F102**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2016-07-11                                                          |
| Probe                             | SN 45/15 EPGO281                                                    |
| ConvF                             | 2.28                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| ZoomScan                          | 5x5x7, dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Body Front side                                                     |
| Band                              | IEEE 802.11b ISM                                                    |
| Channels                          | High                                                                |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 2462                                                                |
| Relative permittivity (real part) | 52.40                                                               |
| Conductivity (S/m)                | 1.94                                                                |
| Variation (%)                     | -3.57                                                               |

Maximum location: X=8.00, Y=1.00

SAR Peak: 1.43 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.298532 |
| SAR 1g (W/Kg)  | 0.689154 |

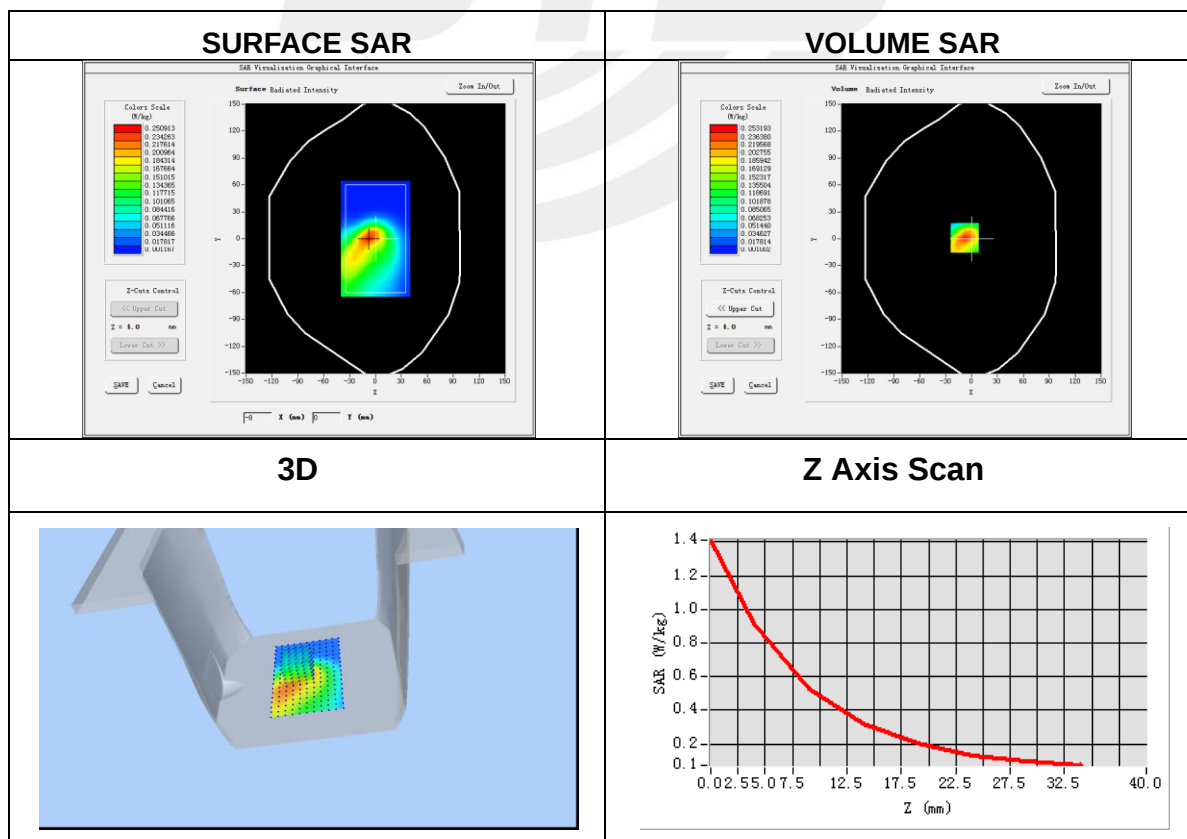



**Plot 5: DUT: Tablet PC; EUT Model: F102**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2016-07-11                                                          |
| Probe                             | SN 45/15 EPGO281                                                    |
| ConvF                             | 2.28                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| ZoomScan                          | 5x5x7, dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Body back side                                                      |
| Band                              | IEEE 802.11b ISM                                                    |
| Channels                          | Low                                                                 |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 2412                                                                |
| Relative permittivity (real part) | 52.40                                                               |
| Conductivity (S/m)                | 1.94                                                                |
| Variation (%)                     | -1.25                                                               |

Maximum location: X=7.00, Y=8.00

SAR Peak: 2.06 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.431245 |
| SAR 1g (W/Kg)  | 1.067214 |

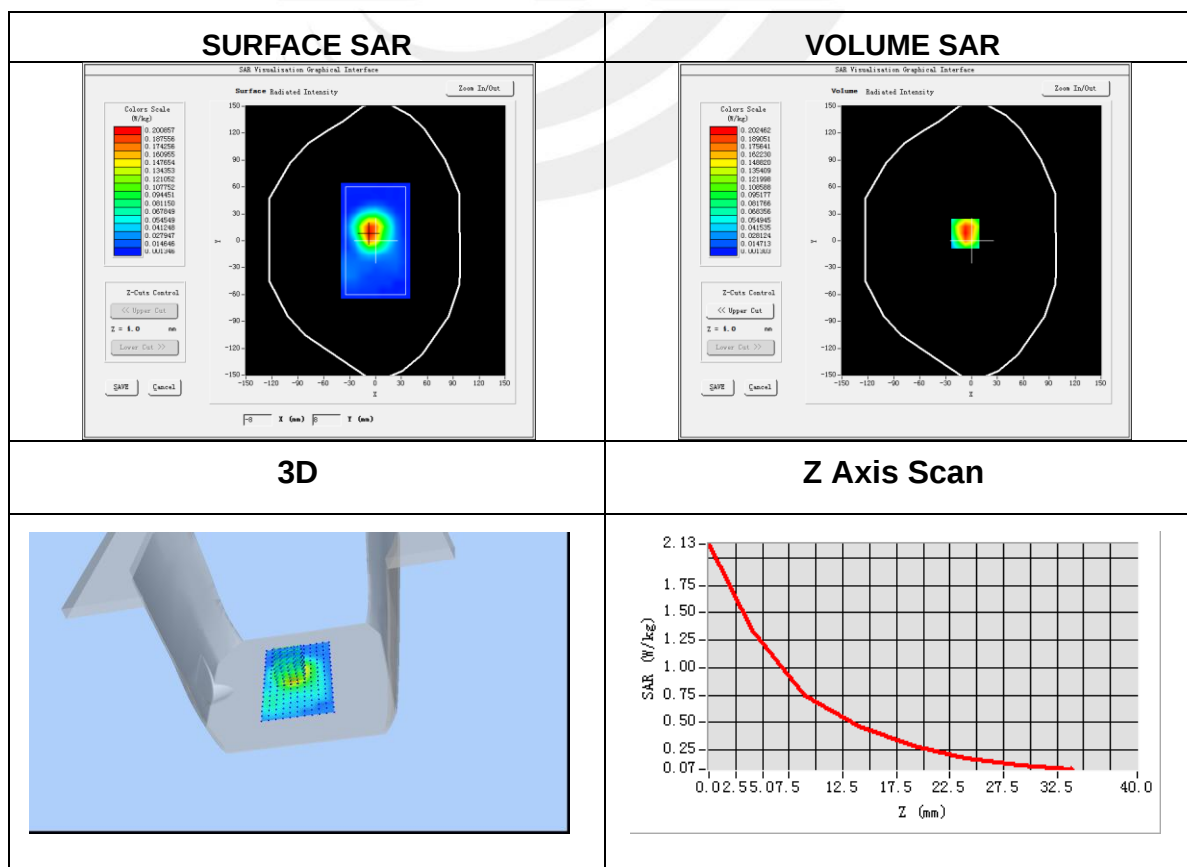



**Plot 6: DUT: Tablet PC; EUT Model: F102**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2016-07-11                                                          |
| Probe                             | SN 45/15 EPGO281                                                    |
| ConvF                             | 2.28                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| ZoomScan                          | 5x5x7, dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Body back side                                                      |
| Band                              | IEEE 802.11b ISM                                                    |
| Channels                          | Middle                                                              |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 2437                                                                |
| Relative permittivity (real part) | 52.40                                                               |
| Conductivity (S/m)                | 1.94                                                                |
| Variation (%)                     | 0.55                                                                |

Maximum location: X=9.00, Y=32.00

SAR Peak: 2.26 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.464081 |
| SAR 1g (W/Kg)  | 1.105945 |

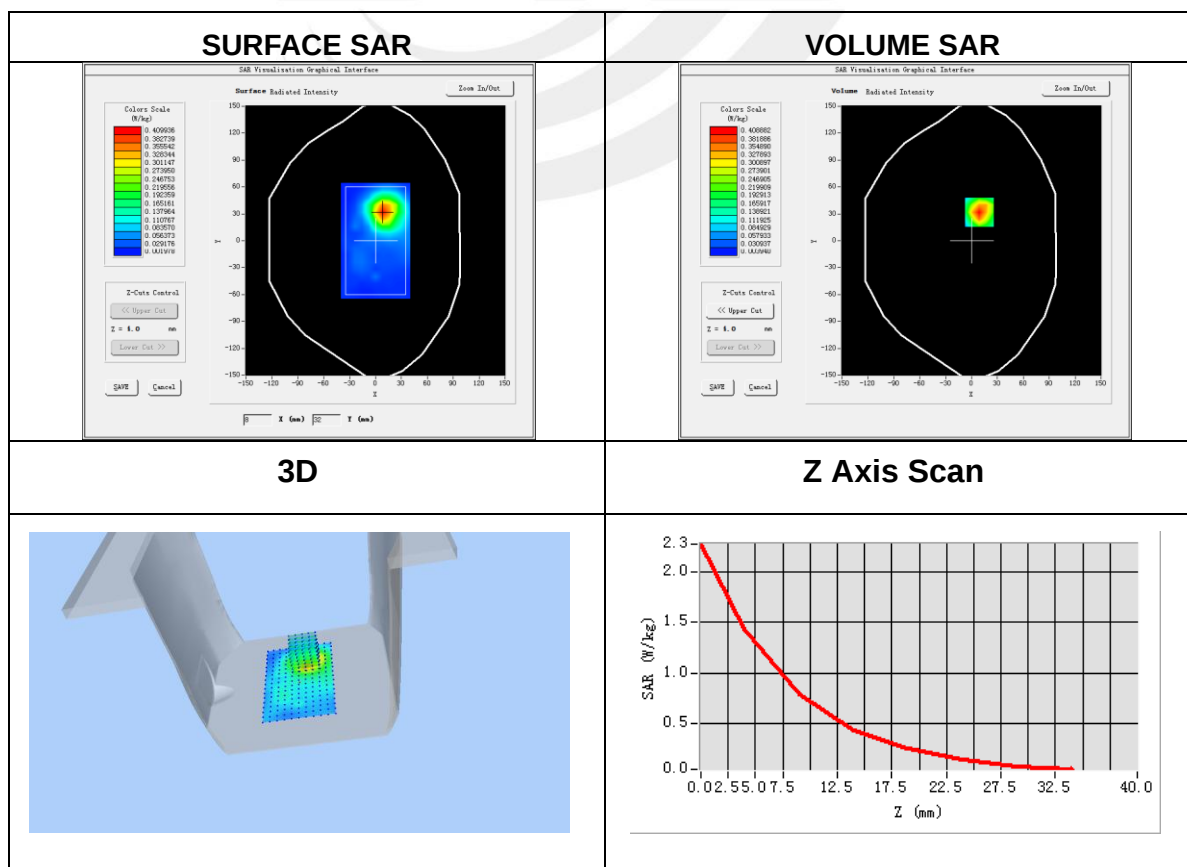




Plot 7: DUT: Tablet PC; EUT Model: F102

|                                   |                                                                  |
|-----------------------------------|------------------------------------------------------------------|
| Test Date                         | 2016-07-11                                                       |
| Probe                             | SN 45/15 EPGO281                                                 |
| ConvF                             | 2.28                                                             |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                        |
| ZoomScan                          | 5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                 |
| Device Position                   | Body back side-repeated                                          |
| Band                              | IEEE 802.11b ISM                                                 |
| Channels                          | Middle                                                           |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                    |
| Frequency (MHz)                   | 2437                                                             |
| Relative permittivity (real part) | 52.40                                                            |
| Conductivity (S/m)                | 1.94                                                             |
| Variation (%)                     | 2.01                                                             |

Maximum location: X=9.00, Y=32.00

SAR Peak: 2.26 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.445256 |
| SAR 1g (W/Kg)  | 1.089345 |

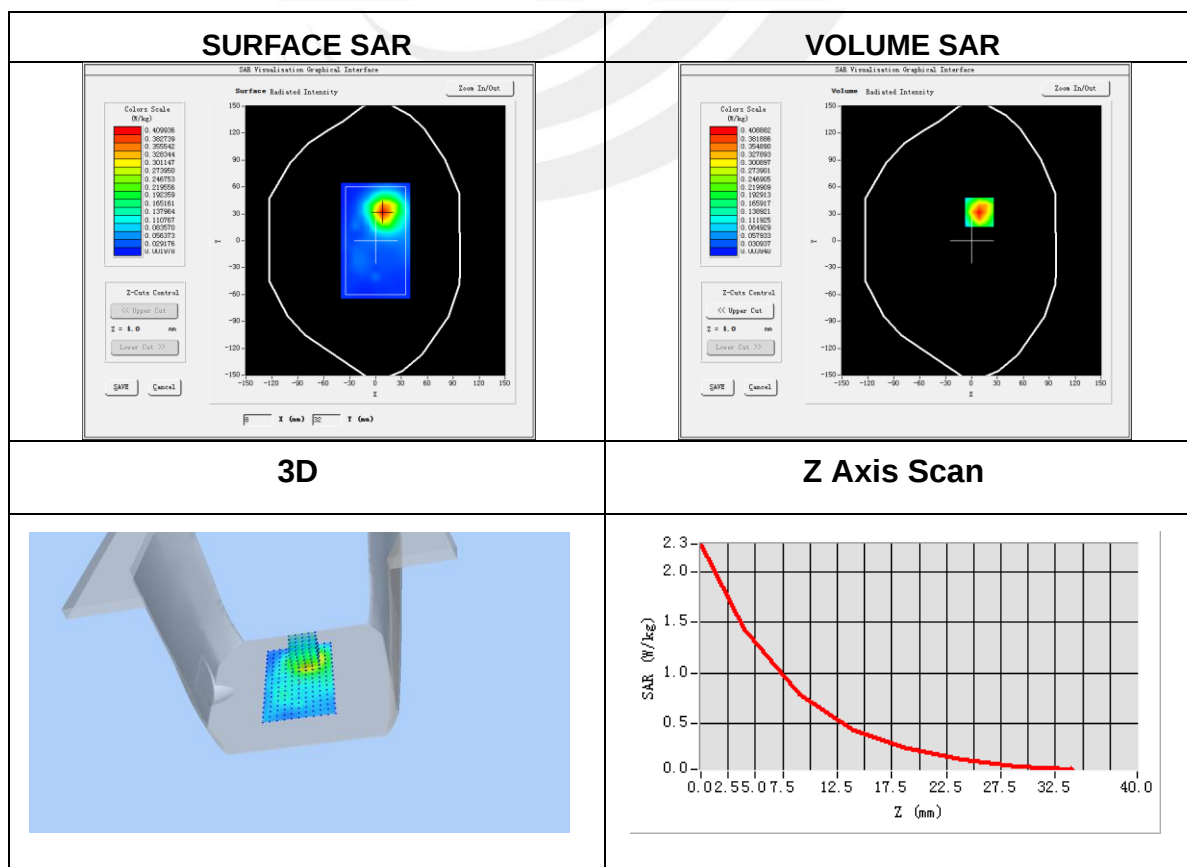



**Plot 8: DUT: Tablet PC; EUT Model: F102**

|                                   |                                                                     |
|-----------------------------------|---------------------------------------------------------------------|
| Test Date                         | 2016-07-11                                                          |
| Probe                             | SN 45/15 EPGO281                                                    |
| ConvF                             | 2.28                                                                |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                           |
| ZoomScan                          | 5x5x7, dx=8mm dy=8mm dz=5mm,<br>Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                    |
| Device Position                   | Body back side                                                      |
| Band                              | IEEE 802.11b ISM                                                    |
| Channels                          | High                                                                |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                       |
| Frequency (MHz)                   | 2462                                                                |
| Relative permittivity (real part) | 52.40                                                               |
| Conductivity (S/m)                | 1.94                                                                |
| Variation (%)                     | 3.25                                                                |

Maximum location: X=9.00, Y=6.00

SAR Peak: 1.95 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.401452 |
| SAR 1g (W/Kg)  | 0.996345 |

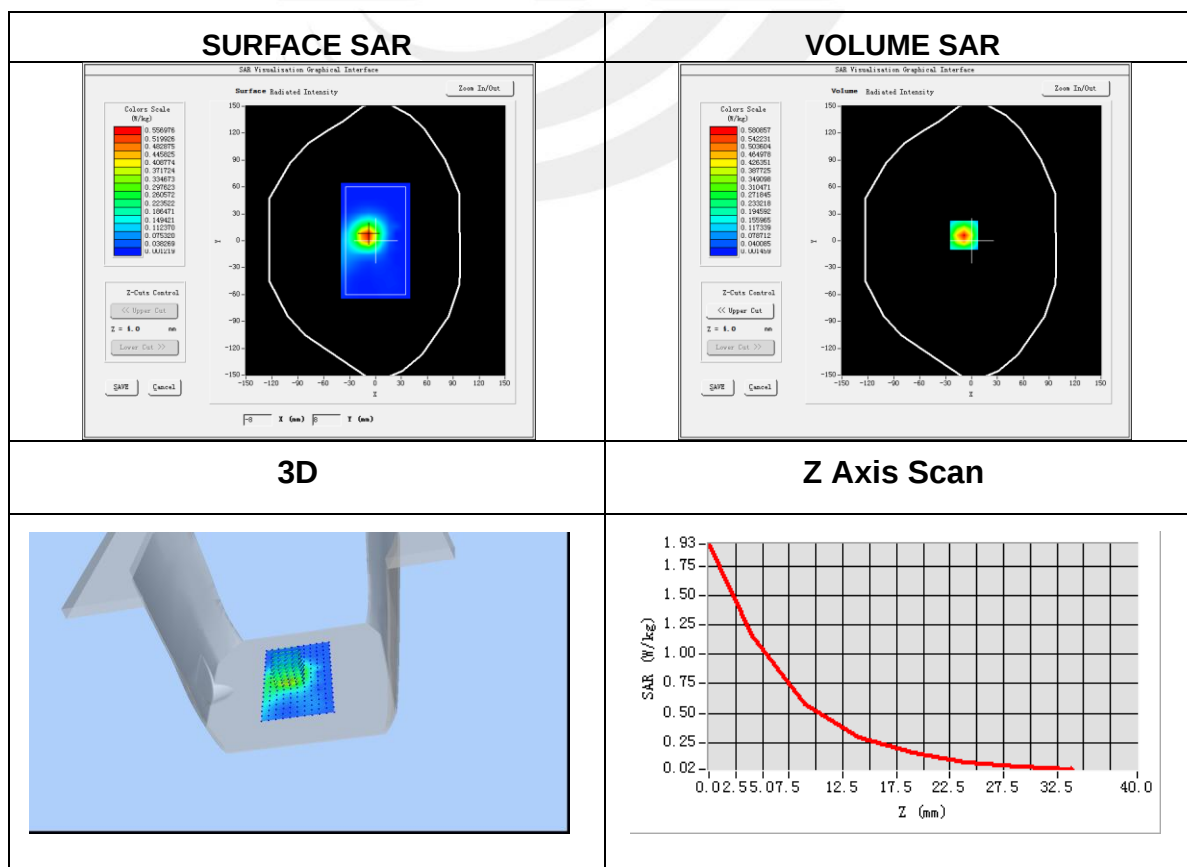




Plot 9: DUT: Tablet PC; EUT Model: F102

|                                   |                                                                  |
|-----------------------------------|------------------------------------------------------------------|
| Test Date                         | 2016-07-11                                                       |
| Probe                             | SN 45/15 EPGO281                                                 |
| ConvF                             | 2.28                                                             |
| Area Scan                         | dx=8mm dy=8mm, h= 5.00 mm                                        |
| ZoomScan                          | 5x5x7, dx=8mm dy=8mm dz=5mm, Complete/ndx=8mm dy=8mm, h= 5.00 mm |
| Phantom                           | Validation plane                                                 |
| Device Position                   | Body Top side                                                    |
| Band                              | IEEE 802.11b ISM                                                 |
| Channels                          | Middle                                                           |
| Signal                            | IEEE802.b (Crest factor: 1.0)                                    |
| Frequency (MHz)                   | 2437                                                             |
| Relative permittivity (real part) | 52.40                                                            |
| Conductivity (S/m)                | 1.94                                                             |
| Variation (%)                     | -0.62                                                            |

Maximum location: X=9.00, Y=27.00

SAR Peak: 0.80 W/kg

|                |          |
|----------------|----------|
| SAR 10g (W/Kg) | 0.214256 |
| SAR 1g (W/Kg)  | 0.467211 |

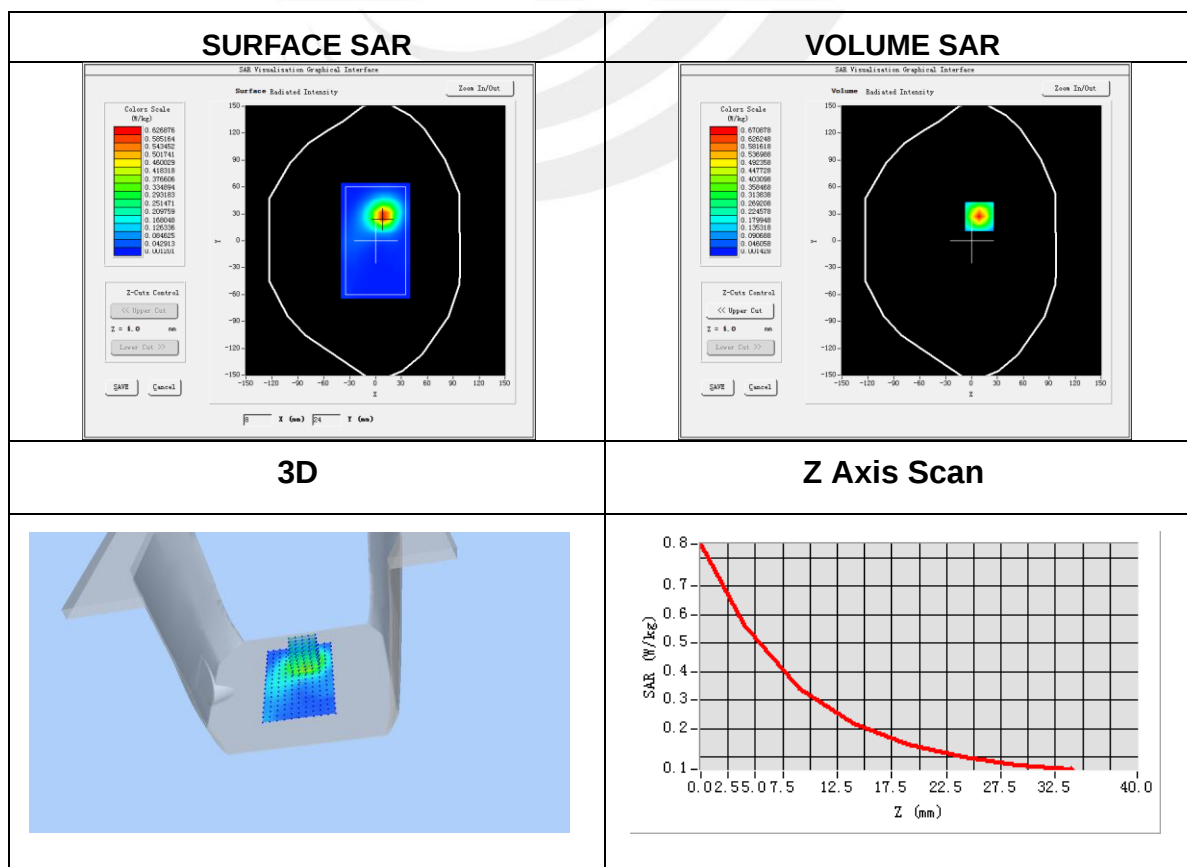



## Appendix C. Probe Calibration And Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※END OF THE REPORT※※※※

