

Emission Test Report

Standard: FCC Part 15 Subpart E / IC RSS-210

Document Number : FCC 19-0271-0

Model Number: AR5BMB-44

measured with IBM ThinkPad T40 Series
and IBM ThinkPad R50 Series

FCC ID: ANO20040600BTL
IC: 349E-AR5BMB44

July 5, 2004

Prepared :

EMC R&D Staff Engineer

Takeshi Asano

Signature: 

IBM Japan, Ltd.

EMC Engineering

LAB-S59

1623-14, Shimotsuruma,

Yamato-shi Kanagawa-ken 242, Japan

Phone: +81-46-215-4779


Fax: +81-46-273-7420

E-Mail: asano@jp.ibm.com

Reviewed and Checked :

EMC Advisory R&D Engineer

Toshiya Murota

Signature: 

IBM Japan, Ltd.

EMC Engineering

LAB-S59

1623-14, Shimotsuruma,

Yamato-shi Kanagawa-ken 242, Japan

Phone: +81-46-215-6574

Fax: +81-46-273-7420

E-Mail: murota@jp.ibm.com

Approved :

Manager, EMC Engineering

/ NVLAP signatory

Akihisa Sakurai

Signature: 

IBM Japan, Ltd.

EMC Engineering

LAB-S59

1623-14, Shimotsuruma,

Yamato-shi Kanagawa-ken 242, Japan

Phone: +81-46-215-2613

Fax: +81-46-273-7420

E-Mail: akihisa@jp.ibm.com

MEASUREMENT / TECHNICAL REPORT – Part 15 Subpart E (Intentional Radiator)

Model: AR5BMB44 (802.11a/b/g Wireless LAN Adapter)
with

IBM ThinkPad T40 Series

(Machine Type: 1871, 1875, 1873, 1874, 1875, 1876, 2373, 2374, 2375,
2376, 2378, 2379, 2668, 2669, 2678, 2679, 2686, 2687)

and

IBM ThinkPad R50 Series

(Machine Type: 1829, 1830, 1831, 1832, 1833, 1834, 1835, 1836, 1840,
1841, 1842, 2883, 2887, 2888, 2889, 2894, 2895)

FCC ID : ANO20040600BTL

July 5, 2004

This report concerns: (check one)

Original Grant ☒

Class I change ☐

Class II change ☐

Equipment type: Wireless LAN device

This report shall not be reproduced except in full, without the written permission of this test lab.

The measurement results contained in this report relate only to the item which was tested.

Measurement procedure used is ANSI C63.4-2000 unless otherwise specified.

Other test procedure: _____

The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.

APPLICANT ANTI-DRUG ABUSE CERTIFICATION:

By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a "party" for these purposes, see 47 CFR 1.2002(b).

☒ Yes or No

"Report shall not be reproduced except in full, without the written approval of the laboratory" "the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government"

Prepared by: Takeshi Asano

IBM Japan Corporation, Yamato EMC Engineering

LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan

Tel: +81-46-215-4779 Fax: +81-46-273-7420

- Index -

A.	GENERAL INFORMATION.....	5
A.1	Test Methodology.....	5
A.2	Test Facility / NVLAP Accreditation.....	5
A.3	EUT details	5
B.	SUMMARY OF TEST RESULTS	6
C.	OPERATION MODE OF EUT.....	8
D.	JUSTIFICATION.....	8
E.	TEST INSTRUMENTS	9
F.	MEASUREMENT UNCERTAINTY.....	10
G.	TEMPERATURE AND HUMIDITY.....	10
H.	RELATED SUBMITTAL(S)/GRANT(S)/NOTES	10
1.	BANDWIDTH AT 26 DB BELOW / BANDEDGE.....	11
1.1	Test Procedure.....	11
1.2	Measurement Results	11
1.3	Trace Data	13
2.	PEAK CONDUCTED TRANSMIT OUTPUT POWER	16
2.1	Test Procedure.....	16
2.2	Measurement Results	16
2.3	Trace Data	17
3.	PEAK POWER SPECTRAL DENSITY.....	21
3.1	Test Procedure.....	21
3.2	Measurement Results	21
3.3	Trace Data	22
4.	PEAK EXCURSION RATIO	28
4.1	Test Procedure.....	28
4.2	Measurement Results	28
4.3	Trace Data	29
5.	AC WIRELINE CONDUCTED EMISSIONS (150KHZ – 30MHZ).....	32
5.1	Test Procedure.....	32
5.2	Test Instruments and Measurement Setup.....	32
5.3	Powerline Voltage Calculation.....	33
5.4	Measurement Results	34
6.	RESTRICTED BANDS RADIATIONS (30MHZ – 1GHZ).....	36
6.1	Test Procedure.....	36
6.2	Test Instruments and Measurement Setup.....	36
6.3	Field Strength Calculation	38
6.4	Measurement Results	39

7.	RESTRICTED BANDS RADIATIONS (1GHZ – 40GHZ).....	40
7.1	Test Procedure.....	40
7.2	Test Instruments and Measurement Setup.....	40
7.3	Field Strength Calculation	42
7.4	Limits.....	42
7.5	Measurement Results	43
7.6	Measurement plots of adjacent restricted band.....	45
7.6.1	List of Measurement Results	45
7.6.2	Bandedge Measurement Plots	46

A. General Information

APPLICANT : IBM Japan, Ltd.
 TEST SITE : IBM Japan, Ltd., Yamato Semi-anechoic chamber #1
 TEST SITE ADDRESS : 1623 – 14 Shimotsuruma, Yamato-shi, Kanagawa 242-8502 Japan
 Tel: +81-46-215-4779, Fax: +81-46-273-7420
 REGULATION : FCC Part 15 Subpart E
 Industry Canada RSS-210 (Issue No.5)
 MODEL NUMBER : AR5BMB-44
 (Advertising Name) (IBM 11a/b/g Wireless LAN Mini PCI Adapter II)
 FCC ID : ANO20040600BTL
 IC Certification Number : 349E-AR5BMB44
 SERIAL NUMBER : 00S0SIT004
 PHYSICAL CONDITION : Preproduction
 KIND OF EQUIPMENT : Personal computer with a IEEE802.11a, 11b & 11g Wireless LAN
 Mini-PCI Combo Card ([Composite application](#))
 TESTED DATE : June 22, 23, 24, 28 and 29, 2004

A.1 Test Methodology

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4-2000. Radiated testing was performed at an antenna to EUT distance of 3 meters.

A.2 Test Facility / NVLAP Accreditation

The semi-anechoic chamber #1 used to correct the data are located in Yamato Laboratory, IBM Japan.

- This facility has been fully described in a report dated September 1998, submitted to the FCC office, and accepted in a letter, dated Nov. 2, 1998(31040/SIT).
- IBM Yamato EMC Engineering is recognized under the National Voluntary Laboratory Accreditation Program for satisfactory compliance with Criteria established in Title 15, Part 285 Code of Federal Regulations.(**NVLAP Lab code: 200198-0**)
- These facilities are accepted by **Industry Canada** as number **IC 4221** for chamber #1 (expiry date: January 25, 2005), and as number **IC 4221-1** for chamber #2 (expiry date: February 16, 2007).

A.3 EUT details

Table A EUT details

Model and S/N	FCC ID IC Certification Number	Description
AR5BMB-44 (s/n 00S0SIT004)	FCC ID: ANO20040600BTL IC: 349E-AR5BMB44	Applying modular transmitter Built_in type IEEE802.11a/b/g Wireless LAN Mini-PCI card without antenna
ThinkPad T40 Series M/T 2373-PUU (15 inch) (s/n ZZ-22134) ----- ThinkPad R50 Series M/T 1829-62x (15 inch) (s/n ZZ-08233)	N/A	Host equipment IBM Notebook PC with built_in antenna CPU: Intel® Pentium® M Processor, 1.7GHz ----- IBM Notebook PC with built_in antenna CPU: Intel® Pentium® M Processor, 1.5GHz
P/N 02K6746	N/A	Universal AC adapter 72W, Unshielded power cord

B. Summary of Test Results

Table-B presents the list of the measurement items for U-NII devices under FCC Part 15 Subpart E, and for LELAN devices under Industry Canada RSS-210.

The section numbers of upper portion are showing FCC codes, and the lower ones are for IC RSS-210.

Table-B List of the measurements

Section(s)	Test Items		Condition	Result
	Transmit mode (TX):			
15.407(a)(1), (2) 6.2.2 (q1)(i)(ii)	Bandwidth at 26 dB below	26dB BW was also taken for IC instead of 99% BW, according to RSS-210 6.2.2q(iv)(b).	Conducted	Pass
	Peak conducted transmit output power or EIRP for IC	5150-5250MHz: FCC: 50mW or (4+10logB)dBm IC : 200mW* or (10+10logB)dBm* *: EIRP		Pass
		5250-5350MHz: FCC: 250mW or (11+10logB)dBm IC : 250mW or (11+10logB)dBm IC : 1W* or (17+10logB)dBm* *: EIRP B: 26dB BW in MHz		Pass
	Peak Power Spectral Density	5150-5250MHz: FCC: 4 dBm in any 1MHz IC : 10 dBm in any 1MHz (EIRP) 5250-5350MHz: FCC: 11 dBm in any 1MHz IC : 11 dBm in any 1MHz		Pass
N/A 6.2.2 (q1)(iv)(b)	Peak Spectral Density	IC: 3 + 10logB dBm/MHz		Pass
15.407(a)(6) N/A	Peak Excursion	The ratio of the peak excursion of the modulation envelope to the peak transmit shall not exceed 13 dB across any 1 MHz .		Pass
15.207 / 407(b)(5) 6.2.2 (q1)(v) / 6.6	AC Wireline Conducted Emissions 150kHz- 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50		Pass
15.205 & 209 / 407(b)(1)(2)(5)(6) 6.2.1 / 6.2.2(q1)(i)(ii)(v) / 6.3	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3. Ave. 54dBμV/m, peak 74dBμV/m and	Radiated (30MHz - 1GHz)	Pass
		FCC 15.407(b)(1)(2) or RSS-210 6.2.2(q1)(i)(ii) : EIRP –27dBm/MHz	Radiated (1G - 40GHz)	Pass

	Receive mode (RX):			
15.207 / 407(b)(5) 6.2.2(q1)(v) / 7.4	AC Wireline Conducted Emissions 150kHz - 30MHz	Class B: Freq.(MHz) QP(dBμV) Ave.(dBμV) 0.15 - 0.5 66 - 56 56 - 46 0.5 - 5 56 46 5 - 30 60 50	Conducted	Pass
15.205 & 209 / 407(b)(1)(2)(5)(6) 6.2.1 / 6.2.2(q1)(i)(ii)(v) / 7.3	General Field Strength Limits (Radiated Emission Limits)	Shall not exceed the limits specified in FCC 15.209 or RSS-210 Table3. Ave. 54dBμV/m, peak 74dBμV/m and FCC 15.407(b)(1)(2) or RSS-210 6.2.2(q1)(i)(ii) : EIRP -27dBm/MHz	Radiated (30MHz - 1GHz)	Pass
			Radiated (1G - 25GHz)	Pass

	Other general requirements		Result
15.407(a)(1)(2) –	Antenna gain	Peak : 2.00 dBi and 2.84 dBi	N/A
– 5.2	Supply Voltage	Main power source: Universal AC adapter 72W Mini-PCI PC bus to applying card : DC 3.3V ± 0.3V	N/A
– 6.2.2(q1)(iv)(a)	Digital modulation	Applying equipment employs IEEE802.11a, 11g(OFDM) or 11b(CCK) digital modulation technology.	complies
15.407(c) 6.2.2(q1)(iv)(d)	Automatic link disconnection in no transaction state	Refer to “Circuitry Description” document.	complies
15.407(d) 6.2.2(q1)(i)	Integral antenna in the 5150M -5250MHz band	The device employs an unique electronic connector so called Electronic Handshake . Refer to “Confidential_e-Handshake” exhibit.	complies
15.407(e) 6.2.2(q1)(i) (q1)(iv)(g)	Indoor use in the 5150M - 5250MHz band, and interference from radars.	Refer to the manual (Regulatory Notice).	complies
15.407(f) 6.2.2(q1)(iv)(g)	RF Exposure Requirement	Refer to “RF Exposure Evaluation” or “Exposure of Humans to Radio Frequency Fields“ documents.	complies
15.407(g) 6.2.2(q1)(iv)(e)	Frequency stability	Refer to “Circuitry Description” document.	complies

C. Operation mode of EUT

1. All tests were performed using the “Atheros Radio Test” program. This tool supports to emit the continuous transmission mode for the testing purpose.
2. Three kinds of frequencies were chosen for the measurement. i.e. 5180MHz (lowest), 5260MHz(middle), and 5320MHz (highest).
3. As for the RF receiving test, the middle channels (5260MHz) were selected representatively.

Table-C Transmission mode of EUT (The measurement plots are shown in shading.)

Operation Frequency [GHz]	Rated output power (conducted) [dBm]							
	6M bps	9M bps	12M bps	18M bps	24M bps	36M bps	48M bps	54M bps
5.180 (Ch. 36)	14	14	14	14	14	14	14	13
5.200 (Ch. 40)	15	15	15	15	15	15	14	13
5.220 (Ch. 44)	15	15	15	15	15	15	14	13
5.240 (Ch. 48)	15	15	15	15	15	15	14	13
5.260 (Ch. 52)	17	17	17	17	17	17	14	13
5.280 (Ch. 56)	17	17	17	17	17	17	14	13
5.300 (Ch. 60)	17	17	17	17	17	17	14	13
5.320 (Ch. 64)	14	14	14	14	14	14	14	13

D. Justification

The host PCs (IBM ThinkPad T40 Series and R50 Series) are designed with the same conceptual hardware configuration of standard size laptop PC.

- The shading columns in the previous Table C show the transmission modes performed full testing.
- The host devices marked in shading in the Table-D below were used for EUT which have comparatively higher antenna gains and worse measurement results in each host PC series (T40 or R50). Then, the worst case data were selected for this test report among the two host systems.
The actual highest emissions taken in this report in the Chapter 5 through 7 were found at 6Mbps on the auxiliary antenna of ThinkPad R50 Series (15 inch LCD model).
Refer to the Chapter 7.6 concerning the evaluation of the worst emission case.

Table-D Peak Antenna Gains of EUT

			14 inch LCD	15 inch LCD
5.2GHz band	ThinkPad T40 Series	Main Antenna gain	0.83 dBi (peak)	2.00 dBi (peak)
		Auxiliary Antenna gain	0.36 dBi (peak)	0.82 dBi (peak)
	ThinkPad R50 Series	Main Antenna gain	2.66 dBi (peak)	1.68 dBi (peak)
		Auxiliary Antenna gain	1.37 dBi (peak)	2.84 dBi (peak)

E. Test Instruments

Table-C List of Measuring Instruments

Description	Model	Serial Number	Calibration Date	Calibration Interval
Computer	IBM 6868-30J	97-901X3	N/A	N/A
Computer	IBM 6589-13J	97-15613	N/A	N/A
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2601A02634	09/09/03	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	3019A05156	08/14/03	1 year
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04254	08/25/03	1 year
Spectrum Analyzer Display	HP 85662A	2542A12308	09/09/03	1 year
Spectrum Analyzer Display	HP 85662A	3026A19366	08/14/03	1 year
Spectrum Analyzer Display	HP 85662A	2816A16831	08/25/03	1 year
Quasi-Peak Adapter	HP 85650A	2043A00062	09/09/03	1 year
Quasi-Peak Adapter	HP 85650A	2811A01433	08/14/03	1 year
Quasi-Peak Adapter	HP 85650A	2811A01156	08/25/03	1 year
Amplifier (100KHz - 1.3GHz)				
- for 30-200MHz	MITEQ AM-3A	898433	04/23/04	1 year
- for 200-1000MHz	MITEQ AM-3A	898432	04/23/04	1 year
Amplifier (1GHz - 18GHz)	HP 8449B	3008A00582	06/01/04	1 year
Amplifier (18 – 40GHz)	Agilent 83051A	3950M00193	01/27/04	1 year
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003	05/10/04	1 year
Receiver (9kHz-30MHz)	R&S ESH3	891806/012	10/17/03	1 year
Receiver (20MHz-1.3GHz)	R&S ESVP	893202/018	02/10/04	1 year
Biconical Antenna (30-200MHz)	EMCO 3108	2536	04/23/04	1 year
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2849	04/23/04	1 year
Horn Antenna (1- 18GHz)	EMCO 3115	9903-5774	07/17/03	1 year
Horn Antenna (3.95- 5.85GHz)	EMCO 3160-5	1099	07/17/03	1 year
Horn Antenna (5.85- 8.20GHz)	EMCO 3160-6	9712-1044	07/17/03	1 year
Horn Antenna (8.20- 12.4GHz)	EMCO 3160-7	1156	07/17/03	1 year
Horn Antenna (12.4- 18GHz)	EMCO 3160-8	1143	07/17/03	1 year
Horn Antenna (18- 26.5GHz)	EMCO 3160-9	0004-1202	07/17/03	1 year
Horn Antenna (26.5- 40GHz)	EMCO 3160-10	1175	07/17/03	1 year
LISN	EMCO 3810/2NM	00022007	06/15/04	1 year
Switch/control unit	HP 3488A	2719A17226 2719A17228	N/A N/A	N/A N/A
Plotter	HP 7550A	2631A33619	N/A	N/A
Coaxial cables (1 – 18GHz):	Length:			
- Horn Ant <=> RF Amp.	6 m	- EM206SCO	03/25/04	1 year
- RF Amp. <=> Spectrum Analyzer(<12GHz)	16m	- GEM0101	03/25/04	1 year
- RF Amp. <=> Spectrum Analyzer(>12GHz)	3m	- SF102-20166	04/08/04	1 year
Coaxial cables (18 – 40GHz):				
- Horn Ant <=> RF Amp.	3m	- SF102-20167	04/08/04	1 year
- RF Amp. <=> Spectrum Analyzer	1m	- SF102-21105	04/08/04	1 year
N-Coax cables:				

- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01	04/23/04	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103L02	04/23/04	1 year
- Shield Panel <=> RF Amp	7 m	- EM103L03	04/23/04	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103L04	04/23/04	1 year
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01	04/23/04	1 year
- 10m Cable <=> Shield Panel	10 m	- EM103H02	04/23/04	1 year
- Shield Panel <=> RF Amp	7 m	- EM103H03	04/23/04	1 year
- RF Amp <=> Power Splitter	0.5m	- EM103H04	04/23/04	1 year
Coax cables:				
- Lisen-L <=> SW/Con.unit (SW100)	4 m	- EMIC-L	04/23/04	1 year
- Lisen-N <=> SW/Con.unit (SW101)	4 m	- EMIC-N	04/23/04	1 year
- SW/Con.unit <=> RCVR (Input)	1 m	- EMIC-R	04/23/04	1 year
- SW/Con.unit<=> Spe Ana.(Signal In)	1 m	- EMIC-S	04/23/04	1 year
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05	04/23/04	1 year
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06	04/23/04	1 year
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05	04/23/04	1 year
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06	04/23/04	1 year
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV	04/23/04	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL	04/23/04	1 year
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH	04/23/04	1 year

Notes.

- The above equipment calibration is traceable to National standards.
- HP: Hewlett Packard, R&S: Rohde & Schwarz

F. Measurement Uncertainty

Uncertainties of the both, the Yamato EMI radiated test facilities (EMI chambers, #1 and #2) and the Yamato EMI conducted test facility are derived with the NIS 81 " Treatment of uncertainty in EMC measurements" 1994.

Estimated site uncertainty values are as follows.

EMI chamber #1 : 4.39dB

EMI chamber #2 : 4.40dB

EMI conducted measurement system : 2.4dB

Detail should be referred to "Treatment of Uncertainty, Calculations and Policy" report, document number TCR 10-0015.

G. Temperature and Humidity

The temperature is controlled within range of 17° to 28°.

The relative humidity is controlled within range of 40% to 70%.

H. Related Submittal(s)/Grant(s)/Notes

The host unit with full peripheral devices including the applying modular as an unintentional radiator is classified as a Digital Device under the FCC Part 15 Subpart B or the Industry Canada Class B Emission Compliance (ICES-003), and subject to SDoC.

1. Bandwidth at 26 dB below / Bandedge

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i) / q1(iV)(b)]
 [5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii) / q1(iV)(b)]

1.1 Test Procedure

The bandwidth at 26 dB down from the peak of the RF emission was measured with a spectrum analyzer connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies (5180 / 5260 / 5320MHz).

The spectrum analyzer was set to:

RBW=300kHz^{*1}, VBW=1MHz^{*2}, Span=50MHz, Sweep= 50ms, Mode= Peak detector

*1: approximately 1% of the emission bandwidth (§15.403(c))

*2: VBW > RBW (To be adjusted accordingly based on the spectrum stability.)

Table 1-1: 26 dB Bandwidth Test Instruments

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 2.2 dB	

Notes: - R&S: Rohde & Schwarz




Figure 1: Measurement setup for 26dB bandwidth test

1.2 Measurement Results

Test Date: June 22, 2004

 : the closest frequencies to the bandedge

Table 1-2-1. 26dB bandwidth, TX mode 6Mbps

Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 26 dB below (MHz)	Plot data
5180 (ch. 36)	5163.62	5198.49	34.87	Plot 1-1
5260 (ch. 52)	5239.21	5281.09	41.88	Plot 1-2
5320 (ch. 64)	5304.92	5336.28	31.36	Plot 1-3

Table 1-2-2. 26dB bandwidth, TX mode 18Mbps


Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 26 dB below (MHz)	Plot data
5180 (ch. 36)	5163.72	5196.98	33.26	omitted
5260 (ch. 52)	5241.01	5279.69	38.68	omitted
5320 (ch. 64)	5305.72	5334.18	28.46	omitted

Table 1-2-3. 26dB bandwidth, TX mode 54Mbps

Center Frequency (MHz)	Lower frequency (MHz)	Upper frequency (MHz)	Bandwidth at 26 dB below (MHz)	Plot data
5180 (ch. 36)	5164.32	5195.38	31.06	omitted
5260 (ch. 52)	5246.72	5274.68	27.96	omitted
5320 (ch. 64)	5306.72	5334.77	28.05	omitted


1.3 Trace Data

The plots are comparatively worse measurement cases of each measured frequency in the previous [Table 1-2-1](#) through [Table 1-2-3](#).

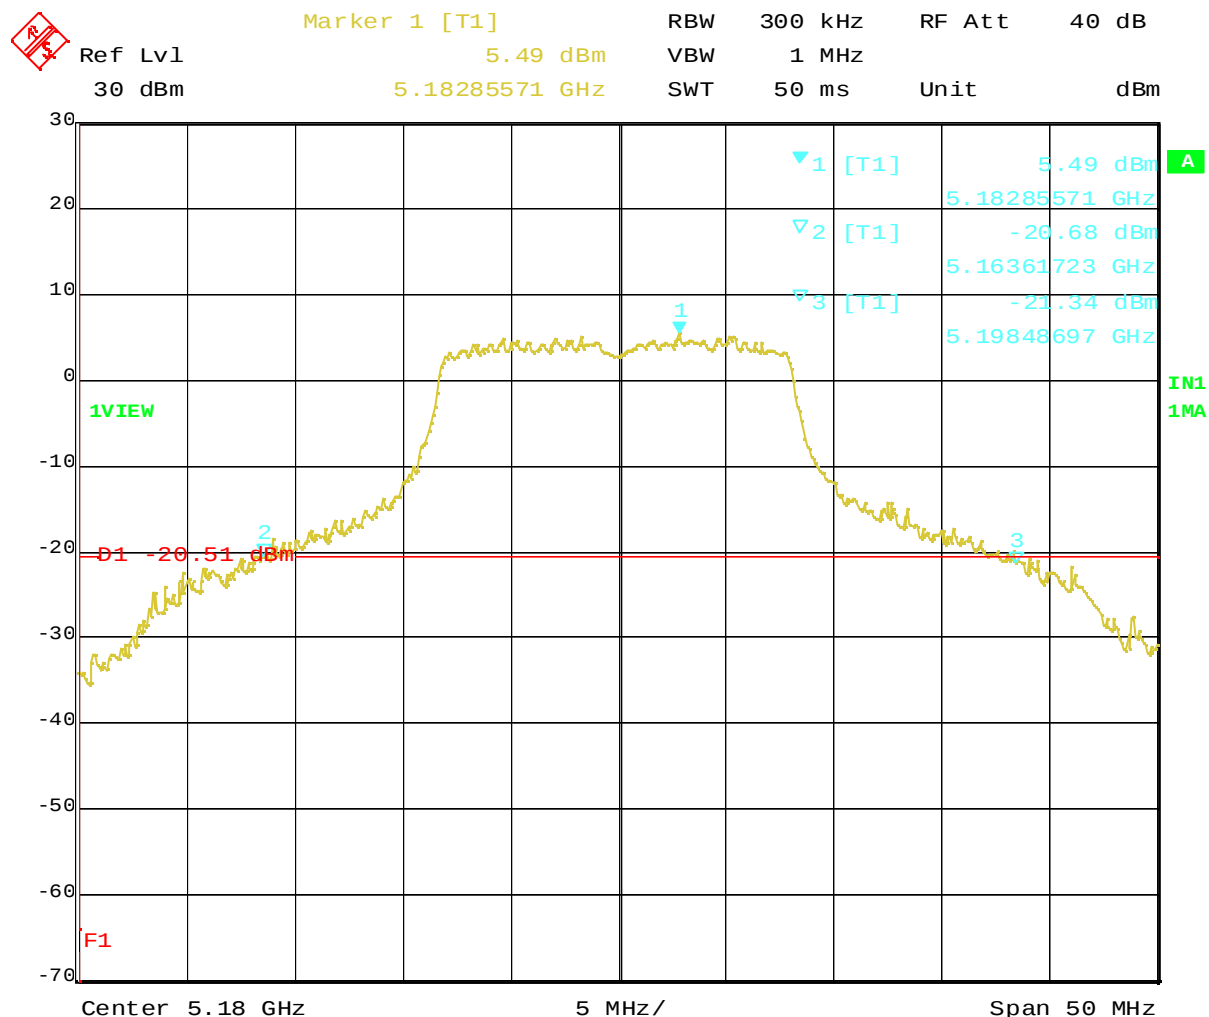


Date: 22.JUN.2004 18:08:52

Plot 1-1. 26dB BW at 5180MHz (OFDM, 6Mbps)

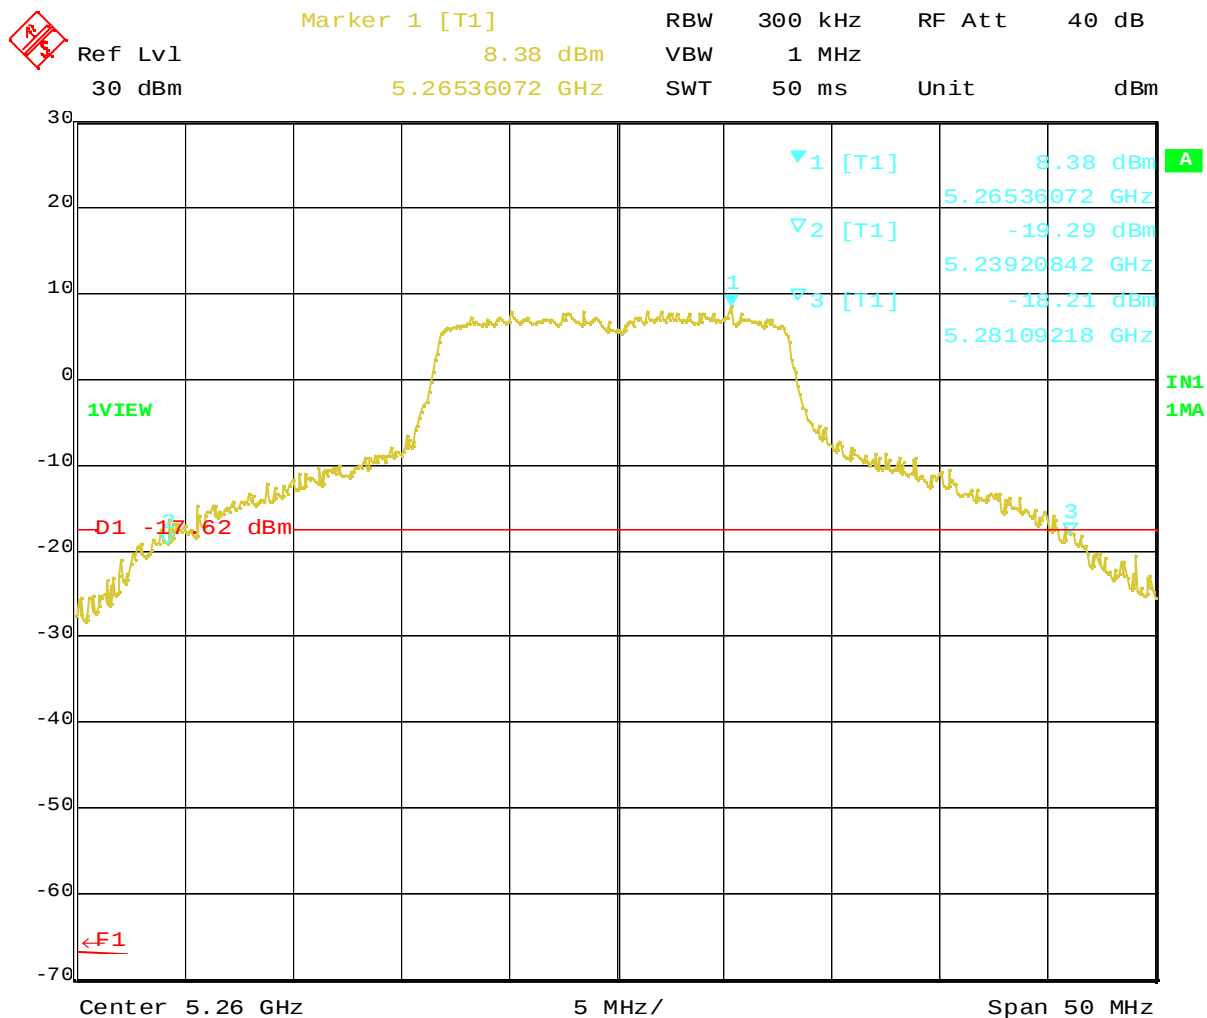

Date: 22.JUN.2004 18:39:51

Plot 1-2. 26dB BW at 5260MHz (OFDM, 6Mbps)

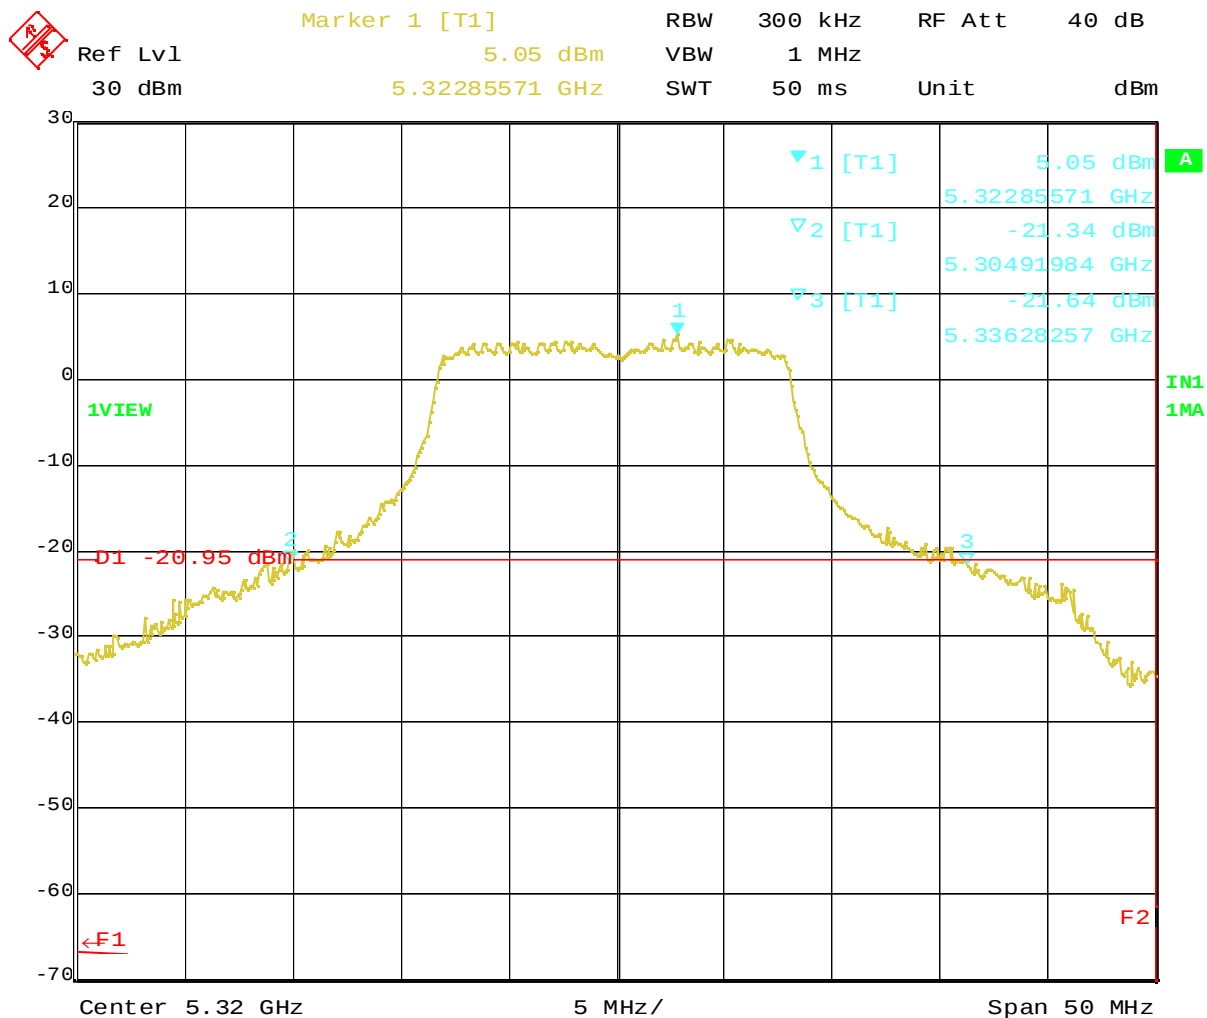

Date: 22.JUN.2004 19:04:51

Plot 1-3. 26dB BW at 5320MHz (OFDM, 6Mbps)

2. Peak Conducted Transmit Output Power

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i) / q1(iV)(b)]
 [5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii) / q1(iV)(b)]

2.1 Test Procedure

The test was performed with a spectrum analyzer in accordance with the Method #3 of the FCC Public Notice, DA 02-2138, August/30/2002

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode (shown in the Plot 2-0 below) at the appropriate center frequencies.

The spectrum analyzer was set to :

VBW= 30kHz ($\geq 1/T$, where T is transmission pulse duration. See Plot 2-0.), RBW=1MHz,
 Span= 50MHz encompassing the entire 26dB emission bandwidth of the transmission signal,
 Mode= sample detector, Trigger= free run

The band power measurement function was used to measure the peak power for each transmission mode (the lowest=6Mb/s, middle=18Mb/s and the highest=54Mb/s). The analyzer computed the peak power by integrating the spectrum across the 26 dB emission bandwidth given by the previous chapter.

Table 2-1: Test instruments of spectrum analyzer method

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Coax cables: - Spectrum Analyzer <=> EUT	Length: 110 cm Loss: 2.2 dB	

Notes: - R&S: Rohde & Schwarz

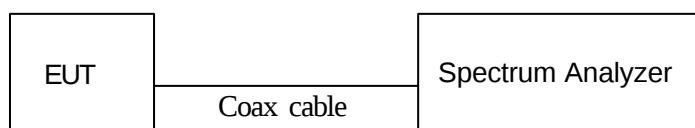


Figure 2-1 : Measurement setup of spectrum analyzer method


2.2 Measurement Results

Test Date: June 22, 2004

Table 2-2. Measurement results of peak conducted transmit output power

Measured Frequency (MHz)	Tx Rate (Mb/s)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	Limit		Peak antenna gain of EUT (dBi)	EIRP (dBm)	IC limit (dBm)
						FCC (dBm)	IC (dBm)			
5180	6	12.41	Plot 2-1	2.2	14.61	17	N/A	2.84	17.45	23
	18	12.34	omitted	2.2	14.54	17	N/A		17.38	23
	54	11.53	omitted	2.2	13.73	17	N/A		16.57	23
5260	6	15.57	Plot 2-2	2.2	17.77	24	24		20.61	30
	18	15.39	omitted	2.2	17.59	24	24		20.43	30
	54	11.63	omitted	2.2	13.83	24	24		16.67	30
5320	6	12.12	Plot 2-3	2.2	14.32	24	24		17.16	30
	18	11.90	omitted	2.2	14.10	24	24		16.94	30
	54	11.41	omitted	2.2	13.61	24	24		16.45	30


2.3 Trace Data

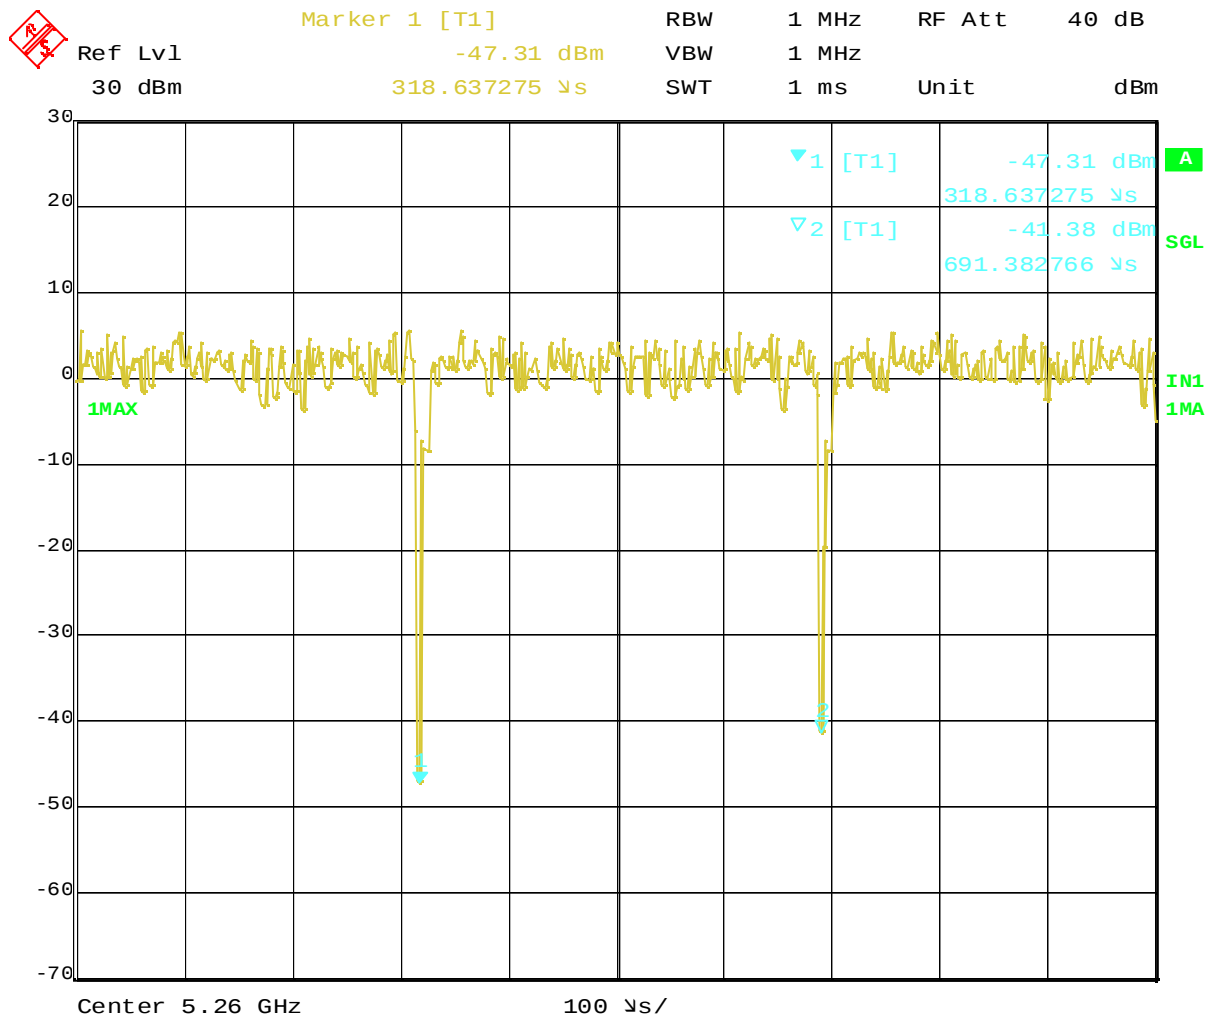

Date: 22.JUN.2004 19:56:31


Plot 2-0 Transmission Pulse Duration

Hereafter, comparatively worse measurement cases of each measured frequency in the previous Table 2.2 are selected.

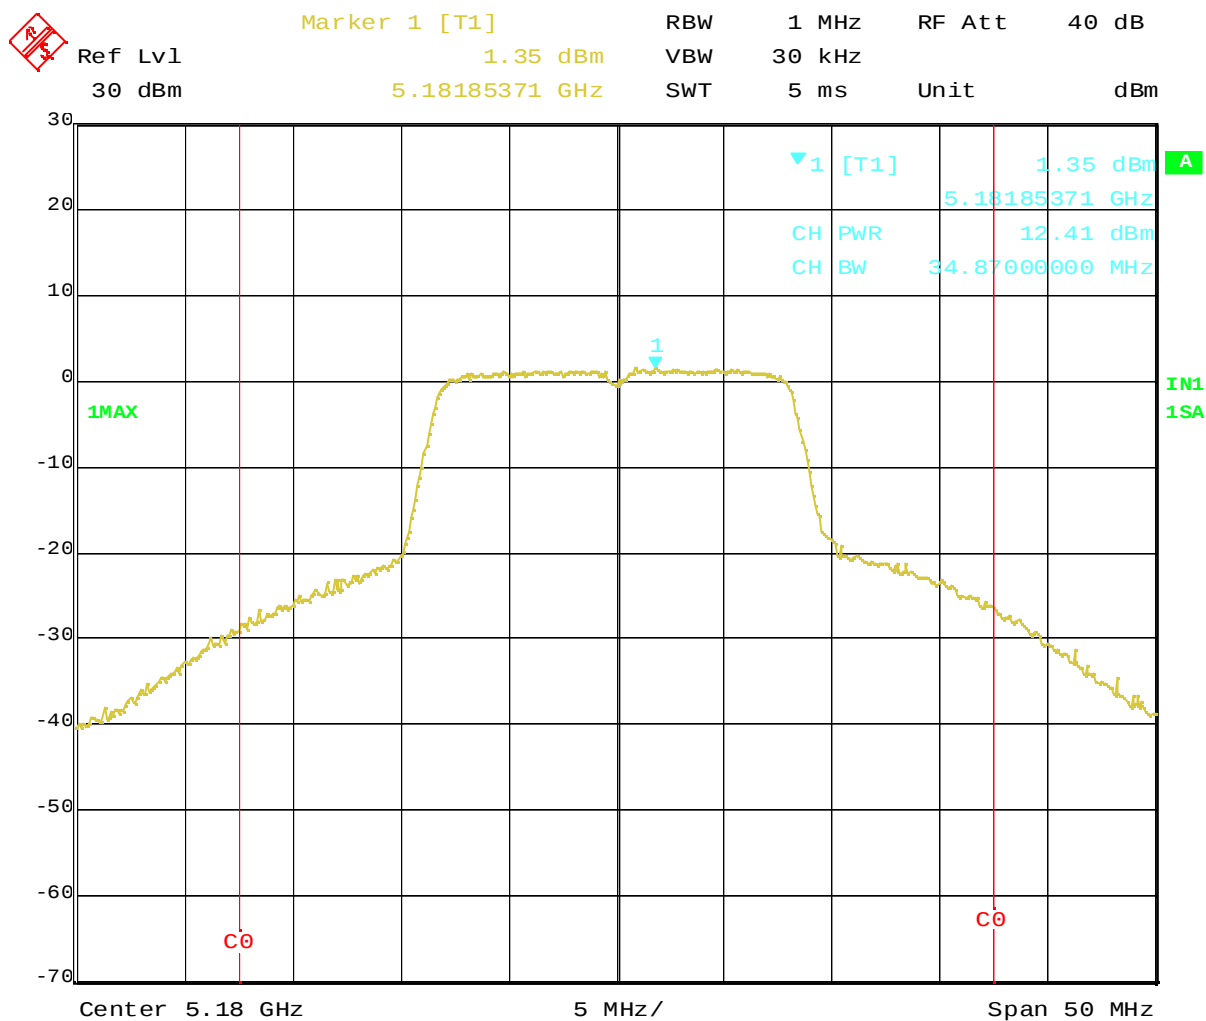


Date: 22.JUN.2004 20:06:14

Plot 2-1 Conducted Peak Power at 5180MHz (OFDM, 6Mbps)

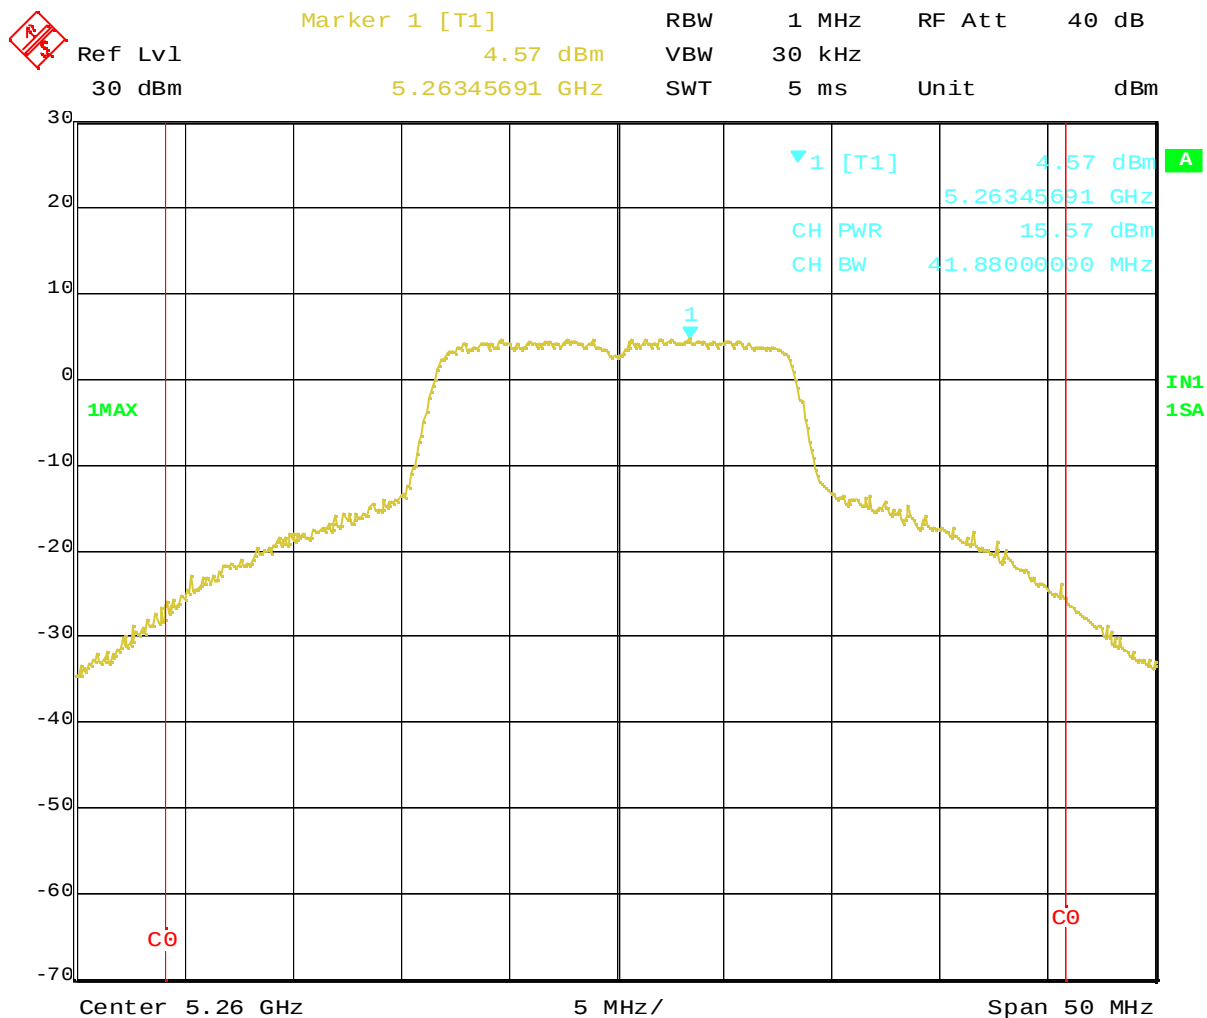

Date: 22.JUN.2004 20:27:51

Plot 2-2 Conducted Peak Power at 5260MHz (OFDM, 6Mbps)

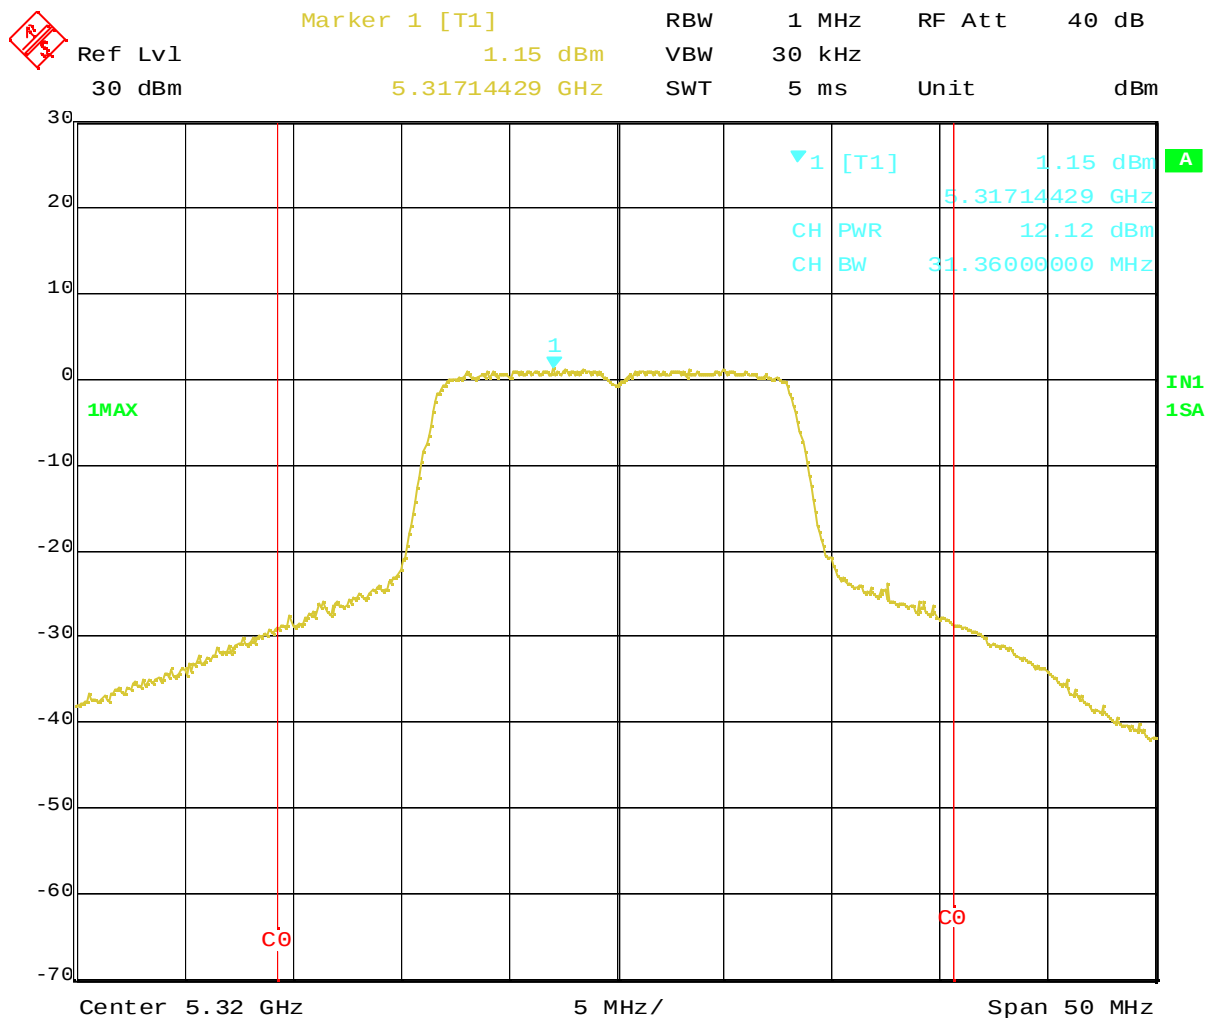

Date: 22.JUN.2004 20:43:45

Plot 2-3 Conducted Peak Power at 5320MHz (OFDM, 6Mbps)

3. Peak Power Spectral Density

[5150-5250MHz: FCC 15.407(a)(1), RSS 6.2.2q1(i), (iv)(b)]

[5250-5350MHz: FCC 15.407(a)(2), RSS 6.2.2q1(ii), (iv)(b)]

3.1 Test Procedure

The peak power spectral density was measured in accordance with the Method 2 shown in FCC Public Notice DA 02-2138.

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies.

The spectrum analyzer was set to :
RBW= 1MHz, VBW=3MHz, Span=20MHz, Mode= sample detector,
The analyzer averaged 100 traces in power averaging mode, then the marker was set to the highest position in the spectrum.

Also the Canadian PPSD was examined with the following spectrum analyzer setting.
RBW= 1MHz, VBW=1MHz, Span=20MHz, Mode= sample detector, averaging off

The test instruments and setup configuration are the same as the Table 2-1 and Figure 2-1.

3.2 Measurement Results

The measurement was performed with the worst case that tend to have higher conducted peak power based on the results of previous Chapter 2 “Peak Conducted Transmit Output Power” measurement.
i.e. 6Mbps was the worst case.

Test Date: June 22, 2004

Table 3-1. Measurement results of PPSD


Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	FCC Limit (dBm)	IC Limit q1(ii) (dBm)	Peak Antenna Gain (dBm)	IC EIRP (dBm)	IC Limit q1(i) (dBm)
5180.66	-0.80	Plot 3-1	2.2	1.4	4.0	N/A	2.84	4.2	10
5266.67	2.28	Plot 3-2	2.2	4.5	11.0	11.0			N/A
5324.99	-1.08	Plot 3-3	2.2	1.1	11.0	11.0			N/A

Table 3-2. Measurement results of Canadian PPSD


Measured Frequency (MHz)	Analyzer reading (dBm)	Trace number	Cable Loss (dB)	Results (dBm)	IC Limit q1(iv)(b) $3 + 10\log B^*$ (dBm)
5184.23	8.64	Plot 3-4	2.2	10.8	18.42
5258.86	11.14	Plot 3-5	2.2	13.3	19.22
5320.06	8.29	Plot 3-6	2.2	10.5	17.96

* B = 26dB Bandwidth

3.3 Trace Data

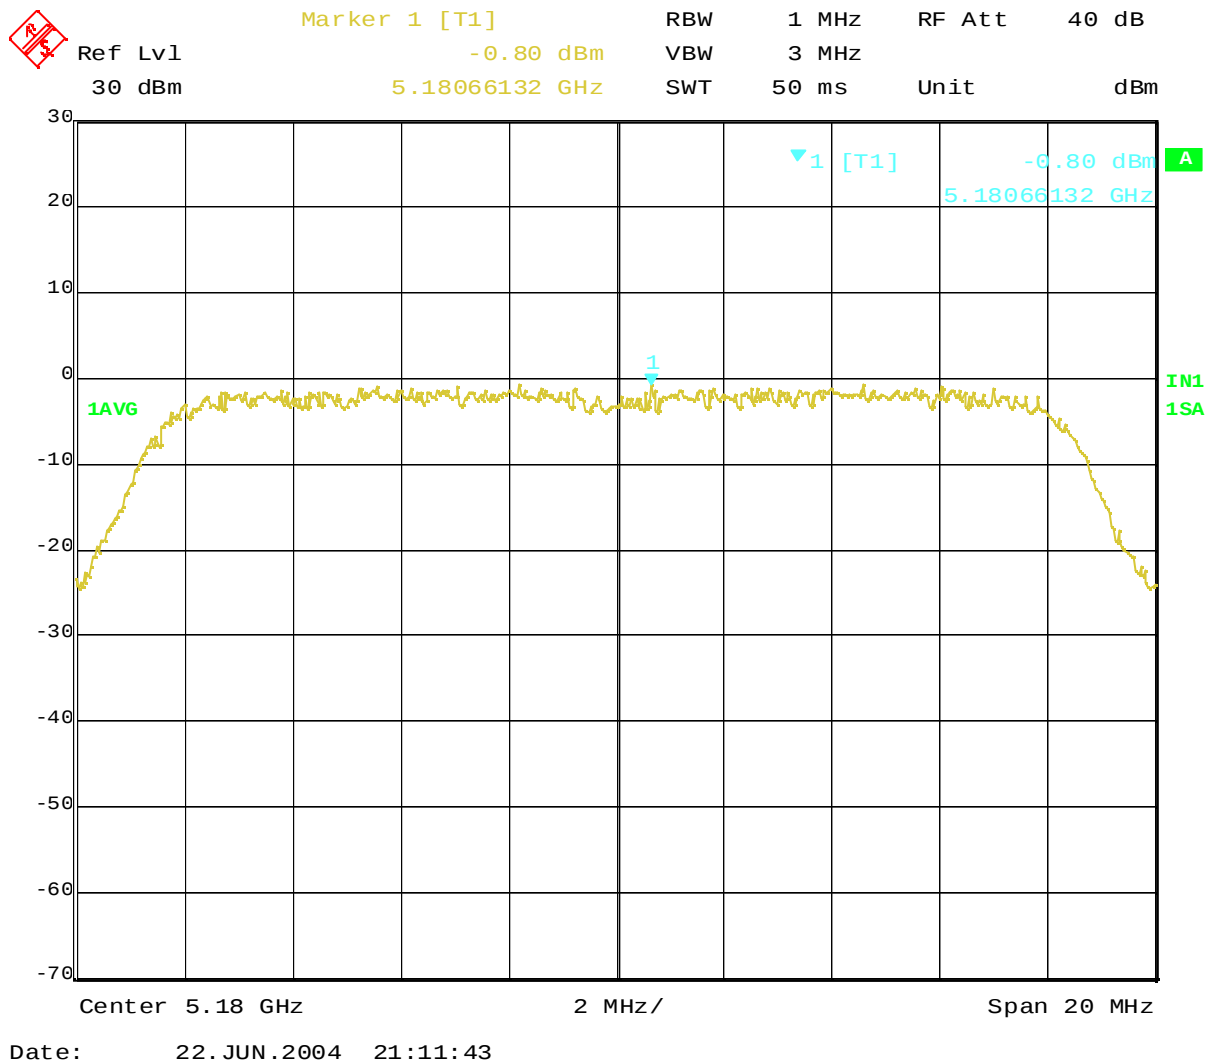


Plot 3-1 Peak Power Spectral Density at 5180MHz

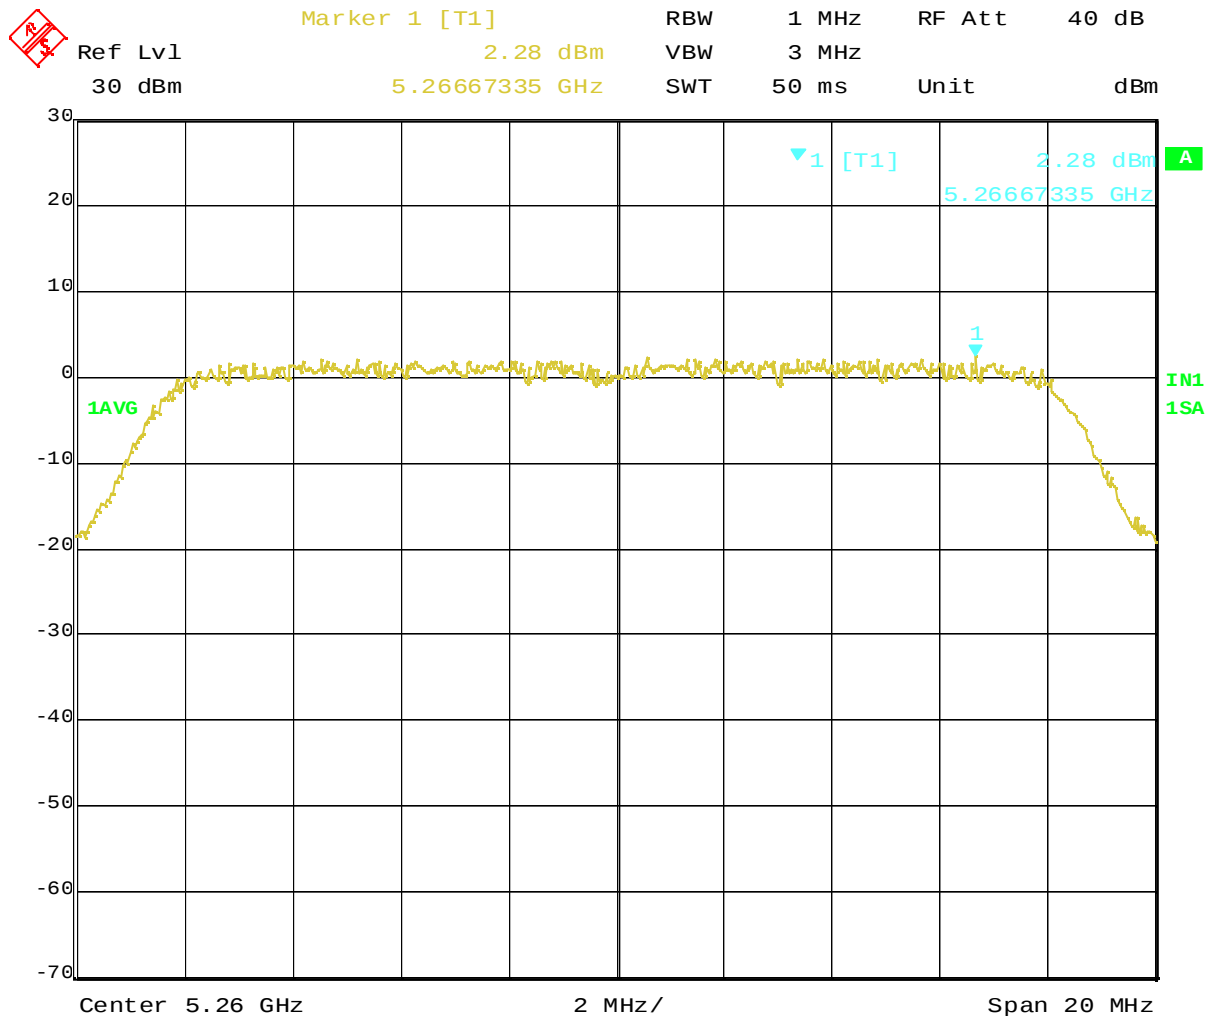


Date: 22.JUN.2004 21:13:43

Plot 3-2 Peak Power Spectral Density at 5260MHz

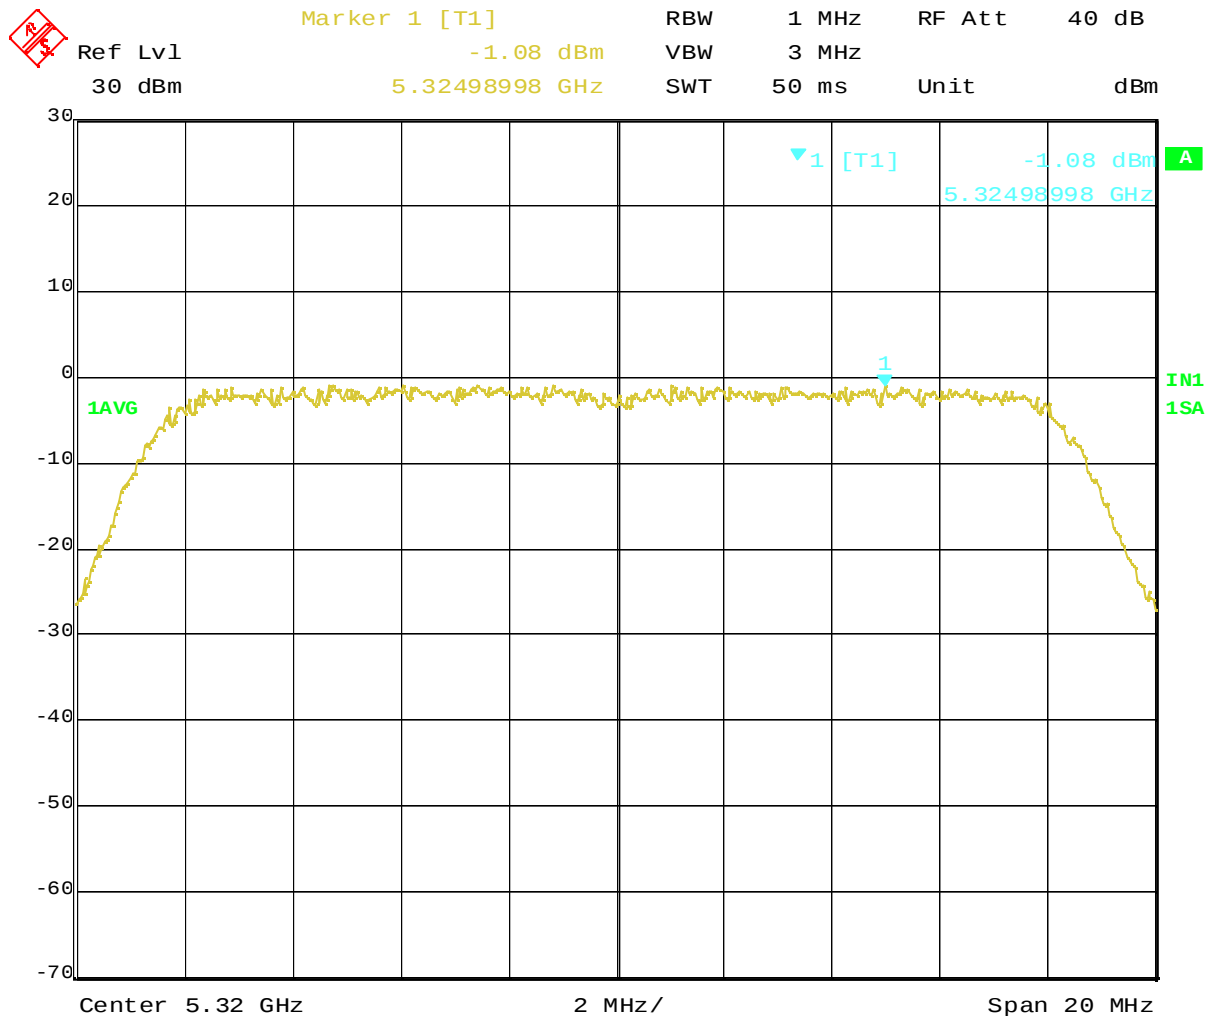


Date: 22.JUN.2004 21:14:47

Plot 3-3 Peak Power Spectral Density at 5320MHz

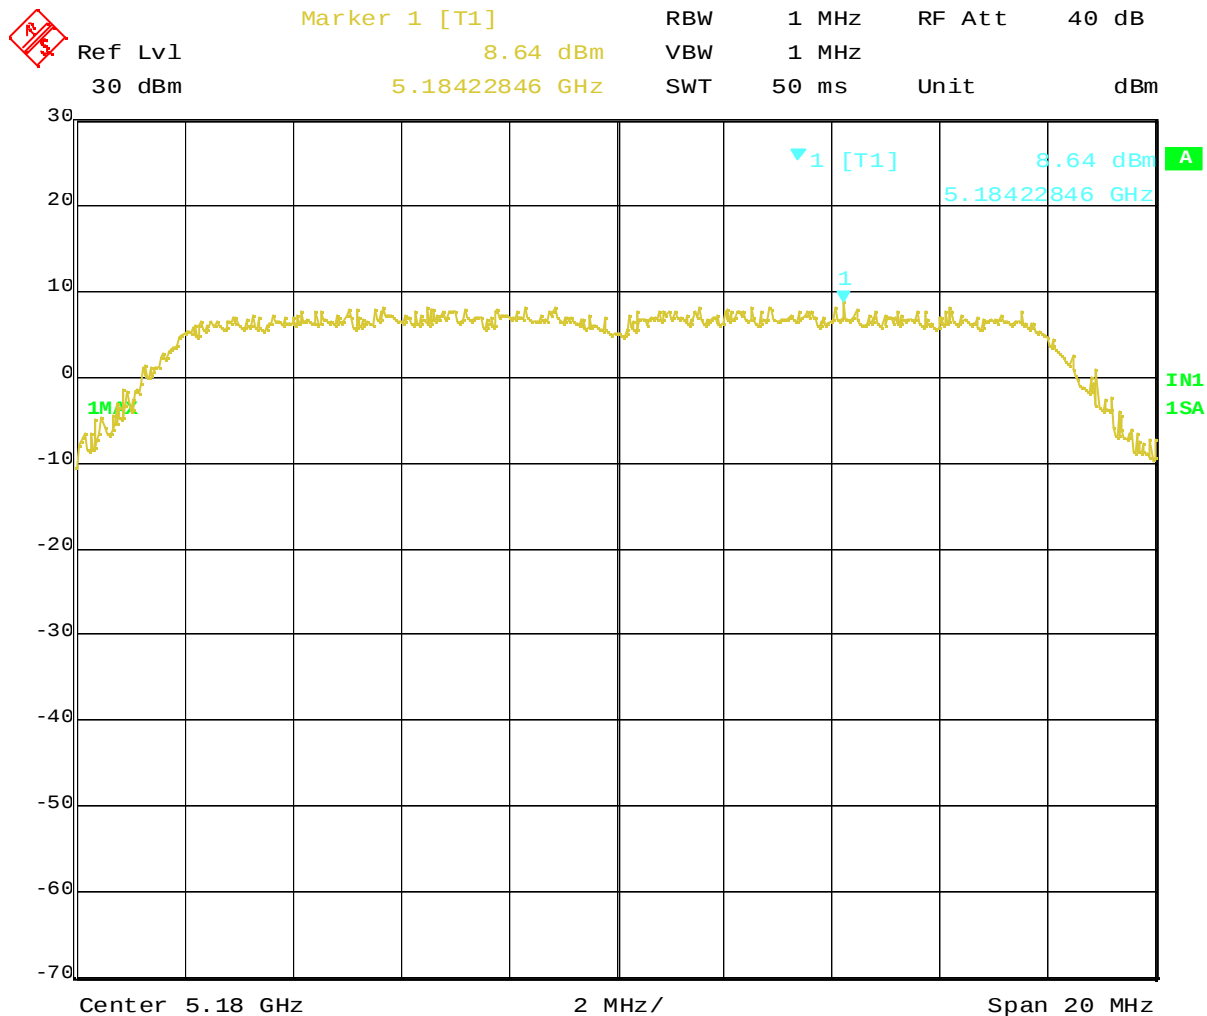


Date: 22.JUN.2004 21:23:11

Plot 3-4 Peak Power Spectral Density at 5180MHz (IC RSS-210)

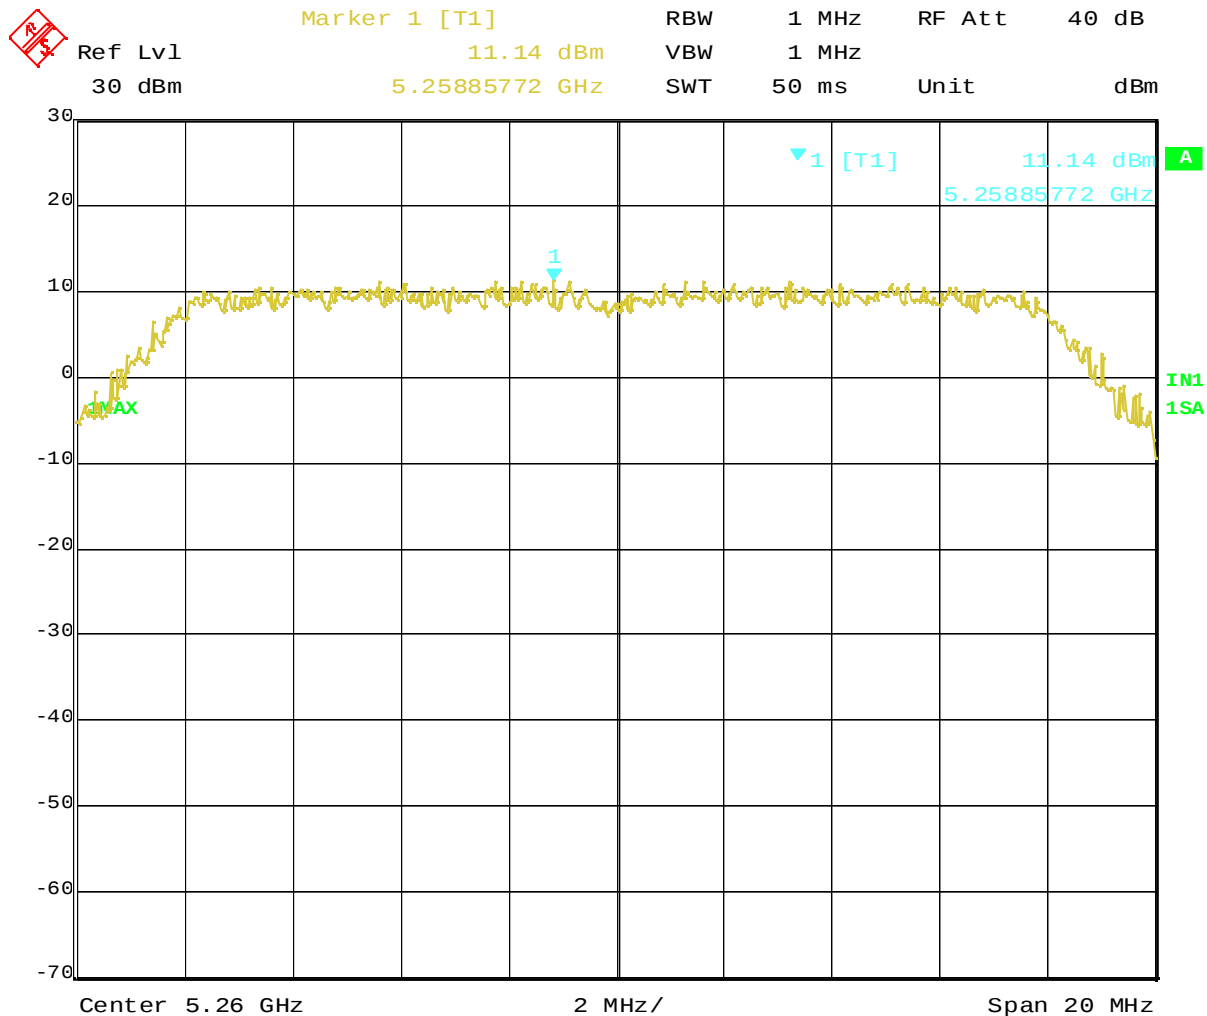

Date: 22.JUN.2004 21:21:46

Plot 3-5 Peak Power Spectral Density at 5260MHz (IC RSS-210)

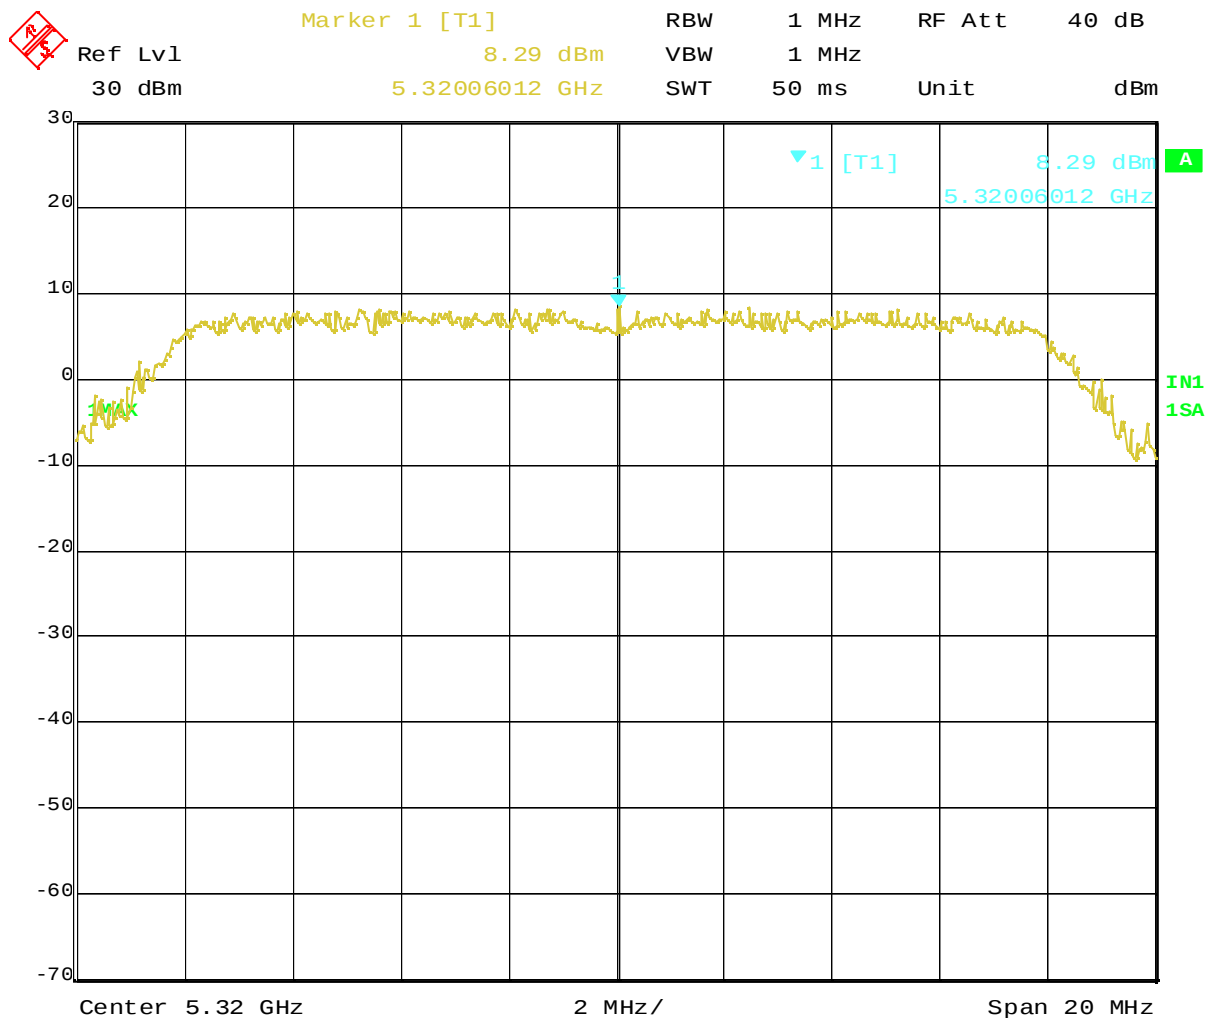

Date: 22.JUN.2004 21:17:36

Plot 3-6 Peak Power Spectral Density at 5320MHz (IC RSS-210)

4. Peak Excursion Ratio

[FCC 15.407(a)(6)]

4.1 Test Procedure

The spectrum analyzer was connected to the antenna terminal, while EUT was operating in continuous transmission mode at the appropriate center frequencies.

- 1st trace :
The spectrum analyzer was set to :
RBW= 1MHz, VBW=3MHz, Mode= peak detector and max hold
then to view.
- 2nd trace :
The same setting of spectrum analyzer as Chapter 2.1 for the measurement of peak conducted transmit output power was used for the 2nd trace.
i.e. VBW= 30kHz, RBW=1MHz, Span=30-40MHz, Trigger= free run,
Mode= sample detector

The largest difference of amplitude delta between the two trances is the peak excursion.

The test instruments and setup configuration are the same as the Table 2-1 and Figure 2-1.

4.2 Measurement Results


The measurement was performed with the worst case that tend to have higher conducted peak power based on the results of previous Chapter 2 “Peak Conducted Transmit Output Power” measurement.
i.e. 6Mbps was the worst case.

Test Date: June 22, 2004

Table 4-2. Measurement results of Peak Excursion Ratio


Measured Frequency (MHz)	Analyzer Reading delta (dB)	FCC Limit (dB)	Margin (dB)	Trace number
5182.77	9.80	13	3.20	Plot 4-1
5264.21	10.25		2.75	Plot 4-2
5322.61	9.60		3.40	Plot 4-3

4.3 Trace Data

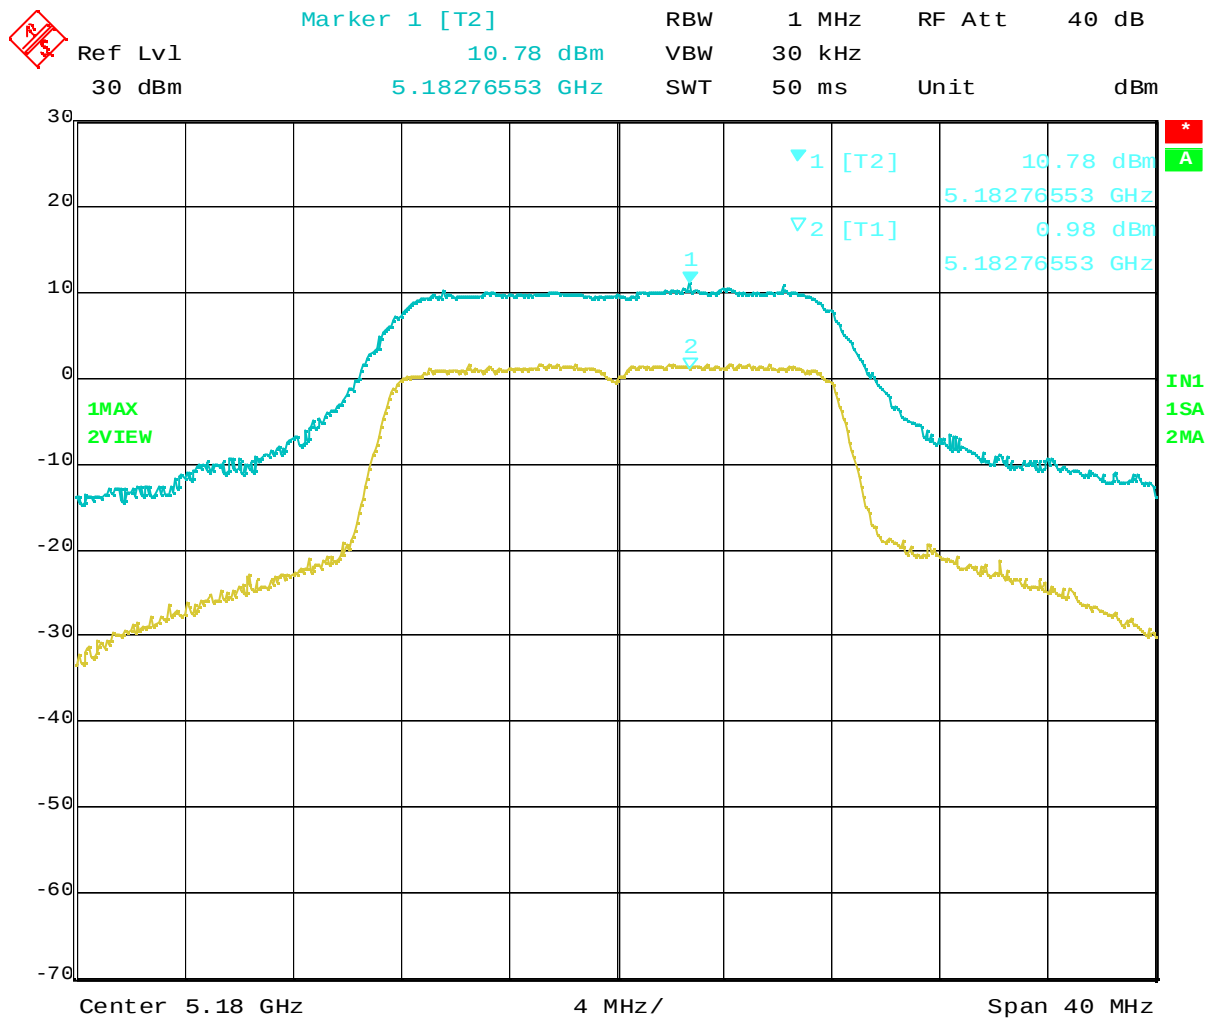


Date: 22.JUN.2004 21:28:49

Plot 4-1 Peak Excursion Ratio at 5180MHz

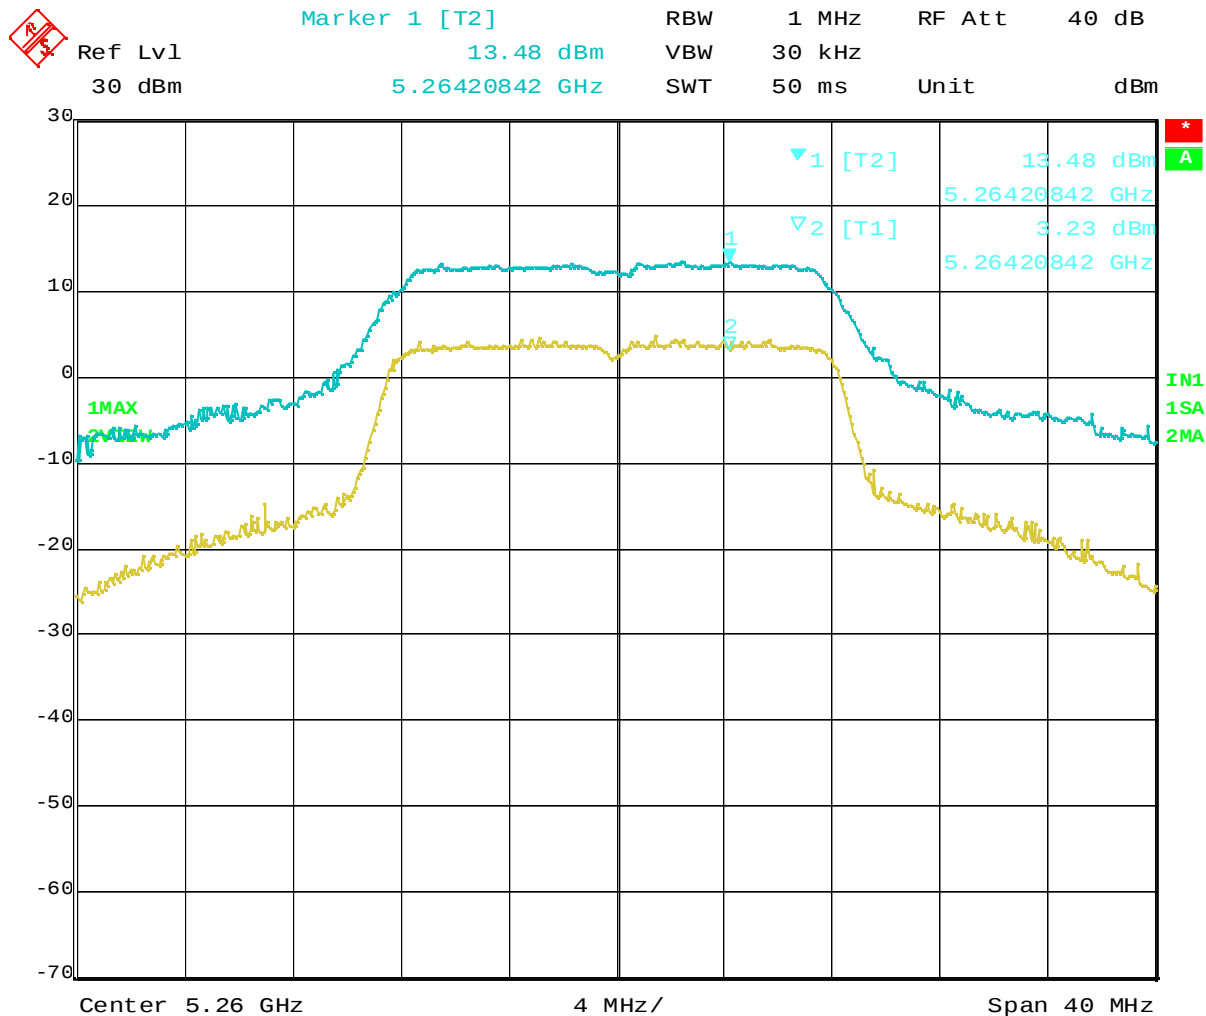

Date: 22.JUN.2004 21:31:37

Plot 4-2 Peak Excursion Ratio at 5260MHz

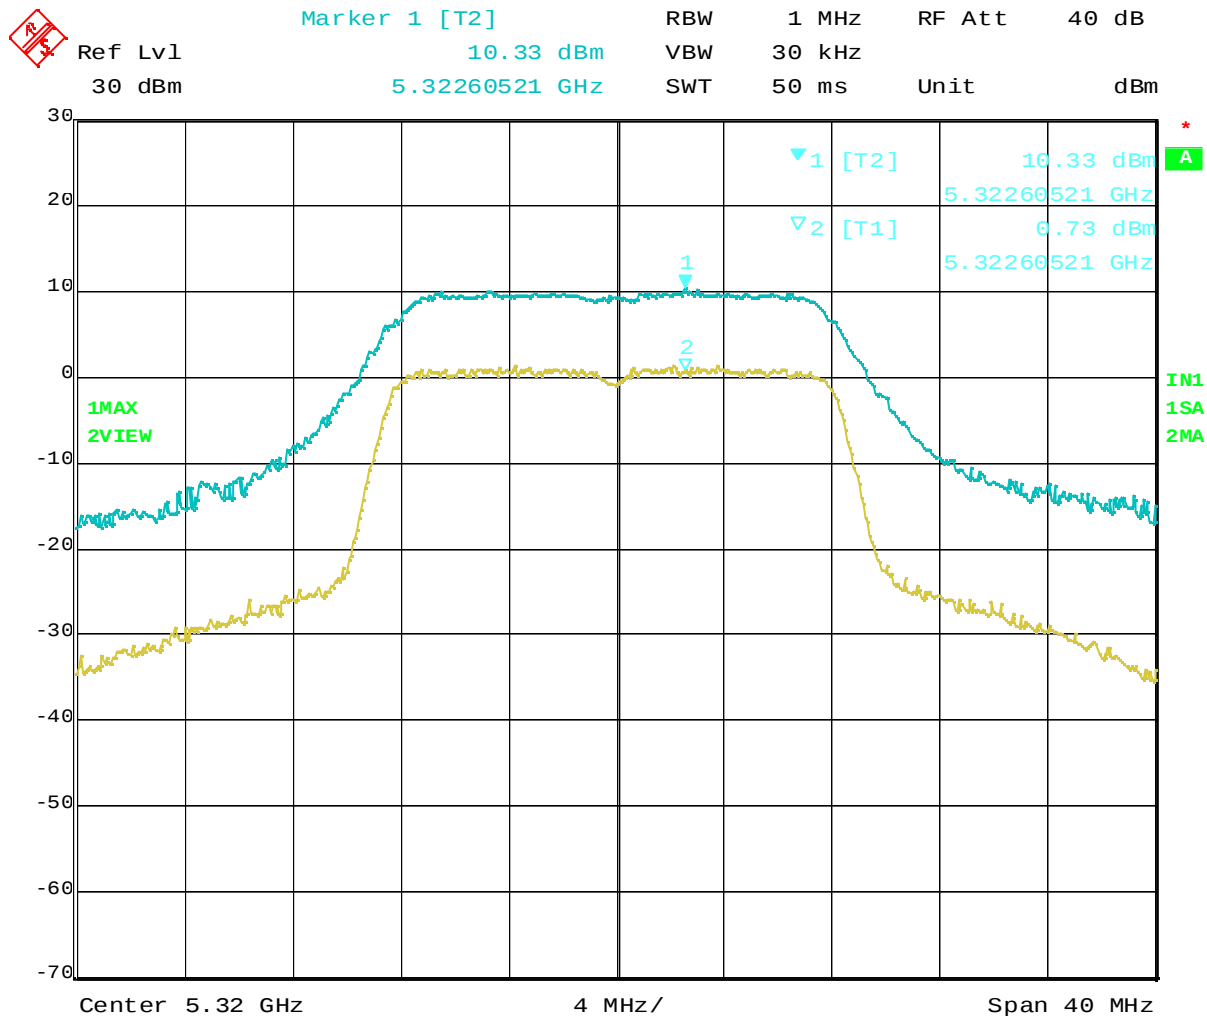

Date: 22.JUN.2004 21:33:31

Plot 4-3 Peak Excursion Ratio at 5320MHz

5. AC Wireline Conducted Emissions (150KHz – 30MHz)

[FCC 15.207/ 15.407(b)(5)]
[RSS-210 6.2.2(q1)(v) / 6.6 / 7.4]

5.1 Test Procedure

The conducted emissions are measured in the IBM shielded room with a spectrum analyzer in peak hold. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9KHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

5.2 Test Instruments and Measurement Setup

Table 5-1. Conducted Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6589-13J	97-15613
Spectrum Analyzer (100Hz-1.5GHz)	HP 85680B	2841A04254
Spectrum Analyzer Display	HP 85662A	2816A16831
Quasi-Peak Adapter	HP 85650A	2811A01156
Receiver (9kHz-30MHz)	R&S ESH3	891806/012
LISN	EMCO 3810/2NM	00022007
Switch/control unit	HP 3488A	2719A17228
Plotter	HP 7550A	2631A33619
Coax cables: - Lisen-L <=> SW/Con.unit (SW100) - Lisen-N <=> SW/Con.unit (SW101) - SW/Con.unit <=> RCVR (Input) - SW/Con.unit<=> Spe Ana.(Signal In)	Length: 4 m 4 m 1 m 1 m	- EMIC-L - EMIC-N - EMIC-R - EMIC-S

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

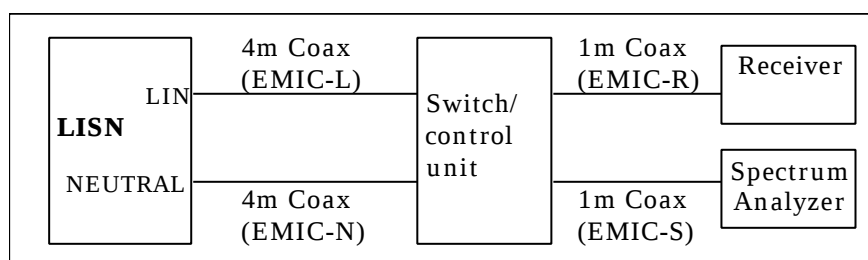


Figure 5. Cables for Conducted Emission Test

5.3 Powerline Voltage Calculation

The powerline voltage is calculated by adding insertion losses of LISN, Cable, Switch control unit and Pulse limiter to the measured reading. All factors are included in the reported data.

$$PV = R + CORR$$

where:

$$PV = \text{Powerline Voltage (dB}\mu\text{V)}$$

$$R = \text{Measured Receiver Input Amplitude (dB}\mu\text{V)}$$

$$CORR = \text{Correction Factor (dB) = LL+CL+SWL+PLL}$$

$$LL = \text{Insertion loss of LISN (dB)}$$

$$CL = \text{Insertion loss of Cable (dB)}$$

$$SWL = \text{Insertion loss of Switch control unit (dB)}$$

$$PLL = \text{Insertion loss of Pulse Limiter (dB)}$$

Given a Receiver input reading of 50.0 dB μ V, LISN loss of 0.6 dB, Cable loss of 0.1dB, Switch control unit loss of 0.1dB and Pulse limiter loss of 0.2dB. The Powerline Voltage of the measured emission is:

$$CORR = 0.6 + 0.1 + 0.1 + 0.2 = 1.0 \text{ (dB)}$$

$$PV = 50.0 + 1.0 = 51.0 \text{ (dB}\mu\text{V)}$$

5.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 14.4dB. The 6 highest emissions relative to the limits are reported.

Test Date: June 28, 2004

The actual highest emissions hereafter were found at 6Mbps on the auxiliary antenna of ThinkPad R50 Series 15 inch LCD model.

Table 5-2-1. Ch.36 (5180MHz) **TX** mode 6Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.2061	42.9	0.5	43.4	32.6	0.5	33.1	63.4	53.4	Neutral
0.2813	40.6	0.6	41.2	34.2	0.6	34.8	60.8	50.8	Line
0.3514	33.0	0.6	33.6	26.7	0.6	27.3	58.9	48.9	Neutral
0.4182	36.3	0.6	36.9	32.5	0.6	33.1	57.5	47.5	Line
0.6315	26.8	0.6	27.4	23.1	0.6	23.7	56.0	46.0	Line
5.9434	36.2	0.7	36.9	25.3	0.7	26.0	60.0	50.0	Neutral

Table 5-2-2. Ch.52 (5260MHz) **TX** mode 6Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.2107	45.0	0.5	45.5	34.4	0.5	34.9	63.2	53.2	Neutral
0.2794	40.9	0.6	41.5	34.5	0.6	35.1	60.8	50.8	Line
0.3494	33.9	0.6	34.5	26.8	0.6	27.4	59.0	49.0	Neutral
0.4174	35.6	0.6	36.2	31.7	0.6	32.3	57.5	47.5	Line
0.6301	27.1	0.6	27.7	23.3	0.6	23.9	56.0	46.0	Line
4.6835	29.4	0.7	30.1	20.2	0.7	20.9	56.0	46.0	Neutral

Table 5-2-3. Ch.64 (5320MHz) **TX** mode 6Mbps

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dBμV)	CISPR22 AV Limit (dBμV)	Phase
	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)	Measured Reading (dBμV)	Corr. Factor (dB)	Powerline Voltage (dBμV)			
0.2079	45.4	0.5	45.9	34.5	0.5	35.0	63.3	53.3	Neutral
0.2764	40.3	0.6	40.9	33.2	0.6	33.8	60.9	50.9	Line
0.3434	35.4	0.6	36.0	14.2	0.6	14.8	59.1	49.1	Line
0.7262	30.1	0.6	30.7	11.8	0.6	12.4	56.0	46.0	Line
0.9089	25.1	0.6	25.7	20.3	0.6	20.9	56.0	46.0	Line
5.6621	36.1	0.7	36.8	25.7	0.7	26.4	60.0	50.0	Neutral

Table 5-2-4. Ch. 52 (5260MHz) **RX** mode

Frequency (MHz)	QP			AV			CISPR22 QP Limit (dB μ V)	CISPR22 AV Limit (dB μ V)	Phase
	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)	Measured Reading (dB μ V)	Corr. Factor (dB)	Powerline Voltage (dB μ V)			
0.2095	45.6	0.5	46.1	37.0	0.5	37.5	63.2	53.2	Line
0.3552	29.9	0.6	30.5	19.1	0.6	19.7	58.8	48.8	Neutral
0.4646	25.6	0.6	26.2	9.3	0.6	9.9	56.6	46.6	Line
1.4067	19.3	0.6	19.9	12.0	0.6	12.6	56.0	46.0	Neutral
5.5322	35.8	0.7	36.5	25.2	0.7	25.9	60.0	50.0	Neutral
6.1611	34.1	0.7	34.8	23.5	0.7	24.2	60.0	50.0	Neutral

6. Restricted Bands Radiations (30MHz – 1GHz)

[FCC 15.205&209 / 15.407(b)(1),(2),(5),(6)]

[RSS-210 6.2.1 / 6.2.2(q1)(i),(ii),(v) / 6.3 / 7.3]

6.1 Test Procedure

Preliminary radiated emissions are measured in the semi-anechoic chamber at a 3 meter distance on every azimuth in both horizontal and vertical polarity. The antennas are also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized by a cable manipulation. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120kHz. The highest emissions relative to the limit are listed.

6.2 Test Instruments and Measurement Setup

Table 6-1 Radiated Emission Test Instrumentation

Description	Model	Serial Number
Computer	IBM 6868-30J	97-901X3
Spectrum Analyzer (100Hz-1.5GHz) for 30-200MHz	HP 85680B	2601A02634
Spectrum Analyzer Display for 30-200MHz	HP 85662A	2542A12308
Quasi-Peak Adapter for 30-200MHz	HP 85650A	2043A00062
Spectrum Analyzer (100Hz-1.5GHz) for 200-1000MHz	HP 85680B	3019A05156
Spectrum Analyzer Display for 200-1000MHz	HP 85662A	3026A19366
Quasi-Peak Adapter for 200-1000MHz	HP 85650A	2811A01433
Amplifier (100KHz-1.3GHz)		
- for 30-200MHz	MITEQ AM-3A	898433
- for 200-1000MHz	MITEQ AM-3A	898432
Biconical Antenna (30-200MHz)	EMCO 3108	2536
Log-Periodic Antenna (200-1000MHz)	EMCO 3146	2849
Receiver (20MHz-1.3GHz)	R&S ESVP	893202/018
Switch/control unit	HP 3488A	2719A17226
N-Coax cables:	Length:	
- Bi-coni Ant <=> 10m Cable	9 m	- EM103L01
- 10m Cable <=> Shield Panel	10 m	- EM103L02
- Shield Panel <=> RF Amp	7 m	- EM103L03
- RF Amp <=> Power Splitter	0.5m	- EM103L04
- Log-peri Ant <=> 10m Cable	9 m	- EM103H01
- 10m Cable <=> Shield Panel	10 m	- EM103H02
- Shield Panel <=> RF Amp	7 m	- EM103H03
- RF Amp <=> Power Splitter	0.5m	- EM103H04
Coax cables:		
- Power Splitter <=> SW/Con.unit (SW110)	1 m	- EM103L05
- Power Splitter <=> SW/Con.unit (SW300)	1 m	- EM103L06
- Power Splitter <=> SW/Con.unit (SW100)	1 m	- EM103H05
- Power Splitter <=> SW/Con.unit (SW301)	1 m	- EM103H06
- SW/Con.unit <=> Receiver (Input)	2 m	- EM1RCV
- SW/Con.unit <=> Spe Ana.(Signal In) for 30- 200MHz	2 m	- EM1SPL
- SW/Con.unit <=> Spe Ana.(Signal In) for 200-1000MHz	2 m	- EM1SPH

Notes:

- HP: Hewlett Packard, R&S: Rohde & Schwarz

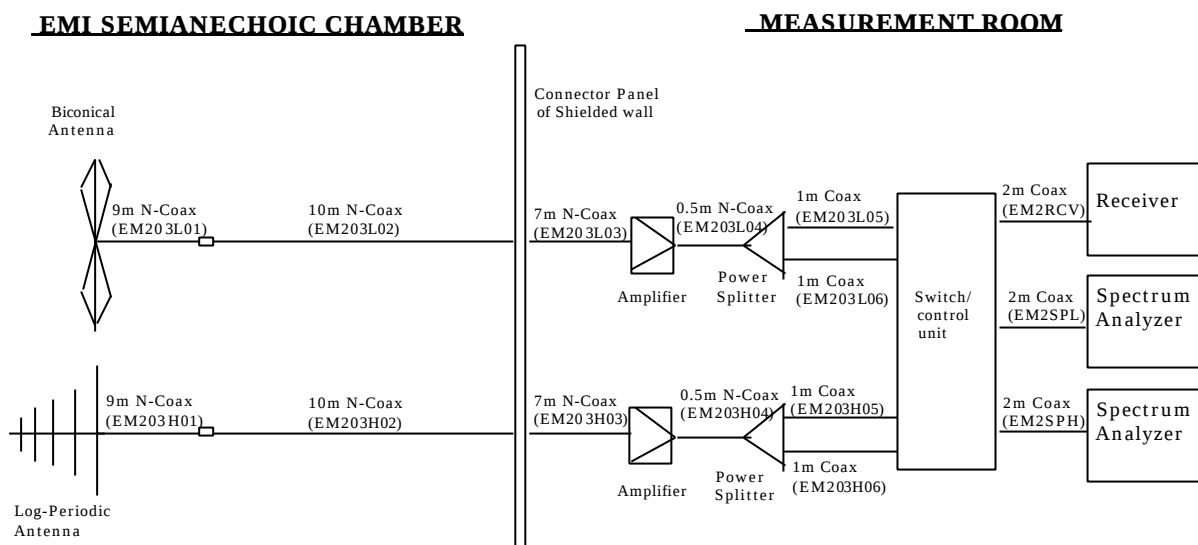


Figure 6 Cables for Radiated Emission Test

6.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver. All factors are included in the reported data.

$$FS = R + AF + CORR$$

where:

FS	=	Field Strength
R	=	Measured Receiver Input Amplitude
AF	=	Antenna Factor
CORR	=	Correction Factor = CL - AG
CL	=	Cable Loss
AG	=	Amplifier Gain

For example :

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB/m; Cable Loss of 1.3dB; and an Amplifier Gain of 26dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 = 35.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\text{Level}(\text{dB}\mu\text{V/m}) = 20 \times \text{Log}(\text{Level}(\mu\text{V/m}))$$

$$40\text{dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48\text{dB}\mu\text{V/m} = 250\mu\text{V/m}$$

6.4 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 3.4 dB at 30MHz - 1000MHz band. The 6 highest emissions relative to the limits are reported.

The actual highest emissions hereafter were found at 6Mbps on the auxiliary antenna of ThinkPad R50 Series 15 inch LCD model.

Test Date: June 29, 2004

Table 6-2-1. Ch.36 (5180MHz) **TX** mode 6Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
196.606	H	48.5	13.6	-26.7	35.4	43.5	58.9	150
203.067	H	47.4	11.3	-25.2	33.5	43.5	47.3	150
364.507	H	46.0	14.4	-22.8	37.6	46.0	75.9	200
400.323	H	41.6	15.3	-22.9	34.0	46.0	50.1	200
600.486	H	34.9	18.7	-20.3	33.3	46.0	46.2	200
729.014	H	39.6	21.1	-19.6	41.1	46.0	113.5	200

Table 6-2-2. Ch.52 (5260MHz) **TX** mode 6Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
196.606	H	49.7	13.6	-26.7	36.6	43.5	67.6	150
364.507	H	45.9	14.4	-22.8	37.5	46.0	75.0	200
386.587	V	41.9	14.9	-23.1	33.7	46.0	48.4	200
400.319	H	41.2	15.3	-22.9	33.6	46.0	47.9	200
432.971	V	39.3	15.9	-21.7	33.5	46.0	47.3	200
729.014	H	41.0	21.1	-19.6	42.5	46.0	133.4	200

Table 6-2-3. Ch.64 (5320MHz) **TX** mode 6Mbps

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
196.606	H	47.7	13.6	-26.7	34.6	43.5	53.7	150
364.507	H	48.1	14.4	-22.8	39.7	46.0	96.6	200
386.587	V	40.8	14.9	-23.1	32.6	46.0	42.7	200
415.223	V	39.6	15.5	-22.4	32.7	46.0	43.2	200
729.014	V	39.3	21.1	-19.6	40.8	46.0	109.6	200
911.268	V	28.2	22.8	-17.8	33.2	46.0	45.7	200

Table 6-2-4. Ch.52 (5260MHz) **RX** mode

Frequency (MHz)	Polarity (H/V)	Measured (dB μ V)	Antenna Factor (dB/m)	Corr. Factor (dB)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Field Strength (μ V/m)	Limit (μ V/m)
196.607	H	47.4	13.6	-26.7	34.3	43.5	51.9	150
333.603	H	41.4	14.2	-23.5	32.1	46.0	40.3	200
364.507	H	46.4	14.4	-22.8	38.0	46.0	79.4	200
386.587	V	41.0	14.9	-23.1	32.8	46.0	43.7	200
415.223	V	40.3	15.5	-22.4	33.4	46.0	46.8	200
729.014	H	41.1	21.1	-19.6	42.6	46.0	134.9	200

7. Restricted Bands Radiations (1GHz – 40GHz)

[FCC 15.205&209 / 15.407(b)(1),(2),(5),(6)]

[RSS-210 6.2.1 / 6.2.2(q1)(i),(ii),(v) / 6.3 / 7.3]

7.1 Test Procedure

Radiated emissions were measured in the frequency range with 1 GHz to 40GHz in transmitting mode and 1 GHz to 25GHz in receiving mode. All tests were performed in the semi-anechoic chamber at a 3-meter distance (except for the frequency range with 18 GHz to 40 GHz where test distance was reduced to 1 meter) on both horizontal and vertical polarities. The antenna was also scanned in height. The emissions are recorded with a spectrum analyzer in peak hold mode. The identified emissions are further maximized as a function of cable manipulation, azimuth, and antenna height. The emissions closest to the limits are measured in the peak mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 1MHz, and the average setting mode with the tuned spectrum analyzer using resolution bandwidth of 1MHz / video bandwidth of 100Hz or 10Hz. The highest emissions relative to the limit are listed.

7.2 Test Instruments and Measurement Setup

Table 7 Radiated Emission Test Instrumentation (1GHz – 40GHz)

Description	Model	Serial Number
Spectrum Analyzer EMI Test Receiver	R&S ESI26	836119/003
Spectrum Analyzer	HP 8563E	3416A02248
Harmonic Mixer (26.5 – 40GHz)	Agilent 11970A	011269-001
Amplifier (1 - 26.5GHz)	HP 8449B	3008A00582
Amplifier (26.5 – 40GHz)	Agilent 83051A	3950M00193
Horn Antenna (1 - 18GHz)	EMCO 3115	9903-5774
Horn Antenna (3.95 – 5.85GHz)	EMCO 3160-5	1099
Horn Antenna (5.85 – 8.2GHz)	EMCO 3160-6	9712-1044
Horn Antenna (8.2 – 12.4GHz)	EMCO 3160-7	1156
Horn Antenna (12.4 – 18GHz)	EMCO 3160-8	1143
Horn Antenna (18 - 26.5GHz)	EMCO 3160-9	0004-1202
Horn Antenna (26.5 - 40GHz)	EMCO 3160-10	1175
Coaxial cables: - Horn Ant <=> RF Amp. (1-18GHz) - RF Amp. <=> Spectrum Analyzer (1-12.4GHz) - RF Amp. <=> Spectrum Analyzer (12.4-18GHz) - Horn Ant <=> RF Amp. (18-40GHz) - RF Amp. <=> Spectrum Analyzer (18-40GHz)	Length: 6 m 16 m 3m 3m 1m	- EM206SCO - GEM0101 - SF102-20166 - SF102-20167 - SF102-21105

Notes: - HP: Hewlett Packard, R&S: Rohde & Schwarz

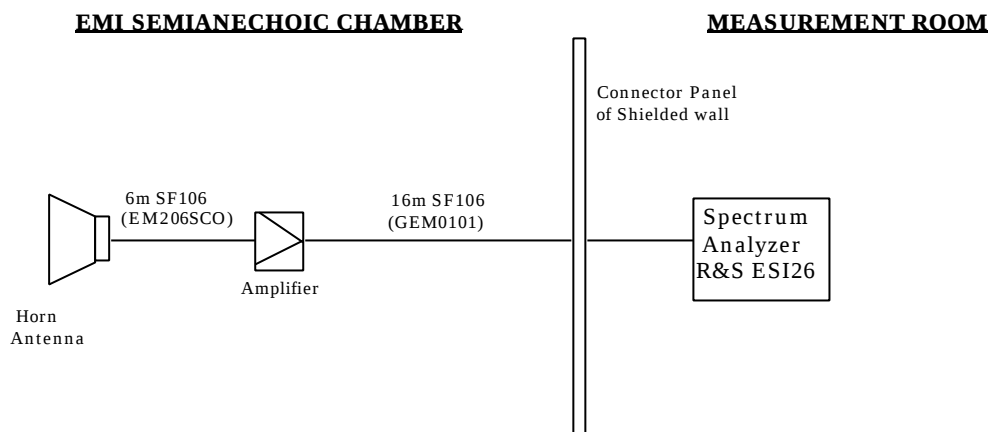


Figure 7-1. Cables for Radiated Emission Test (1 – 12.4 GHz)

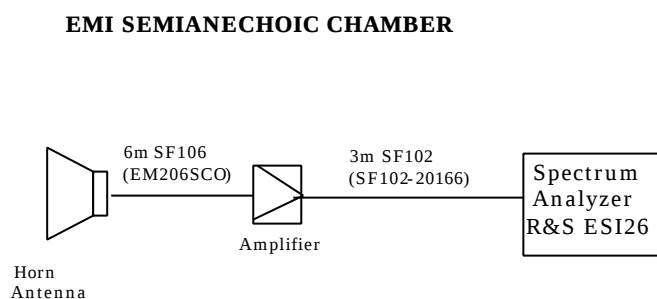


Figure 7-2. Cables for Radiated Emission Test (12.4 - 18GHz)

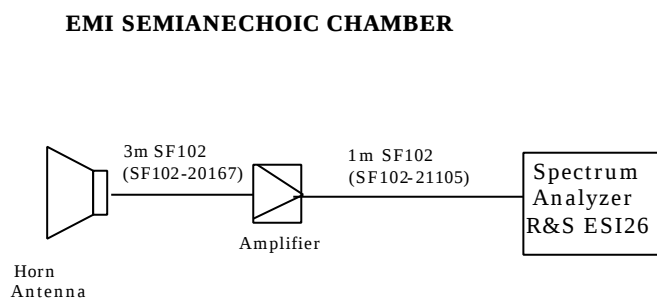


Figure 7-3. Cables for Radiated Emission Test (18 - 26.5GHz)

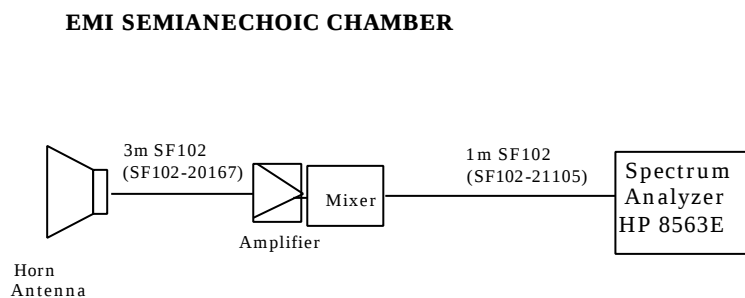


Figure 7-4. Cables for Radiated Emission Test (26.5 - 40GHz)

7.3 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where:

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR= Correction Factor = CL-AG

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

For example:

Given a Spectrum Analyzer input reading of 51.5 dBμV; Antenna Factor of 8.5 dB/m; Cable Loss of 1.3 dB; Falloff Factor of 0 dB; and an Amplifier Gain of 26 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26 - 0.0 = 35.6 \text{ dB}\mu\text{V/m}$$

Conversions between dBμV/m (or dBμV) and μV/m (or μV) are done as :

$$\text{Level(dB}\mu\text{V/m)} = 20 \times \text{Log (Level}(\mu\text{V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

7.4 Limits

Table 7-1. Limits for EIRP emissions

Limit for emissions in restricted bands FCC 15.205&209 / RSS-210 6.3&7.3	54 dBμV/m (average)	74 dBμV/m (peak)
Limit for emissions in non_restricted bands FCC 15.407(b)(1)&(2) / RSS-210 (q1)(i)&(ii)	EIRP 68.2 dBμV/m (-27 dBm/MHz)	

7.5 Measurement Results

The EUT was found to comply to the limits of FCC Part 15 Subpart E and RSS-210 with a margin of 3.1 dB. The measurement was done for the frequency range of 1 GHz to 40 GHz in TX mode and 1 GHz to 25GHz in RX mode.

The actual highest emissions hereafter were found at 6Mbps on the auxiliary antenna of ThinkPad R50 Series 15 inch LCD model.

Test Date: June 22, 23 and 24, 2004

Table 7-2-1. Ch.36 (5180MHz) **TX** mode 6Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	FCC Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	FCC Limit (dBμV/m) (average)
OB										
5.184 bandedge	H	101.4	90.9	33.7	-26.1	0.0	109.0	N/A	98.5	N/A
5.144	H	57.5	40.7	33.6	-26.1	0.0	65.0	74.0	48.2	54.0
5.148	H	59.0	42.2	33.6	-26.1	0.0	66.5	74.0	49.7	54.0
5.150	H	57.8	43.4	33.6	-26.1	0.0	65.3	74.0	50.9	54.0
1.006	V	49.5	-	24.1	-31.9	0.0	41.7	74.0	-	54.0
1.094	V	51.3	-	24.4	-31.5	0.0	44.2	74.0	-	54.0
1.198	V	52.7	-	25.2	-31.3	0.0	46.6	74.0	-	54.0
1.671	V	48.8	-	25.8	-30.1	0.0	44.5	74.0	-	54.0
6.906	H	43.5	-	29.9	-24.9	0.0	48.5	68.2	-	NRB
10.361	V	43.8	-	33.5	-21.2	0.0	56.1	68.2	-	NRB
15.549	V	40.3	-	37.2	-23.6	0.0	53.9	74.0	-	54.0

Note: OB means "operation band" (5150-5250MHz).

NRB means "non restricted band": The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-2. Ch.52 (5260MHz) **TX** mode 6Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dBμV) (peak)	Measured (dBμV) (average)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dBμV/m) (peak)	FCC Limit (dBμV/m) (peak)	Field Strength (dBμV/m) (average)	FCC Limit (dBμV/m) (average)
OB										
5.255 bandedge	H	102.8	92.3	33.7	-26.0	0.0	110.5	N/A	100.0	N/A
5.150	H	48.2	35.9	33.6	-26.1	0.0	55.7	74.0	43.4	54.0
5.350	H	48.0	36.9	33.9	-25.6	0.0	56.3	74.0	45.2	54.0
5.358	H	49.5	36.8	33.9	-25.6	0.0	57.8	74.0	45.1	54.0
1.094	V	51.9	-	24.4	-31.5	0.0	44.8	74.0	-	54.0
1.130	V	53.8	-	24.6	-31.4	0.0	47.0	74.0	-	54.0
1.194	V	51.1	-	25.2	-31.3	0.0	45.0	74.0	-	54.0
1.591	V	52.9	-	25.6	-30.3	0.0	48.2	74.0	-	54.0
7.014	H	43.4	-	30.0	-24.5	0.0	48.9	68.2	-	NRB
10.523	V	47.5	-	33.5	-20.8	0.0	60.2	68.2	-	NRB
15.788	V	41.6	28.6	37.2	-23.8	0.0	55.0	74.0	42.0	54.0

Note: OB means “operation band” (5250-5350MHz).

NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-3. Ch.64 (5320MHz) **TX** mode 6Mbps

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
OB										
5.317 bandedge	H	100.2	89.4	33.7	-25.7	0.0	108.2	N/A	97.4	N/A
5.350	H	57.9	41.8	33.9	-25.6	0.0	66.2	74.0	50.1	54.0
5.352	H	59.6	40.8	33.9	-25.6	0.0	67.9	74.0	49.1	54.0
5.353	H	57.2	40.4	33.9	-25.6	0.0	65.5	74.0	48.7	54.0
1.092	V	52.1	-	24.4	-31.5	0.0	45.0	74.0	-	54.0
1.160	V	55.2	-	24.6	-31.3	0.0	48.5	74.0	-	54.0
1.200	V	51.7	-	25.2	-31.3	0.0	45.6	74.0	-	54.0
1.589	V	48.0	-	25.5	-30.4	0.0	43.1	74.0	-	54.0
7.094	H	43.1	-	30.0	-24.8	0.0	48.3	68.2	-	NRB
10.641	V	46.5	33.3	33.5	-20.9	0.0	59.1	74.0	45.9	54.0
15.962	V	39.7	-	37.2	-23.2	0.0	53.7	74.0	-	54.0

*Note: OB means “operation band” (5250-5350MHz).

NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

Table 7-2-4 Ch.52 (5260MHz) **RX** mode

Frequency (GHz)	Polarity (H/V)	Measured (dB μ V) (<i>peak</i>)	Measured (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	FCC Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	FCC Limit (dB μ V/m) (<i>average</i>)
1.092	V	50.5	-	24.4	-31.5	0.0	43.4	74.0	-	54.0
1.160	V	48.6	-	24.6	-31.3	0.0	41.9	74.0	-	54.0
1.198	V	50.7	-	25.2	-31.3	0.0	44.6	74.0	-	54.0
1.595	V	49.6	-	25.6	-30.3	0.0	44.9	74.0	-	54.0

Note: NRB means “non restricted band”: The limit of FCC Part 15.407(b)(1),(2) and RSS-210 6.2.2(q1)(I),(ii) apply.

7.6 Measurement plots of adjacent restricted band

7.6.1 List of Measurement Results

The measurement was performed with the worst case that tend to have higher peak output power based on the results of previous Chapter 2 “Peak Conducted Transmit Output Power” measurement.

i.e. 6Mbps showed the highest peak power.

And each antenna port with the highest gain was selected for each host device.

Table 7-3. Radiated peak emission in 5.2GHz OFDM transmission mode, 6Mbps


Measured host device: IBM ThinkPad T40 Series, 15 inch LCD model, main antenna

IBM ThinkPad R50 Series, 15 inch LCD model, auxiliary antenna


Tx Rate (Mb/s)	Frequency (GHz)	Polarity (H/V)	Reading (dB μ V) (<i>peak</i>)	Rading (dB μ V) (<i>average</i>)	Antenna Factor (dB/m)	Corr. Factor (dB)	Falloff Factor (dB)	Field Strength (dB μ V/m) (<i>peak</i>)	Margin to Limit (dB μ V/m) (<i>peak</i>)	Field Strength (dB μ V/m) (<i>average</i>)	Margin to Limit (dB μ V/m) (<i>average</i>)
T40	5.150	H	54.4	40.1	33.6	-26.1	0.0	61.9	12.1	47.6	6.4
	5.350	H	53.3	39.5	33.9	-25.6	0.0	61.6	12.4	47.8	6.2
R50	5.150	H	57.8	43.4	33.6	-26.1	0.0	65.3	8.7	50.9	3.1
	5.350	H	57.9	41.8	33.9	-25.6	0.0	66.2	7.8	50.1	3.9

7.6.2 Bandedge Measurement Plots

The plots were the worse cases measured with the ThinkPad R50 Series in the previous [Table 7-3](#).

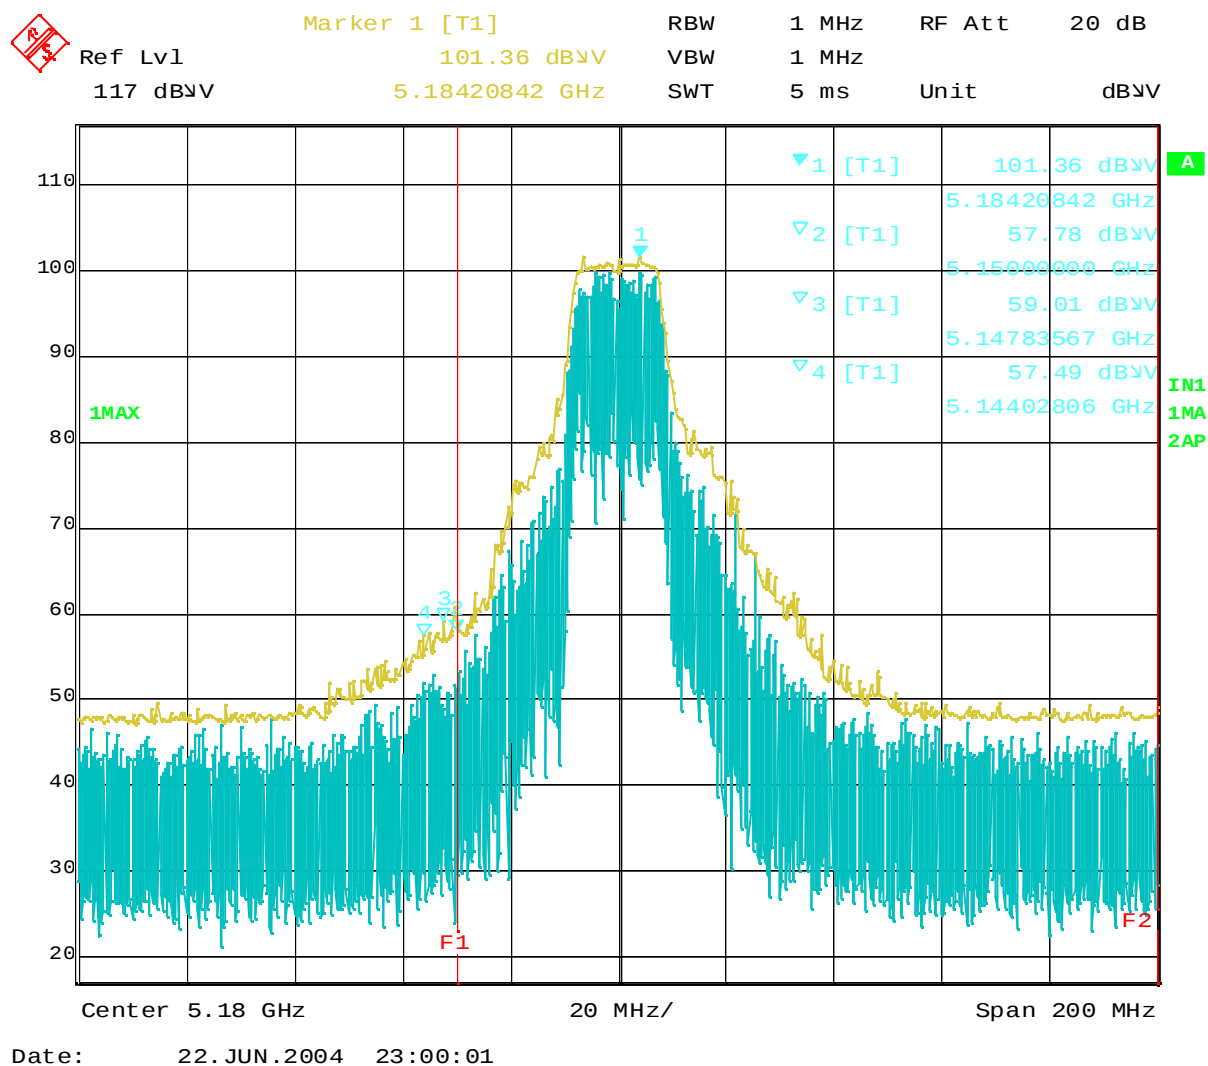


Plot 7-1 5180MHz TX mode (Peak). R50 series

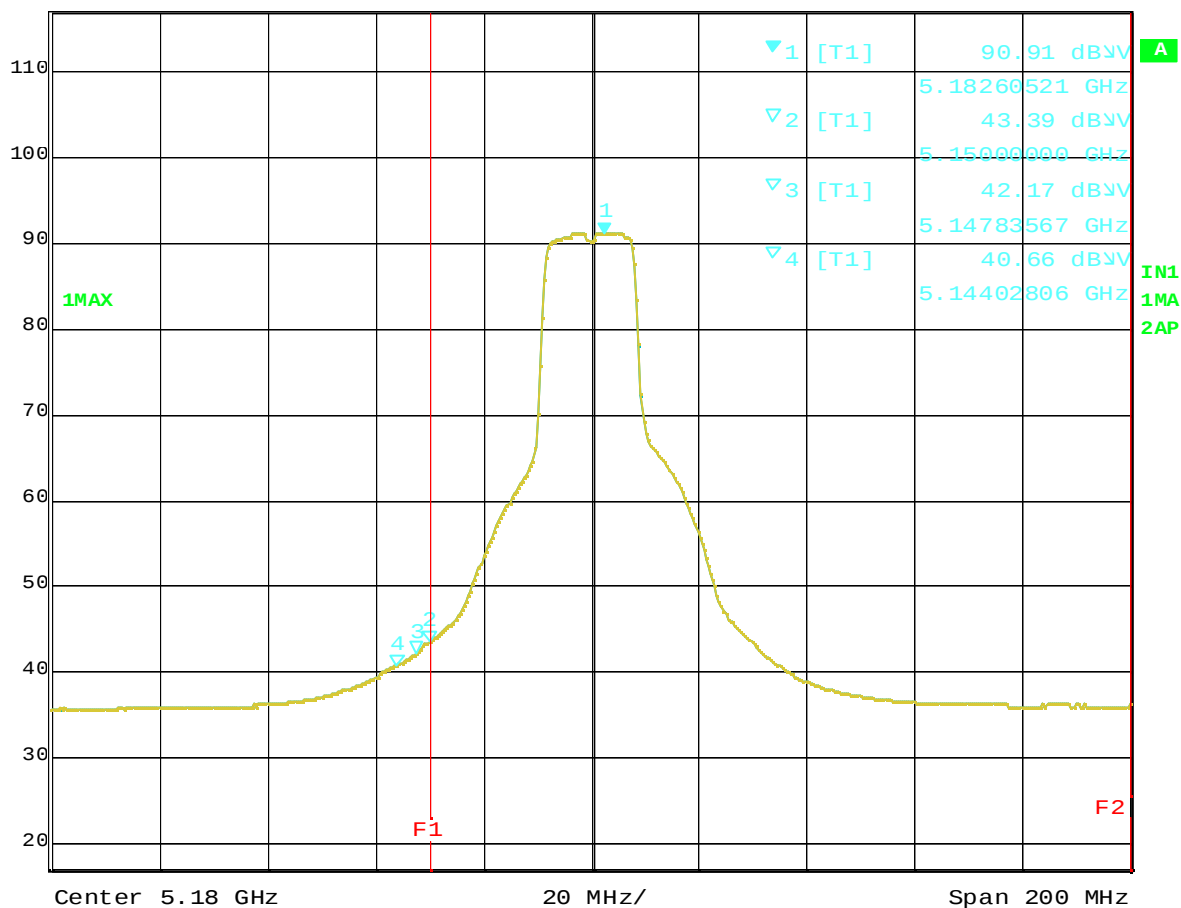Ref Lvl
117 dBμVMarker 1 [T1]
90.91 dBμV
5.18260521 GHzRBW 1 MHz RF Att 20 dB
VBW 10 Hz
SWT 50 s Unit dBμV


Date: 22.JUN.2004 23:01:12

Plot 7-2 5180MHz TX mode (Average). R50 series

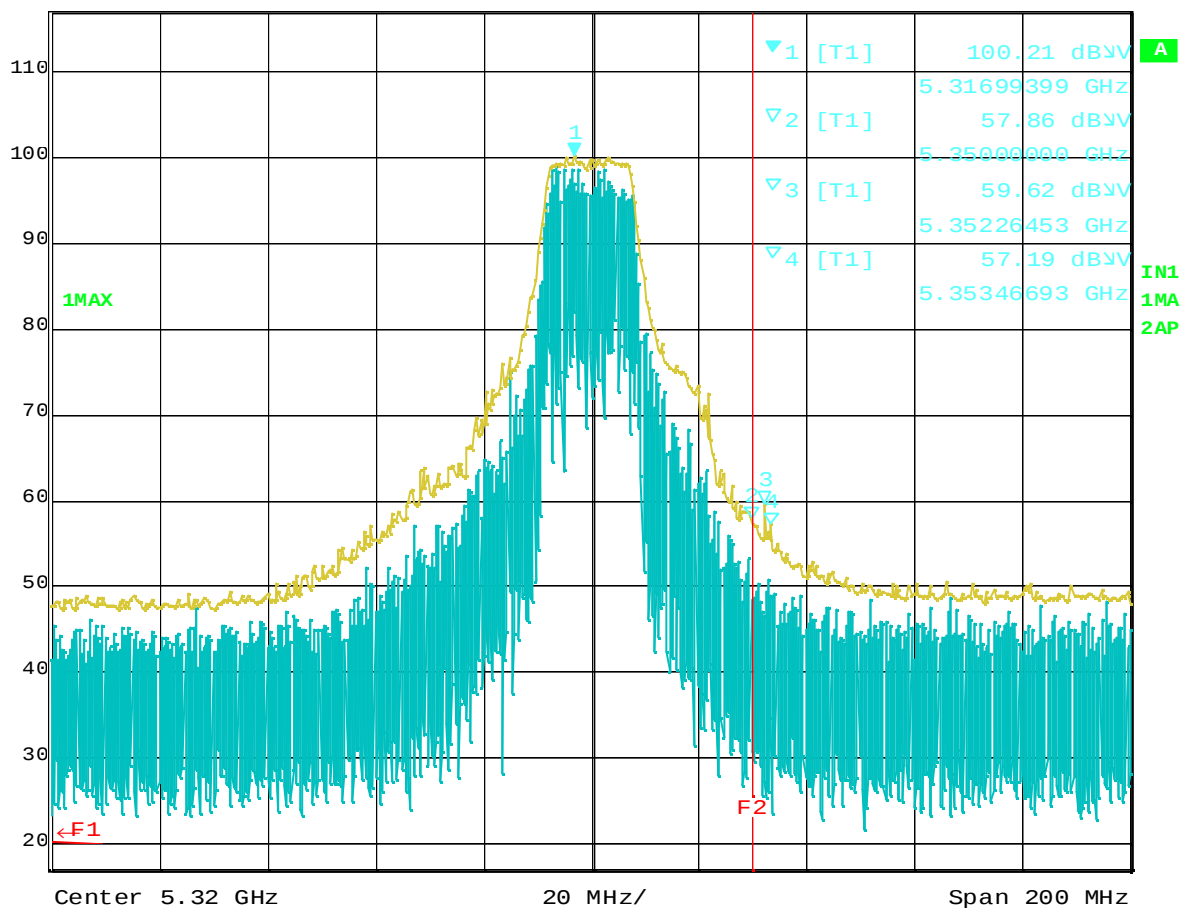Ref Lvl
117 dBμVMarker 1 [T1]
100.21 dBμV
5.31699399 GHzRBW 1 MHz RF Att 20 dB
VBW 1 MHz
SWT 5 ms Unit dBμV

Date: 22 JUN 2004 23:03:05

Plot 7-3 5320MHz TX mode (Peak). R50 series

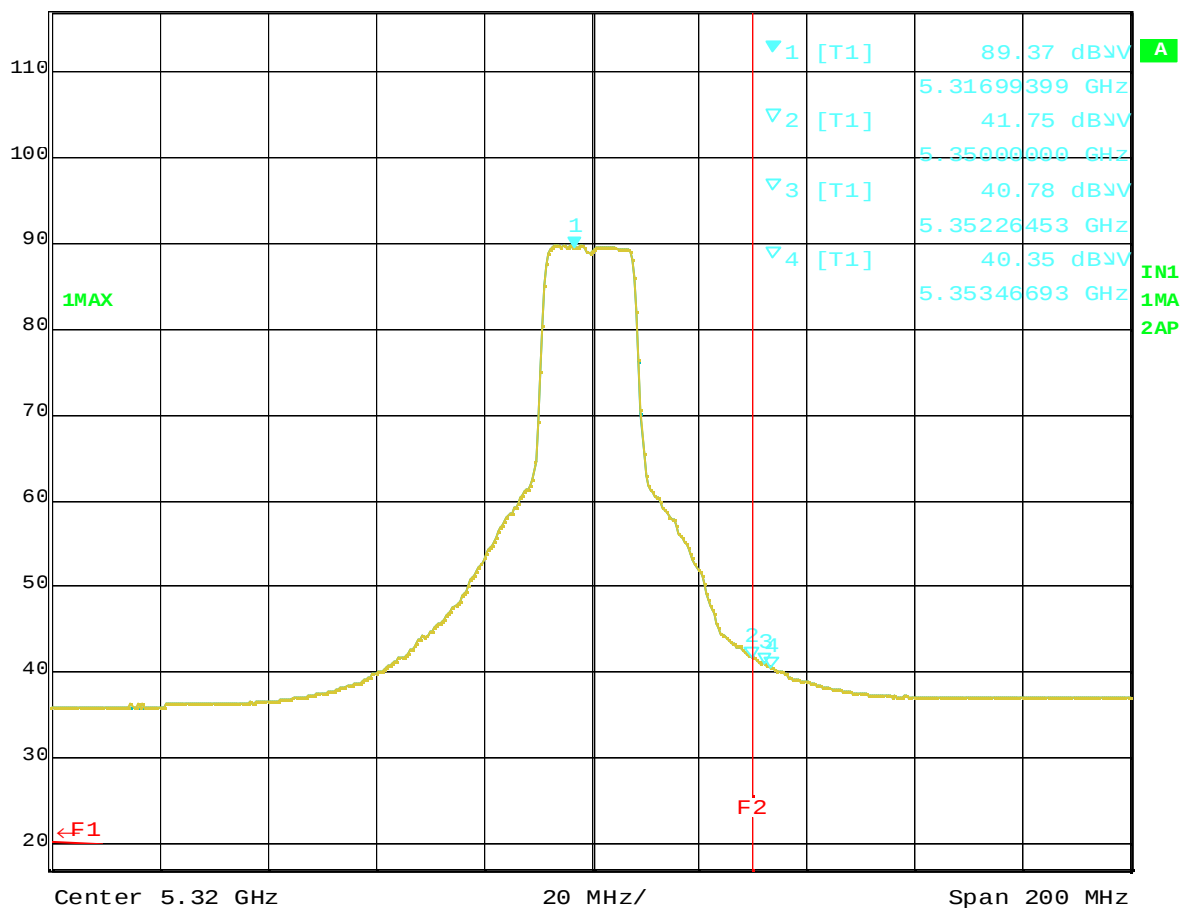Ref Lvl
117 dBμVMarker 1 [T1]
89.37 dBμV
5.31699399 GHzRBW 1 MHz RF Att 20 dB
VBW 10 Hz
SWT 50 s Unit dBμV

Date: 22 JUN 2004 23:04:25

Plot 7-4 5320MHz TX mode (Average). R50 series