




FCC AND ISCED CERTIFICATION TEST REPORT

Applicant:	Guangzhou Shirui Electronics Co.,Ltd
Address:	192 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China
Manufacturer:	Guangzhou Shirui Electronics Co.,Ltd
Address:	192 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China
Product Description:	Interactive Intelligent Panel
Brand Name:	NA
Tested Model:	CH65GC, CH75GC
FCC ID:	2AFG6-CHXXGC
IC:	22166-CHXXGC
Report No.:	JCF240923023-007
Received Date:	Sep. 18, 2024
Tested Date:	Sep. 18, 2024 - Oct. 25, 2024
Issued Date:	Oct. 25, 2024
Test Standards:	FCC Rules and Regulations Part 15 Subpart C, RSS-247 Issue 3 August 2023
Test Procedure:	ANSI C63.10:2013, RSS-Gen Issue 5 A2, Feb. 2021
Test Result:	Pass
Prepared By:  <u>Kennys Zhang/Engineer</u> Date: Oct. 25, 2024	
Reviewed By:  <u>Roger Li/Engineer</u> Date: Oct. 25, 2024	
Approved By:  <u>Talent Zhang/Engineer</u> Date: Oct. 25, 2024	

Note: The test results in this report apply exclusively to the tested model / sample. Without written approval of Guangzhou Jingce Testing Technology Co., Ltd. the test report shall not be reproduced except in full.

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Oct. 25, 2024	Original Report	/

Table of Contents

1. Test Report Declare	5
2. Summary of Test Results	6
3. Test Laboratory	6
4. Equipment Under Test	7
4.1. Description of EUT	7
4.2. Channel List	7
4.3. Packet Type Configuration	8
4.4. Test Channel Configuration	8
4.5. Test environment conditions	8
4.6. The Worse Case Power Setting Parameter	8
4.7. Description of Available Antennas	9
5. Description of Test Setup	9
5.1. Accessory	9
5.2. Support Equipment	9
5.3. Test Setup	9
5.4. Setup Diagram for Tests	9
6. Measurement Uncertainty	10
7. Measuring Instrument and Software Used	10
8. On Time and Duty Cycle	12
8.1. Block diagram of test setup	12
8.2. Limits	12
8.3. Results	12
8.4. Original test data	13
9. 20 dB Occupied Bandwidth and 99 % Occupied Bandwidth	16
9.1. Block diagram of test setup	16
9.2. Limit	16
9.3. Test Procedure	16
9.4. Results	16
9.5. Original test data	17
10. Conducted Output Power	24
10.1. Block diagram of test setup	24
10.2. Limits	24
10.3. Test Procedure	24
10.4. Results	24
10.5. Original test data	25
11. Carrier Hopping Channel Separation	28
11.1. Block diagram of test setup	28
11.2. Limits	28
11.3. Test Procedure	28
11.4. Results	28
11.5. Original test data	29
12. Number of Hopping Frequency	30
12.1. Block diagram of test setup	30
12.2. Limits	30
12.3. Test Procedure	30
12.4. Results	30
12.5. Original test data	31
13. Time of Occupancy (Dwell Time)	32
13.1. Block diagram of test setup	32
13.2. Limits	32
13.3. Test Procedure	32
13.4. Results	33

13.5. Original test data	33
14. Conducted Spurious Emission	40
14.1. Block diagram of test setup	40
14.2. Limits	40
14.3. Test Procedure	40
14.4. Results	40
14.5. Original test data	41
15. Radiated Emission	55
15.1. Block diagram of test setup	55
15.2. Limit	56
15.3. Test Procedure	57
15.4. Results	59
15.5. Original test data	59
16. AC Power Line Conducted Emissions	60
16.1. Block diagram of test setup	60
16.2. Limits	60
16.3. Test procedure	60
16.4. Test result	61
16.5. Original test data	61
17. Antenna Requirements	62
17.1. Limits	62
17.2. Result	62
APPENDIX A – Radiated Emission Below 1GHz Test Data	63
APPENDIX B – Radiated Emission Above 1GHz Test Data	67
APPENDIX C – AC Power Line Conducted Emission Test Data	103

1. Test Report Declare

Applicant:	Guangzhou Shirui Electronics Co.,Ltd
Address:	192 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China
Manufacturer:	Guangzhou Shirui Electronics Co.,Ltd
Address:	192 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China
Product Name:	Interactive Intelligent Panel
Brand Name:	NA
Model Name:	CH65GC, CH75GC
Difference Description:	Compare with CH65GC, CH75GC only the appearance, size ,LCD panel ,T-CON board and power main board are different, others completely the same.

We Declare:

The equipment described above is tested by Guangzhou Jingce Testing Technology Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Guangzhou Jingce Testing Technology Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests except as provided information by clients.

2. Summary of Test Results

Summary of Test Results			
Clause	Test Items	FCC/ISED Rules	Test Result
1	20 dB Bandwidth and 99 % Occupied Bandwidth	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a) RSS-Gen Clause 6.7	Pass
2	Conducted Output Power	FCC 15.247 (b) (1) RSS-247 Clause 5.1 (b)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1) RSS-247 Clause 5.1 (b)	Pass
4	Number of Hopping Frequency	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (1) III RSS-247 Clause 5.1 (d)	Pass
6	Conducted Band edge	FCC 15.247 (d) RSS-247 Clause 5.5	Pass
7	Radiated Band edge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 8.10	Pass
8	Conducted Emission Test For AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	Pass
9	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	Pass
Note: All models' RF hardware and software, including modules, crystal oscillator, antenna, function exactly the same. According to the pretest results, the differences between the models only affect the results of the Radiated Emission (30MHz-40GHz) and Power Line Conducted Emissions. Therefore, in addition to the two test projects, the test results of two models (CH65GC, CH75GC) were recorded, and the test results of the remaining projects were only recorded for the worst model, CH65GC.			

3. Test Laboratory

Guangzhou Jingce Testing Technology Co., Ltd.

Add.: No.10, Hefeng No.1 street, Huangpu District, Guangzhou, Guangdong, People's Republic of China

Association for Laboratory Accreditation(A2LA). Certificate Number: 6594.03

FCC Designation Number: CN1381. Test Firm Registration Number: 486550

IC Test Firm Registration Number: 31808

Conformity Assessment Body identifier: CN0173

4. Equipment Under Test

4.1. Description of EUT

EUT Name:	Interactive Intelligent Panel
Model Number:	CH65GC, CH75GC
EUT Function Description:	Please refer to user manual of this device
Power Supply:	100-240V~ 50/60Hz 3.5A
Hardware Version:	N/A
Software Version:	N/A
Radio Specification:	Bluetooth V5.4
Operation Frequency:	2402 MHz - 2480 MHz
Modulation:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Data Rate:	1Mbps, 2Mbps, 3Mbps
Antenna Type:	SMA Antenna, MAX. Gain: 4.06 dBi

Note 1: EUT is the ab. of equipment under test.

Note 2: The antenna gain is declared by the customer and the laboratory is not responsible for the accuracy of the antenna gain.

4.2. Channel List

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	/	/

4.3. Packet Type Configuration

Test Mode	Packet Type	Setting(Packet Length)
GFSK	DH1	27
	DH3	183
	DH5	339
$\pi/4$ -DQPSK	2-DH1	54
	2-DH3	367
	2-DH5	679
8DPSK	3-DH1	83
	3-DH3	552
	3-DH5	1021

4.4. Test Channel Configuration

Tested mode, channel, information		
Mode	Channel	Frequency (MHz)
GFSK hopping on Tx mode	CH0 to CH78	2402 to 2480
$\pi/4$ -DQPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
8DPSK hopping on Tx mode	CH0 to CH78	2402 to 2480
GFSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
$\pi/4$ -DQPSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480
8DPSK hopping off Tx mode	LCH: CH0	2402
	MCH: CH39	2441
	HCH: CH78	2480

4.5. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature range:	21-25 °C
Humidity range:	40-75%
Pressure range:	86-106 kPa

4.6. The Worse Case Power Setting Parameter

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		MobaXterm		
Modulation Type	Transmit Antenna Number	Test Software Setting Value		
		CH 0	CH 39	CH 78
GFSK	1	Default	Default	Default
$\pi/4$ -DQPSK	1	Default	Default	Default
8DPSK	1	Default	Default	Default

4.7. Description of Available Antennas

Test Mode	Transmit and Receive Mode	Description
GFSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
$\pi/4$ -DQPSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
8DPSK	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

5. Description of Test Setup

5.1. Accessory

Description of Accessories	Manufacturer	Model Number	Description	Remark
/	/	/	/	/


5.2. Support Equipment

Equipment	Brand Name	Model Name	P/N
PC	Lenovo	T480	/

5.3. Test Setup

The EUT can work in Fixed Frequency mode.

5.4. Setup Diagram for Tests



6. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
AC Power Conduction emission	1.37 dB
All Radiated emissions	5.4dB
Conducted emissions	3.09 dB
Occupied Channel Bandwidth	1.1%
Conducted Output power	0.82dB
Power Spectral Density	0.82dB

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k = 2$.


7. Measuring Instrument and Software Used

TS Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	Spectrum Analyzer	Keysight	N9030B	MY56320512	Aug. 22, 2024	Aug. 21, 2025
☒	Vector Signal Generator	Keysight	N5182B	MY57300334	Aug. 22, 2024	Aug. 21, 2025
☒	Signal Generator	Keysight	N5171B	MY57280639	Aug. 22, 2024	Aug. 21, 2025
☒	DC POWER	Keysight	E342A	MY59020356	Aug. 29, 2024	Aug. 28, 2025
☒	Incubator thermometer	GWS	EL-02JA	21107288	Aug. 15, 2024	Aug. 14, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	/	Aug. 23, 2024	Aug. 22, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112206	Sep. 11, 2024	Sep. 10, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	21H8060465	Aug. 22, 2024	Aug. 21, 2025
☒	Spectrum Analyzer	Keysight	N9020B	MY60112811	Aug. 23, 2024	Aug. 22, 2025
☒	Signal Generator	Keysight	N5173B	MY62220145	Aug. 23, 2024	Aug. 22, 2025
☒	Vector Signal Generator	Keysight	N5182B	MY61252859	Aug. 22, 2024	Aug. 21, 2025
☒	DC POWER	Keysight	E3642A	MY40005294	Aug. 30, 2024	Aug. 29, 2025
☒	Control unit(Power sensor)	Tonscend	JS0806-2	24F80620865	Aug. 23, 2024	Aug. 22, 2025
Software						
Used	Description	Manufacturer	Name		Version	
☒	Test software	Tonscend	JS1120-3		V3.3.10	
RSE Test System						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☒	EMI Receiver	R&S	ESR26	101424	Sep. 14, 2024	Sep. 13, 2025

☑	Hybrid Antenna	Schwarzbeck	VULB9163	01416	May. 22, 2024	May. 21, 2025
☑	Horn Antenna 1	Schwarzbeck	BBHA 9120 D	02910	Sep. 11, 2024	Sep. 10, 2025
☑	Horn Antenna 2	ETS	BBHA 9170	1090	Sep. 11, 2024	Sep. 10, 2025
☑	loop-antenna	Schwarzbeck	FMZB 1513-60	00030	Jan. 14,2024	Jan. 13, 2025
☑	Test path	/	Path2: WIFI-2.4G 1-3GHz	/	Aug. 23, 2024	Aug. 22, 2025
☑	Test path	/	Path7: ALL PASS 1-18GHz	/	Aug. 23, 2024	Aug. 22, 2025
☑	Test path	/	Path9: 3GHz High PASS 3-18GHz	/	Aug. 23, 2024	Aug. 22, 2025
☑	Test path	/	Path16: 30MHz-1GHz ALL PASS NO AMP	/	Aug. 23, 2024	Aug. 22, 2025
☑	Signal Pre-Amplifier	ETS	3116C-PA	00217677	Sep. 06, 2024	Sep. 05, 2025
☑	3m Fully-anechoic Chamber	YIHENG	9m*6m*6m	001	Sep. 05, 2023	Sep. 04, 2026
Software						
Used	Description	Manufacturer	Name		Version	
☑	Test software	Tonscend	TS+		V5.0.0.0	
Conducted Emission Test For AC Power Port						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☑	LISN	R&S	ENV216	102509	Aug. 22, 2024	Aug. 21, 2025
☑	EMI Receiver	R&S	ESR	102154	Aug. 22, 2024	Aug. 21, 2025
Software						
Used	Description	Manufacturer	Name		Version	
☑	Test software	EZ	EZ-EMC		EMEC-3A1	
Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
☑	Temperature & Humidity	Temperature	HTC-1	/	Sep. 04, 2024	Sep. 03, 2025

8. On Time and Duty Cycle

8.1. Block diagram of test setup

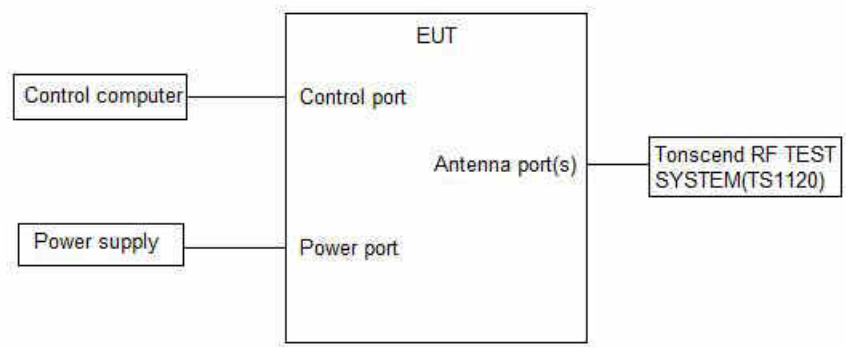

8.2. Limits

None; for reporting purposes only

Test Mode	Ant.	Freq. (MHz)	ON Time (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Factor(dB)
DH5	Ant1	2402	2.87	3.75	76.53	1.16
		2441	2.88	3.75	76.80	1.15
		2480	2.88	3.75	76.80	1.15
2DH5	Ant1	2402	2.32	3.74	62.03	2.07
		2441	2.33	3.75	62.13	2.07
		2480	2.33	3.75	62.13	2.07
3DH5	Ant1	2402	2.89	3.76	76.86	1.14
		2441	2.89	3.75	77.07	1.13
		2480	2.89	3.76	76.86	1.14

8.3. Results

Note: Duty Cycle Correction Factor= $10\log (1/x)$.
Where: x is Duty Cycle (Linear)
Where: T is On Time
If that calculated VBW is not available on the analyzer then the next higher value should be used.

8.4. Original test data





2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



9. 20 dB Occupied Bandwidth and 99 % Occupied Bandwidth

9.1. Block diagram of test setup

Same as section 8.1

9.2. Limit

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) RSS-247 Clause 5.1 (a)	20 dB Occupied Bandwidth	N/A	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	N/A	2400-2483.5

9.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 20 dB Occupied Bandwidth: 1 % to 5 % of the 20 dB bandwidth For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 20 dB Occupied Bandwidth: approximately 3×RBW For 99 % Occupied Bandwidth: ≥ 3×RBW
Span	approximately 2 to 3 times the 20 dB bandwidth
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB and 99 % relative to the maximum level measured in the fundamental emission.

9.4. Results

20 dB Occupied Bandwidth:

Test Mode	Ant.	Freq. (MHz)	20dB EBW (MHz)	FL (MHz)	FH (MHz)
DH5	Ant1	2402	0.927	2401.490	2402.417
		2441	0.966	2440.487	2441.453
		2480	0.918	2479.514	2480.432
2DH5	Ant1	2402	1.326	2401.304	2402.630
		2441	1.320	2440.310	2441.630
		2480	1.323	2479.304	2480.627
3DH5	Ant1	2402	1.350	2401.292	2402.642
		2441	1.314	2440.313	2441.627
		2480	1.320	2479.310	2480.630

99 % Occupied Bandwidth

Test Mode	Ant.	Freq. (MHz)	OCB (MHz)	FL (MHz)	FH (MHz)
DH5	Ant1	2402	0.88049	2401.5289	2402.4094
		2441	0.86688	2440.5350	2441.4018
		2480	0.85696	2479.5399	2480.3969
2DH5	Ant1	2402	1.1992	2401.3749	2402.5741
		2441	1.1972	2440.3689	2441.5661
		2480	1.2041	2479.3638	2480.5679
3DH5	Ant1	2402	1.1964	2401.3763	2402.5727
		2441	1.2025	2440.3649	2441.5674
		2480	1.1953	2479.3673	2480.5626

9.5. Original test data

20 dB Occupied Bandwidth:





2DH5_Ant1_2402



2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402




3DH5_Ant1_2441



3DH5_Ant1_2480



99 % Occupied bandwidth:

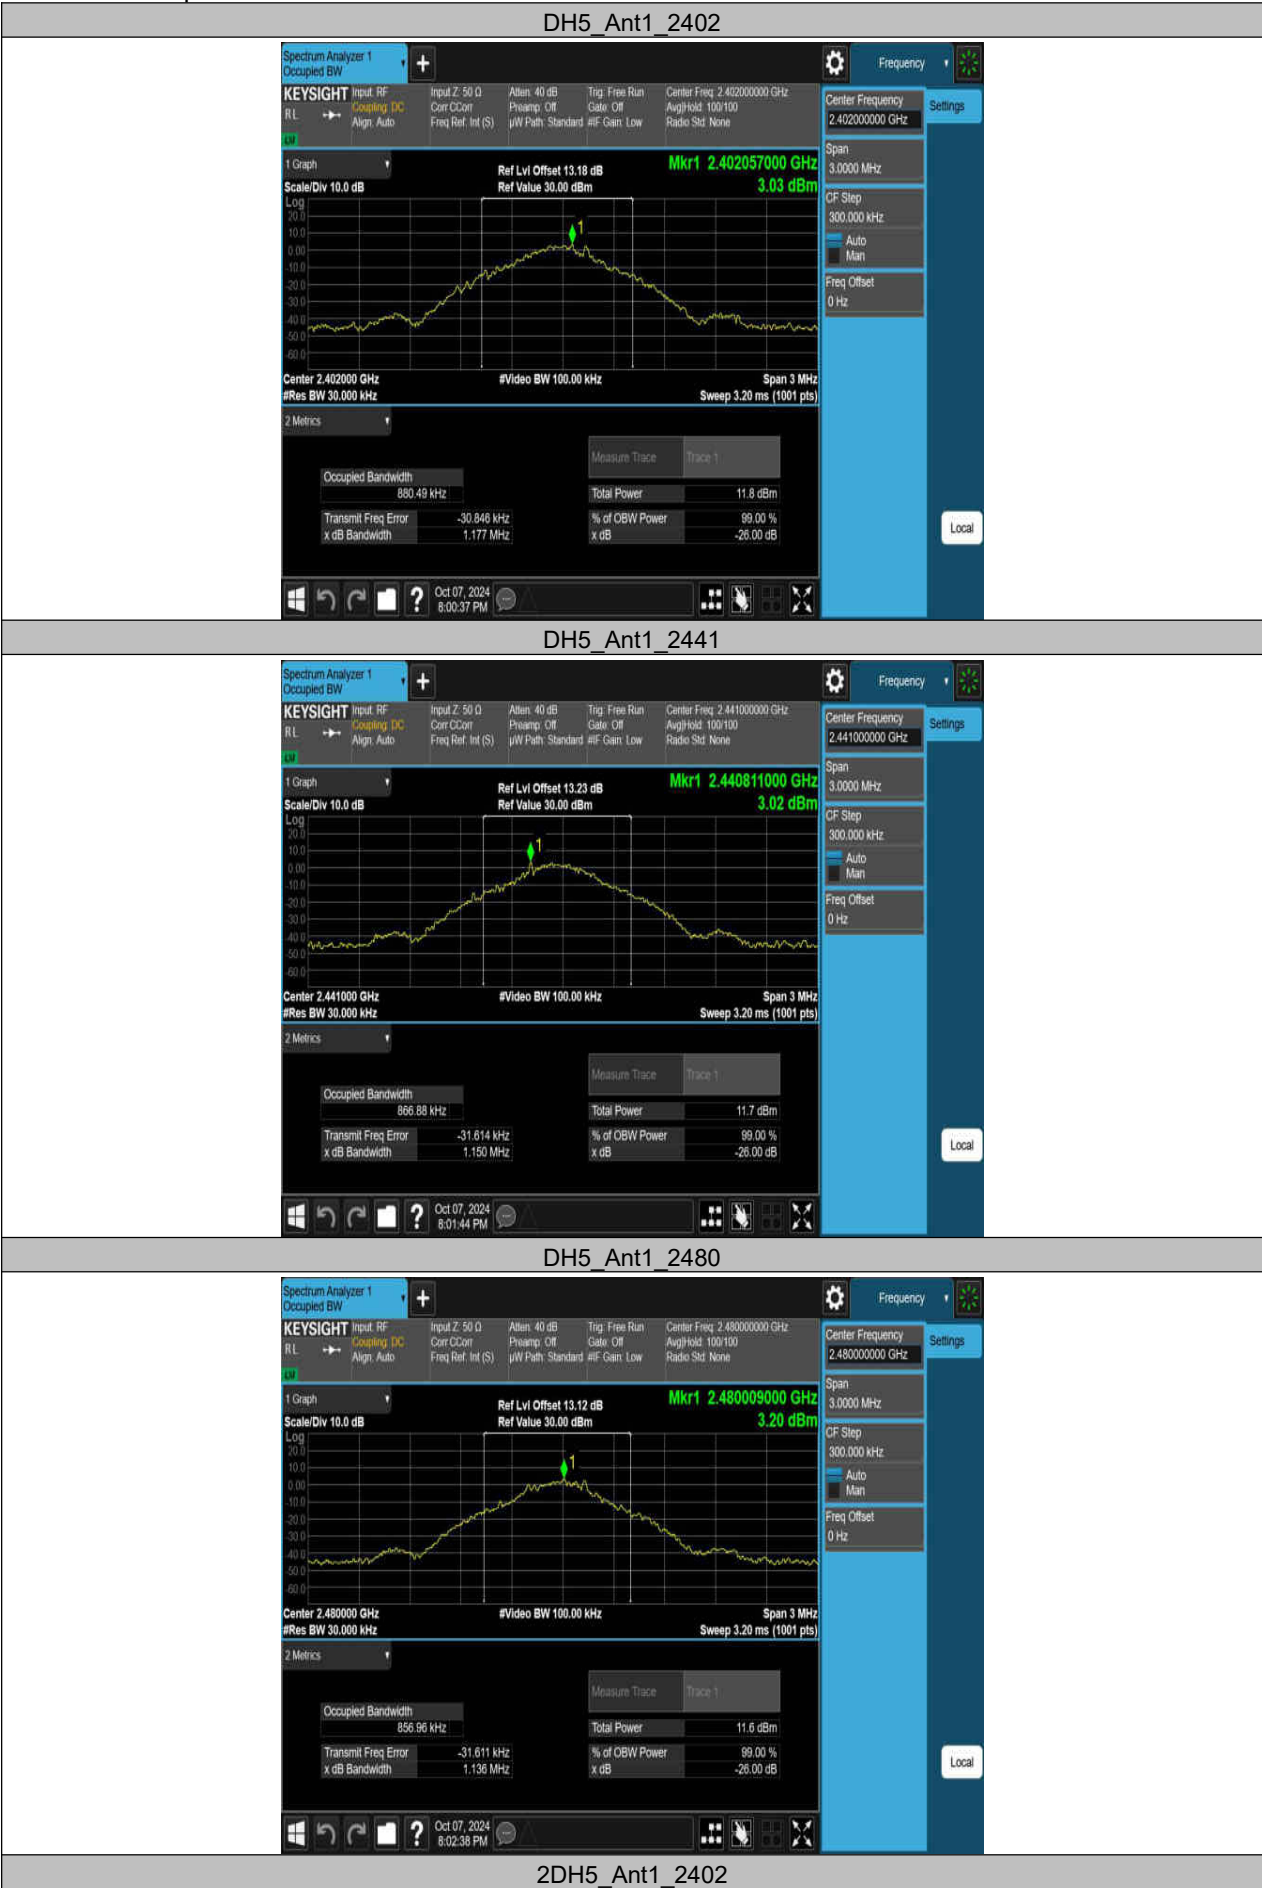



2DH5_Ant1_2441



2DH5_Ant1_2480



3DH5_Ant1_2402



3DH5_Ant1_2441



3DH5_Ant1_2480



10. Conducted Output Power

10.1. Block diagram of test setup

Same as section 8.1

10.2. Limits

CFR 47 FCC Part15 (15.247) , Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (b) (1) ISED RSS-247 Clause 5.4 (b)	Peak Conducted Output Power	Hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel: 1 watt or 30dBm; Hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel : 125 mW or 21dBm	2400-2483.5

10.3. Test Procedure

(1) Connect EUT's antenna output to spectrum analyzer by RF cable.


(2) Measure the maximum output power of EUT by spectrum analyzer with PK detector and RBW=3 MHz (above 20 dB bandwidth of measured signal), VBW=8 MHz


Note: The attenuator loss was inputted into spectrum analyzer as amplitude offset.

10.4. Results


Test Mode	Ant.	Freq. (MHz)	Conducted Peak Power (dBm)	Conducted Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)	Verdict
DH5	Ant1	2402	5.51	≤30	9.57	≤36	PASS
		2441	5.50	≤30	9.56	≤36	PASS
		2480	5.07	≤30	9.13	≤36	PASS
2DH5	Ant1	2402	7.60	≤30	11.66	≤36	PASS
		2441	7.45	≤30	11.51	≤36	PASS
		2480	7.02	≤30	11.08	≤36	PASS
3DH5	Ant1	2402	7.93	≤30	11.99	≤36	PASS
		2441	7.98	≤30	12.04	≤36	PASS
		2480	7.44	≤30	11.5	≤36	PASS

10.5. Original test data

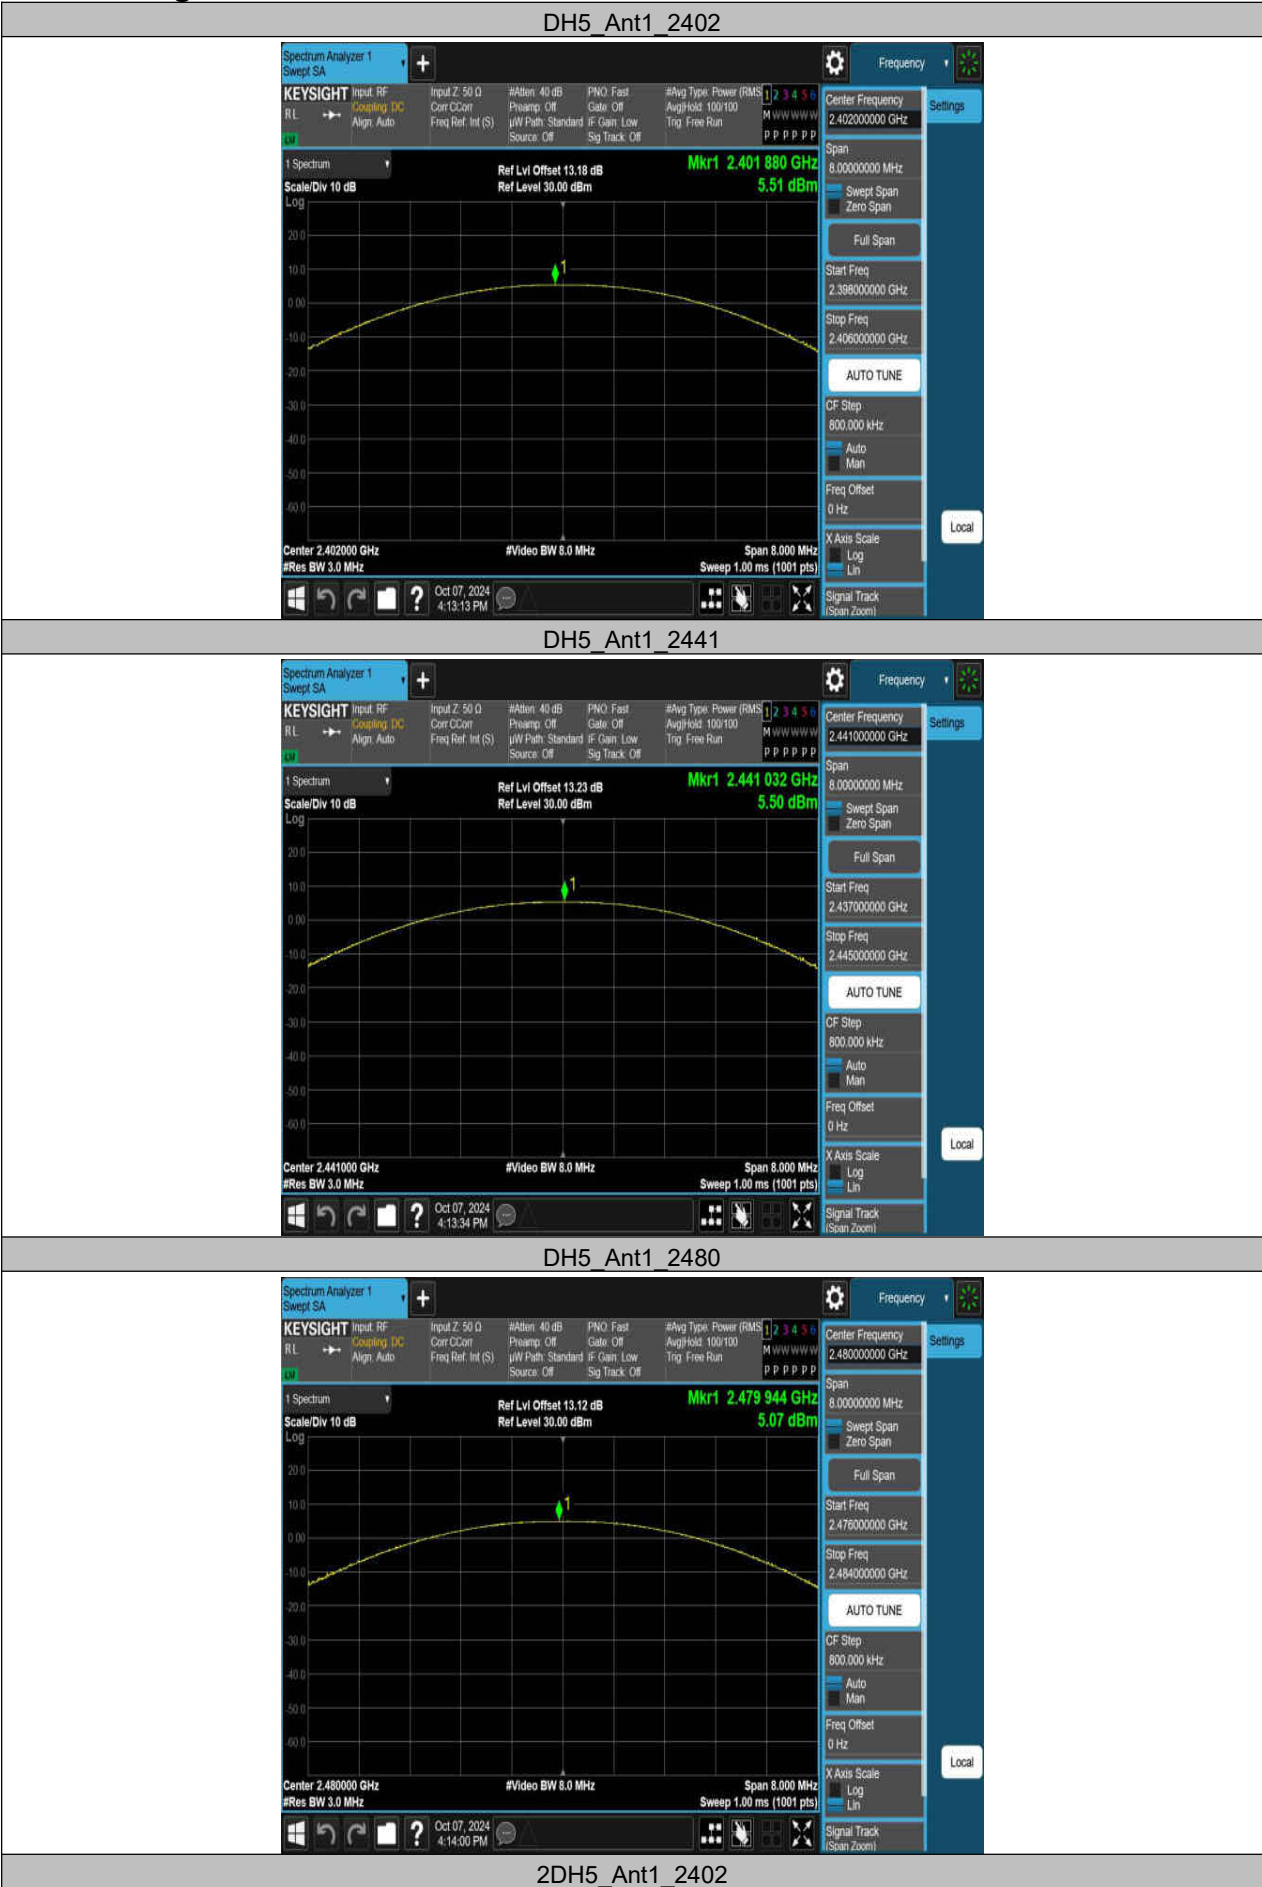


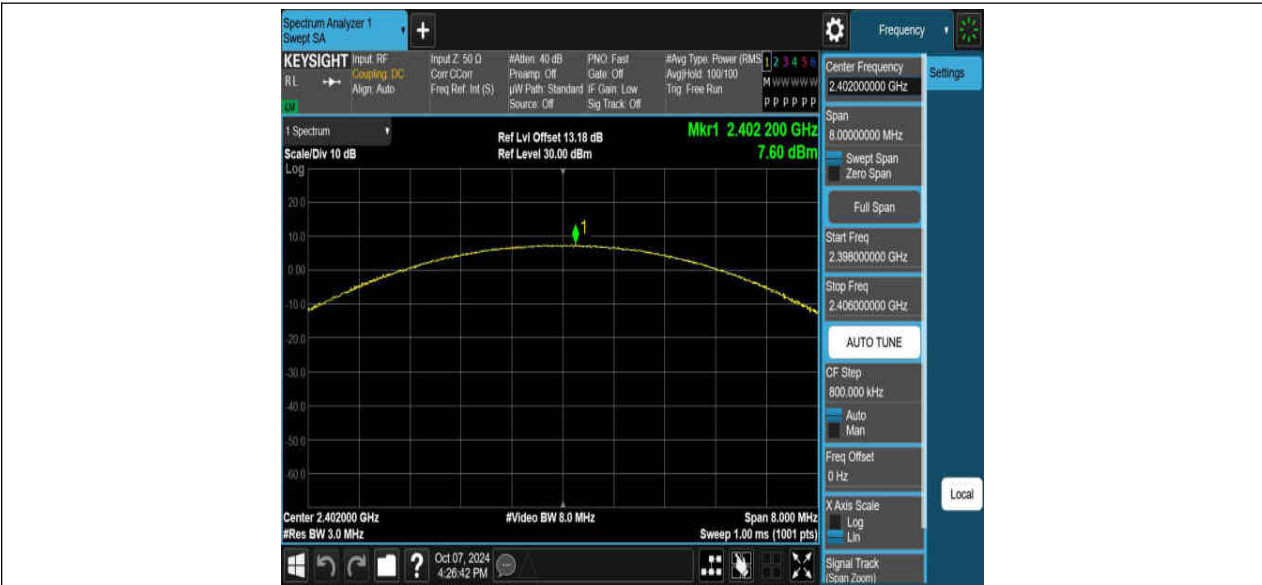


2DH5_Ant1_2441

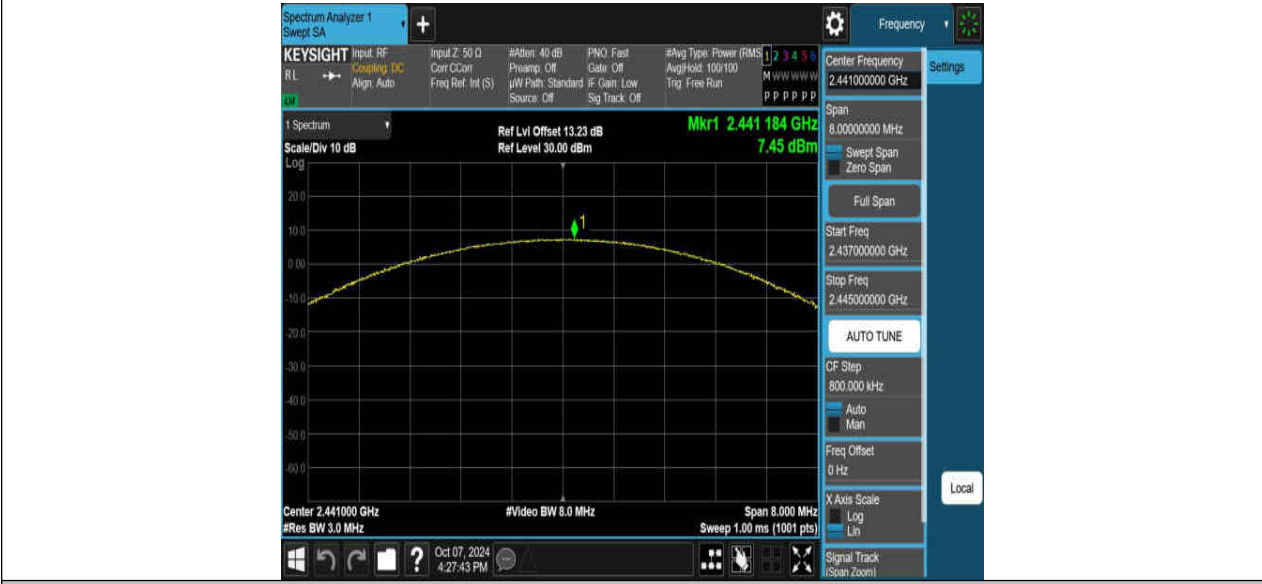

2DH5_Ant1_2480

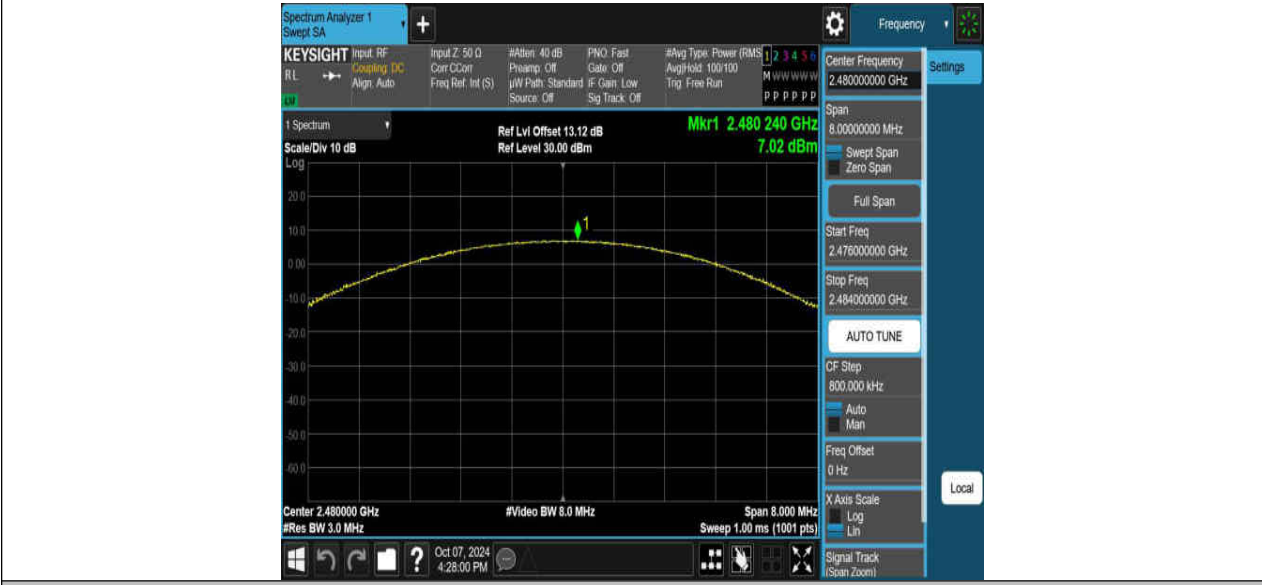


3DH5_Ant1_2402

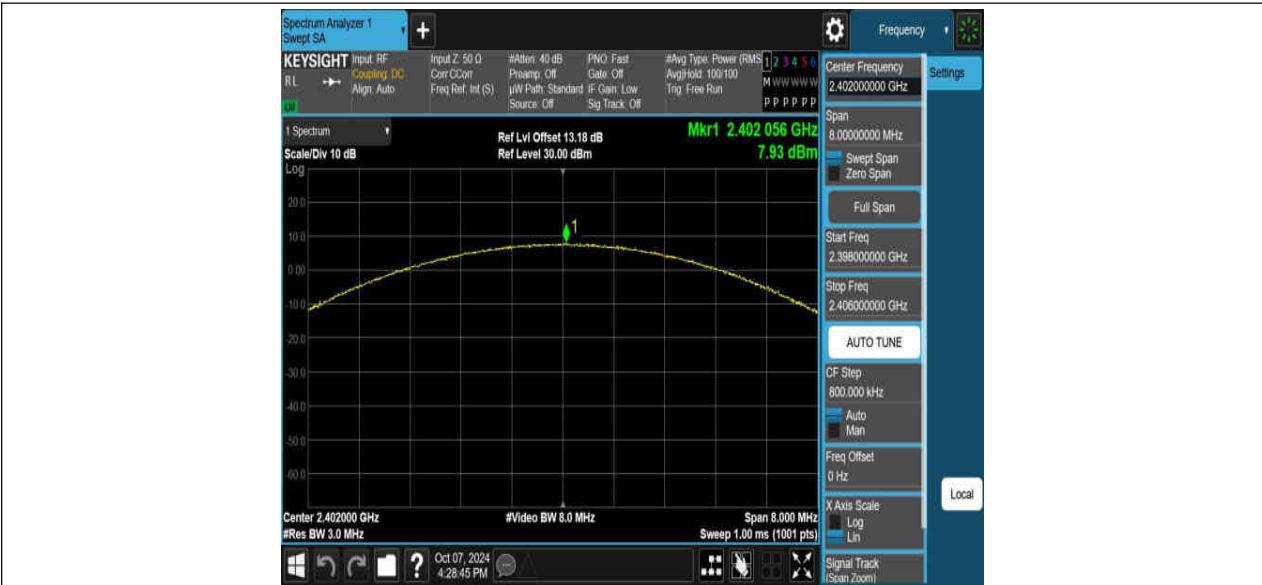

3DH5_Ant1_2441



3DH5_Ant1_2480

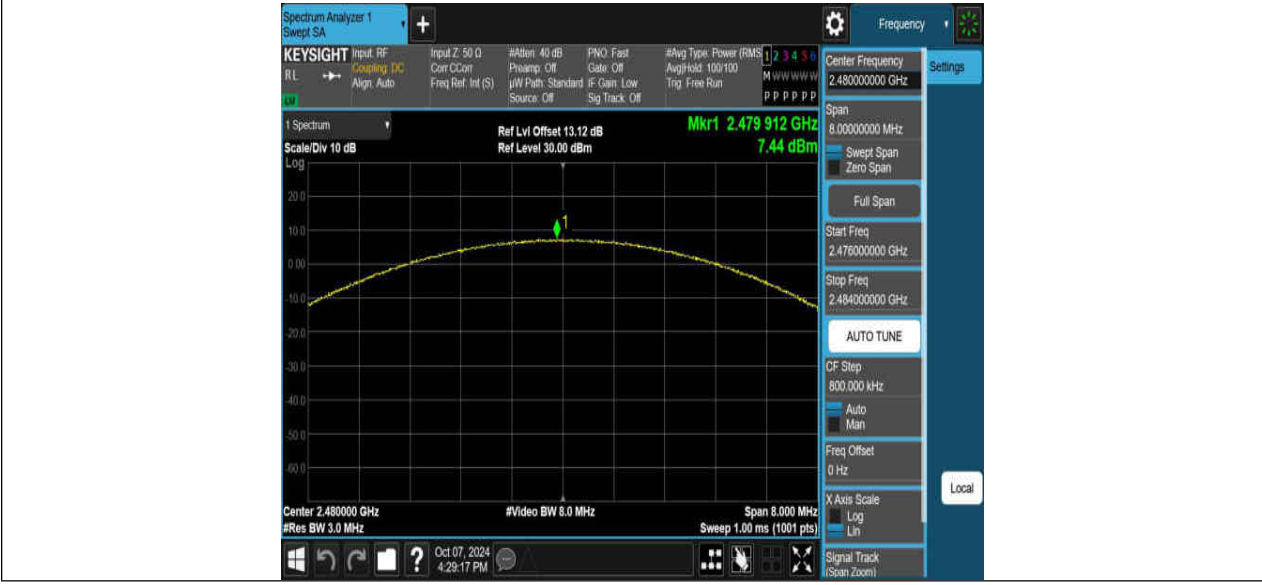

11. Carrier Hopping Channel Separation

11.1. Block diagram of test setup

Same as section 8.1

11.2. Limits

CFR 47 FCC Part15 (15.247) , Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247 (a) (1) ISED RSS-247 Clause 5.1 (b)	Carrier Hopping Channel Separation	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.	2400-2483.5

11.3. Test Procedure

Connect the UUT to the spectrum Analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	Start with the RBW set to approximately 30 % of the channel spacing; adjust as necessary to best identify the center of each individual channel.
VBW	≥ RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Compliance of an EUT with the appropriate regulatory limit shall be determined.

A plot of the data shall be included in the test report.

11.4. Results

Test Mode	Ant.	Freq. (MHz)	Result (MHz)	Limit (MHz)	Verdict
DH5	Ant1	Hop	1.004	≥0.966	PASS
2DH5	Ant1	Hop	1	≥0.884	PASS
3DH5	Ant1	Hop	1.02	≥0.900	PASS

11.5. Original test data



12. Number of Hopping Frequency

12.1. Block diagram of test setup

Same as section 8.1

12.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Number of Hopping Frequency	at least 15 hopping channels

12.3. Test Procedure

Connect the EUT to the spectrum Analyzer and use the following settings:

Detector	Peak
RBW	To identify clearly the individual channels, set the RBW to less than 30 % of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW	≥RBW
Span	The frequency band of operation
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.

Count the quantity of peaks to get the number of hopping channels.


FHSS Mode: 79 Channels observed.

AFHSS Mode: 20 Channels declared.

12.4. Results

Test Mode	Ant.	Freq. (MHz)	Result (Num)	Limit (Num)	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

12.5. Original test data

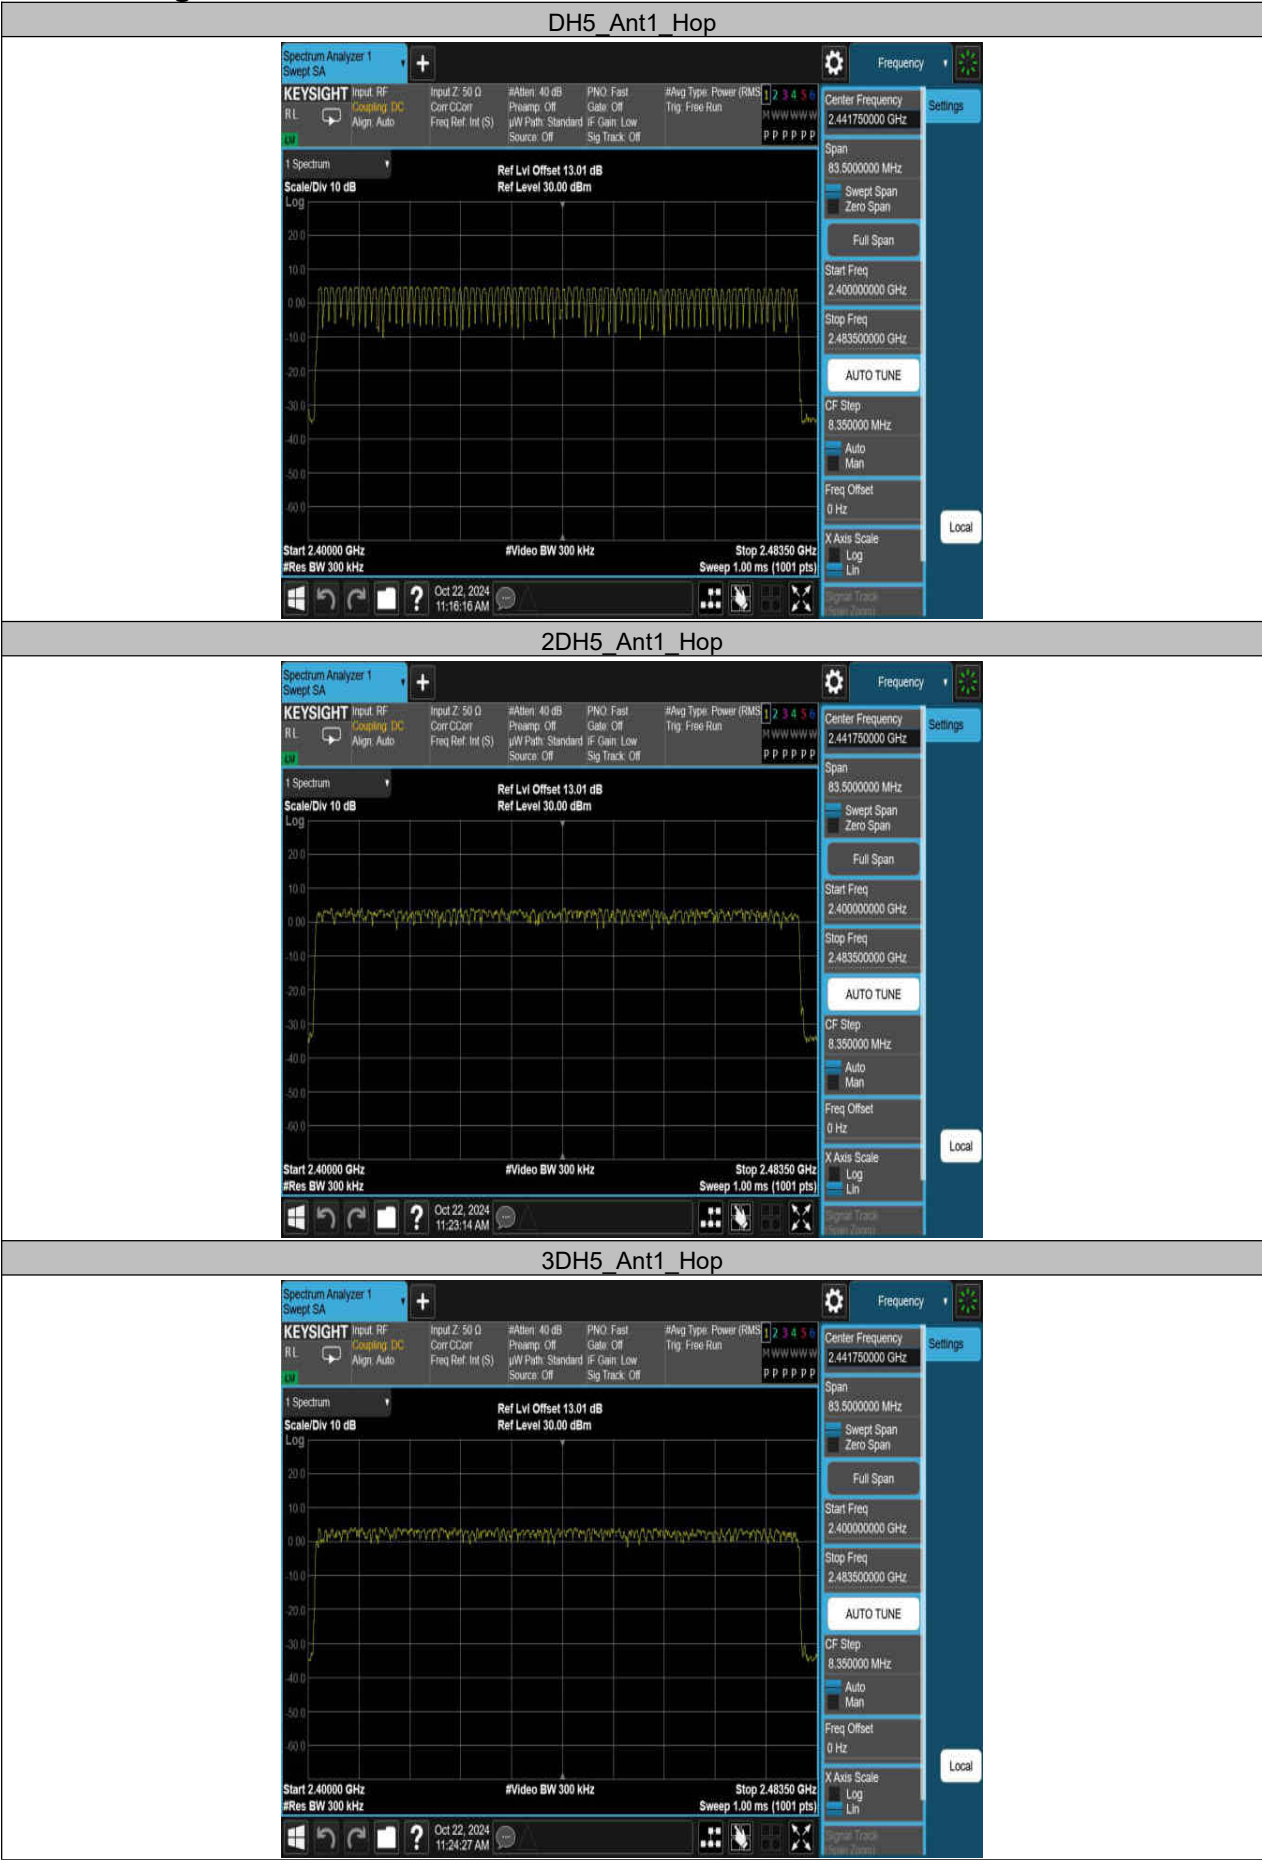

13. Time of Occupancy (Dwell Time)

13.1. Block diagram of test setup

Same as section 8.1

13.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 15.247 (a) (1) III ISED RSS-247 Clause 5.1 (d)	Time of Occupancy (Dwell Time)	The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds, multiplied by the number of hopping channels employed.

13.3. Test Procedure

Connect the UUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Average
RBW	1 MHz
VBW	≥ RBW
Span	zero span
Trace	Clear Write
Sweep time	As necessary to capture the entire dwell time per hopping channel


Connect the UUT to the spectrum Analyzer and use the following settings:


- The transmitter output (antenna port) was connected to the spectrum analyzer
 - Set RBW of spectrum analyzer to 1 MHz and VBW to 3 MHz.
 - Use a video trigger with the trigger level set to enable triggering only on full pulses.
 - Sweep Time is more than once pulse time.
 - Set the center frequency on any frequency would be measure and set the frequency span to zero span.
 - Measure the maximum time duration of one single pulse.
 - Set the EUT for DH5, DH3 and DH1 packet transmitting.
 - Measure the maximum time duration of one single pulse.
- A Period Time = (channel number)*0.4
- For FHSS Mode (79 Channel):
- DH1 Time Slot: Reading * (1600/2)*31.6/(channel number)
- DH3 Time Slot: Reading * (1600/4)*31.6/(channel number)
- DH5 Time Slot: Reading * (1600/6)*31.6/(channel number)

13.4. Results


Test Mode	Ant.	Freq. (MHz)	Burst Width (ms)	Total Hops (Num)	Result (s)	Limit (s)	Verdict
DH1	Ant1	Hop	0.366	330	0.121	≤0.4	PASS
DH3	Ant1	Hop	1.623	160	0.26	≤0.4	PASS
DH5	Ant1	Hop	2.870	80	0.23	≤0.4	PASS
2DH1	Ant1	Hop	0.376	330	0.124	≤0.4	PASS
2DH3	Ant1	Hop	1.628	130	0.212	≤0.4	PASS
2DH5	Ant1	Hop	2.321	140	0.325	≤0.4	PASS
3DH1	Ant1	Hop	0.376	330	0.124	≤0.4	PASS
3DH3	Ant1	Hop	1.628	150	0.244	≤0.4	PASS
3DH5	Ant1	Hop	2.879	80	0.23	≤0.4	PASS


13.5. Original test data

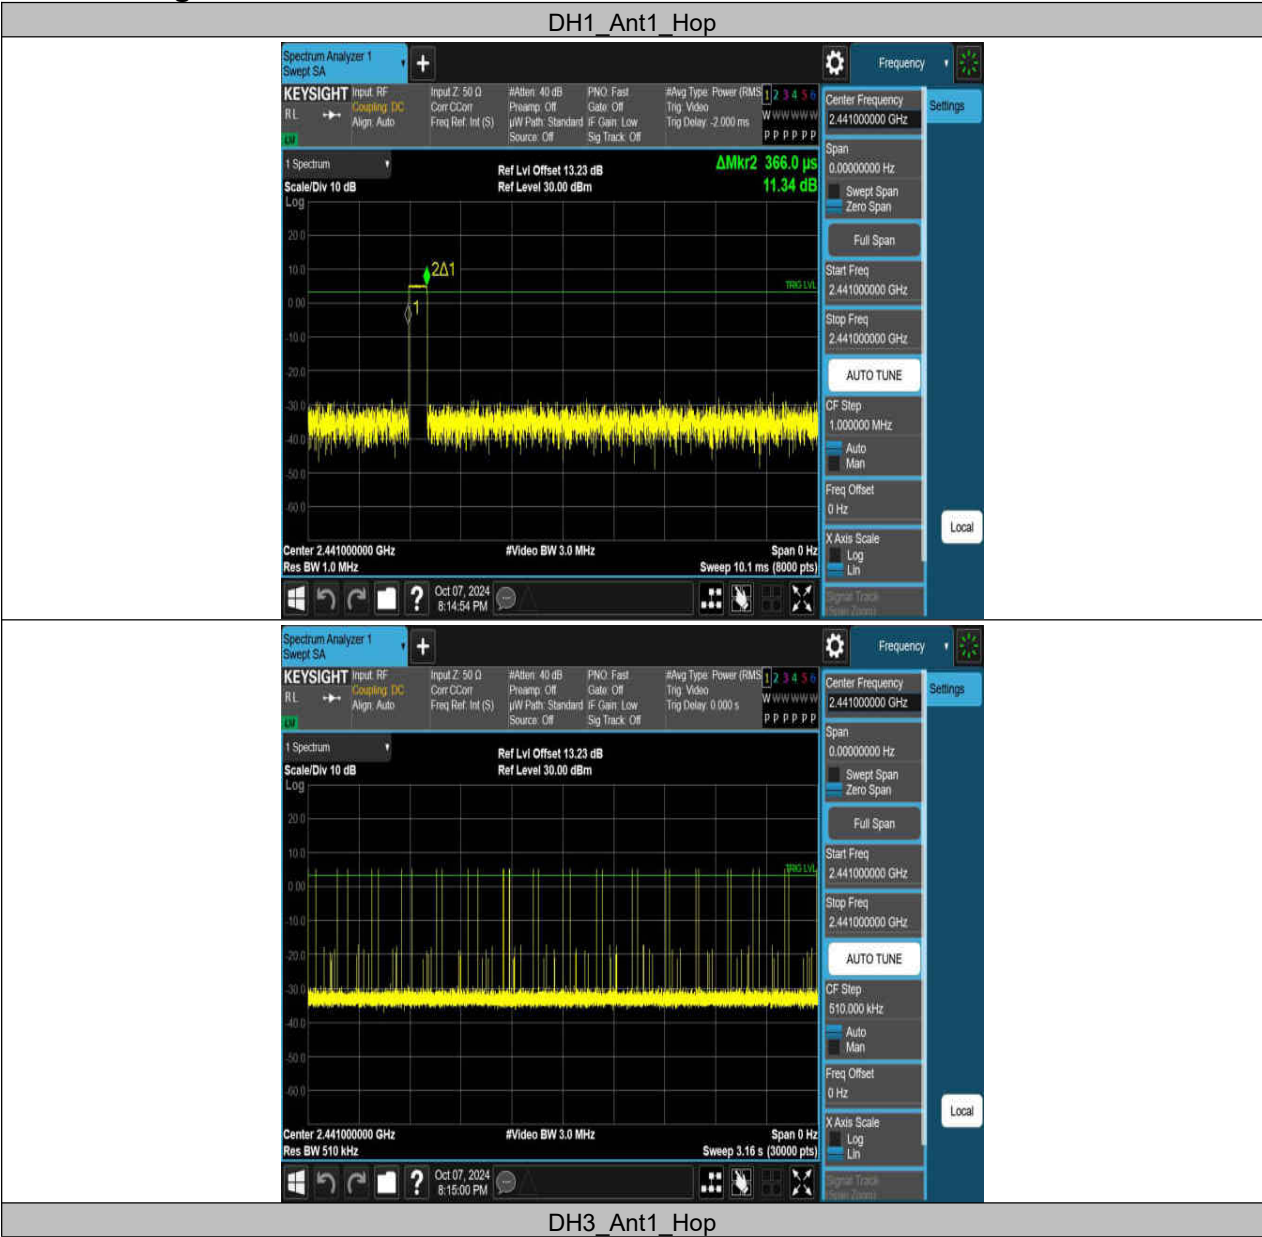

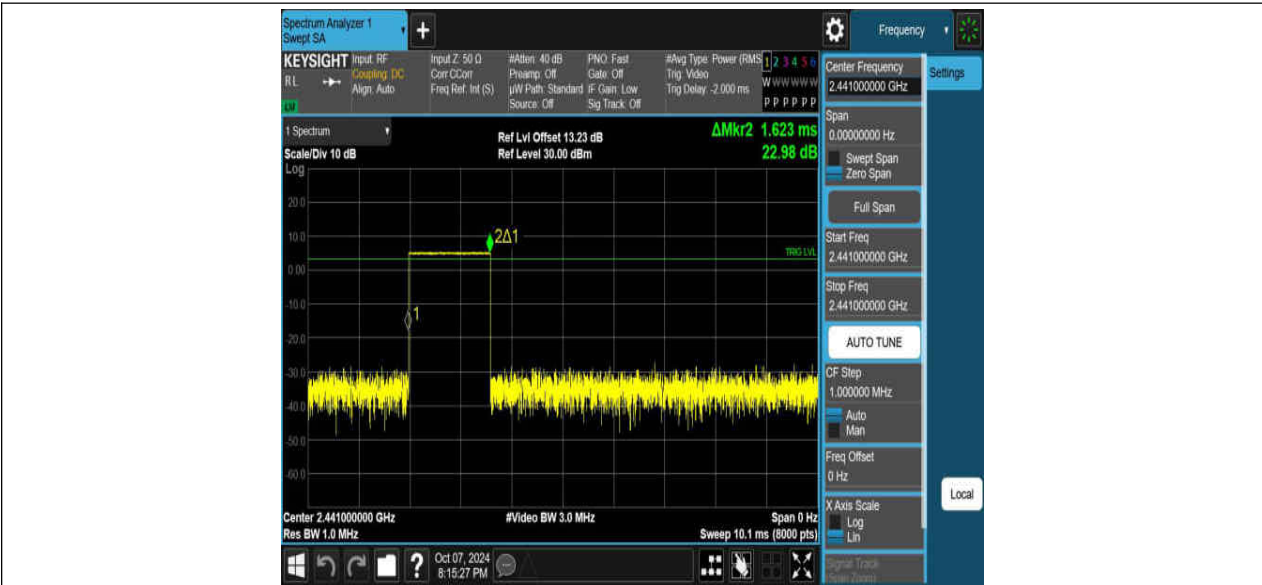


DH5_Ant1_Hop

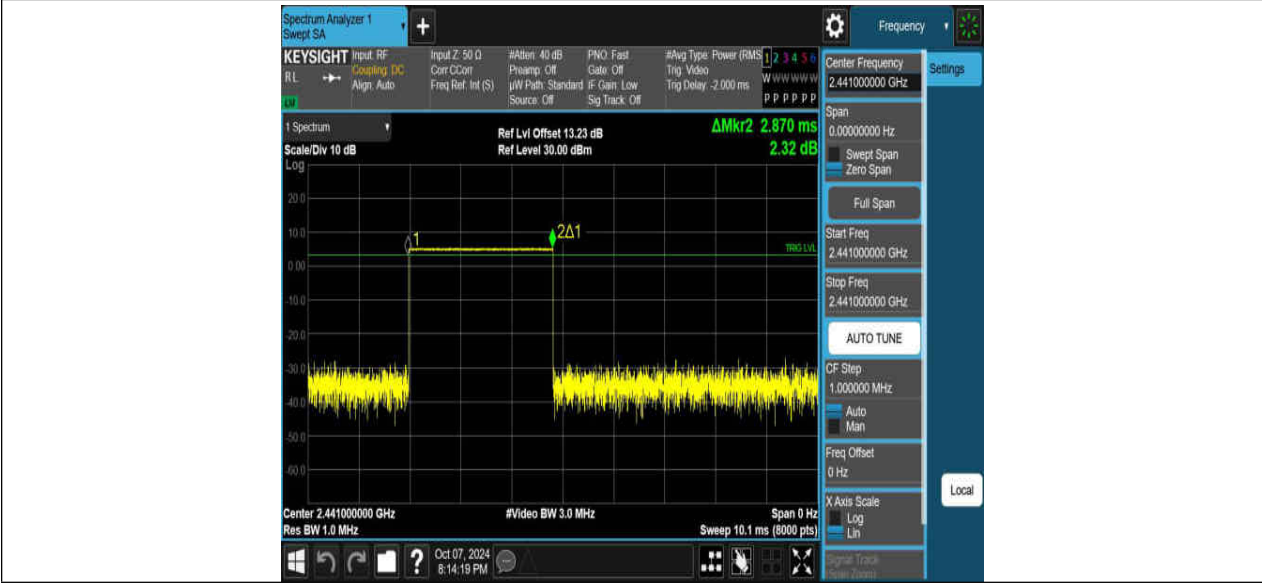


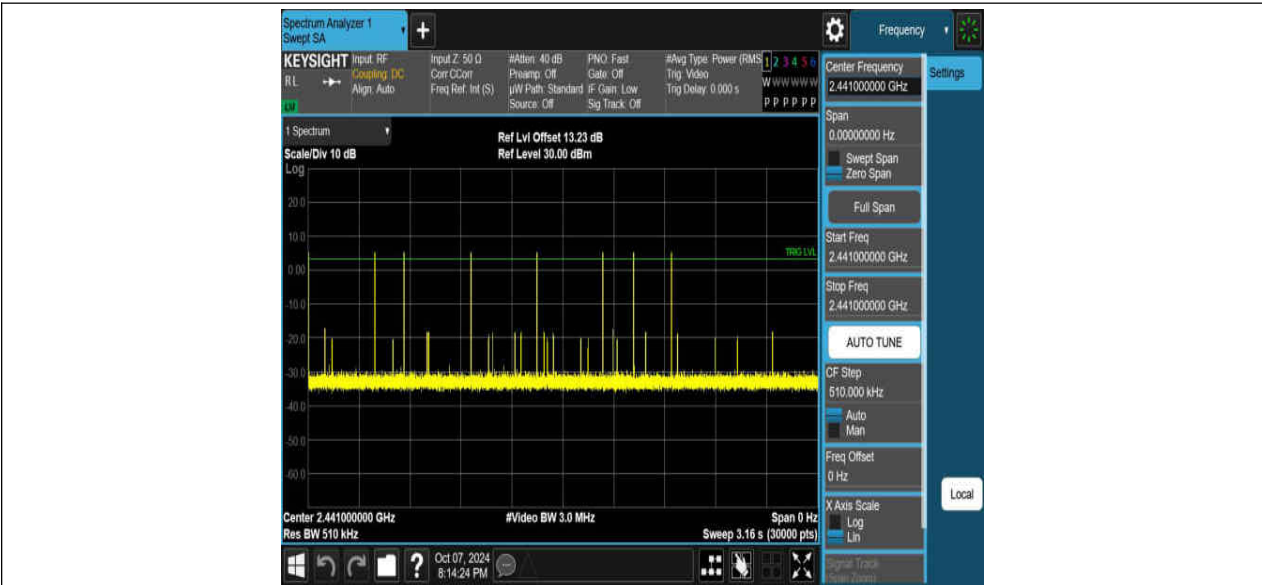


2DH1_Ant1_Hop

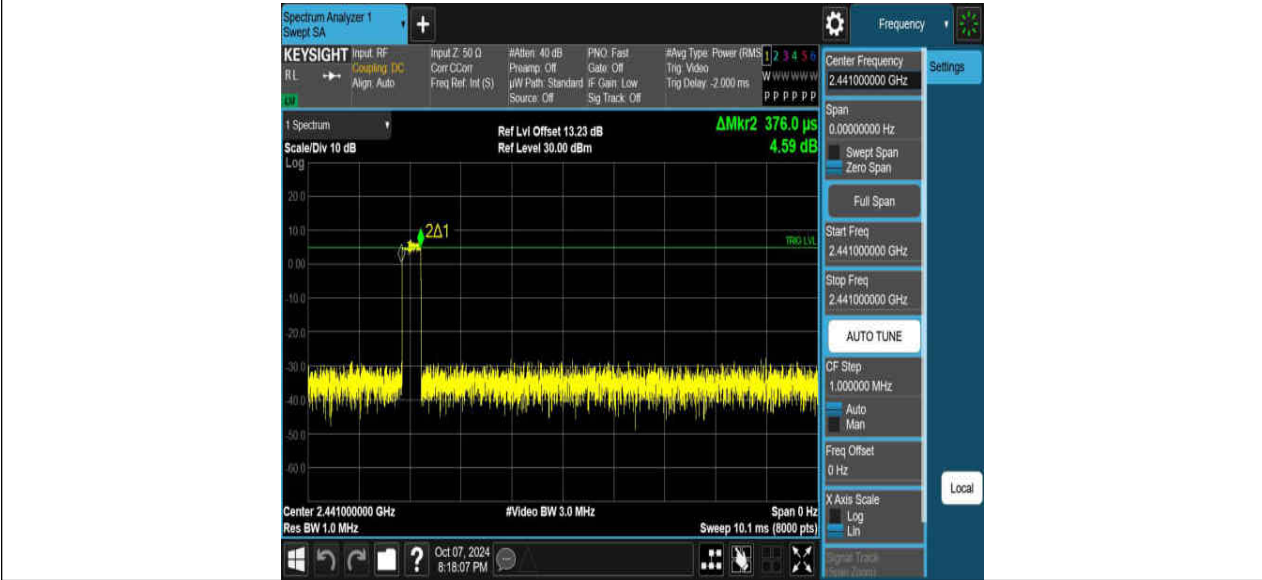


2DH3_Ant1_Hop

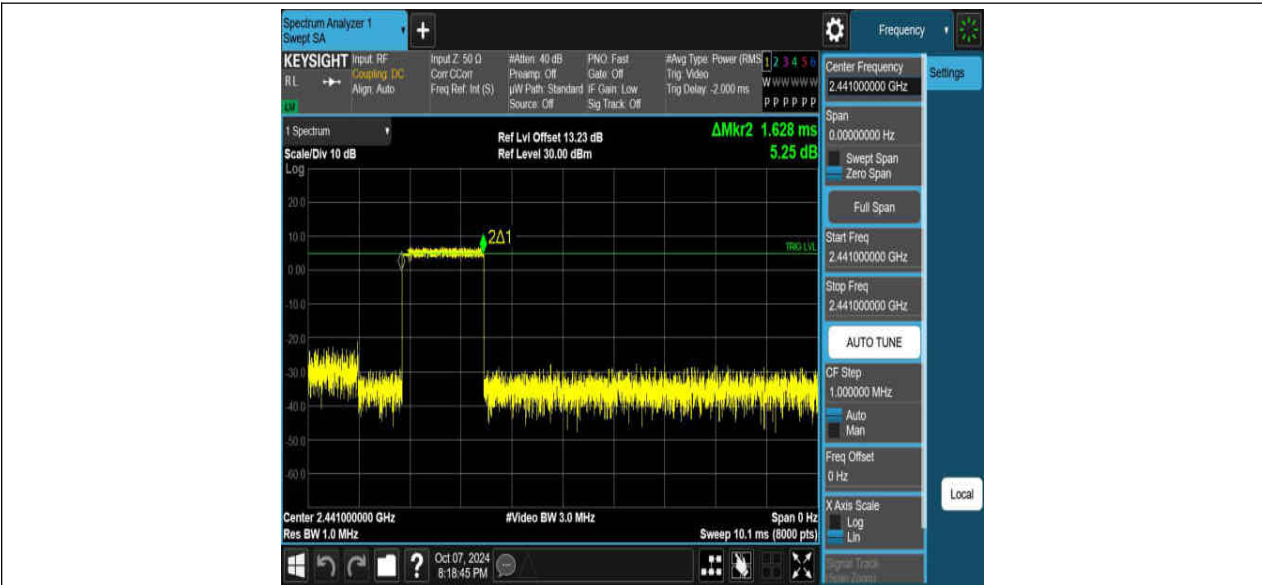


2DH5_Ant1_Hop

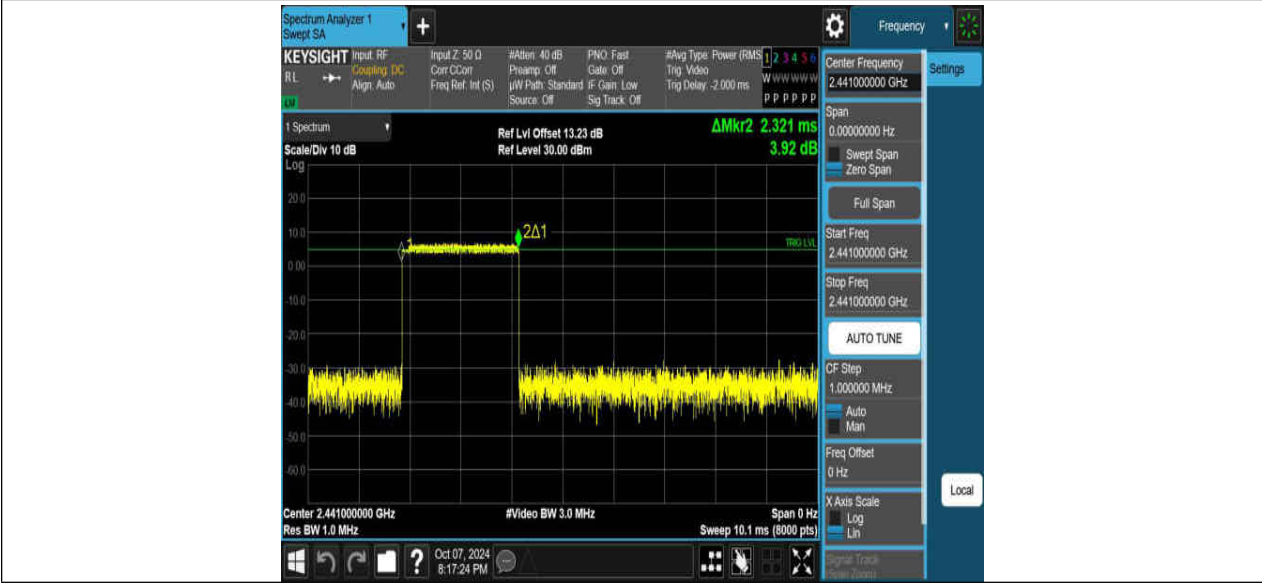


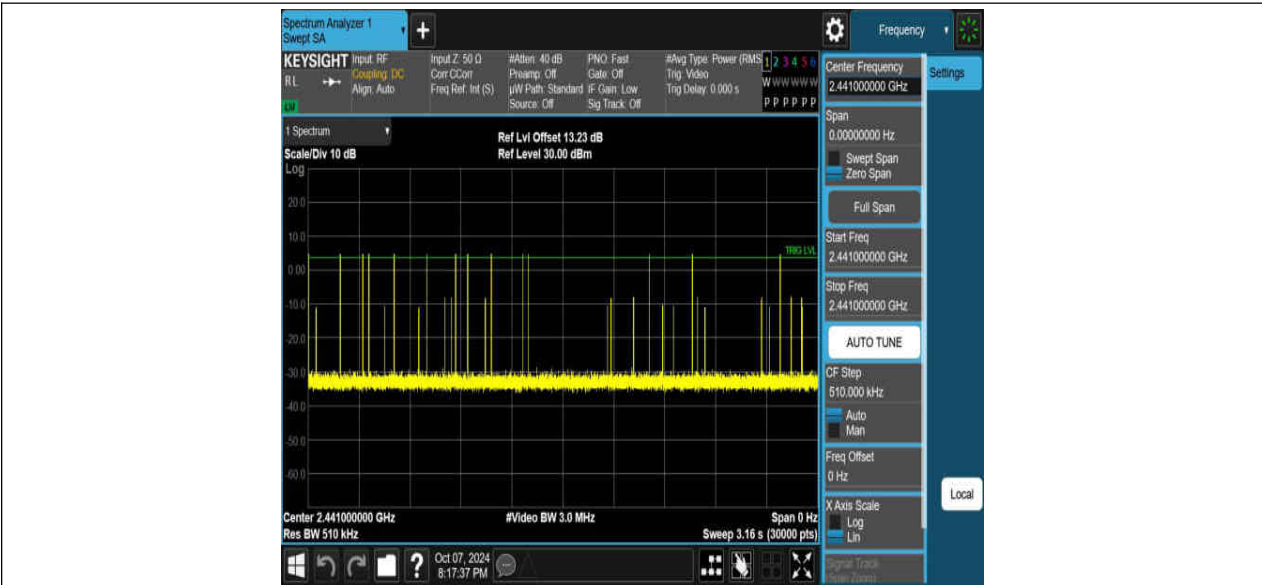

3DH1_Ant1_Hop

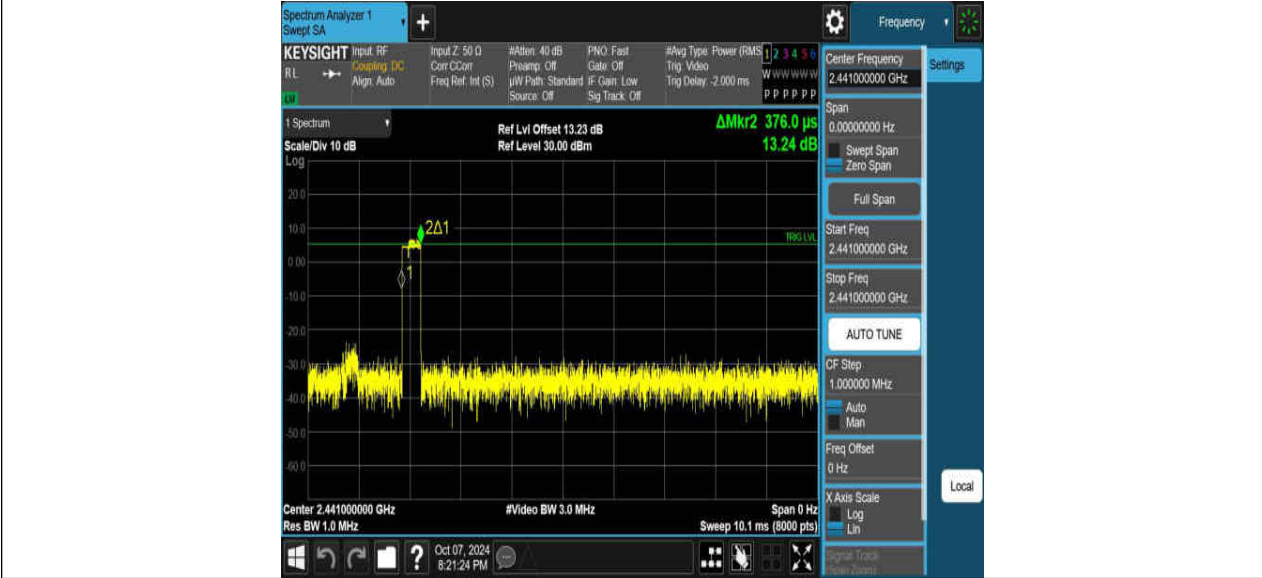

3DH3_Ant1_Hop

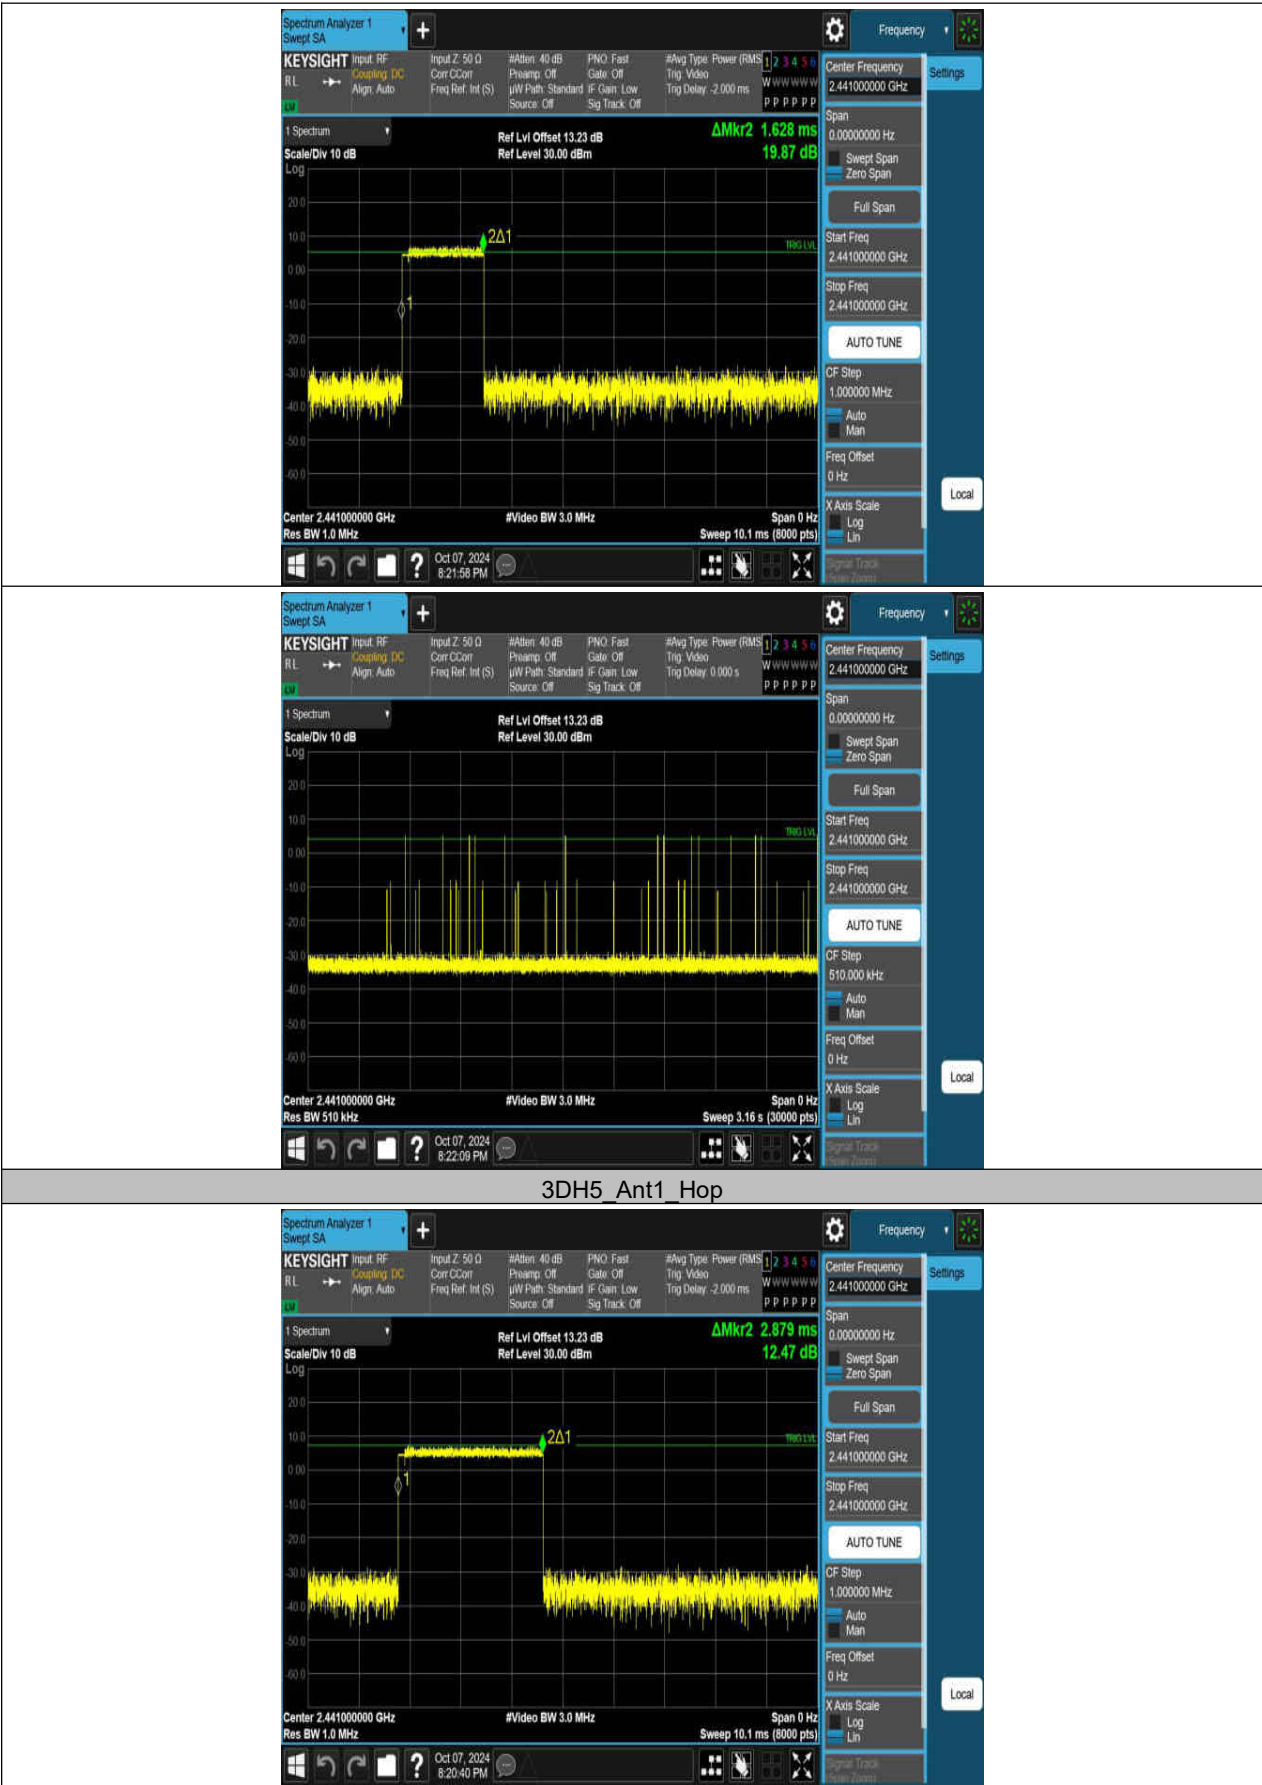



14. Conducted Spurious Emission

14.1. Block diagram of test setup

Same as section 8.1

14.2. Limits

CFR 47 FCC Part15 (15.247), Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

14.3. Test Procedure

Please refer to the ANSI C63.10 section 6.10.

For Band edge use the following settings:

Detector	Peak
RBW	100 kHz
VBW	300 kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

For Spurious Emission use the following settings:

Detector	Peak
RBW	100 kHz
VBW	300 kHz
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

14.4. Results

Band edge:


Test Mode	Ant.	Ch Name	Freq. (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
DH5	Ant1	Low	2402	4.79	-45.42	≤-15.21	PASS
		High	2480	4.08	-46.61	≤-15.92	PASS
		Low	Hop_2402	4.29	-45.46	≤-15.71	PASS
		High	Hop_2480	3.69	-46.84	≤-16.31	PASS
2DH5	Ant1	Low	2402	3.53	-46.44	≤-16.47	PASS
		High	2480	4.09	-46.51	≤-15.92	PASS
		Low	Hop_2402	-0.48	-47.36	≤-20.48	PASS
		High	Hop_2480	1.33	-44.94	≤-18.67	PASS
3DH5	Ant1	Low	2402	4.59	-46.87	≤-15.41	PASS
		High	2480	2.93	-45.79	≤-17.07	PASS
		Low	Hop_2402	-0.12	-47.08	≤-20.12	PASS
		High	Hop_2480	1.53	-46.4	≤-18.47	PASS

Spurious Emission:

Test Mode	Ant.	Freq. (MHz)	Freq. Range (MHz)	Ref Level (dBm)	Result (dBm)	Limit (dBm)	Verdict
DH5	Ant1	2402	Reference	4.52	4.52	---	PASS
			30~1000	4.52	-58.47	≤-15.48	PASS
			1000~26500	4.52	-45.14	≤-15.48	PASS
		2441	Reference	4.62	4.62	---	PASS
			30~1000	4.62	-58.33	≤-15.38	PASS
			1000~26500	4.62	-44.46	≤-15.38	PASS
		2480	Reference	3.92	3.92	---	PASS
			30~1000	3.92	-58.8	≤-16.08	PASS
			1000~26500	3.92	-43.69	≤-16.08	PASS
2DH5	Ant1	2402	Reference	3.34	3.34	---	PASS
			30~1000	3.34	-58.43	≤-16.66	PASS
			1000~26500	3.34	-47.52	≤-16.66	PASS
		2441	Reference	3.54	3.54	---	PASS
			30~1000	3.54	-58.58	≤-16.46	PASS
			1000~26500	3.54	-46.28	≤-16.46	PASS
		2480	Reference	3.13	3.13	---	PASS
			30~1000	3.13	-58.94	≤-16.87	PASS
			1000~26500	3.13	-46.12	≤-16.87	PASS
3DH5	Ant1	2402	Reference	2.77	2.77	---	PASS
			30~1000	2.77	-58.08	≤-17.23	PASS
			1000~26500	2.77	-47.57	≤-17.23	PASS
		2441	Reference	2.65	2.65	---	PASS
			30~1000	2.65	-58.2	≤-17.35	PASS
			1000~26500	2.65	-45.76	≤-17.35	PASS
		2480	Reference	2.15	2.15	---	PASS
			30~1000	2.15	-58.87	≤-17.85	PASS
			1000~26500	2.15	-47.42	≤-17.85	PASS


14.5. Original test data

Band edge:

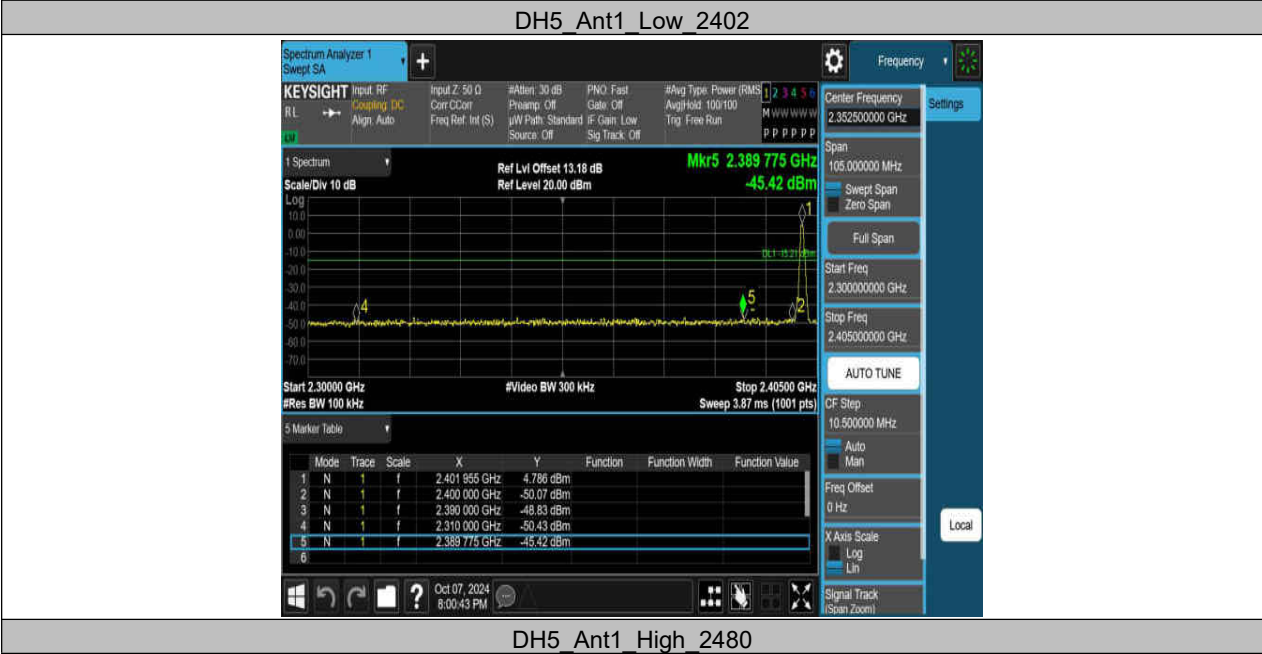





DH5_Ant1_Low_Hop_2402

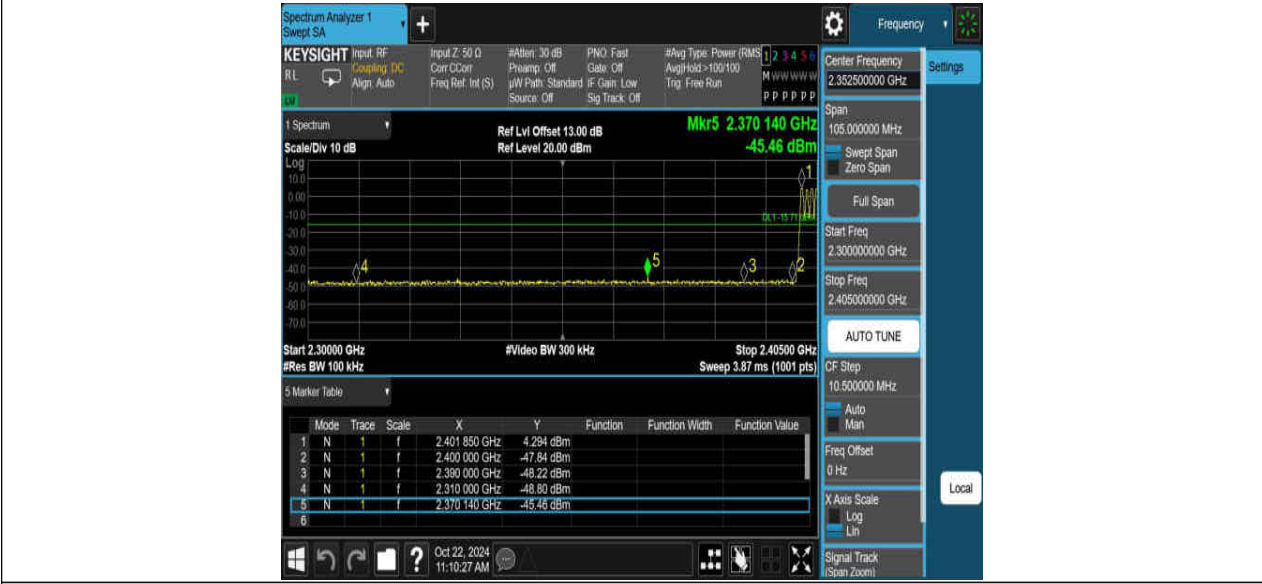

DH5_Ant1_High_Hop_2480




2DH5_Ant1_Low_2402

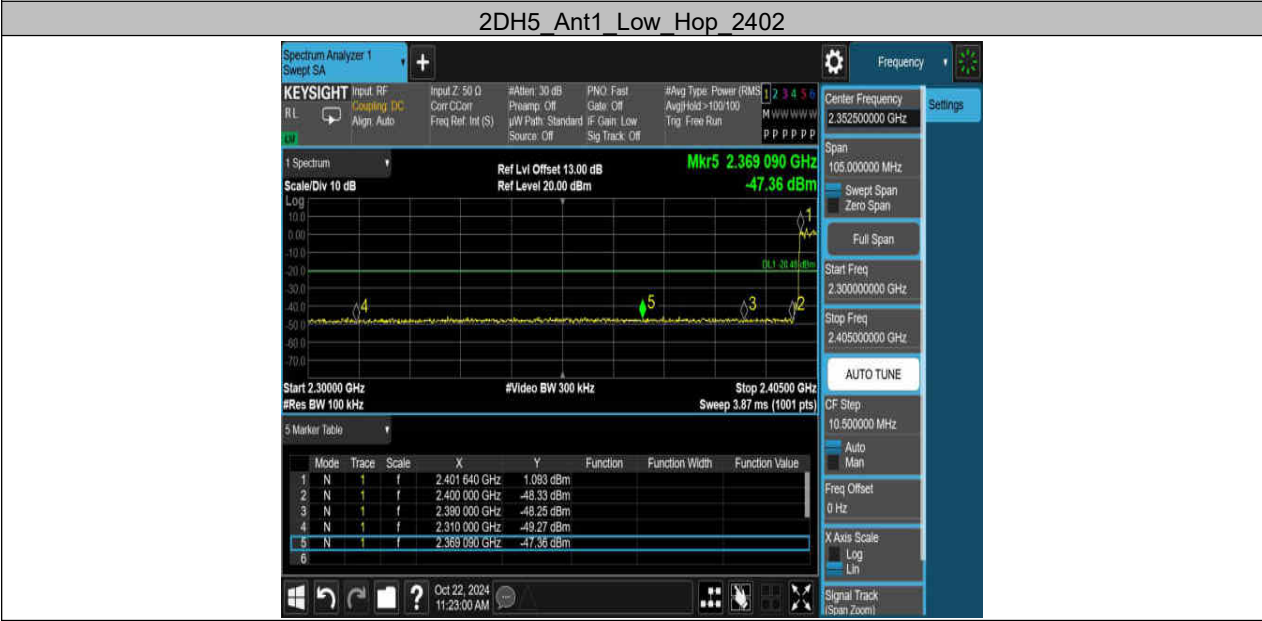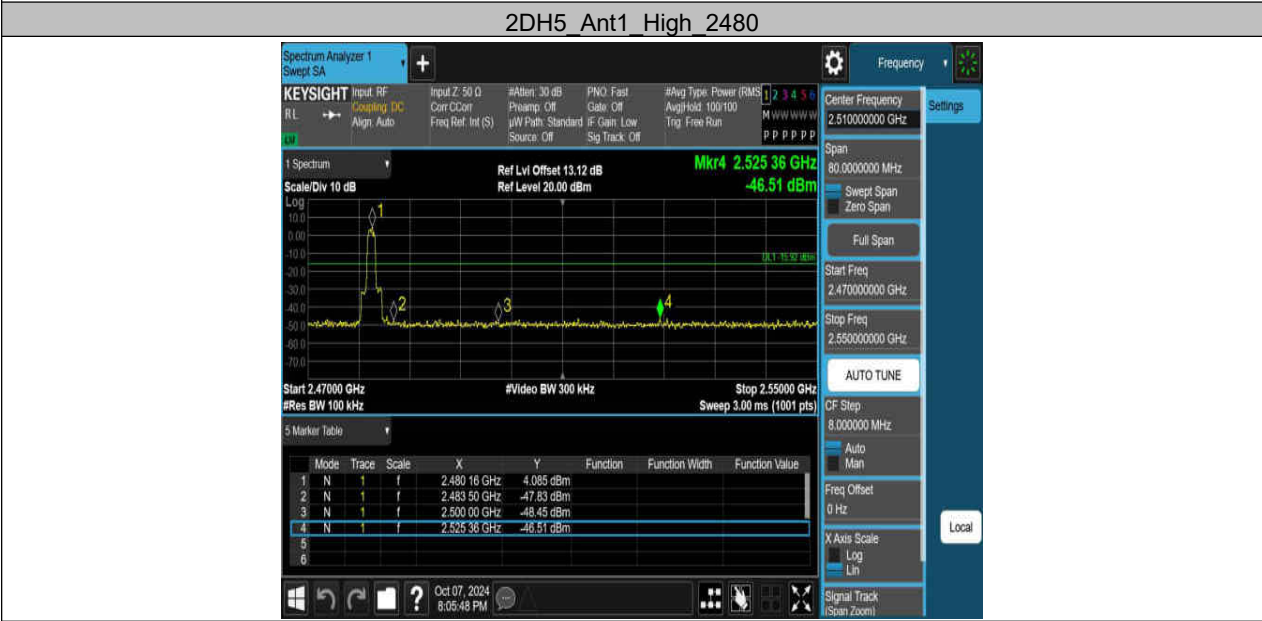





3DH5_Ant1_Low_2402

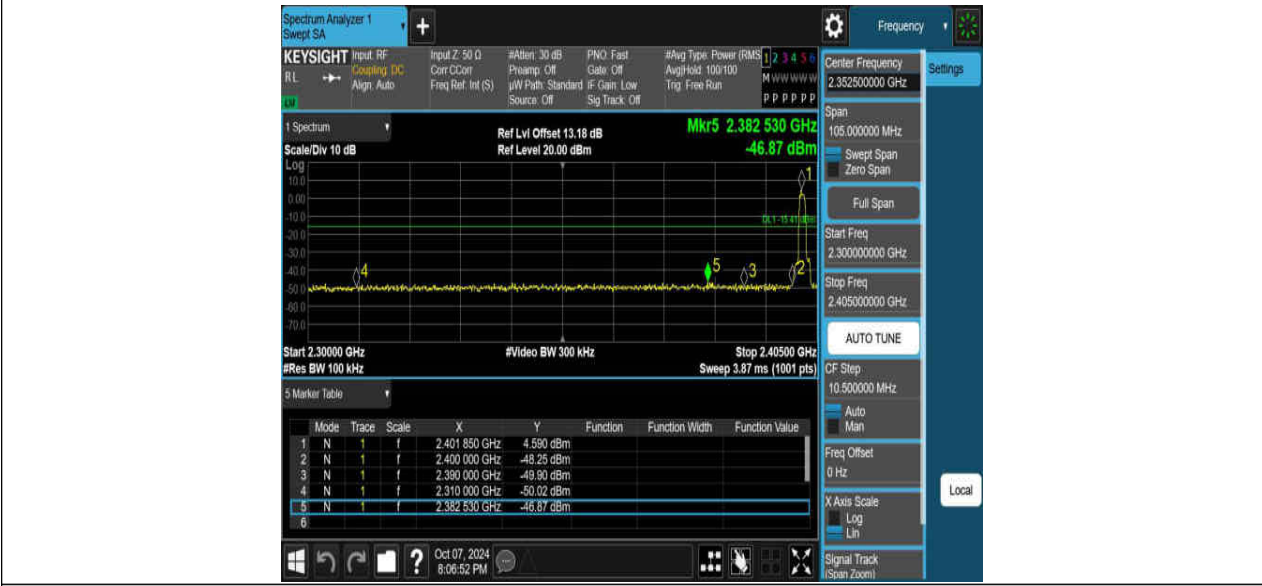


3DH5_Ant1_High_2480

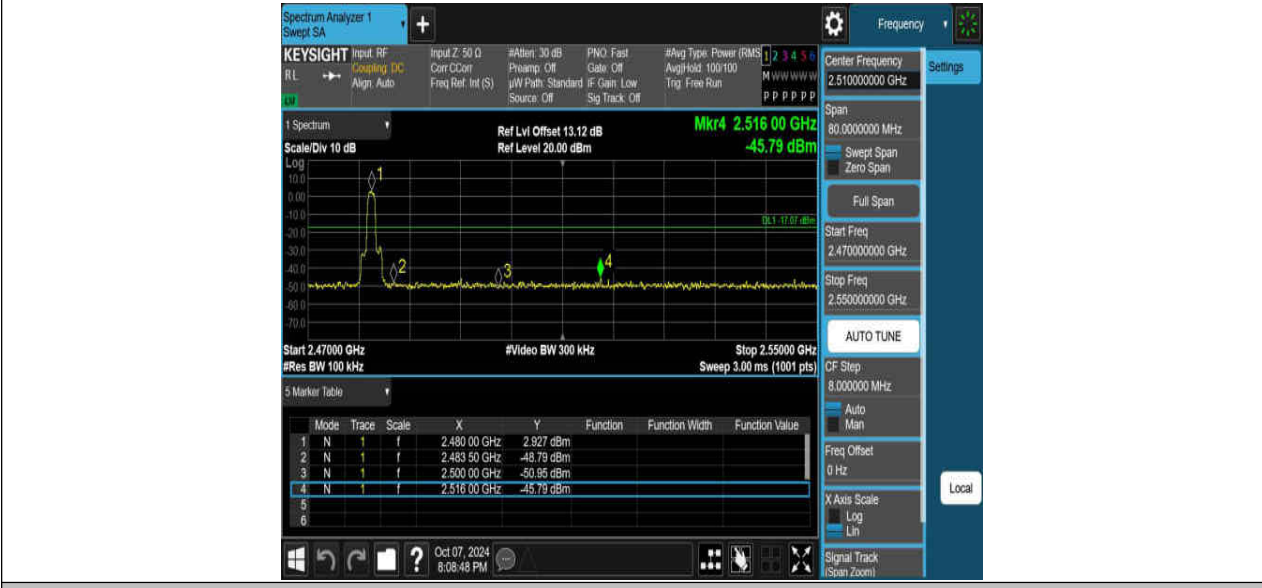


3DH5_Ant1_Low_Hop_2402

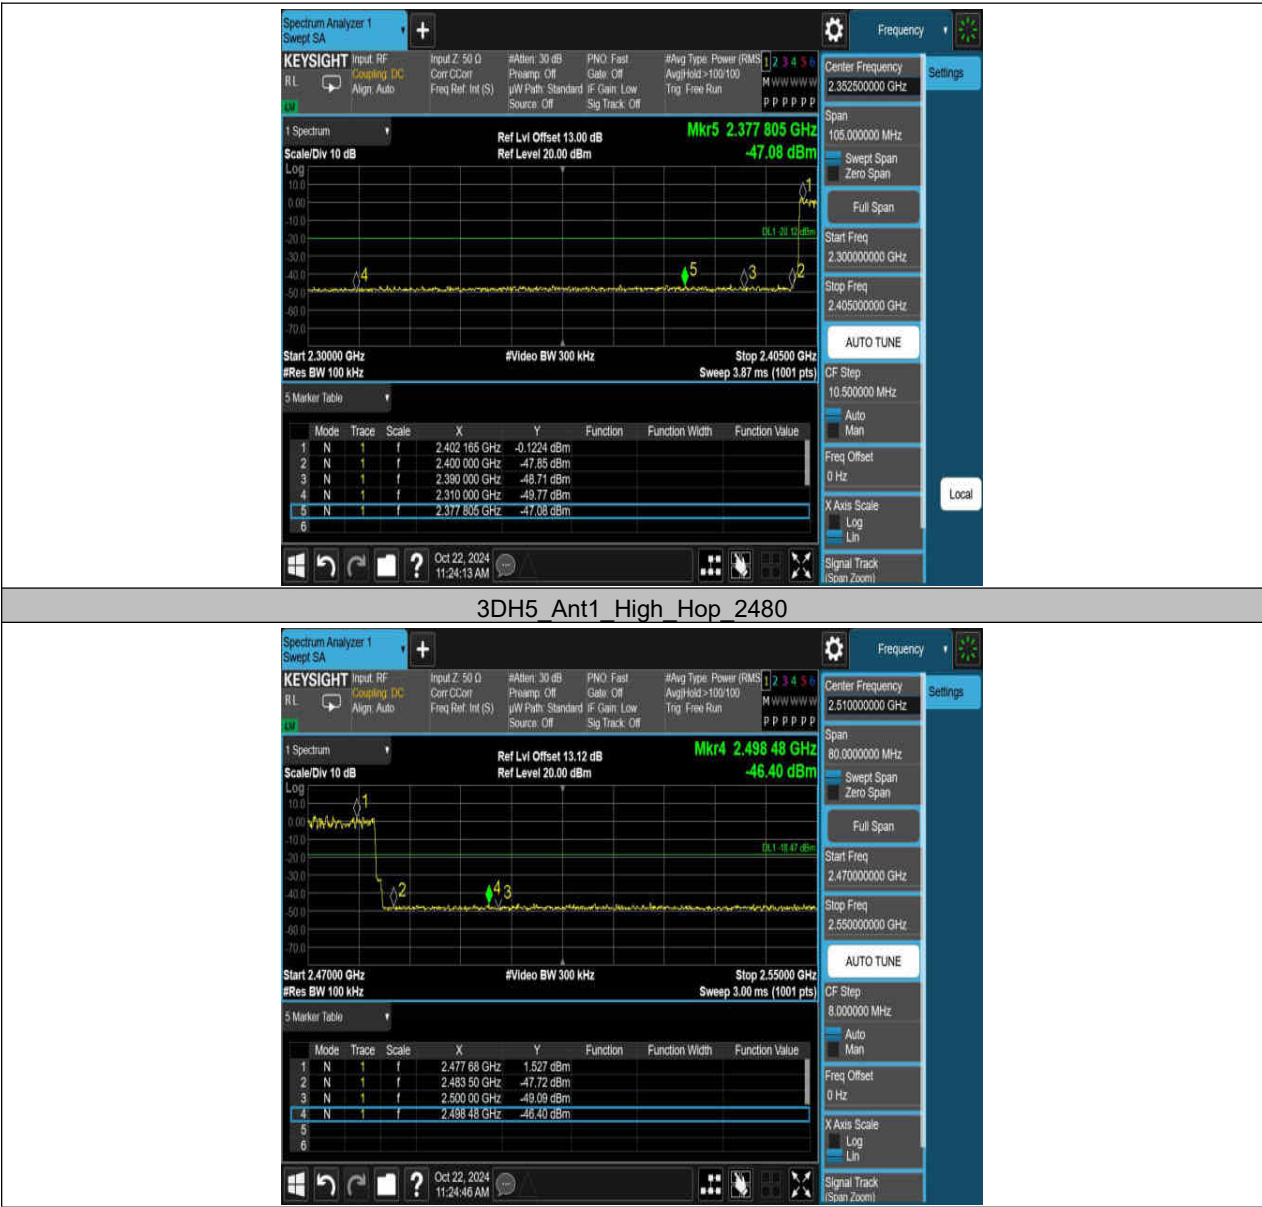


Spurious Emission:

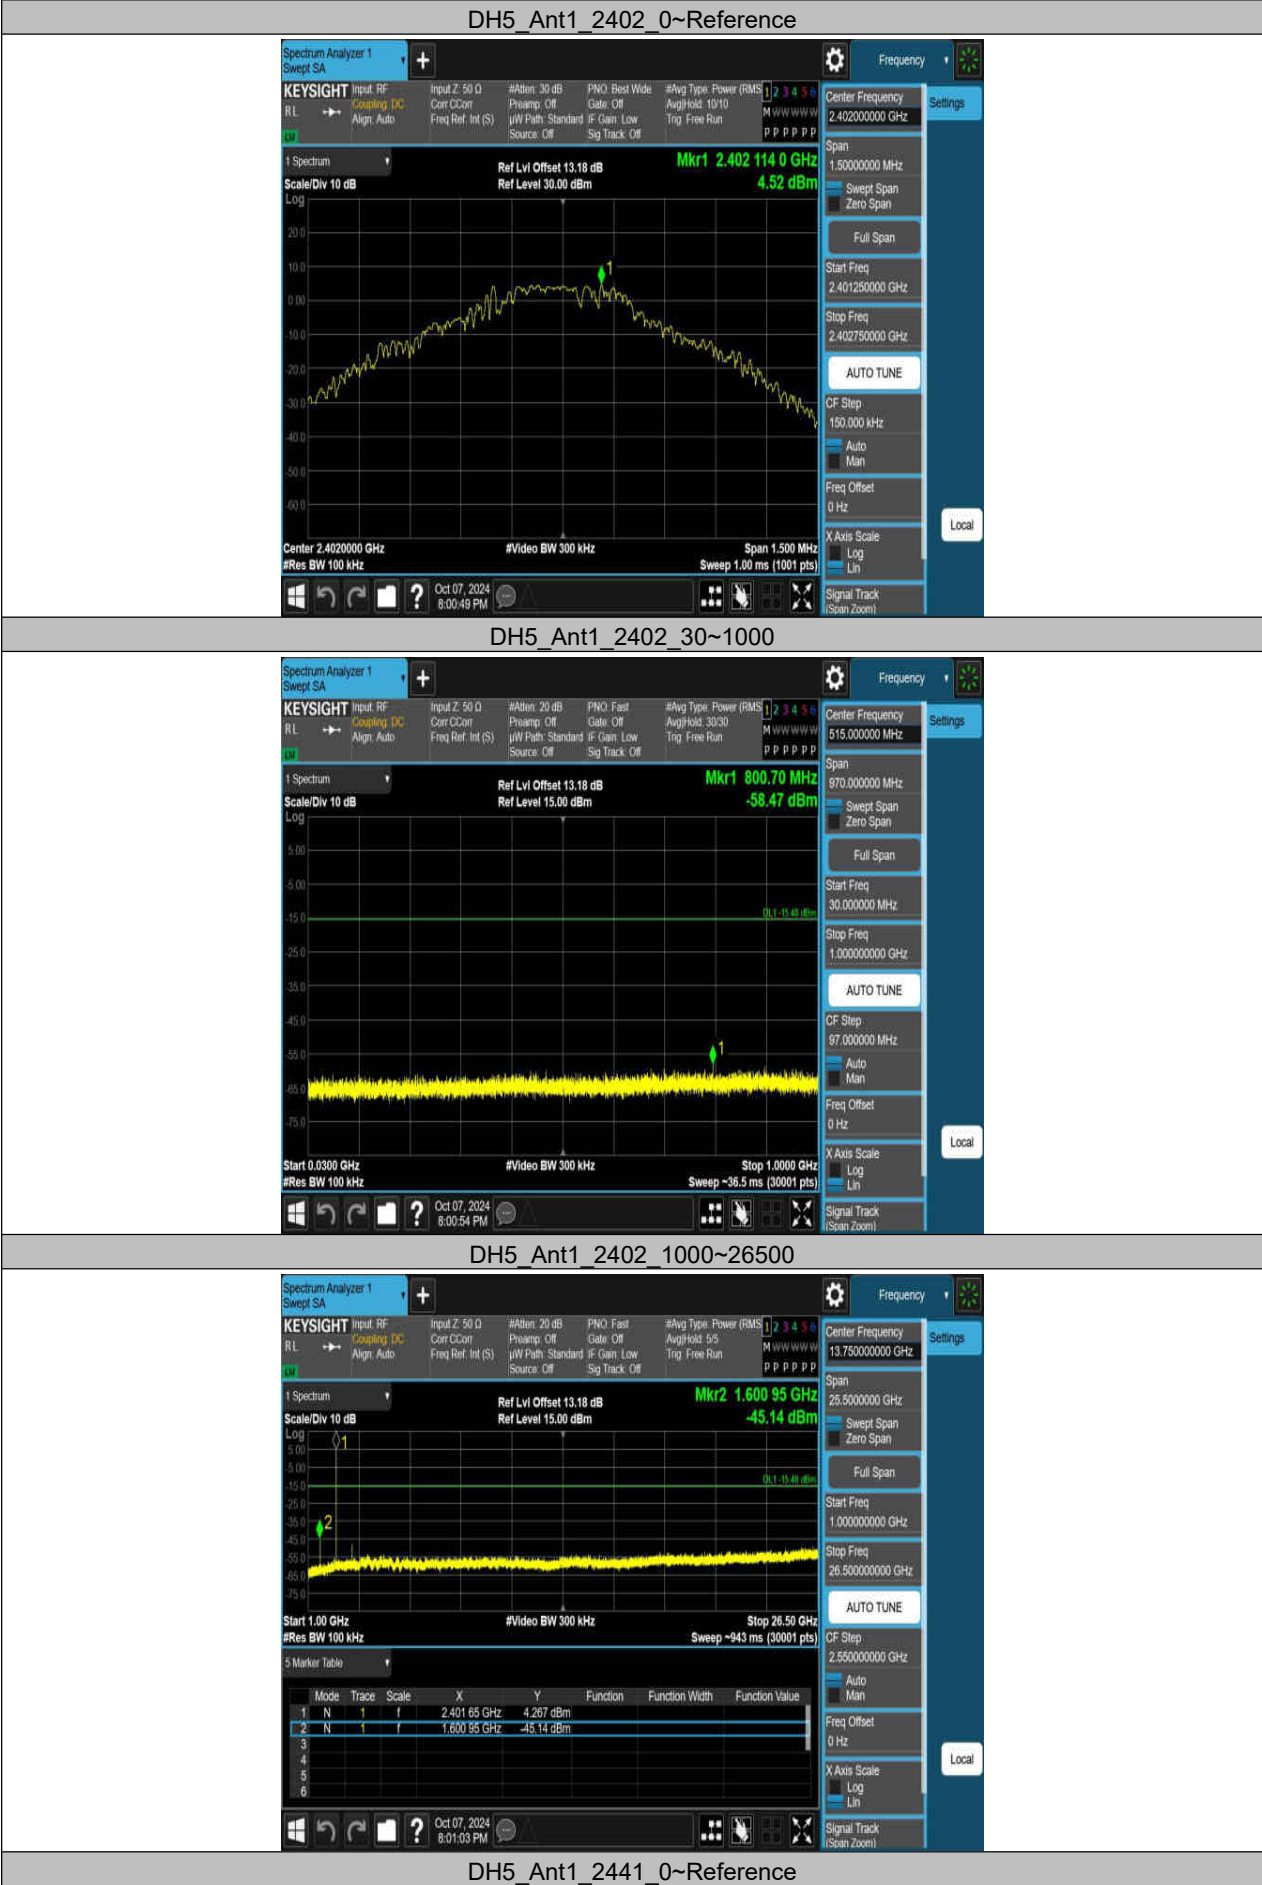

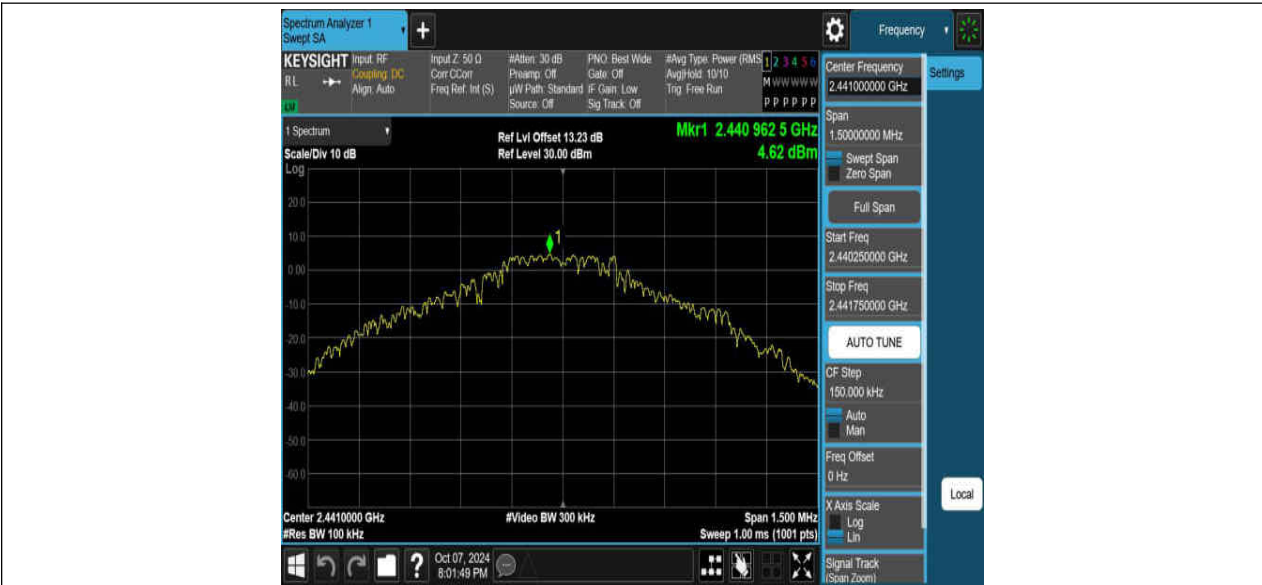

DH5_Ant1_2441_30~1000

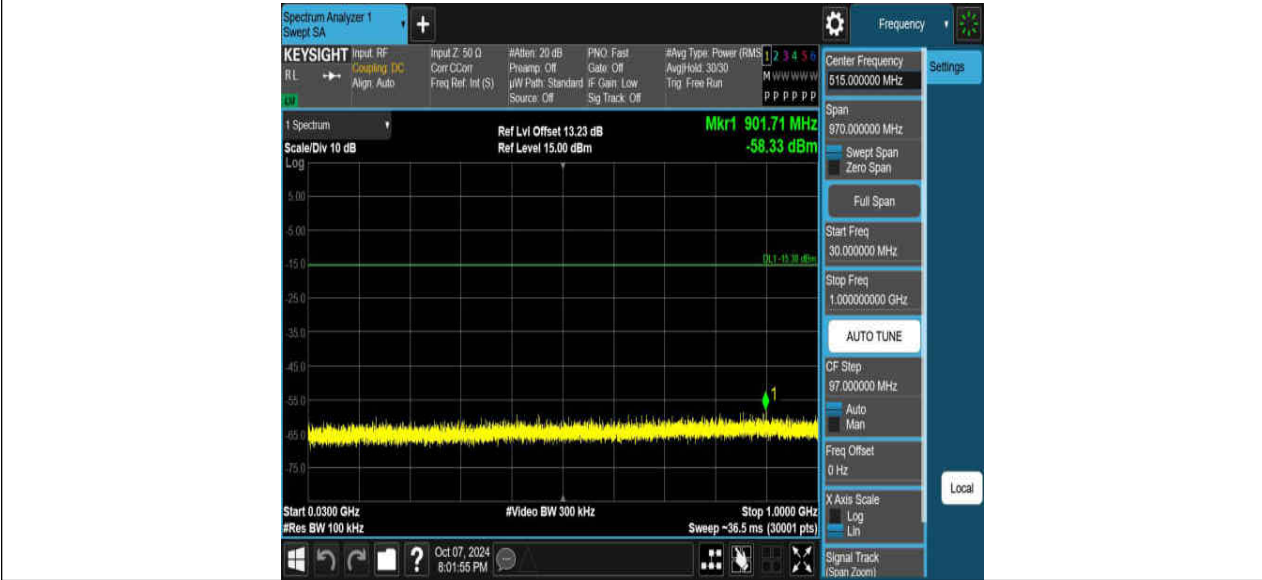


DH5_Ant1_2441_1000~26500



DH5_Ant1_2480_0~Reference




DH5 Ant1_2480_30~1000

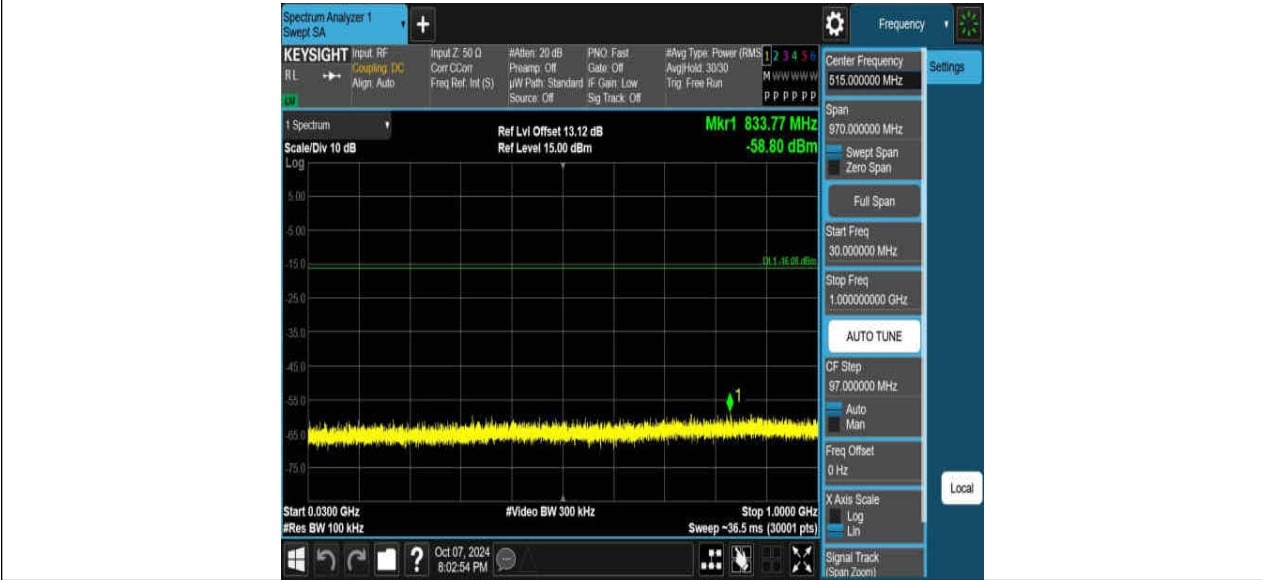


DH5 Ant1_2480_1000~26500



2DH5 Ant1_2402_0~Reference

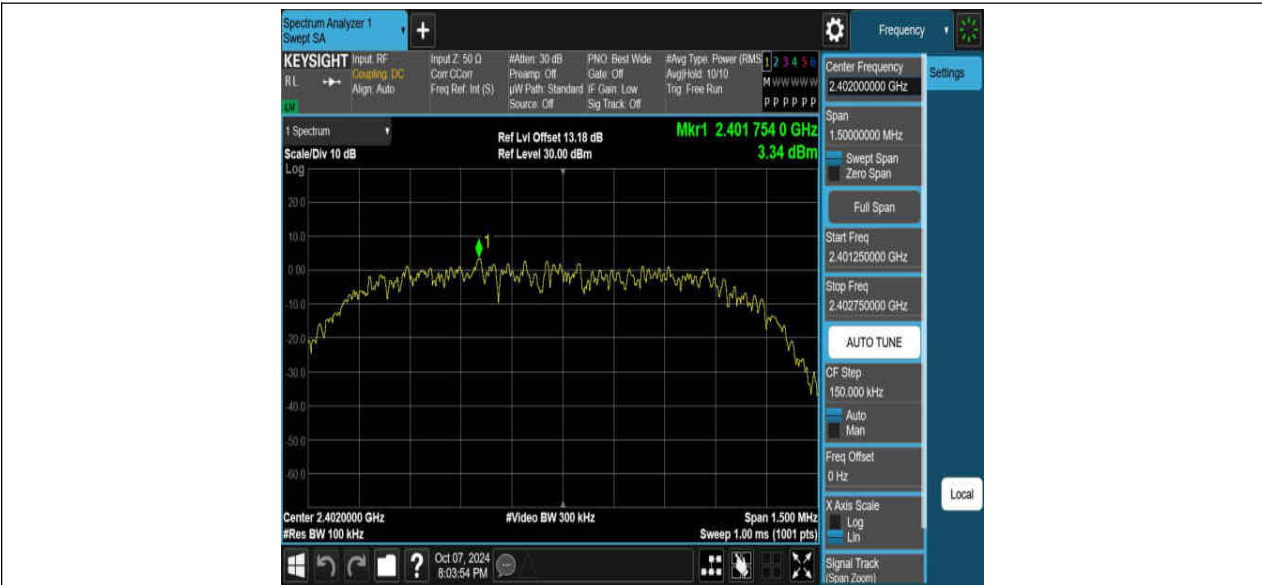

2DH5_Ant1_2402_30~1000

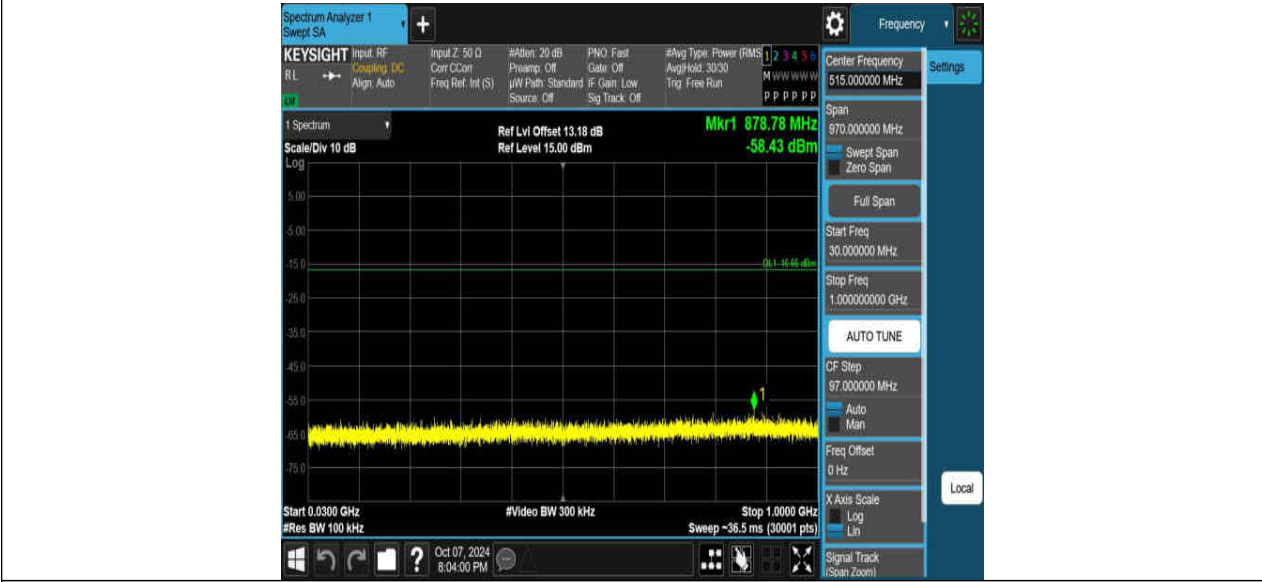


2DH5_Ant1_2402_1000~26500



2DH5_Ant1_2441_0~Reference




2DH5_Ant1_2441_30~1000

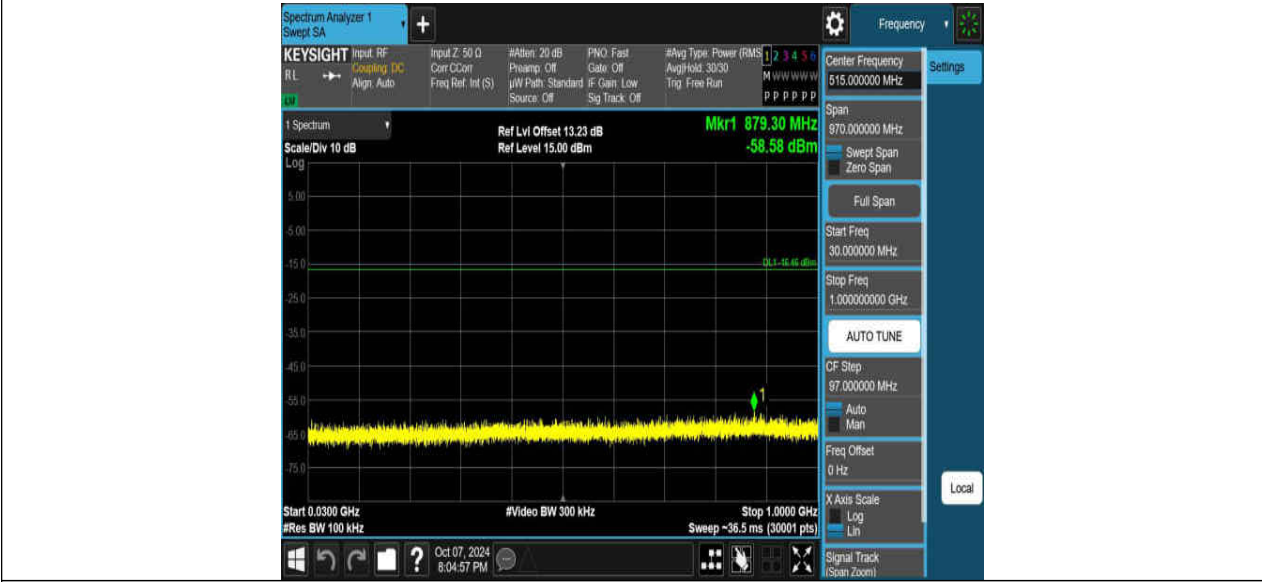


2DH5_Ant1_2441_1000~26500



2DH5_Ant1_2480_0~Reference

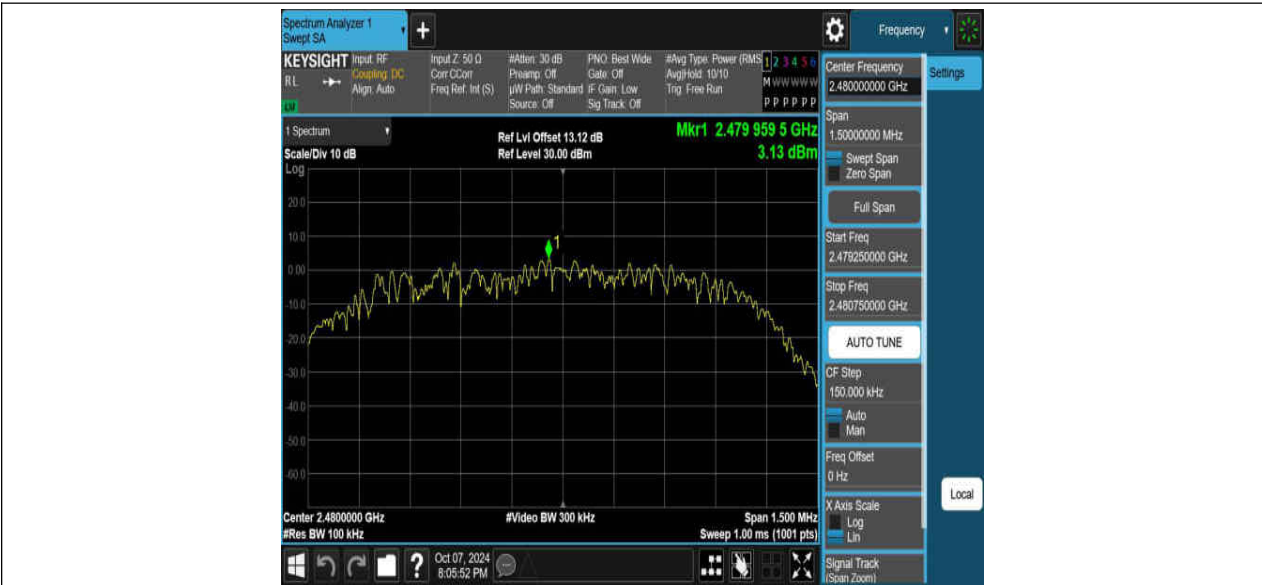


2DH5_Ant1_2480_30~1000

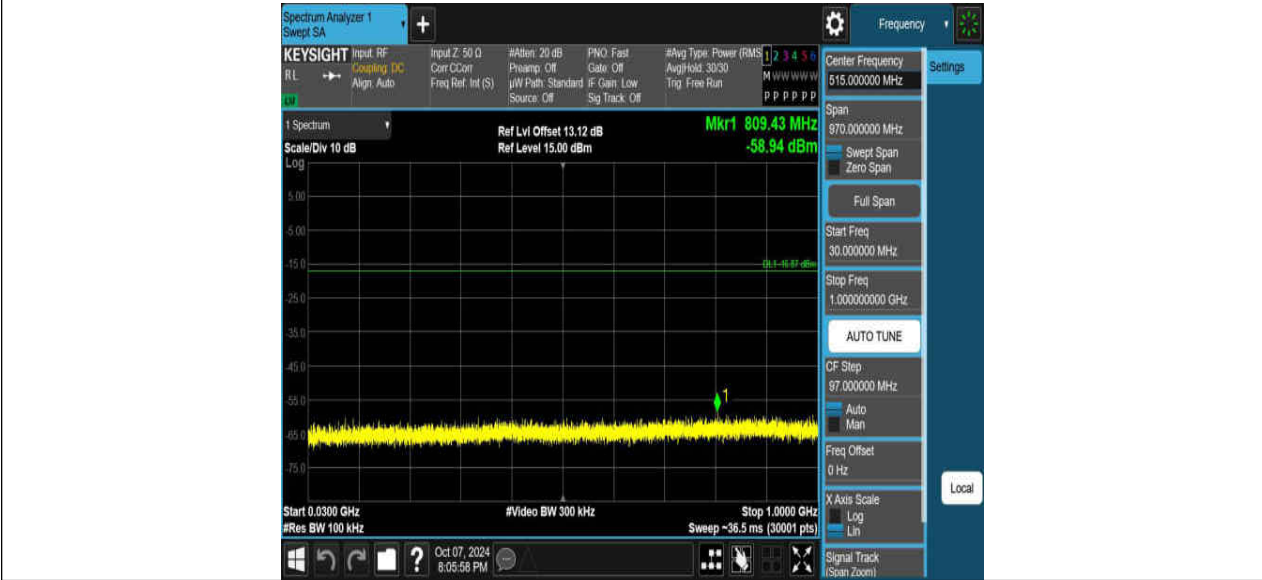


2DH5_Ant1_2480_1000~26500



3DH5_Ant1_2402_0~Reference

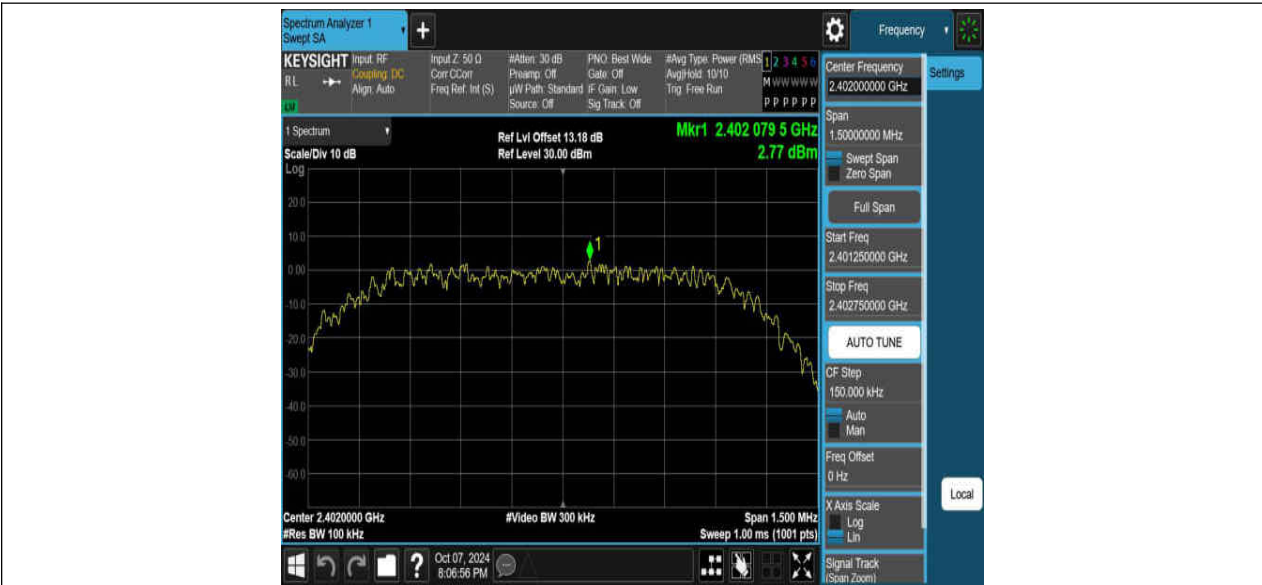


3DH5_Ant1_2402_30~1000

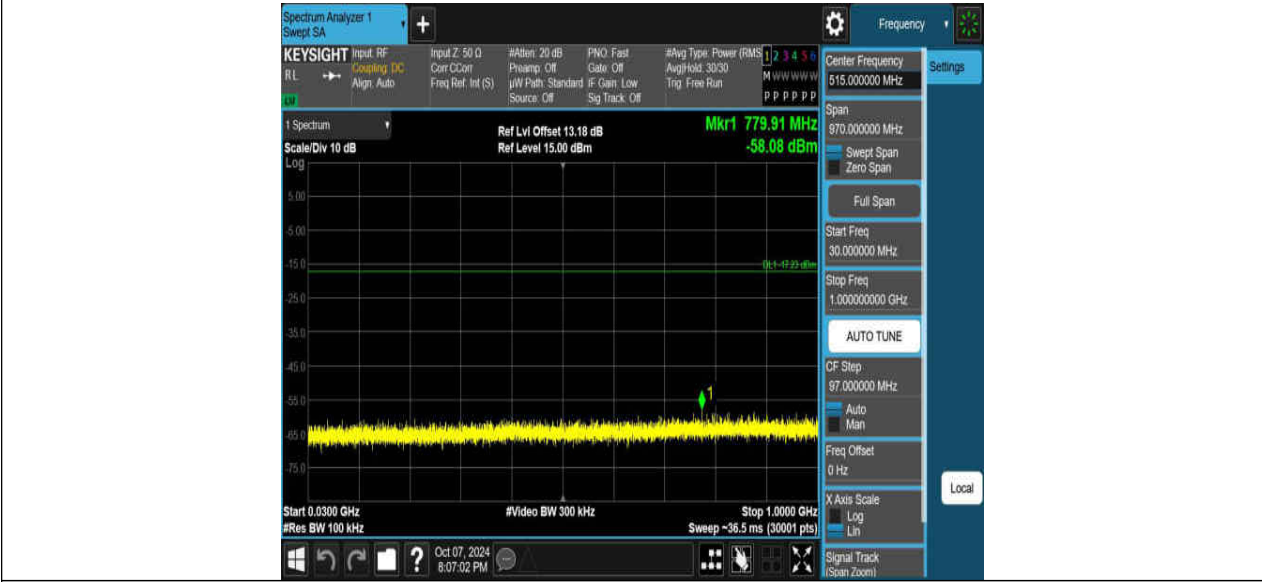


3DH5_Ant1_2402_1000~26500



3DH5_Ant1_2441_0~Reference

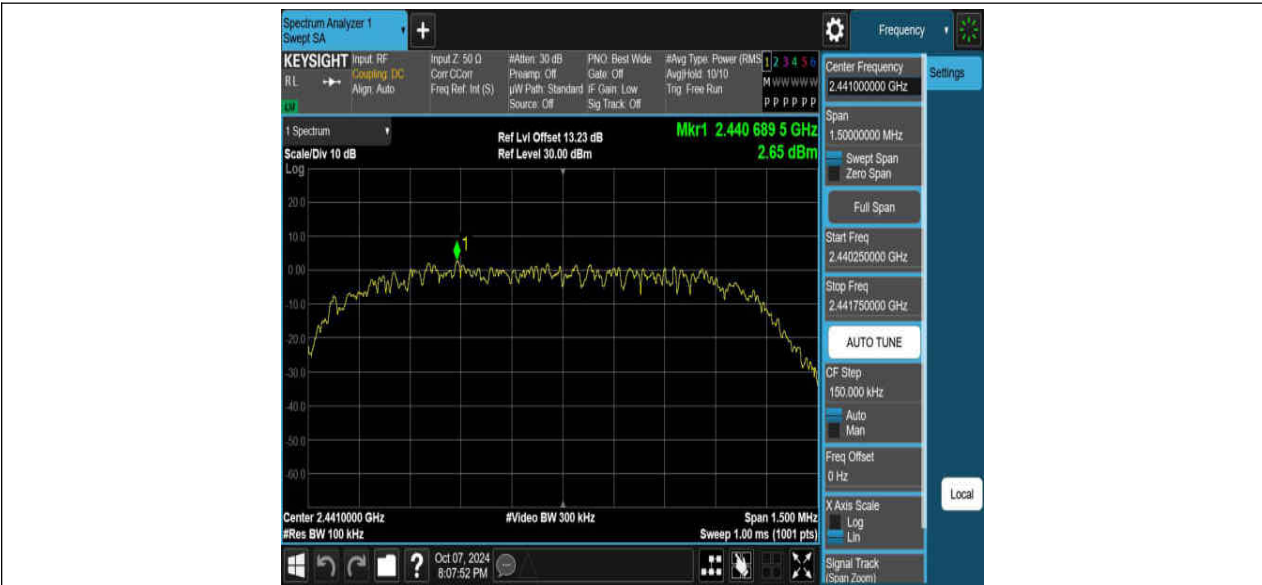


3DH5_Ant1_2441_30~1000

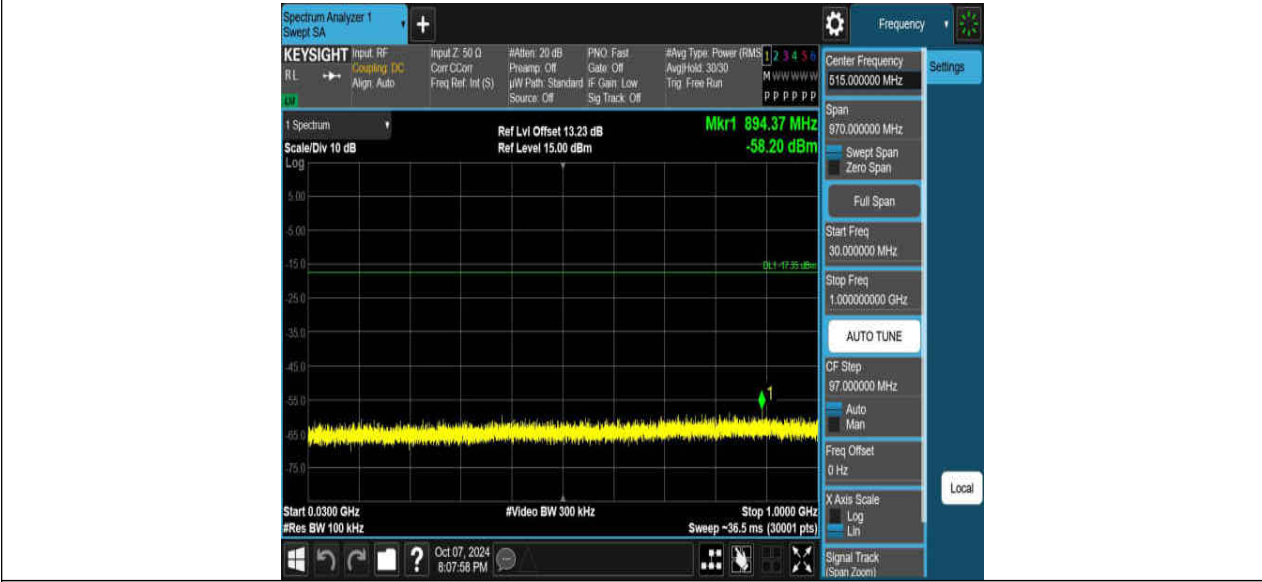


3DH5_Ant1_2441_1000~26500



3DH5_Ant1_2480_0~Reference

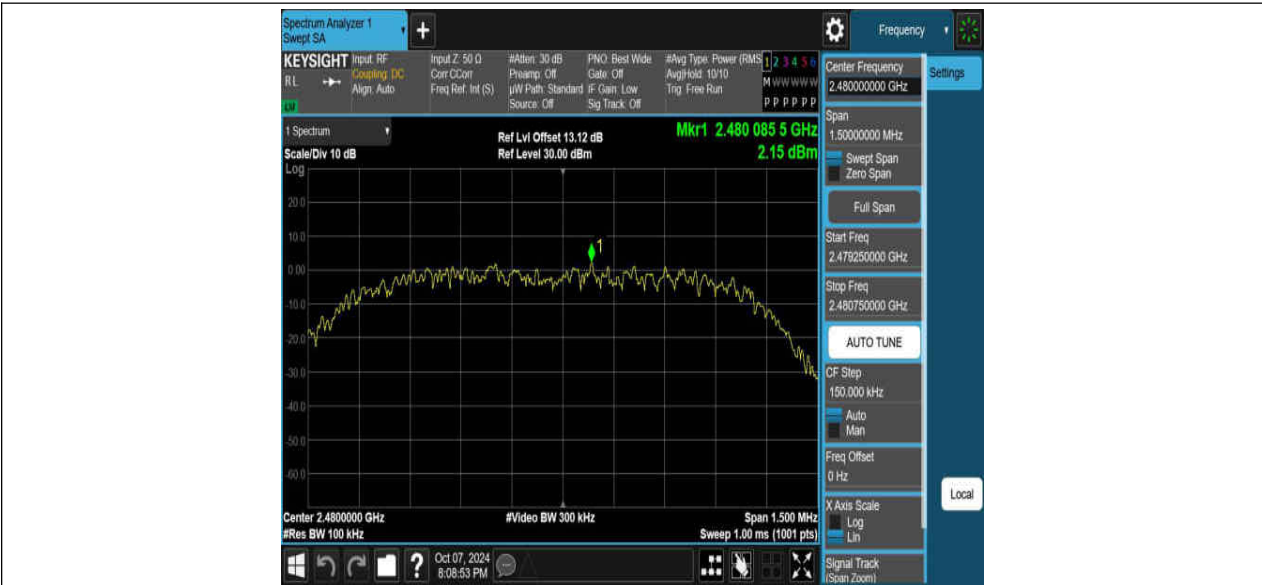

3DH5_Ant1_2480_30~1000

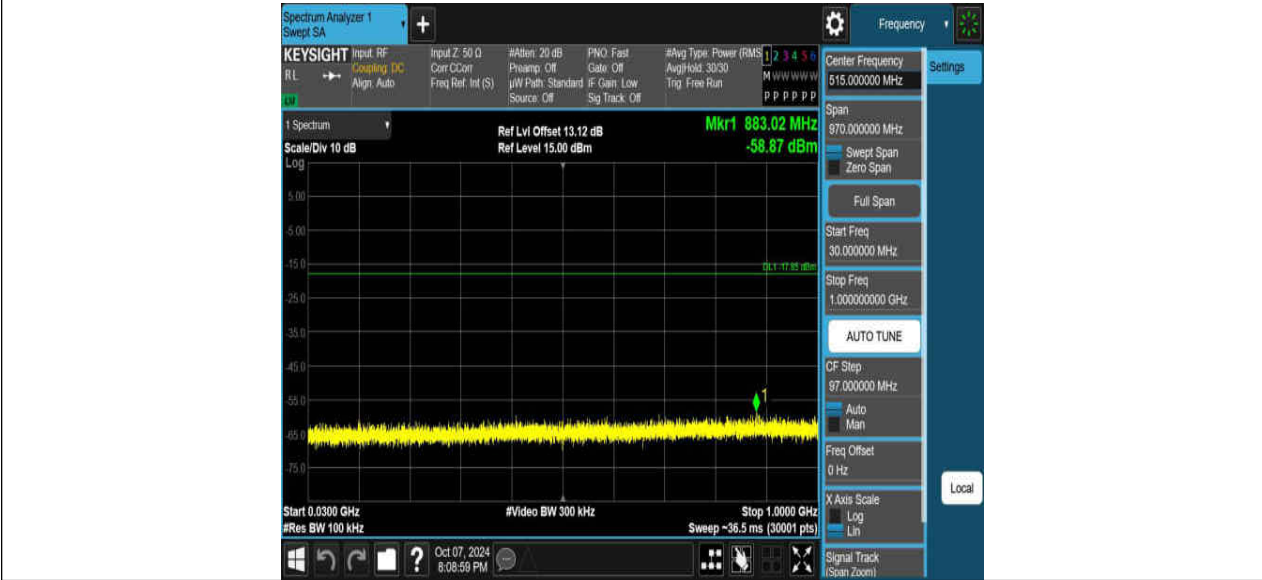


3DH5_Ant1_2480_1000~26500




15. Radiated Emission

15.1. Block diagram of test setup


In 3m Anechoic Chamber, test setup diagram for 9kHz - 30MHz:

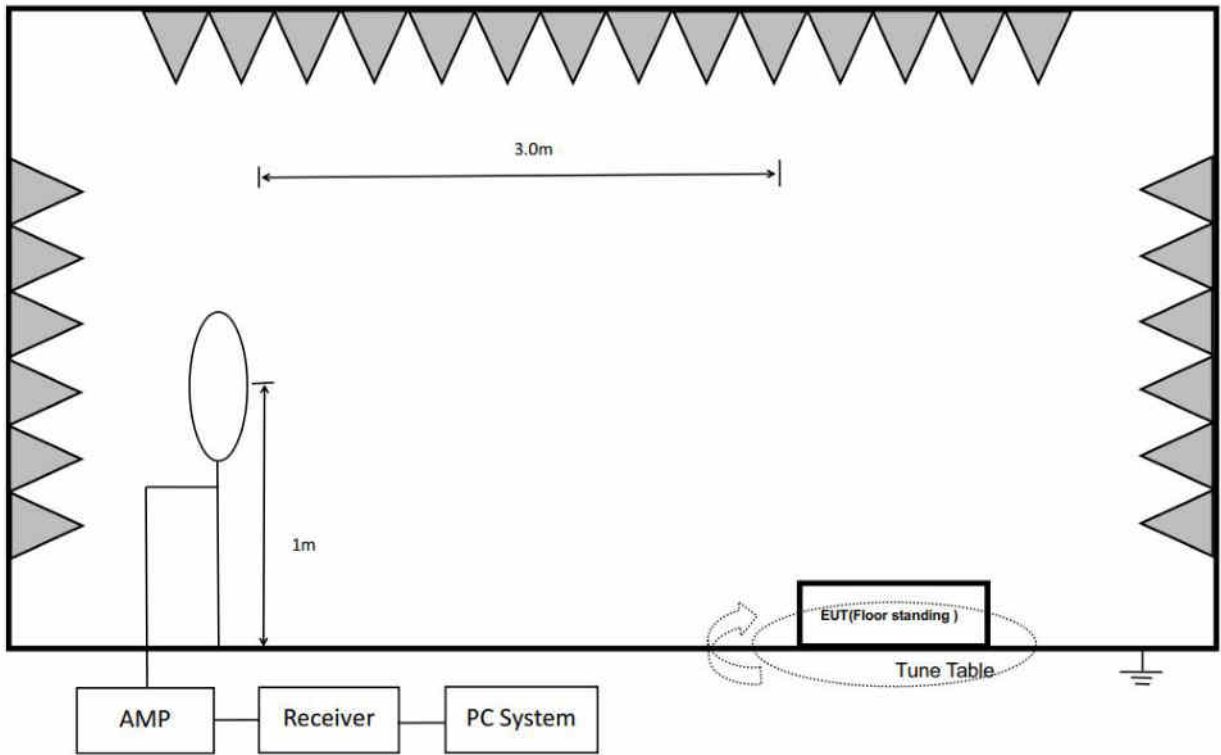

In 3m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

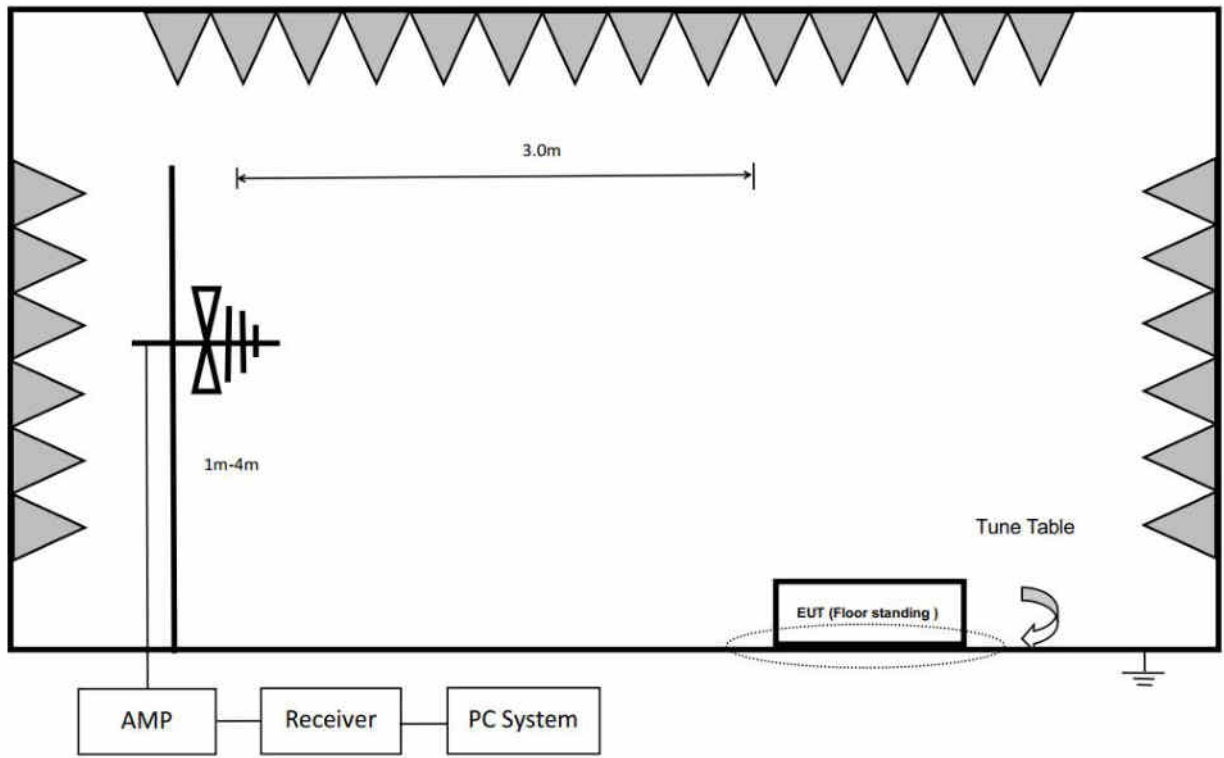

In 3m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

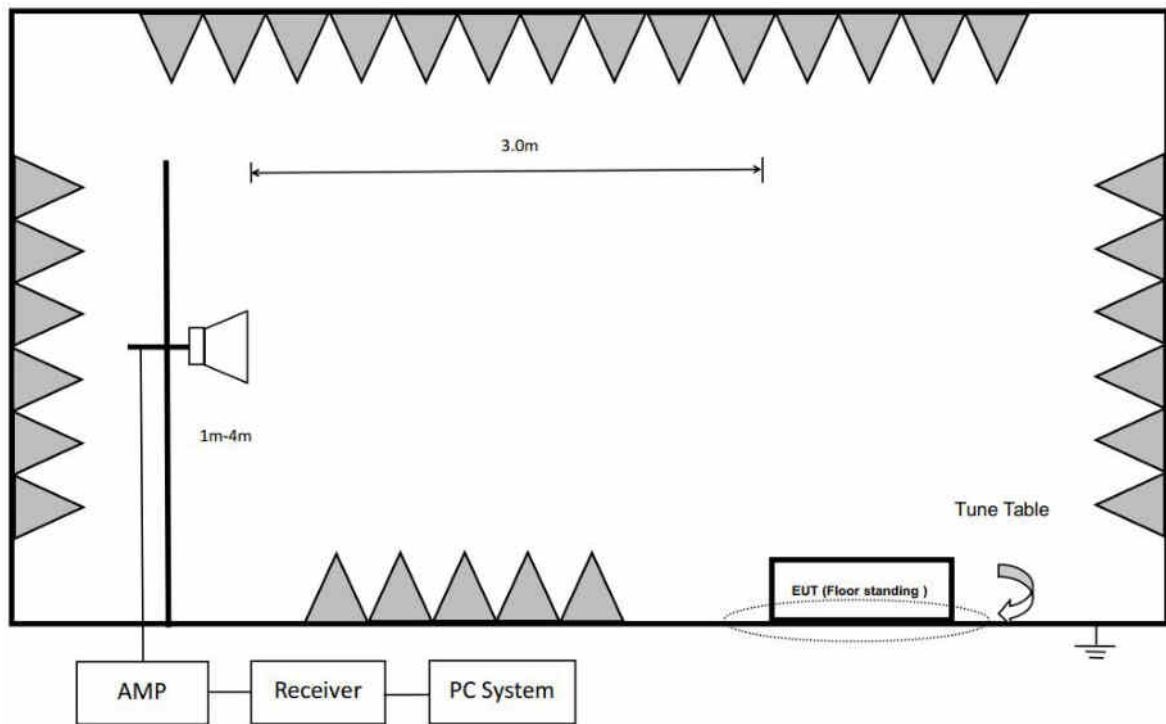

Note: For harmonic emissions test an appropriate high pass filter was inserted in the input port of AMP.

15.2. Limit

(1) FCC 15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6